



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 23021RAAEG
FCC ID : 2AFZZAAEG
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Nov. 21, 2022 ~ Dec. 19, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement	19
3.5 AC Conducted Emission Measurement.....	23
3.6 Antenna Requirements	25
4 LIST OF MEASURING EQUIPMENT	26
5 UNCERTAINTY OF EVALUATION	27
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2O2913E	Rev. 01	Initial issue of report	Jan. 06, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 5.56 dB at 5628.08 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.66 dB at 0.182 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	23021RAAEG
FCC ID	2AFZZAAEG
IMEI Code	Conducted: 865480060045901/865480060045919 Conduction/Radiation:865480060043807/865480060043815
HW Version	P1.1
SW Version	MIUI14
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 15.07 dBm / 0.0321 W 802.11n HT20 : 15.25 dBm / 0.0335 W 802.11n HT40 : 15.11 dBm / 0.0324 W 802.11ac VHT20: 15.28 dBm / 0.0337 W 802.11ac VHT40: 15.15 dBm / 0.0327 W 802.11ac VHT80: 14.41 dBm / 0.0276 W
99% Occupied Bandwidth	802.11a : 16.78 MHz 802.11ac VHT20 : 17.88 MHz 802.11ac VHT40 : 36.16 MHz 802.11ac VHT80 : 75.40 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	PIFA Antenna with gain -1.1 dBi

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11ac VHT20/VHT40 by referring to the higher output power.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01- KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable 1(Charging from Adapter) + Earphone
Remark: Radiated Test Cases were performance with Adapter, Earphone and USB Cable.	


Ch. #		U-NII-3 : 5745-5825 MHz			
		802.11a	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

For Conducted Emission

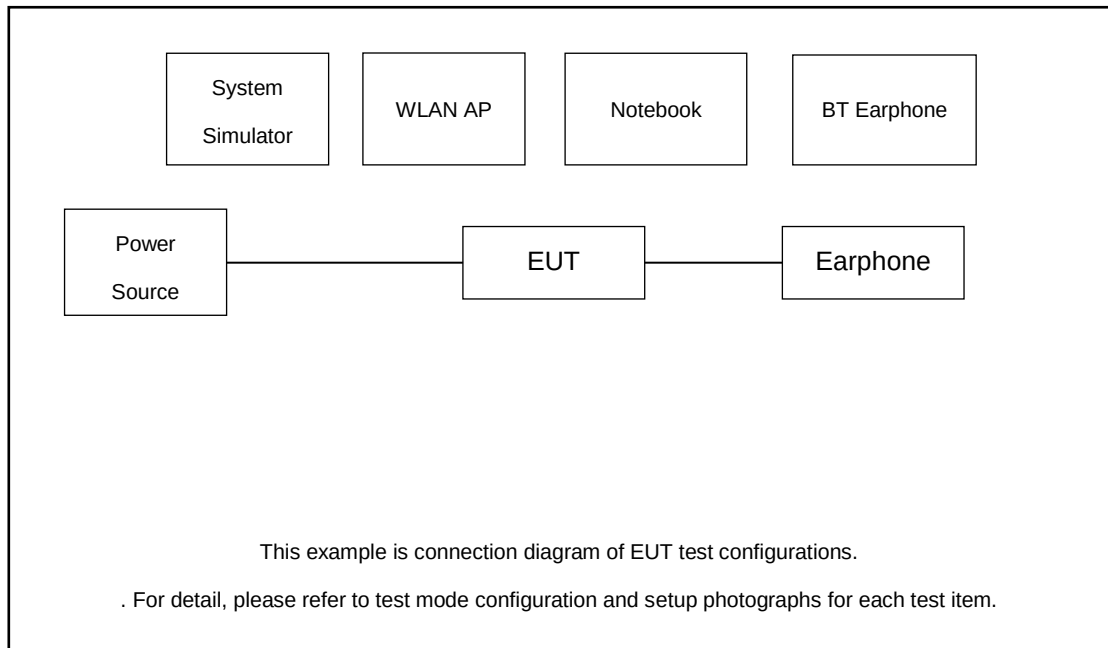

For Radiated Emission

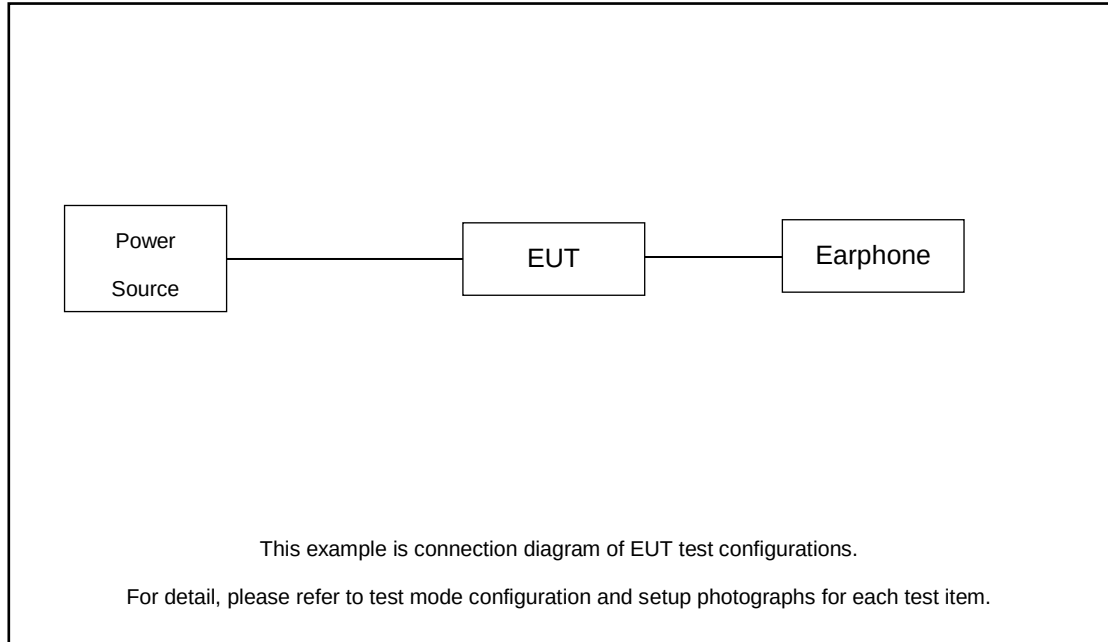

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m Unshielded AC I/P cable 1.8m
4.	WLAN ap	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.5 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. For 6dB BW, Set RBW = 100kHz.
For 26dB BW, Set RBW = approximately 1% of the emission bandwidth.
For 99% OBW, Set RBW = 1% to 5% of the OBW.
3. For 26dB BW, Set the VBW > RBW.
For 6dB BW & 99% OBW, Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

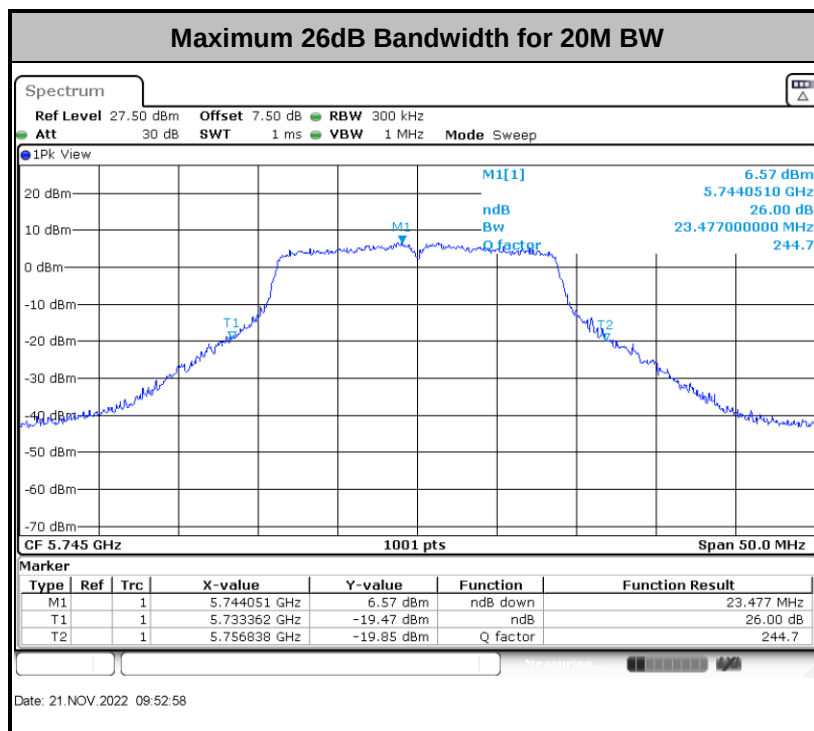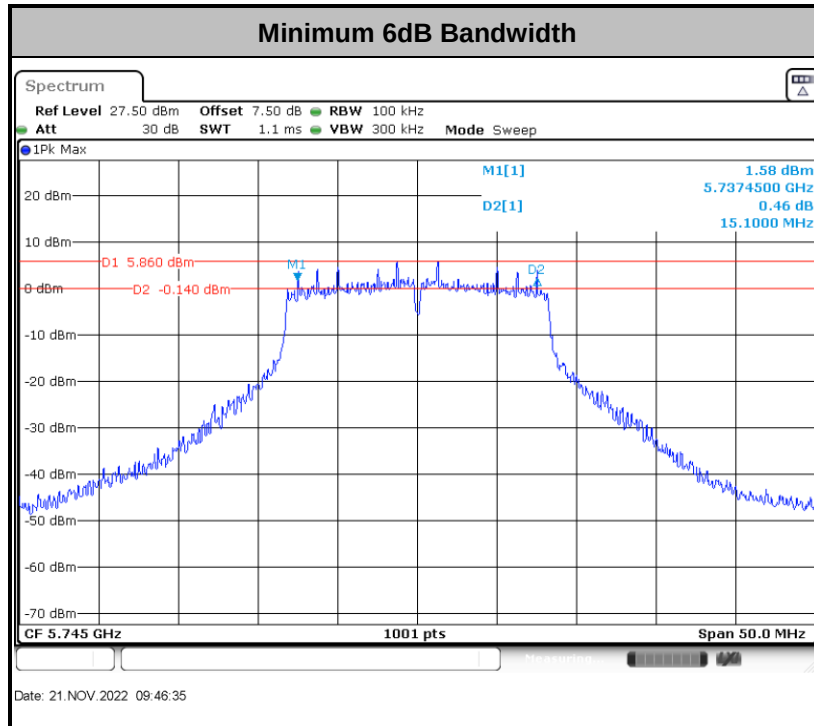

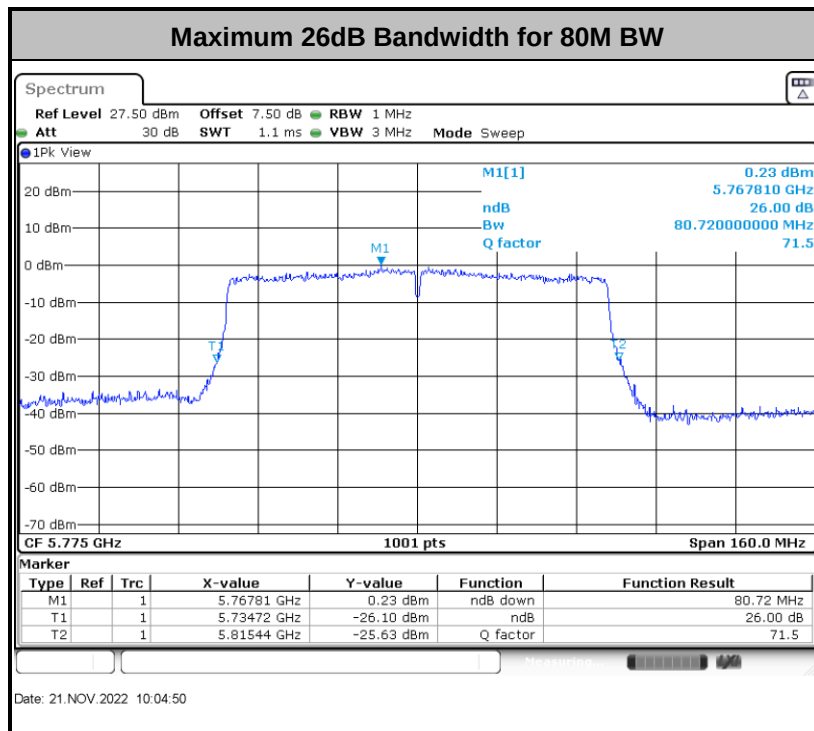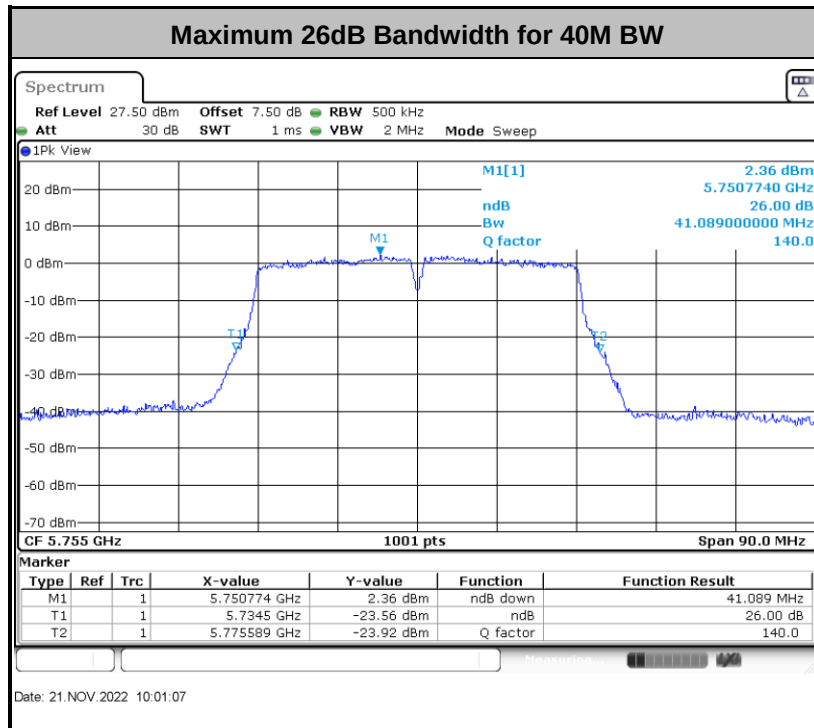

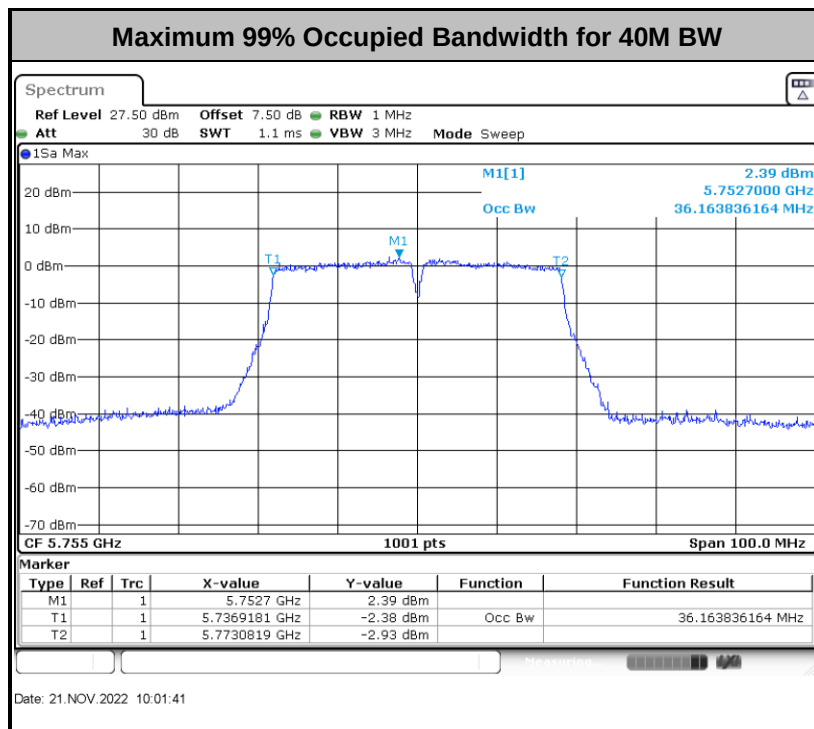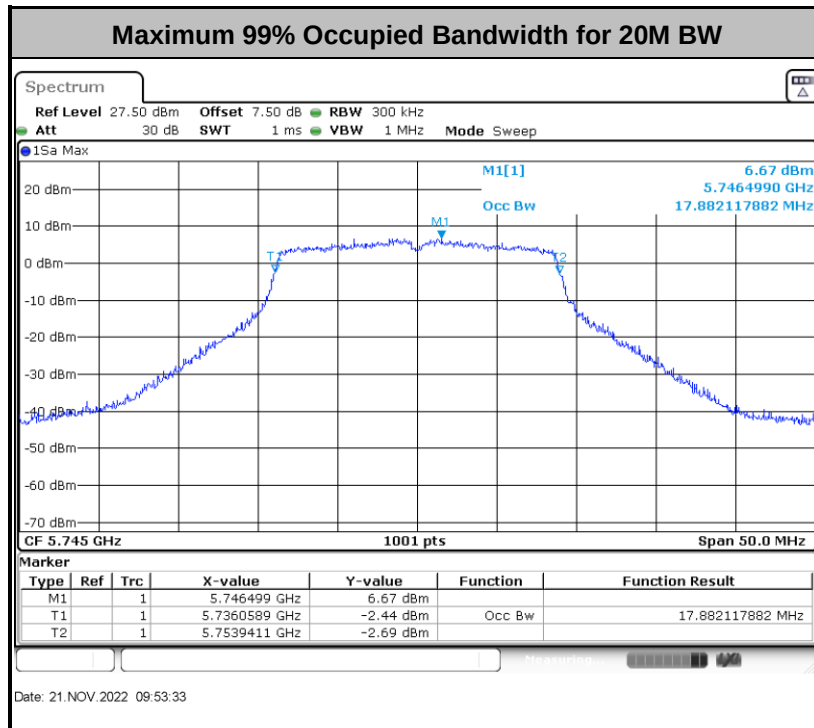

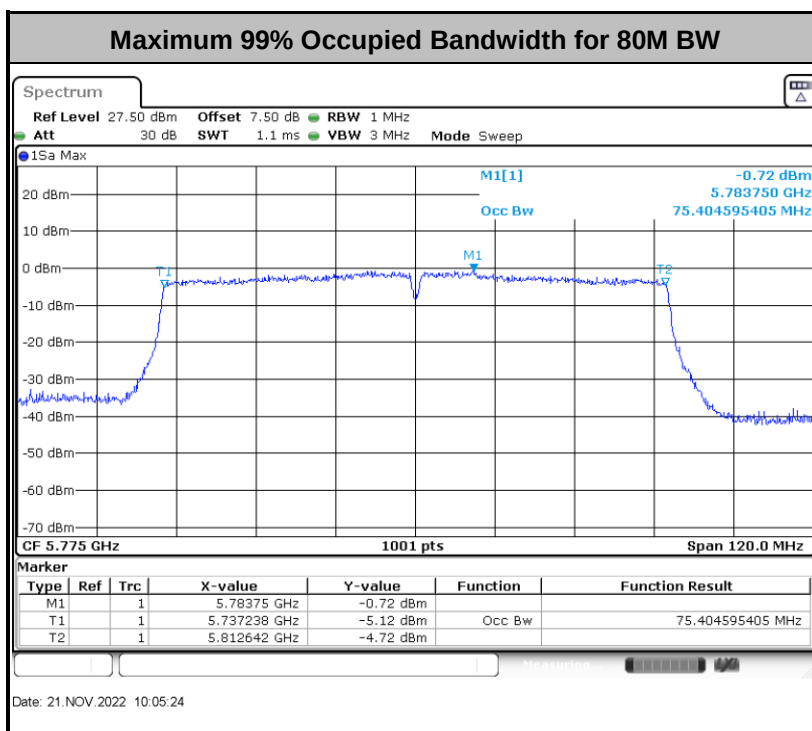

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

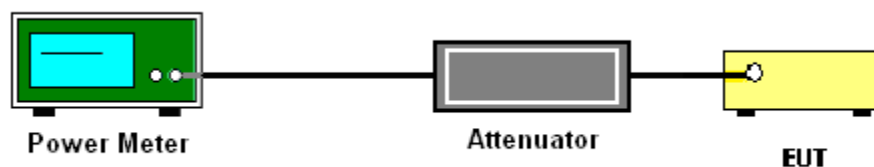

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

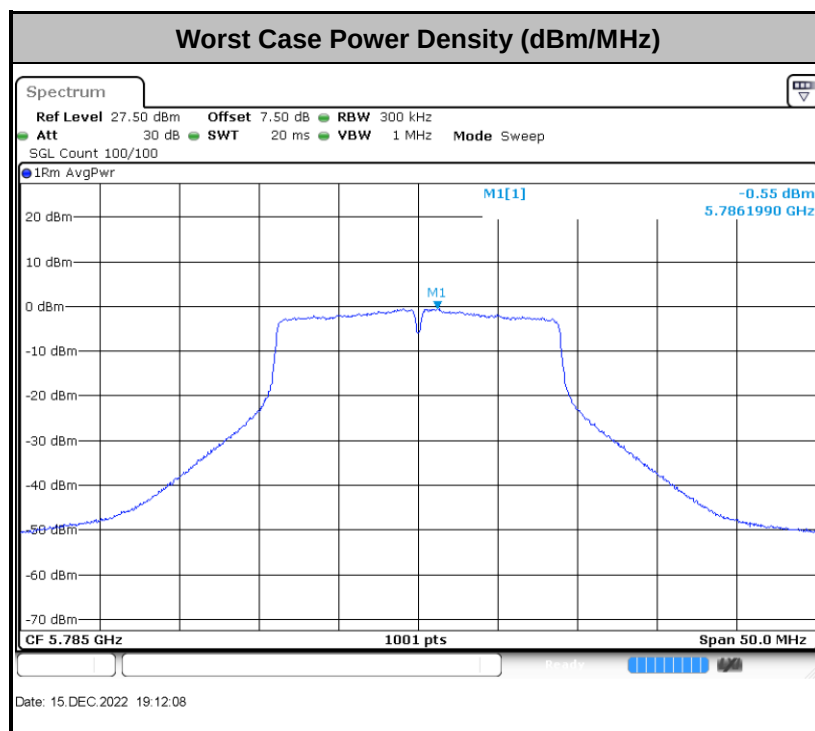

Note:

Average Power Density (1.67dBm/500KHz) = Measured value (-0.55dBm/300KHz) + RBW Factor (2.22dB).

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

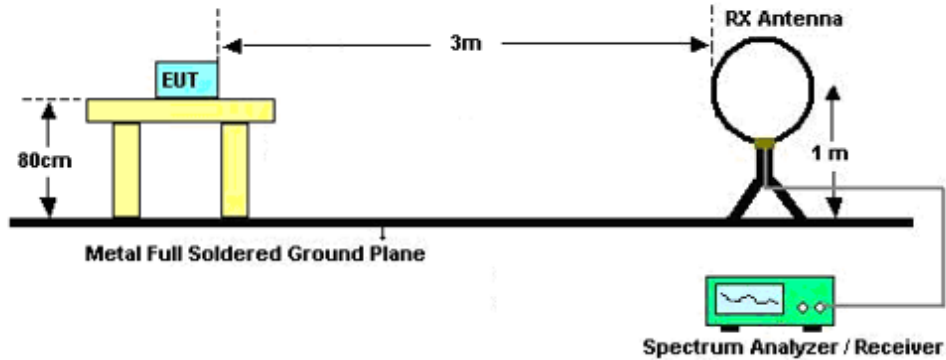

For radiated emissions from 30MHz to 1GHz

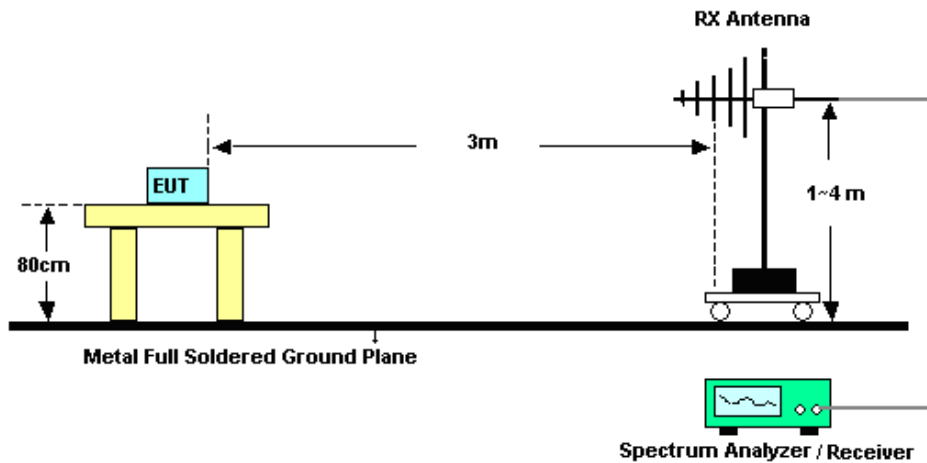

For radiated emissions above 1GHz

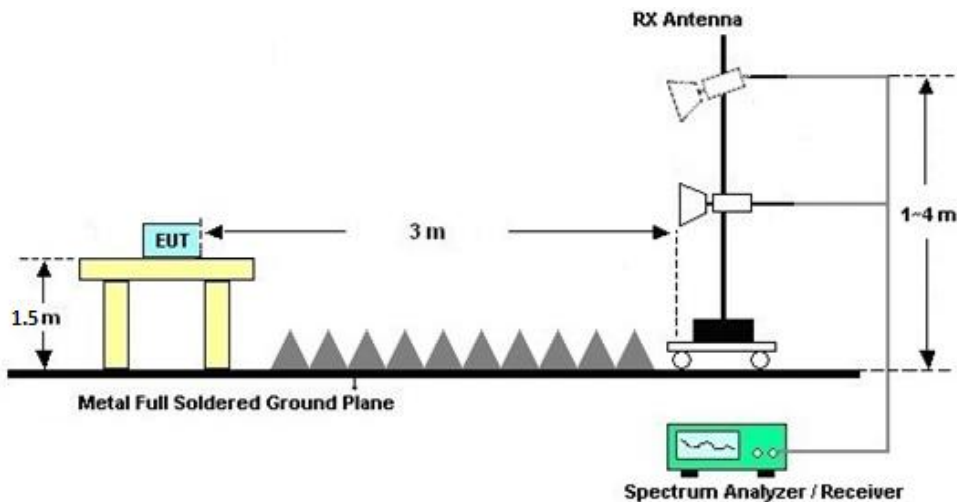



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

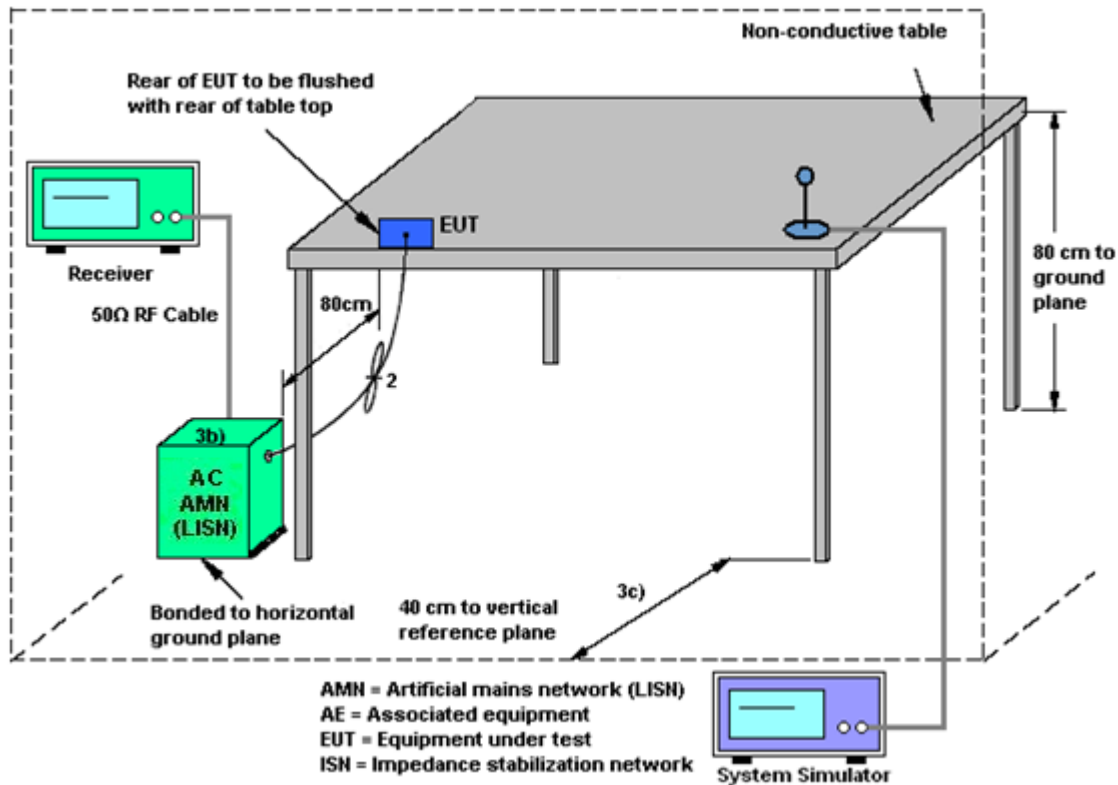

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Nov. 21, 2022~ Dec. 15, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Nov. 21, 2022~ Dec. 15, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Nov. 21, 2022~ Dec. 15, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 13, 2022	Dec. 19, 2022	Oct. 12, 2023	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 13, 2022	Dec. 19, 2022	Oct. 12, 2023	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Dec. 19, 2022	Oct. 15, 2023	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 24, 2022	Dec. 19, 2022	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 18, 2022	Dec. 19, 2022	Apr. 17, 2023	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2022	Dec. 19, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 11, 2022	Dec. 19, 2022	Jul. 10, 2023	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Dec. 19, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 05, 2022	Dec. 19, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2022	Dec. 19, 2022	Oct. 12, 2023	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 19, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 19, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 19, 2022	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Dec. 08, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Dec. 08, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Dec. 08, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Dec. 08, 2022	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.56 dB
Conducted Emissions	± 0.92 dB
Occupied Channel Bandwidth	± 0.03 %
Conducted Power Spectral Density	± 0.54 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.78dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jacob Zhang	Temperature:	21~25	°C
Test Date:	2022/11/21~2022/12/15	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	16.73	-	22.98	-	15.10	-	0.5	Pass
11a	6Mbps	1	157	5785	16.78	-	22.98	-	15.50	-	0.5	Pass
11a	6Mbps	1	165	5825	16.68	-	22.33	-	15.80	-	0.5	Pass
VHT20	MCS0	1	149	5745	17.88	-	23.48	-	15.65	-	0.5	Pass
VHT20	MCS0	1	157	5785	17.88	-	23.43	-	15.10	-	0.5	Pass
VHT20	MCS0	1	165	5825	17.88	-	22.93	-	15.45	-	0.5	Pass
VHT40	MCS0	1	151	5755	36.16	-	41.09	-	35.73	-	0.5	Pass
VHT40	MCS0	1	159	5795	36.16	-	41.00	-	35.64	-	0.5	Pass
VHT80	MCS0	1	155	5775	75.40	-	80.72	-	75.20	-	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	14.30	-		30.00	-	-1.10	-	Pass
11a	6Mbps	1	157	5785	15.07	-		30.00	-	-1.10	-	Pass
11a	6Mbps	1	165	5825	14.92	-		30.00	-	-1.10	-	Pass
HT20	MCS0	1	149	5745	14.43	-		30.00	-	-1.10	-	Pass
HT20	MCS0	1	157	5785	15.25	-		30.00	-	-1.10	-	Pass
HT20	MCS0	1	165	5825	14.71	-		30.00	-	-1.10	-	Pass
HT40	MCS0	1	151	5755	14.28	-		30.00	-	-1.10	-	Pass
HT40	MCS0	1	159	5795	15.11	-		30.00	-	-1.10	-	Pass
VHT20	MCS0	1	149	5745	14.46	-		30.00	-	-1.10	-	Pass
VHT20	MCS0	1	157	5785	15.28	-		30.00	-	-1.10	-	Pass
VHT20	MCS0	1	165	5825	14.82	-		30.00	-	-1.10	-	Pass
VHT40	MCS0	1	151	5755	14.33	-		30.00	-	-1.10	-	Pass
VHT40	MCS0	1	159	5795	15.15	-		30.00	-	-1.10	-	Pass
VHT80	MCS0	1	155	5775	14.41	-		30.00	-	-1.10	-	Pass


TEST RESULTS DATA
Power Spectral Density

U-NII-3 single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	2.22	-	0.81	-		30.00	-	-1.10	-	Pass
11a	6Mbps	1	157	5785	2.22	-	1.07	-		30.00	-	-1.10	-	Pass
11a	6Mbps	1	165	5825	2.22	-	1.20	-		30.00	-	-1.10	-	Pass
VHT20	MCS0	1	149	5745	2.22	-	0.21	-		30.00	-	-1.10	-	Pass
VHT20	MCS0	1	157	5785	2.22	-	1.67	-		30.00	-	-1.10	-	Pass
VHT20	MCS0	1	165	5825	2.22	-	1.10	-		30.00	-	-1.10	-	Pass
VHT40	MCS0	1	151	5755	2.22	-	-2.97	-		30.00	-	-1.10	-	Pass
VHT40	MCS0	1	159	5795	2.22	-	-2.14	-		30.00	-	-1.10	-	Pass
VHT80	MCS0	1	155	5775	2.22	-	-5.61	-		30.00	-	-1.10	-	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

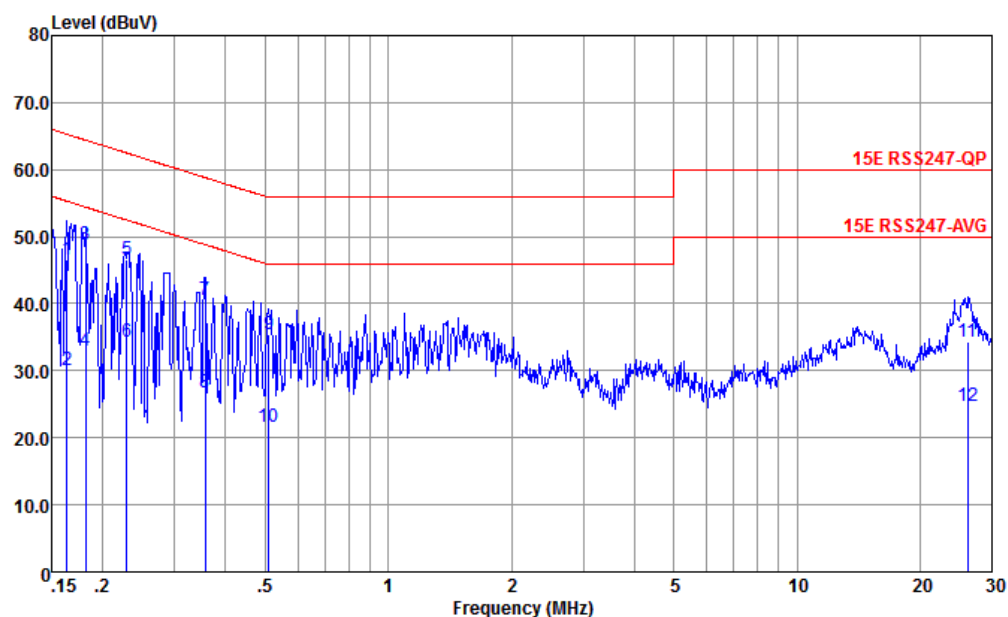


Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.163	46.68	-18.62	65.30	36.19	0.06	10.43	QP
2	0.163	30.08	-25.22	55.30	19.59	0.06	10.43	Average
3 *	0.182	48.76	-15.66	64.42	38.30	0.04	10.42	QP
4	0.182	33.06	-21.36	54.42	22.60	0.04	10.42	Average
5	0.229	46.63	-15.85	62.48	36.20	0.03	10.40	QP
6	0.229	34.33	-18.15	52.48	23.90	0.03	10.40	Average
7	0.356	40.55	-18.28	58.83	30.20	0.03	10.32	QP
8	0.356	26.65	-22.18	48.83	16.30	0.03	10.32	Average
9	0.510	35.37	-20.63	56.00	25.19	-0.03	10.21	QP
10	0.510	21.67	-24.33	46.00	11.49	-0.03	10.21	Average
11	26.139	34.42	-25.58	60.00	23.20	-0.34	11.56	QP
12	26.139	24.82	-25.18	50.00	13.60	-0.34	11.56	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

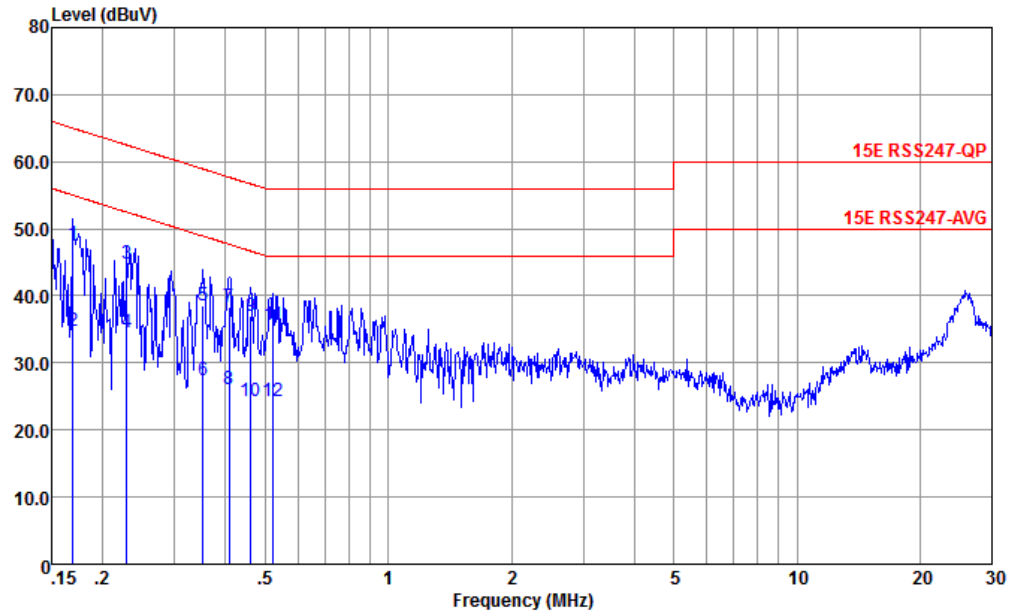

Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.169	47.66	-17.33	64.99	37.19	0.04	10.43	QP
2	0.169	34.76	-20.23	54.99	24.29	0.04	10.43	Average
3	0.229	44.71	-17.77	62.48	34.29	0.02	10.40	QP
4	0.229	34.61	-17.87	52.48	24.19	0.02	10.40	Average
5	0.352	38.46	-20.45	58.91	28.20	-0.06	10.32	QP
6	0.352	27.46	-21.45	48.91	17.20	-0.06	10.32	Average
7	0.408	38.42	-19.26	57.68	28.20	-0.07	10.29	QP
8	0.408	26.12	-21.56	47.68	15.90	-0.07	10.29	Average
9	0.461	36.97	-19.70	56.67	26.81	-0.08	10.24	QP
10	0.461	24.37	-22.30	46.67	14.21	-0.08	10.24	Average
11	0.524	35.72	-20.28	56.00	25.60	-0.08	10.20	QP
12	0.524	24.22	-21.78	46.00	14.10	-0.08	10.20	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C. Radiated Spurious Emission

Radiated Spurious Emission Test Modes




Mode	Band	Band (GHz)	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	U-NII-3	5.725-5.85	802.11a	149	5745	6Mbps	-
Mode 2	U-NII-3	5.725-5.85	802.11a	157	5785	6Mbps	-
Mode 3	U-NII-3	5.725-5.85	802.11a	165	5825	6Mbps	-
Mode 4	U-NII-3	5.725-5.85	802.11ac VHT20	149	5745	MCS0	-
Mode 5	U-NII-3	5.725-5.85	802.11ac VHT20	157	5785	MCS0	-
Mode 6	U-NII-3	5.725-5.85	802.11ac VHT20	165	5825	MCS0	-
Mode 7	U-NII-3	5.725-5.85	802.11ac VHT40	151	5755	MCS0	-
Mode 8	U-NII-3	5.725-5.85	802.11ac VHT40	159	5795	MCS0	-
Mode 9	U-NII-3	5.725-5.85	802.11ac VHT80	155	5775	MCS0	-
Mode 10	U-NII-3	5.725-5.85	802.11ac VHT40	159	5795	MCS0	LF






Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	149	5641.76	55.25	68.30	-13.05	V	PEAK	Pass	Band Edge
	802.11a	149	11490.00	46.58	74.00	-27.42	H	PEAK	Pass	Harmonic
2	802.11a	157	-	-	-	-	-	-	-	Band Edge
	802.11a	157	11570.00	46.56	74.00	-27.44	H	PEAK	Pass	Harmonic
3	802.11a	165	5925.50	55.47	68.30	-12.83	V	PEAK	Pass	Band Edge
	802.11a	165	11650.00	46.21	74.00	-27.79	V	PEAK	Pass	Harmonic
4	802.11ac VHT20	149	5604.35	55.04	68.30	-13.26	H	PEAK	Pass	Band Edge
	802.11ac VHT20	149	11490.00	46.25	74.00	-27.75	V	PEAK	Pass	Harmonic
5	802.11ac VHT20	157	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT20	157	11570.00	46.05	74.00	-27.95	H	PEAK	Pass	Harmonic
6	802.11ac VHT20	165	5933.88	55.57	68.30	-12.73	H	PEAK	Pass	Band Edge
	802.11ac VHT20	165	11650.00	46.41	74.00	-27.59	H	PEAK	Pass	Harmonic
7	802.11ac VHT40	151	5938.11	56.41	68.30	-11.89	H	PEAK	Pass	Band Edge
	802.11ac VHT40	151	11510.00	46.88	74.00	-27.12	V	PEAK	Pass	Harmonic
8	802.11ac VHT40	159	5628.08	62.74	68.30	-5.56	V	PEAK	Pass	Band Edge
	802.11ac VHT40	159	11590	46.12	74	-27.88	V	PEAK	Pass	Harmonic
9	802.11ac VHT80	155	5637.98	56.79	68.30	-11.51	H	PEAK	Pass	Band Edge
	802.11ac VHT80	155	11550.00	46.89	74.00	-27.11	V	PEAK	Pass	Harmonic
10	802.11ac VHT40	159	832.19	35.39	46.00	-10.61	H	Peak	Pass	LF

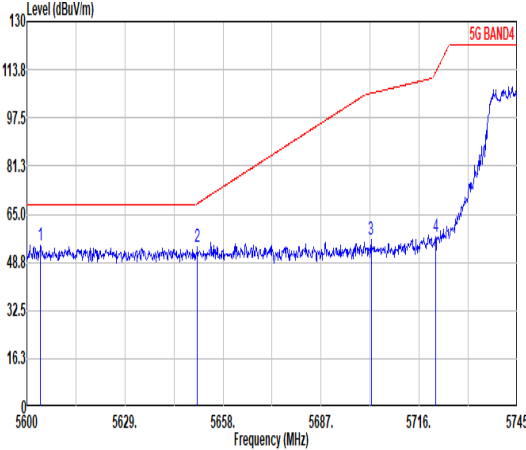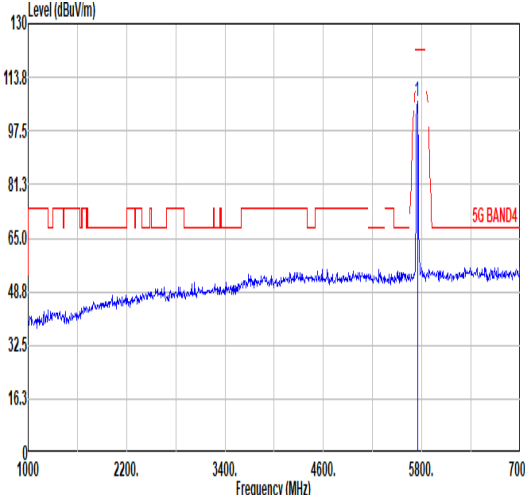
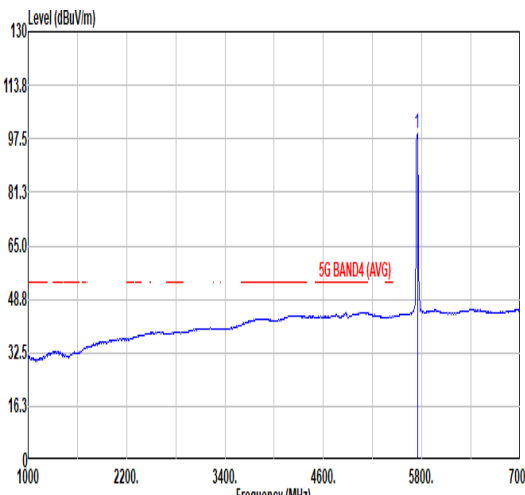


		1																																																																																																																													
Mode	Band Edge																																																																																																																														
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																														
Pol.	Horizontal										Fundamental																																																																																																																				
Peak																																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5604.06</td><td>54.52</td><td>68.30</td><td>-13.78</td><td>41.74</td><td>34.61</td><td>10.25</td><td>32.08</td><td>0.00</td><td>100</td><td>49 PEAK</td></tr><tr><td>2 5650.46</td><td>53.90</td><td>68.64</td><td>-14.74</td><td>41.16</td><td>34.55</td><td>10.28</td><td>32.09</td><td>0.00</td><td>100</td><td>49 PEAK</td></tr><tr><td>3 5701.79</td><td>56.36</td><td>105.00</td><td>-49.44</td><td>43.57</td><td>34.51</td><td>10.33</td><td>32.05</td><td>0.00</td><td>100</td><td>49 PEAK</td></tr><tr><td>4 5720.79</td><td>57.32</td><td>112.69</td><td>-55.37</td><td>44.48</td><td>34.53</td><td>10.34</td><td>32.03</td><td>0.00</td><td>100</td><td>49 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5604.06	54.52	68.30	-13.78	41.74	34.61	10.25	32.08	0.00	100	49 PEAK	2 5650.46	53.90	68.64	-14.74	41.16	34.55	10.28	32.09	0.00	100	49 PEAK	3 5701.79	56.36	105.00	-49.44	43.57	34.51	10.33	32.05	0.00	100	49 PEAK	4 5720.79	57.32	112.69	-55.37	44.48	34.53	10.34	32.03	0.00	100	49 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5745.00</td><td>106.67</td><td>-----</td><td>-----</td><td>93.77</td><td>34.55</td><td>10.36</td><td>32.01</td><td>0.00</td><td>100</td><td>49 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5745.00	106.67	-----	-----	93.77	34.55	10.36	32.01	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																					
1 5604.06	54.52	68.30	-13.78	41.74	34.61	10.25	32.08	0.00	100	49 PEAK																																																																																																																					
2 5650.46	53.90	68.64	-14.74	41.16	34.55	10.28	32.09	0.00	100	49 PEAK																																																																																																																					
3 5701.79	56.36	105.00	-49.44	43.57	34.51	10.33	32.05	0.00	100	49 PEAK																																																																																																																					
4 5720.79	57.32	112.69	-55.37	44.48	34.53	10.34	32.03	0.00	100	49 PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																					
1 5745.00	106.67	-----	-----	93.77	34.55	10.36	32.01	0.00	100	49 PEAK																																																																																																																					
Avg	Blank																																																																																																																														
											<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5745.00</td><td>98.86</td><td>-----</td><td>-----</td><td>85.96</td><td>34.55</td><td>10.36</td><td>32.01</td><td>0.00</td><td>100</td><td>49 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5745.00	98.86	-----	-----	85.96	34.55	10.36	32.01	0.00	100	49 AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																					
1 5745.00	98.86	-----	-----	85.96	34.55	10.36	32.01	0.00	100	49 AVERAGE																																																																																																																					

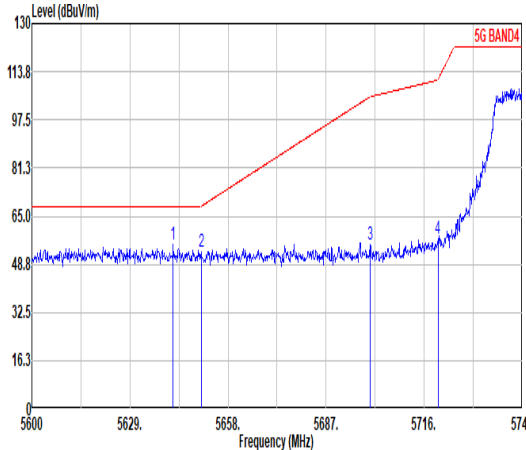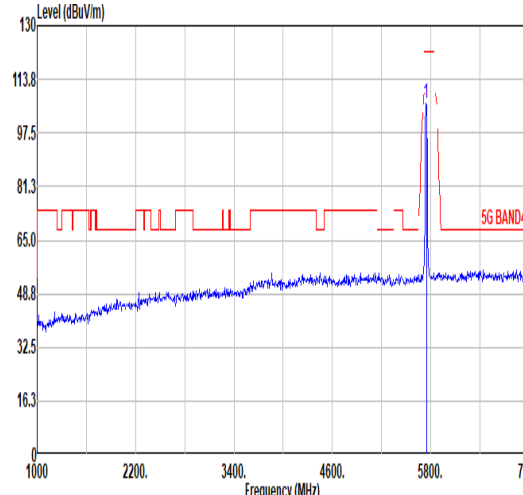
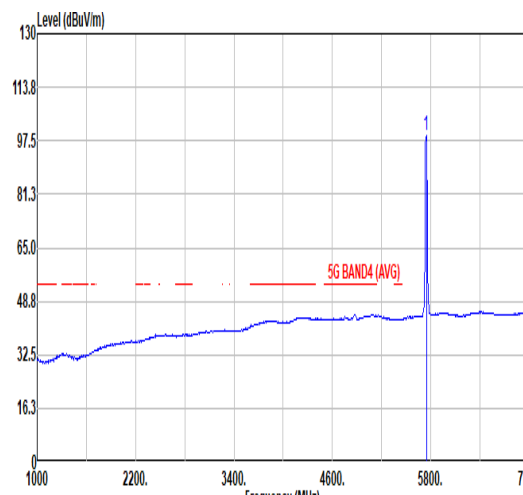


		1																																																																																																																																							
Mode	Band Edge																																																																																																																																								
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																								
Pol.	Vertical										Fundamental																																																																																																																														
Peak																																																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5641.76</td><td>55.25</td><td>68.30</td><td>-13.05</td><td>42.51</td><td>34.56</td><td>10.28</td><td>32.10</td><td>0.00</td><td>337</td><td>205</td><td>PEAK</td></tr><tr><td>2</td><td>5650.03</td><td>53.10</td><td>68.32</td><td>-15.22</td><td>40.36</td><td>34.55</td><td>10.28</td><td>32.09</td><td>0.00</td><td>337</td><td>205</td><td>PEAK</td></tr><tr><td>3</td><td>5700.05</td><td>55.19</td><td>105.31</td><td>-50.12</td><td>42.41</td><td>34.51</td><td>10.32</td><td>32.05</td><td>0.00</td><td>337</td><td>205</td><td>PEAK</td></tr><tr><td>4</td><td>5720.06</td><td>57.55</td><td>111.04</td><td>-53.49</td><td>44.71</td><td>34.53</td><td>10.34</td><td>32.03</td><td>0.00</td><td>337</td><td>205</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5641.76	55.25	68.30	-13.05	42.51	34.56	10.28	32.10	0.00	337	205	PEAK	2	5650.03	53.10	68.32	-15.22	40.36	34.55	10.28	32.09	0.00	337	205	PEAK	3	5700.05	55.19	105.31	-50.12	42.41	34.51	10.32	32.05	0.00	337	205	PEAK	4	5720.06	57.55	111.04	-53.49	44.71	34.53	10.34	32.03	0.00	337	205	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>106.61</td><td>-----</td><td>-----</td><td>93.72</td><td>34.55</td><td>10.36</td><td>32.02</td><td>0.00</td><td>337</td><td>205</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	106.61	-----	-----	93.72	34.55	10.36	32.02	0.00	337	205
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	5641.76	55.25	68.30	-13.05	42.51	34.56	10.28	32.10	0.00	337	205	PEAK																																																																																																																													
2	5650.03	53.10	68.32	-15.22	40.36	34.55	10.28	32.09	0.00	337	205	PEAK																																																																																																																													
3	5700.05	55.19	105.31	-50.12	42.41	34.51	10.32	32.05	0.00	337	205	PEAK																																																																																																																													
4	5720.06	57.55	111.04	-53.49	44.71	34.53	10.34	32.03	0.00	337	205	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	5745.00	106.61	-----	-----	93.72	34.55	10.36	32.02	0.00	337	205	PEAK																																																																																																																													
Avg	Blank																																																																																																																																								
											<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>98.94</td><td>-----</td><td>-----</td><td>86.04</td><td>34.55</td><td>10.36</td><td>32.01</td><td>0.00</td><td>337</td><td>205</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	98.94	-----	-----	86.04	34.55	10.36	32.01	0.00	337	205	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	5745.00	98.94	-----	-----	86.04	34.55	10.36	32.01	0.00	337	205	AVERAGE																																																																																																																													


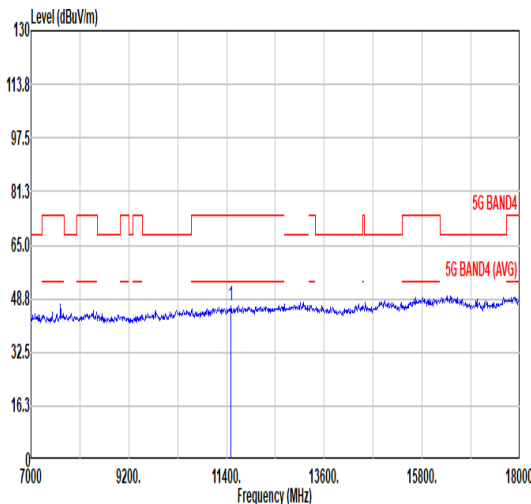
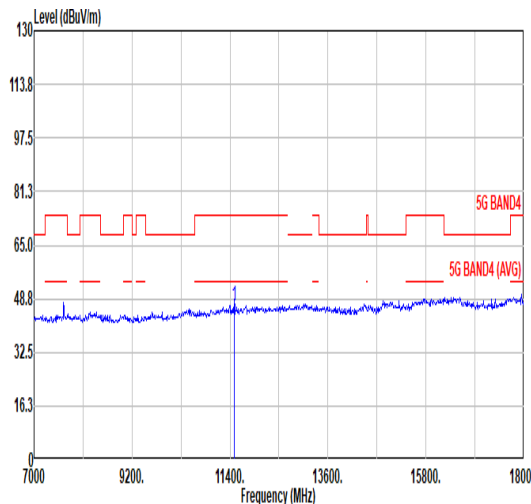


Mode	1																																																																																																			
	Harmonic																																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>46.58</td><td>74.00</td><td>-27.42</td><td>54.90</td><td>38.29</td><td>14.91</td><td>61.52</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	46.58	74.00	-27.42	54.90	38.29	14.91	61.52	0.00	300	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>46.37</td><td>74.00</td><td>-27.63</td><td>54.69</td><td>38.29</td><td>14.91</td><td>61.52</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11490.00	46.37	74.00	-27.63	54.69	38.29	14.91	61.52	0.00	100	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	11490.00	46.58	74.00	-27.42	54.90	38.29	14.91	61.52	0.00	300	0	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	11490.00	46.37	74.00	-27.63	54.69	38.29	14.91	61.52	0.00	100	0	PEAK																																																																																								


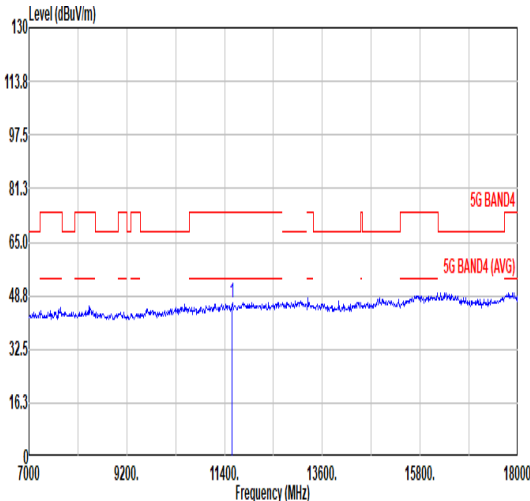
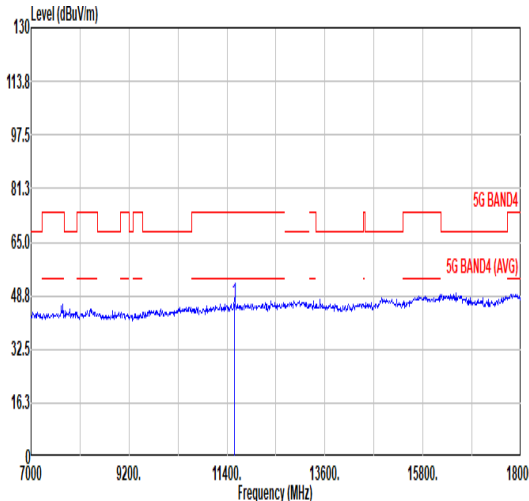


Mode	2																																																																													
	Harmonic																																																																													
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																													
Pol.	Horizontal						Vertical																																																																							
Peak Avg																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>54.72</td><td>38.36</td><td>14.97</td><td>61.49</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	1	11570.00	46.56	74.00	-27.44	54.72	38.36	14.97	61.49	0.00	300	0	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>46.50</td><td>74.00</td><td>-27.50</td><td>54.66</td><td>38.36</td><td>14.97</td><td>61.49</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	1	11570.00	46.50	74.00	-27.50	54.66	38.36	14.97	61.49	0.00	100	0	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																					
1	11570.00	46.56	74.00	-27.44	54.72	38.36	14.97	61.49	0.00	300	0	PEAK																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																					
1	11570.00	46.50	74.00	-27.50	54.66	38.36	14.97	61.49	0.00	100	0	PEAK																																																																		
<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>54.72</td><td>38.36</td><td>14.97</td><td>61.49</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11570.00	46.56	74.00	-27.44	54.72	38.36	14.97	61.49	0.00	300	0	PEAK	<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>46.50</td><td>74.00</td><td>-27.50</td><td>54.66</td><td>38.36</td><td>14.97</td><td>61.49</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11570.00	46.50	74.00	-27.50	54.66	38.36	14.97	61.49	0.00	100	0	PEAK																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																			
1	11570.00	46.56	74.00	-27.44	54.72	38.36	14.97	61.49	0.00	300	0	PEAK																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																			
1	11570.00	46.50	74.00	-27.50	54.66	38.36	14.97	61.49	0.00	100	0	PEAK																																																																		

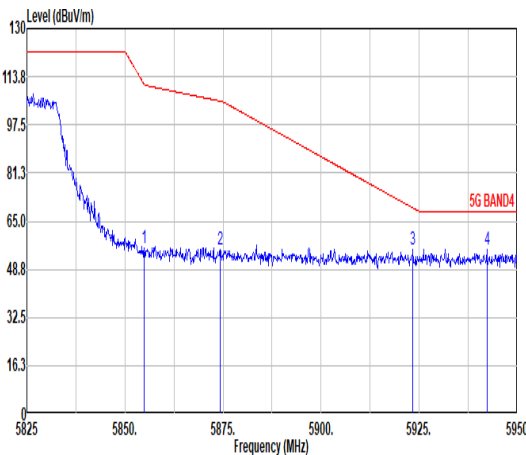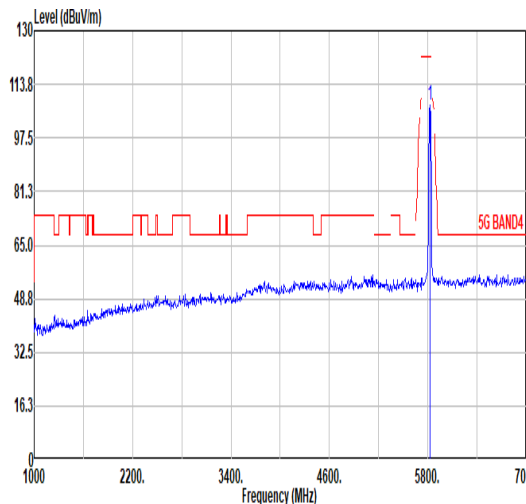
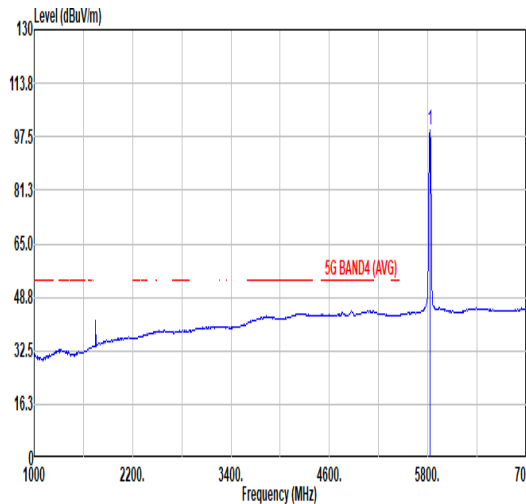


		3																																																																																		
Mode	Band Edge																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																			
Pol.	Horizontal																																																																																			
Peak																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.88</td><td>55.88</td><td>111.18</td><td>-55.30</td><td>42.53</td><td>34.84</td><td>10.45</td><td>31.94</td><td>0.00</td><td>105</td><td>102</td><td>PEAK</td></tr><tr><td>2</td><td>5874.25</td><td>55.64</td><td>105.51</td><td>-49.87</td><td>42.21</td><td>34.91</td><td>10.47</td><td>31.95</td><td>0.00</td><td>105</td><td>102</td><td>PEAK</td></tr><tr><td>3</td><td>5923.38</td><td>55.52</td><td>69.50</td><td>-13.98</td><td>41.89</td><td>35.11</td><td>10.51</td><td>31.99</td><td>0.00</td><td>105</td><td>102</td><td>PEAK</td></tr><tr><td>4</td><td>5942.25</td><td>55.45</td><td>68.30</td><td>-12.85</td><td>41.75</td><td>35.18</td><td>10.53</td><td>32.01</td><td>0.00</td><td>105</td><td>102</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.88	55.88	111.18	-55.30	42.53	34.84	10.45	31.94	0.00	105	102	PEAK	2	5874.25	55.64	105.51	-49.87	42.21	34.91	10.47	31.95	0.00	105	102	PEAK	3	5923.38	55.52	69.50	-13.98	41.89	35.11	10.51	31.99	0.00	105	102	PEAK	4	5942.25	55.45	68.30	-12.85	41.75	35.18	10.53	32.01	0.00	105	102
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																										
1	5854.88	55.88	111.18	-55.30	42.53	34.84	10.45	31.94	0.00	105	102	PEAK																																																																								
2	5874.25	55.64	105.51	-49.87	42.21	34.91	10.47	31.95	0.00	105	102	PEAK																																																																								
3	5923.38	55.52	69.50	-13.98	41.89	35.11	10.51	31.99	0.00	105	102	PEAK																																																																								
4	5942.25	55.45	68.30	-12.85	41.75	35.18	10.53	32.01	0.00	105	102	PEAK																																																																								
Fundamental																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>107.45</td><td>-----</td><td>-----</td><td>94.22</td><td>34.74</td><td>10.43</td><td>31.94</td><td>0.00</td><td>105</td><td>102</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	107.45	-----	-----	94.22	34.74	10.43	31.94	0.00	105	102	PEAK																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																										
1	5825.00	107.45	-----	-----	94.22	34.74	10.43	31.94	0.00	105	102	PEAK																																																																								
Avg	Blank																																																																																			
																																																																																				
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>99.43</td><td>-----</td><td>-----</td><td>86.23</td><td>34.72</td><td>10.43</td><td>31.95</td><td>0.00</td><td>105</td><td>102</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	99.43	-----	-----	86.23	34.72	10.43	31.95	0.00	105	102	AVERAGE																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																										
1	5825.00	99.43	-----	-----	86.23	34.72	10.43	31.95	0.00	105	102	AVERAGE																																																																								

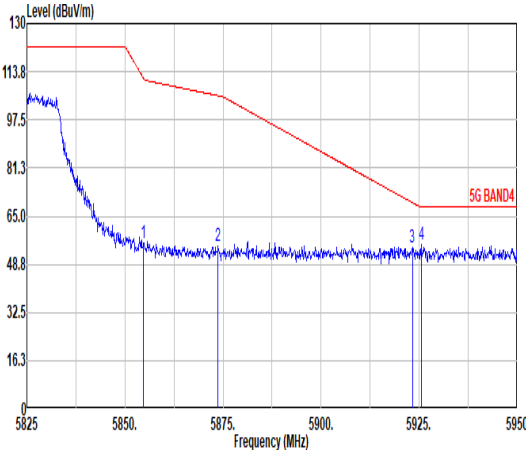
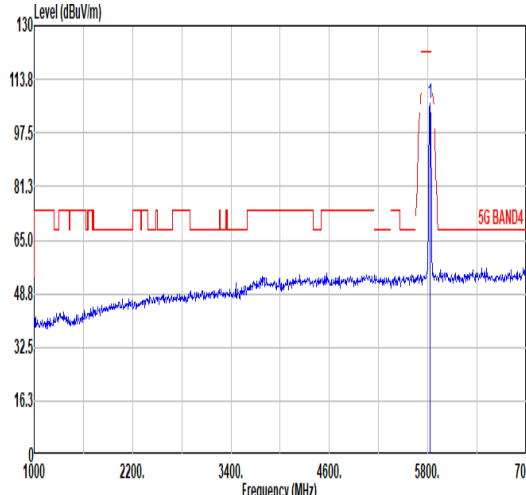
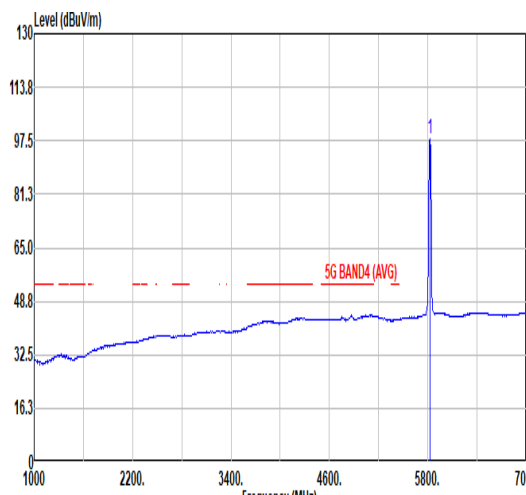


		3																																																																																		
Mode	Band Edge																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																			
Pol.	Vertical																																																																																			
Peak																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.75</td><td>56.05</td><td>111.47</td><td>-55.42</td><td>42.70</td><td>34.84</td><td>10.45</td><td>31.94</td><td>0.00</td><td>385</td><td>217</td><td>PEAK</td></tr><tr><td>2</td><td>5873.75</td><td>54.74</td><td>105.65</td><td>-50.91</td><td>41.31</td><td>34.91</td><td>10.47</td><td>31.95</td><td>0.00</td><td>385</td><td>217</td><td>PEAK</td></tr><tr><td>3</td><td>5923.25</td><td>54.35</td><td>69.59</td><td>-15.24</td><td>40.72</td><td>35.11</td><td>10.51</td><td>31.99</td><td>0.00</td><td>385</td><td>217</td><td>PEAK</td></tr><tr><td>4</td><td>5925.50</td><td>55.47</td><td>68.30</td><td>-12.83</td><td>41.82</td><td>35.12</td><td>10.52</td><td>31.99</td><td>0.00</td><td>385</td><td>217</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.75	56.05	111.47	-55.42	42.70	34.84	10.45	31.94	0.00	385	217	PEAK	2	5873.75	54.74	105.65	-50.91	41.31	34.91	10.47	31.95	0.00	385	217	PEAK	3	5923.25	54.35	69.59	-15.24	40.72	35.11	10.51	31.99	0.00	385	217	PEAK	4	5925.50	55.47	68.30	-12.83	41.82	35.12	10.52	31.99	0.00	385	217
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																										
1	5854.75	56.05	111.47	-55.42	42.70	34.84	10.45	31.94	0.00	385	217	PEAK																																																																								
2	5873.75	54.74	105.65	-50.91	41.31	34.91	10.47	31.95	0.00	385	217	PEAK																																																																								
3	5923.25	54.35	69.59	-15.24	40.72	35.11	10.51	31.99	0.00	385	217	PEAK																																																																								
4	5925.50	55.47	68.30	-12.83	41.82	35.12	10.52	31.99	0.00	385	217	PEAK																																																																								
Fundamental																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>106.39</td><td>-----</td><td>-----</td><td>93.19</td><td>34.72</td><td>10.43</td><td>31.95</td><td>0.00</td><td>385</td><td>217</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	106.39	-----	-----	93.19	34.72	10.43	31.95	0.00	385	217	PEAK																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																										
1	5825.00	106.39	-----	-----	93.19	34.72	10.43	31.95	0.00	385	217	PEAK																																																																								
Avg	Blank																																																																																			
																																																																																				
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>98.15</td><td>-----</td><td>-----</td><td>84.95</td><td>34.72</td><td>10.43</td><td>31.95</td><td>0.00</td><td>385</td><td>217</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	98.15	-----	-----	84.95	34.72	10.43	31.95	0.00	385	217	AVERAGE																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																										
1	5825.00	98.15	-----	-----	84.95	34.72	10.43	31.95	0.00	385	217	AVERAGE																																																																								


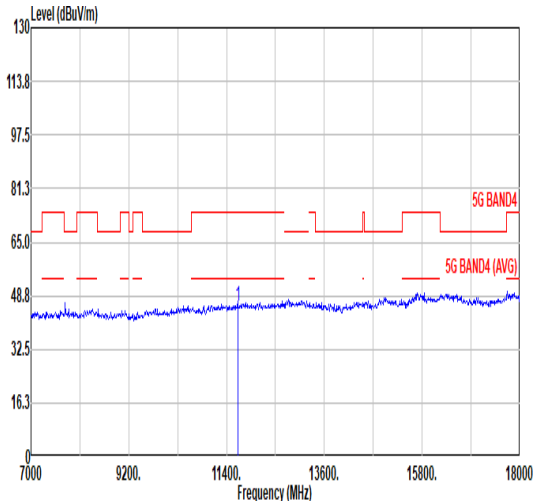
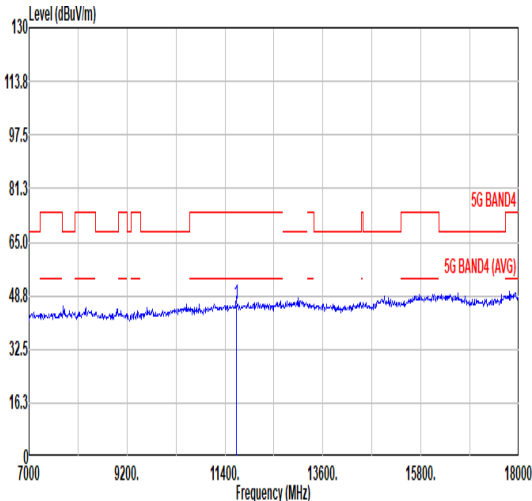


Mode	3																																																																																																				
	Harmonic																																																																																																				
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11650.00</td><td>45.67</td><td>74.00</td><td>-28.33</td><td>53.67</td><td>38.45</td><td>15.02</td><td>61.47</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11650.00	45.67	74.00	-28.33	53.67	38.45	15.02	61.47	0.00	300	0	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11650.00</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>54.21</td><td>38.45</td><td>15.02</td><td>61.47</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11650.00	46.21	74.00	-27.79	54.21	38.45	15.02	61.47	0.00	100	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	11650.00	45.67	74.00	-28.33	53.67	38.45	15.02	61.47	0.00	300	0	PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	11650.00	46.21	74.00	-27.79	54.21	38.45	15.02	61.47	0.00	100	0	PEAK																																																																																									

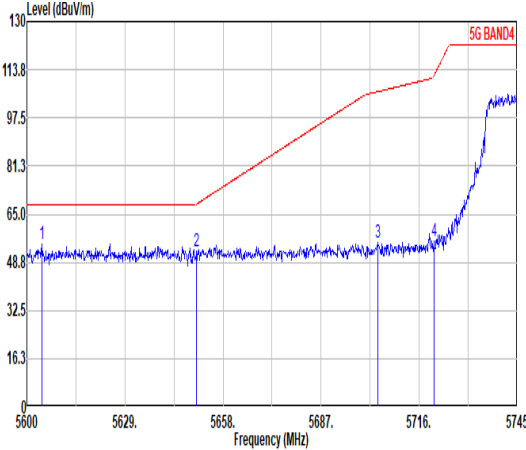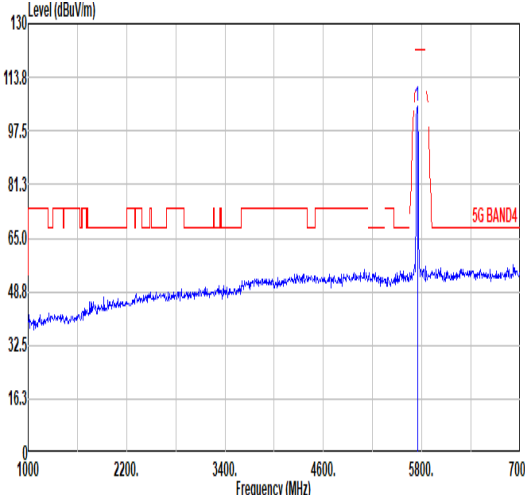
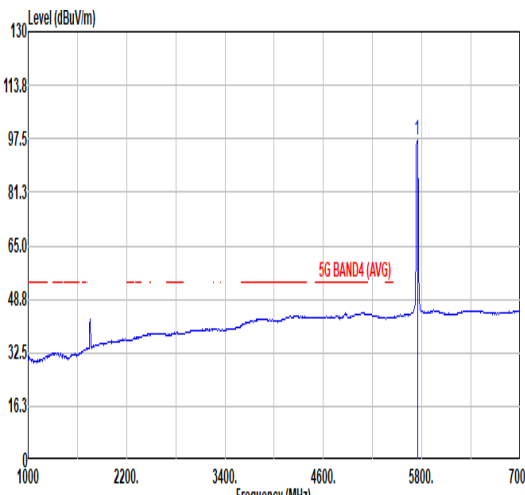


		4																																																																																																																													
Mode	Band Edge																																																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																														
Pol.	Horizontal											Fundamental																																																																																																																			
Peak																																																																																																																															
	<table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5604.35</td><td>55.04</td><td>68.30</td><td>-13.26</td><td>42.26</td><td>34.61</td><td>10.25</td><td>32.08</td><td>0.00</td><td>100</td><td>48</td><td>PEAK</td></tr><tr><td>2</td><td>5650.17</td><td>52.64</td><td>68.43</td><td>-15.79</td><td>39.90</td><td>34.55</td><td>10.28</td><td>32.09</td><td>0.00</td><td>100</td><td>48</td><td>PEAK</td></tr><tr><td>3</td><td>5703.68</td><td>55.51</td><td>106.33</td><td>-50.82</td><td>42.72</td><td>34.51</td><td>10.33</td><td>32.05</td><td>0.00</td><td>100</td><td>48</td><td>PEAK</td></tr><tr><td>4</td><td>5720.35</td><td>55.81</td><td>111.70</td><td>-55.89</td><td>42.97</td><td>34.53</td><td>10.34</td><td>32.03</td><td>0.00</td><td>100</td><td>48</td><td>PEAK</td></tr></tbody></table>													Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5604.35	55.04	68.30	-13.26	42.26	34.61	10.25	32.08	0.00	100	48	PEAK	2	5650.17	52.64	68.43	-15.79	39.90	34.55	10.28	32.09	0.00	100	48	PEAK	3	5703.68	55.51	106.33	-50.82	42.72	34.51	10.33	32.05	0.00	100	48	PEAK	4	5720.35	55.81	111.70	-55.89	42.97	34.53	10.34	32.03	0.00	100	48	PEAK	<table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>104.88</td><td>-----</td><td>-----</td><td>91.98</td><td>34.55</td><td>10.36</td><td>32.01</td><td>0.00</td><td>100</td><td>48</td><td>PEAK</td></tr></tbody></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5745.00	104.88	-----	-----	91.98	34.55	10.36	32.01	0.00	100	48
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5604.35	55.04	68.30	-13.26	42.26	34.61	10.25	32.08	0.00	100	48	PEAK																																																																																																																			
2	5650.17	52.64	68.43	-15.79	39.90	34.55	10.28	32.09	0.00	100	48	PEAK																																																																																																																			
3	5703.68	55.51	106.33	-50.82	42.72	34.51	10.33	32.05	0.00	100	48	PEAK																																																																																																																			
4	5720.35	55.81	111.70	-55.89	42.97	34.53	10.34	32.03	0.00	100	48	PEAK																																																																																																																			
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5745.00	104.88	-----	-----	91.98	34.55	10.36	32.01	0.00	100	48	PEAK																																																																																																																			
Avg	Blank																																																																																																																														
													<table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>97.04</td><td>-----</td><td>-----</td><td>84.14</td><td>34.55</td><td>10.36</td><td>32.01</td><td>0.00</td><td>100</td><td>48</td><td>AVERAGE</td></tr></tbody></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5745.00	97.04	-----	-----	84.14	34.55	10.36	32.01	0.00	100	48	AVERAGE																																																																												
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5745.00	97.04	-----	-----	84.14	34.55	10.36	32.01	0.00	100	48	AVERAGE																																																																																																																			

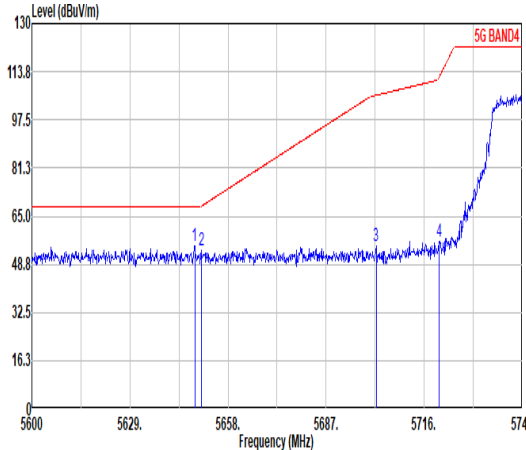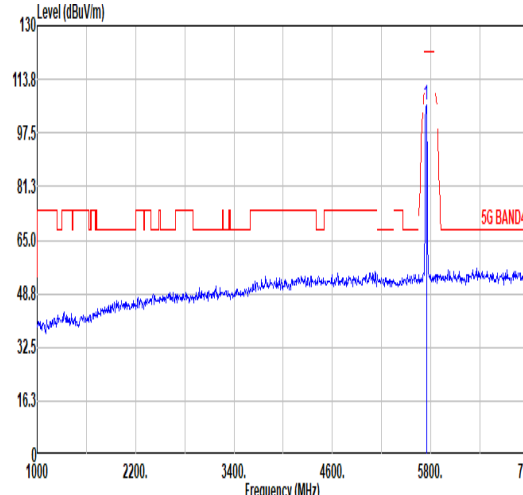
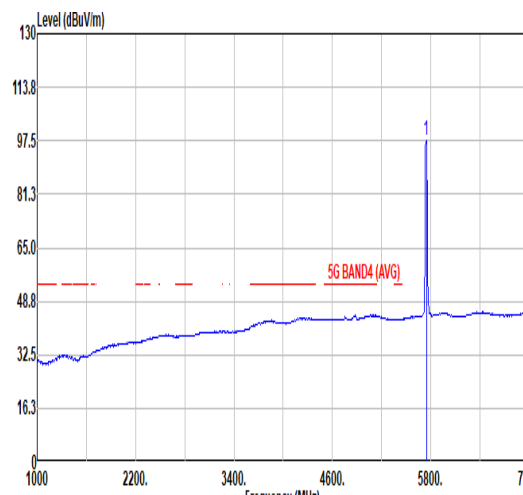


		4																																																																																											
Mode	Band Edge																																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																												
Pol.	Vertical																																																																																												
Peak																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5648.14</td><td>54.88</td><td>68.30</td><td>-13.42</td><td>42.14</td><td>34.55</td><td>10.28</td><td>32.09</td><td>0.00</td><td>317</td><td>206</td><td>PEAK</td></tr><tr><td>2</td><td>5650.83</td><td>53.46</td><td>68.32</td><td>-14.86</td><td>40.72</td><td>34.55</td><td>10.28</td><td>32.09</td><td>0.00</td><td>317</td><td>206</td><td>PEAK</td></tr><tr><td>3</td><td>5701.79</td><td>54.89</td><td>105.80</td><td>-50.91</td><td>42.10</td><td>34.51</td><td>10.33</td><td>32.05</td><td>0.00</td><td>317</td><td>206</td><td>PEAK</td></tr><tr><td>4</td><td>5720.50</td><td>56.42</td><td>112.03</td><td>-55.61</td><td>43.58</td><td>34.53</td><td>10.34</td><td>32.03</td><td>0.00</td><td>317</td><td>206</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5648.14	54.88	68.30	-13.42	42.14	34.55	10.28	32.09	0.00	317	206	PEAK	2	5650.83	53.46	68.32	-14.86	40.72	34.55	10.28	32.09	0.00	317	206	PEAK	3	5701.79	54.89	105.80	-50.91	42.10	34.51	10.33	32.05	0.00	317	206	PEAK	4	5720.50	56.42	112.03	-55.61	43.58	34.53	10.34	32.03	0.00	317	206
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5648.14	54.88	68.30	-13.42	42.14	34.55	10.28	32.09	0.00	317	206	PEAK																																																																																	
2	5650.83	53.46	68.32	-14.86	40.72	34.55	10.28	32.09	0.00	317	206	PEAK																																																																																	
3	5701.79	54.89	105.80	-50.91	42.10	34.51	10.33	32.05	0.00	317	206	PEAK																																																																																	
4	5720.50	56.42	112.03	-55.61	43.58	34.53	10.34	32.03	0.00	317	206	PEAK																																																																																	
Fundamental																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>105.80</td><td>-----</td><td>-----</td><td>92.90</td><td>34.55</td><td>10.36</td><td>32.01</td><td>0.00</td><td>317</td><td>206</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	105.80	-----	-----	92.90	34.55	10.36	32.01	0.00	317	206	PEAK																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5745.00	105.80	-----	-----	92.90	34.55	10.36	32.01	0.00	317	206	PEAK																																																																																	
Avg	Blank																																																																																												
																																																																																													
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>97.69</td><td>-----</td><td>-----</td><td>84.79</td><td>34.55</td><td>10.36</td><td>32.01</td><td>0.00</td><td>317</td><td>206</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	97.69	-----	-----	84.79	34.55	10.36	32.01	0.00	317	206	AVERAGE																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5745.00	97.69	-----	-----	84.79	34.55	10.36	32.01	0.00	317	206	AVERAGE																																																																																	



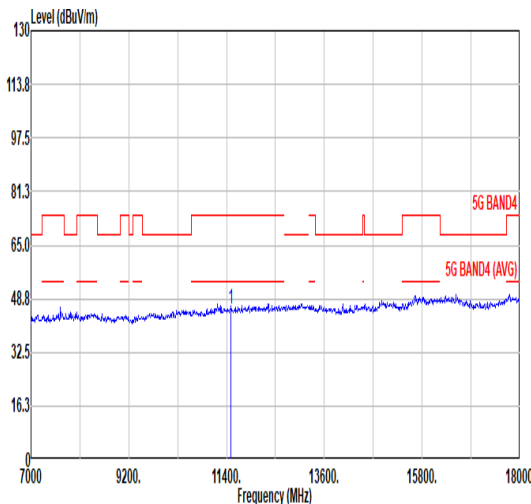
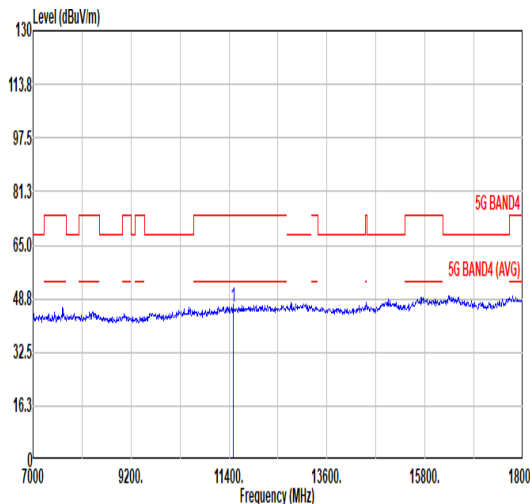


Mode	4																																																																																																		
	Harmonic																																																																																																		
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>45.48</td><td>74.00</td><td>-28.52</td><td>53.80</td><td>38.29</td><td>14.91</td><td>61.52</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	45.48	74.00	-28.52	53.80	38.29	14.91	61.52	0.00	300	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>46.25</td><td>74.00</td><td>-27.75</td><td>54.57</td><td>38.29</td><td>14.91</td><td>61.52</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	46.25	74.00	-27.75	54.57	38.29	14.91	61.52	0.00	100	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11490.00	45.48	74.00	-28.52	53.80	38.29	14.91	61.52	0.00	300	0	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11490.00	46.25	74.00	-27.75	54.57	38.29	14.91	61.52	0.00	100	0	PEAK																																																																																							

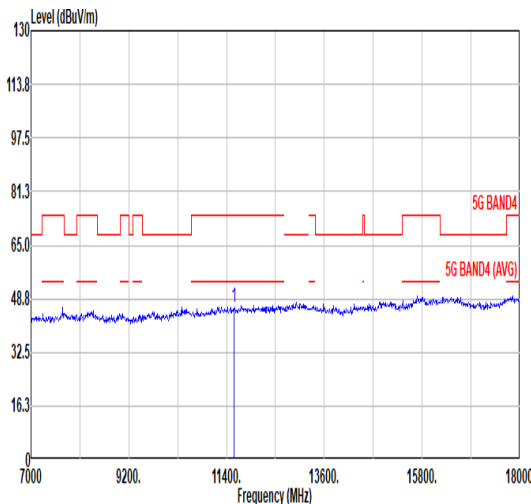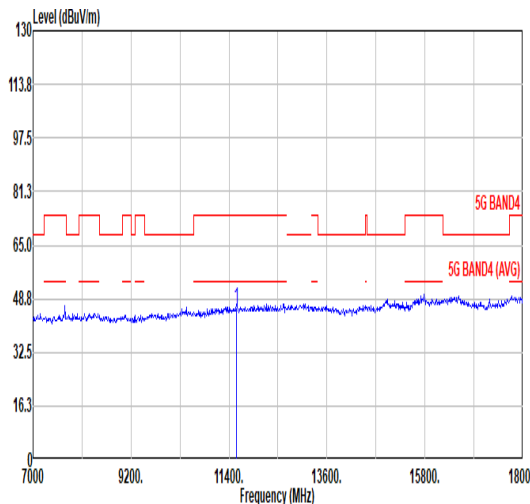

Mode	5																																																																																																		
	Harmonic																																																																																																		
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>46.05</td><td>74.00</td><td>-27.95</td><td>54.21</td><td>38.36</td><td>14.97</td><td>61.49</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	46.05	74.00	-27.95	54.21	38.36	14.97	61.49	0.00	300	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>46.00</td><td>74.00</td><td>-28.00</td><td>54.16</td><td>38.36</td><td>14.97</td><td>61.49</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	46.00	74.00	-28.00	54.16	38.36	14.97	61.49	0.00	100	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11570.00	46.05	74.00	-27.95	54.21	38.36	14.97	61.49	0.00	300	0	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11570.00	46.00	74.00	-28.00	54.16	38.36	14.97	61.49	0.00	100	0	PEAK																																																																																							

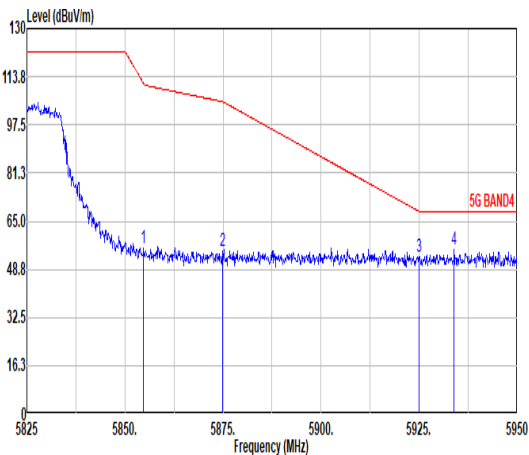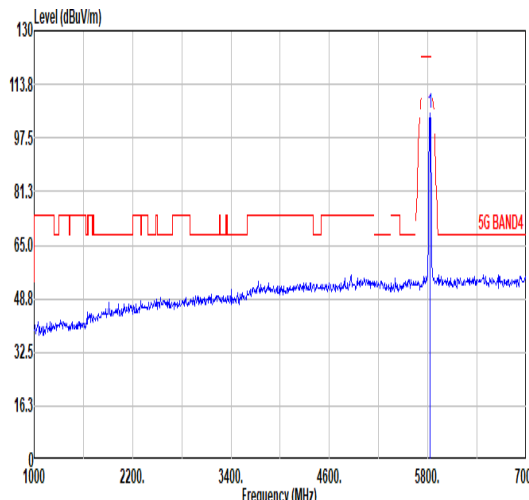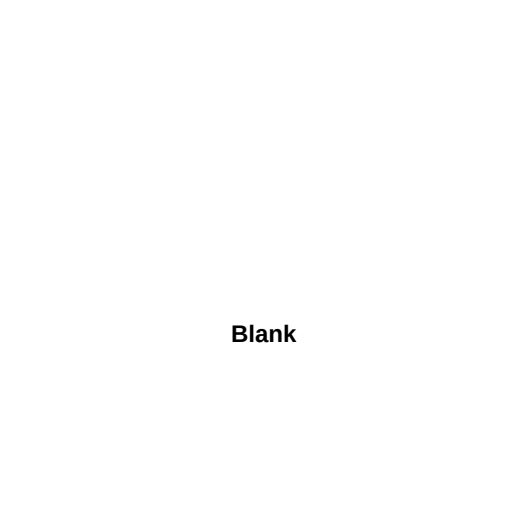
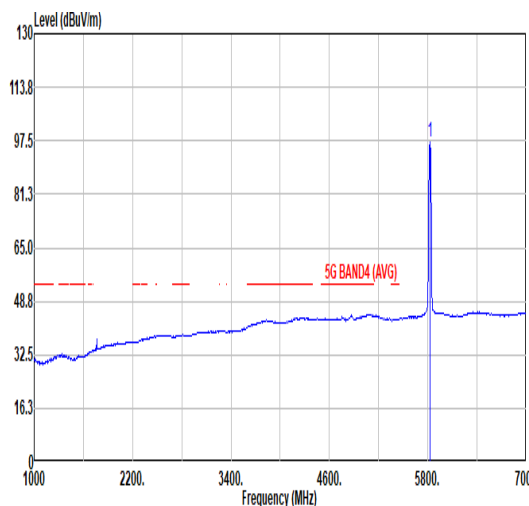


		6																																																																																													
Mode	Band Edge																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak																																																																																															
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5854.75</td><td>55.88</td><td>111.47</td><td>-55.59</td><td></td><td>42.53</td><td>34.84</td><td>10.45</td><td>31.94</td><td>0.00</td><td>100</td><td>141</td><td>PEAK</td></tr><tr><td>2</td><td>5874.88</td><td>54.84</td><td>105.33</td><td>-50.49</td><td></td><td>41.40</td><td>34.92</td><td>10.47</td><td>31.95</td><td>0.00</td><td>100</td><td>141</td><td>PEAK</td></tr><tr><td>3</td><td>5925.00</td><td>52.88</td><td>68.30</td><td>-15.42</td><td></td><td>39.24</td><td>35.11</td><td>10.52</td><td>31.99</td><td>0.00</td><td>100</td><td>141</td><td>PEAK</td></tr><tr><td>4</td><td>5933.88</td><td>55.57</td><td>68.30</td><td>-12.73</td><td></td><td>41.90</td><td>35.15</td><td>10.52</td><td>32.00</td><td>0.00</td><td>100</td><td>141</td><td>PEAK</td></tr></tbody></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.75	55.88	111.47	-55.59		42.53	34.84	10.45	31.94	0.00	100	141	PEAK	2	5874.88	54.84	105.33	-50.49		41.40	34.92	10.47	31.95	0.00	100	141	PEAK	3	5925.00	52.88	68.30	-15.42		39.24	35.11	10.52	31.99	0.00	100	141	PEAK	4	5933.88	55.57	68.30	-12.73		41.90	35.15	10.52	32.00	0.00	100	141
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5854.75	55.88	111.47	-55.59		42.53	34.84	10.45	31.94	0.00	100	141	PEAK																																																																																		
2	5874.88	54.84	105.33	-50.49		41.40	34.92	10.47	31.95	0.00	100	141	PEAK																																																																																		
3	5925.00	52.88	68.30	-15.42		39.24	35.11	10.52	31.99	0.00	100	141	PEAK																																																																																		
4	5933.88	55.57	68.30	-12.73		41.90	35.15	10.52	32.00	0.00	100	141	PEAK																																																																																		
Avg																																																																																															
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>105.21</td><td>-----</td><td>-----</td><td></td><td>91.98</td><td>34.74</td><td>10.43</td><td>31.94</td><td>0.00</td><td>100</td><td>141</td><td>PEAK</td></tr></tbody></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	5825.00	105.21	-----	-----		91.98	34.74	10.43	31.94	0.00	100	141	PEAK																																									
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5825.00	105.21	-----	-----		91.98	34.74	10.43	31.94	0.00	100	141	PEAK																																																																																		
Blank																																																																																															
																																																																																															
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>97.22</td><td>-----</td><td>-----</td><td></td><td>84.02</td><td>34.72</td><td>10.43</td><td>31.95</td><td>0.00</td><td>100</td><td>141</td><td>AVERAGE</td></tr></tbody></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	5825.00	97.22	-----	-----		84.02	34.72	10.43	31.95	0.00	100	141	AVERAGE																																									
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5825.00	97.22	-----	-----		84.02	34.72	10.43	31.95	0.00	100	141	AVERAGE																																																																																		






		6																																																																																					
Mode	Band Edge																																																																																						
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																						
Pol.	Vertical																																																																																						
Peak																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5854.88</td><td>53.92</td><td>111.18</td><td>-57.26</td><td>40.57</td><td>34.84</td><td>10.45</td><td>31.94</td><td>0.00</td><td>295</td><td>219 PEAK</td></tr><tr><td>2 5874.88</td><td>53.79</td><td>105.33</td><td>-51.54</td><td>40.35</td><td>34.92</td><td>10.47</td><td>31.95</td><td>0.00</td><td>295</td><td>219 PEAK</td></tr><tr><td>3 5924.38</td><td>53.60</td><td>68.76</td><td>-15.16</td><td>39.96</td><td>35.11</td><td>10.52</td><td>31.99</td><td>0.00</td><td>295</td><td>219 PEAK</td></tr><tr><td>4 5938.75</td><td>55.14</td><td>68.30</td><td>-13.16</td><td>41.44</td><td>35.17</td><td>10.53</td><td>32.00</td><td>0.00</td><td>295</td><td>219 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5854.88	53.92	111.18	-57.26	40.57	34.84	10.45	31.94	0.00	295	219 PEAK	2 5874.88	53.79	105.33	-51.54	40.35	34.92	10.47	31.95	0.00	295	219 PEAK	3 5924.38	53.60	68.76	-15.16	39.96	35.11	10.52	31.99	0.00	295	219 PEAK	4 5938.75	55.14	68.30	-13.16	41.44	35.17	10.53	32.00	0.00	295
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1 5854.88	53.92	111.18	-57.26	40.57	34.84	10.45	31.94	0.00	295	219 PEAK																																																																													
2 5874.88	53.79	105.33	-51.54	40.35	34.92	10.47	31.95	0.00	295	219 PEAK																																																																													
3 5924.38	53.60	68.76	-15.16	39.96	35.11	10.52	31.99	0.00	295	219 PEAK																																																																													
4 5938.75	55.14	68.30	-13.16	41.44	35.17	10.53	32.00	0.00	295	219 PEAK																																																																													
Fundamental																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>104.79</td><td>-----</td><td>-----</td><td>91.59</td><td>34.72</td><td>10.43</td><td>31.95</td><td>0.00</td><td>295</td><td>219 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	104.79	-----	-----	91.59	34.72	10.43	31.95	0.00	295	219 PEAK																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1 5825.00	104.79	-----	-----	91.59	34.72	10.43	31.95	0.00	295	219 PEAK																																																																													
Avg	Blank																																																																																						
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>96.17</td><td>-----</td><td>-----</td><td>82.97</td><td>34.72</td><td>10.43</td><td>31.95</td><td>0.00</td><td>295</td><td>219 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	96.17	-----	-----	82.97	34.72	10.43	31.95	0.00	295	219 AVERAGE																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1 5825.00	96.17	-----	-----	82.97	34.72	10.43	31.95	0.00	295	219 AVERAGE																																																																													

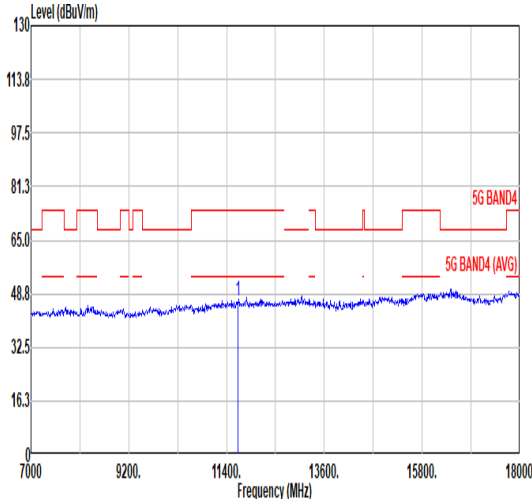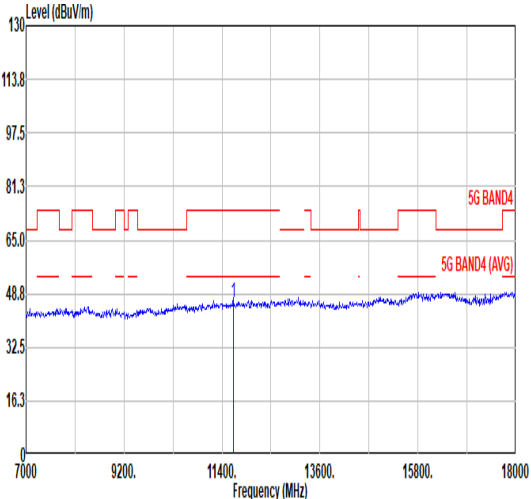


Mode	6																																																																																																		
	Harmonic																																																																																																		
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>46.41</td><td>74.00</td><td>-27.59</td><td>54.41</td><td>38.45</td><td>15.02</td><td>61.47</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	46.41	74.00	-27.59	54.41	38.45	15.02	61.47	0.00	300	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>46.14</td><td>74.00</td><td>-27.86</td><td>54.14</td><td>38.45</td><td>15.02</td><td>61.47</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	46.14	74.00	-27.86	54.14	38.45	15.02	61.47	0.00	100	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11650.00	46.41	74.00	-27.59	54.41	38.45	15.02	61.47	0.00	300	0	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11650.00	46.14	74.00	-27.86	54.14	38.45	15.02	61.47	0.00	100	0	PEAK																																																																																							

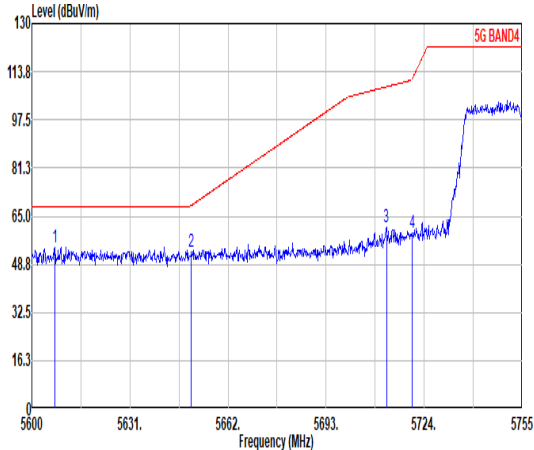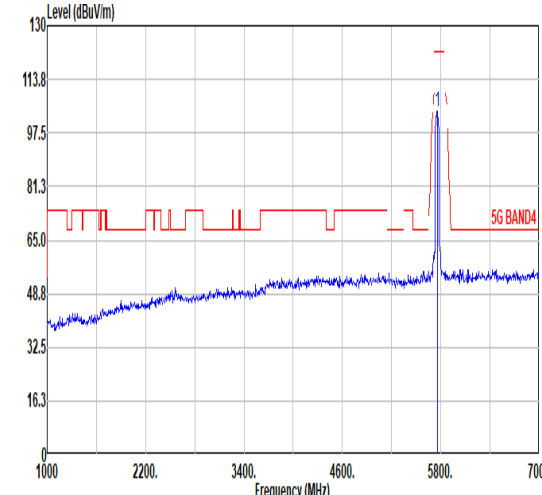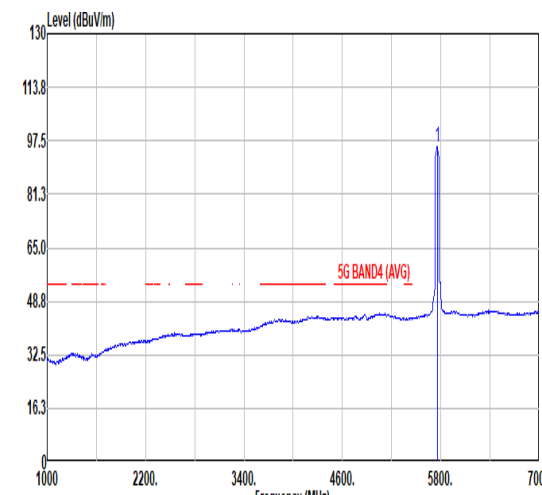

		7																																																																																																																												
Mode	Band Edge - L																																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																													
Pol.	Horizontal												Fundamental																																																																																																																	
Peak																																																																																																																														
	<table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5607.29</td><td>54.50</td><td>68.30</td><td>-13.80</td><td>41.73</td><td>34.60</td><td>10.25</td><td>32.08</td><td>0.00</td><td>100</td><td>44</td><td>PEAK</td></tr><tr><td>2</td><td>5650.38</td><td>53.20</td><td>68.58</td><td>-15.38</td><td>40.46</td><td>34.55</td><td>10.28</td><td>32.09</td><td>0.00</td><td>100</td><td>44</td><td>PEAK</td></tr><tr><td>3</td><td>5712.07</td><td>61.20</td><td>108.68</td><td>-47.48</td><td>48.39</td><td>34.52</td><td>10.33</td><td>32.04</td><td>0.00</td><td>100</td><td>44</td><td>PEAK</td></tr><tr><td>4</td><td>5720.13</td><td>59.34</td><td>111.19</td><td>-51.85</td><td>46.50</td><td>34.53</td><td>10.34</td><td>32.03</td><td>0.00</td><td>100</td><td>44</td><td>PEAK</td></tr></tbody></table>														Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5607.29	54.50	68.30	-13.80	41.73	34.60	10.25	32.08	0.00	100	44	PEAK	2	5650.38	53.20	68.58	-15.38	40.46	34.55	10.28	32.09	0.00	100	44	PEAK	3	5712.07	61.20	108.68	-47.48	48.39	34.52	10.33	32.04	0.00	100	44	PEAK	4	5720.13	59.34	111.19	-51.85	46.50	34.53	10.34	32.03	0.00	100	44	PEAK	<table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5755.00</td><td>103.97</td><td>-----</td><td>-----</td><td>91.05</td><td>34.56</td><td>10.37</td><td>32.01</td><td>0.00</td><td>100</td><td>44</td><td>PEAK</td></tr></tbody></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	103.97	-----	-----	91.05	34.56	10.37	32.01	0.00	100	44
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	5607.29	54.50	68.30	-13.80	41.73	34.60	10.25	32.08	0.00	100	44	PEAK																																																																																																																		
2	5650.38	53.20	68.58	-15.38	40.46	34.55	10.28	32.09	0.00	100	44	PEAK																																																																																																																		
3	5712.07	61.20	108.68	-47.48	48.39	34.52	10.33	32.04	0.00	100	44	PEAK																																																																																																																		
4	5720.13	59.34	111.19	-51.85	46.50	34.53	10.34	32.03	0.00	100	44	PEAK																																																																																																																		
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	5755.00	103.97	-----	-----	91.05	34.56	10.37	32.01	0.00	100	44	PEAK																																																																																																																		
Avg	Blank																																																																																																																													
														<table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5755.00</td><td>95.50</td><td>-----</td><td>-----</td><td>82.58</td><td>34.56</td><td>10.37</td><td>32.01</td><td>0.00</td><td>100</td><td>44</td><td>AVERAGE</td></tr></tbody></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	95.50	-----	-----	82.58	34.56	10.37	32.01	0.00	100	44	AVERAGE																																																																											
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	5755.00	95.50	-----	-----	82.58	34.56	10.37	32.01	0.00	100	44	AVERAGE																																																																																																																		

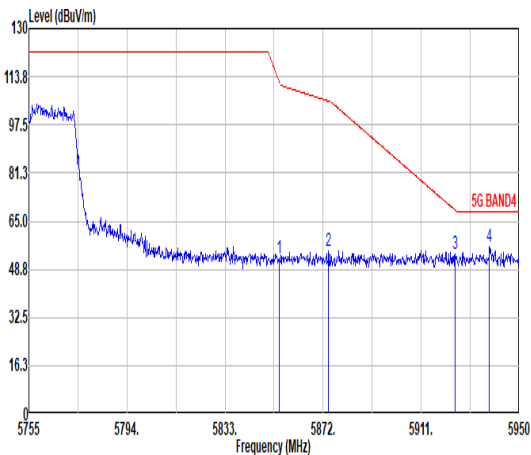

Mode	7																																																																																					
	Band Edge - R																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>5854.45</td><td>52.52</td><td>112.15</td><td>-59.63</td><td>39.17</td><td>34.84</td><td>10.45</td><td>31.94</td><td>0.00</td><td>100</td><td>44</td><td>PEAK</td></tr><tr><td>2</td><td>5874.15</td><td>54.78</td><td>105.54</td><td>-50.76</td><td>41.35</td><td>34.91</td><td>10.47</td><td>31.95</td><td>0.00</td><td>100</td><td>44</td><td>PEAK</td></tr><tr><td>3</td><td>5924.46</td><td>54.10</td><td>68.70</td><td>-14.60</td><td>40.46</td><td>35.11</td><td>10.52</td><td>31.99</td><td>0.00</td><td>100</td><td>44</td><td>PEAK</td></tr><tr><td>4</td><td>5938.11</td><td>56.41</td><td>68.30</td><td>-11.89</td><td>42.71</td><td>35.17</td><td>10.53</td><td>32.00</td><td>0.00</td><td>100</td><td>44</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1	5854.45	52.52	112.15	-59.63	39.17	34.84	10.45	31.94	0.00	100	44	PEAK	2	5874.15	54.78	105.54	-50.76	41.35	34.91	10.47	31.95	0.00	100	44	PEAK	3	5924.46	54.10	68.70	-14.60	40.46	35.11	10.52	31.99	0.00	100	44	PEAK	4	5938.11	56.41	68.30	-11.89	42.71	35.17	10.53	32.00	0.00	100	44	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1	5854.45	52.52	112.15	-59.63	39.17	34.84	10.45	31.94	0.00	100	44	PEAK																																																																										
2	5874.15	54.78	105.54	-50.76	41.35	34.91	10.47	31.95	0.00	100	44	PEAK																																																																										
3	5924.46	54.10	68.70	-14.60	40.46	35.11	10.52	31.99	0.00	100	44	PEAK																																																																										
4	5938.11	56.41	68.30	-11.89	42.71	35.17	10.53	32.00	0.00	100	44	PEAK																																																																										

7

Mode

Band Edge - L

U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz

Pol.

Vertical

Peak

	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5685.74	54.79	68.30	-13.51	42.02	34.60	10.25	32.08	0.00	392	207	PEAK
2	5650.38	52.63	68.58	-15.95	39.89	34.55	10.28	32.09	0.00	392	207	PEAK
3	5708.50	61.02	107.68	-46.66	48.21	34.52	10.33	32.04	0.00	392	207	PEAK
4	5720.28	57.84	111.54	-53.70	45.00	34.53	10.34	32.03	0.00	392	207	PEAK

Fundamental


	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5755.00	100.88	-----	-----	87.96	34.56	10.37	32.01	0.00	392	207	PEAK

Avg

Blank

	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5755.00	93.10	-----	-----	80.18	34.56	10.37	32.01	0.00	392	207	AVERAGE



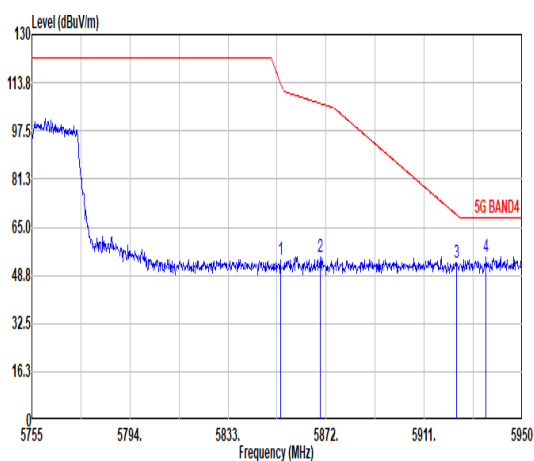


Mode	7																																																																																		
	Band Edge - R																																																																																		
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>5853.87</td><td>53.86</td><td>113.49</td><td>-59.63</td><td>40.52</td><td>34.83</td><td>10.45</td><td>31.94</td><td>0.00</td><td>392</td><td>207 PEAK</td></tr><tr><td>2</td><td>5869.66</td><td>54.86</td><td>106.79</td><td>-51.93</td><td>41.44</td><td>34.90</td><td>10.47</td><td>31.95</td><td>0.00</td><td>392</td><td>207 PEAK</td></tr><tr><td>3</td><td>5923.87</td><td>53.18</td><td>69.13</td><td>-15.95</td><td>39.55</td><td>35.11</td><td>10.51</td><td>31.99</td><td>0.00</td><td>392</td><td>207 PEAK</td></tr><tr><td>4</td><td>5935.57</td><td>55.16</td><td>68.30</td><td>-13.14</td><td>41.48</td><td>35.16</td><td>10.52</td><td>32.00</td><td>0.00</td><td>392</td><td>207 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1	5853.87	53.86	113.49	-59.63	40.52	34.83	10.45	31.94	0.00	392	207 PEAK	2	5869.66	54.86	106.79	-51.93	41.44	34.90	10.47	31.95	0.00	392	207 PEAK	3	5923.87	53.18	69.13	-15.95	39.55	35.11	10.51	31.99	0.00	392	207 PEAK	4	5935.57	55.16	68.30	-13.14	41.48	35.16	10.52	32.00	0.00	392	207 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1	5853.87	53.86	113.49	-59.63	40.52	34.83	10.45	31.94	0.00	392	207 PEAK																																																																								
2	5869.66	54.86	106.79	-51.93	41.44	34.90	10.47	31.95	0.00	392	207 PEAK																																																																								
3	5923.87	53.18	69.13	-15.95	39.55	35.11	10.51	31.99	0.00	392	207 PEAK																																																																								
4	5935.57	55.16	68.30	-13.14	41.48	35.16	10.52	32.00	0.00	392	207 PEAK																																																																								



Mode	7																																																						
	Harmonic																																																						
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																						
Pol.	Horizontal																																																						
Peak Avg	<table><thead><tr><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11510.00</td><td>46.08</td><td>74.00</td><td>-27.92</td><td>54.37</td><td>38.30</td><td>14.92</td><td>61.51</td><td>0.00</td><td>300</td><td>0 PEAK</td></tr></tbody></table>											Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11510.00	46.08	74.00	-27.92	54.37	38.30	14.92	61.51	0.00	300	0 PEAK
	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 11510.00	46.08	74.00	-27.92	54.37	38.30	14.92	61.51	0.00	300	0 PEAK																																													
<table><thead><tr><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11510.00</td><td>46.88</td><td>74.00</td><td>-27.12</td><td>55.17</td><td>38.30</td><td>14.92</td><td>61.51</td><td>0.00</td><td>100</td><td>0 PEAK</td></tr></tbody></table>											Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11510.00	46.88	74.00	-27.12	55.17	38.30	14.92	61.51	0.00	100	0 PEAK	
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 11510.00	46.88	74.00	-27.12	55.17	38.30	14.92	61.51	0.00	100	0 PEAK																																													

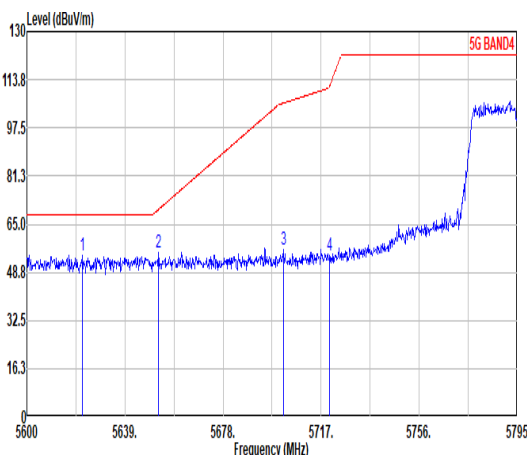
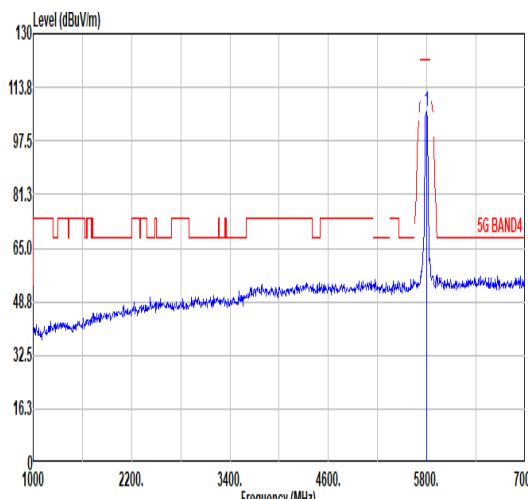
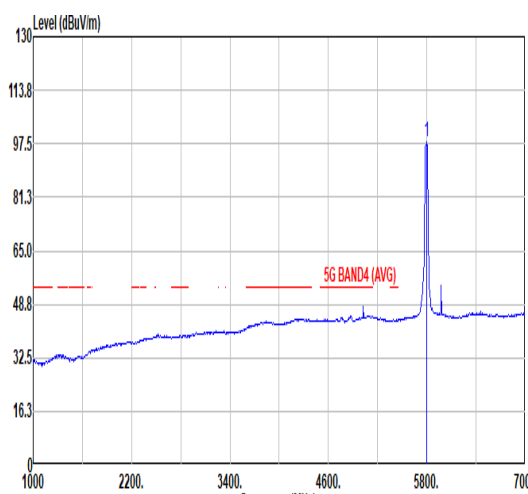


Mode	8																																																																																													
	Band Edge - L																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																													
Pol.	Horizontal																																																																																													
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5622.04</td><td>54.46</td><td>68.30</td><td>-13.84</td><td>41.71</td><td>34.58</td><td>10.26</td><td>32.09</td><td>0.00</td><td>100</td><td>250</td><td>PEAK</td></tr><tr><td>2</td><td>5652.26</td><td>55.20</td><td>69.98</td><td>-14.78</td><td>42.45</td><td>34.55</td><td>10.29</td><td>32.09</td><td>0.00</td><td>100</td><td>250</td><td>PEAK</td></tr><tr><td>3</td><td>5701.99</td><td>56.46</td><td>105.86</td><td>-49.40</td><td>43.67</td><td>34.51</td><td>10.33</td><td>32.05</td><td>0.00</td><td>100</td><td>250</td><td>PEAK</td></tr><tr><td>4</td><td>5728.32</td><td>54.38</td><td>111.62</td><td>-57.24</td><td>41.54</td><td>34.53</td><td>10.34</td><td>32.03</td><td>0.00</td><td>100</td><td>250</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5622.04	54.46	68.30	-13.84	41.71	34.58	10.26	32.09	0.00	100	250	PEAK	2	5652.26	55.20	69.98	-14.78	42.45	34.55	10.29	32.09	0.00	100	250	PEAK	3	5701.99	56.46	105.86	-49.40	43.67	34.51	10.33	32.05	0.00	100	250	PEAK	4	5728.32	54.38	111.62	-57.24	41.54	34.53	10.34	32.03	0.00	100	250	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5622.04	54.46	68.30	-13.84	41.71	34.58	10.26	32.09	0.00	100	250	PEAK																																																																																		
2	5652.26	55.20	69.98	-14.78	42.45	34.55	10.29	32.09	0.00	100	250	PEAK																																																																																		
3	5701.99	56.46	105.86	-49.40	43.67	34.51	10.33	32.05	0.00	100	250	PEAK																																																																																		
4	5728.32	54.38	111.62	-57.24	41.54	34.53	10.34	32.03	0.00	100	250	PEAK																																																																																		
Avg	Blank																																																																																													
																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>106.41</td><td>-----</td><td>-----</td><td>93.38</td><td>34.60</td><td>10.40</td><td>31.97</td><td>0.00</td><td>100</td><td>250</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	106.41	-----	-----	93.38	34.60	10.40	31.97	0.00	100	250	PEAK																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5795.00	106.41	-----	-----	93.38	34.60	10.40	31.97	0.00	100	250	PEAK																																																																																		
Avg	Blank																																																																																													
																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>97.96</td><td>-----</td><td>-----</td><td>84.90</td><td>34.62</td><td>10.41</td><td>31.97</td><td>0.00</td><td>100</td><td>250</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	97.96	-----	-----	84.90	34.62	10.41	31.97	0.00	100	250	AVERAGE																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5795.00	97.96	-----	-----	84.90	34.62	10.41	31.97	0.00	100	250	AVERAGE																																																																																		



Mode	8																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.83</td><td>54.62</td><td>111.29</td><td>-56.67</td><td>41.27</td><td>34.84</td><td>10.45</td><td>31.94</td><td>0.00</td><td>100</td><td>250</td><td>PEAK</td></tr><tr><td>2</td><td>5874.83</td><td>55.18</td><td>105.35</td><td>-50.17</td><td>41.74</td><td>34.92</td><td>10.47</td><td>31.95</td><td>0.00</td><td>100</td><td>250</td><td>PEAK</td></tr><tr><td>3</td><td>5924.74</td><td>54.45</td><td>68.50</td><td>-14.05</td><td>40.81</td><td>35.11</td><td>10.52</td><td>31.99</td><td>0.00</td><td>100</td><td>250</td><td>PEAK</td></tr><tr><td>4</td><td>5931.40</td><td>55.81</td><td>68.30</td><td>-12.49</td><td>42.15</td><td>35.14</td><td>10.52</td><td>32.00</td><td>0.00</td><td>100</td><td>250</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.83	54.62	111.29	-56.67	41.27	34.84	10.45	31.94	0.00	100	250	PEAK	2	5874.83	55.18	105.35	-50.17	41.74	34.92	10.47	31.95	0.00	100	250	PEAK	3	5924.74	54.45	68.50	-14.05	40.81	35.11	10.52	31.99	0.00	100	250	PEAK	4	5931.40	55.81	68.30	-12.49	42.15	35.14	10.52	32.00	0.00	100	250	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.83	54.62	111.29	-56.67	41.27	34.84	10.45	31.94	0.00	100	250	PEAK																																																																									
2	5874.83	55.18	105.35	-50.17	41.74	34.92	10.47	31.95	0.00	100	250	PEAK																																																																									
3	5924.74	54.45	68.50	-14.05	40.81	35.11	10.52	31.99	0.00	100	250	PEAK																																																																									
4	5931.40	55.81	68.30	-12.49	42.15	35.14	10.52	32.00	0.00	100	250	PEAK																																																																									

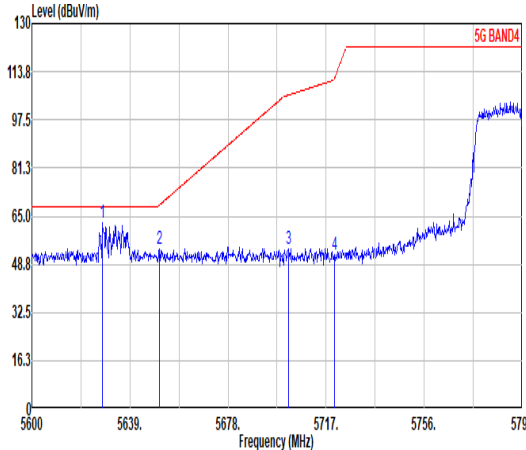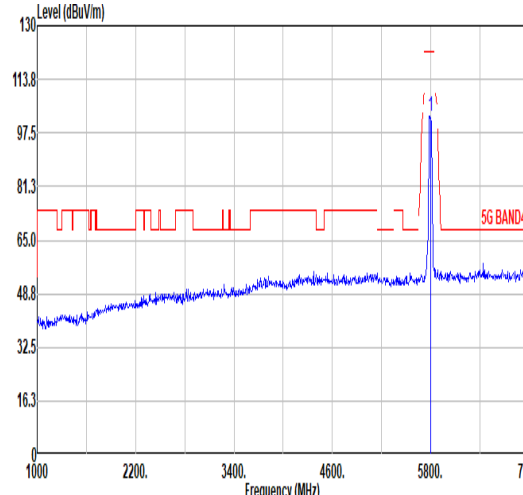
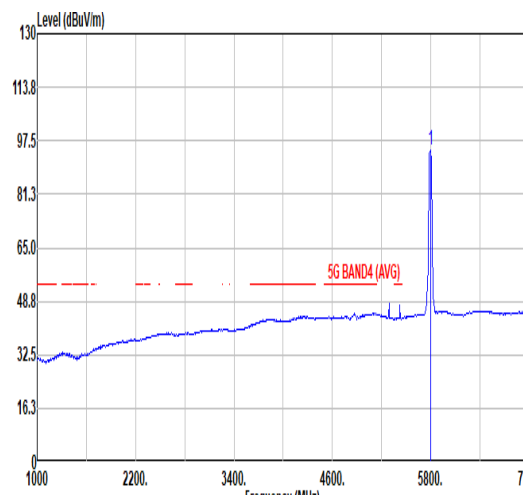


		8																																																																																			
Mode	Band Edge - L																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																				
Pol.	Vertical																																																																																				
Peak																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5628.08</td><td>62.74</td><td>68.30</td><td>-5.56</td><td>49.98</td><td>34.58</td><td>10.27</td><td>32.09</td><td>0.00</td><td>385</td><td>35 PEAK</td></tr><tr><td>2 5650.70</td><td>53.83</td><td>68.82</td><td>-14.99</td><td>41.08</td><td>34.55</td><td>10.29</td><td>32.09</td><td>0.00</td><td>385</td><td>35 PEAK</td></tr><tr><td>3 5701.99</td><td>54.19</td><td>105.86</td><td>-51.67</td><td>41.40</td><td>34.51</td><td>10.33</td><td>32.05</td><td>0.00</td><td>385</td><td>35 PEAK</td></tr><tr><td>4 5720.32</td><td>51.96</td><td>111.62</td><td>-59.66</td><td>39.12</td><td>34.53</td><td>10.34</td><td>32.03</td><td>0.00</td><td>385</td><td>35 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5628.08	62.74	68.30	-5.56	49.98	34.58	10.27	32.09	0.00	385	35 PEAK	2 5650.70	53.83	68.82	-14.99	41.08	34.55	10.29	32.09	0.00	385	35 PEAK	3 5701.99	54.19	105.86	-51.67	41.40	34.51	10.33	32.05	0.00	385	35 PEAK	4 5720.32	51.96	111.62	-59.66	39.12	34.53	10.34	32.03	0.00	385
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1 5628.08	62.74	68.30	-5.56	49.98	34.58	10.27	32.09	0.00	385	35 PEAK																																																																											
2 5650.70	53.83	68.82	-14.99	41.08	34.55	10.29	32.09	0.00	385	35 PEAK																																																																											
3 5701.99	54.19	105.86	-51.67	41.40	34.51	10.33	32.05	0.00	385	35 PEAK																																																																											
4 5720.32	51.96	111.62	-59.66	39.12	34.53	10.34	32.03	0.00	385	35 PEAK																																																																											
Fundamental																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5795.00</td><td>102.57</td><td>-----</td><td>-----</td><td>89.56</td><td>34.59</td><td>10.40</td><td>31.98</td><td>0.00</td><td>385</td><td>35 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5795.00	102.57	-----	-----	89.56	34.59	10.40	31.98	0.00	385	35 PEAK																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1 5795.00	102.57	-----	-----	89.56	34.59	10.40	31.98	0.00	385	35 PEAK																																																																											
Avg	Blank																																																																																				
																																																																																					
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5795.00</td><td>94.66</td><td>-----</td><td>-----</td><td>81.63</td><td>34.60</td><td>10.40</td><td>31.97</td><td>0.00</td><td>385</td><td>35 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5795.00	94.66	-----	-----	81.63	34.60	10.40	31.97	0.00	385	35 AVERAGE																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1 5795.00	94.66	-----	-----	81.63	34.60	10.40	31.97	0.00	385	35 AVERAGE																																																																											





Mode	8																																																																																		
	Band Edge - R																																																																																		
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>5854.99</td><td>52.22</td><td>110.93</td><td>-58.71</td><td>38.87</td><td>34.84</td><td>10.45</td><td>31.94</td><td>0.00</td><td>385</td><td>35 PEAK</td></tr><tr><td>2</td><td>5874.67</td><td>57.17</td><td>105.39</td><td>-48.22</td><td>43.73</td><td>34.92</td><td>10.47</td><td>31.95</td><td>0.00</td><td>385</td><td>35 PEAK</td></tr><tr><td>3</td><td>5924.74</td><td>53.16</td><td>68.50</td><td>-15.34</td><td>39.52</td><td>35.11</td><td>10.52</td><td>31.99</td><td>0.00</td><td>385</td><td>35 PEAK</td></tr><tr><td>4</td><td>5946.44</td><td>55.66</td><td>68.30</td><td>-12.64</td><td>41.94</td><td>35.20</td><td>10.53</td><td>32.01</td><td>0.00</td><td>385</td><td>35 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1	5854.99	52.22	110.93	-58.71	38.87	34.84	10.45	31.94	0.00	385	35 PEAK	2	5874.67	57.17	105.39	-48.22	43.73	34.92	10.47	31.95	0.00	385	35 PEAK	3	5924.74	53.16	68.50	-15.34	39.52	35.11	10.52	31.99	0.00	385	35 PEAK	4	5946.44	55.66	68.30	-12.64	41.94	35.20	10.53	32.01	0.00	385	35 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1	5854.99	52.22	110.93	-58.71	38.87	34.84	10.45	31.94	0.00	385	35 PEAK																																																																								
2	5874.67	57.17	105.39	-48.22	43.73	34.92	10.47	31.95	0.00	385	35 PEAK																																																																								
3	5924.74	53.16	68.50	-15.34	39.52	35.11	10.52	31.99	0.00	385	35 PEAK																																																																								
4	5946.44	55.66	68.30	-12.64	41.94	35.20	10.53	32.01	0.00	385	35 PEAK																																																																								

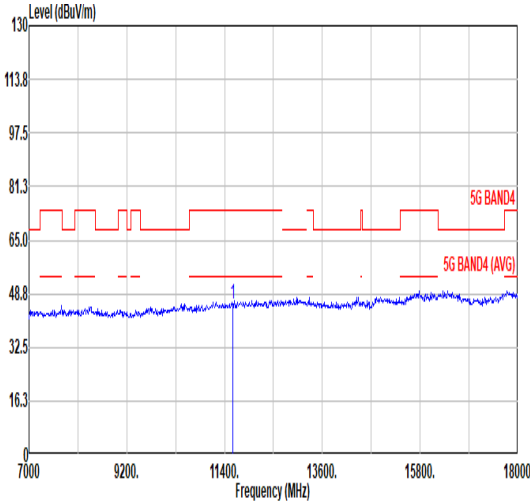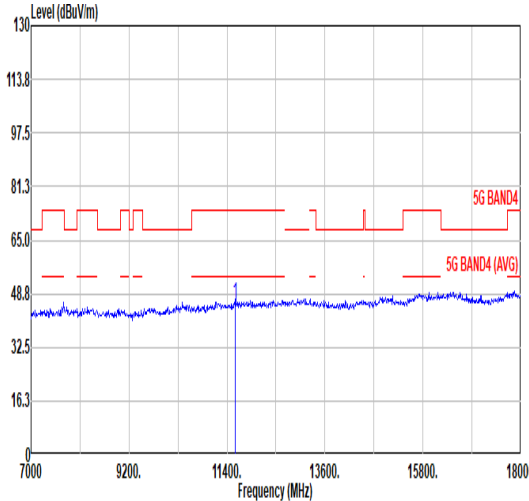

Mode	8																																																																																																															
	Harmonic																																																																																																															
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																															
Pol.	Horizontal											Vertical																																																																																																				
Peak Avg																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11590.00</td><td>45.85</td><td>74.00</td><td>-28.15</td><td>53.97</td><td>38.39</td><td>14.98</td><td>61.49</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	45.85	74.00	-28.15	53.97	38.39	14.98	61.49	0.00	300	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11590.00</td><td>46.12</td><td>74.00</td><td>-27.88</td><td>54.24</td><td>38.39</td><td>14.98</td><td>61.49</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	46.12	74.00	-27.88	54.24	38.39	14.98	61.49	0.00	100	0	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	11590.00	45.85	74.00	-28.15	53.97	38.39	14.98	61.49	0.00	300	0	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	11590.00	46.12	74.00	-27.88	54.24	38.39	14.98	61.49	0.00	100	0	PEAK																																																																																																				

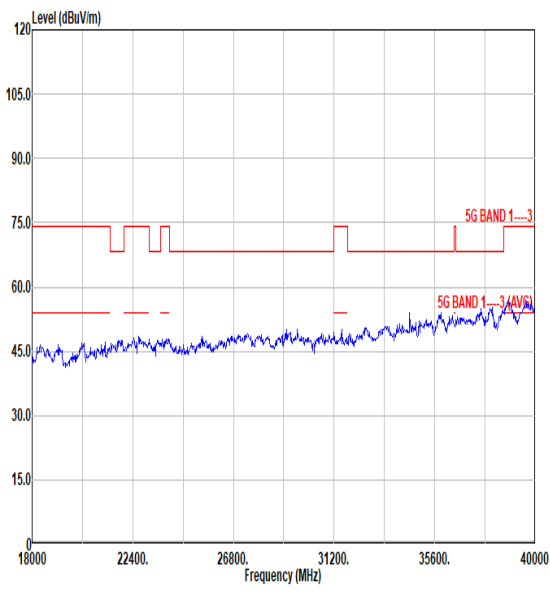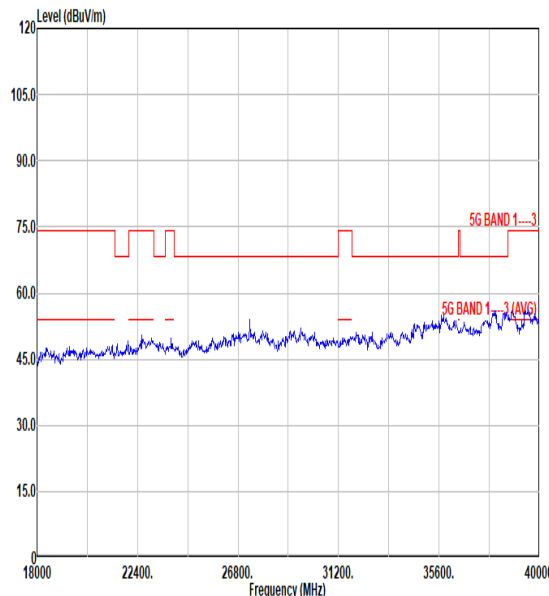


Mode	8	
	Harmonic_18-40G	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz	
Pol.	Horizontal	Vertical
Peak Avg		





Mode	9																																																																																														
	Band Edge - L																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5637.98</td><td>56.79</td><td>68.30</td><td>-11.51</td><td>44.06</td><td>34.56</td><td>10.27</td><td>32.10</td><td>0.00</td><td>100</td><td>253 PEAK</td></tr><tr><td>2</td><td>5650.40</td><td>54.51</td><td>68.60</td><td>-14.09</td><td>41.77</td><td>34.55</td><td>10.28</td><td>32.09</td><td>0.00</td><td>100</td><td>253 PEAK</td></tr><tr><td>3</td><td>5701.68</td><td>67.92</td><td>105.77</td><td>-37.85</td><td>55.13</td><td>34.51</td><td>10.33</td><td>32.05</td><td>0.00</td><td>100</td><td>253 PEAK</td></tr><tr><td>4</td><td>5720.05</td><td>71.17</td><td>111.01</td><td>-39.84</td><td>58.33</td><td>34.53</td><td>10.34</td><td>32.03</td><td>0.00</td><td>100</td><td>253 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5637.98	56.79	68.30	-11.51	44.06	34.56	10.27	32.10	0.00	100	253 PEAK	2	5650.40	54.51	68.60	-14.09	41.77	34.55	10.28	32.09	0.00	100	253 PEAK	3	5701.68	67.92	105.77	-37.85	55.13	34.51	10.33	32.05	0.00	100	253 PEAK	4	5720.05	71.17	111.01	-39.84	58.33	34.53	10.34	32.03	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5637.98	56.79	68.30	-11.51	44.06	34.56	10.27	32.10	0.00	100	253 PEAK																																																																																				
2	5650.40	54.51	68.60	-14.09	41.77	34.55	10.28	32.09	0.00	100	253 PEAK																																																																																				
3	5701.68	67.92	105.77	-37.85	55.13	34.51	10.33	32.05	0.00	100	253 PEAK																																																																																				
4	5720.05	71.17	111.01	-39.84	58.33	34.53	10.34	32.03	0.00	100	253 PEAK																																																																																				
Avg																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5775.00</td><td>102.90</td><td>-----</td><td>-----</td><td>89.90</td><td>34.59</td><td>10.39</td><td>31.98</td><td>0.00</td><td>100</td><td>253 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	102.90	-----	-----	89.90	34.59	10.39	31.98	0.00	100	253 PEAK																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5775.00	102.90	-----	-----	89.90	34.59	10.39	31.98	0.00	100	253 PEAK																																																																																				
Blank																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5775.00</td><td>94.82</td><td>-----</td><td>-----</td><td>81.82</td><td>34.59</td><td>10.39</td><td>31.98</td><td>0.00</td><td>100</td><td>253 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	94.82	-----	-----	81.82	34.59	10.39	31.98	0.00	100	253 AVERAGE																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5775.00	94.82	-----	-----	81.82	34.59	10.39	31.98	0.00	100	253 AVERAGE																																																																																				

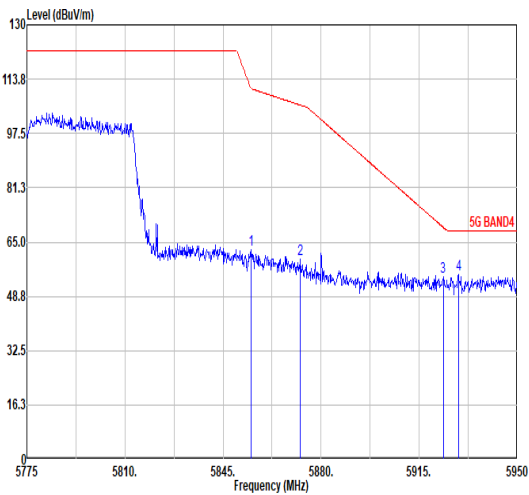


Mode	9																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.98</td><td>62.74</td><td>110.96</td><td>-48.22</td><td>49.39</td><td>34.84</td><td>10.45</td><td>31.94</td><td>0.00</td><td>100</td><td>253</td><td>PEAK</td></tr><tr><td>2</td><td>5872.65</td><td>59.97</td><td>105.96</td><td>-45.99</td><td>46.54</td><td>34.91</td><td>10.47</td><td>31.95</td><td>0.00</td><td>100</td><td>253</td><td>PEAK</td></tr><tr><td>3</td><td>5923.58</td><td>54.71</td><td>69.35</td><td>-14.64</td><td>41.08</td><td>35.11</td><td>10.51</td><td>31.99</td><td>0.00</td><td>100</td><td>253</td><td>PEAK</td></tr><tr><td>4</td><td>5929.00</td><td>55.15</td><td>68.30</td><td>-13.15</td><td>41.49</td><td>35.13</td><td>10.52</td><td>31.99</td><td>0.00</td><td>100</td><td>253</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.98	62.74	110.96	-48.22	49.39	34.84	10.45	31.94	0.00	100	253	PEAK	2	5872.65	59.97	105.96	-45.99	46.54	34.91	10.47	31.95	0.00	100	253	PEAK	3	5923.58	54.71	69.35	-14.64	41.08	35.11	10.51	31.99	0.00	100	253	PEAK	4	5929.00	55.15	68.30	-13.15	41.49	35.13	10.52	31.99	0.00	100	253	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.98	62.74	110.96	-48.22	49.39	34.84	10.45	31.94	0.00	100	253	PEAK																																																																									
2	5872.65	59.97	105.96	-45.99	46.54	34.91	10.47	31.95	0.00	100	253	PEAK																																																																									
3	5923.58	54.71	69.35	-14.64	41.08	35.11	10.51	31.99	0.00	100	253	PEAK																																																																									
4	5929.00	55.15	68.30	-13.15	41.49	35.13	10.52	31.99	0.00	100	253	PEAK																																																																									

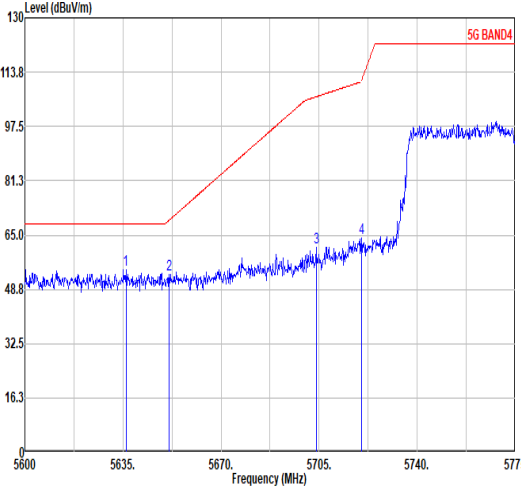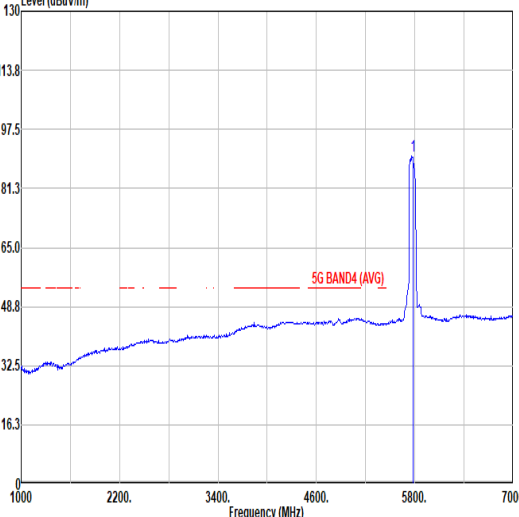

Mode	9																																																																																	
	Band Edge - L																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																	
Pol.	Vertical																																																																																	
Peak	Fundamental																																																																																	
																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5636.05	54.67	68.30	-13.63	41.93	34.57	10.27	32.10	0.00	372	38	PEAK	2	5651.45	53.12	69.38	-16.26	40.37	34.55	10.29	32.09	0.00	372	38	PEAK	3	5703.95	61.46	106.41	-44.95	48.67	34.51	10.33	32.05	0.00	372	38	PEAK	4	5720.05	64.01	111.01	-47.00	51.17	34.53	10.34	32.03	0.00	372	38
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1	5636.05	54.67	68.30	-13.63	41.93	34.57	10.27	32.10	0.00	372	38	PEAK																																																																						
2	5651.45	53.12	69.38	-16.26	40.37	34.55	10.29	32.09	0.00	372	38	PEAK																																																																						
3	5703.95	61.46	106.41	-44.95	48.67	34.51	10.33	32.05	0.00	372	38	PEAK																																																																						
4	5720.05	64.01	111.01	-47.00	51.17	34.53	10.34	32.03	0.00	372	38	PEAK																																																																						
Avg	Blank																																																																																	
																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5775.00	90.21	-----	-----	77.26	34.57	10.38	32.00	0.00	372	38	AVERAGE																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1	5775.00	90.21	-----	-----	77.26	34.57	10.38	32.00	0.00	372	38	AVERAGE																																																																						


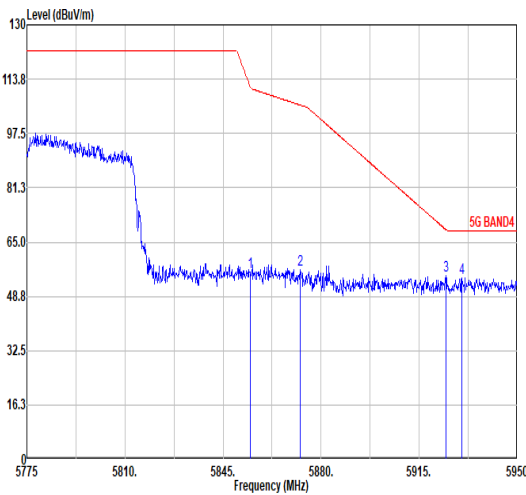


Mode	9																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.80</td><td>55.84</td><td>111.36</td><td>-55.52</td><td>42.49</td><td>34.84</td><td>10.45</td><td>31.94</td><td>0.00</td><td>372</td><td>38</td><td>PEAK</td></tr><tr><td>2</td><td>5872.48</td><td>56.63</td><td>106.01</td><td>-49.38</td><td>43.20</td><td>34.91</td><td>10.47</td><td>31.95</td><td>0.00</td><td>372</td><td>38</td><td>PEAK</td></tr><tr><td>3</td><td>5924.63</td><td>54.80</td><td>68.58</td><td>-13.78</td><td>41.16</td><td>35.11</td><td>10.52</td><td>31.99</td><td>0.00</td><td>372</td><td>38</td><td>PEAK</td></tr><tr><td>4</td><td>5938.23</td><td>54.10</td><td>68.30</td><td>-14.20</td><td>40.45</td><td>35.13</td><td>10.52</td><td>32.00</td><td>0.00</td><td>372</td><td>38</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	55.84	111.36	-55.52	42.49	34.84	10.45	31.94	0.00	372	38	PEAK	2	5872.48	56.63	106.01	-49.38	43.20	34.91	10.47	31.95	0.00	372	38	PEAK	3	5924.63	54.80	68.58	-13.78	41.16	35.11	10.52	31.99	0.00	372	38	PEAK	4	5938.23	54.10	68.30	-14.20	40.45	35.13	10.52	32.00	0.00	372	38	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.80	55.84	111.36	-55.52	42.49	34.84	10.45	31.94	0.00	372	38	PEAK																																																																									
2	5872.48	56.63	106.01	-49.38	43.20	34.91	10.47	31.95	0.00	372	38	PEAK																																																																									
3	5924.63	54.80	68.58	-13.78	41.16	35.11	10.52	31.99	0.00	372	38	PEAK																																																																									
4	5938.23	54.10	68.30	-14.20	40.45	35.13	10.52	32.00	0.00	372	38	Peak																																																																									



Mode	9																																																																																																			
	Harmonic																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																			
Pol.	Horizontal											Vertical																																																																																								
Peak Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11550.00</td><td>45.85</td><td>74.00</td><td>-28.15</td><td>54.06</td><td>38.34</td><td>14.95</td><td>61.50</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	45.85	74.00	-28.15	54.06	38.34	14.95	61.50	0.00	300	0	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11550.00</td><td>46.89</td><td>74.00</td><td>-27.11</td><td>55.10</td><td>38.34</td><td>14.95</td><td>61.50</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	46.89	74.00	-27.11	55.10	38.34	14.95	61.50	0.00	100	0	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	11550.00	45.85	74.00	-28.15	54.06	38.34	14.95	61.50	0.00	300	0	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	11550.00	46.89	74.00	-27.11	55.10	38.34	14.95	61.50	0.00	100	0	PEAK																																																																																								

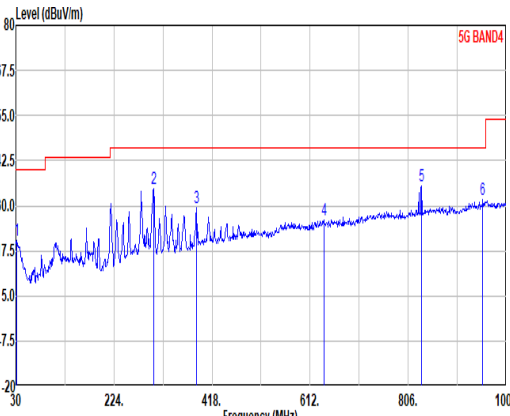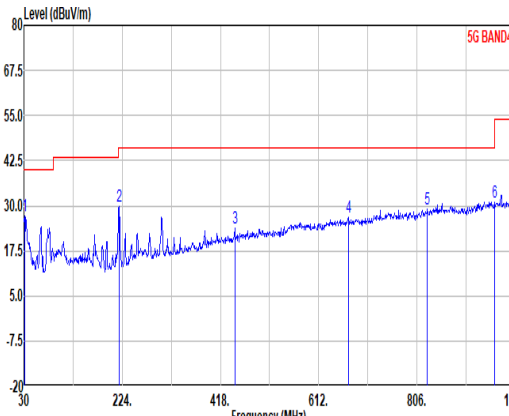


Mode	10																																																																																																																																																																																													
	LF																																																																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																																																																																																													
Pol.	Horizontal					Vertical																																																																																																																																																																																								
QPI Peak																																																																																																																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>30.97</td><td>20.43</td><td>40.00</td><td>-19.57</td><td>28.51</td><td>24.44</td><td>0.47</td><td>32.99</td><td>0.00 --- --- Peak</td></tr><tr><td>2</td><td>302.57</td><td>34.63</td><td>46.00</td><td>-11.37</td><td>45.67</td><td>19.42</td><td>2.35</td><td>32.81</td><td>0.00 --- --- Peak</td></tr><tr><td>3</td><td>387.93</td><td>29.30</td><td>46.00</td><td>-16.70</td><td>38.11</td><td>21.38</td><td>2.66</td><td>32.85</td><td>0.00 --- --- Peak</td></tr><tr><td>4</td><td>639.16</td><td>26.20</td><td>46.00</td><td>-19.80</td><td>29.07</td><td>26.68</td><td>3.42</td><td>32.97</td><td>0.00 --- --- Peak</td></tr><tr><td>5</td><td>832.19</td><td>35.39</td><td>46.00</td><td>-10.61</td><td>34.91</td><td>29.10</td><td>3.89</td><td>32.51</td><td>0.00 --- --- Peak</td></tr><tr><td>6</td><td>953.44</td><td>31.69</td><td>46.00</td><td>-14.31</td><td>28.19</td><td>30.94</td><td>4.16</td><td>31.60</td><td>0.00 --- --- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	30.97	20.43	40.00	-19.57	28.51	24.44	0.47	32.99	0.00 --- --- Peak	2	302.57	34.63	46.00	-11.37	45.67	19.42	2.35	32.81	0.00 --- --- Peak	3	387.93	29.30	46.00	-16.70	38.11	21.38	2.66	32.85	0.00 --- --- Peak	4	639.16	26.20	46.00	-19.80	29.07	26.68	3.42	32.97	0.00 --- --- Peak	5	832.19	35.39	46.00	-10.61	34.91	29.10	3.89	32.51	0.00 --- --- Peak	6	953.44	31.69	46.00	-14.31	28.19	30.94	4.16	31.60	0.00 --- --- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>30.97</td><td>27.07</td><td>40.00</td><td>-12.93</td><td>35.15</td><td>24.44</td><td>0.47</td><td>32.99</td><td>0.00 --- --- Peak</td></tr><tr><td>2</td><td>218.18</td><td>29.84</td><td>46.00</td><td>-16.16</td><td>45.39</td><td>15.26</td><td>2.00</td><td>32.81</td><td>0.00 --- --- Peak</td></tr><tr><td>3</td><td>446.13</td><td>23.89</td><td>46.00</td><td>-22.11</td><td>31.11</td><td>22.97</td><td>2.85</td><td>33.04</td><td>0.00 --- --- Peak</td></tr><tr><td>4</td><td>671.17</td><td>26.97</td><td>46.00</td><td>-19.03</td><td>29.84</td><td>26.62</td><td>3.51</td><td>33.00</td><td>0.00 --- --- Peak</td></tr><tr><td>5</td><td>826.37</td><td>28.91</td><td>46.00</td><td>-17.09</td><td>28.64</td><td>28.94</td><td>3.88</td><td>32.55</td><td>0.00 --- --- Peak</td></tr><tr><td>6</td><td>959.26</td><td>31.08</td><td>46.00</td><td>-14.92</td><td>27.52</td><td>30.91</td><td>4.17</td><td>31.52</td><td>0.00 --- --- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	30.97	27.07	40.00	-12.93	35.15	24.44	0.47	32.99	0.00 --- --- Peak	2	218.18	29.84	46.00	-16.16	45.39	15.26	2.00	32.81	0.00 --- --- Peak	3	446.13	23.89	46.00	-22.11	31.11	22.97	2.85	33.04	0.00 --- --- Peak	4	671.17	26.97	46.00	-19.03	29.84	26.62	3.51	33.00	0.00 --- --- Peak	5	826.37	28.91	46.00	-17.09	28.64	28.94	3.88	32.55	0.00 --- --- Peak	6	959.26	31.08	46.00	-14.92	27.52	30.91	4.17	31.52	0.00 --- --- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																				
	1	30.97	20.43	40.00	-19.57	28.51	24.44	0.47	32.99	0.00 --- --- Peak																																																																																																																																																																																				
	2	302.57	34.63	46.00	-11.37	45.67	19.42	2.35	32.81	0.00 --- --- Peak																																																																																																																																																																																				
	3	387.93	29.30	46.00	-16.70	38.11	21.38	2.66	32.85	0.00 --- --- Peak																																																																																																																																																																																				
	4	639.16	26.20	46.00	-19.80	29.07	26.68	3.42	32.97	0.00 --- --- Peak																																																																																																																																																																																				
	5	832.19	35.39	46.00	-10.61	34.91	29.10	3.89	32.51	0.00 --- --- Peak																																																																																																																																																																																				
6	953.44	31.69	46.00	-14.31	28.19	30.94	4.16	31.60	0.00 --- --- Peak																																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																					
1	30.97	27.07	40.00	-12.93	35.15	24.44	0.47	32.99	0.00 --- --- Peak																																																																																																																																																																																					
2	218.18	29.84	46.00	-16.16	45.39	15.26	2.00	32.81	0.00 --- --- Peak																																																																																																																																																																																					
3	446.13	23.89	46.00	-22.11	31.11	22.97	2.85	33.04	0.00 --- --- Peak																																																																																																																																																																																					
4	671.17	26.97	46.00	-19.03	29.84	26.62	3.51	33.00	0.00 --- --- Peak																																																																																																																																																																																					
5	826.37	28.91	46.00	-17.09	28.64	28.94	3.88	32.55	0.00 --- --- Peak																																																																																																																																																																																					
6	959.26	31.08	46.00	-14.92	27.52	30.91	4.17	31.52	0.00 --- --- Peak																																																																																																																																																																																					

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	97.46	1.391	0.719	0.75KHz
802.11ac VHT20	97.52	1.310	0.763	0.82KHz
802.11ac VHT40	94.53	0.654	1.530	1.6KHz
802.11ac VHT80	90.69	0.325	3.080	3.3KHz

802.11a

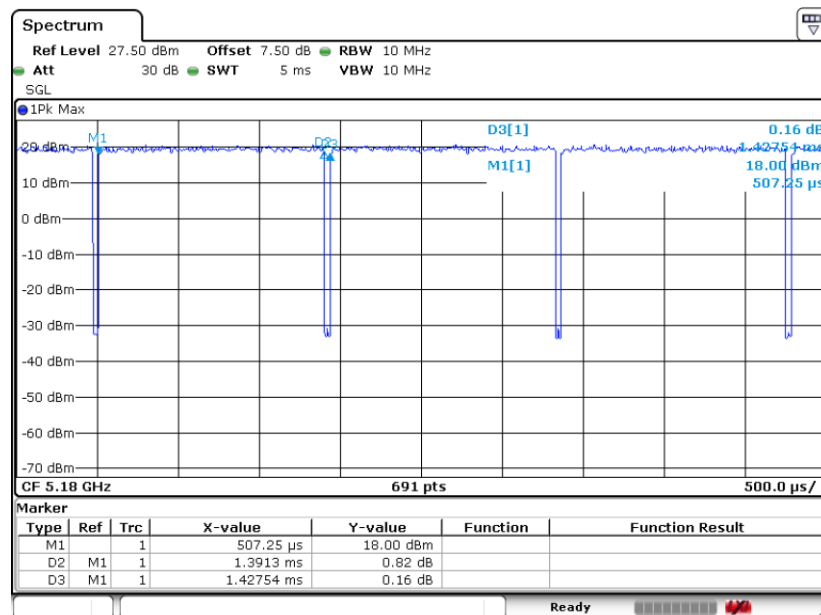




802.11ac VHT20

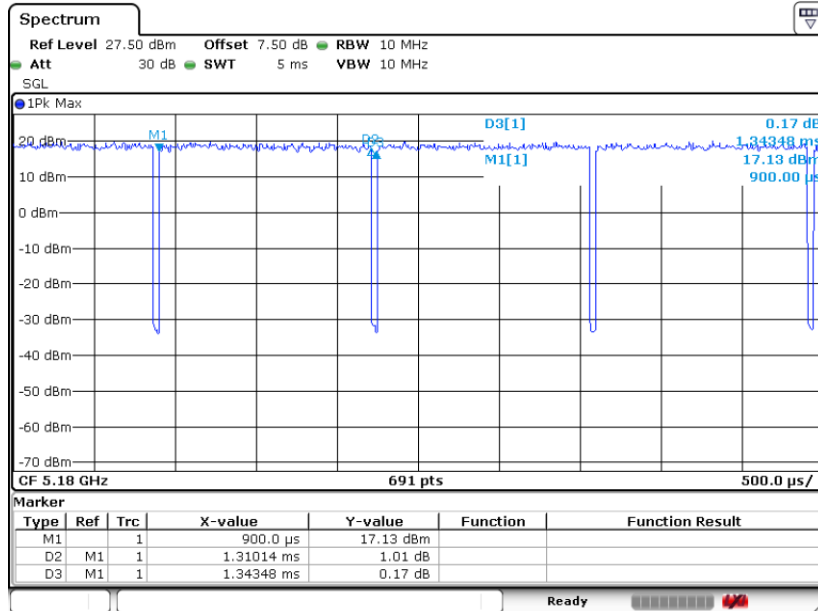

802.11ac VHT40

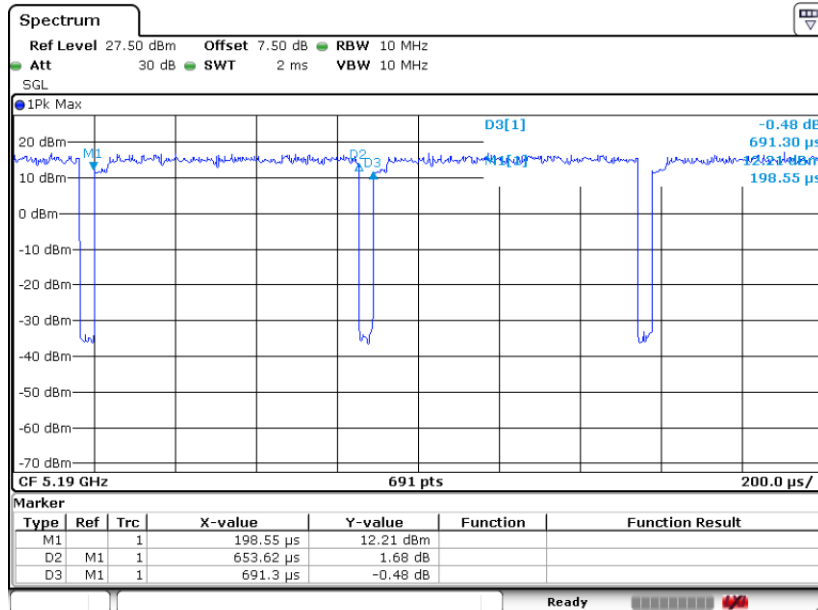



802.11ac VHT80

