TEST REPORT

Application No.:	ZR/2020/50040
Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
EUT Description:	Mobile Phone
Model No.:	M2006C3MG
Trade Mark:	Redmi
FCC ID:	2AFZZC3MG
Standard(s) :	47 CFR Part 15, Subpart B
Date of Receipt:	2020-05-26
Date of Test:	2020-06-05 to 2020-06-10
Date of Issue:	2021-5-26
Test Result:	**Pass***

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Simon Ling

Simon Ling
Wireless Laboratory Manager

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd. Wireless Laboratory
1/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xi'an, Shaanxi, China 710086 t (86–29) 6282 7885 www.sgsgroup.com.cn
中国·西安·沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86–29) 6282 7885 sgs.china@sgs.com
Member of the SGS Group (SGS SA)

Revision Record				
Version	***Chapter***	***Date***	***Modifier***	***Remark***
01		*2020-06-28*		*Original*
02		2021-5-26	Leah Chen	1. Modify data conversion error of antenna height 2.Updated equipment list

*This report supersedes our previous report ZR/2020/5004006, issued on 2020-06-28, which is hereby deemed null and void.

Authorized for issue by:		
Prepared By		Leah chen **(Leah Chen) /Engineer**
Checked By		Daniel Wang **(Daniel Wang) /Reviewer**

2 Test Summary

Emission Part				
Item	**Standard**	**Method**	**Requirement**	**Result**
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass
Radiated Emissions (30MHz-1GHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass
Radiated Emissions (above 1GHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass

Internal Source	Upper Frequency
Below 1.705MHz	30MHz
1.705MHz to 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5th harmonic of the highest frequency or 40GHz, whichever is lower

3 Contents

Page

1 COVER PAGE 1

2 TEST SUMMARY 3

3 CONTENTS 4

4 GENERAL INFORMATION 5

4.1 DESCRIPTION OF SUPPORT UNITS 6
4.2 MEASUREMENT UNCERTAINTY 6
4.3 TEST LOCATION 7
4.4 TEST FACILITY 7
4.5 DEVIATION FROM STANDARDS 7
4.6 ABNORMALITIES FROM STANDARD CONDITIONS 7

5 EQUIPMENT LIST 8

6 EMISSION TEST RESULTS 9

6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHZ-30MHZ) 9
6.1.1 E.U.T. Operation 9
6.1.2 Test Setup Diagram 10
6.1.3 Measurement Data 10
6.2 RADIATED EMISSIONS (30MHZ-1GHZ) 13
6.2.1 E.U.T. Operation 13
6.2.2 Test Setup Diagram 14
6.2.3 Measurement Data 14
6.3 RADIATED EMISSIONS (ABOVE 1GHZ) 17
6.3.1 E.U.T. Operation 17
6.3.2 Test Setup Diagram 18
6.3.3 Measurement Data 18

7 PHOTOGRAPHS 21

7.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHZ-30MHZ) TEST SETUP 21
7.2 RADIATED EMISSIONS (30MHZ-1GHZ) TEST SETUP 21
7.3 RADIATED EMISSIONS (ABOVE 1GHZ) TEST SETUP 21
7.4 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS) 21

4 General Information

Product Name:	Mobile Phone		
Model No.(EUT):	M2006C3MG		
Trade Mark:	Redmi		
FCC ID:	2AFZZC3MG		
Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Phase:	Identical Prototype		
Hardware Version:	P2		
Software Version:	MIUI 12		
Antenna Type:	PIFA Antenna		
Device Operating Configurations :			
Modulation Mode:	**GSM:** GMSK, 8PSK; **WCDMA:** QPSK,16QAM(HSPA+); **LTE:** QPSK,16QAM **WIFI:** DSSS, OFDM; **BT:** GFSK, π/4DQPSK,8DPSK		
Device Class:	B		
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12
HSDPA UE Category:	24	HSUPA UE Category	7
DC-HSDPA UE Category:	24		
Power Class	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(WCDMA Band II/IV/V)		
	3, tested with power control Max Power(LTE Band 2/4/5/7/38/41)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	WCDMA Band II	1850~1910	1930~1990
	WCDMA Band IV	1710~1755	2110~2155
	WCDMA Band V	824~849	869~894
	LTE Band 2	1850 ~1910	1930 ~1990
	LTE Band 4	1710~1755	2110~2155
	LTE Band 5	824~849	869-894
	LTE Band 7	2500~2570	2620~2690
	LTE Band 38	2570~2620	2570~2620
	LTE Band 41	2535~2655	2535~2655
	Wi-Fi 2.4G	2402~2472	2402~2472
	Bluetooth	2402~2480	2402~2480
	GNSS(GPS/BDS/GLONASS)	/	1559~1610
	FM	87.5~108	
Battery Information:	Model:	BN56	
	Normal Voltage:	+3.85V	
	Rated capacity:	4900mAh	
	Manufacturer:	Ningde Amperex Technology Limited	
Adaptor Information1 #:	Model:	MDY-09-EQ	
	Brand Name:	MI	
	SEC:	I/P: 100 - 240 Vac, 0.35 A, O/P:5.0V,2A;	
	Manufacturer:	Jiangsu Chenyang Electron Co.,Ltd.	
Adaptor Information2 #:	Model:	MDY-09-EQ	
	Brand Name:	MI	
	SEC:	I/P: 100 - 240 Vac, 0.35 A, O/P:5.0V,2A;	

	Manufacturer:	Jiangxi jian Aohai Technology Co.,Ltd.
USB Cable Information :	Model:	H52210
	Signal Line	1.0 meter, shielded cable
	Manufacturer:	Dehong

Note：There are 2 types of EUT sample, differences between them is Memory, EUT 1(3+64GB); EUT 2(2+32GB); Except listings above, the others are all the same .

4.1 Description of Support Units

Description	Manufacturer	Model No.	Inventory No.
Router	NETGEAR	R6020	No.XA1401
Computer	Lenovo	L480	No.XA1402
Mouse	A4TECH	OP-520NU USB	No.XA1403
Headset	Tiinlab Acoustic Technology (Shenzhen) Co., Ltd.	EM023	REF. No.SEA2222

4.2 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conduction Emission	± 3.0dB (150kHz to 30MHz)
2	Radiated Emission	± 4.8dB (Below 1GHz)
		± 4.8dB (1GHz to 6GHz)
		± 4.5dB (6GHz to 18GHz)
		± 5.02dB (Above 18GHz)

4.3 Test Location

All tests were performed at:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China
Post code:	710086
Test engineer:	Ben Huang, Leah Chen

No tests were sub-contracted.

4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 4854.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

- **FCC –Designation Number: CN1271.**

4.5 Deviation from Standards

None

4.6 Abnormalities from Standard Conditions

None

5 Equipment List

RE Test System					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2019-06-27	2020-06-26
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2019-09-07	2020-09-06
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12
Receiving antenna (1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2019-10-13	2021-10-12
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2019-11-18	2020-11-17
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2019-11-18	2020-11-17
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2019-12-03	2020-12-02
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2019-11-18	2020-11-17
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-12-06	2020-12-05
Measurement Software	Tonscend	TS+ RSE V3.0.0.2	XAW02-05-01	NCR	NCR
5G UXM	Keysight	E7515B	XAW01-19-01	2019-08-17	2020-08-16
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2019-06-27	2020-06-26

CE Test System					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Shielding Room	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2019-09-07	2020-09-06
Artificial network	ROHDE&SCHWARZ	ENV216	XAW01-04-01	2019-07-16	2020-07-15
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-12-06	2020-12-05
Measurement Software	Tonscend	TS+ CE V2.5	XAW02-05-02	NCR	NCR
5G UXM	Keysight	E7515B	XAW01-19-01	2019-08-17	2020-08-16
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2019-06-27	2020-06-26

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	47 CFR Part 15, Subpart B
Test Method:	ANSI C63.4:2014
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz	66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average
0.5M-5MHz	56dB(μV) quasi-peak, 46dB(μV) average
5M-30MHz	60dB(μV) quasi-peak, 50dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 18.9 °C Humidity: 55.1 % RH Atmospheric Pressure: 1000 mbar

Pretest these modes to find the worst case:

a: GSM850 Link+BT+WLAN2.4G+GPS Rx+playing MP4 (SD card)+earphone+EUT1+USB cable+adapter1

b:GSM1900 Link +BT+WLAN2.4G+GPS Rx+camera (Back)+earphone+EUT1+USB cable+adapter1

c:WCDMA II Link +BT+WLAN2.4G+GPS Rx+camera (Front)+earphone+EUT1+USB cable+adapter1

d:WCDMA IV Link +BT+WLAN2.4G+GPS Rx+camera (Back)+earphone+EUT1+USB cable+adapter1

e:WCDMA V Link +BT+WLAN2.4G+GPS Rx+camera (Back)+earphone+EUT1+USB cable+adapter1

f:LTE band 2 Link +BT+ WLAN2.4G +GPS Rx +earphone+EUT1+USB cable+adapter1

g:LTE band 4 Idle +BT+FM +WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

h:LTE band 5 Idle +BT+FM+WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

i:LTE band 7 Idle +BT+FM+WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

j:LTE band 38 Link +BT+FM +WLAN2.4G+GPS Rx +earphone+EUT1+USB cable+adapter1

k:LTE band 41 Idle +BT+FM +WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

l:Transfer data between the EUT1 and the PC+USB cable

m:GSM850 Link+BT+WLAN2.4G+GPS Rx+playing MP4 (SD card)+earphone+EUT1+USB cable+adapter2

n:GSM850 Link+BT+WLAN2.4G+GPS Rx+playing MP4 (SD card)+earphone+EUT2+USB cable+adapter1

The worst case for final test: a: GSM850 Link+BT+WLAN2.4G+GPS Rx+playing MP4 (SD card)+earphone+EUT1+USB cable+adapter1

6.1.2 Test Setup Diagram

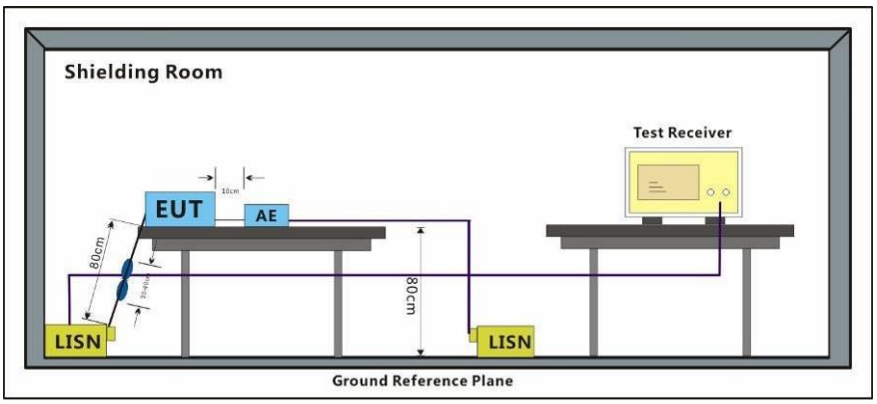

6.1.3 Measurement Data

An initial pre-scan was performed with peak detector.Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Mode:a; Line:Live Line

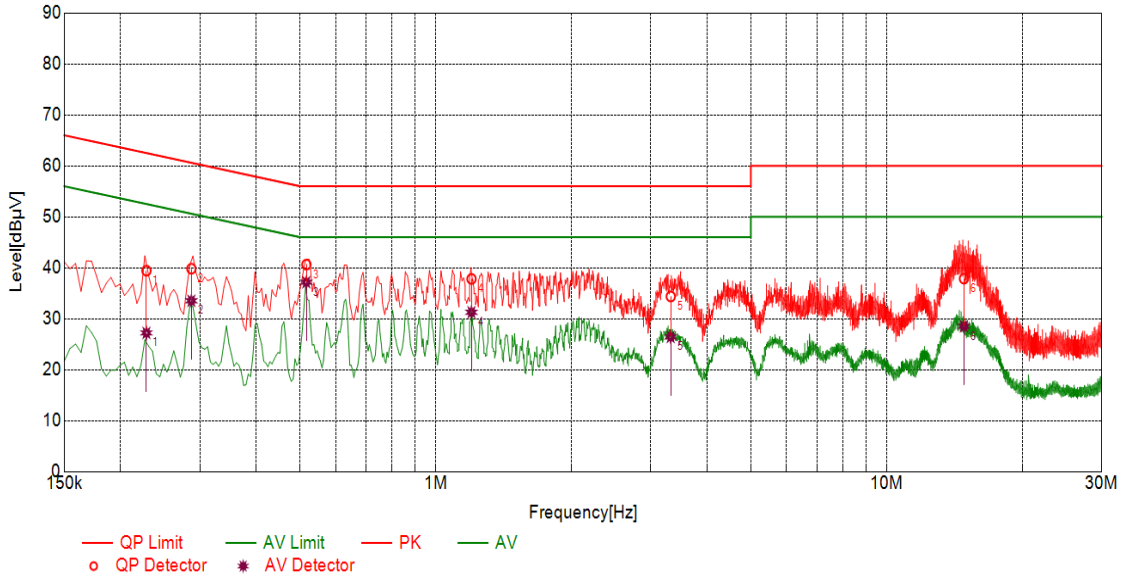

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Type
1	0.2283	10.10	39.43	62.51	23.08	27.21	52.51	25.30	L
2	0.2872	10.10	39.82	60.60	20.78	33.53	50.60	17.07	L
3	0.5166	10.10	40.63	56.00	15.37	37.16	46.00	8.84	L
4	1.2004	10.10	37.81	56.00	18.19	31.27	46.00	14.73	L
5	3.3200	10.10	34.37	56.00	21.63	26.43	46.00	19.57	L
6	14.8401	10.11	37.87	60.00	22.13	28.52	50.00	21.48	L

Mode:a; Line:Neutral Line

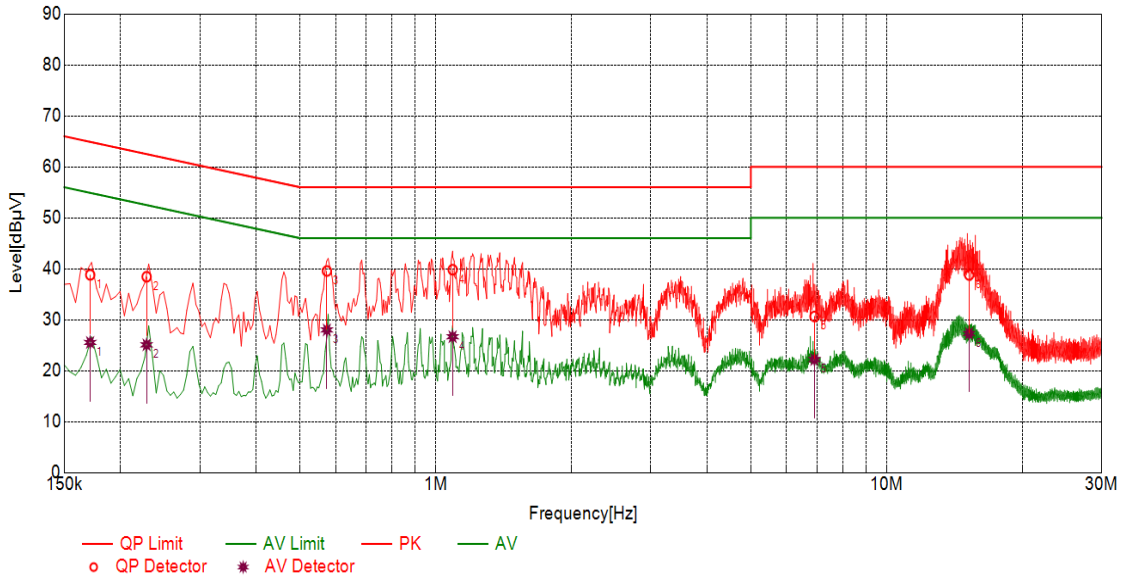

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Type
1	0.1713	10.10	38.81	64.90	26.09	25.54	54.90	29.36	N
2	0.2285	10.10	38.44	62.50	24.06	25.08	52.50	27.42	N
3	0.5737	10.10	39.57	56.00	16.43	28.00	46.00	18.00	N
4	1.0904	10.10	39.82	56.00	16.18	26.67	46.00	19.33	N
5	6.9188	10.10	30.65	60.00	29.35	22.19	50.00	27.81	N
6	15.2415	10.11	38.78	60.00	21.22	27.31	50.00	22.69	N

6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement:	47 CFR Part 15, Subpart B
Test Method:	ANSI C63.4:2014
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Limit:	
30MHz -88MHz	40.0(dBμV/m) quasi-peak
88MHz-216MHz	43.5(dBμV/m) quasi-peak
216MHz-960MHz	46.0(dBμV/m) quasi-peak
960MHz-1000MHz	54.0(dBμV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to1000MHz

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 66.5 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:

a:GSM850 Idle+BT+WLAN2.4G+GPS Rx+camera (Back)+earphone+EUT1+USB cable+adapter1

b:GSM1900 Idle+BT+WLAN2.4G+GPS Rx+playing MP4 (SD card)+earphone+EUT1+USB cable+adapter1

c:WCDMA II Idle+BT+WLAN2.4G+GPS Rx+camera (Front)+earphone+EUT1+USB cable+adapter1

d:WCDMA IV Idle+BT+WLAN2.4G+GPS Rx+camera (Back)+earphone+EUT1+USB cable+adapter1

e:WCDMA V Idle+BT+WLAN2.4G+GPS Rx+camera (Back)+earphone+EUT1+USB cable+adapter1

f:LTE band 2 Idle +BT+FM+ WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

g:LTE band 4 Idle +BT+FM +WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

h:LTE band 5 Idle +BT+FM+WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

i:LTE band 7 Idle +BT+FM+WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

j:LTE band 38 Idle +BT+FM +WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

k:LTE band 41 Idle +BT+FM +WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

l:Transfer data between the EUT1 and the PC+USB cable

m:GSM1900 Idle+BT+WLAN2.4G+GPS Rx+playing MP4 (SD card)+earphone+EUT1+USB cable+adapter2

n:Transfer data between the EUT2 and the PC+USB cable

The worst case for final test:

l:Transfer data between the EUT1 and the PC+USB cable

6.2.2 Test Setup Diagram

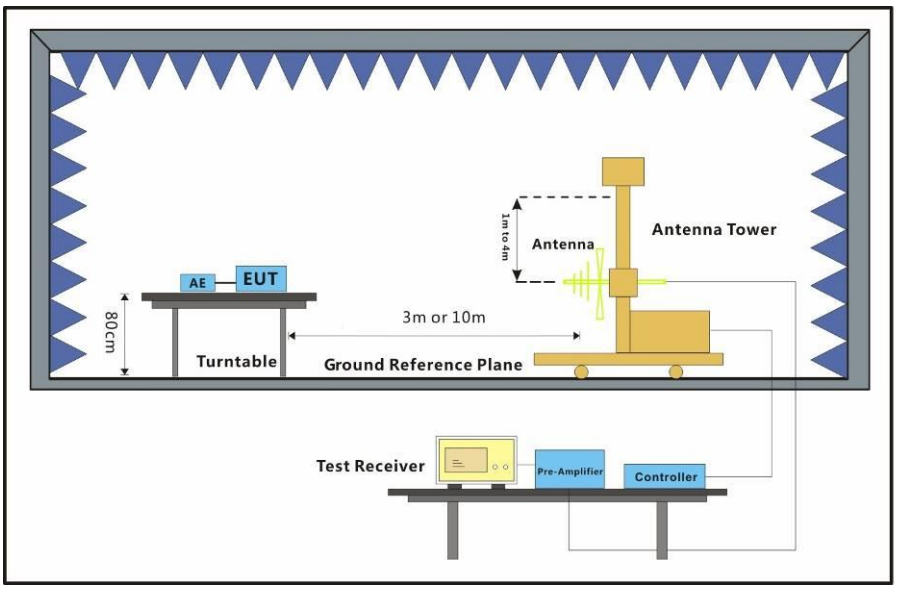

6.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Mode:I; Polarization:Horizontal

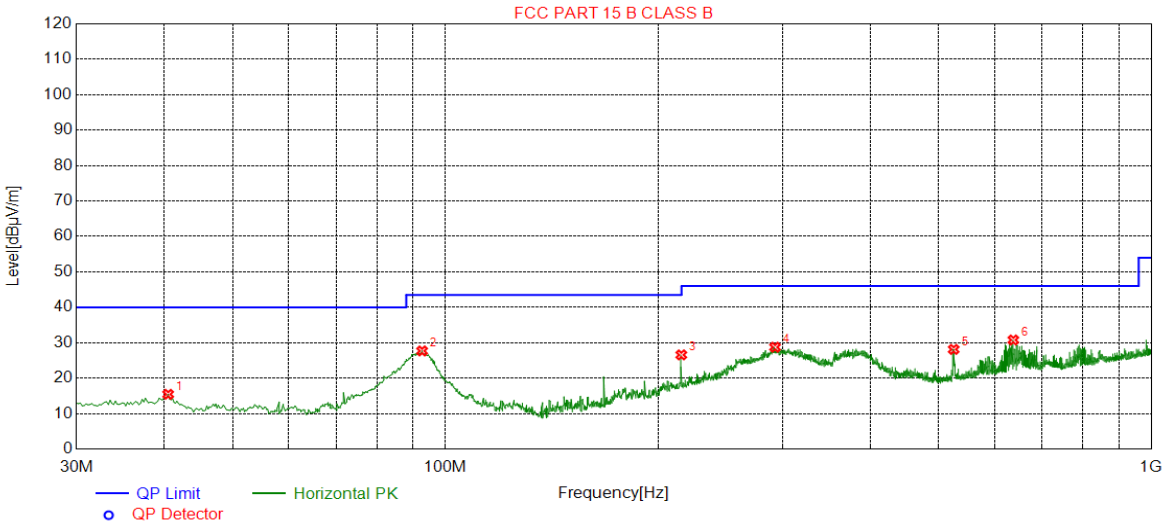

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	40.4781	15.45	-28.54	40.00	24.55	210	69	Horizontal
2	92.6745	27.68	-33.27	43.50	15.82	172	16	Horizontal
3	215.889	26.57	-30.82	43.50	16.93	234	32	Horizontal
4	293.116	28.74	-28.53	46.00	17.26	206	78	Horizontal
5	524.993	28.12	-22.68	46.00	17.88	216	60	Horizontal
6	637.729	30.78	-20.18	46.00	15.22	239	22	Horizontal

Mode:I; Polarization:Vertical

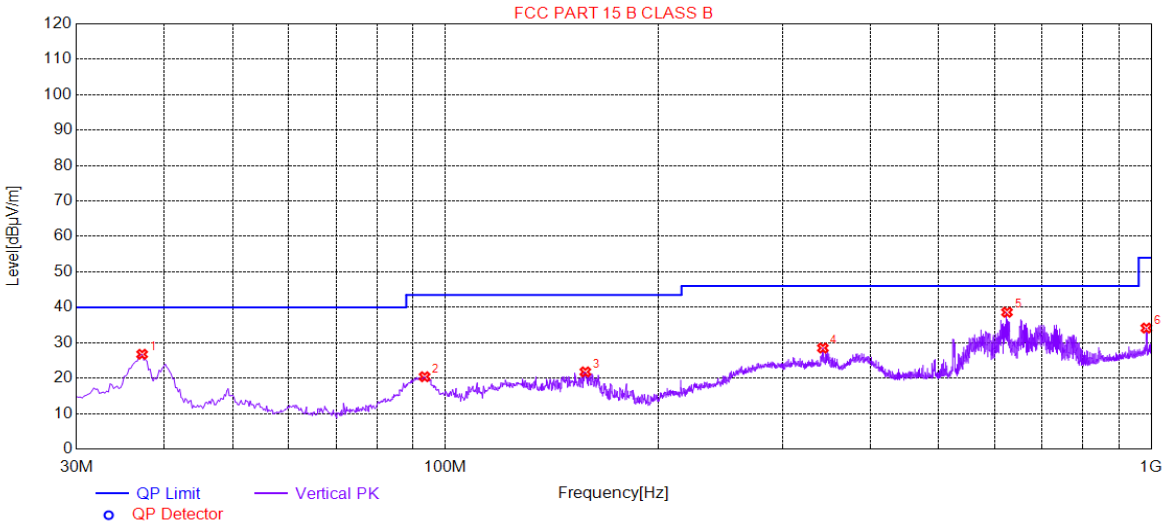

Suspected List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.1794	26.75	-29.25	40.00	13.25	151	14	Vertical
2	93.4507	20.40	-33.14	43.50	23.10	285	107	Vertical
3	157.871	21.77	-34.73	43.50	21.73	223	350	Vertical
4	342.596	28.50	-27.06	46.00	17.50	231	341	Vertical
5	624.728	38.60	-20.33	46.00	7.40	173	171	Vertical
6	984.476	34.14	-15.00	54.00	19.86	168	14	Vertical

6.3 Radiated Emissions (above 1GHz)

Test Requirement:	47 CFR Part 15, Subpart B
Test Method:	ANSI C63.4:2014
Frequency Range:	Above 1GHz
Measurement Distance:	3m
Limit:	
Above 1GHz	74(dBμV/m) peak, 54(dBμV/m) average
Detector:	Peak for pre-scan (1000kHz resolution bandwidth) 1000M to18000MHz

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C Humidity: 56.4 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:

a:GSM850 Idle+BT+WLAN2.4G+GPS Rx+camera (Back)+earphone+EUT1+USB cable+adapter1

b:GSM1900 Idle+BT+WLAN2.4G+GPS Rx+playing MP4 (SD card)+earphone+EUT1+USB cable+adapter1

c:WCDMA II Idle+BT+WLAN2.4G+GPS Rx+camera (Front)+earphone+EUT1+USB cable+adapter1

d:WCDMA IV Idle+BT+WLAN2.4G+GPS Rx+camera (Back)+earphone+EUT1+USB cable+adapter1

e:WCDMA V Idle+BT+WLAN2.4G+GPS Rx+camera (Back)+earphone+EUT1+USB cable+adapter1

f:LTE band 2 Idle +BT+FM+ WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

g:LTE band 4 Idle +BT+FM +WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

h:LTE band 5 Idle +BT+FM+WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

i:LTE band 7 Idle +BT+FM+WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

j:LTE band 38 Idle +BT+FM +WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

k:LTE band 41 Idle +BT+FM +WLAN2.4G+GPS Rx+earphone+EUT1+USB cable+adapter1

l:Transfer data between the EUT1 and the PC+USB cable

m:GSM1900 Idle+BT+WLAN2.4G+GPS Rx+playing MP4 (SD card)+earphone+EUT1+USB cable+adapter2

n:Transfer data between the EUT2 and the PC+USB cable

The worst case for final test:

l:Transfer data between the EUT1 and the PC+USB cable

6.3.2 Test Setup Diagram

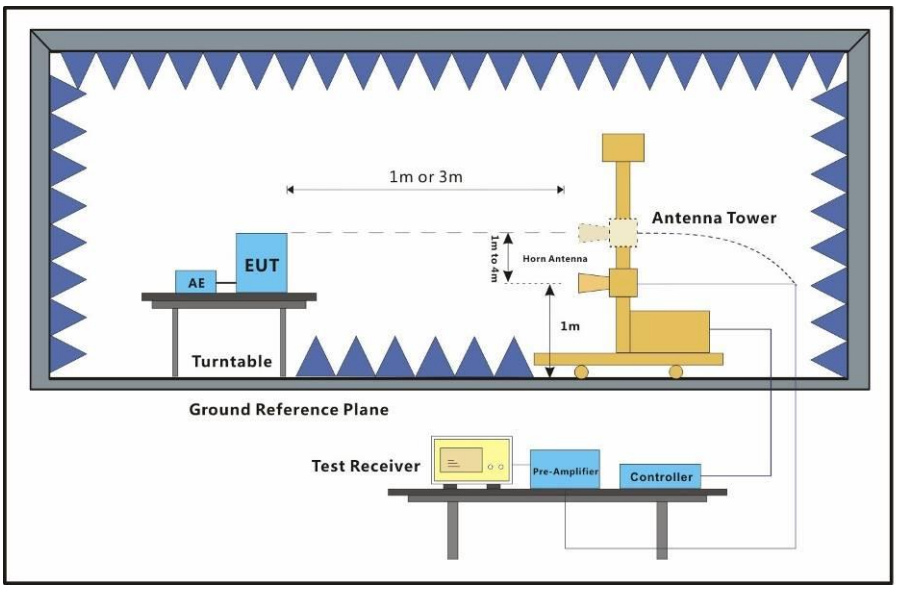

6.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

Mode:I; Polarization:Horizontal

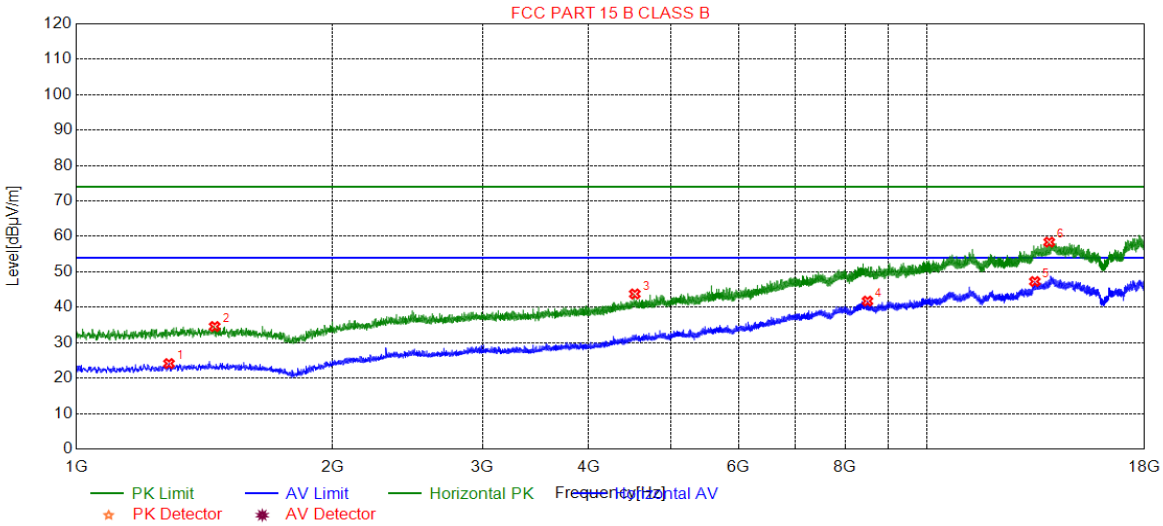

Suspected List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1284.76	24.12	-30.84	54.00	29.88	213	3	Horizontal
2	1453.92	34.57	-30.37	74.00	39.43	171	54	Horizontal
3	4531.07	43.77	-19.20	74.00	30.23	130	269	Horizontal
4	8504.17	41.75	-7.58	54.00	12.25	108	306	Horizontal
5	13374.0	47.27	0.25	54.00	6.73	144	320	Horizontal
6	13906.1	58.40	2.17	74.00	15.60	207	206	Horizontal

Mode:I; Polarization:Vertical

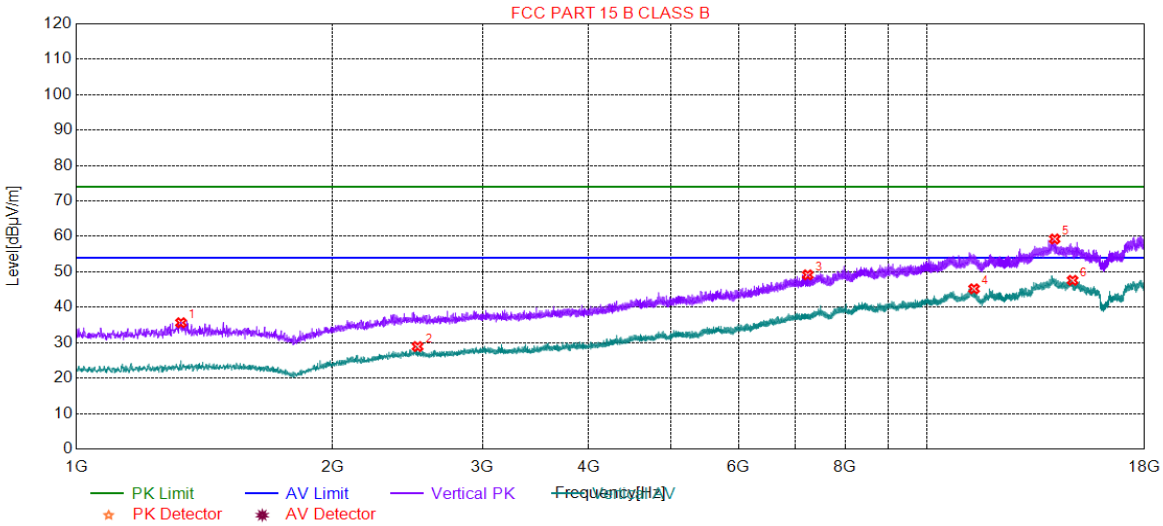

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1327.26	35.64	-30.63	74.00	38.36	268	4	Vertical
2	2517.32	28.92	-25.87	54.00	25.08	285	118	Vertical
3	7235.06	49.16	-10.23	74.00	24.84	188	4	Vertical
4	11345.0	45.22	-2.72	54.00	8.78	254	318	Vertical
5	14111.0	59.27	2.33	74.00	14.73	172	155	Vertical
6	14812.3	47.60	1.66	54.00	6.40	280	356	Vertical

7 Photographs

7.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup

7.2 Radiated Emissions (30MHz-1GHz) Test Setup

7.3 Radiated Emissions (above 1GHz) Test Setup

7.4 EUT Constructional Details (EUT Photos)

Refer to Photographs of EUT Constructional Details

- End of the Report -