

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n2 20M QPSK 1RB1 376000CH Bottom side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.324$ S/m; $\epsilon_r = 40.218$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.869 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.54 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.303 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 0.909 W/kg

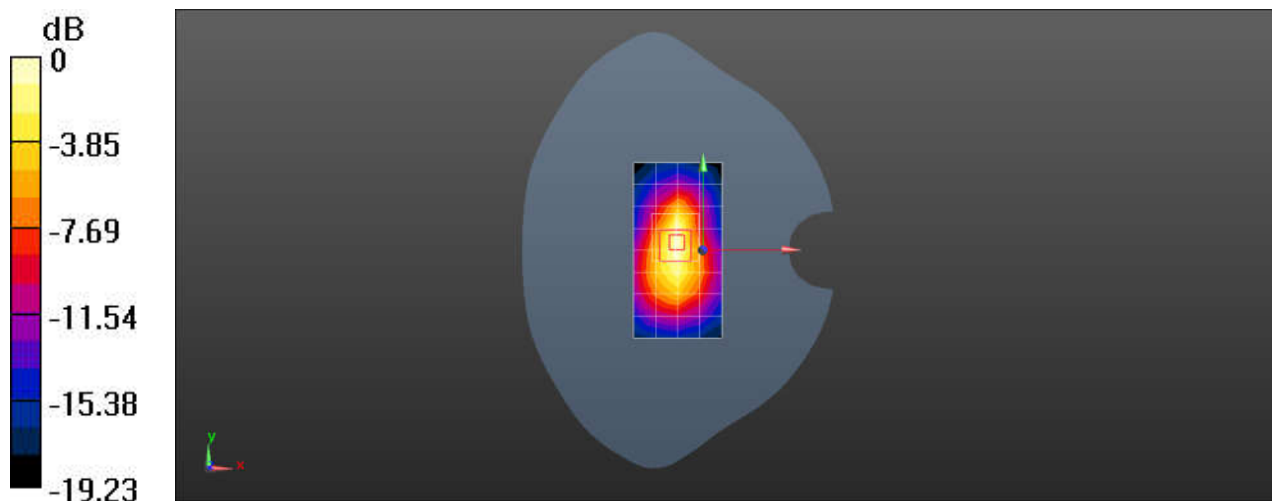

0 dB = 0.909 W/kg = -0.41 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n5 20M QPSK 50RB28 167300CH Left cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.337$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.19, 10.19, 10.19); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.885 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.864 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.364 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 1.20 W/kg

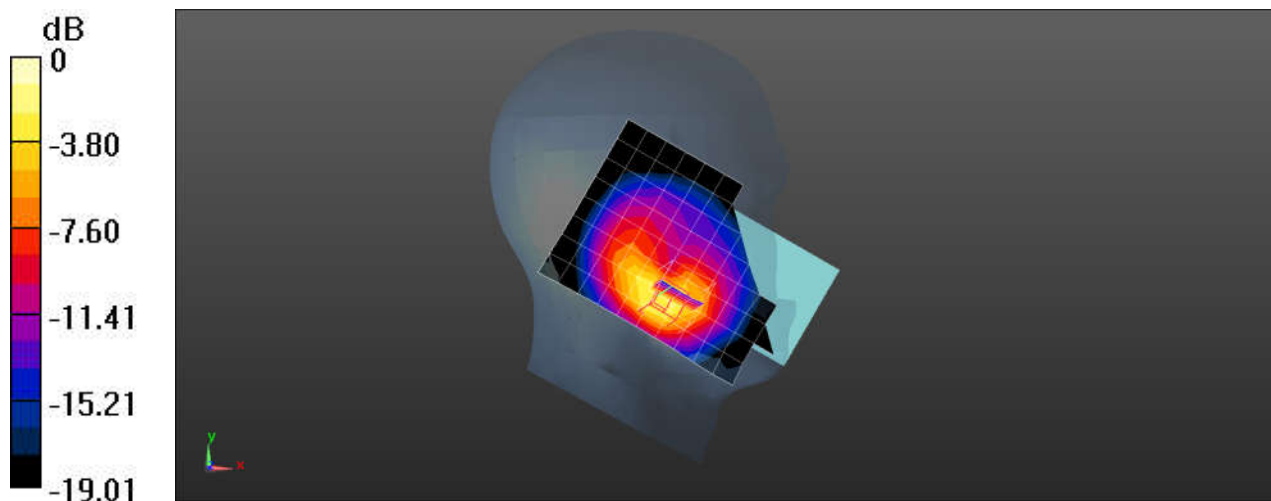

0 dB = 1.20 W/kg = 0.79 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n5 20M QPSK 50RB28 167300CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.19, 10.19, 10.19); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.980 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.717 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.380 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 1.09 W/kg

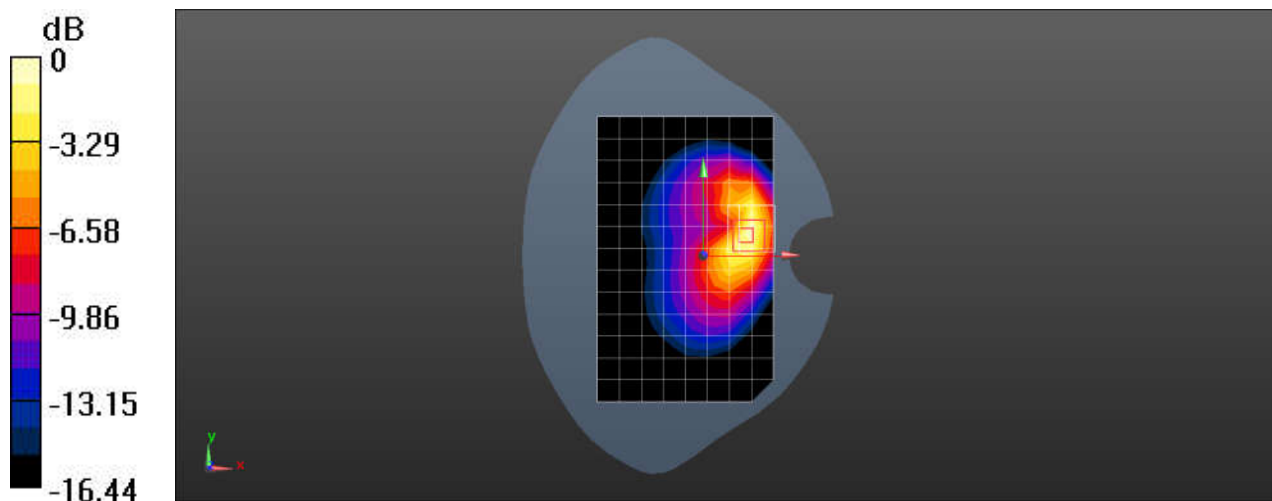

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n5 20M QPSK 1RB1 167300CH Left side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.19, 10.19, 10.19); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.01 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.70 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 1.00 W/kg

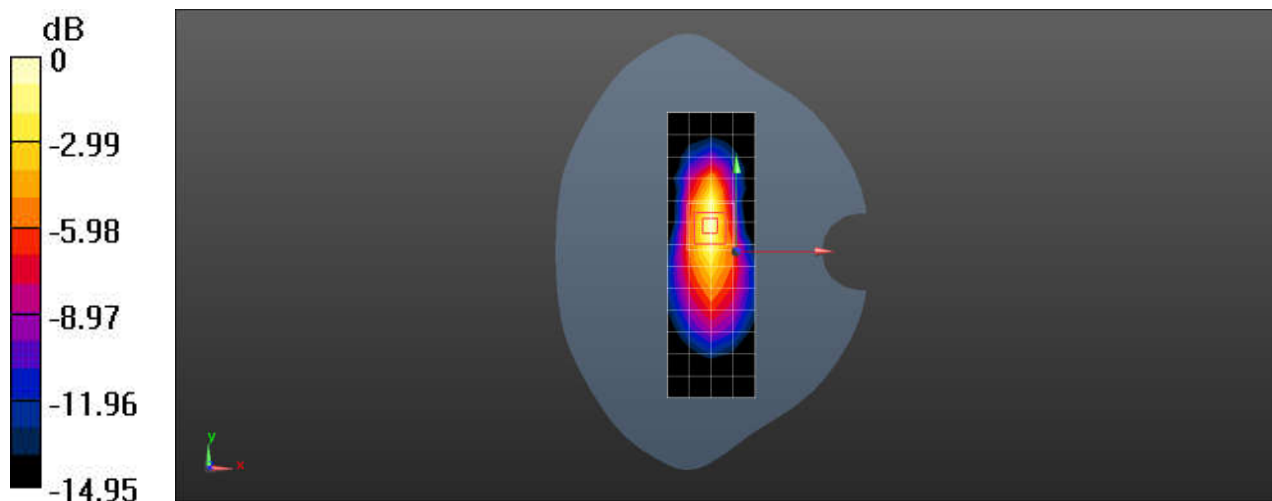

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n7 50M QPSK 1RB1 507000CH Right cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 38.619$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.71 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.709 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.40 W/kg

SAR(1 g) = 0.916 W/kg; SAR(10 g) = 0.405 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 43.1%

Maximum value of SAR (measured) = 1.86 W/kg

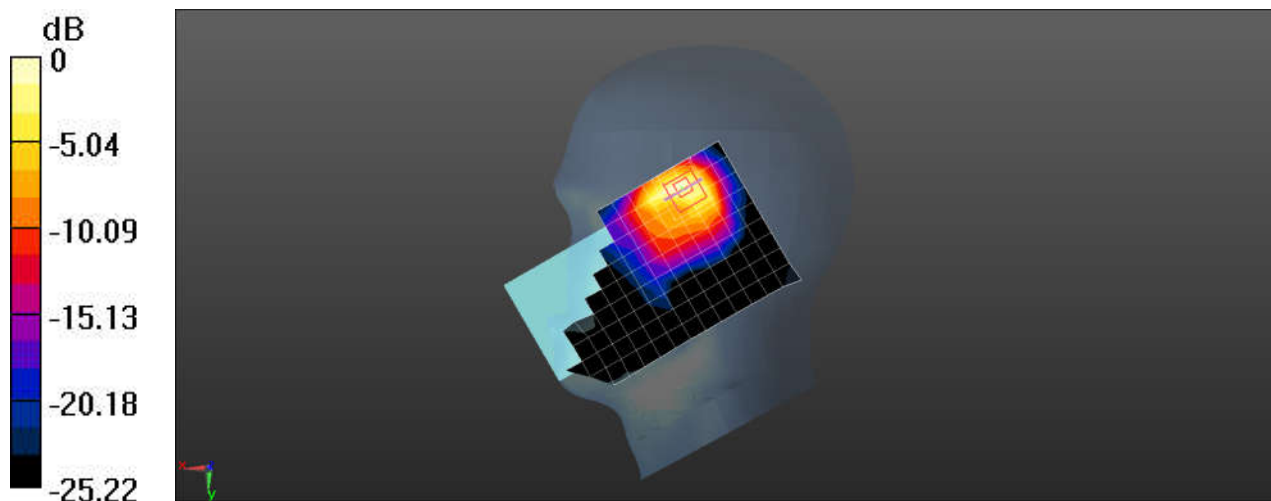

0 dB = 1.86 W/kg = 2.70 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n7 50M QPSK 1RB1 507000CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 38.619$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.09 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.959 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.376 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.6%

Maximum value of SAR (measured) = 1.43 W/kg

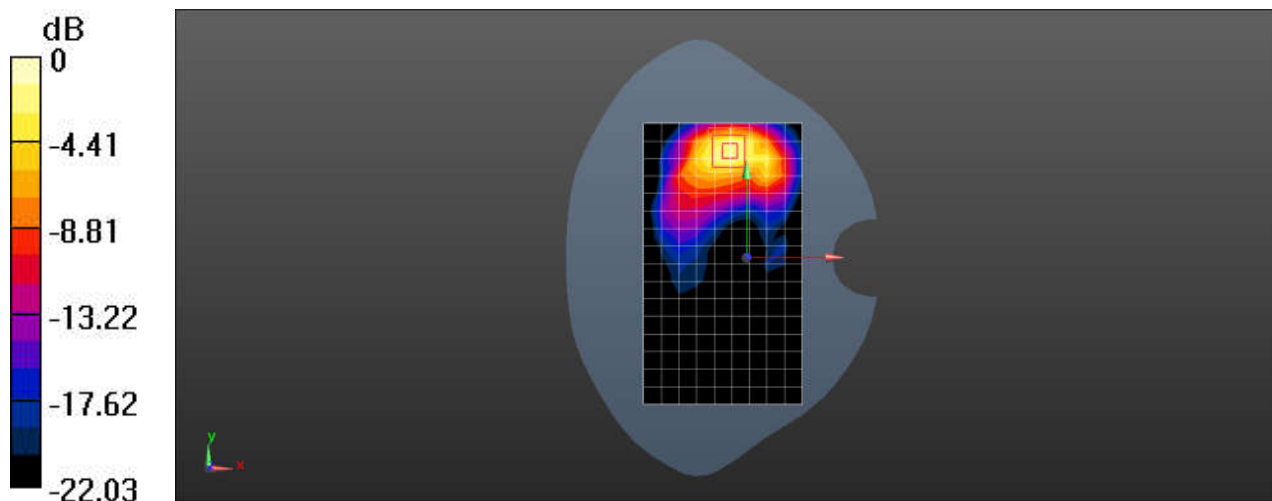

0 dB = 1.43 W/kg = 1.55 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n7 50M QPSK 1RB1 507000CH Top side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 38.619$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.662 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.61 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 0.840 W/kg

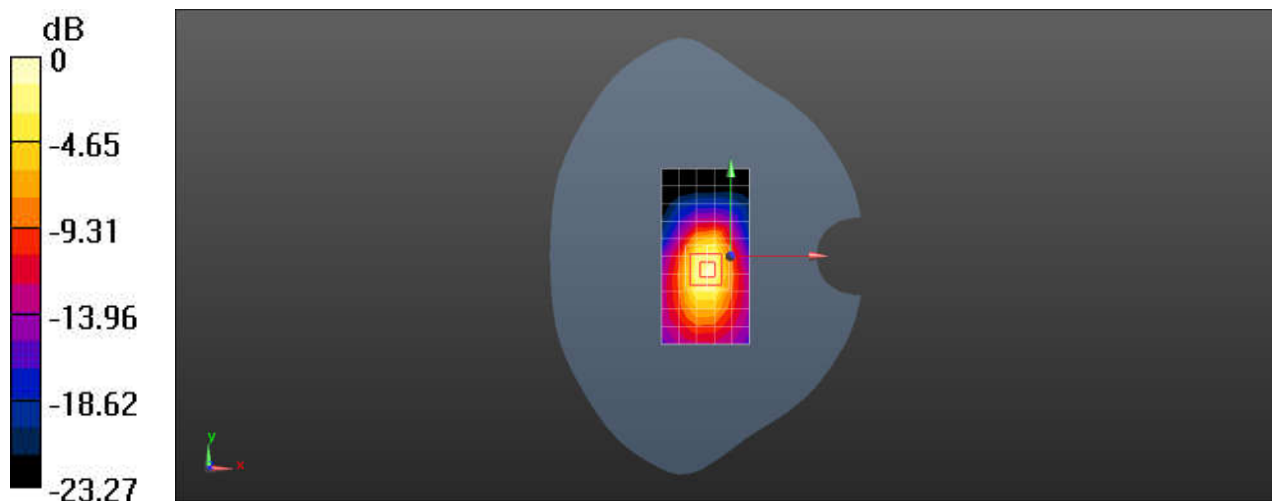

0 dB = 0.840 W/kg = -0.76 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n26 20M QPSK 50RB28 166300CH Left cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.362$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.19, 10.19, 10.19); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.04 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.940 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.457 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 1.63 W/kg

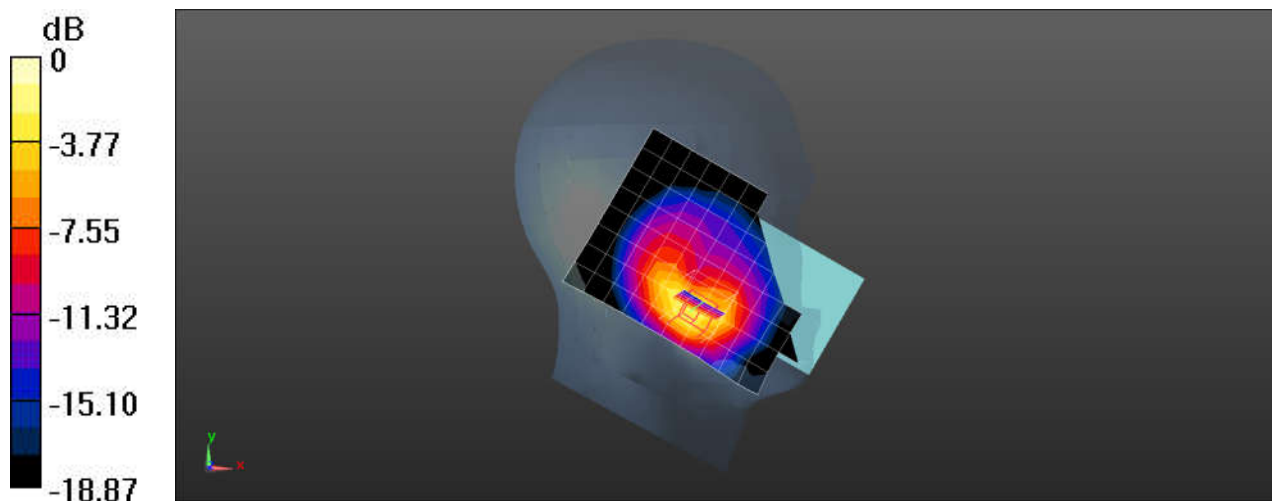

0 dB = 1.63 W/kg = 2.12 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n26 20M QPSK 50RB28 166300CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.362$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.19, 10.19, 10.19); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.929 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.450 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 0.972 W/kg

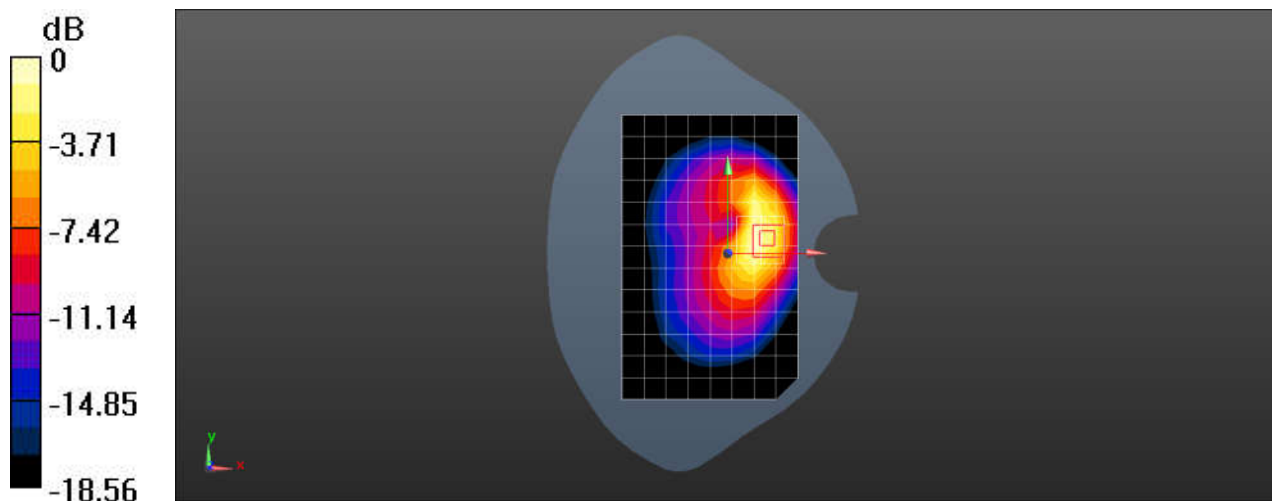

0 dB = 0.972 W/kg = -0.12 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n26 20M QPSK 50RB28 166300CH Left side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.362$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.19, 10.19, 10.19); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.899 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.30 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 0.926 W/kg

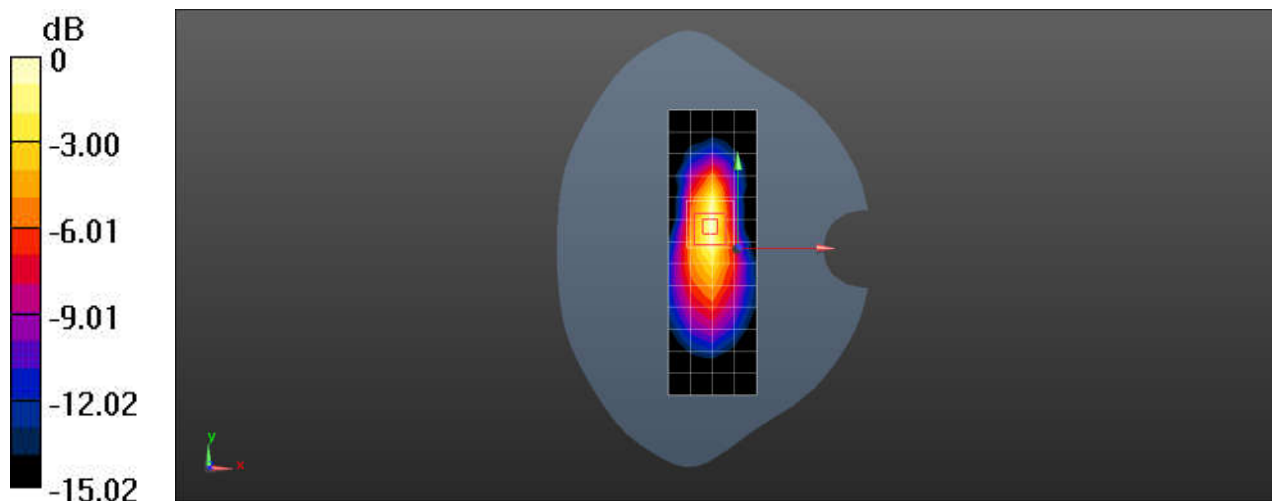

0 dB = 0.926 W/kg = -0.33 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n38 40M QPSK 50RB28 519000CH Right cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 2595 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 38.503$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.79, 7.79, 7.79); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.61 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.335 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 0.919 W/kg; SAR(10 g) = 0.408 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 41%

Maximum value of SAR (measured) = 1.64 W/kg

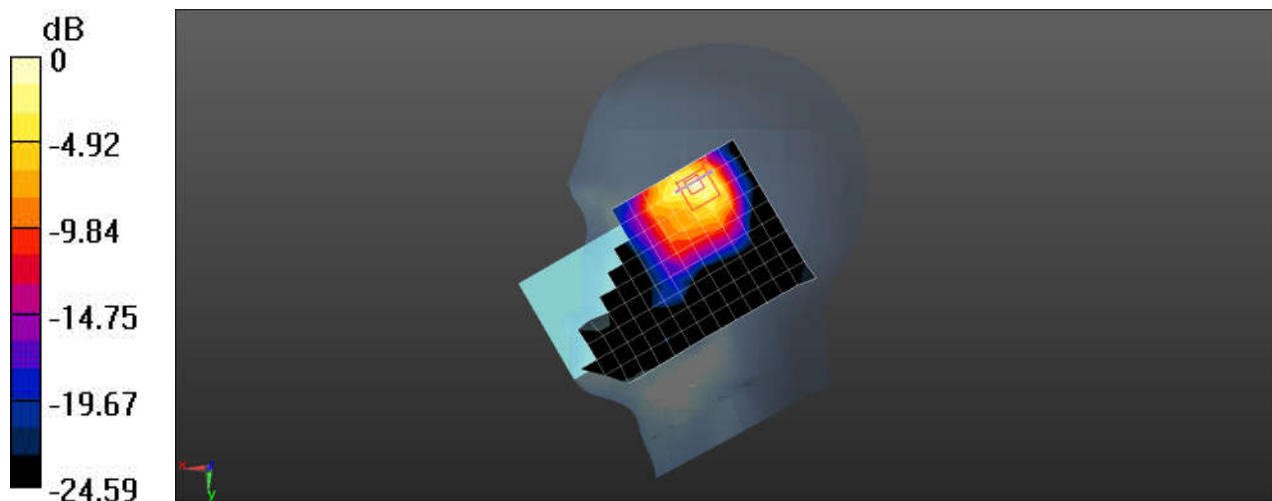

0 dB = 1.64 W/kg = 2.15 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n38 40M QPSK 50RB28 519000CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 2595 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 38.503$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.79, 7.79, 7.79); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.30 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.553 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.840 W/kg; SAR(10 g) = 0.340 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 41.6%

Maximum value of SAR (measured) = 1.60 W/kg

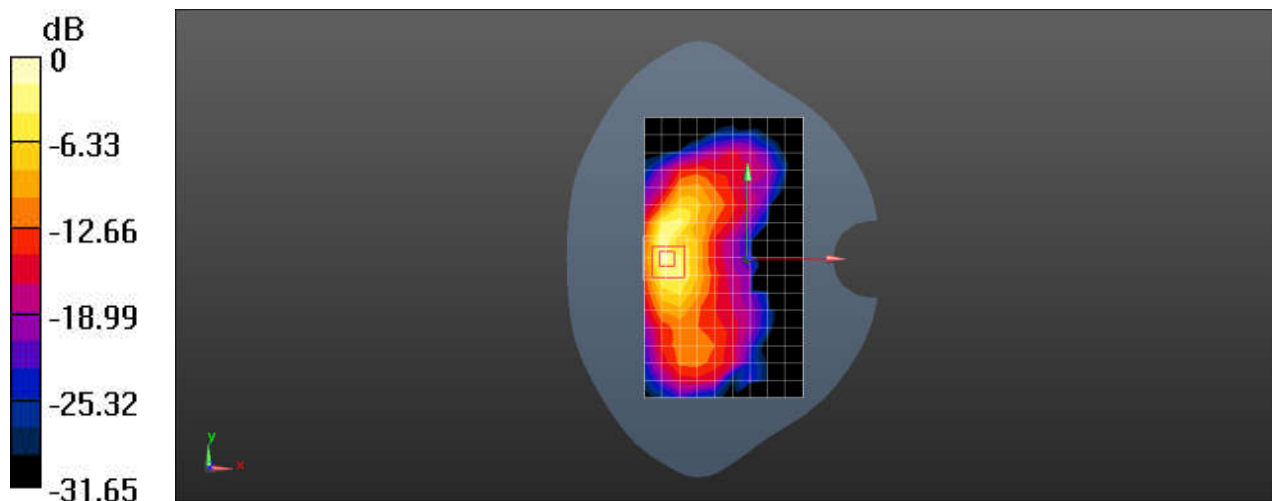

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n38 40M QPSK 1RB1 519000CH Top side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 2595 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 38.503$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.79, 7.79, 7.79); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.935 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.84 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 48.6%

Maximum value of SAR (measured) = 0.955 W/kg

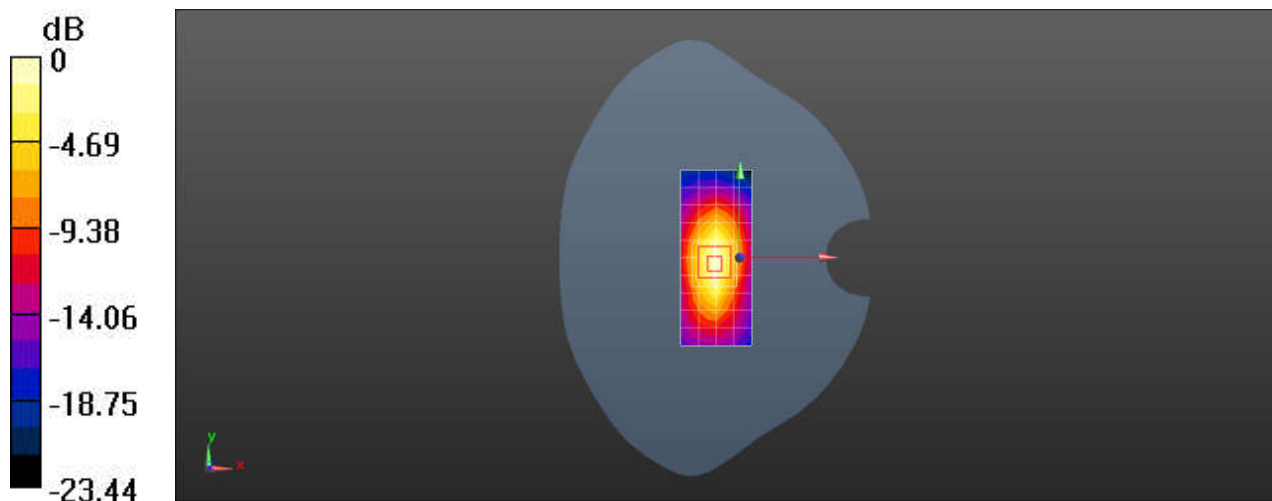

0 dB = 0.955 W/kg = -0.20 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n41 100M QPSK 1RB1 518598CH Right cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.996$ S/m; $\epsilon_r = 38.425$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.79, 7.79, 7.79); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.26 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.659 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.734 W/kg; SAR(10 g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 44.6%

Maximum value of SAR (measured) = 1.33 W/kg

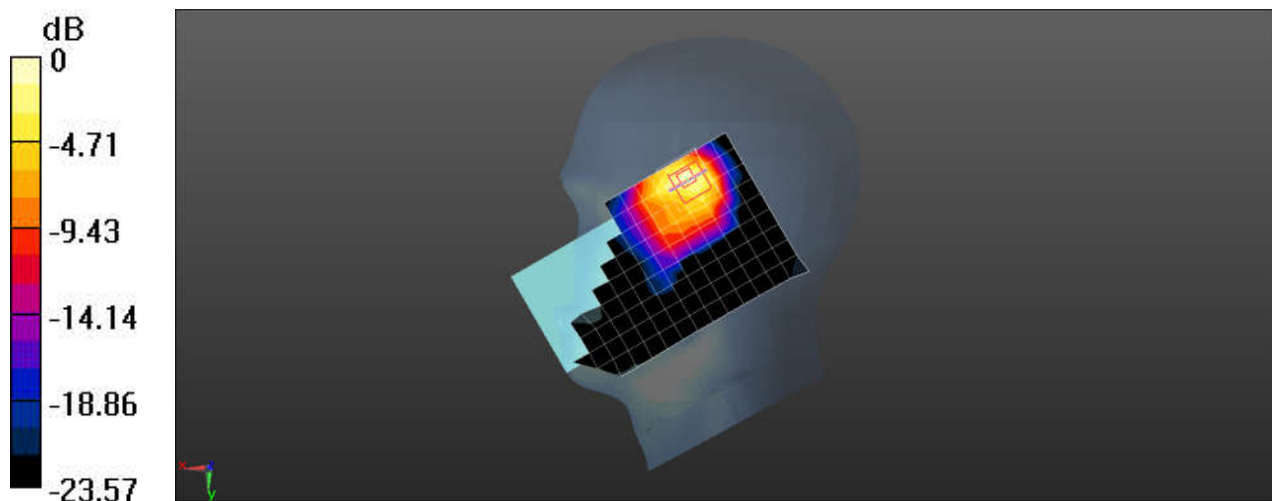

0 dB = 1.33 W/kg = 1.24 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n41 100M QPSK 135RB69 518598CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.996$ S/m; $\epsilon_r = 38.425$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.79, 7.79, 7.79); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.72 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.733 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.852 W/kg; SAR(10 g) = 0.303 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 40.3%

Maximum value of SAR (measured) = 1.85 W/kg

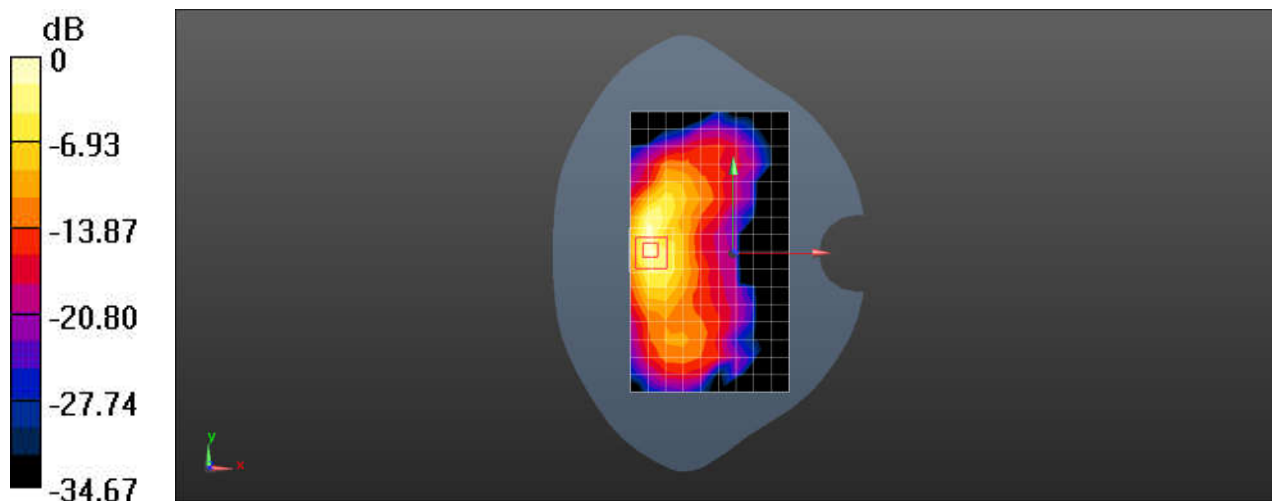

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n41 100M QPSK 1RB1 518598CH Top side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.996$ S/m; $\epsilon_r = 38.425$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.79, 7.79, 7.79); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.706 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.10 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.999 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.222 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.6%

Maximum value of SAR (measured) = 0.797 W/kg

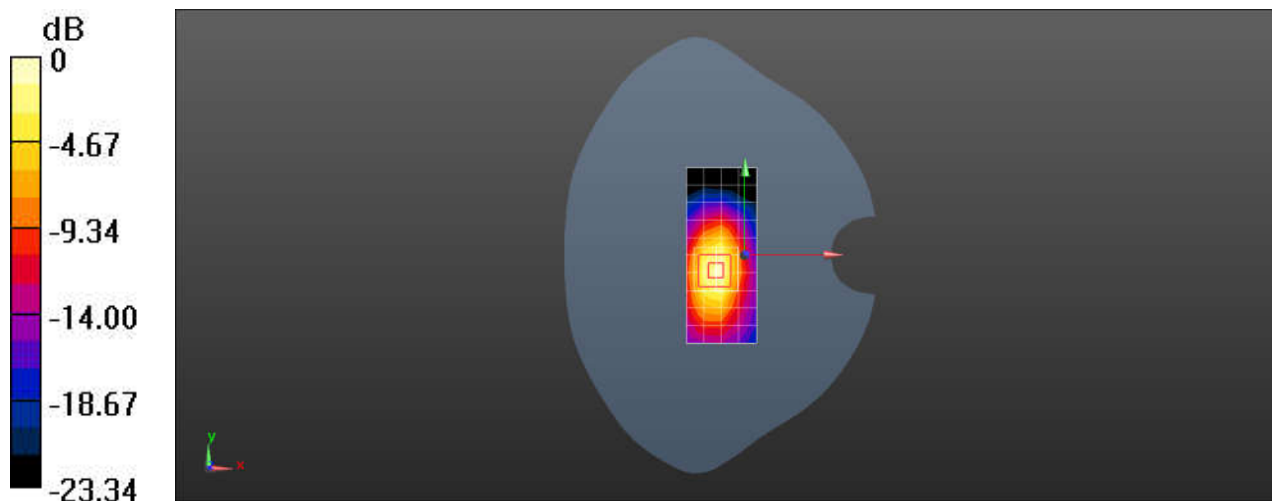

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n48 40M QPSK 1RB1 641666CH Left cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.13$ S/m; $\epsilon_r = 37.215$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.8, 6.8, 6.8); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.29 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.925 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.260 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.9%

Maximum value of SAR (measured) = 1.52 W/kg

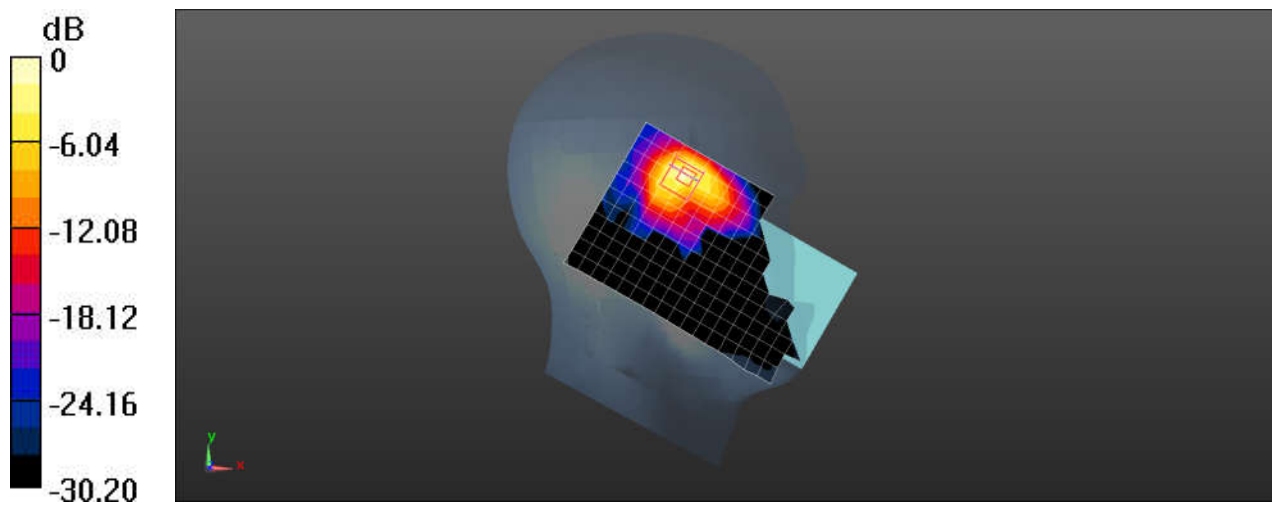

0 dB = 1.52 W/kg = 1.82 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n48 40M QPSK 1RB1 641666CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.13$ S/m; $\epsilon_r = 37.215$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.8, 6.8, 6.8); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.52 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.044 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 0.878 W/kg; SAR(10 g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 70.5%

Maximum value of SAR (measured) = 1.78 W/kg

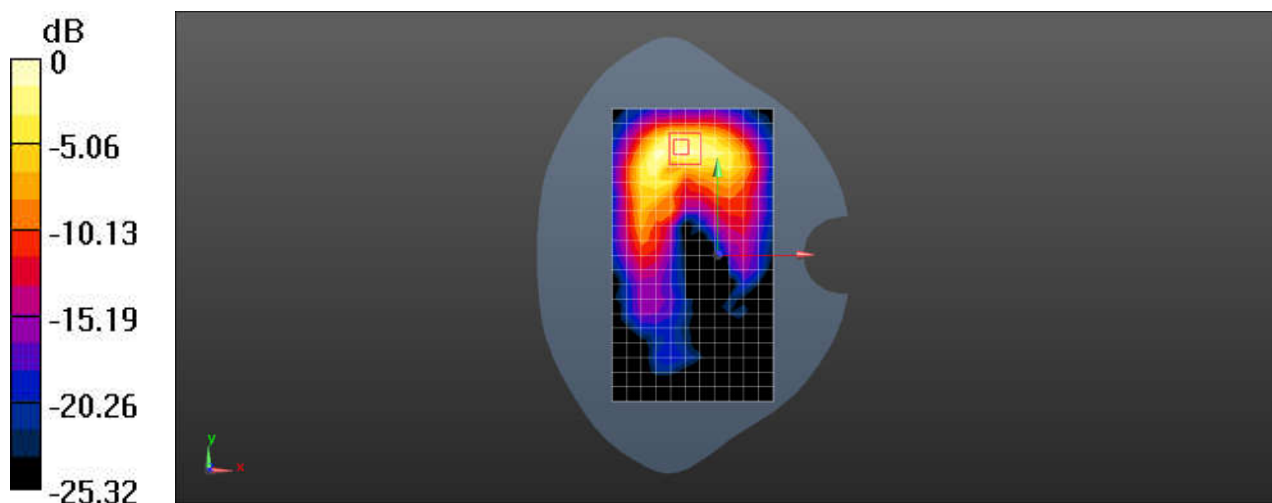

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n48 40M QPSK 1RB1 641666CH Right side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.13$ S/m; $\epsilon_r = 37.215$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.8, 6.8, 6.8); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.620 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.827 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.8%

Maximum value of SAR (measured) = 0.732 W/kg

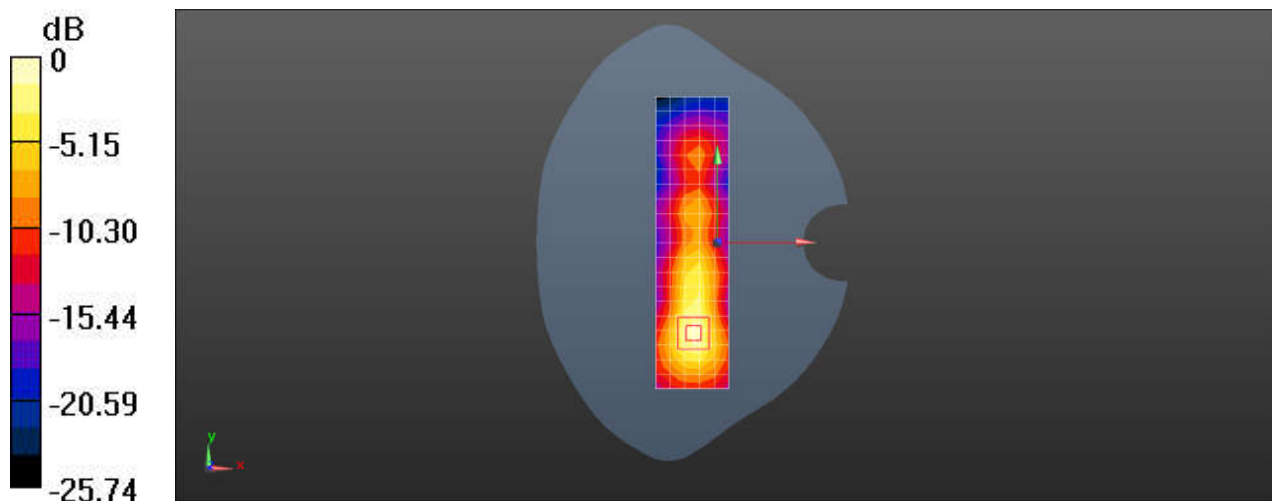

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n66 40M QPSK 1RB1 349000CH Right cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 39.608$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.8, 8.8, 8.8); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.928 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.214 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.377 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 1.25 W/kg

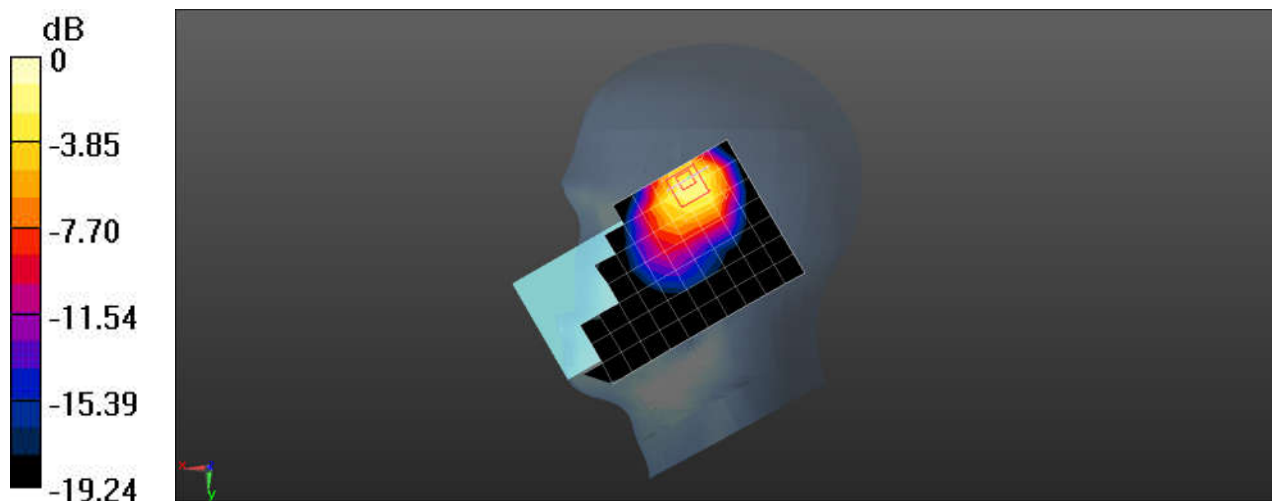

0 dB = 1.25 W/kg = 0.97 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n66 40M QPSK 108RB54 349000CH Back side 15mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 39.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.8, 8.8, 8.8); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.23 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.955 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.886 W/kg; SAR(10 g) = 0.512 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 1.25 W/kg

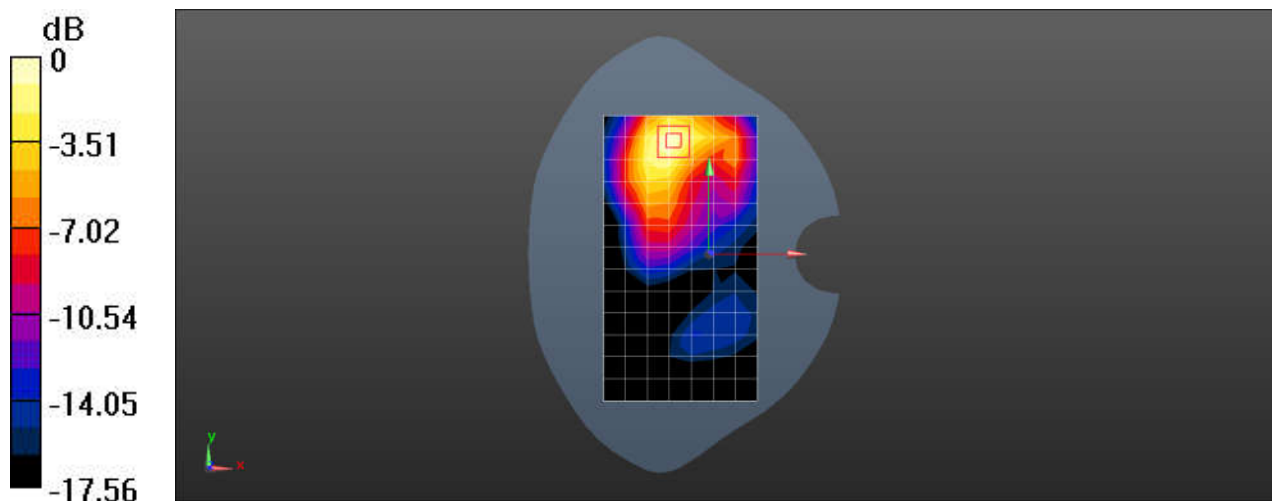

0 dB = 1.25 W/kg = 0.97 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n66 40M QPSK 108RB54 349000CH Bottom side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 39.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.8, 8.8, 8.8); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.748 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.31 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.978 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 0.798 W/kg

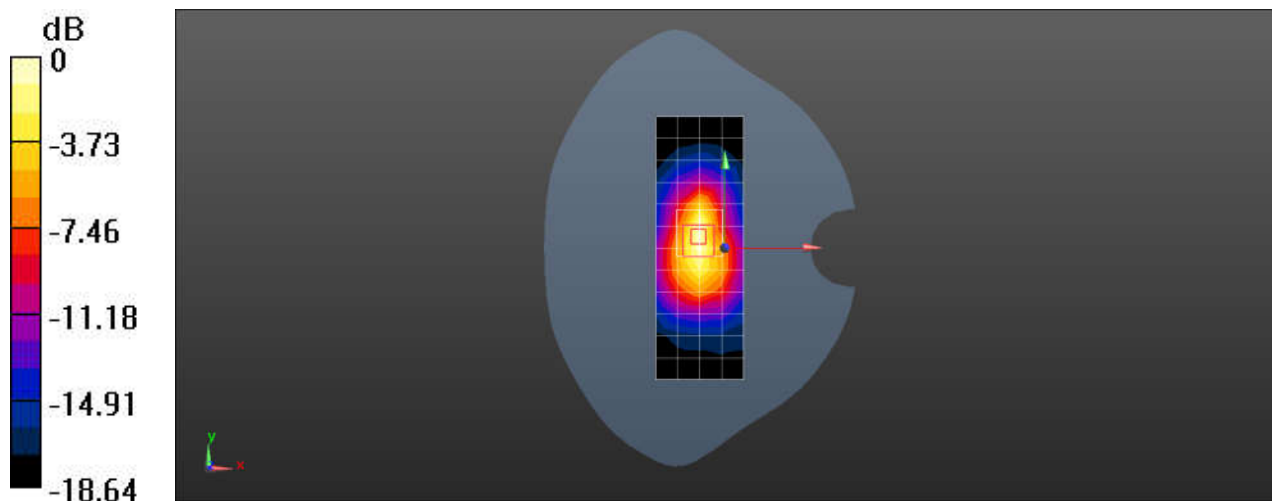

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n71 20M QPSK 1RB1 136100CH Left cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.841$ S/m; $\epsilon_r = 42.883$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.59, 10.59, 10.59); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.03 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.51 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.506 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.2%

Maximum value of SAR (measured) = 1.72 W/kg

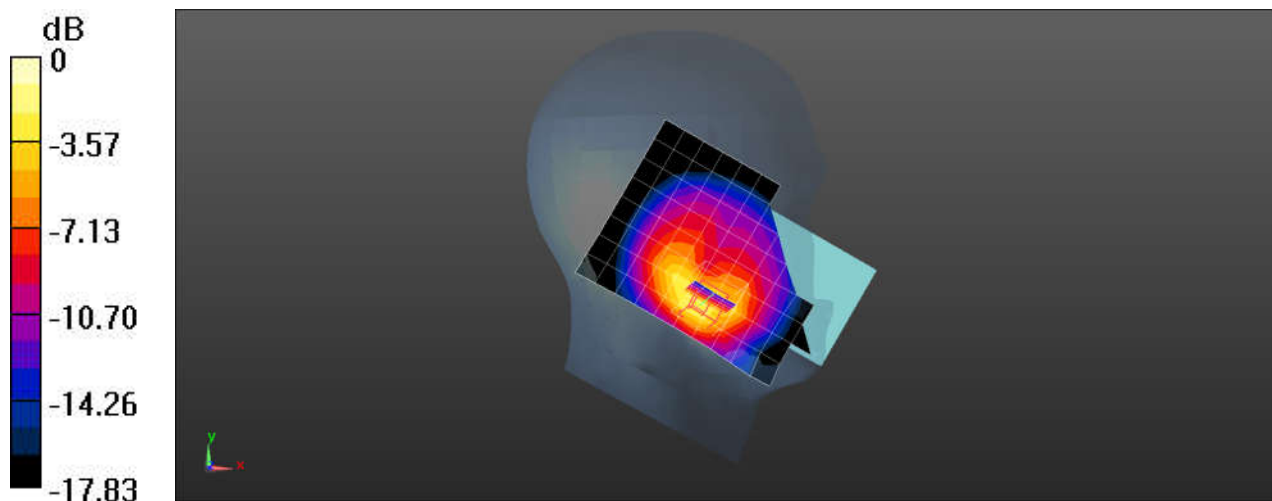

0 dB = 1.72 W/kg = 2.36 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n71 20M QPSK 1RB1 136100CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.841$ S/m; $\epsilon_r = 42.883$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.59, 10.59, 10.59); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.03 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.52 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.441 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 1.28 W/kg

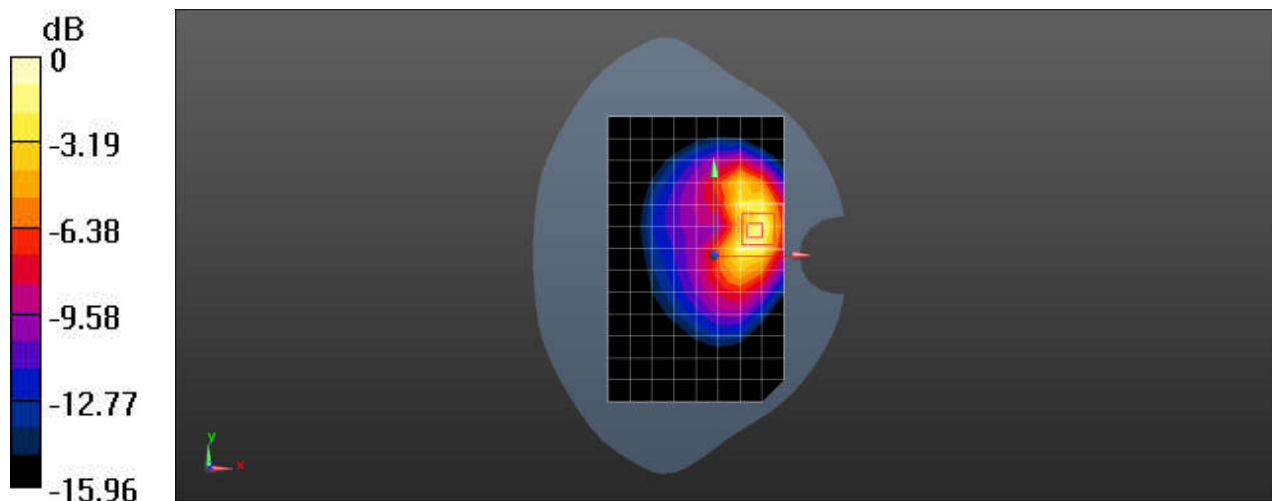

0 dB = 1.28 W/kg = 1.07 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n71 20M QPSK 1RB1 136100CH Left side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.841$ S/m; $\epsilon_r = 42.883$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.59, 10.59, 10.59); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.769 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.68 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 0.809 W/kg

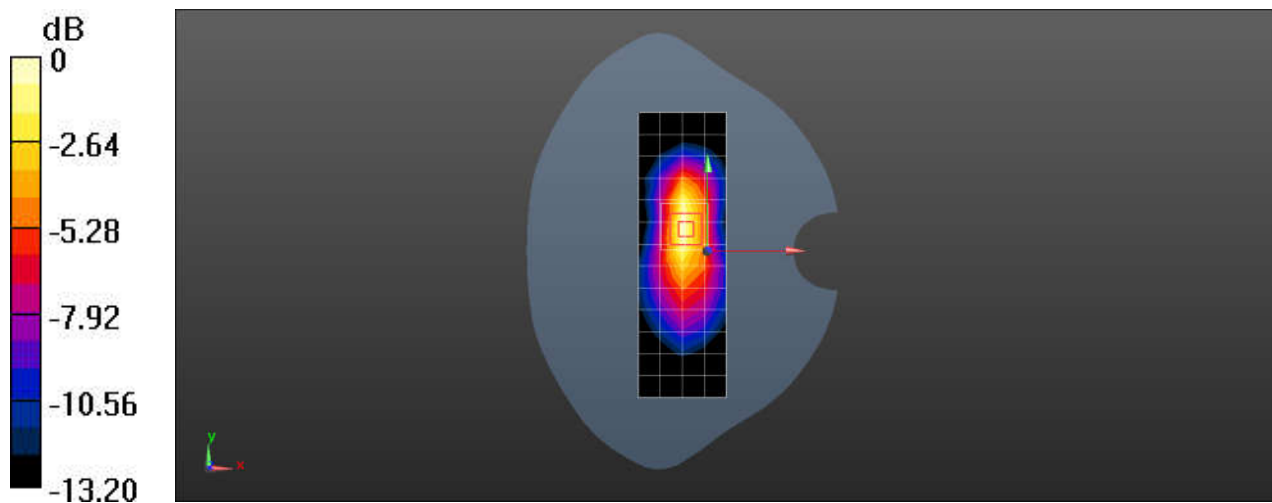

0 dB = 0.809 W/kg = -0.92 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n77 100M QPSK 1RB1 633334CH Left tilted

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.973$ S/m; $\epsilon_r = 38.102$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.21, 7.21, 7.21); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.82 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.69 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 0.838 W/kg; SAR(10 g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 69.4%

Maximum value of SAR (measured) = 1.87 W/kg

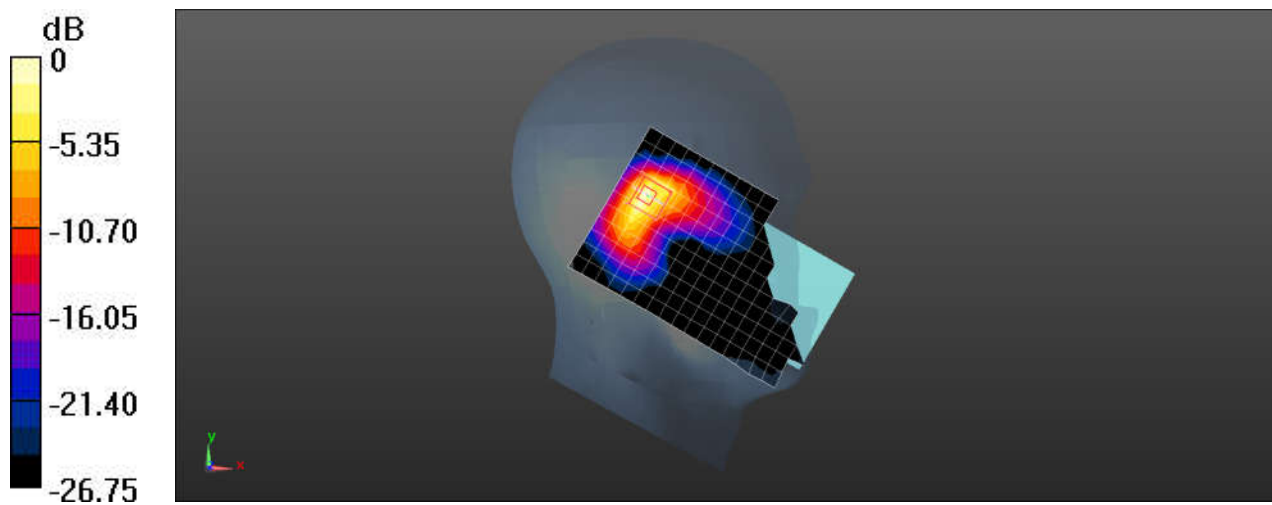

0 dB = 1.87 W/kg = 2.72 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n77 100M QPSK 1RB1 633334CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.973$ S/m; $\epsilon_r = 38.102$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.21, 7.21, 7.21); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.44 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.011 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.311 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.4%

Maximum value of SAR (measured) = 1.66 W/kg

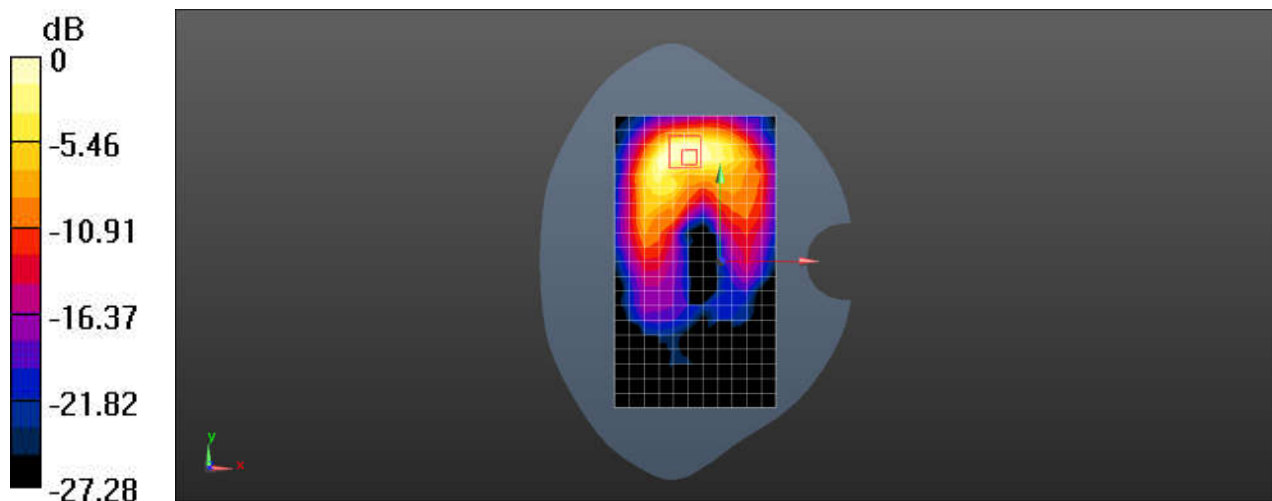

0 dB = 1.66 W/kg = 2.20 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n77 100M QPSK 135RB69 650000CH Right side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.271$ S/m; $\epsilon_r = 36.825$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.8, 6.8, 6.8); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.629 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.621 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.893 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 73.2%

Maximum value of SAR (measured) = 0.636 W/kg

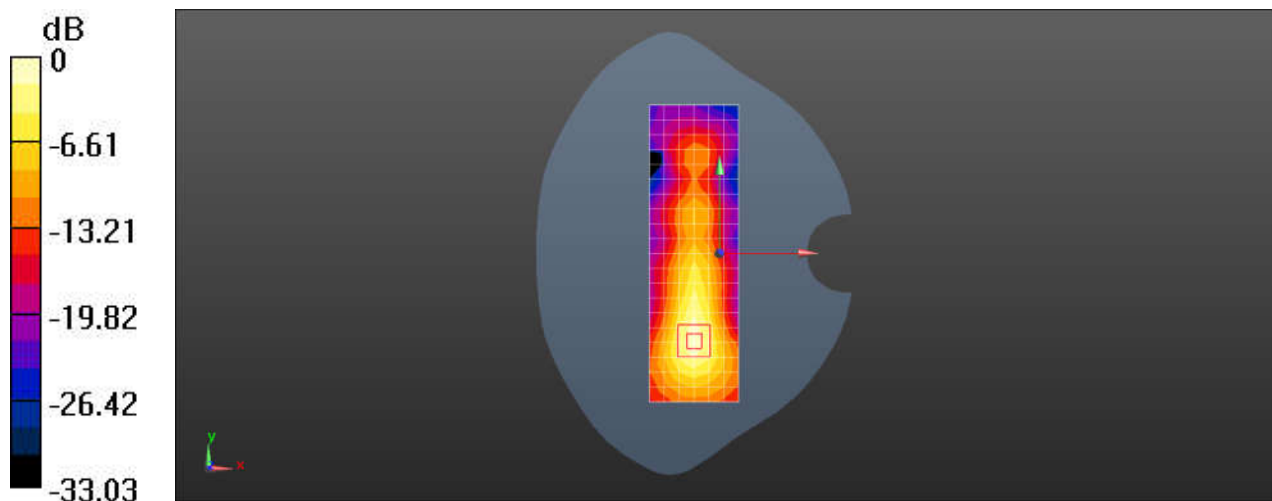

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n78 100M QPSK 1RB1 633334CH Right cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.973$ S/m; $\epsilon_r = 38.102$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.21, 7.21, 7.21); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.33 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.052 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 3.03 W/kg

SAR(1 g) = 0.940 W/kg; SAR(10 g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.7%

Maximum value of SAR (measured) = 2.02 W/kg

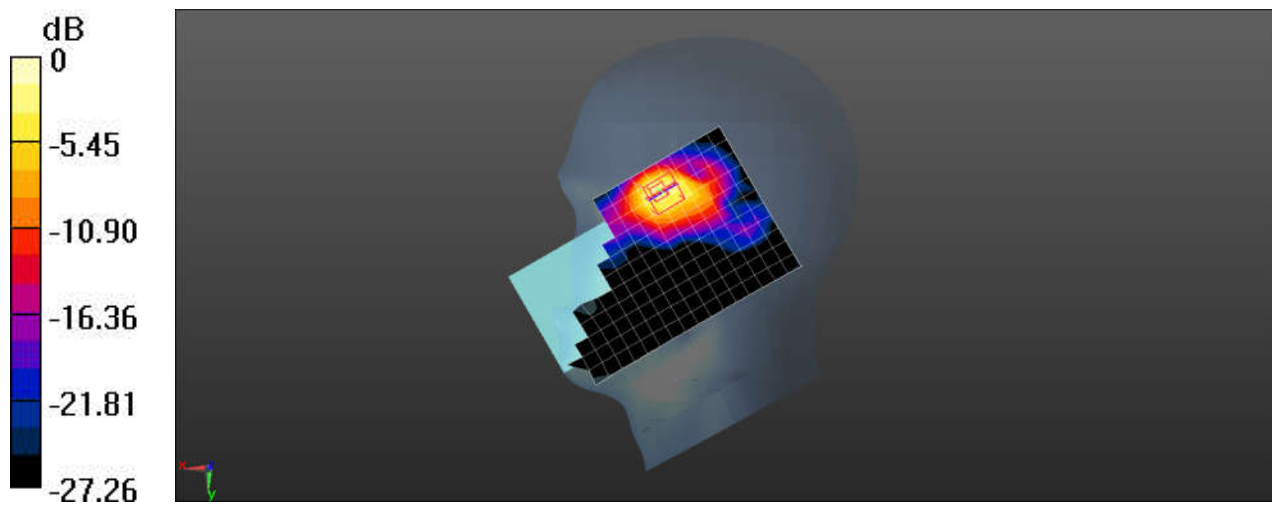

0 dB = 2.02 W/kg = 3.05 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n78 100M QPSK 1RB1 633334CH Back side 15mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.973$ S/m; $\epsilon_r = 38.102$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.21, 7.21, 7.21); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.44 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.733 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 0.911 W/kg; SAR(10 g) = 0.364 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.6%

Maximum value of SAR (measured) = 1.69 W/kg

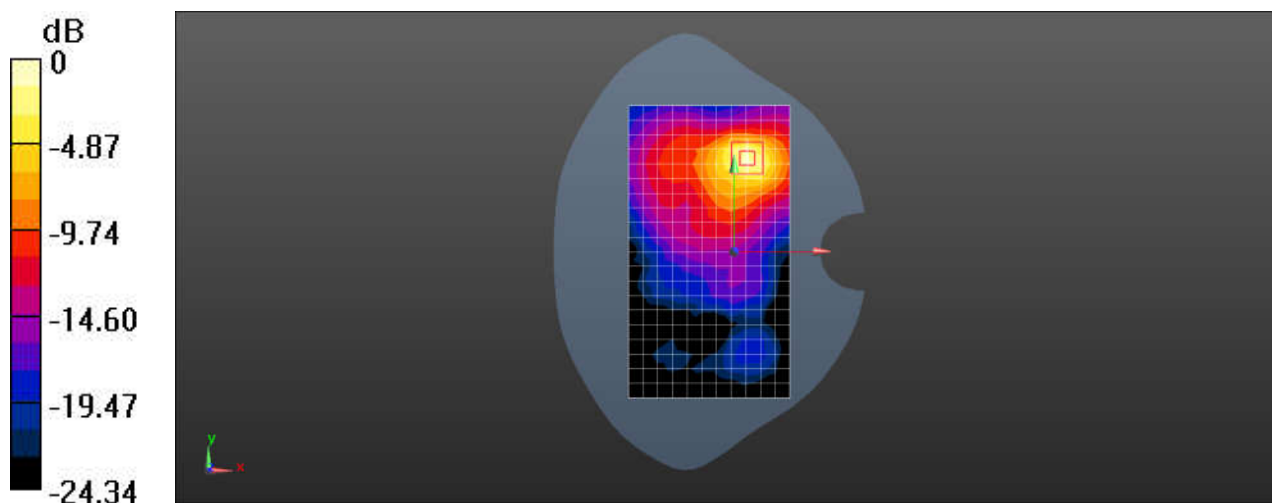

0 dB = 1.69 W/kg = 2.28 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G 5G NR n78 100M QPSK 135RB69 650000CH Right side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047643

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.271$ S/m; $\epsilon_r = 36.825$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.8, 6.8, 6.8); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.530 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.170 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.825 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 73.3%

Maximum value of SAR (measured) = 0.586 W/kg

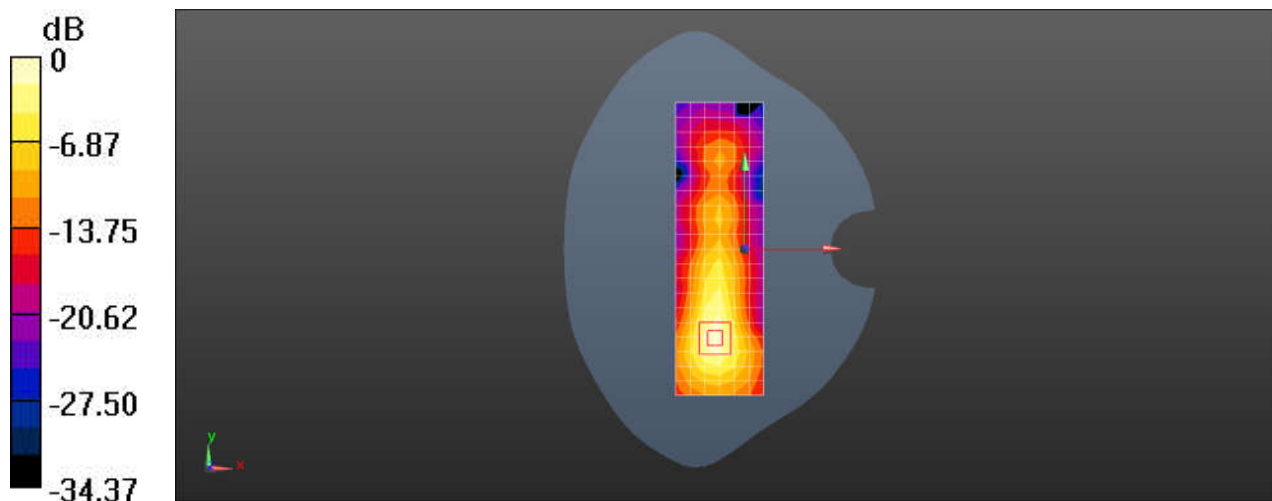

0 dB = 0.586 W/kg = -2.32 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G WIFI2.4G 802.11b 6CH Left cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047965

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.015

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.748$ S/m; $\epsilon_r = 39.478$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.06 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.642 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.739 W/kg; SAR(10 g) = 0.377 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 38.9%

Maximum value of SAR (measured) = 1.30 W/kg

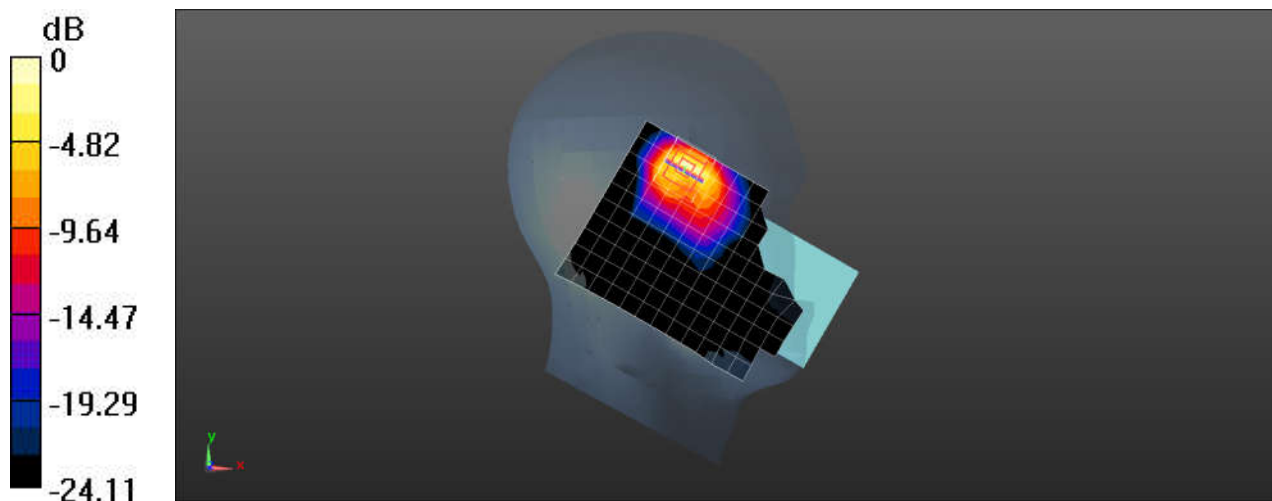

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G WIFI2.4G 802.11g 11CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047965

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1.07

Medium: HSL2450;Medium parameters used: $f = 2462$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 39.404$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.959 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.723 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.678 W/kg; SAR(10 g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 0.995 W/kg

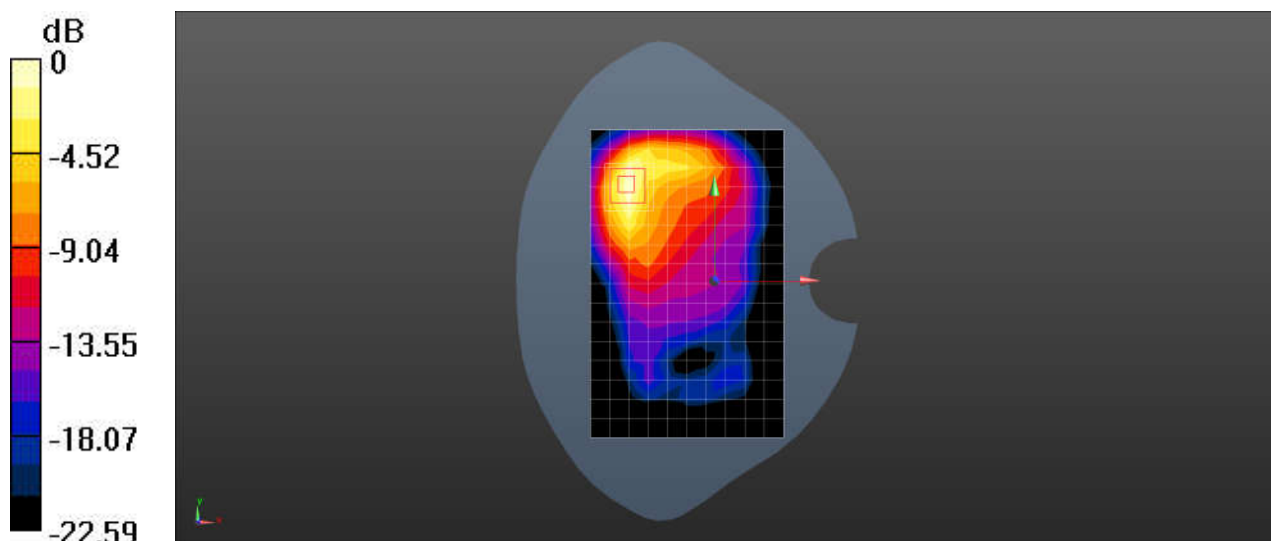

0 dB = 0.995 W/kg = -0.02 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G WIFI2.4G 802.11g 11CH Right side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047965

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1.07

Medium: HSL2450;Medium parameters used: $f = 2462$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 39.404$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.971 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.327 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.312 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 0.978 W/kg

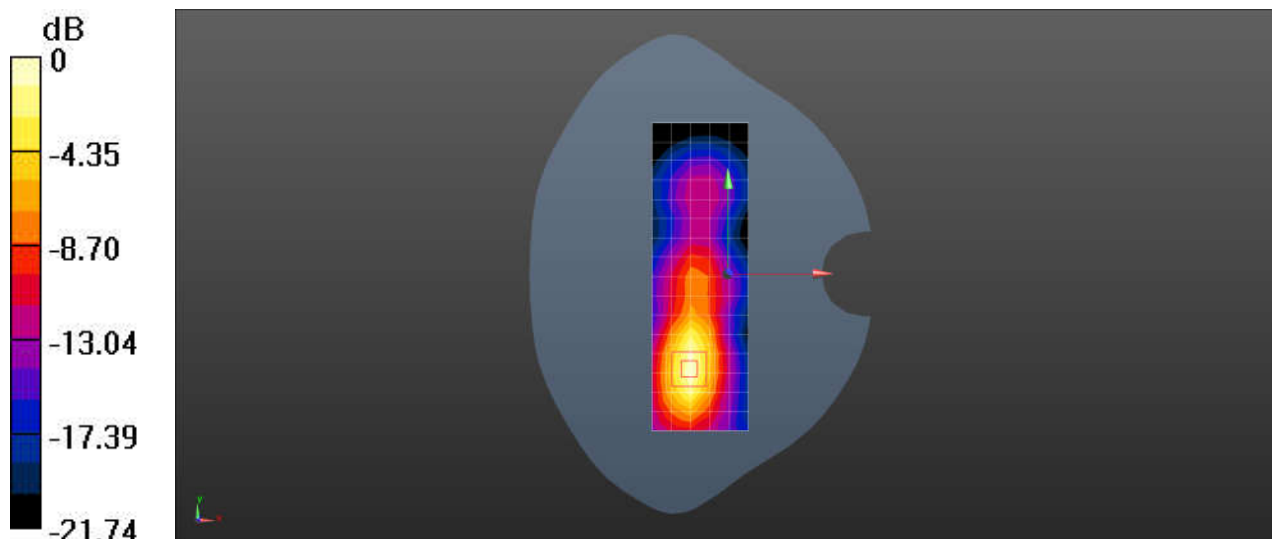

Test Laboratory: SGS-SAR Lab

2511FPC34G WIFI5G 802.11n HT40 62CH Left cheek

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047965

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5310 MHz; Duty Cycle: 1:1.149

Medium: HSL5G; Medium parameters used: $f = 5310$ MHz; $\sigma = 4.816$ S/m; $\epsilon_r = 35.763$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.6, 5.6, 5.6); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (13x20x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.94 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 7.013 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.317 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 1.94 W/kg

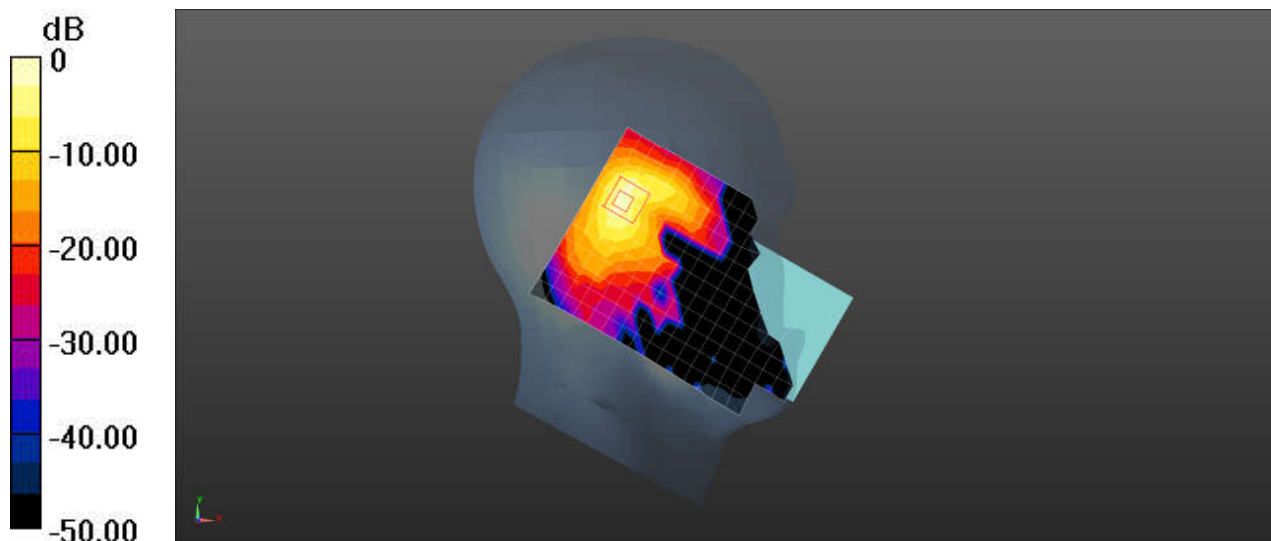

0 dB = 1.94 W/kg = 2.88 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G WIFI5G 802.11n HT40 159CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047965

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5795 MHz; Duty Cycle: 1:1.151

Medium: HSL5G; Medium parameters used: $f = 5795 \text{ MHz}$; $\sigma = 5.399 \text{ S/m}$; $\epsilon_r = 34.554$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.06, 5.06, 5.06); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (13x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.74 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 2.486 V/m ; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 3.76 W/kg

SAR(1 g) = 0.819 W/kg ; SAR(10 g) = 0.270 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 2.20 W/kg

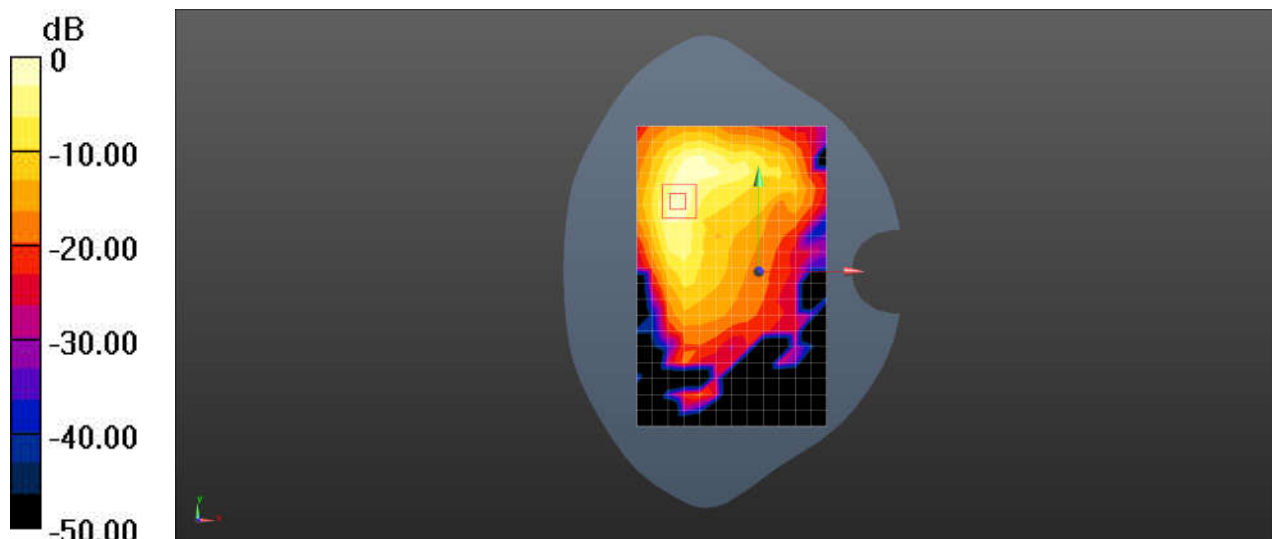

Test Laboratory: SGS-SAR Lab

2511FPC34G WIFI5G 802.11a 165CH Top side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047965

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5825 MHz; Duty Cycle: 1:1.07

Medium: HSL5G; Medium parameters used: $f = 5825$ MHz; $\sigma = 5.42$ S/m; $\epsilon_r = 34.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.06, 5.06, 5.06); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.63 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.000 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.293 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 1.78 W/kg

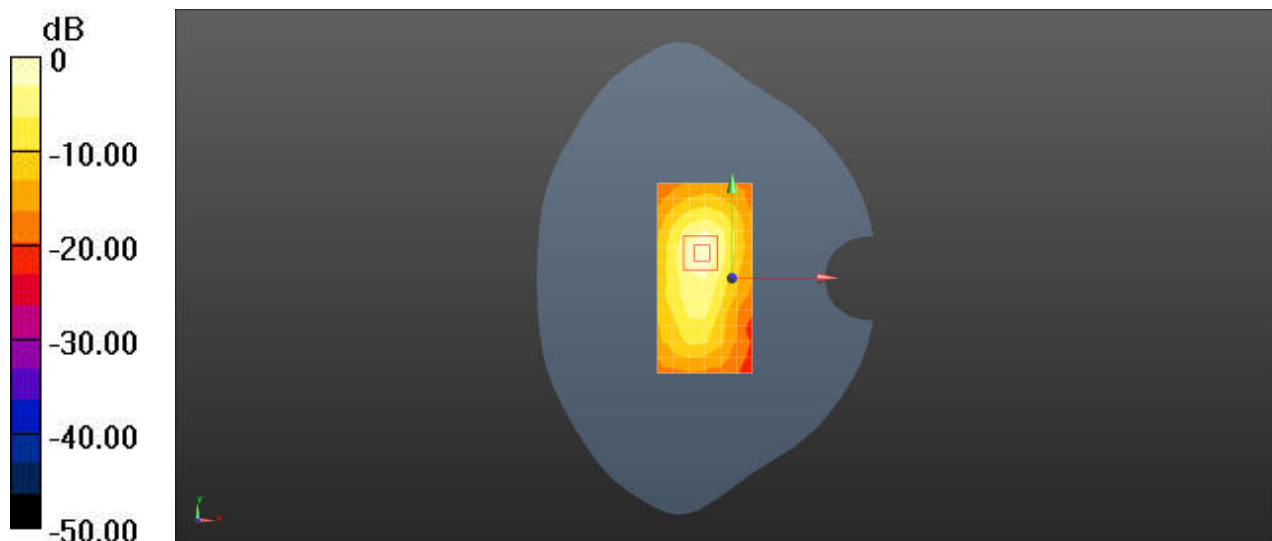

0 dB = 1.78 W/kg = 2.50 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G WIFI5G 802.11n HT40 62CH Top side 0mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047965

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5310 MHz; Duty Cycle: 1:1.149

Medium: HSL5G; Medium parameters used: $f = 5310$ MHz; $\sigma = 4.816$ S/m; $\epsilon_r = 35.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.6, 5.6, 5.6); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 22.9 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 25.91 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 81.8 W/kg

SAR(1 g) = 9.79 W/kg; SAR(10 g) = 1.95 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 38.4 W/kg

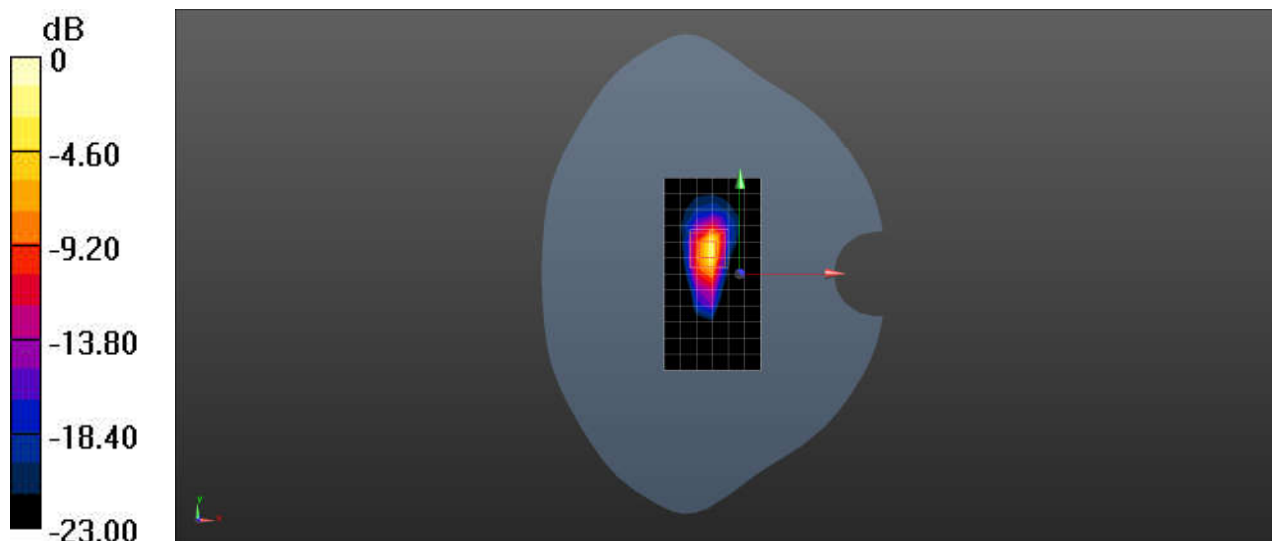

0 dB = 38.4 W/kg = 15.84 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G Bluetooth DH5 39CH Left tilted

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047965

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.753$ S/m; $\epsilon_r = 39.458$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.30 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.73 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 35.3%

Maximum value of SAR (measured) = 1.25 W/kg

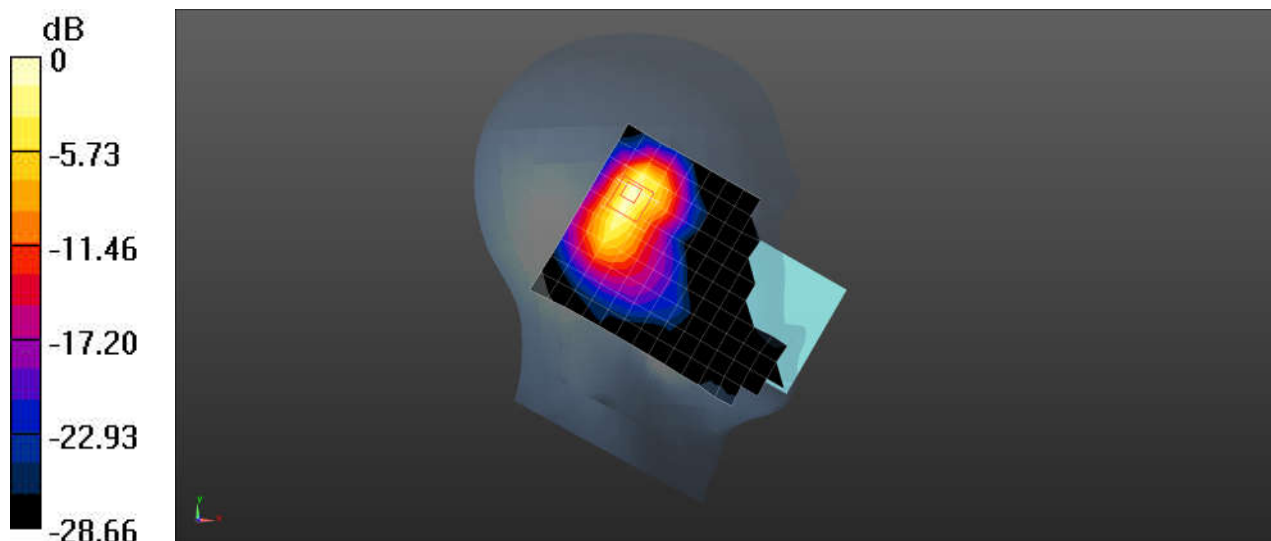

0 dB = 1.25 W/kg = 0.97 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G Bluetooth DH5 39CH Back side 5mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047965

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.753$ S/m; $\epsilon_r = 39.458$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.450 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.6970 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.136 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 44.3%

Maximum value of SAR (measured) = 0.550 W/kg

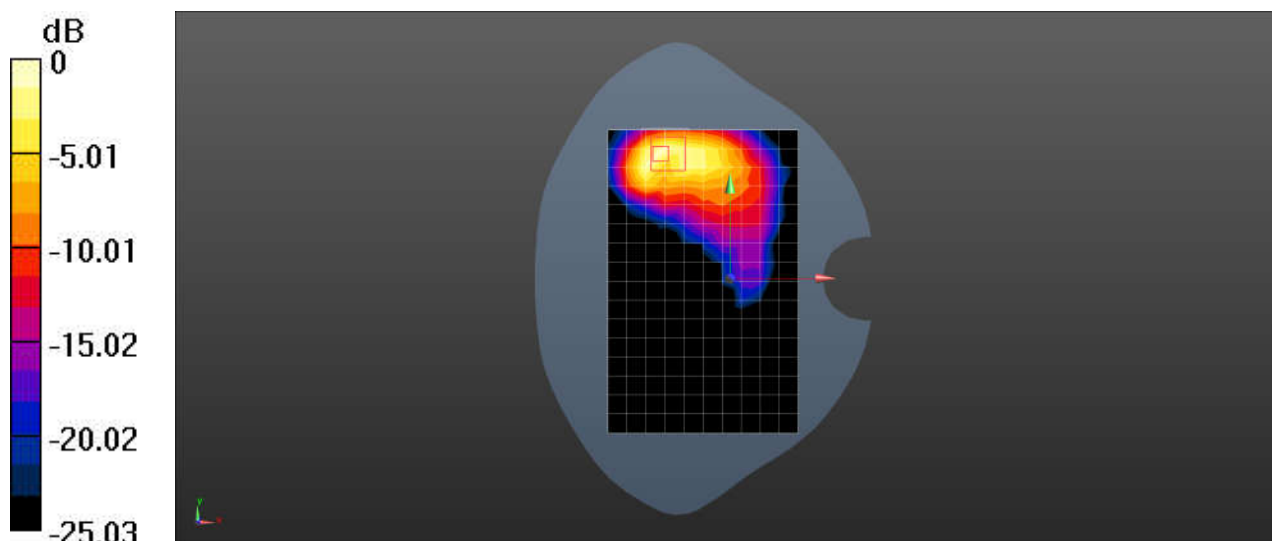

0 dB = 0.550 W/kg = -2.60 dBW/kg

Test Laboratory: SGS-SAR Lab

2511FPC34G Bluetooth DH5 39CH Top side 10mm

DUT: 2511FPC34G; Type: Mobile phone; Serial: 864812080047965

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.753$ S/m; $\epsilon_r = 39.458$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/11/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2025/02/17
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.318 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.08 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.482 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.393 W/kg

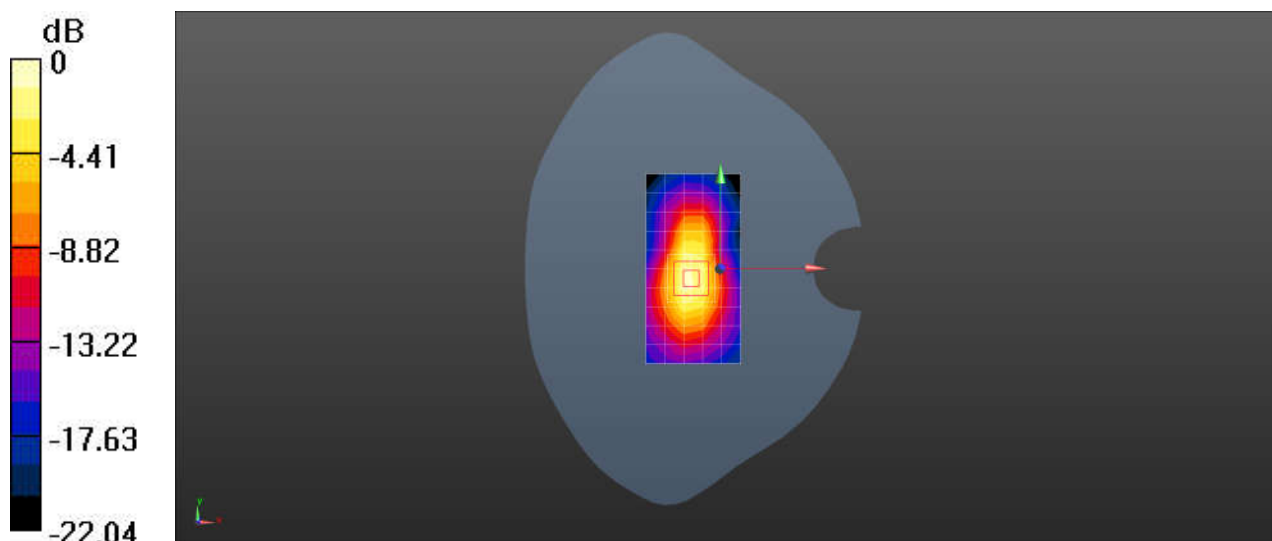

0 dB = 0.393 W/kg = -4.06 dBW/kg


NFC 13.6MHz Back side 0mm

Communication System: Custom Band; Frequency: 13.600
Medium: HSL. Medium parameters used: $f=13.600\text{ MHz}$; $\sigma=0.765\text{ S/m}$; $\epsilon_r=53.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7735; ConvF(13.68, 13.51, 13.73); Calibrated: 2025-01-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: ELI V8.0 (20deg probe tilt); Serial: 2217
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.101 W/kg; SAR (10g) = 0.059 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.099 W/kg; SAR (10g) = 0.058 W/kg;
M2/M1 [%] 65.1
Dist 3dB Peak [mm] 6.5

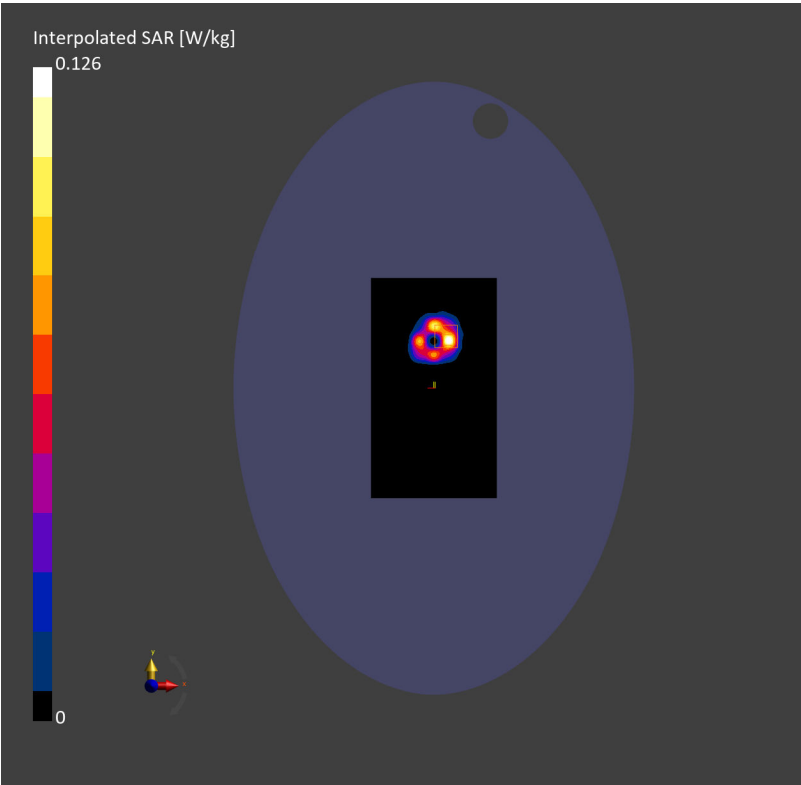



Report No.: SUCR250900096410
Page: 88 of 88

- End of the Appendix -