RF TEST REPORT

Applicant	Xiaomi Communications Co., Ltd.
FCC ID	2AFZZJ20CG
Product	Mobile Phone
Brand	POCO
Model	M2007J20CG, M2007J20CT
Report No.	R2007A0451-R1
Issue Date	August 14, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 22H (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao	*Approved by: Kai Xu*

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory 4
1.1. Notes of the Test Report 4
1.2. Test facility 4
1.3. Testing Location 4
2. General Description of Equipment under Test 5
2.3. Applicant and Manufacturer Information 5
2.4. General Information 5
3. Applied Standards 7
4. Test Configuration 8
5. Test Case Results 10
5.1. RF Power Output and Effective Radiated Power 10
5.2. Occupied Bandwidth 19
5.3. Band Edge Compliance 31
5.4. Peak-to-Average Power Ratio (PAPR) 42
5.5. Frequency Stability 46
5.6. Spurious Emissions at Antenna Terminals 51
5.7. Radiates Spurious Emission 57
6. Main Test Instruments 63

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046 22.913(a)(5)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	2.1051 / 22.917(a)	PASS
4	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 22.355	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
7	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: July13, 2020 ~ August 10, 2020			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company:	TA Technology (Shanghai) Co., Ltd.
Address:	No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Xu Kai
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	http://www.ta-shanghai.com
E-mail:	xukai@ta-shanghai.com

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

2. General Description of Equipment under Test

2.3. Applicant and Manufacturer Information

Applicant	Xiaomi Communications Co., Ltd.
Applicant address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer	Xiaomi Communications Co., Ltd.
Manufacturer address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

2.4. General Information

EUT Description			
Model	M2007J20CG, M2007J20CT		
IMEI	IMEI 1:869236050030824 IMEI 2:869236050030832		
Hardware Version	P2		
Software Version	MIUI 12		
Power Supply	Battery/AC adapter		
Antenna Type	PIFA Antenna		
Antenna Gain	Frequency (MHz)	Gain(dBi)	
	824	-5.11	
	836	-5.04	
	848	-5.89	
Test Mode(s)	GSM 850; WCDMA Band V;LTE Band 5;		
Test Modulation	(GSM/GPRS)GMSK, (EGPRS) GMSK/ 8PSK; (WCDMA) BPSK, QPSK,16QAM; (LTE)QPSK 16QAM, 64QAM		
GPRS Multislot Class	33		
EGPRS Multislot Class	33		
HSDPA UE Category	24		
HSUPA UE Category	6		
LTE Release	12		
Maximum E.R.P.	GSM 850:	26.36dBm	
	WCDMA Band V:	17.11dBm	
	LTE Band 5:	16.48dBm	
Rated Power Supply Voltage	3.87V		
Extreme Voltage	Minimum: 3.6V Maximum: 4.4V		
Extreme Temperature	Lowest: 0°C Highest: +40°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 ~ 849	869 ~ 894

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 5	824 ~ 849	869 ~ 894
EUT Accessory			
Adapter	Manufacturer: Xiaomi Communications Co., Ltd. Model: MDY-12-EA		
Battery	Manufacturer: NVT Model: BN57		
Earphone	Manufacturer: Tiinlab Acoustic Technology Model: EM023		
USB Cable	Manufacturer: LUXSHARE Precision Industry Co., Ltd. Model: L63312		
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			

Item	M2007J20CG	M2007J20CT
LTE Band 41	Support	Not Support
Note: Customer declaration, two models are the same, except for the model. There are more than one Model, each one should be applied throughout the compliance test respectively, however, only the worst case (M2007J20CG) will be recorded in this report.		

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:
FCC CFR 47 Part 22H (2019)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2019)

KDB 971168 D01 Power Meas License Digital Systems v03r01

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

4. Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.
The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.
Test modes are chosen to be reported as the worst case configuration below:

Test items	**Modes/Modulation**	
	GSM 850	WCDMA Band V
RF Power Output and Effective Radiated power	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA/HSPA+
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Test modes are chosen as the worst case configuration below for LTE Band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF power output and Effective Radiated power	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	-	-	O	-	O	-
Band Edge Compliance	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	O	O	-	O	-	-	-	O	-
Note	1. The mark “O” means that this configuration is chosen for testing. 2. The mark “-” means that this configuration is not testing.											

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5. Test Case Results

5.1. RF Power Output and Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.

b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).

c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.

d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.LOSS = Generator Output Power (dBm) – Analyzer reading (dBm)

e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:ERP (dBm) = LVL (dBm) + LOSS (dB)

f) The maximum ERP is the maximum value determined in the preceding step.

g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g.transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:

EIRP (dBm) = Output Power (dBm) - Losses (dB) + Antenna Gain (dBi)

where:dBd refers to gain relative to an ideal dipole.

EIRP (dBm) = ERP (dBm) + 2.15 (dB.)

The RB allocation refers to section 5.1, using the maximum output power configuration.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Test Setup

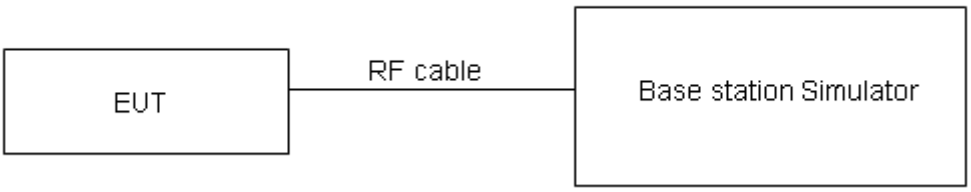

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

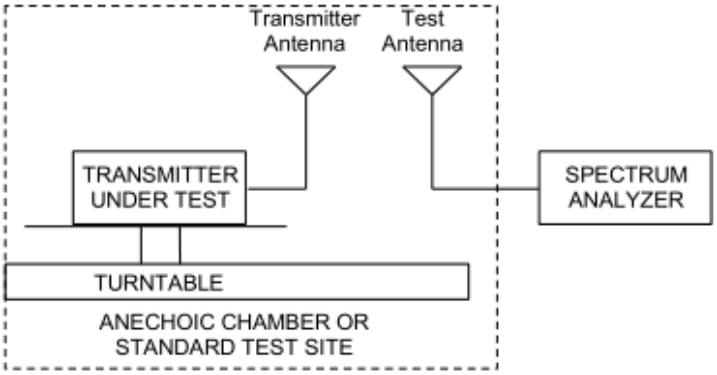

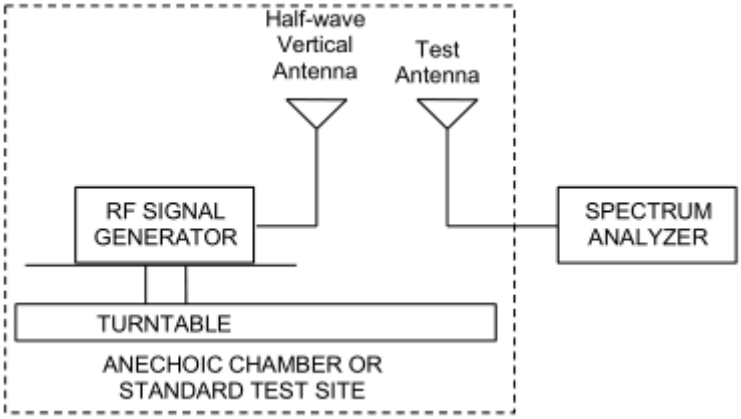

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	≤ 7 W (38.45 dBm)

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U= 0.4 dB for RF power output, *k* = 2, *U*= 1.19 dB for ERP .

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Test Results

GSM 850		Conducted Power (dBm)			ERP (dBm)		
		Channel 128	Channel 190	Channel 251	Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)	824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM(GMSK)	Results	33.53	33.52	33.65	26.27	26.02	25.61
GPRS (GMSK)	1TXslot	33.62	33.44	33.28	26.36	25.94	25.24
	2TXslots	30.04	30.16	30.15	22.78	22.66	22.11
	3TXslots	27.62	27.78	27.90	20.36	20.28	19.86
	4TXslots	26.52	26.41	26.65	19.26	18.91	18.61
EGPRS (8PSK)	1TXslot	26.89	26.82	26.87	19.63	19.32	18.83
	2TXslots	24.61	24.58	24.73	17.35	17.08	16.69
	3TXslots	23.04	23.04	23.19	15.78	15.54	15.15
	4TXslots	22.30	22.31	22.46	15.04	14.81	14.42

WCDMA Band V		Conducted Power (dBm)			ERP (dBm)		
		Channel 4132	Channel 4183	Channel 4233	Channel 4132	Channel 4183	Channel 4233
		826.4 (MHz)	836.6 (MHz)	846.6 (MHz)	826.4 (MHz)	836.6 (MHz)	846.6 (MHz)
RMC		24.30	24.32	24.26	17.11	16.82	16.22
HSDPA	Sub - Test 1	23.76	23.74	23.70	16.57	16.24	15.66
	Sub - Test 2	23.75	23.76	23.67	16.56	16.26	15.63
	Sub - Test 3	23.22	23.26	23.19	16.03	15.76	15.15
	Sub - Test 4	23.23	23.27	23.17	16.04	15.77	15.13
HSUPA	Sub - Test 1	23.72	23.73	23.65	16.53	16.23	15.61
	Sub - Test 2	22.71	22.71	22.64	15.52	15.21	14.60
	Sub - Test 3	23.18	23.19	23.13	15.99	15.69	15.09
	Sub - Test 4	22.64	22.68	22.61	15.45	15.18	14.57
	Sub - Test 5	23.65	23.66	23.59	16.46	16.16	15.55
DC-HSDPA	Sub - Test 1	23.64	23.68	23.60	16.45	16.18	15.56
	Sub - Test 2	23.63	23.67	23.59	16.44	16.17	15.55
	Sub - Test 3	23.21	23.16	23.10	16.02	15.66	15.06
	Sub - Test 4	23.20	23.15	23.09	16.01	15.65	15.05
HSPA+	16QAM	23.19	23.23	23.16	16.00	15.73	15.12

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)	ERP (dBm)	Verdict
LTE Band5	1.4	20407	1	#0	QPSK	23.59	16.33	PASS
LTE Band5	1.4	20407	1	#Mid	QPSK	23.64	16.38	PASS
LTE Band5	1.4	20407	1	#Max	QPSK	23.60	16.34	PASS
LTE Band5	1.4	20407	3	#0	QPSK	23.56	16.30	PASS
LTE Band5	1.4	20407	3	#Mid	QPSK	23.55	16.29	PASS
LTE Band5	1.4	20407	3	#Max	QPSK	23.51	16.25	PASS
LTE Band5	1.4	20407	6	#0	QPSK	23.06	15.80	PASS
LTE Band5	1.4	20407	1	#0	QAM16	23.03	15.77	PASS
LTE Band5	1.4	20407	1	#Mid	QAM16	23.05	15.79	PASS
LTE Band5	1.4	20407	1	#Max	QAM16	23.01	15.75	PASS
LTE Band5	1.4	20407	3	#0	QAM16	23.08	15.82	PASS
LTE Band5	1.4	20407	3	#Mid	QAM16	23.07	15.81	PASS
LTE Band5	1.4	20407	3	#Max	QAM16	23.12	15.86	PASS
LTE Band5	1.4	20407	6	#0	QAM16	22.10	14.84	PASS
LTE Band5	1.4	20407	1	#0	QAM64	22.99	15.73	PASS
LTE Band5	1.4	20407	1	#Mid	QAM64	23.02	15.76	PASS
LTE Band5	1.4	20407	1	#Max	QAM64	22.98	15.72	PASS
LTE Band5	1.4	20407	3	#0	QAM64	23.11	15.85	PASS
LTE Band5	1.4	20407	3	#Mid	QAM64	23.11	15.85	PASS
LTE Band5	1.4	20407	3	#Max	QAM64	23.09	15.83	PASS
LTE Band5	1.4	20407	6	#0	QAM64	22.09	14.83	PASS
LTE Band5	1.4	20525	1	#0	QPSK	23.60	16.10	PASS
LTE Band5	1.4	20525	1	#Mid	QPSK	23.67	16.17	PASS
LTE Band5	1.4	20525	1	#Max	QPSK	23.56	16.06	PASS
LTE Band5	1.4	20525	3	#0	QPSK	23.51	16.01	PASS
LTE Band5	1.4	20525	3	#Mid	QPSK	23.50	16.00	PASS
LTE Band5	1.4	20525	3	#Max	QPSK	23.52	16.02	PASS
LTE Band5	1.4	20525	6	#0	QPSK	23.02	15.52	PASS
LTE Band5	1.4	20525	1	#0	QAM16	23.12	15.62	PASS
LTE Band5	1.4	20525	1	#Mid	QAM16	23.22	15.72	PASS
LTE Band5	1.4	20525	1	#Max	QAM16	23.10	15.60	PASS
LTE Band5	1.4	20525	3	#0	QAM16	23.25	15.75	PASS
LTE Band5	1.4	20525	3	#Mid	QAM16	23.25	15.75	PASS
LTE Band5	1.4	20525	3	#Max	QAM16	23.27	15.77	PASS
LTE Band5	1.4	20525	6	#0	QAM16	22.14	14.64	PASS
LTE Band5	1.4	20525	1	#0	QAM64	23.12	15.62	PASS
LTE Band5	1.4	20525	1	#Mid	QAM64	23.19	15.69	PASS
LTE Band5	1.4	20525	1	#Max	QAM64	23.09	15.59	PASS
LTE Band5	1.4	20525	3	#0	QAM64	23.24	15.74	PASS
LTE Band5	1.4	20525	3	#Mid	QAM64	23.25	15.75	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band5	1.4	20525	3	#Max	QAM64	23.27	15.77	PASS
LTE Band5	1.4	20525	6	#0	QAM64	22.17	14.67	PASS
LTE Band5	1.4	20643	1	#0	QPSK	23.48	15.44	PASS
LTE Band5	1.4	20643	1	#Mid	QPSK	23.57	15.53	PASS
LTE Band5	1.4	20643	1	#Max	QPSK	23.50	15.46	PASS
LTE Band5	1.4	20643	3	#0	QPSK	23.46	15.42	PASS
LTE Band5	1.4	20643	3	#Mid	QPSK	23.46	15.42	PASS
LTE Band5	1.4	20643	3	#Max	QPSK	23.44	15.40	PASS
LTE Band5	1.4	20643	6	#0	QPSK	23.08	15.04	PASS
LTE Band5	1.4	20643	1	#0	QAM16	23.15	15.11	PASS
LTE Band5	1.4	20643	1	#Mid	QAM16	23.25	15.21	PASS
LTE Band5	1.4	20643	1	#Max	QAM16	23.18	15.14	PASS
LTE Band5	1.4	20643	3	#0	QAM16	23.06	15.02	PASS
LTE Band5	1.4	20643	3	#Mid	QAM16	23.06	15.02	PASS
LTE Band5	1.4	20643	3	#Max	QAM16	23.05	15.01	PASS
LTE Band5	1.4	20643	6	#0	QAM16	22.02	13.98	PASS
LTE Band5	1.4	20643	1	#0	QAM64	23.15	15.11	PASS
LTE Band5	1.4	20643	1	#Mid	QAM64	23.27	15.23	PASS
LTE Band5	1.4	20643	1	#Max	QAM64	23.17	15.13	PASS
LTE Band5	1.4	20643	3	#0	QAM64	23.06	15.02	PASS
LTE Band5	1.4	20643	3	#Mid	QAM64	23.06	15.02	PASS
LTE Band5	1.4	20643	3	#Max	QAM64	23.04	15.00	PASS
LTE Band5	1.4	20643	6	#0	QAM64	22.05	14.01	PASS
LTE Band5	3	20415	1	#0	QPSK	23.54	16.35	PASS
LTE Band5	3	20415	1	#Mid	QPSK	23.56	16.37	PASS
LTE Band5	3	20415	1	#Max	QPSK	23.53	16.34	PASS
LTE Band5	3	20415	8	#0	QPSK	23.12	15.93	PASS
LTE Band5	3	20415	8	#Mid	QPSK	23.12	15.93	PASS
LTE Band5	3	20415	8	#Max	QPSK	23.12	15.93	PASS
LTE Band5	3	20415	15	#0	QPSK	23.14	15.95	PASS
LTE Band5	3	20415	1	#0	QAM16	23.37	16.18	PASS
LTE Band5	3	20415	1	#Mid	QAM16	23.42	16.23	PASS
LTE Band5	3	20415	1	#Max	QAM16	23.40	16.21	PASS
LTE Band5	3	20415	8	#0	QAM16	22.25	15.06	PASS
LTE Band5	3	20415	8	#Mid	QAM16	22.22	15.03	PASS
LTE Band5	3	20415	8	#Max	QAM16	22.23	15.04	PASS
LTE Band5	3	20415	15	#0	QAM16	22.21	15.02	PASS
LTE Band5	3	20415	1	#0	QAM64	23.35	16.16	PASS
LTE Band5	3	20415	1	#Mid	QAM64	23.41	16.22	PASS
LTE Band5	3	20415	1	#Max	QAM64	23.39	16.20	PASS
LTE Band5	3	20415	8	#0	QAM64	22.24	15.05	PASS
LTE Band5	3	20415	8	#Mid	QAM64	22.20	15.01	PASS
LTE Band5	3	20415	8	#Max	QAM64	22.24	15.05	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band5	3	20415	15	#0	QAM64	22.21	15.02	PASS
LTE Band5	3	20525	1	#0	QPSK	23.55	16.05	PASS
LTE Band5	3	20525	1	#Mid	QPSK	23.56	16.06	PASS
LTE Band5	3	20525	1	#Max	QPSK	23.57	16.07	PASS
LTE Band5	3	20525	8	#0	QPSK	23.12	15.62	PASS
LTE Band5	3	20525	8	#Mid	QPSK	23.11	15.61	PASS
LTE Band5	3	20525	8	#Max	QPSK	23.12	15.62	PASS
LTE Band5	3	20525	15	#0	QPSK	23.13	15.63	PASS
LTE Band5	3	20525	1	#0	QAM16	23.31	15.81	PASS
LTE Band5	3	20525	1	#Mid	QAM16	23.27	15.77	PASS
LTE Band5	3	20525	1	#Max	QAM16	23.24	15.74	PASS
LTE Band5	3	20525	8	#0	QAM16	22.20	14.70	PASS
LTE Band5	3	20525	8	#Mid	QAM16	22.23	14.73	PASS
LTE Band5	3	20525	8	#Max	QAM16	22.18	14.68	PASS
LTE Band5	3	20525	15	#0	QAM16	22.10	14.60	PASS
LTE Band5	3	20525	1	#0	QAM64	23.31	15.81	PASS
LTE Band5	3	20525	1	#Mid	QAM64	23.26	15.76	PASS
LTE Band5	3	20525	1	#Max	QAM64	23.26	15.76	PASS
LTE Band5	3	20525	8	#0	QAM64	22.19	14.69	PASS
LTE Band5	3	20525	8	#Mid	QAM64	22.17	14.67	PASS
LTE Band5	3	20525	8	#Max	QAM64	22.19	14.69	PASS
LTE Band5	3	20525	15	#0	QAM64	22.10	14.60	PASS
LTE Band5	3	20635	1	#0	QPSK	23.65	15.61	PASS
LTE Band5	3	20635	1	#Mid	QPSK	23.65	15.61	PASS
LTE Band5	3	20635	1	#Max	QPSK	23.65	15.61	PASS
LTE Band5	3	20635	8	#0	QPSK	23.14	15.10	PASS
LTE Band5	3	20635	8	#Mid	QPSK	23.11	15.07	PASS
LTE Band5	3	20635	8	#Max	QPSK	23.09	15.05	PASS
LTE Band5	3	20635	15	#0	QPSK	23.15	15.11	PASS
LTE Band5	3	20635	1	#0	QAM16	23.03	14.99	PASS
LTE Band5	3	20635	1	#Mid	QAM16	22.99	14.95	PASS
LTE Band5	3	20635	1	#Max	QAM16	22.98	14.94	PASS
LTE Band5	3	20635	8	#0	QAM16	22.17	14.13	PASS
LTE Band5	3	20635	8	#Mid	QAM16	22.16	14.12	PASS
LTE Band5	3	20635	8	#Max	QAM16	22.15	14.11	PASS
LTE Band5	3	20635	15	#0	QAM16	22.17	14.13	PASS
LTE Band5	3	20635	1	#0	QAM64	23.04	15.00	PASS
LTE Band5	3	20635	1	#Mid	QAM64	22.99	14.95	PASS
LTE Band5	3	20635	1	#Max	QAM64	22.98	14.94	PASS
LTE Band5	3	20635	8	#0	QAM64	22.20	14.16	PASS
LTE Band5	3	20635	8	#Mid	QAM64	22.17	14.13	PASS
LTE Band5	3	20635	8	#Max	QAM64	22.15	14.11	PASS
LTE Band5	3	20635	15	#0	QAM64	22.19	14.15	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band5	5	20425	1	#0	QPSK	23.59	16.40	PASS
LTE Band5	5	20425	1	#Mid	QPSK	23.67	16.48	PASS
LTE Band5	5	20425	1	#Max	QPSK	23.59	16.40	PASS
LTE Band5	5	20425	12	#0	QPSK	23.18	15.99	PASS
LTE Band5	5	20425	12	#Mid	QPSK	23.19	16.00	PASS
LTE Band5	5	20425	12	#Max	QPSK	23.13	15.94	PASS
LTE Band5	5	20425	25	#0	QPSK	23.14	15.95	PASS
LTE Band5	5	20425	1	#0	QAM16	23.43	16.24	PASS
LTE Band5	5	20425	1	#Mid	QAM16	23.51	16.32	PASS
LTE Band5	5	20425	1	#Max	QAM16	23.44	16.25	PASS
LTE Band5	5	20425	12	#0	QAM16	22.20	15.01	PASS
LTE Band5	5	20425	12	#Mid	QAM16	22.20	15.01	PASS
LTE Band5	5	20425	12	#Max	QAM16	22.17	14.98	PASS
LTE Band5	5	20425	25	#0	QAM16	22.22	15.03	PASS
LTE Band5	5	20425	1	#0	QAM64	23.45	16.26	PASS
LTE Band5	5	20425	1	#Mid	QAM64	23.52	16.33	PASS
LTE Band5	5	20425	1	#Max	QAM64	23.43	16.24	PASS
LTE Band5	5	20425	12	#0	QAM64	22.18	14.99	PASS
LTE Band5	5	20425	12	#Mid	QAM64	22.20	15.01	PASS
LTE Band5	5	20425	12	#Max	QAM64	22.17	14.98	PASS
LTE Band5	5	20425	25	#0	QAM64	22.22	15.03	PASS
LTE Band5	5	20525	1	#0	QPSK	23.69	16.19	PASS
LTE Band5	5	20525	1	#Mid	QPSK	23.69	16.19	PASS
LTE Band5	5	20525	1	#Max	QPSK	23.59	16.09	PASS
LTE Band5	5	20525	12	#0	QPSK	23.22	15.72	PASS
LTE Band5	5	20525	12	#Mid	QPSK	23.22	15.72	PASS
LTE Band5	5	20525	12	#Max	QPSK	23.18	15.68	PASS
LTE Band5	5	20525	25	#0	QPSK	23.16	15.66	PASS
LTE Band5	5	20525	1	#0	QAM16	23.34	15.84	PASS
LTE Band5	5	20525	1	#Mid	QAM16	23.41	15.91	PASS
LTE Band5	5	20525	1	#Max	QAM16	23.30	15.80	PASS
LTE Band5	5	20525	12	#0	QAM16	22.23	14.73	PASS
LTE Band5	5	20525	12	#Mid	QAM16	22.25	14.75	PASS
LTE Band5	5	20525	12	#Max	QAM16	22.23	14.73	PASS
LTE Band5	5	20525	25	#0	QAM16	22.19	14.69	PASS
LTE Band5	5	20525	1	#0	QAM64	23.34	15.84	PASS
LTE Band5	5	20525	1	#Mid	QAM64	23.42	15.92	PASS
LTE Band5	5	20525	1	#Max	QAM64	23.28	15.78	PASS
LTE Band5	5	20525	12	#0	QAM64	22.24	14.74	PASS
LTE Band5	5	20525	12	#Mid	QAM64	22.24	14.74	PASS
LTE Band5	5	20525	12	#Max	QAM64	22.21	14.71	PASS
LTE Band5	5	20525	25	#0	QAM64	22.19	14.69	PASS
LTE Band5	5	20625	1	#0	QPSK	23.61	15.57	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band5	5	20625	1	#Mid	QPSK	23.58	15.54	PASS
LTE Band5	5	20625	1	#Max	QPSK	23.53	15.49	PASS
LTE Band5	5	20625	12	#0	QPSK	23.15	15.11	PASS
LTE Band5	5	20625	12	#Mid	QPSK	23.18	15.14	PASS
LTE Band5	5	20625	12	#Max	QPSK	23.15	15.11	PASS
LTE Band5	5	20625	25	#0	QPSK	23.15	15.11	PASS
LTE Band5	5	20625	1	#0	QAM16	23.39	15.35	PASS
LTE Band5	5	20625	1	#Mid	QAM16	23.46	15.42	PASS
LTE Band5	5	20625	1	#Max	QAM16	23.31	15.27	PASS
LTE Band5	5	20625	12	#0	QAM16	22.26	14.22	PASS
LTE Band5	5	20625	12	#Mid	QAM16	22.28	14.24	PASS
LTE Band5	5	20625	12	#Max	QAM16	22.25	14.21	PASS
LTE Band5	5	20625	25	#0	QAM16	22.23	14.19	PASS
LTE Band5	5	20625	1	#0	QAM64	23.39	15.35	PASS
LTE Band5	5	20625	1	#Mid	QAM64	23.43	15.39	PASS
LTE Band5	5	20625	1	#Max	QAM64	23.32	15.28	PASS
LTE Band5	5	20625	12	#0	QAM64	22.26	14.22	PASS
LTE Band5	5	20625	12	#Mid	QAM64	22.28	14.24	PASS
LTE Band5	5	20625	12	#Max	QAM64	22.26	14.22	PASS
LTE Band5	5	20625	25	#0	QAM64	22.24	14.20	PASS
LTE Band5	10	20450	1	#0	QPSK	23.59	16.40	PASS
LTE Band5	10	20450	1	#Mid	QPSK	23.53	16.34	PASS
LTE Band5	10	20450	1	#Max	QPSK	23.60	16.41	PASS
LTE Band5	10	20450	25	#0	QPSK	23.18	15.99	PASS
LTE Band5	10	20450	25	#Mid	QPSK	23.18	15.99	PASS
LTE Band5	10	20450	25	#Max	QPSK	23.26	16.07	PASS
LTE Band5	10	20450	50	#0	QPSK	23.23	16.04	PASS
LTE Band5	10	20450	1	#0	QAM16	23.41	16.22	PASS
LTE Band5	10	20450	1	#Mid	QAM16	23.42	16.23	PASS
LTE Band5	10	20450	1	#Max	QAM16	23.44	16.25	PASS
LTE Band5	10	20450	25	#0	QAM16	22.26	15.07	PASS
LTE Band5	10	20450	25	#Mid	QAM16	22.28	15.09	PASS
LTE Band5	10	20450	25	#Max	QAM16	22.37	15.18	PASS
LTE Band5	10	20450	50	#0	QAM16	22.34	15.15	PASS
LTE Band5	10	20450	1	#0	QAM64	23.39	16.20	PASS
LTE Band5	10	20450	1	#Mid	QAM64	23.43	16.24	PASS
LTE Band5	10	20450	1	#Max	QAM64	23.45	16.26	PASS
LTE Band5	10	20450	25	#0	QAM64	22.27	15.08	PASS
LTE Band5	10	20450	25	#Mid	QAM64	22.28	15.09	PASS
LTE Band5	10	20450	25	#Max	QAM64	22.37	15.18	PASS
LTE Band5	10	20450	50	#0	QAM64	22.34	15.15	PASS
LTE Band5	10	20525	1	#0	QPSK	23.63	16.13	PASS
LTE Band5	10	20525	1	#Mid	QPSK	23.59	16.09	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band5	10	20525	1	#Max	QPSK	23.53	16.03	PASS
LTE Band5	10	20525	25	#0	QPSK	23.18	15.68	PASS
LTE Band5	10	20525	25	#Mid	QPSK	23.17	15.67	PASS
LTE Band5	10	20525	25	#Max	QPSK	23.13	15.63	PASS
LTE Band5	10	20525	50	#0	QPSK	23.18	15.68	PASS
LTE Band5	10	20525	1	#0	QAM16	23.38	15.88	PASS
LTE Band5	10	20525	1	#Mid	QAM16	23.34	15.84	PASS
LTE Band5	10	20525	1	#Max	QAM16	23.25	15.75	PASS
LTE Band5	10	20525	25	#0	QAM16	22.24	14.74	PASS
LTE Band5	10	20525	25	#Mid	QAM16	22.26	14.76	PASS
LTE Band5	10	20525	25	#Max	QAM16	22.25	14.75	PASS
LTE Band5	10	20525	50	#0	QAM16	22.23	14.73	PASS
LTE Band5	10	20525	1	#0	QAM64	23.40	15.90	PASS
LTE Band5	10	20525	1	#Mid	QAM64	23.34	15.84	PASS
LTE Band5	10	20525	1	#Max	QAM64	23.27	15.77	PASS
LTE Band5	10	20525	25	#0	QAM64	22.25	14.75	PASS
LTE Band5	10	20525	25	#Mid	QAM64	22.25	14.75	PASS
LTE Band5	10	20525	25	#Max	QAM64	22.19	14.69	PASS
LTE Band5	10	20525	50	#0	QAM64	22.23	14.73	PASS
LTE Band5	10	20600	1	#0	QPSK	23.65	16.15	PASS
LTE Band5	10	20600	1	#Mid	QPSK	23.74	16.24	PASS
LTE Band5	10	20600	1	#Max	QPSK	23.71	16.21	PASS
LTE Band5	10	20600	25	#0	QPSK	23.08	15.58	PASS
LTE Band5	10	20600	25	#Mid	QPSK	23.09	15.59	PASS
LTE Band5	10	20600	25	#Max	QPSK	23.18	15.68	PASS
LTE Band5	10	20600	50	#0	QPSK	23.10	15.60	PASS
LTE Band5	10	20600	1	#0	QAM16	23.03	15.53	PASS
LTE Band5	10	20600	1	#Mid	QAM16	23.11	15.61	PASS
LTE Band5	10	20600	1	#Max	QAM16	23.00	15.50	PASS
LTE Band5	10	20600	25	#0	QAM16	22.18	14.68	PASS
LTE Band5	10	20600	25	#Mid	QAM16	22.12	14.62	PASS
LTE Band5	10	20600	25	#Max	QAM16	22.26	14.76	PASS
LTE Band5	10	20600	50	#0	QAM16	22.18	14.68	PASS
LTE Band5	10	20600	1	#0	QAM64	22.96	15.46	PASS
LTE Band5	10	20600	1	#Mid	QAM64	23.07	15.57	PASS
LTE Band5	10	20600	1	#Max	QAM64	22.98	15.48	PASS
LTE Band5	10	20600	25	#0	QAM64	22.16	14.66	PASS
LTE Band5	10	20600	25	#Mid	QAM64	22.13	14.63	PASS
LTE Band5	10	20600	25	#Max	QAM64	22.25	14.75	PASS
LTE Band5	10	20600	50	#0	QAM64	22.16	14.66	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5.2. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.
RBW is set to 3kHz, VBW is set to 10kHz for GSM 850,
RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band V,
RBW is set to 30 kHz, VBW is set to 91kHz for LTE Band 5 (1.4MHz),
RBW is set to 62 kHz, VBW is set to 180kHz for LTE Band 5 (3MHz),
RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 5 (5MHz),
RBW is set to 200 kHz, VBW is set to 620kHz for LTE Band 5 (10MHz),
99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

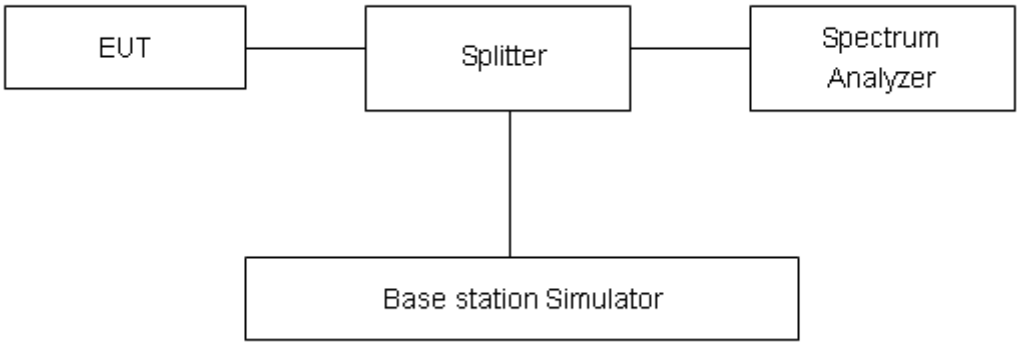

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U= 624Hz.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Test Result

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 850 (GMSK)	128	824.2	0.24505	0.3081
	190	836.6	0.24438	0.3072
	251	848.8	0.24634	0.3113
GPRS 850 (GMSK)	128	824.2	0.24913	0.3073
	190	836.6	0.24368	0.3078
	251	848.8	0.24706	0.3077
EGPRS 850 (8PSK)	128	824.2	0.24171	0.2898
	190	836.6	0.24341	0.3072
	251	848.8	0.24929	0.3062
WCDMA Band V (RMC)	4132	826.4	4.1348	4.695
	4183	836.6	4.1280	4.682
	4233	846.6	4.1485	4.669

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20407	824.7	1.0994	1.224
			20525	836.5	1.0848	1.236
			20643	848.3	1.0901	1.246
		3	20415	825.5	2.7028	3.019
			20525	836.5	2.7055	2.976
			20635	847.5	2.7078	3.000
		5	20425	826.5	4.5183	4.960
			20525	836.5	4.5233	5.005
			20625	846.5	4.5035	4.902
		10	20450	829	8.9691	9.713
			20525	836.5	8.9956	9.738
			20600	844	8.9825	9.749
	16QAM	1.4	20407	824.7	1.0925	1.226
			20525	836.5	1.0943	1.252
			20643	848.3	1.0921	1.227
		3	20415	825.5	2.7071	3.011
			20525	836.5	2.7020	3.008
			20635	847.5	2.7029	3.012
		5	20425	826.5	4.5104	4.916
			20525	836.5	4.5105	4.974
			20625	846.5	4.5275	4.970
		10	20450	829	8.9914	9.673
			20525	836.5	8.9912	9.651
			20600	844	8.9746	9.683
	64QAM	1.4	20407	824.7	1.0977	1.248
			20525	836.5	1.0972	1.252
			20643	848.3	1.0909	1.233
		3	20415	825.5	2.6973	2.984
			20525	836.5	2.7039	2.978
			20635	847.5	2.7073	3.014
		5	20425	826.5	4.5269	4.950

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

			20525	836.5	4.5147	4.997
			20625	846.5	4.5101	4.978
		10	20450	829	8.9739	9.746
			20525	836.5	8.9890	9.733
			20600	844	8.9793	9.755

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

GSM 850 CH-Low

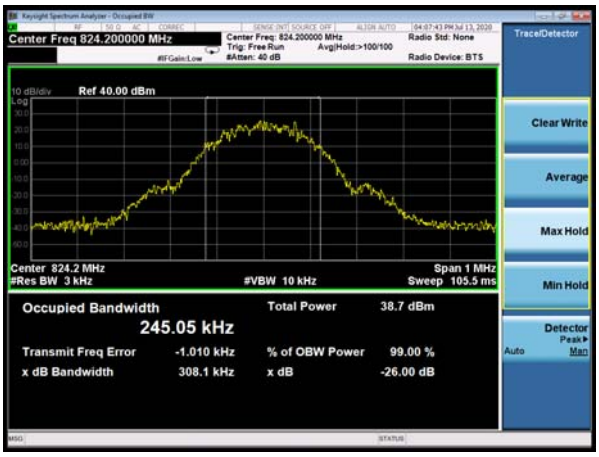

GSM 850 GPRS CH-Low

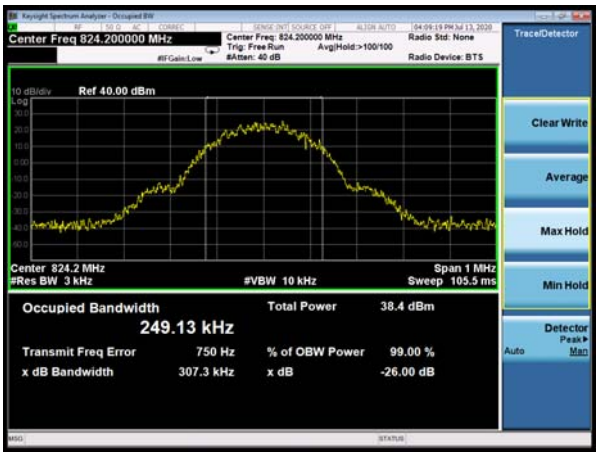

GSM 850 CH-Middle

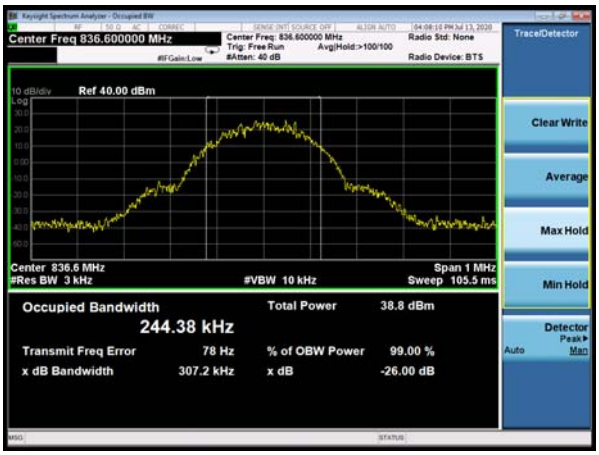

GSM 850 GPRS CH-Middle

GSM 850 CH-High

GSM 850 GPRS CH-High

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

GSM 850 EGPRS CH-Low

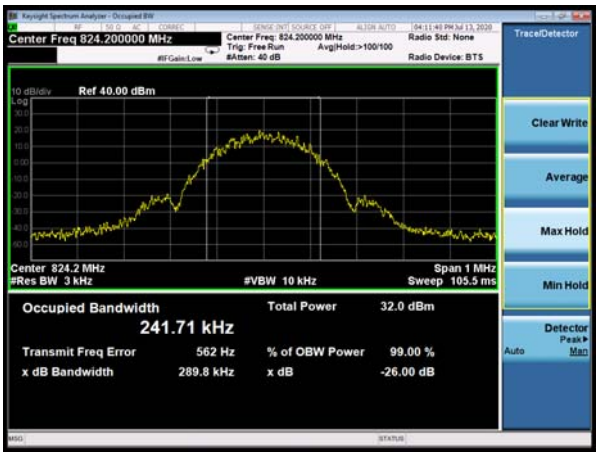

WCDMA Band V CH-Low

GSM 850 EGPRS CH-Middle

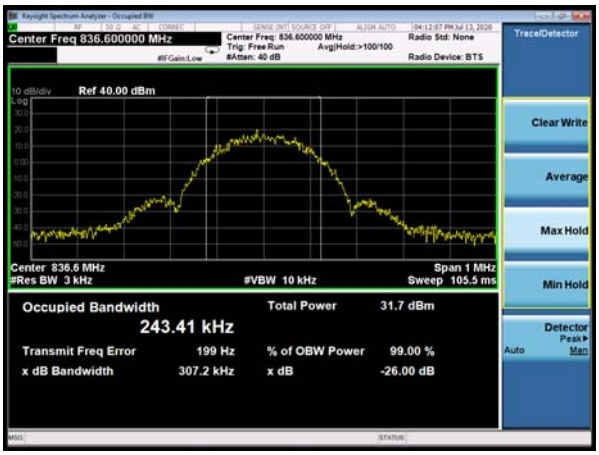

WCDMA Band V CH-Middle

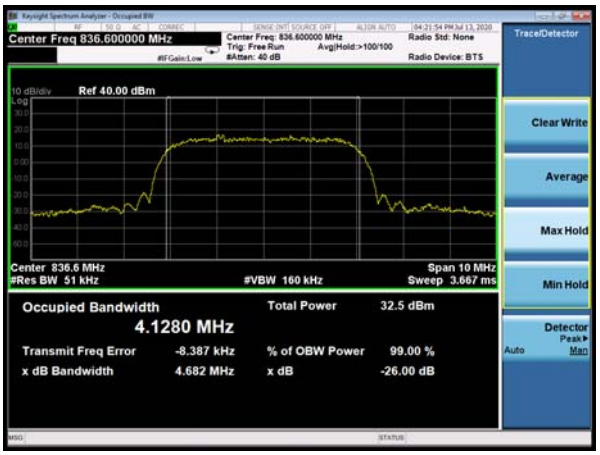

GSM 850 EGPRS CH-High

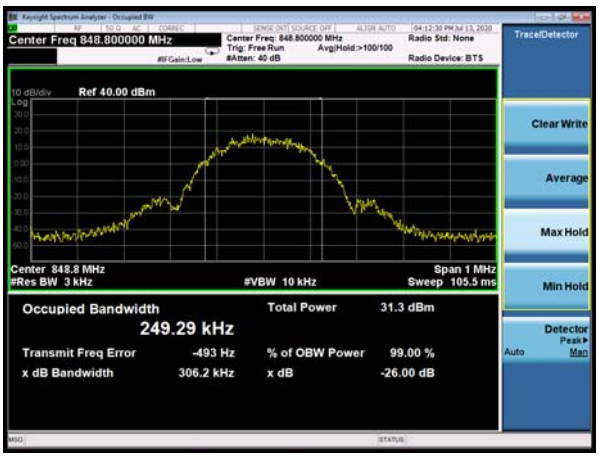

WCDMA Band V CH-High

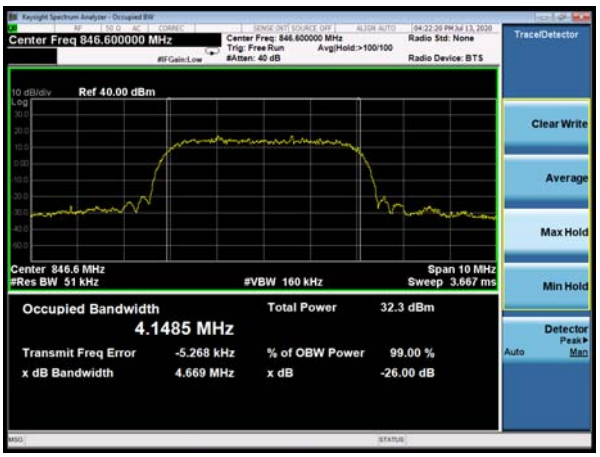

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 QPSK 1.4MHz CH-Low

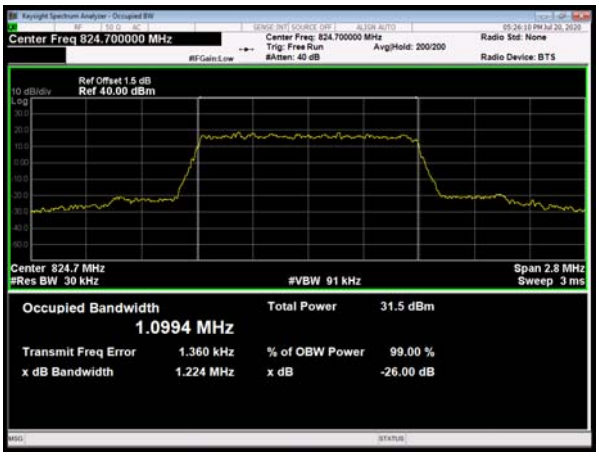

LTE Band 5 QPSK 3MHz CH-Low

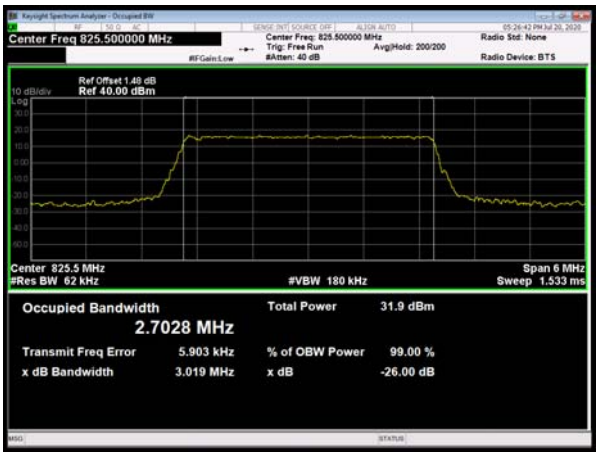

LTE Band 5 QPSK 1.4MHz CH-Middle

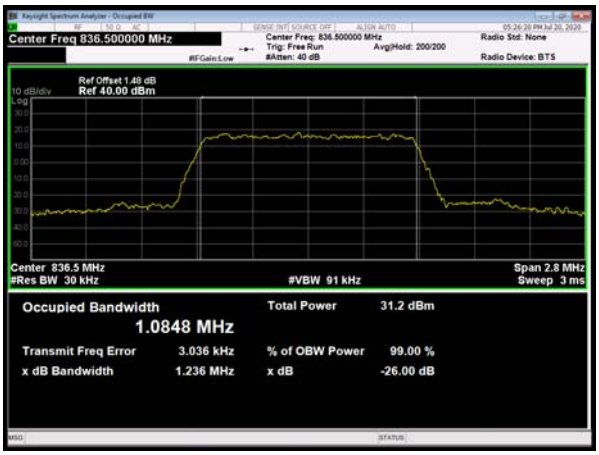

LTE Band 5 QPSK 3MHz CH-Middle

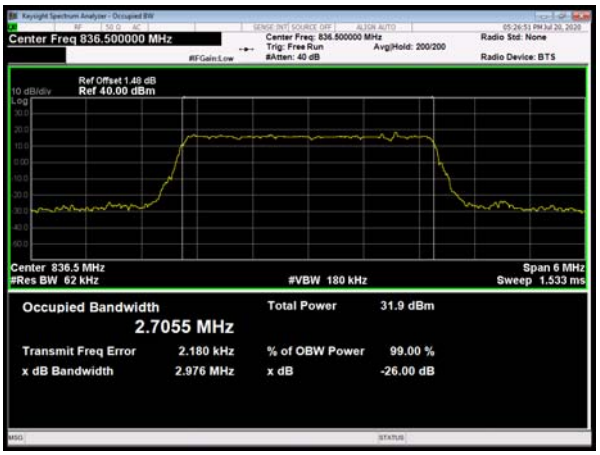

LTE Band 5 QPSK 1.4MHz CH-High

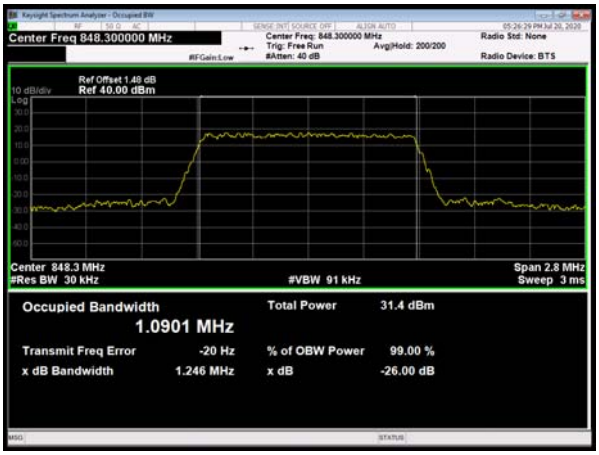

LTE Band 5 QPSK 3MHz CH-High

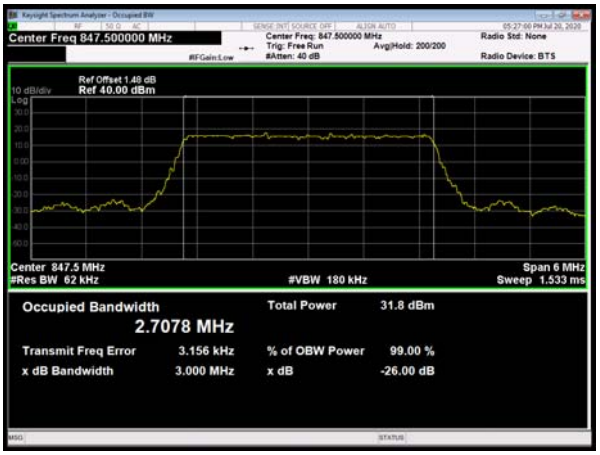

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 QPSK 5MHz CH-Low

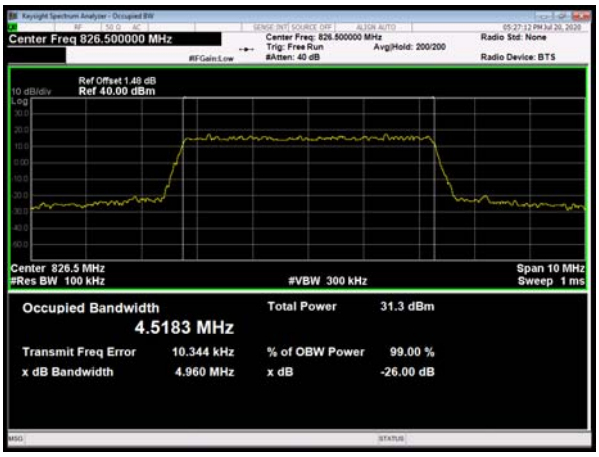

LTE Band 5 QPSK 10MHz CH-Low

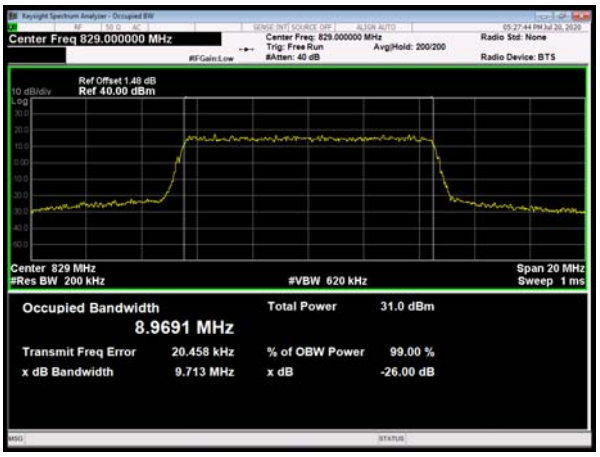

LTE Band 5 QPSK 5MHz CH-Middle

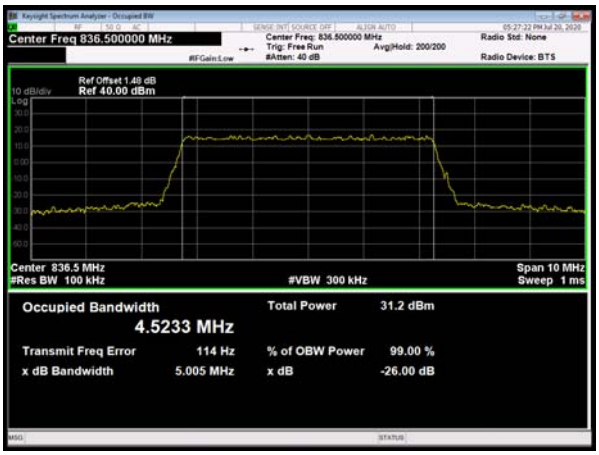

LTE Band 5 QPSK 10MHz CH-Middle

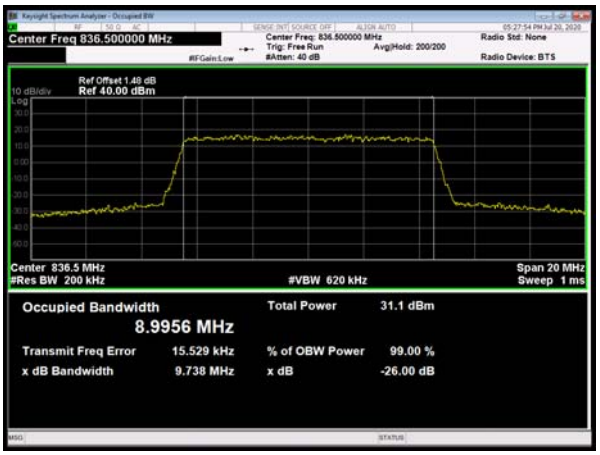

LTE Band 5 QPSK 5MHz CH-High

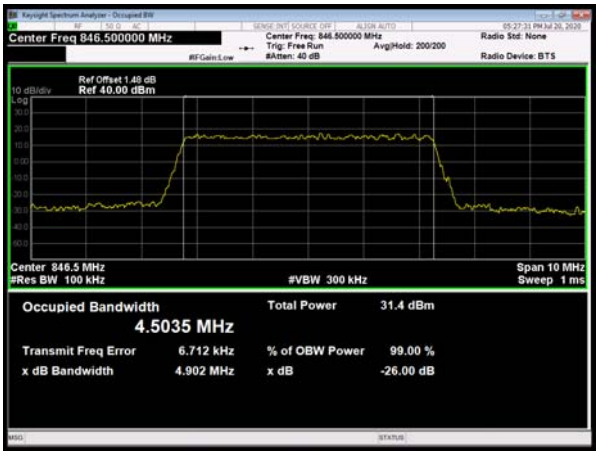

LTE Band 5 QPSK 10MHz CH-High

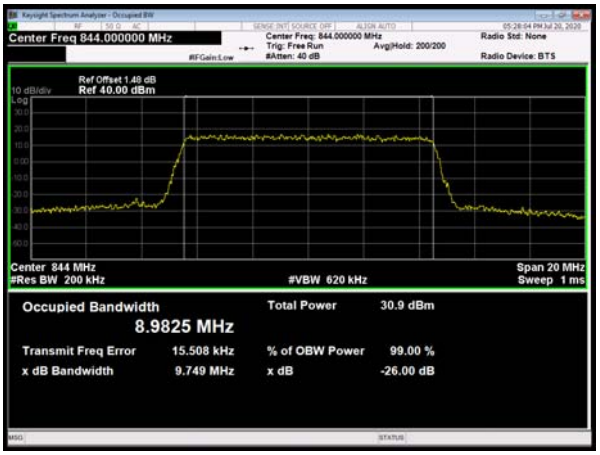

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 16QAM 1.4MHz CH-Low

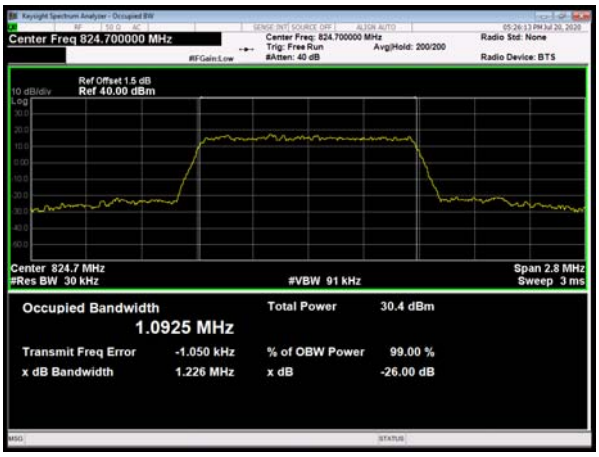

LTE Band 5 16QAM 3MHz CH-Low

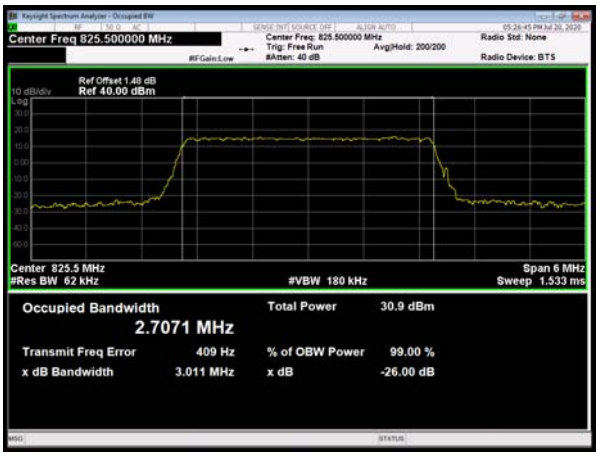

LTE Band 5 16QAM 1.4MHz CH-Middle

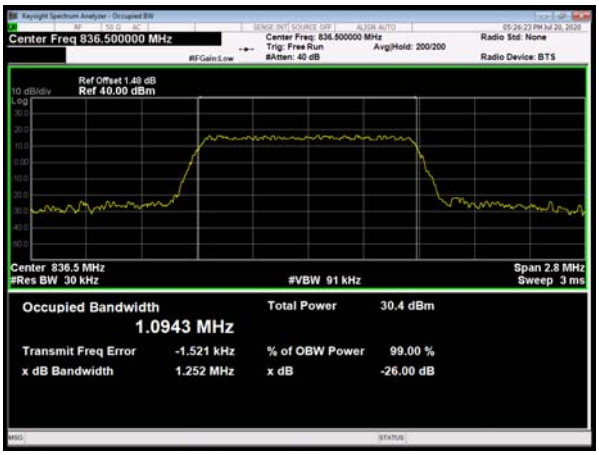

LTE Band 5 16QAM 3MHz CH-Middle

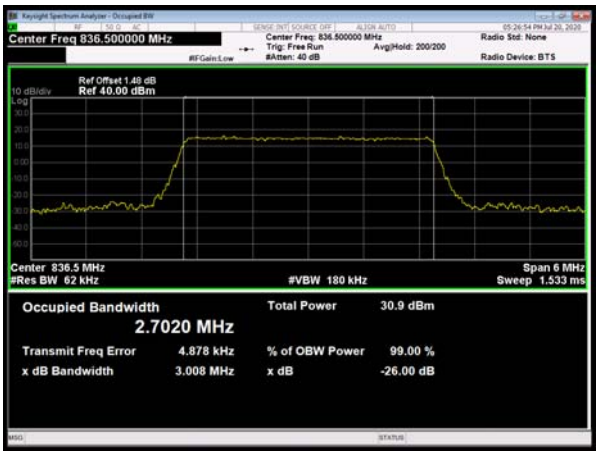

LTE Band 5 16QAM 1.4MHz CH-High

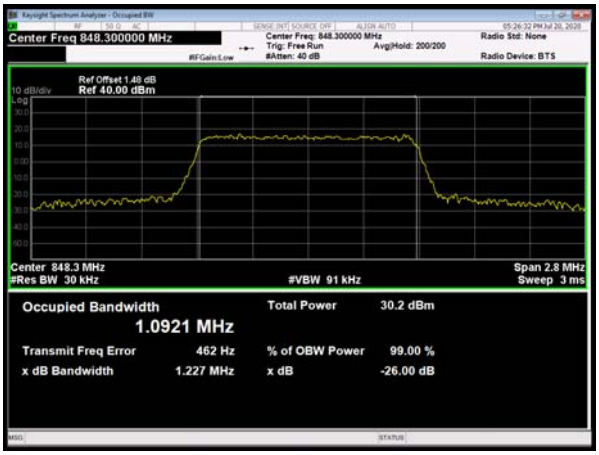

LTE Band 5 16QAM 3MHz CH-High

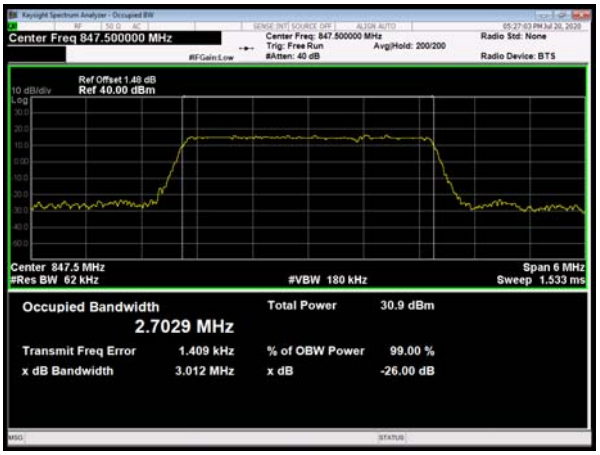

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 16QAM 5MHz CH-Low

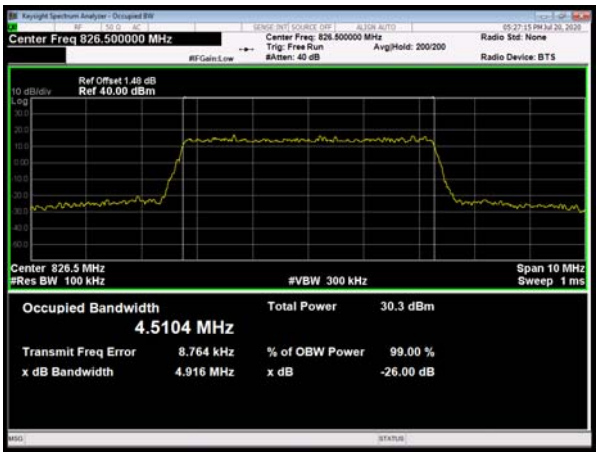

LTE Band 5 16QAM 10MHz CH-Low

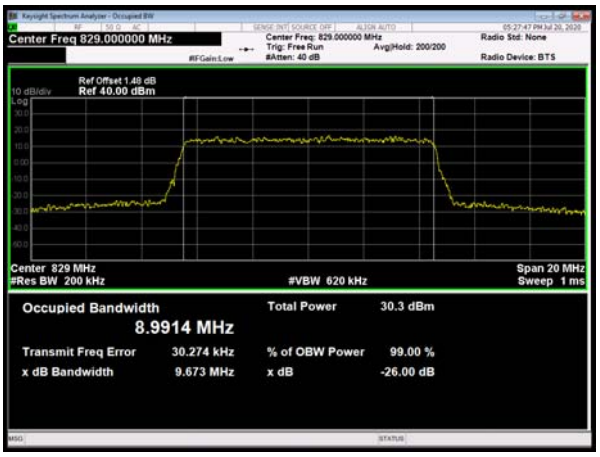

LTE Band 5 16QAM 5MHz CH-Middle

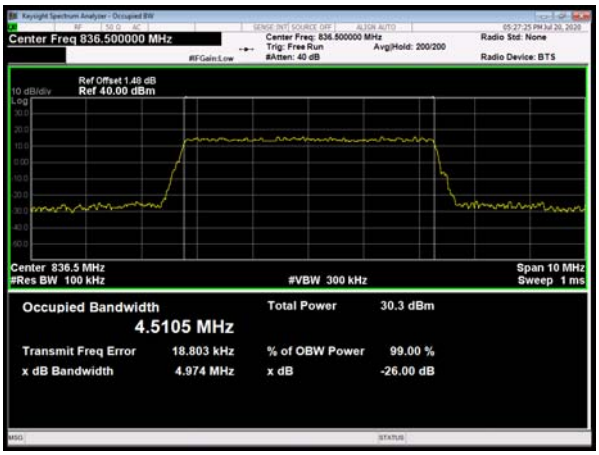

LTE Band 5 16QAM 10MHz CH-Middle

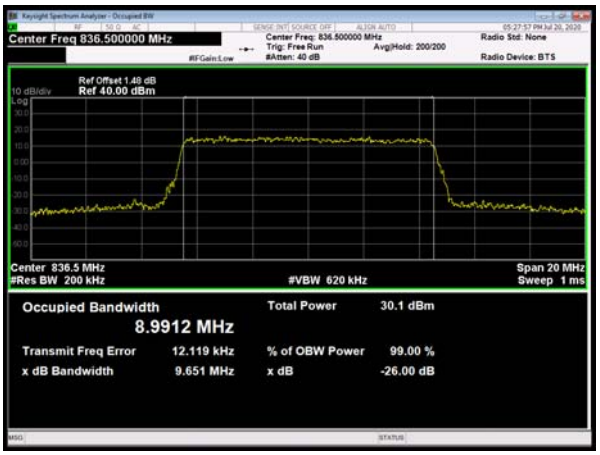

LTE Band 5 16QAM 5MHz CH-High

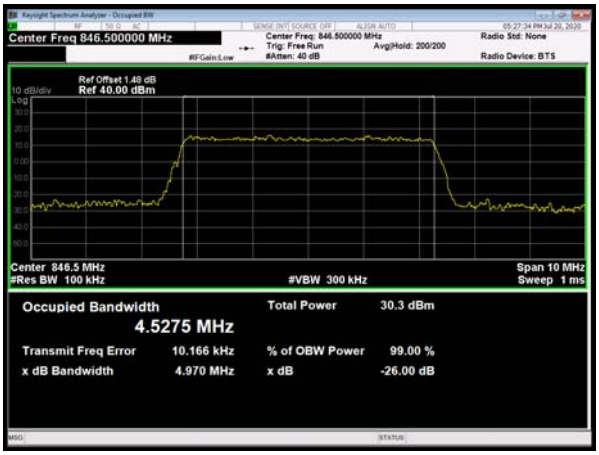

LTE Band 5 16QAM 10MHz CH-High

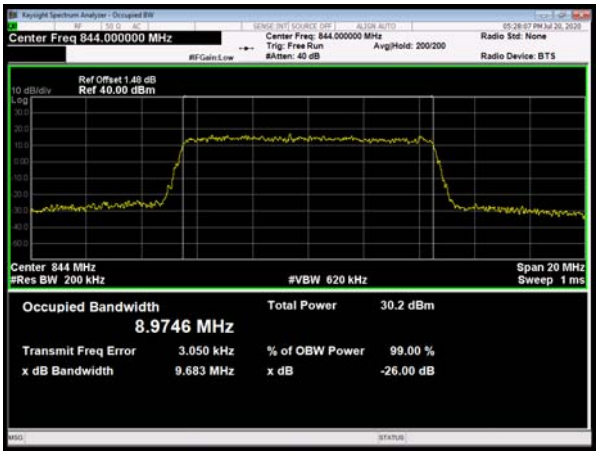

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 64QAM 1.4MHz CH-Low

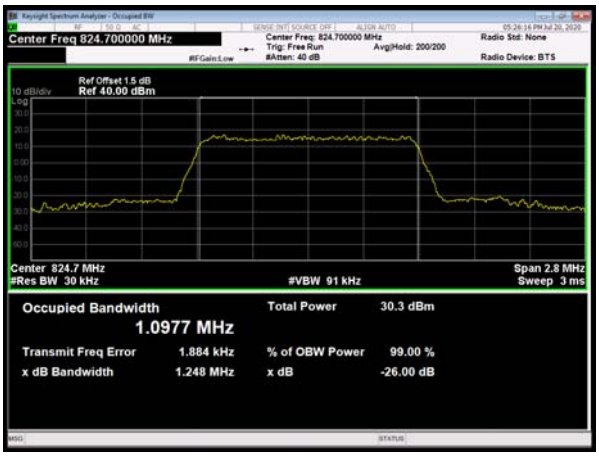

LTE Band 5 64QAM 3MHz CH-Low

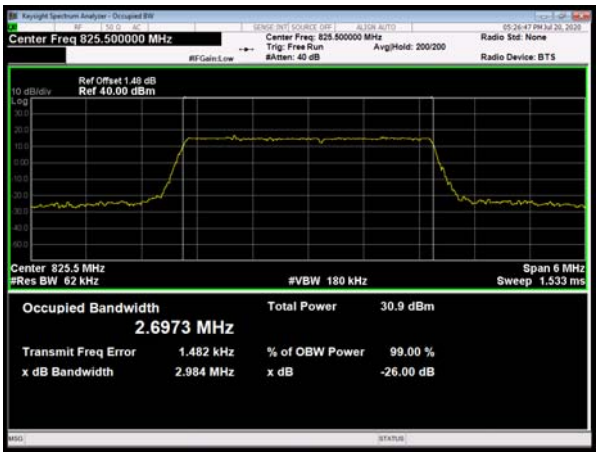

LTE Band 5 64QAM 1.4MHz CH-Middle

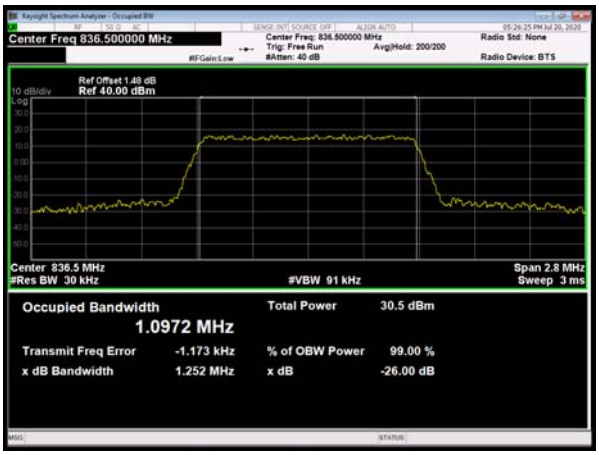

LTE Band 5 64QAM 3MHz CH-Middle

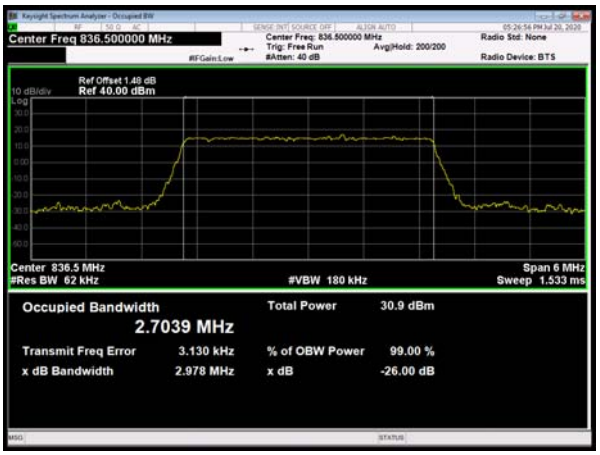

LTE Band 5 64QAM 1.4MHz CH-High

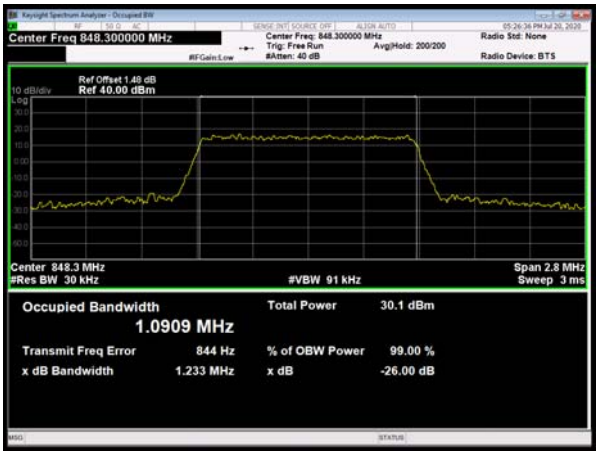

LTE Band 5 64QAM 3MHz CH-High

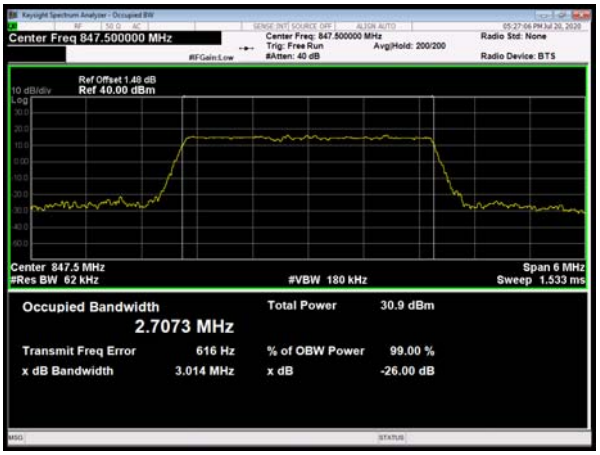

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 64QAM 5MHz CH-Low

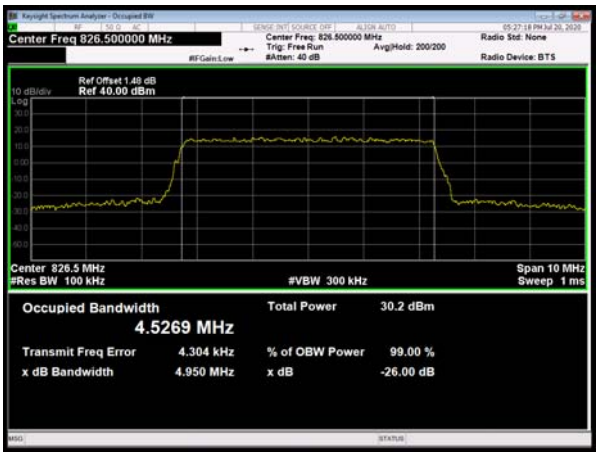

LTE Band 5 64QAM 10MHz CH-Low

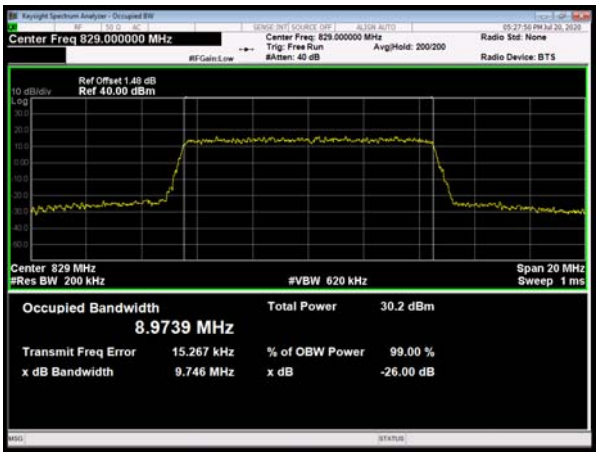

LTE Band 5 64QAM 5MHz CH-Middle

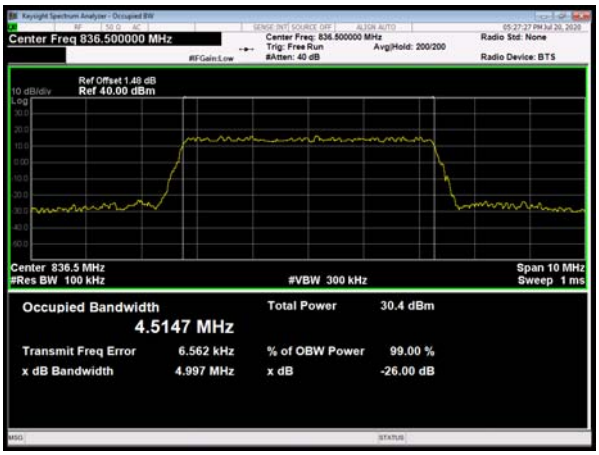

LTE Band 5 64QAM 10MHz CH-Middle

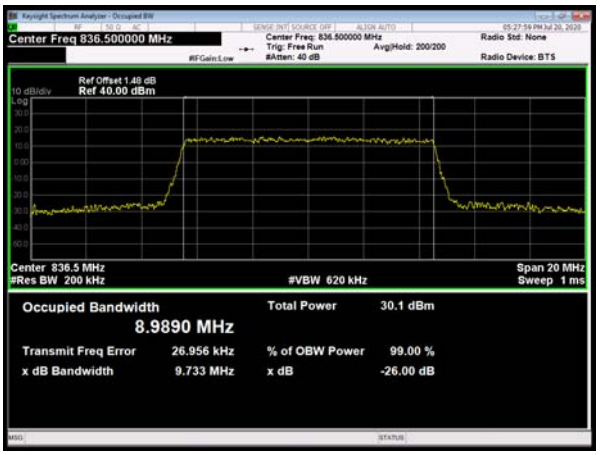

LTE Band 5 64QAM 5MHz CH-High

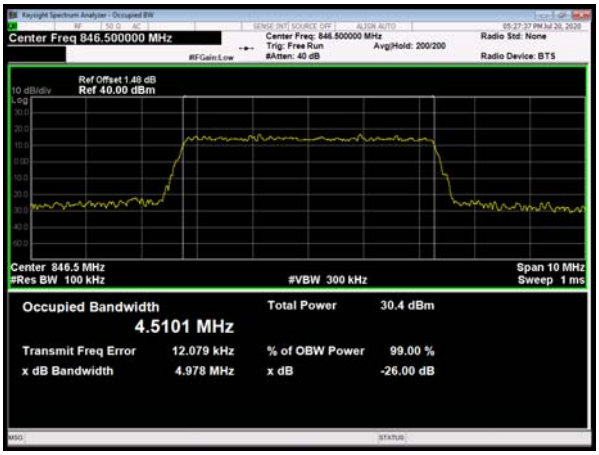

LTE Band 5 64QAM 10MHz CH-High

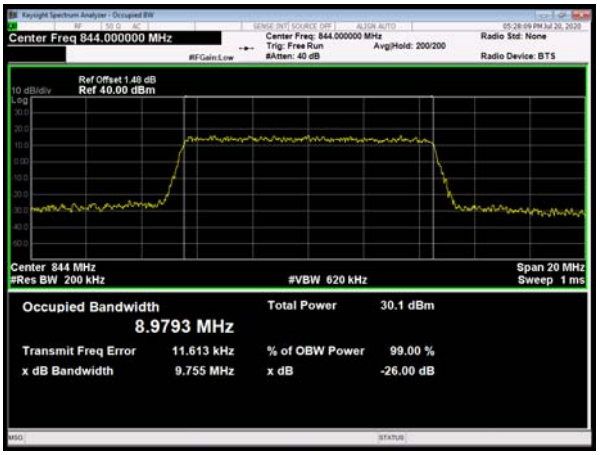

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5.3. Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used.
RBW is set to 3kHz,VBW is set to 10kHz for GSM 850,
RBW is set to 51kHz,VBW is set to 160kHz for WCDMA Band V,
RBW is set to 15kHz, VBW is set to 43kHz for LTE Band 5 (1.4MHz),
RBW is set to 30kHz,VBW is set to 91kHz for LTE Band 5 (3MHz),
RBW is set to 51kHz,VBW is set to 150kHz for LTE Band 5 (5MHz),
RBW is set to 100kHz,VBW is set to 300kHz for LTE Band 5 (10MHz),
Spectrum analyzer plots are included on the following pages.

Test Setup

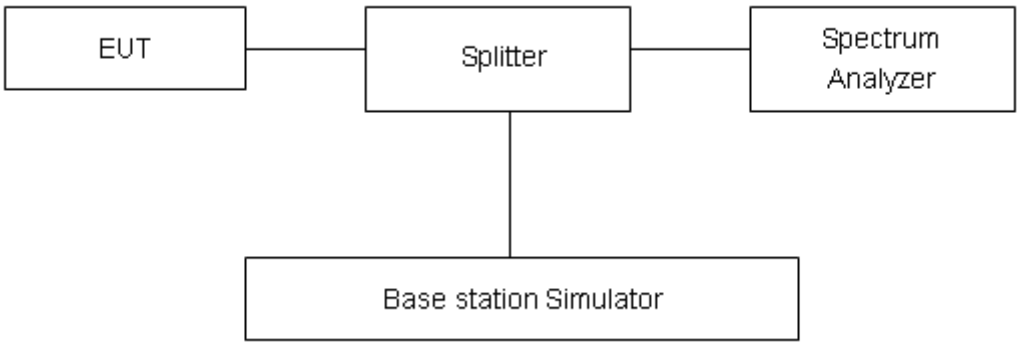

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.”

Limit	-13 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 1.96, U=0.684dB.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Test Result:

GSM 850 CH-Low

GSM 850 CH-High

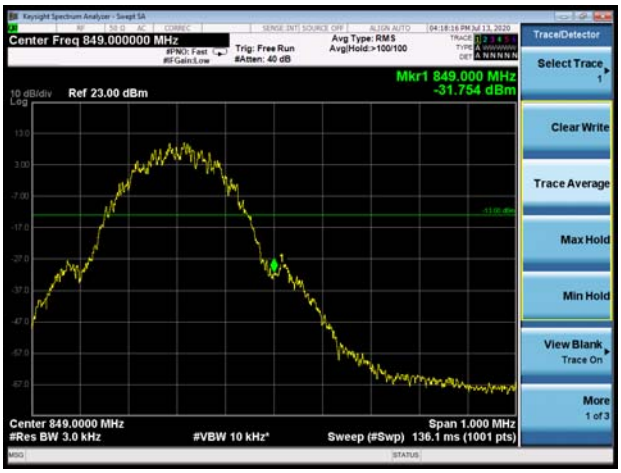

GSM 850 GPRS CH-Low

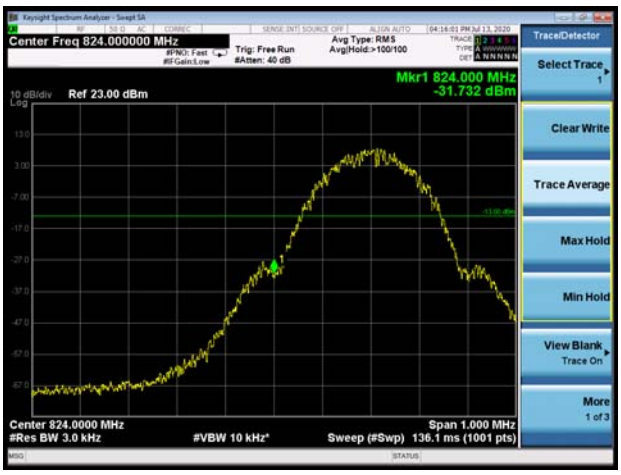

GSM 850 GPRS CH-High

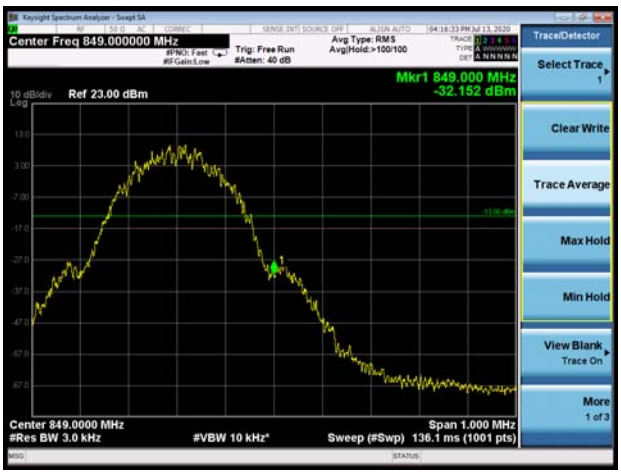

GSM 850 EGPRS CH-Low

GSM 850 EGPRS CH-High

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

WCDMA Band V CH-Low

WCDMA Band V CH-High

LTE Band 5 QPSK 1.4MHz CH-Low 1RB

LTE Band 5 QPSK 1.4MHz CH-High 1RB

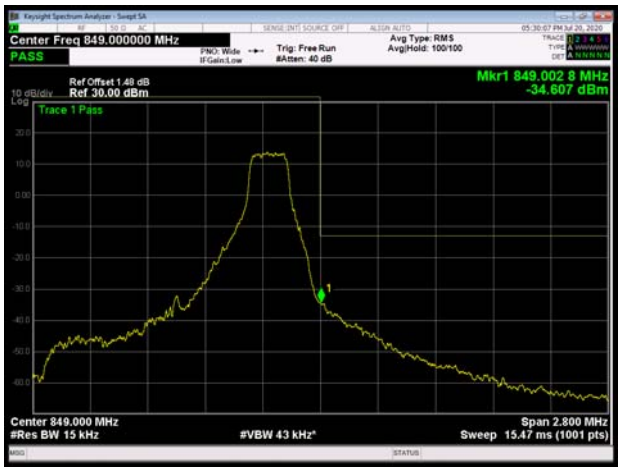

LTE Band 5 QPSK 1.4MHz CH-Low 100%RB

LTE Band 5 QPSK 1.4MHz CH-High 100%RB

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 QPSK 3MHz CH-Low 1RB

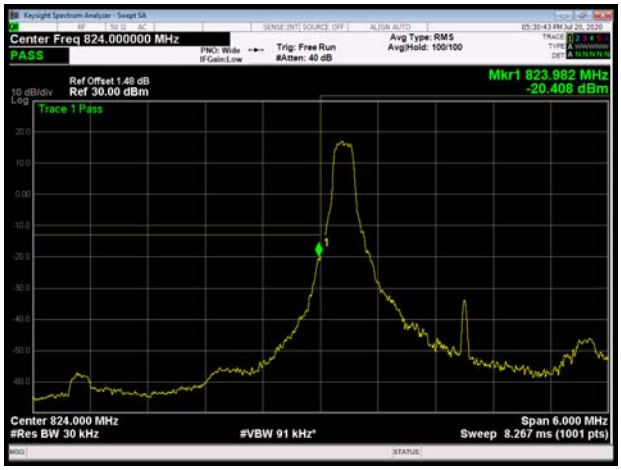

LTE Band 5 QPSK 3MHz CH-High 1RB

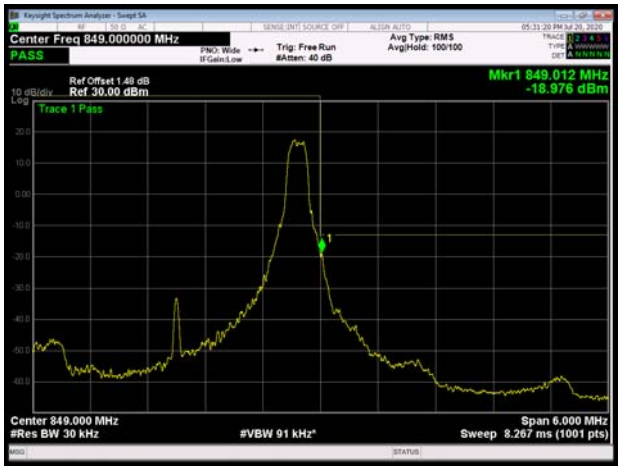

LTE Band 5 QPSK 3MHz CH-Low 100%RB

LTE Band 5 QPSK 3MHz CH-High 100%RB

LTE Band 5 QPSK 5MHz CH-Low 1RB

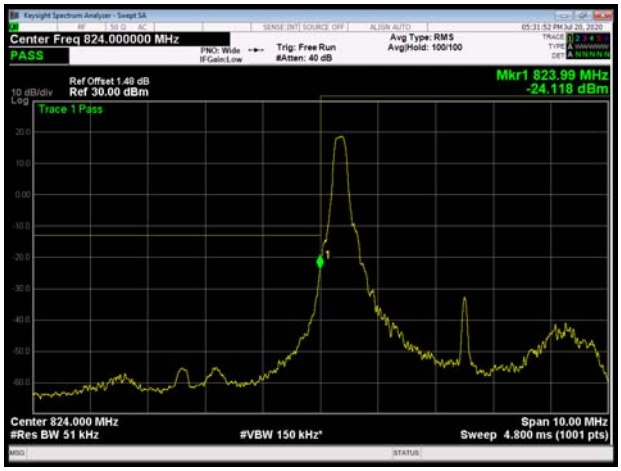

LTE Band 5 QPSK 5MHz CH-High 1RB

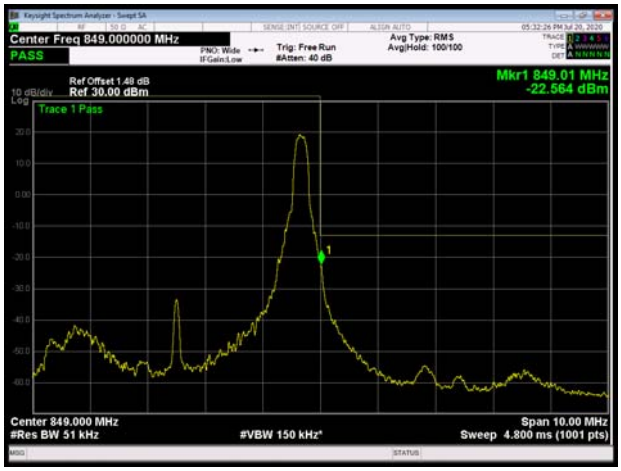

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 QPSK 5MHz CH-Low 100%RB

LTE Band 5 QPSK 5MHz CH-High 100%RB

LTE Band 5 QPSK 10MHz CH-Low 1RB

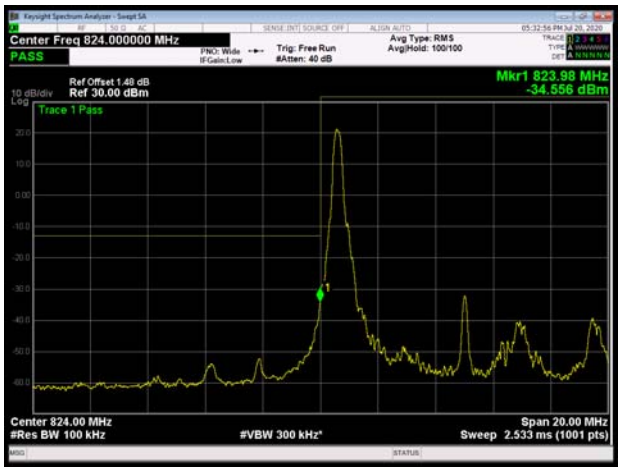

LTE Band 5 QPSK 10MHz CH-High 1RB

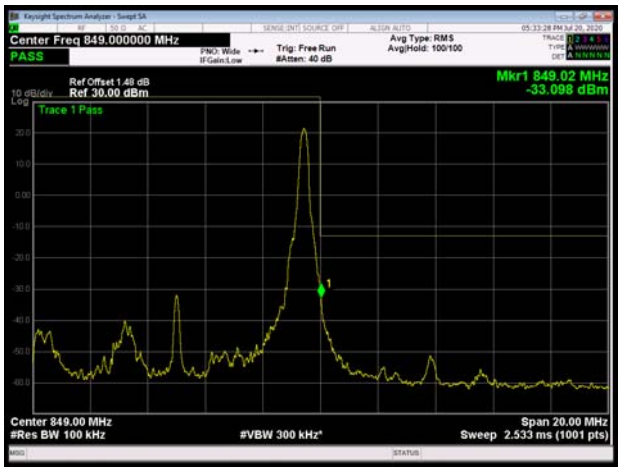

LTE Band 5 QPSK 10MHz CH-Low 100%RB

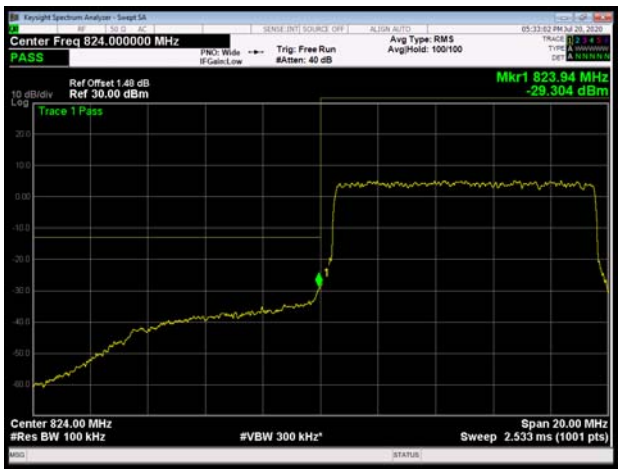

LTE Band 5 QPSK 10MHz CH-High 100%RB

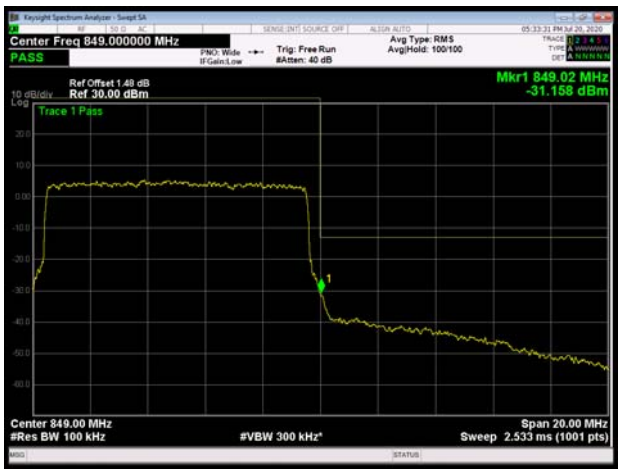

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 16QAM 1.4MHz CH-Low 1RB

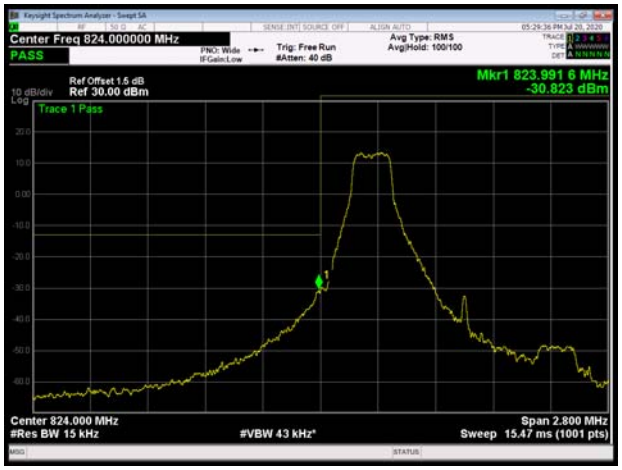

LTE Band 5 16QAM 1.4MHz CH-High 1RB

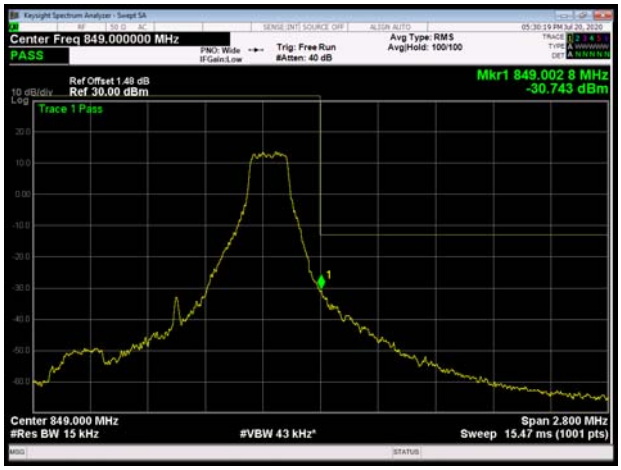

LTE Band 5 16QAM 1.4MHz CH-Low 100%RB

LTE Band 5 16QAM 1.4MHz CH-High 100%RB

LTE Band 5 16QAM 3MHz CH-Low 1RB

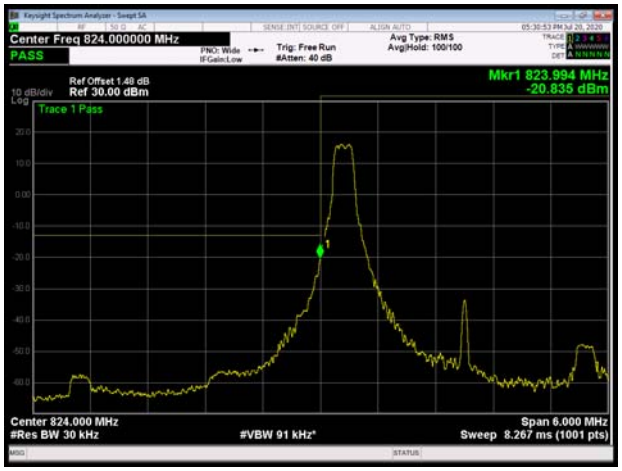

LTE Band 5 16QAM 3MHz CH-High 1RB

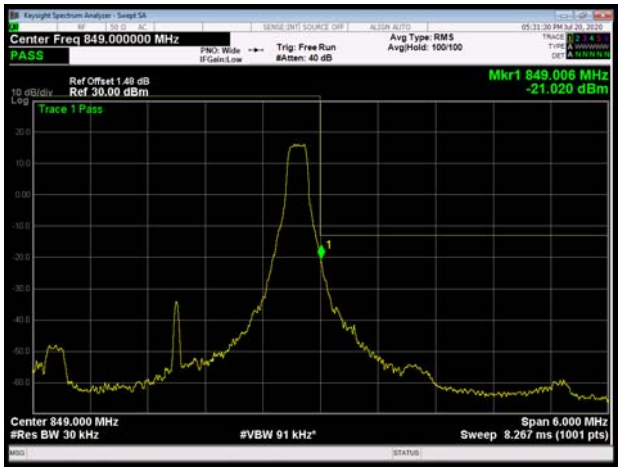

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 16QAM 3MHz CH-Low 100%RB

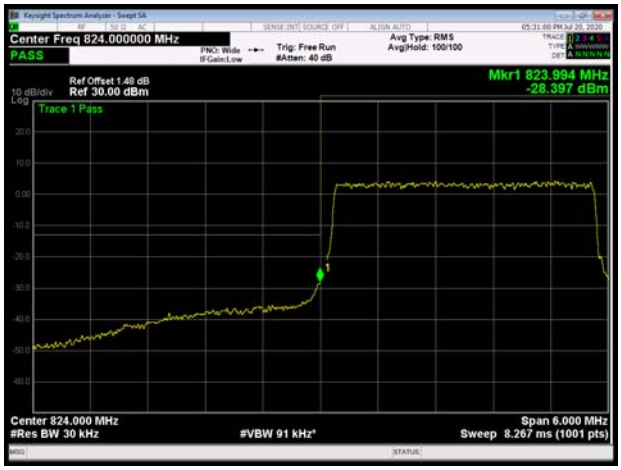

LTE Band 5 16QAM 3MHz CH-High 100%RB

LTE Band 5 16QAM 5MHz CH-Low 1RB

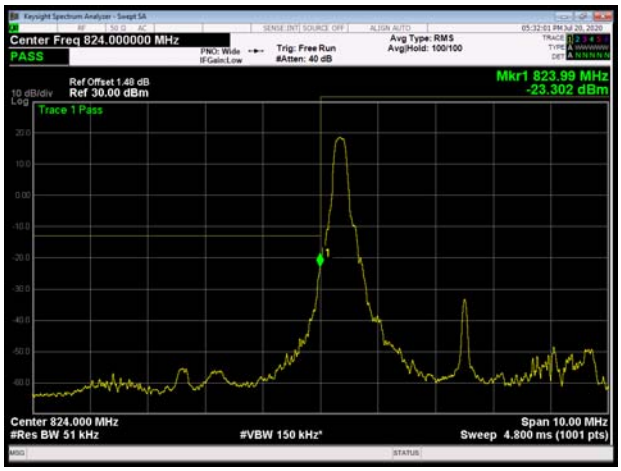

LTE Band 5 16QAM 5MHz CH-High 1RB

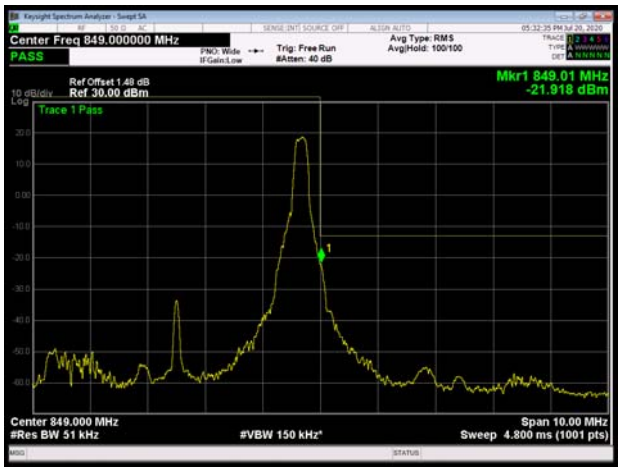

LTE Band 5 16QAM 5MHz CH-Low 100%RB

LTE Band 5 16QAM 5MHz CH-High 100%RB

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 16QAM 10MHz CH-Low 1RB

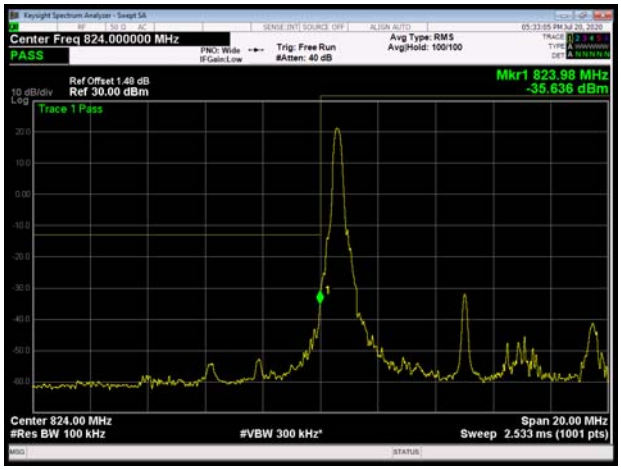

LTE Band 5 16QAM 10MHz CH-High 1RB

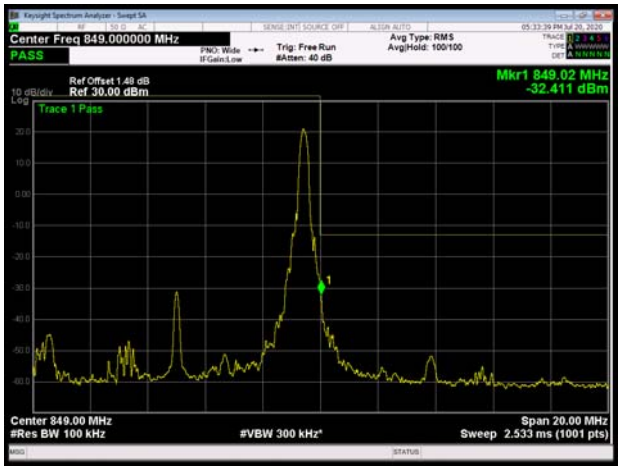

LTE Band 5 16QAM 10MHz CH-Low 100%RB

LTE Band 5 16QAM 10MHz CH-High 100%RB

LTE Band 5 64QAM 1.4MHz CH-Low 1RB

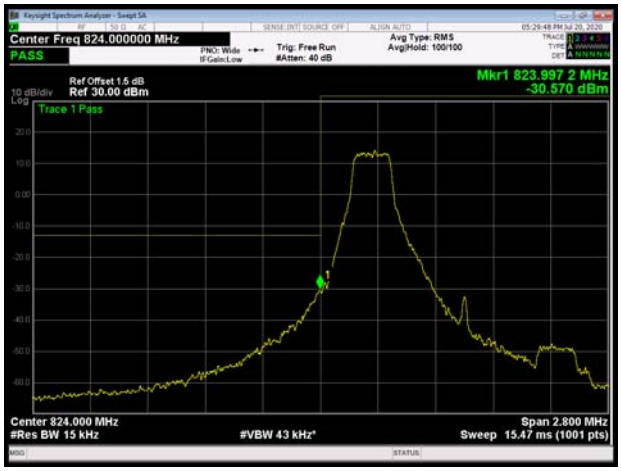

LTE Band 5 64QAM 1.4MHz CH-High 1RB

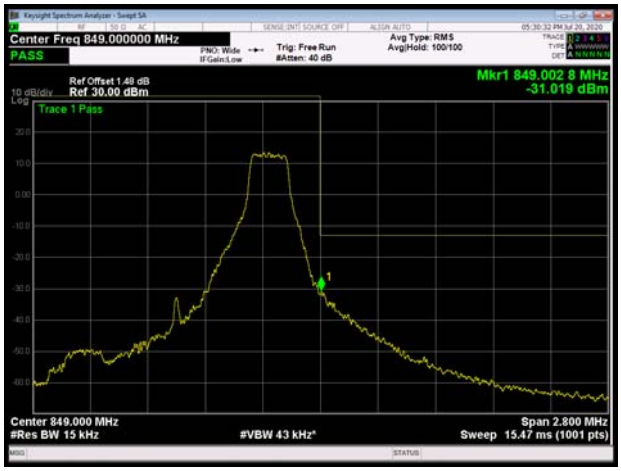

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 64QAM 1.4MHz CH-Low 100%RB

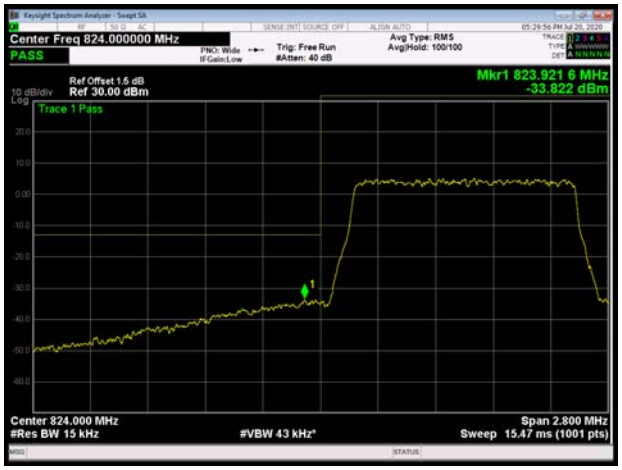

LTE Band 5 64QAM 1.4MHz CH-High 100%RB

LTE Band 5 64QAM 3MHz CH-Low 1RB

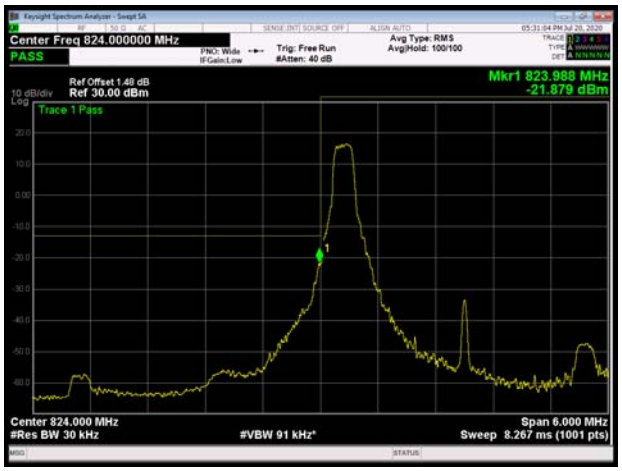

LTE Band 5 64QAM 3MHz CH-High 1RB

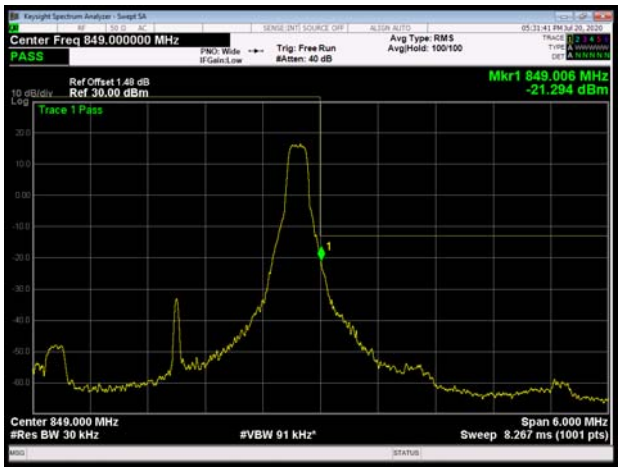

LTE Band 5 64QAM 3MHz CH-Low 100%RB

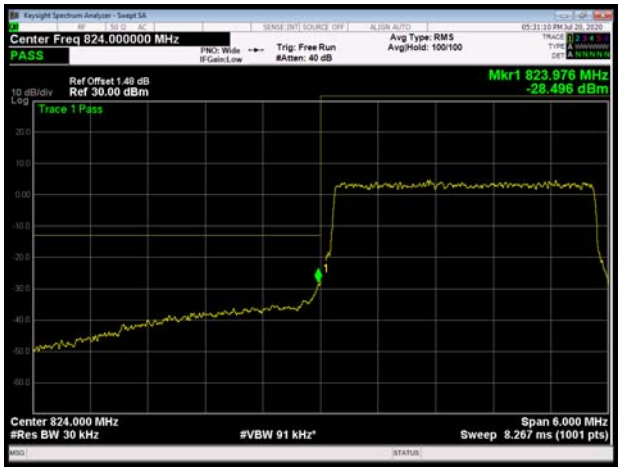

LTE Band 5 64QAM 3MHz CH-High 100%RB

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 64QAM 5MHz CH-Low 1RB

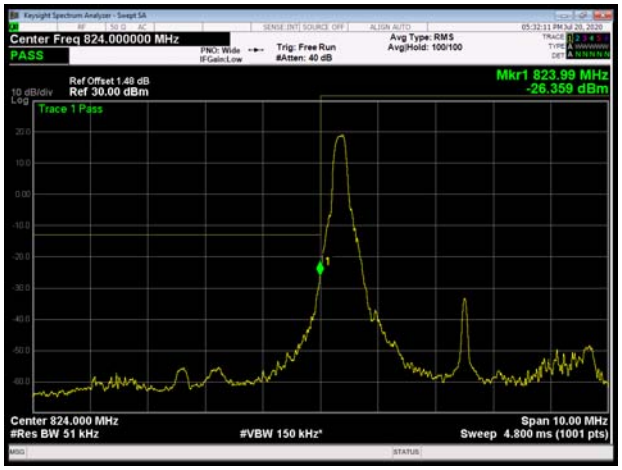

LTE Band 5 64QAM 5MHz CH-High 1RB

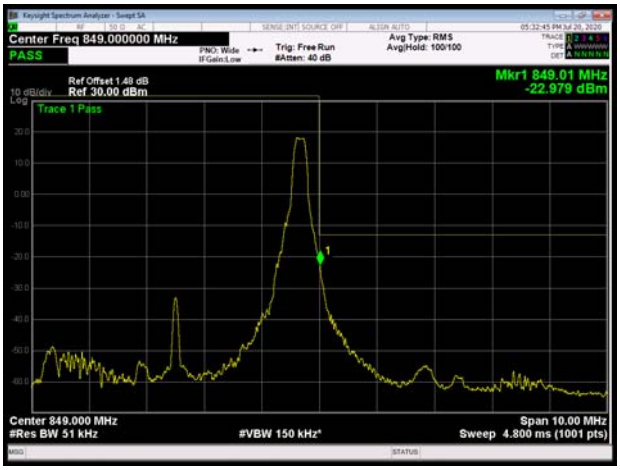

LTE Band 5 64QAM 5MHz CH-Low 100%RB

LTE Band 5 64QAM 5MHz CH-High 100%RB

LTE Band 5 64QAM 10MHz CH-Low 1RB

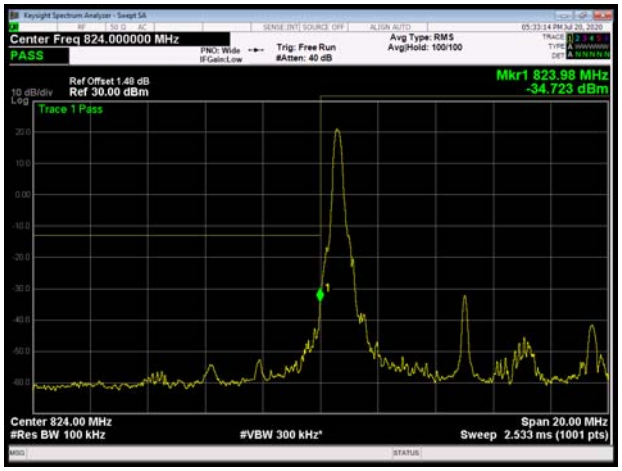

LTE Band 5 64QAM 10MHz CH-High 1RB

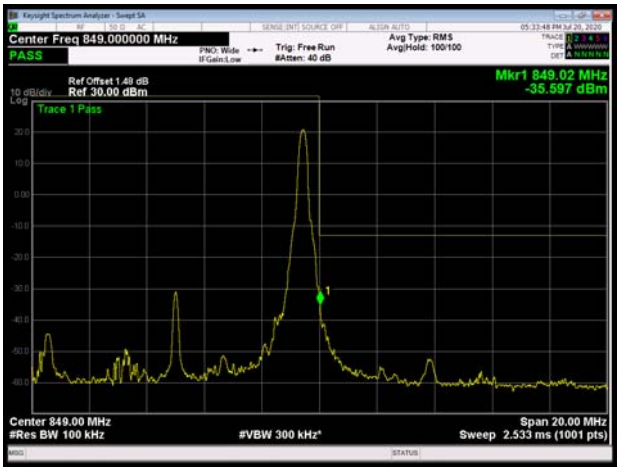

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 64QAM 10MHz CH-Low 100%RB	LTE Band 5 64QAM 10MHz CH-High 100%RB

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5.4. Peak-to-Average Power Ratio (PAPR)

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk}. And measure the total average power and record as P_{Avg}. Both the peak and average power levels must be expressed in the same logarithmic units (*e.g.*, dBm). Determine the PAPR from:
PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).

Test Setup

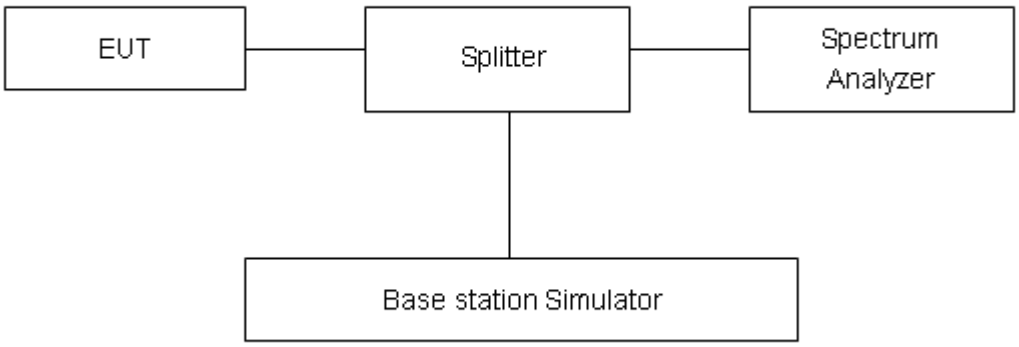

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor *k* = 2, *U*= 0.4 dB.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Test Results

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
GSM 850 (GMSK)	128	824.2	34.80	33.53	1.27	≤13	PASS
	190	836.6	34.85	33.52	1.33	≤13	PASS
	251	848.8	34.90	33.65	1.25	≤13	PASS
GPRS 850 (GMSK)	128	824.2	34.89	33.62	1.27	≤13	PASS
	190	836.6	34.77	33.44	1.33	≤13	PASS
	251	848.8	34.60	33.28	1.32	≤13	PASS
EGPRS 850 (8PSK)	128	824.2	28.75	26.89	1.86	≤13	PASS
	190	836.6	28.62	26.82	1.80	≤13	PASS
	251	848.8	28.68	26.87	1.81	≤13	PASS
WCDMA Band V (RMC)	4132	826.4	26.60	23.65	2.95	≤13	PASS
	4183	836.6	26.49	23.61	2.88	≤13	PASS
	4233	846.6	26.38	23.60	2.78	≤13	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	20407	824.7	27.77	23.21	4.56	≤13	PASS
		20525	836.5	27.68	23.14	4.54	≤13	PASS
		20643	848.3	27.41	23.16	4.25	≤13	PASS
	3	20415	825.5	27.75	23.23	4.52	≤13	PASS
		20525	836.5	27.63	23.25	4.38	≤13	PASS
		20635	847.5	27.46	23.22	4.24	≤13	PASS
	5	20425	826.5	27.94	23.25	4.69	≤13	PASS
		20525	836.5	27.78	23.25	4.53	≤13	PASS
		20625	846.5	27.68	23.24	4.44	≤13	PASS
	10	20450	829	28.01	23.36	4.65	≤13	PASS
		20525	836.5	27.82	23.22	4.60	≤13	PASS
		20600	844	27.69	23.17	4.52	≤13	PASS
16QAM	1.4	20407	824.7	27.90	22.26	5.64	≤13	PASS
		20525	836.5	27.87	22.29	5.58	≤13	PASS
		20643	848.3	27.58	22.24	5.34	≤13	PASS
	3	20415	825.5	28.04	22.35	5.69	≤13	PASS
		20525	836.5	27.86	22.26	5.60	≤13	PASS
		20635	847.5	27.69	22.30	5.39	≤13	PASS
	5	20425	826.5	28.07	22.31	5.76	≤13	PASS
		20525	836.5	27.92	22.32	5.60	≤13	PASS
		20625	846.5	27.80	22.32	5.48	≤13	PASS
	10	20450	829	28.13	22.39	5.74	≤13	PASS
		20525	836.5	28.00	22.34	5.66	≤13	PASS
		20600	844	27.82	22.21	5.61	≤13	PASS
	1.4	20407	824.7	27.89	22.25	5.64	≤13	PASS
		20525	836.5	27.86	22.25	5.61	≤13	PASS
		20643	848.3	27.58	22.22	5.36	≤13	PASS
	3	20415	825.5	28.06	22.35	5.71	≤13	PASS
		20525	836.5	27.89	22.30	5.59	≤13	PASS
		20635	847.5	27.70	22.28	5.42	≤13	PASS
	5	20425	826.5	28.11	22.33	5.78	≤13	PASS
		20525	836.5	27.93	22.35	5.58	≤13	PASS
		20625	846.5	27.79	22.32	5.47	≤13	PASS
	10	20450	829	28.14	22.39	5.75	≤13	PASS
		20525	836.5	28.01	22.33	5.68	≤13	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

		20600	844	27.84	22.21	5.63	≤13	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5.5. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.4 V, with a nominal voltage of 3.87V.

Test setup

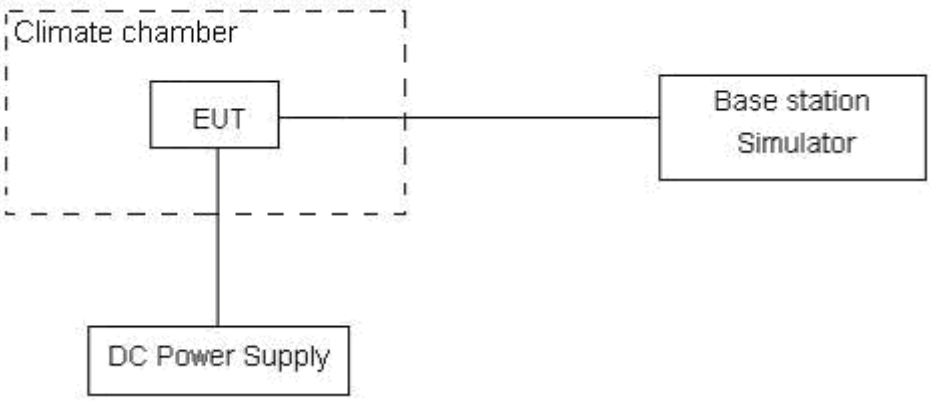

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75％ confidence level for the normal distribution is with the coverage factor *k* = 3, *U*= 0.01ppm.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Test Result

GSM850						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability（ppm）	Frequency Stability（ppm）	Verdict
Temperature	Voltage	GMSK	8PSK	GMSK	8PSK	
Normal（25℃）	Normal	12.88	1.33	0.00685	0.00071	PASS
Extreme（55℃）		7.24	16.72	0.00385	0.00889	PASS
Extreme（50℃）		16.72	1.19	0.00889	0.00063	PASS
Extreme（40℃）		12.18	3.63	0.00648	0.00193	PASS
Extreme（30℃）		10.01	16.46	0.00532	0.00876	PASS
Extreme（20℃）		6.42	3.69	0.00342	0.00196	PASS
Extreme（10℃）		2.46	16.33	0.00131	0.00869	PASS
Extreme（0℃）		7.39	15.78	0.00393	0.00840	PASS
Extreme（-10℃）		6.16	9.06	0.00328	0.00482	PASS
Extreme（-20℃）		6.52	1.16	0.00347	0.00062	PASS
Extreme（-30℃）		17.72	3.32	0.00943	0.00177	PASS
25℃	LV	6.07	5.47	0.00323	0.00291	PASS
	HV	5.08	16.69	0.00270	0.00888	PASS

WCDMA Band 5						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability（ppm）	Frequency Stability（ppm）	Verdict
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK	
Normal（25℃）	Normal	10.70	7.03	0.00569	0.00374	PASS
Extreme（55℃）		15.60	13.31	0.00830	0.00708	PASS
Extreme（50℃）		16.27	9.25	0.00865	0.00492	PASS
Extreme（40℃）		3.11	11.59	0.00166	0.00617	PASS
Extreme（30℃）		9.76	7.73	0.00519	0.00411	PASS
Extreme（20℃）		3.17	14.22	0.00169	0.00757	PASS
Extreme（10℃）		4.26	17.48	0.00226	0.00930	PASS
Extreme（0℃）		13.25	15.73	0.00705	0.00837	PASS
Extreme（-10℃）		15.25	13.89	0.00811	0.00739	PASS
Extreme（-20℃）		6.53	1.15	0.00347	0.00061	PASS
Extreme（-30℃）		15.18	1.85	0.00807	0.00098	PASS
25℃	LV	11.79	4.50	0.00627	0.00239	PASS
	HV	16.64	2.65	0.00885	0.00141	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5								
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal（25℃）	Normal	9.67	10.48	17.62	0.00514	0.00558	0.00937	PASS
Extreme（55℃）		16.64	4.34	11.87	0.00885	0.00231	0.00631	PASS
Extreme（50℃）		7.11	7.56	11.47	0.00378	0.00402	0.00610	PASS
Extreme（40℃）		4.59	3.73	8.43	0.00244	0.00199	0.00448	PASS
Extreme（30℃）		6.88	15.73	8.68	0.00366	0.00837	0.00462	PASS
Extreme（20℃）		6.43	2.98	6.64	0.00342	0.00159	0.00353	PASS
Extreme（10℃）		13.98	6.53	5.11	0.00744	0.00348	0.00272	PASS
Extreme（0℃）		7.62	13.92	10.33	0.00405	0.00741	0.00549	PASS
Extreme（-10℃）		7.99	1.05	15.55	0.00425	0.00056	0.00827	PASS
Extreme（-20℃）		15.25	3.64	1.57	0.00811	0.00194	0.00083	PASS
Extreme（-30℃）		1.51	4.49	13.40	0.00080	0.00239	0.00713	PASS
25℃	LV	2.44	11.80	4.49	0.00130	0.00627	0.00239	PASS
	HV	10.98	14.16	16.75	0.00584	0.00753	0.00891	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal（25℃）	Normal	5.79	9.24	5.43	0.00308	0.00491	0.00289	PASS
Extreme（55℃）		11.76	13.11	8.68	0.00626	0.00697	0.00462	PASS
Extreme（50℃）		12.79	16.31	1.88	0.00681	0.00868	0.00100	PASS
Extreme（40℃）		8.80	8.70	16.71	0.00468	0.00463	0.00889	PASS
Extreme（30℃）		1.65	2.71	2.26	0.00088	0.00144	0.00120	PASS
Extreme（20℃）		8.55	17.36	12.80	0.00455	0.00923	0.00681	PASS
Extreme（10℃）		16.46	5.29	11.68	0.00875	0.00281	0.00621	PASS
Extreme（0℃）		7.84	4.05	9.04	0.00417	0.00216	0.00481	PASS
Extreme（-10℃）		17.14	15.13	5.07	0.00912	0.00805	0.00270	PASS
Extreme（-20℃）		17.92	10.18	12.40	0.00953	0.00541	0.00659	PASS
Extreme（-30℃）		6.26	13.46	5.85	0.00333	0.00716	0.00311	PASS
25℃	LV	1.16	7.85	15.45	0.00061	0.00418	0.00822	PASS
	HV	14.61	16.65	12.70	0.00777	0.00885	0.00676	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Normal（25℃）	Normal	1.09	1.46	12.16	0.00058	0.00078	0.00647	PASS
Extreme（55℃）		1.86	10.20	5.49	0.00099	0.00543	0.00292	PASS
Extreme（50℃）		5.10	17.37	11.36	0.00271	0.00924	0.00604	PASS
Extreme（40℃）		6.64	5.52	3.20	0.00353	0.00294	0.00170	PASS
Extreme（30℃）		2.63	11.04	2.46	0.00140	0.00587	0.00131	PASS
Extreme（20℃）		12.23	12.78	1.09	0.00651	0.00680	0.00058	PASS
Extreme（10℃）		6.55	11.30	13.70	0.00349	0.00601	0.00728	PASS
Extreme（0℃）		5.66	1.20	15.03	0.00301	0.00064	0.00800	PASS
Extreme（-10℃）		14.17	9.83	9.73	0.00754	0.00523	0.00518	PASS
Extreme（-20℃）		14.41	12.69	2.68	0.00767	0.00675	0.00142	PASS
Extreme（-30℃）		6.90	6.77	9.81	0.00367	0.00360	0.00522	PASS
25℃	LV	13.58	1.86	5.77	0.00722	0.00099	0.00307	PASS
	HV	6.99	11.80	11.88	0.00372	0.00627	0.00632	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability（ppm）	Frequency Stability（ppm）	Frequency Stability（ppm）	Verdict
BANDWIDTH	10MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal（25℃）	Normal	3.05	14.54	4.65	0.00162	0.00773	0.00248	PASS
Extreme（55℃）		9.20	5.22	15.10	0.00489	0.00278	0.00803	PASS
Extreme（50℃）		7.75	13.29	14.04	0.00412	0.00707	0.00747	PASS
Extreme（40℃）		2.99	14.32	3.69	0.00159	0.00762	0.00196	PASS
Extreme（30℃）		11.39	10.10	9.84	0.00606	0.00537	0.00523	PASS
Extreme（20℃）		10.17	17.13	14.68	0.00541	0.00911	0.00781	PASS
Extreme（10℃）		10.47	8.59	5.14	0.00557	0.00457	0.00274	PASS
Extreme（0℃）		3.44	5.10	14.42	0.00183	0.00271	0.00767	PASS
Extreme（-10℃）		10.24	15.39	15.27	0.00545	0.00819	0.00812	PASS
Extreme（-20℃）		10.60	13.09	9.84	0.00564	0.00696	0.00523	PASS
Extreme（-30℃）		11.18	9.76	17.72	0.00594	0.00519	0.00943	PASS
25℃	LV	15.75	7.48	12.86	0.00838	0.00398	0.00684	PASS
	HV	4.25	4.75	14.17	0.00226	0.00253	0.00754	PASS

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5.6. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.
The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.
RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),
RBW is set to 10 kHz (0.15 MHz~ 30 MHz)
RBW is set to 100 kHz (30MHz~1000 MHz)
RBW is set to 1000 kHz (above 1000MHz)
The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

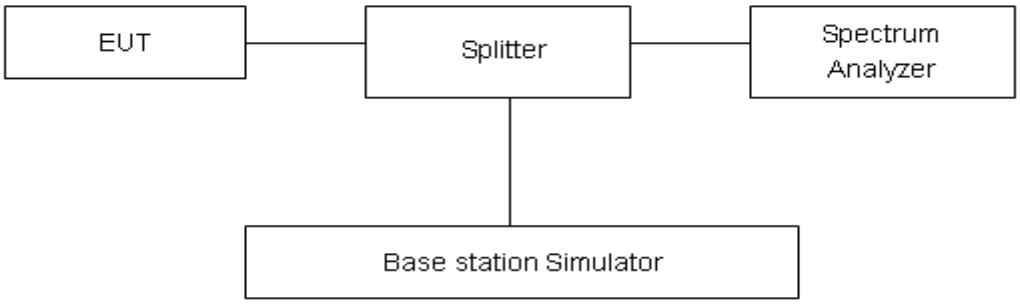

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor *k* = 1.96.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

GSM 850 CH-Low 9kHz ~ 9GHz

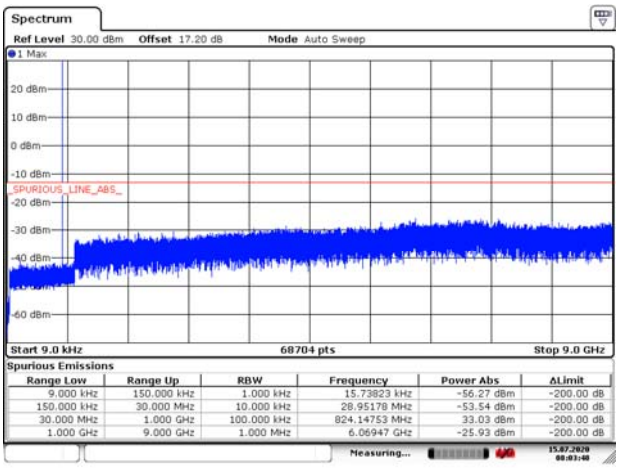

GPRS 850 CH-Low 9kHz ~ 9GHz

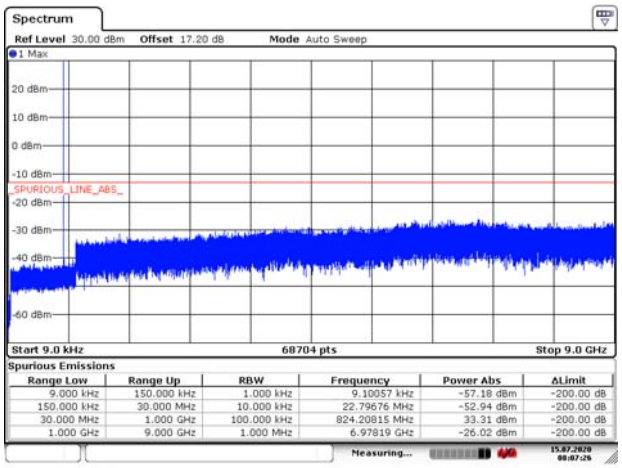

GSM 850 CH- Middle 9kHz ~ 9GHz

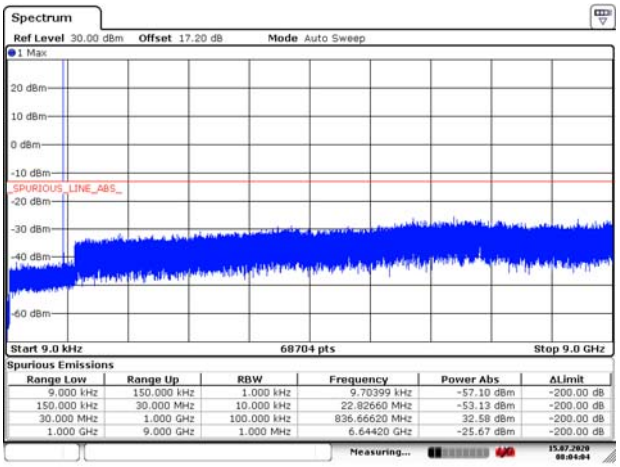

GPRS 850 CH- Middle 9kHz ~ 9GHz

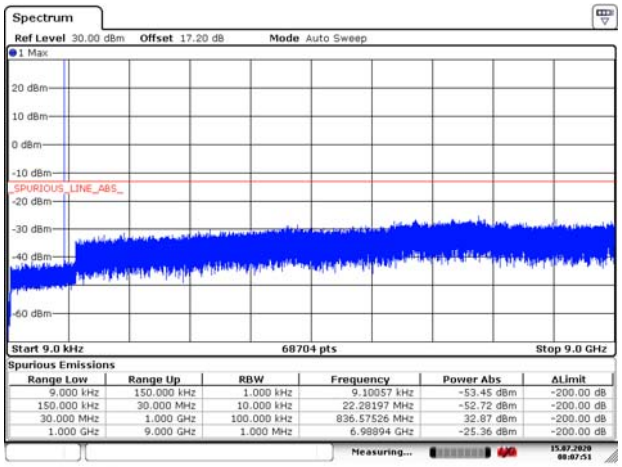

GSM 850 CH-High 9kHz ~ 9GHz

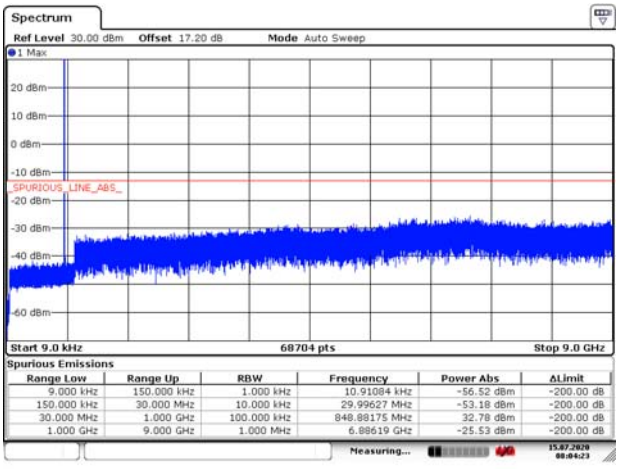

GPRS 850 CH-High 9kHz ~ 9GHz

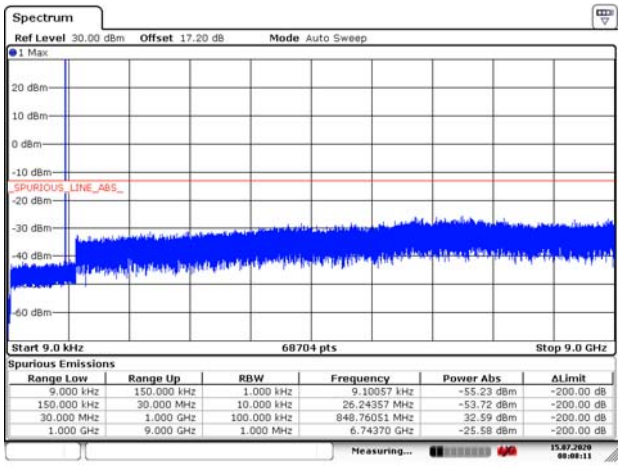

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

EGPRS 850 CH-Low 9kHz ~ 9GHz

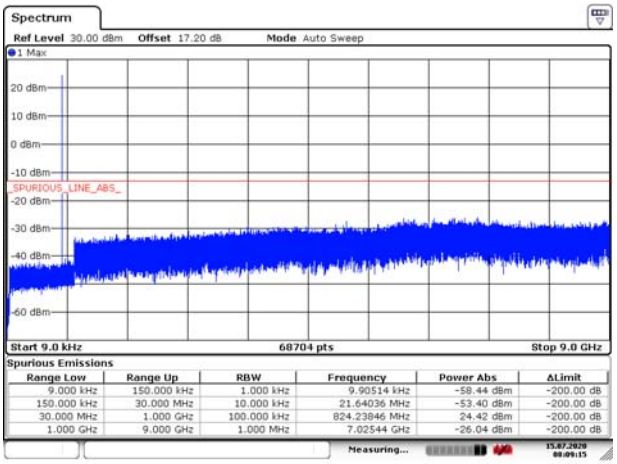

WCDMA BAND V CH-Low 9kHz ~ 9GHz

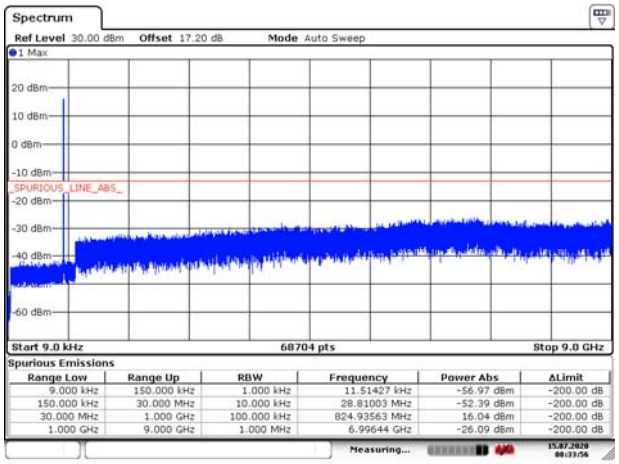

EGPRS 850 CH- Middle 9kHz ~ 9GHz

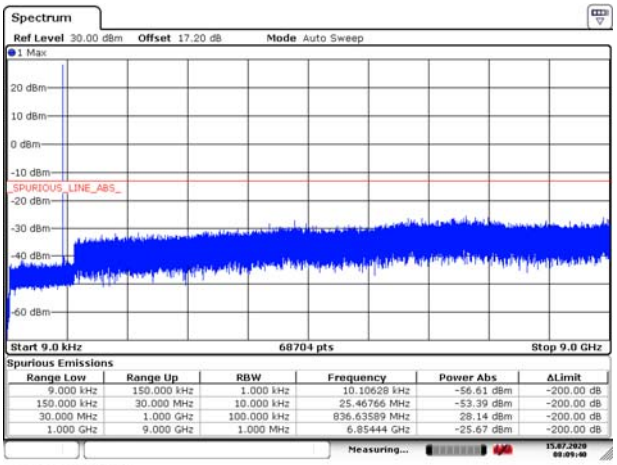

WCDMA BAND V CH- Middle 9kHz ~ 9GHz

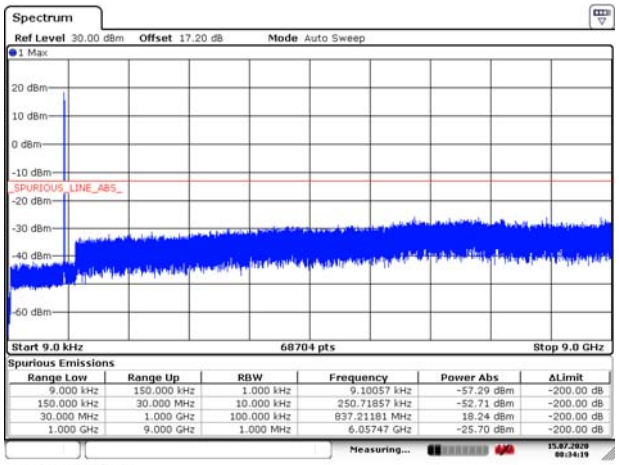

EGPRS 850 CH-High 9kHz ~ 9GHz

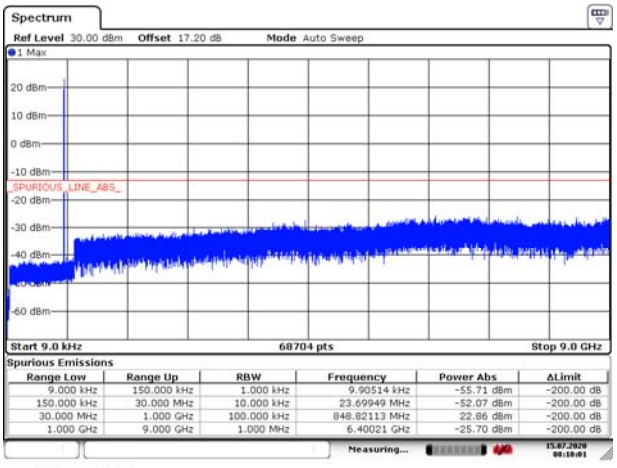

WCDMA BAND V CH-High 9kHz ~ 9GHz

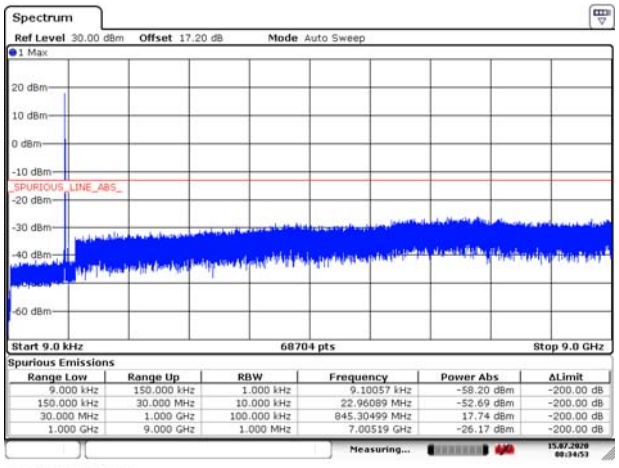

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 1.4MHz CH-Low 9kHz~10GHz

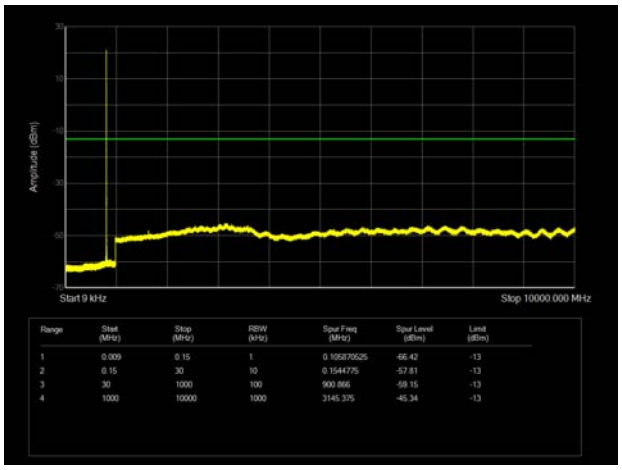

LTE Band 5 3MHz CH-Low 9kHz~10GHz

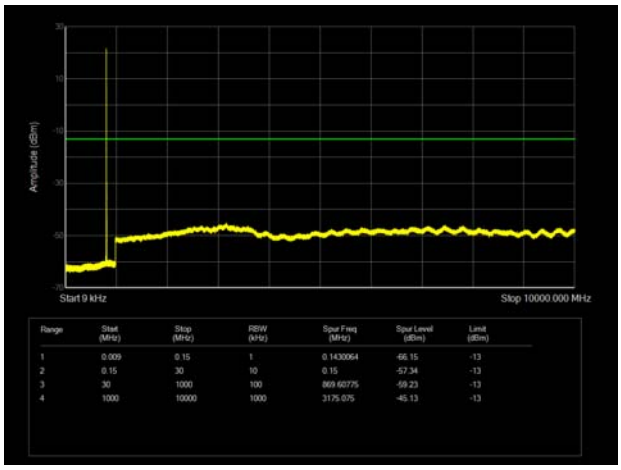

LTE Band 5 1.4MHz CH-Middle 9kHz~10GHz

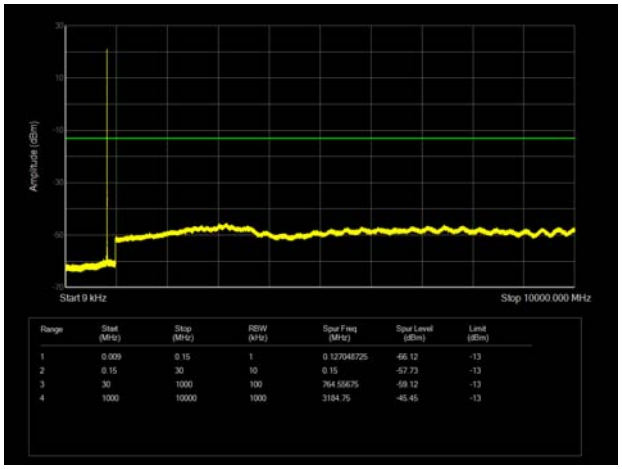

LTE Band 5 3MHz CH-Middle 9kHz~10GHz

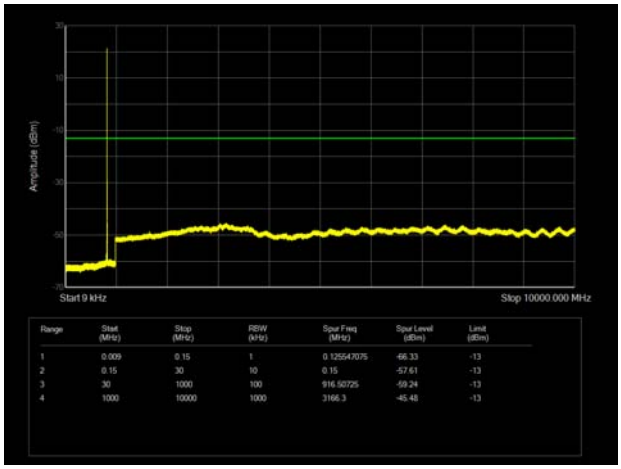

LTE Band 5 1.4MHz CH-High 9kHz~10GHz

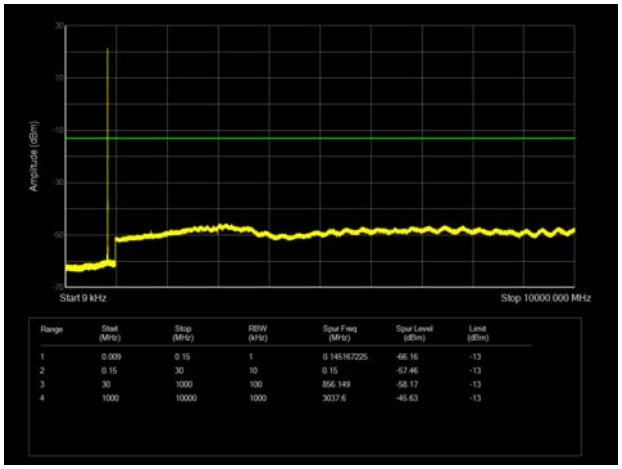

LTE Band 5 3MHz CH-High 9kHz~10GHz

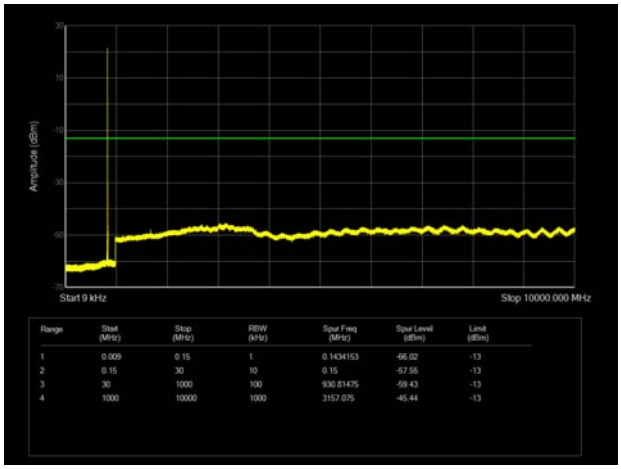

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 5MHz CH-Low 9kHz~10GHz

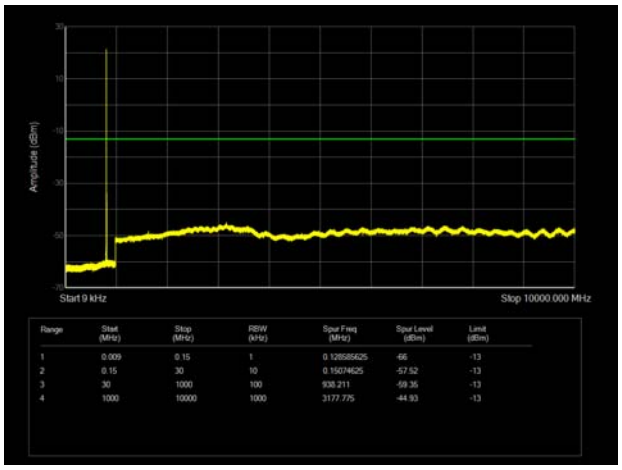

LTE Band 5 10MHz CH-Low 9kHz~10GHz

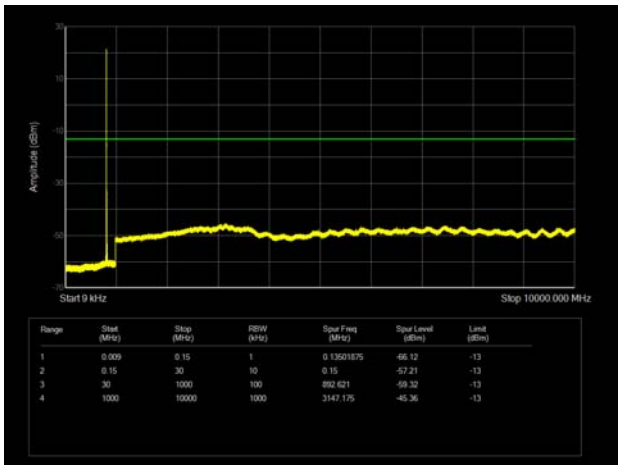

LTE Band 5 5MHz CH-Middle 9kHz~10GHz

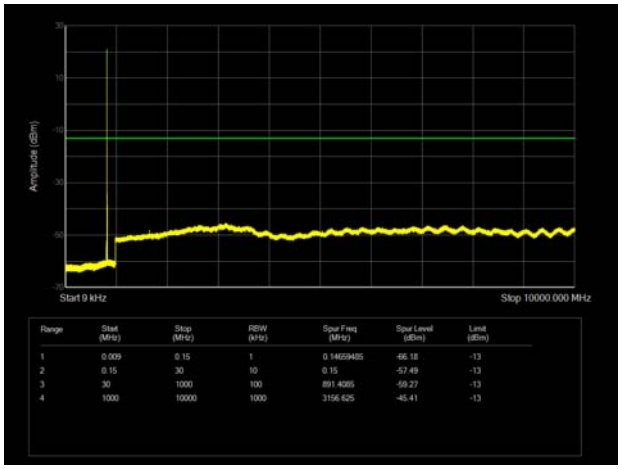

LTE Band 5 10MHz CH-Middle 9kHz~10GHz

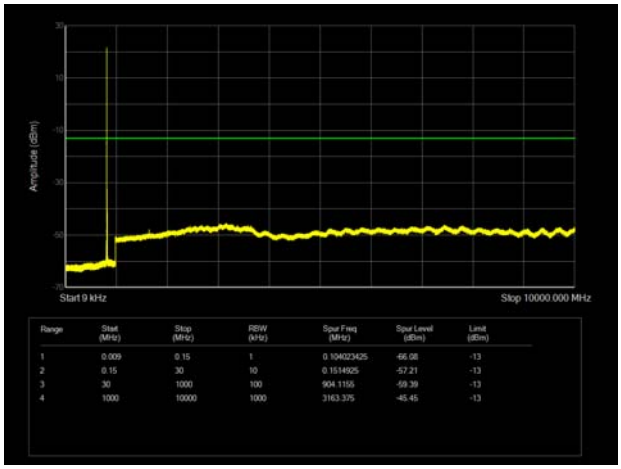

LTE Band 5 5MHz CH-High 9kHz~10GHz

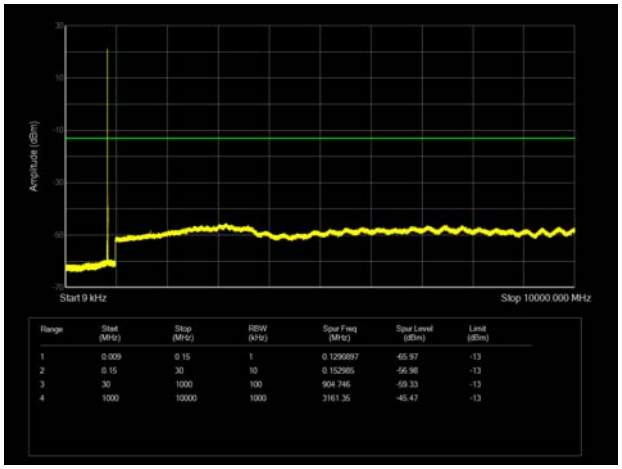

LTE Band 5 10MHz CH-High 9kHz~10GHz

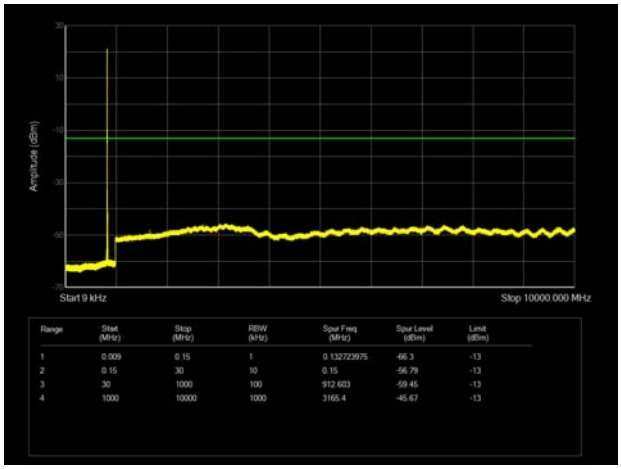

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

9KHz ~ 30MHz

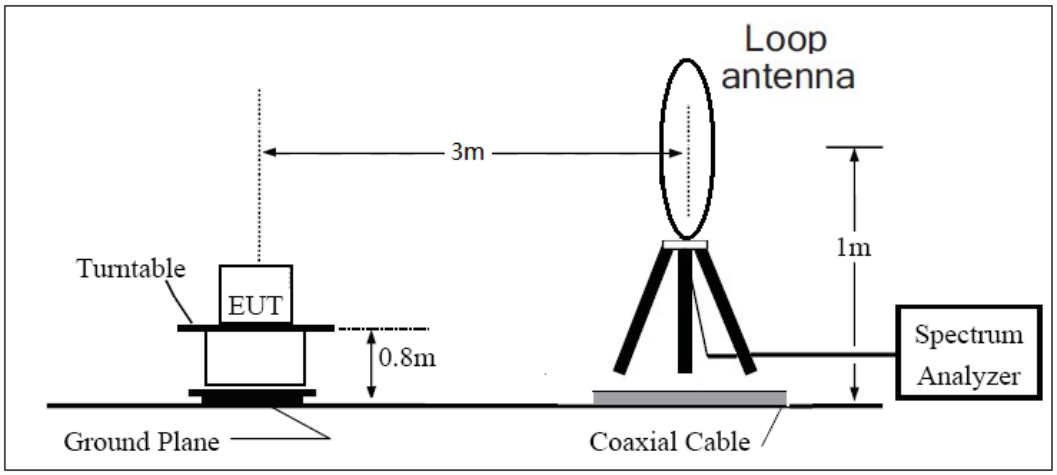

30MHz ~ 1GHz

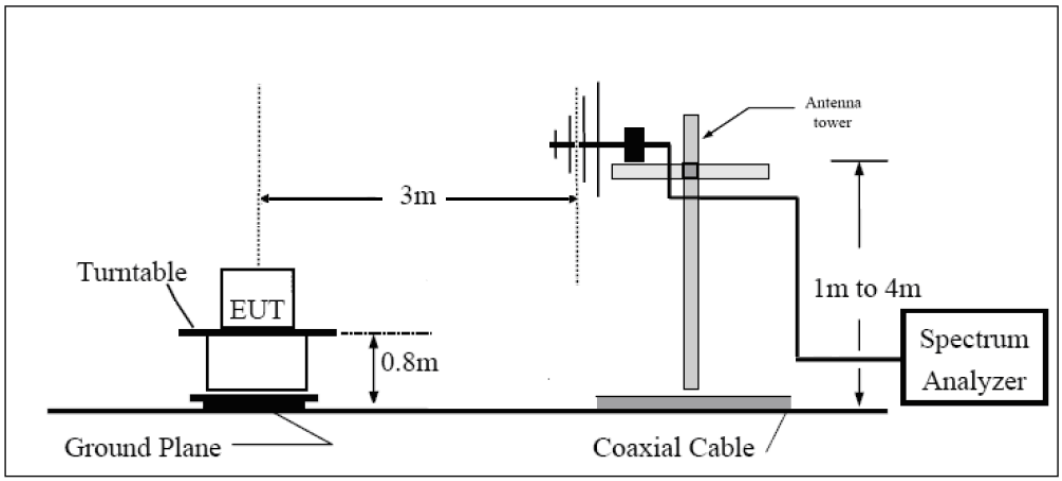

Above 1GHz

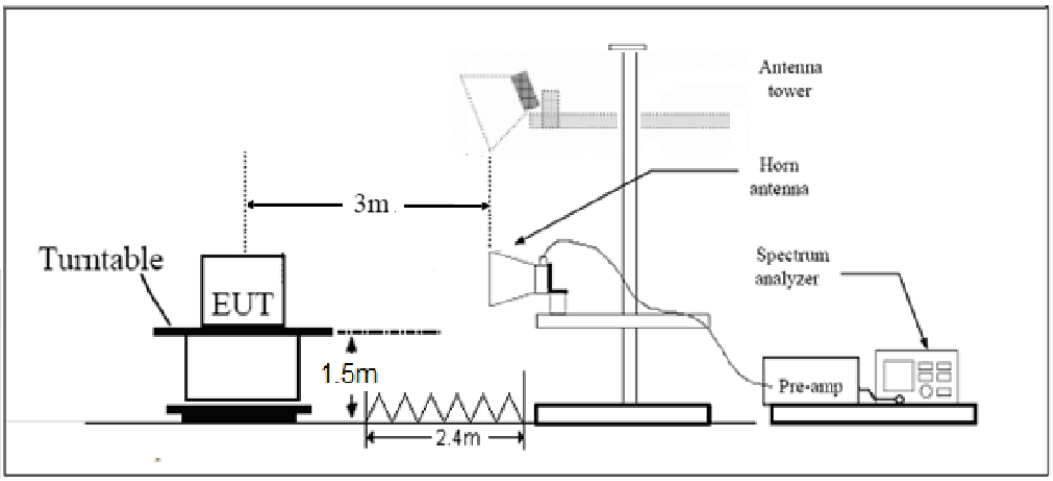

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95％ confidence level for the normal distribution is with the coverage factor *k* = 1.96, *U*= 3.55 dB.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1672.9	-60.09	2.00	10.75	Horizontal	-53.49	-13.00	40.49	0
3	2509.8	-40.64	2.51	11.05	Horizontal	-34.25	-13.00	21.25	135
4	3346.4	-58.13	4.20	11.15	Horizontal	-53.33	-13.00	40.33	45
5	4183.0	-55.25	5.20	11.15	Horizontal	-51.45	-13.00	38.45	90
6	5019.6	-54.92	5.50	11.95	Horizontal	-50.62	-13.00	37.62	315
7	5856.2	-57.50	5.70	13.55	Horizontal	-51.80	-13.00	38.80	270
8	6692.8	-57.42	6.30	13.75	Horizontal	-52.12	-13.00	39.12	45
9	7529.4	-53.59	6.80	13.85	Horizontal	-48.69	-13.00	35.69	45
10	8366.0	-55.03	6.90	14.25	Horizontal	-49.83	-13.00	36.83	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.4	-67.93	2.00	10.75	Horizontal	-61.33	-13.00	48.33	45
3	2509.1	-63.16	2.51	11.05	Horizontal	-56.77	-13.00	43.77	135
4	3346.4	-58.15	4.20	11.15	Horizontal	-53.35	-13.00	40.35	90
5	4183.0	-57.04	5.20	11.15	Horizontal	-53.24	-13.00	40.24	0
6	5019.6	-55.69	5.50	11.95	Horizontal	-51.39	-13.00	38.39	315
7	5856.2	-57.51	5.70	13.55	Horizontal	-51.81	-13.00	38.81	270
8	6692.8	-58.15	6.30	13.75	Horizontal	-52.85	-13.00	39.85	45
9	7529.4	-53.87	6.80	13.85	Horizontal	-48.97	-13.00	35.97	180
10	8366.0	-54.13	6.90	14.25	Horizontal	-48.93	-13.00	35.93	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-64.21	2.00	10.75	Horizontal	-57.61	-13.00	44.61	0
3	2509.5	-48.30	2.51	11.05	Horizontal	-41.91	-13.00	28.91	180
4	3346.0	-57.56	4.20	11.15	Horizontal	-52.76	-13.00	39.76	45
5	4182.5	-54.29	5.20	11.15	Horizontal	-50.49	-13.00	37.49	315
6	5019.0	-54.11	5.50	11.95	Horizontal	-49.81	-13.00	36.81	0
7	5855.5	-55.89	5.70	13.55	Horizontal	-50.19	-13.00	37.19	180
8	6692.0	-56.52	6.30	13.75	Horizontal	-51.22	-13.00	38.22	0
9	7528.5	-54.81	6.80	13.85	Horizontal	-49.91	-13.00	36.91	45
10	8365.0	-52.37	6.90	14.25	Horizontal	-47.17	-13.00	34.17	0
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									

LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.6	-63.86	2.00	10.75	Horizontal	-57.26	-13.00	44.26	45
3	2503.3	-49.64	2.51	11.05	Horizontal	-43.25	-13.00	30.25	0
4	3466.2	-55.63	4.20	11.15	Horizontal	-50.83	-13.00	37.83	315
5	4215.9	-53.30	5.20	11.15	Horizontal	-49.50	-13.00	36.50	180
6	5165.6	-52.35	5.50	11.95	Horizontal	-48.05	-13.00	35.05	0
7	5815.3	-57.16	5.70	13.55	Horizontal	-51.46	-13.00	38.46	315
8	6765.0	-56.44	6.30	13.75	Horizontal	-51.14	-13.00	38.14	180
9	7614.7	-51.46	6.80	13.85	Horizontal	-46.56	-13.00	33.56	270
10	8464.4	-52.40	6.90	14.25	Horizontal	-47.20	-13.00	34.20	225
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1664.4	-62.80	2.00	10.75	Horizontal	-56.20	-13.00	43.20	315
3	2496.6	-45.57	2.51	11.05	Horizontal	-39.18	-13.00	26.18	0
4	3346.0	-56.87	4.20	11.15	Horizontal	-52.07	-13.00	39.07	0
5	4182.5	-54.24	5.20	11.15	Horizontal	-50.44	-13.00	37.44	45
6	5019.0	-54.59	5.50	11.95	Horizontal	-50.29	-13.00	37.29	90
7	5855.5	-56.17	5.70	13.55	Horizontal	-50.47	-13.00	37.47	180
8	6692.0	-54.81	6.30	13.75	Horizontal	-49.51	-13.00	36.51	45
9	7528.5	-52.26	6.80	13.85	Horizontal	-47.36	-13.00	34.36	0
10	8365.0	-52.34	6.90	14.25	Horizontal	-47.14	-13.00	34.14	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2020-05-27	2021-05-26
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preampflier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/
Wireless Test Set	StarPoint	SP8315	SP8315-1202	2020-05-18	2021-05-17
Wireless Test Set	StarPoint	SP8315	SP8315-1203	2020-05-18	2021-05-17

********END OF REPORT ********

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.