



FCC Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : POCO
MODEL NAME : 2602BPC18G
FCC ID : 2AFZZPC18G
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Nov. 24, 2025 ~ Dec. 06, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	7
1.6. Test Location	8
1.7. Test Software	8
1.8. Applicable Standards	8
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1. Test Mode	9
2.2. Connection Diagram of Test System	11
2.3. Support Unit used in test configuration and system	11
2.4. EUT Operation Test Setup	12
3. TEST RESULT	13
3.1. Test of AC Conducted Emission Measurement	13
3.2. Test of Radiated Emission Measurement	17
4. LIST OF MEASURING EQUIPMENT	22
5. MEASUREMENT UNCERTAINTY	23
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC5N1302	Rev. 01	Initial issue of report	Jan. 12, 2026

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 7.37 dB at 0.152 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 5.75 dB at 60.31 MHz for Quasi-Peak

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1. Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2. Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	POCO
Model Name	2602BPC18G
FCC ID	2AFZZPC18G
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 2.4GHz 802.11be EHT20/EHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 5GHz 802.11be EHT20/EHT40/EHT80/EHT160 Bluetooth BR/EDR/LE GNSS/NFC
IMEI Code	Conduction: 860534080021543/860534080021550 for Sample 1 860534080021782/860534080021790 for Sample 2 Radiation: 860534080020925 for Sample 1 860534080023986/860534080023994 for Sample 2
HW Version	13510P10U
SW Version	Xiaomi HyperOS 3.0
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two type of EUT. The difference between them are memory capacity and screen. The sample 1 is 12+256G memory + screen 1, the sample 2 is 12+512G memory + screen 2. According to the difference, we chose sample 1 to perform full test and sample 2 to verify the difference of sample 1.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 26 : 814 MHz ~ 849 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz LTE Band 48 : 3550 MHz ~ 3700 MHz LTE Band 66 : 1710 MHz ~ 1780 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n77 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz; 5G NR n78 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz; 802.11b/g/n/ax/be: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax/be: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band IV : 2110 MHz ~ 2155 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 26 : 859 MHz ~ 894 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz LTE Band 48 : 3550 MHz ~ 3700 MHz LTE Band 66 : 2110 MHz~ 2200 MHz 5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz



	5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 2110 MHz~ 2200 MHz 5G NR n77 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz; 5G NR n78 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz; 802.11b/g/n/ax/be: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax/be: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz, 1164 MHz ~ 1215 MHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna NFC: Loop Antenna
Type of Modulation	GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM / 256QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH07-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Low) + ANT 0 + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + USB Cable1 (Charging from Adapter 1) + SIM 1 for Sample 1
	Mode 2: WCDMA band V Rx(Middle) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Battery + USB Cable2 (Charging from Adapter 2) + SIM 2 for Sample 1
	Mode 3: LTE Band 26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable3 (Charging from Adapter 2) + SIM 2 for Sample 1
	Mode 4: n5 Rx(Middle) + ANT 0 + Bluetooth Idle + WLAN (2.4G) Idle + NFC On + Battery + USB Cable4 (Charging from Adapter 2) + SIM2 for Sample 1
	Mode 5: N26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 1(EUT (eMMC) USB Data Link to NB) + SIM2 for Sample 1
	Mode 6: LTE band 5 Rx(Low) + ANT 0 + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 2 for Sample 1
	Mode 7: N26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 2(EUT (eMMC) USB Data Link to NB) + SIM 2 for Sample 2
	Mode 8: N26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 3(EUT (eMMC) USB Data Link to NB) + SIM 2 for Sample 1
	Mode 9: N26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 4(EUT (eMMC) USB Data Link to NB) + SIM 2 for Sample 1

Radiated Emissions	Mode 1: GSM 850 Rx(Low) + ANT 0 + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + USB Cable 1(Charging from Adapter 1) + SIM 1 for Sample 1 Mode 2: WCDMA band V Rx(Middle) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Battery + USB Cable 2(Charging from Adapter 2) + SIM 2 for Sample 1 Mode 3: LTE Band 26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable 3(Charging from Adapter 2) + SIM2 for Sample 1 Mode 4: n5 Rx(Middle) + ANT 0 + Bluetooth Idle + WLAN (2.4G) Idle + NFC On + Battery + USB Cable 4(Charging from Adapter 2) + SIM 2 for Sample 1 Mode 5: LTE Band 26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 1(EUT (eMMC) USB Data Link to NB) + SIM2 for Sample 1 Mode 6: LTE band 5 Rx(Low) + ANT 0 + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar)+ Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 2 for Sample 1 Mode 7: LTE Band 26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable(Typec to Typec)(EUT Charging to other phones) + SIM 2 for Sample 1 Mode 8: LTE Band 26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + SIM2 for Sample 1 Mode 9: LTE Band 26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable2 (NB USB Data Link to EUT (eMMC)) + SIM2 for Sample 2 Mode 10 : LTE Band 26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) +Battery + USB Cable3 (NB USB Data Link to EUT (eMMC))+ SIM 2 for Sample 2 Mode 11 : LTE Band 26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable4 (NB USB Data Link to EUT (eMMC)) + SIM2 for Sample 2
Remark: 1. The worst case of AC is mode 5; only the test data of this mode is reported. 2. The worst case of RE is mode 9; only the test data of this mode is reported. 3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC. 4. Pre-scanned Low/Middle/High channel for GSM 850/WCDMA Band V/LTE Band 5/26 and 5G NR n5/n26, the worst channel was recorded in this report.	

2.2.Connection Diagram of Test System

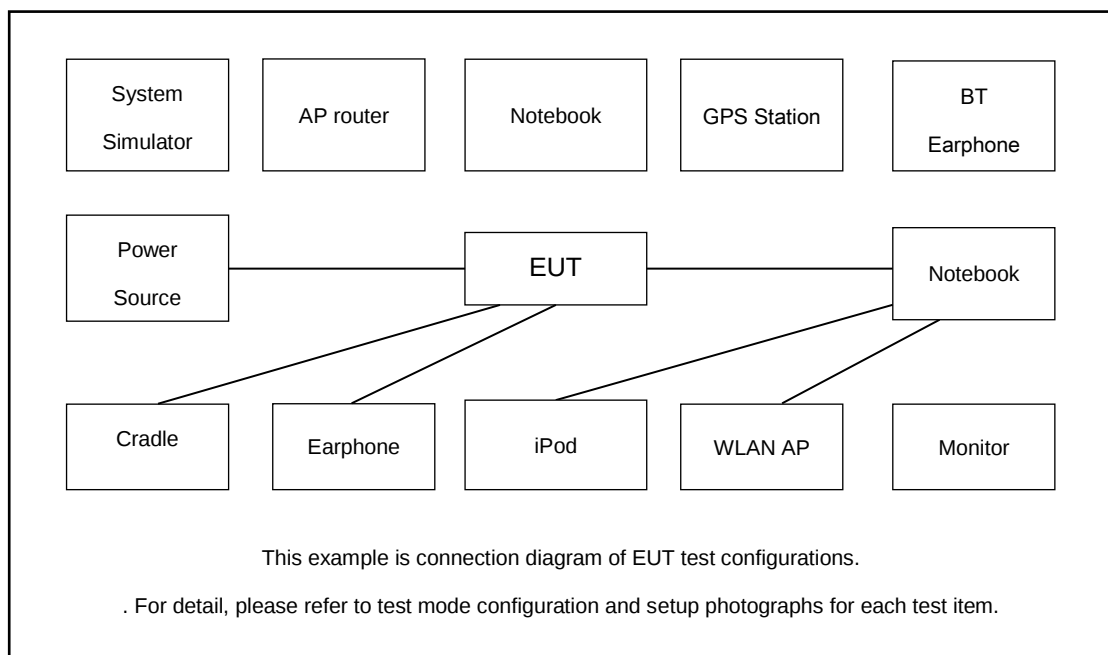

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	5GNR Base Station	Anritus	MT8000A	N/A	N/A	Unshielded,1.8m
3.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
5.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
6.	Vector Signal Generator	R&S	SMBV100A	258305	N/A	N/A
7.	Hard Disk	Lenovo	F310	DoC	N/A	Shielded, 1.2m
8.	NFC Card	N/A	N/A	N/A	N/A	N/A
9.	Mobile Phone	N/A	N/A	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE or 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
5. Turn on NFC function

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos	Temperature :	25.3~26.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

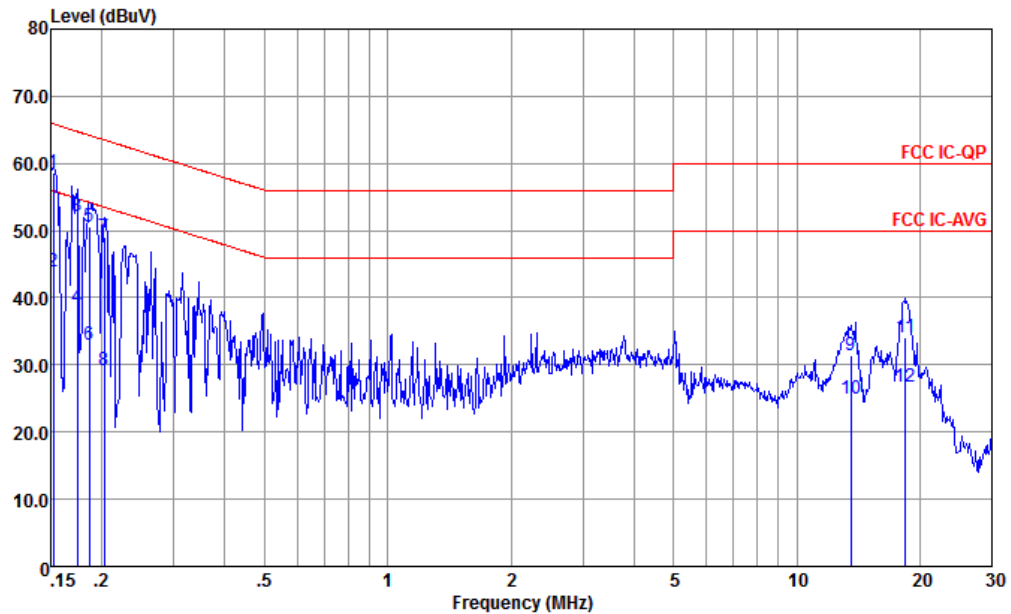


Site : CO01-KS
Condition : FCC IC-QP LISN-060105-L 24+80 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	58.50	-7.37	65.87	47.80	0.23	10.47	QP
2	0.152	44.00	-11.87	55.87	33.30	0.23	10.47	Average
3	0.174	52.23	-12.54	64.77	41.50	0.25	10.48	QP
4	0.174	38.53	-16.24	54.77	27.80	0.25	10.48	Average
5	0.186	50.63	-13.57	64.20	39.90	0.25	10.48	QP
6	0.186	32.93	-21.27	54.20	22.20	0.25	10.48	Average
7	0.203	48.93	-14.56	63.49	38.20	0.25	10.48	QP
8	0.203	29.23	-24.26	53.49	18.50	0.25	10.48	Average
9	13.551	31.51	-28.49	60.00	20.20	0.74	10.57	QP
10	13.551	25.01	-24.99	50.00	13.70	0.74	10.57	Average
11	18.426	34.08	-25.92	60.00	22.50	1.06	10.52	QP
12	18.426	26.78	-23.22	50.00	15.20	1.06	10.52	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

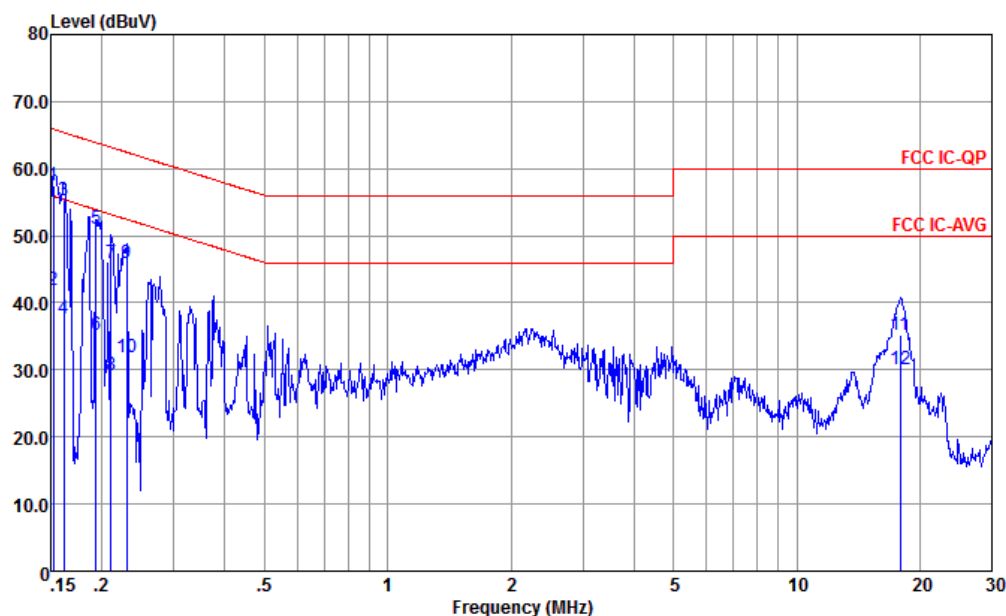

Site : CO01-KS
Condition : FCC IC-QP LISN-060105-N 24+80 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	57.60	-8.27	65.87	46.90	0.23	10.47	QP
2	0.152	41.90	-13.97	55.87	31.20	0.23	10.47	Average
3	0.162	55.21	-10.17	65.38	44.50	0.24	10.47	QP
4	0.162	37.61	-17.77	55.38	26.90	0.24	10.47	Average
5	0.193	50.92	-12.97	63.89	40.20	0.24	10.48	QP
6	0.193	35.22	-18.67	53.89	24.50	0.24	10.48	Average
7	0.211	45.96	-17.22	63.18	35.23	0.25	10.48	QP
8	0.211	29.23	-23.95	53.18	18.50	0.25	10.48	Average
9	0.230	45.94	-16.50	62.44	35.20	0.26	10.48	QP
10	0.230	31.94	-20.50	52.44	21.20	0.26	10.48	Average
11	17.944	35.16	-24.84	60.00	23.60	1.03	10.53	QP
12	17.944	30.06	-19.94	50.00	18.50	1.03	10.53	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

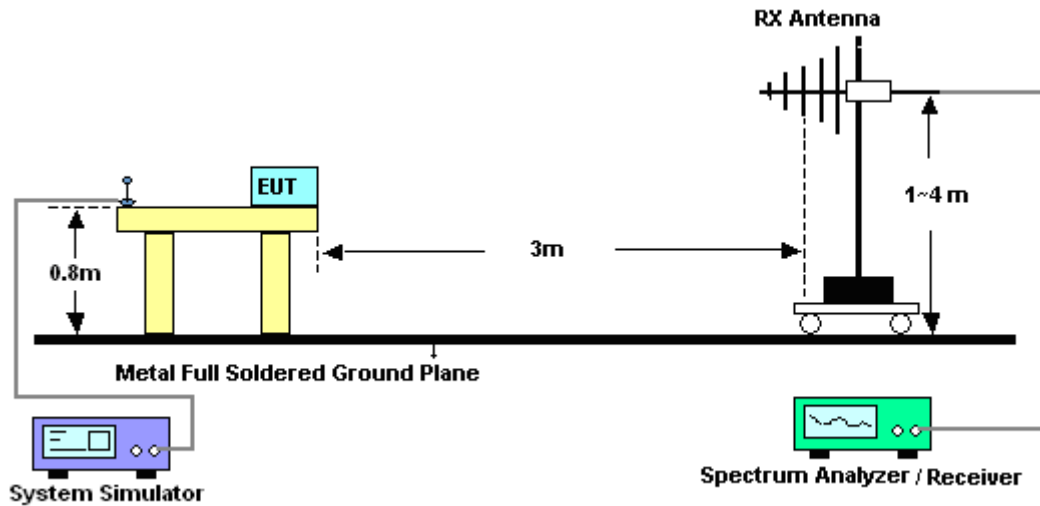


For radiated emissions above 1GHz

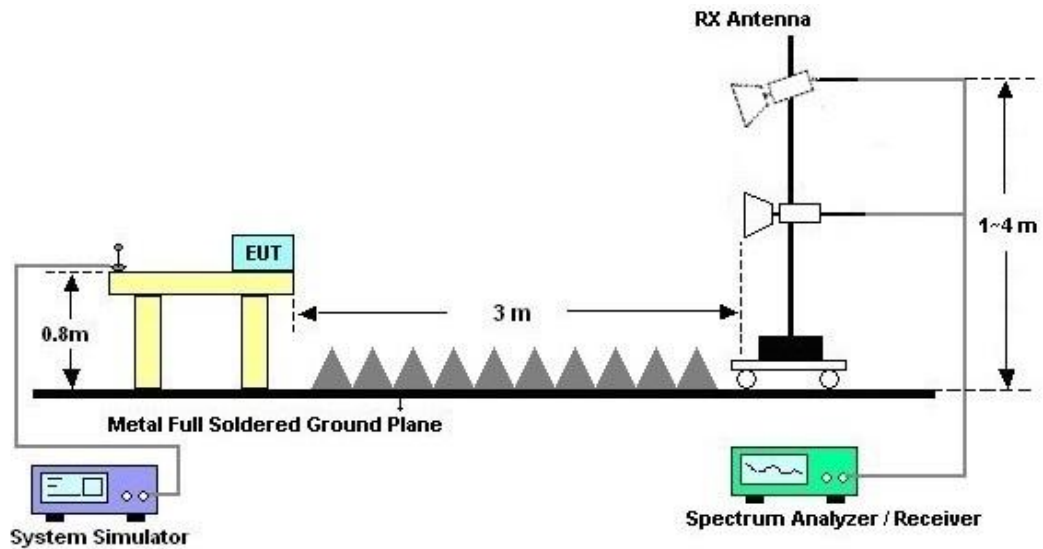

3.2.5. Test Result of Radiated Emission

Test Engineer :	Levi Zhuo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

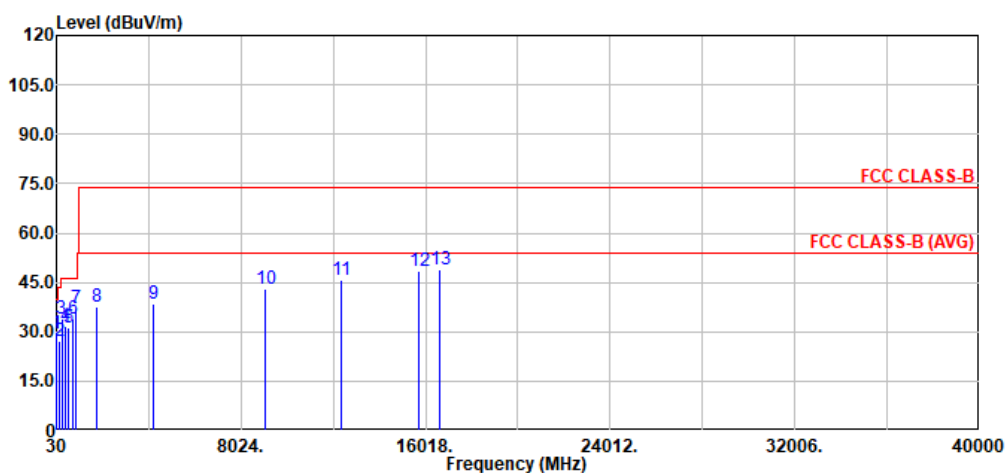


Site : 03CH07-KS
Condition: FCC CLASS-B 3m 3117-00240132 Horizontal

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	60.31	29.46	40.00	-10.54	48.72	11.92	0.89	32.07	---	---	Peak
2	184.96	27.13	43.50	-16.37	42.58	14.71	1.90	32.06	---	---	Peak
3	257.71	34.07	46.00	-11.93	43.99	19.88	2.25	32.05	---	---	Peak
4	391.69	31.53	46.00	-14.47	39.32	21.55	2.80	32.14	---	---	Peak
5	560.71	31.13	46.00	-14.87	33.90	26.21	3.33	32.31	---	---	Peak
6	732.16	33.98	46.00	-12.02	34.46	27.96	3.81	32.25	---	---	Peak
7	894.03	36.93			34.76	29.36	4.23	31.42	---	---	Peak
8	1752.25	37.54	74.00	-36.46	66.43	29.64	5.99	64.52	---	---	Peak
9	4217.25	38.55	74.00	-35.45	60.57	34.69	9.29	66.00	---	---	Peak
10	9100.50	42.89	74.00	-31.11	60.09	36.80	14.12	68.12	---	---	Peak
11	12373.00	45.93	74.00	-28.07	56.28	39.10	16.65	66.10	---	---	Peak
12	15734.75	48.25	74.00	-25.75	54.38	40.63	19.32	66.08	---	---	Peak
13	16623.00	48.74	74.00	-25.26	53.59	42.02	19.70	66.57	---	---	Peak



Test Engineer :	Levi Zhuo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

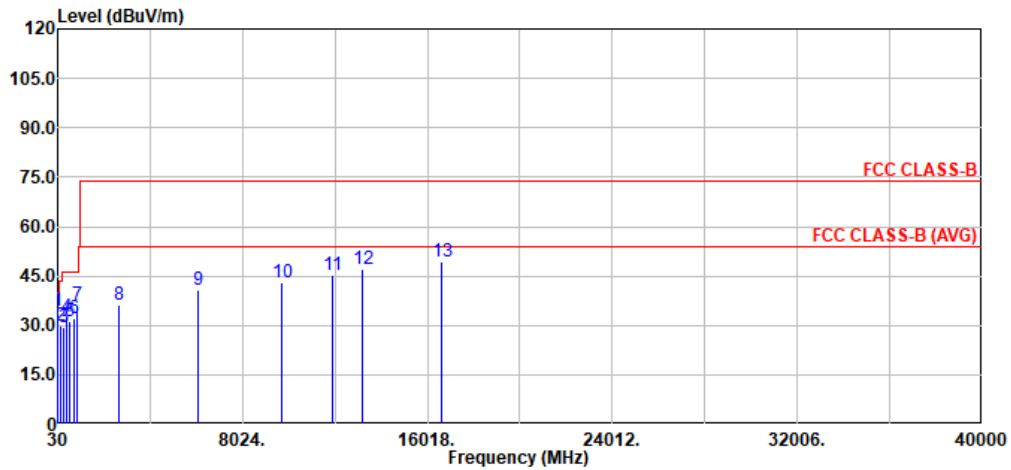

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	60.31	34.25	40.00	-5.75	53.51	11.92	0.89	32.07	200	31	QP
2	143.98	29.70	43.50	-13.80	42.74	17.32	1.67	32.03	---	---	Peak
3	263.04	29.52	46.00	-16.48	39.10	20.21	2.27	32.06	---	---	Peak
4	420.30	32.76	46.00	-13.24	39.46	22.57	2.89	32.16	---	---	Peak
5	561.80	31.23	46.00	-14.77	33.98	26.22	3.34	32.31	---	---	Peak
6	722.58	32.17	46.00	-13.83	33.19	27.47	3.79	32.28	---	---	Peak
7	891.85	36.26			34.10	29.36	4.23	31.43	---	---	Peak
8	2649.00	36.41	74.00	-37.59	61.21	33.00	7.40	65.20	---	---	Peak
9	6091.50	40.94	74.00	-33.06	60.37	35.62	11.44	66.49	---	---	Peak
10	9704.00	43.14	74.00	-30.86	59.27	37.20	14.75	68.08	---	---	Peak
11	11892.75	45.33	74.00	-28.67	56.26	38.99	16.07	65.99	---	---	Peak
12	13214.50	47.03	74.00	-26.97	54.88	39.33	17.68	64.86	---	---	Peak
13	16640.00	49.56	74.00	-24.44	54.42	42.04	19.70	66.60	---	---	Peak

Note:

- Level(dBuV/m) = Read Level(dBuV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBuV/m) – Limit Line(dBuV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
MXE EMI Receiver	Keysight	N9038A	MY57290151	3Hz~8.4GHz	Jul. 02, 2025	Dec. 06, 2025	Jul. 01, 2026	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 10, 2025	Dec. 06, 2025	Oct. 09, 2026	Radiation (03CH07-KS)
Bilog Antenna	TESEQ	CBL 6111D	49921	30MHz~1GHz	Mar. 24, 2025	Dec. 06, 2025	Mar. 23 2026	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240132	1GHz~18GHz	Jun. 26, 2025	Dec. 06, 2025	Jun. 25, 2026	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 18, 2025	Dec. 06, 2025	Oct. 17, 2026	Radiation (03CH07-KS)
Amplifier	EM	EM18G40GGA	060737	18~40GHz	Jan. 03, 2025	Dec. 06, 2025	Jan. 02, 2026	Radiation (03CH07-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz~18Ghz	Sep. 19, 2025	Dec. 06, 2025	Sep. 18, 2026	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 02, 2025	Dec. 06, 2025	Jul. 01, 2026	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Dec. 06, 2025	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Dec. 06, 2025	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Dec. 06, 2025	NCR	Radiation (03CH07-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr 16, 2025	Nov. 24, 2025	Apr 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Jul. 03, 2025	Nov. 24, 2025	Jul. 02, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Nov. 24, 2025	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Ouhan	APW-130NYT	202201040060	AC 0V~300V,45Hz~1000Hz	Apr. 16, 2025	Nov. 24, 2025	Apr. 15, 2026	Conduction (CO01-KS)

NCR: No Calibration Required



5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	6.20 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.34 dB
---	---------

----- THE END -----