



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : POCO
MODEL NAME : 2510DPC44G
FCC ID : 2AFZZPC44G
STANDARD : 47 CFR Part 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Sep. 05, 2025 ~ Sep. 13, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum EIRP Power and Emission Designator	6
1.5 Testing Site.....	6
1.6 Test Software	7
1.7 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels.....	10
3 Conducted Test Items.....	11
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power	12
3.3 Peak-to-Average Ratio	13
3.4 EIRP	14
3.5 Occupied Bandwidth	15
3.6 Conducted Band Edge	16
3.7 Conducted Spurious Emission	17
3.8 Frequency Stability	18
4 Radiated Test Items	19
4.1 Measuring Instruments.....	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test.....	20
4.4 Radiated Spurious Emission	21
5 List of Measuring Equipment.....	22
6 Measurement Uncertainty	23
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG582814K	01	Initial issue of report	Sep. 28, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
3.3	§96.41	Peak-to-Average Ratio	Not Applicable	Not applicable for End User Devices
3.4	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not Applicable	Not applicable for End User Devices
3.5	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 12.03 dB at 14424.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	POCO
Model Name	2510DPC44G
FCC ID	2AFZZPC44G
Tx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
Rx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
SCS	30kHz
Bandwidth	10MHz / 15MHz / 20MHz / 30MHz / 40MHz
Antenna Gain	<ANT8>: 5G NR n48 : -2.5 dBi <ANT9>: 5G NR n48 : -3.4 dBi <ANT10>: 5G NR n48 : -3.0 dBi <ANT11>: 5G NR n48 : -4.5 dBi
Type of Modulation	DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)
IMEI Code	Conducted : 868972080028542/868972080028559 Radiation : 868972080026942/868972080026959
HW Version	1351P2502
SW Version	Xiaomi HyperOS 3.0
EUT Stage	Identical Prototype

Remark:

1. The maximum EIRP is calculated from max output power and antenna gain, only the maximum EIRP of Ant. 8 is shown in the report.
2. 5G NR n48 supports SA mode only.

1.4 Maximum EIRP Power and Emission Designator

5G NR n48		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3555.00~3694.98	0.1675	8M56G7D	0.1337	8M55W7D
15	3557.52~3692.50	0.1675	13M6G7D	0.1288	13M6W7D
20	3560.01~3690.00	0.1667	18M2G7D	0.1285	18M2W7D
30	3564.99~3684.99	0.1667	27M9G7D	0.0543	27M8W7D
40	3570.00~3679.98	0.1671	37M8G7D	0.0542	37M9W7D

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

Note: Test data subcontracted: Radiation test case in section 4.4 of this report

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation					RB #		Test Channel		
		5	10	15	20	30	40	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n48	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	n48	-	v	v	v	v	v		v	v				v		v	
Adjacent Channel Leakage Ratio	n48	-	v	v	v	v	v	v	v				v	v	v	v	v
Conducted Band Edge	n48	-	v	v	v	v	v	v	v				v	v	v	v	v
Conducted Spurious Emission	n48	-	v	v	v	v	v	v					v		v	v	v
E.I.R.P.	n48	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Frequency Stability	n48	-			v				v					v		v	
Radiated Spurious Emission	n48	Worst Case														v	
Remark	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All test items are based on engineering evaluation. 5. Frequency Stability : Normal Voltage = 3.83V ; Low Voltage =3.60V. ; High Voltage =4.30V																

2.2 Connection Diagram of Test System

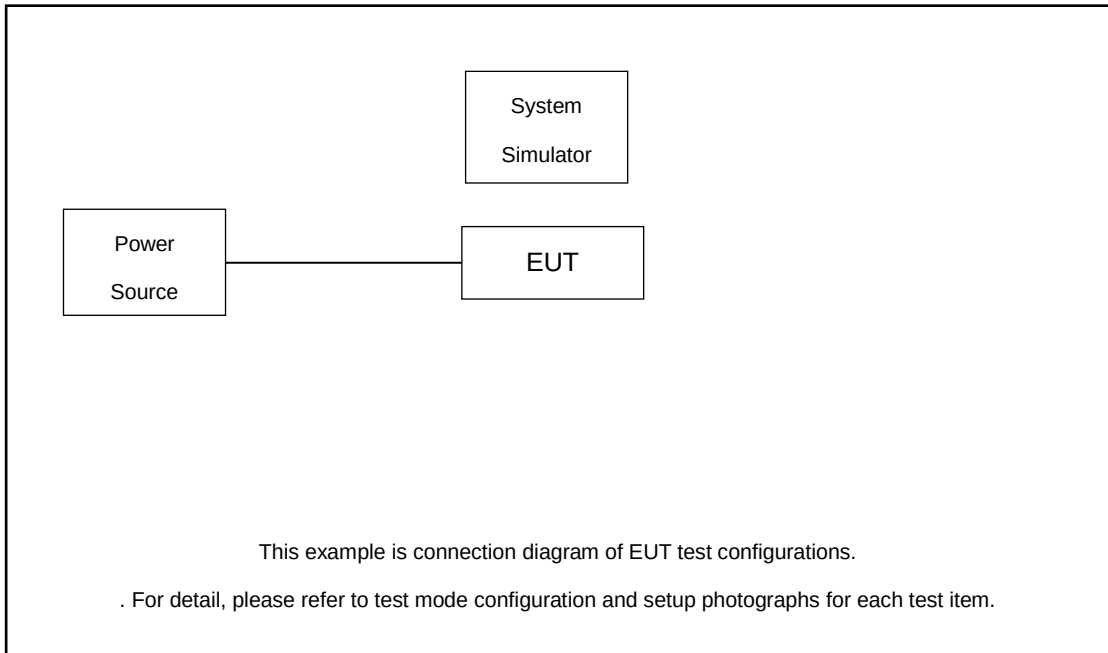

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.5 dB and 20dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 2.5 + 20 = 22.5 \text{ (dB)}
 \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
30	Channel	637666	641666	645666
	Frequency	3564.99	3624.99	3684.99
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
15	Channel	637168	641666	646166
	Frequency	3557.52	3624.99	3692.49
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power / ACLR



3.1.3 Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

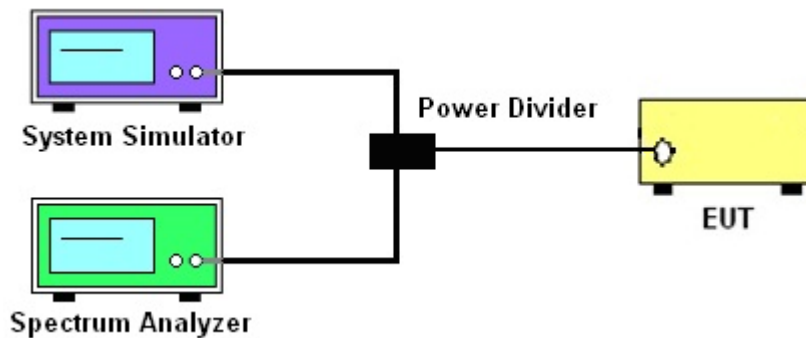

3.1.4 Frequency Stability

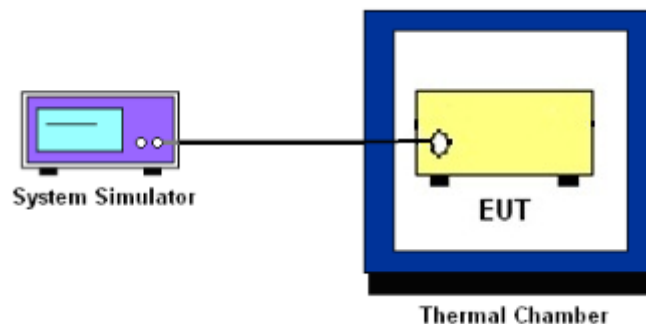

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio

3.4 EIRP

3.4.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	n/a
☐	Category A CBSD	30	20
☐	Category B CBSD	47	37

Remark:

1. The worst case EIRP shown in this section is found with NR operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for n48 (i.e. 10, 15, 20MHz)

3.4.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$$\text{EIRP} = P_T + G_T - L_C, \text{ ERP} = \text{EIRP} - 2.15, \text{ where}$$

$$P_T = \text{transmitter output power in dBm}$$

$$G_T = \text{gain of the transmitting antenna in dBi}$$

$$L_C = \text{signal attenuation in the connecting cable between the transmitter and antenna in dB}$$

3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

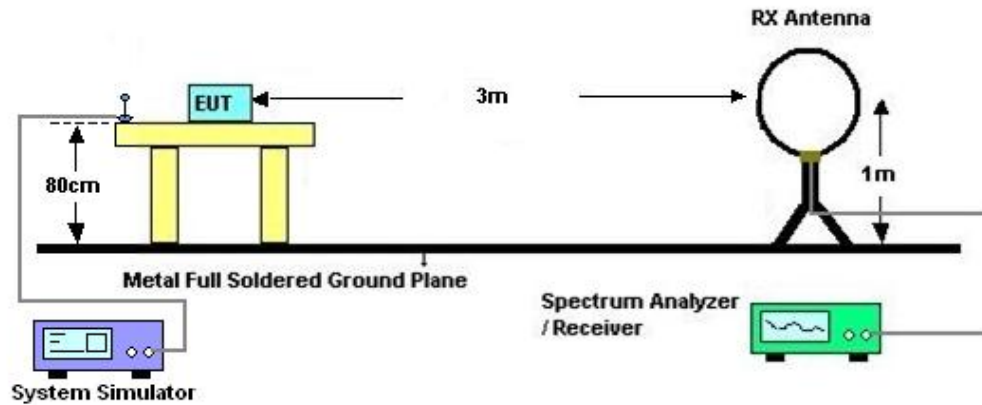

4.2.2 For radiated test from 30MHz to 1GHz

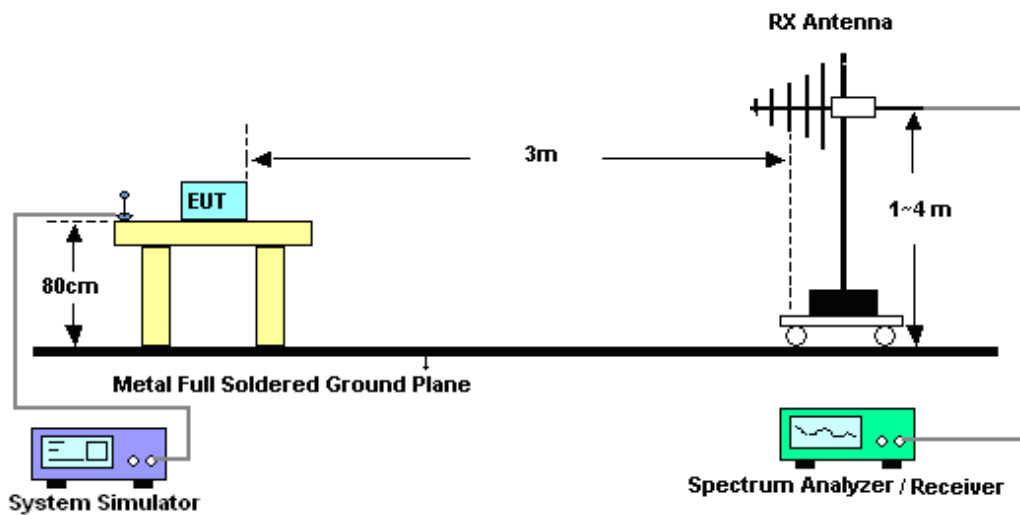

4.2.3 For radiated test above 1GHz

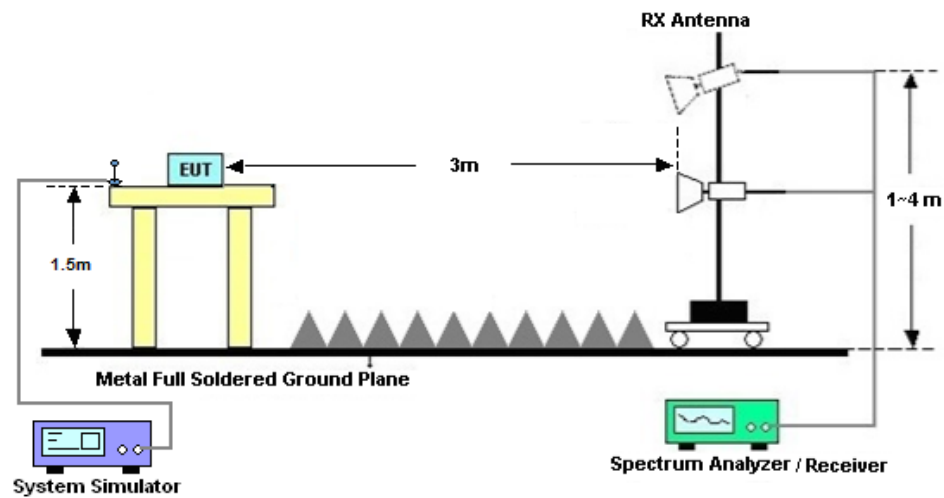

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Sep. 12, 2025~ Sep. 13, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Sep. 12, 2025~ Sep. 13, 2025	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 02, 2025	Sep. 12, 2025~ Sep. 13, 2025	Jul. 01, 2026	Conducted (TH01-KS)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Sep. 05, 2025	Jul. 02, 2026	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Sep. 05, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Sep. 05, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2025	Sep. 05, 2025	Jul. 04, 2026	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Sep. 05, 2025	Jul. 03, 2026	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 03, 2025	Sep. 05, 2025	Apr. 02, 2027	Radiation (03CH02-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	Sep. 05, 2025	Dec. 24, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 14, 2024	Sep. 05, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Sep. 05, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Sep. 05, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Sep. 05, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.00 dB
Occupied Channel Bandwidth	±0.384%
Conducted Power	±0.90 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.38 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.47dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.31dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.72dB
---	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%



FR1 N48_ANT8

Transmitter Conducted Output Power And EIRP, (G_T - L_C)=-2.5dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
48	30	10	637000	3555	DFT-s-OFDM PI/2 BPSK	1@1	24.74	22.24	0.1675
48	30	10	637000	3555	DFT-s-OFDM PI/2 BPSK	1@0	24.11	21.61	0.1449
48	30	10	637000	3555	DFT-s-OFDM PI/2 BPSK	1@22	24.64	22.14	0.1637
48	30	10	637000	3555	DFT-s-OFDM PI/2 BPSK	2@0	24.12	21.62	0.1452
48	30	10	637000	3555	DFT-s-OFDM PI/2 BPSK	12@6	24.65	22.15	0.1641
48	30	10	637000	3555	DFT-s-OFDM PI/2 BPSK	2@22	24.05	21.55	0.1429
48	30	10	637000	3555	DFT-s-OFDM PI/2 BPSK	24@0	24.19	21.69	0.1476
48	30	10	637000	3555	DFT-s-OFDM QPSK	1@1	24.60	22.10	0.1622
48	30	10	637000	3555	DFT-s-OFDM QPSK	1@0	23.50	21.00	0.1259
48	30	10	637000	3555	DFT-s-OFDM QPSK	1@22	24.58	22.08	0.1614
48	30	10	637000	3555	DFT-s-OFDM QPSK	2@0	23.62	21.12	0.1294
48	30	10	637000	3555	DFT-s-OFDM QPSK	12@6	24.57	22.07	0.1611
48	30	10	637000	3555	DFT-s-OFDM QPSK	2@22	23.56	21.06	0.1276
48	30	10	637000	3555	DFT-s-OFDM QPSK	24@0	23.70	21.20	0.1318
48	30	10	637000	3555	DFT-s-OFDM 16 QAM	1@1	23.76	21.26	0.1337
48	30	10	637000	3555	DFT-s-OFDM 64 QAM	1@1	22.13	19.63	0.0918
48	30	10	637000	3555	DFT-s-OFDM 256 QAM	1@1	20.00	17.50	0.0562
48	30	10	637000	3555	DFT-s-OFDM 16 QAM	24@0	22.59	20.09	0.1021
48	30	10	637000	3555	DFT-s-OFDM 64 QAM	24@0	22.10	19.60	0.0912
48	30	10	637000	3555	DFT-s-OFDM 256 QAM	24@0	20.04	17.54	0.0568
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	24.62	22.12	0.1629
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	23.96	21.46	0.1400
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@22	24.65	22.15	0.1641
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	2@0	24.04	21.54	0.1426
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	12@6	24.62	22.12	0.1629
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	2@22	24.04	21.54	0.1426
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	24@0	24.11	21.61	0.1449
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@1	24.55	22.05	0.1603
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	23.48	20.98	0.1253
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@22	24.62	22.12	0.1629
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	2@0	23.53	21.03	0.1268
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	12@6	24.55	22.05	0.1603
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	2@22	23.54	21.04	0.1271
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	24@0	23.64	21.14	0.1300
48	30	10	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	23.63	21.13	0.1297
48	30	10	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	22.16	19.66	0.0925



48	30	10	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	19.92	17.42	0.0552
48	30	10	641666	3624.99	DFT-s-OFDM 16 QAM	24@0	22.61	20.11	0.1026
48	30	10	641666	3624.99	DFT-s-OFDM 64 QAM	24@0	22.10	19.60	0.0912
48	30	10	641666	3624.99	DFT-s-OFDM 256 QAM	24@0	20.01	17.51	0.0564
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@1	24.56	22.06	0.1607
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@0	23.90	21.40	0.1380
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@22	24.55	22.05	0.1603
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	2@0	23.99	21.49	0.1409
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	12@6	24.51	22.01	0.1589
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	2@22	23.94	21.44	0.1393
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	24@0	24.08	21.58	0.1439
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@1	24.50	22.00	0.1585
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	23.40	20.90	0.1230
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@22	24.45	21.95	0.1567
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	2@0	23.48	20.98	0.1253
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	12@6	24.43	21.93	0.1560
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	2@22	23.41	20.91	0.1233
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	24@0	23.49	20.99	0.1256
48	30	10	646332	3694.98	DFT-s-OFDM 16 QAM	1@1	23.58	21.08	0.1282
48	30	10	646332	3694.98	DFT-s-OFDM 64 QAM	1@1	22.11	19.61	0.0914
48	30	10	646332	3694.98	DFT-s-OFDM 256 QAM	1@1	19.87	17.37	0.0546
48	30	10	646332	3694.98	DFT-s-OFDM 16 QAM	24@0	22.50	20.00	0.1000
48	30	10	646332	3694.98	DFT-s-OFDM 64 QAM	24@0	21.97	19.47	0.0885
48	30	10	646332	3694.98	DFT-s-OFDM 256 QAM	24@0	19.88	17.38	0.0547
48	30	15	637168	3557.52	DFT-s-OFDM PI/2 BPSK	1@1	18.65	16.15	0.0412
48	30	15	637168	3557.52	DFT-s-OFDM PI/2 BPSK	1@0	18.57	16.07	0.0405
48	30	15	637168	3557.52	DFT-s-OFDM PI/2 BPSK	1@36	24.62	22.12	0.1629
48	30	15	637168	3557.52	DFT-s-OFDM PI/2 BPSK	2@0	18.68	16.18	0.0415
48	30	15	637168	3557.52	DFT-s-OFDM PI/2 BPSK	18@9	24.74	22.24	0.1675
48	30	15	637168	3557.52	DFT-s-OFDM PI/2 BPSK	2@36	24.05	21.55	0.1429
48	30	15	637168	3557.52	DFT-s-OFDM PI/2 BPSK	36@0	18.68	16.18	0.0415
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	1@1	18.55	16.05	0.0403
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	1@0	18.57	16.07	0.0405
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	1@36	24.54	22.04	0.1600
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	2@0	18.64	16.14	0.0411
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	18@9	24.59	22.09	0.1618
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	2@36	23.52	21.02	0.1265
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	36@0	18.62	16.12	0.0409
48	30	15	637168	3557.52	DFT-s-OFDM 16 QAM	1@1	17.57	15.07	0.0321
48	30	15	637168	3557.52	DFT-s-OFDM 64 QAM	1@1	17.60	15.10	0.0324
48	30	15	637168	3557.52	DFT-s-OFDM 256 QAM	1@1	19.99	17.49	0.0561
48	30	15	637168	3557.52	DFT-s-OFDM 16 QAM	36@0	17.51	15.01	0.0317



48	30	15	637168	3557.52	DFT-s-OFDM 64 QAM	36@0	17.59	15.09	0.0323
48	30	15	637168	3557.52	DFT-s-OFDM 256 QAM	36@0	20.04	17.54	0.0568
48	30	15	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	24.58	22.08	0.1614
48	30	15	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	23.99	21.49	0.1409
48	30	15	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@36	24.69	22.19	0.1656
48	30	15	641666	3624.99	DFT-s-OFDM PI/2 BPSK	2@0	23.98	21.48	0.1406
48	30	15	641666	3624.99	DFT-s-OFDM PI/2 BPSK	18@9	24.65	22.15	0.1641
48	30	15	641666	3624.99	DFT-s-OFDM PI/2 BPSK	2@36	24.12	21.62	0.1452
48	30	15	641666	3624.99	DFT-s-OFDM PI/2 BPSK	36@0	24.12	21.62	0.1452
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	1@1	24.45	21.95	0.1567
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	1@0	23.45	20.95	0.1245
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	1@36	24.59	22.09	0.1618
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	2@0	23.52	21.02	0.1265
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	18@9	24.59	22.09	0.1618
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	2@36	23.59	21.09	0.1285
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	36@0	23.57	21.07	0.1279
48	30	15	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	23.60	21.10	0.1288
48	30	15	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	21.99	19.49	0.0889
48	30	15	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	19.81	17.31	0.0538
48	30	15	641666	3624.99	DFT-s-OFDM 16 QAM	36@0	22.47	19.97	0.0993
48	30	15	641666	3624.99	DFT-s-OFDM 64 QAM	36@0	22.02	19.52	0.0895
48	30	15	641666	3624.99	DFT-s-OFDM 256 QAM	36@0	19.94	17.44	0.0555
48	30	15	646166	3692.49	DFT-s-OFDM PI/2 BPSK	1@1	24.57	22.07	0.1611
48	30	15	646166	3692.49	DFT-s-OFDM PI/2 BPSK	1@0	23.99	21.49	0.1409
48	30	15	646166	3692.49	DFT-s-OFDM PI/2 BPSK	1@36	18.60	16.10	0.0407
48	30	15	646166	3692.49	DFT-s-OFDM PI/2 BPSK	2@0	24.02	21.52	0.1419
48	30	15	646166	3692.49	DFT-s-OFDM PI/2 BPSK	18@9	24.56	22.06	0.1607
48	30	15	646166	3692.49	DFT-s-OFDM PI/2 BPSK	2@36	18.46	15.96	0.0394
48	30	15	646166	3692.49	DFT-s-OFDM PI/2 BPSK	36@0	18.48	15.98	0.0396
48	30	15	646166	3692.49	DFT-s-OFDM QPSK	1@1	24.50	22.00	0.1585
48	30	15	646166	3692.49	DFT-s-OFDM QPSK	1@0	23.44	20.94	0.1242
48	30	15	646166	3692.49	DFT-s-OFDM QPSK	1@36	18.47	15.97	0.0395
48	30	15	646166	3692.49	DFT-s-OFDM QPSK	2@0	23.51	21.01	0.1262
48	30	15	646166	3692.49	DFT-s-OFDM QPSK	18@9	24.43	21.93	0.1560
48	30	15	646166	3692.49	DFT-s-OFDM QPSK	2@36	18.40	15.90	0.0389
48	30	15	646166	3692.49	DFT-s-OFDM QPSK	36@0	18.48	15.98	0.0396
48	30	15	646166	3692.49	DFT-s-OFDM 16 QAM	1@1	23.55	21.05	0.1274
48	30	15	646166	3692.49	DFT-s-OFDM 64 QAM	1@1	22.08	19.58	0.0908
48	30	15	646166	3692.49	DFT-s-OFDM 256 QAM	1@1	19.85	17.35	0.0543
48	30	15	646166	3692.49	DFT-s-OFDM 16 QAM	36@0	17.37	14.87	0.0307
48	30	15	646166	3692.49	DFT-s-OFDM 64 QAM	36@0	17.43	14.93	0.0311
48	30	15	646166	3692.49	DFT-s-OFDM 256 QAM	36@0	19.82	17.32	0.0540



48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@1	18.66	16.16	0.0413
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@0	18.47	15.97	0.0395
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@49	24.56	22.06	0.1607
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	2@0	18.58	16.08	0.0406
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	25@12	24.72	22.22	0.1667
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	2@49	24.02	21.52	0.1419
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	50@0	18.64	16.14	0.0411
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@1	18.55	16.05	0.0403
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	18.46	15.96	0.0394
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@49	24.49	21.99	0.1581
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	2@0	18.55	16.05	0.0403
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	25@12	24.63	22.13	0.1633
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	2@49	23.38	20.88	0.1225
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	50@0	18.58	16.08	0.0406
48	30	20	637334	3560.01	DFT-s-OFDM 16 QAM	1@1	17.55	15.05	0.0320
48	30	20	637334	3560.01	DFT-s-OFDM 64 QAM	1@1	17.54	15.04	0.0319
48	30	20	637334	3560.01	DFT-s-OFDM 256 QAM	1@1	19.91	17.41	0.0551
48	30	20	637334	3560.01	DFT-s-OFDM 16 QAM	50@0	17.49	14.99	0.0316
48	30	20	637334	3560.01	DFT-s-OFDM 64 QAM	50@0	17.55	15.05	0.0320
48	30	20	637334	3560.01	DFT-s-OFDM 256 QAM	50@0	20.05	17.55	0.0569
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	24.44	21.94	0.1563
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	23.86	21.36	0.1368
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@49	24.56	22.06	0.1607
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	2@0	23.88	21.38	0.1374
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	25@12	24.70	22.20	0.1660
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	2@49	24.01	21.51	0.1416
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@0	24.09	21.59	0.1442
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@1	24.36	21.86	0.1535
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	23.31	20.81	0.1205
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@49	24.48	21.98	0.1578
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	2@0	23.41	20.91	0.1233
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	25@12	24.58	22.08	0.1614
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	2@49	23.49	20.99	0.1256
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	23.56	21.06	0.1276
48	30	20	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	23.49	20.99	0.1256
48	30	20	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	22.01	19.51	0.0893
48	30	20	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	19.74	17.24	0.0530
48	30	20	641666	3624.99	DFT-s-OFDM 16 QAM	50@0	22.44	19.94	0.0986
48	30	20	641666	3624.99	DFT-s-OFDM 64 QAM	50@0	22.02	19.52	0.0895
48	30	20	641666	3624.99	DFT-s-OFDM 256 QAM	50@0	19.95	17.45	0.0556
48	30	20	646000	3690	DFT-s-OFDM PI/2 BPSK	1@1	24.61	22.11	0.1626
48	30	20	646000	3690	DFT-s-OFDM PI/2 BPSK	1@0	23.98	21.48	0.1406



48	30	20	646000	3690	DFT-s-OFDM PI/2 BPSK	1@49	18.49	15.99	0.0397
48	30	20	646000	3690	DFT-s-OFDM PI/2 BPSK	2@0	24.00	21.50	0.1413
48	30	20	646000	3690	DFT-s-OFDM PI/2 BPSK	25@12	24.61	22.11	0.1626
48	30	20	646000	3690	DFT-s-OFDM PI/2 BPSK	2@49	18.38	15.88	0.0387
48	30	20	646000	3690	DFT-s-OFDM PI/2 BPSK	50@0	18.52	16.02	0.0400
48	30	20	646000	3690	DFT-s-OFDM QPSK	1@1	24.47	21.97	0.1574
48	30	20	646000	3690	DFT-s-OFDM QPSK	1@0	23.41	20.91	0.1233
48	30	20	646000	3690	DFT-s-OFDM QPSK	1@49	18.43	15.93	0.0392
48	30	20	646000	3690	DFT-s-OFDM QPSK	2@0	23.54	21.04	0.1271
48	30	20	646000	3690	DFT-s-OFDM QPSK	25@12	24.45	21.95	0.1567
48	30	20	646000	3690	DFT-s-OFDM QPSK	2@49	18.29	15.79	0.0379
48	30	20	646000	3690	DFT-s-OFDM QPSK	50@0	18.47	15.97	0.0395
48	30	20	646000	3690	DFT-s-OFDM 16 QAM	1@1	23.59	21.09	0.1285
48	30	20	646000	3690	DFT-s-OFDM 64 QAM	1@1	22.06	19.56	0.0904
48	30	20	646000	3690	DFT-s-OFDM 256 QAM	1@1	19.88	17.38	0.0547
48	30	20	646000	3690	DFT-s-OFDM 16 QAM	50@0	17.44	14.94	0.0312
48	30	20	646000	3690	DFT-s-OFDM 64 QAM	50@0	17.43	14.93	0.0311
48	30	20	646000	3690	DFT-s-OFDM 256 QAM	50@0	19.90	17.40	0.0550
48	30	30	637668	3565.02	DFT-s-OFDM PI/2 BPSK	1@1	12.29	9.79	0.0095
48	30	30	637668	3565.02	DFT-s-OFDM PI/2 BPSK	1@0	12.20	9.70	0.0093
48	30	30	637668	3565.02	DFT-s-OFDM PI/2 BPSK	1@76	12.01	9.51	0.0089
48	30	30	637668	3565.02	DFT-s-OFDM PI/2 BPSK	2@0	12.29	9.79	0.0095
48	30	30	637668	3565.02	DFT-s-OFDM PI/2 BPSK	36@18	12.30	9.80	0.0095
48	30	30	637668	3565.02	DFT-s-OFDM PI/2 BPSK	2@76	12.03	9.53	0.0090
48	30	30	637668	3565.02	DFT-s-OFDM PI/2 BPSK	75@0	12.18	9.68	0.0093
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@1	12.24	9.74	0.0094
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@0	12.23	9.73	0.0094
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@76	11.89	9.39	0.0087
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	2@0	12.25	9.75	0.0094
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	36@18	12.20	9.70	0.0093
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	2@76	12.00	9.50	0.0089
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	75@0	12.17	9.67	0.0093
48	30	30	637668	3565.02	DFT-s-OFDM 16 QAM	1@1	11.80	9.30	0.0085
48	30	30	637668	3565.02	DFT-s-OFDM 64 QAM	1@1	11.75	9.25	0.0084
48	30	30	637668	3565.02	DFT-s-OFDM 256 QAM	1@1	11.62	9.12	0.0082
48	30	30	637668	3565.02	DFT-s-OFDM 16 QAM	75@0	11.64	9.14	0.0082
48	30	30	637668	3565.02	DFT-s-OFDM 64 QAM	75@0	11.69	9.19	0.0083
48	30	30	637668	3565.02	DFT-s-OFDM 256 QAM	75@0	11.64	9.14	0.0082
48	30	30	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	18.56	16.06	0.0404
48	30	30	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	18.46	15.96	0.0394
48	30	30	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@76	18.83	16.33	0.0430
48	30	30	641666	3624.99	DFT-s-OFDM PI/2 BPSK	2@0	18.51	16.01	0.0399



48	30	30	641666	3624.99	DFT-s-OFDM PI/2 BPSK	36@18	24.71	22.21	0.1663
48	30	30	641666	3624.99	DFT-s-OFDM PI/2 BPSK	2@76	18.72	16.22	0.0419
48	30	30	641666	3624.99	DFT-s-OFDM PI/2 BPSK	75@0	18.64	16.14	0.0411
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@1	18.47	15.97	0.0395
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@0	18.49	15.99	0.0397
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@76	18.75	16.25	0.0422
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	2@0	18.50	16.00	0.0398
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	36@18	24.66	22.16	0.1644
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	2@76	18.76	16.26	0.0423
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	75@0	18.65	16.15	0.0412
48	30	30	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	18.50	16.00	0.0398
48	30	30	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	18.55	16.05	0.0403
48	30	30	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	19.85	17.35	0.0543
48	30	30	641666	3624.99	DFT-s-OFDM 16 QAM	75@0	18.50	16.00	0.0398
48	30	30	641666	3624.99	DFT-s-OFDM 64 QAM	75@0	18.56	16.06	0.0404
48	30	30	641666	3624.99	DFT-s-OFDM 256 QAM	75@0	18.51	16.01	0.0399
48	30	30	645666	3684.99	DFT-s-OFDM PI/2 BPSK	1@1	12.31	9.81	0.0096
48	30	30	645666	3684.99	DFT-s-OFDM PI/2 BPSK	1@0	12.31	9.81	0.0096
48	30	30	645666	3684.99	DFT-s-OFDM PI/2 BPSK	1@76	12.01	9.51	0.0089
48	30	30	645666	3684.99	DFT-s-OFDM PI/2 BPSK	2@0	12.38	9.88	0.0097
48	30	30	645666	3684.99	DFT-s-OFDM PI/2 BPSK	36@18	24.72	22.22	0.1667
48	30	30	645666	3684.99	DFT-s-OFDM PI/2 BPSK	2@76	11.98	9.48	0.0089
48	30	30	645666	3684.99	DFT-s-OFDM PI/2 BPSK	75@0	12.15	9.65	0.0092
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@1	12.27	9.77	0.0095
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@0	12.29	9.79	0.0095
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@76	11.98	9.48	0.0089
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	2@0	12.36	9.86	0.0097
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	36@18	24.61	22.11	0.1626
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	2@76	12.00	9.50	0.0089
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	75@0	12.13	9.63	0.0092
48	30	30	645666	3684.99	DFT-s-OFDM 16 QAM	1@1	11.85	9.35	0.0086
48	30	30	645666	3684.99	DFT-s-OFDM 64 QAM	1@1	11.75	9.25	0.0084
48	30	30	645666	3684.99	DFT-s-OFDM 256 QAM	1@1	11.66	9.16	0.0082
48	30	30	645666	3684.99	DFT-s-OFDM 16 QAM	75@0	11.59	9.09	0.0081
48	30	30	645666	3684.99	DFT-s-OFDM 64 QAM	75@0	11.66	9.16	0.0082
48	30	30	645666	3684.99	DFT-s-OFDM 256 QAM	75@0	11.58	9.08	0.0081
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@1	12.17	9.67	0.0093
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@0	12.17	9.67	0.0093
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@104	11.84	9.34	0.0086
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	2@0	12.22	9.72	0.0094
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	50@25	12.23	9.73	0.0094
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	2@104	11.93	9.43	0.0088



48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	100@0	12.15	9.65	0.0092
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@1	12.16	9.66	0.0092
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@0	12.20	9.70	0.0093
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@104	11.81	9.31	0.0085
48	30	40	638000	3570	DFT-s-OFDM QPSK	2@0	12.23	9.73	0.0094
48	30	40	638000	3570	DFT-s-OFDM QPSK	50@25	12.17	9.67	0.0093
48	30	40	638000	3570	DFT-s-OFDM QPSK	2@104	11.86	9.36	0.0086
48	30	40	638000	3570	DFT-s-OFDM QPSK	100@0	12.09	9.59	0.0091
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@1	11.77	9.27	0.0085
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@1	11.74	9.24	0.0084
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@1	11.60	9.10	0.0081
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	100@0	11.57	9.07	0.0081
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	100@0	11.59	9.09	0.0081
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	100@0	11.62	9.12	0.0082
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	18.50	16.00	0.0398
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	18.39	15.89	0.0388
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@104	18.74	16.24	0.0421
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	2@0	18.42	15.92	0.0391
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@25	24.73	22.23	0.1671
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	2@104	18.63	16.13	0.0410
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	18.22	15.72	0.0373
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@1	18.49	15.99	0.0397
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	18.39	15.89	0.0388
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@104	18.65	16.15	0.0412
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	2@0	18.45	15.95	0.0394
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	50@25	24.65	22.15	0.1641
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	2@104	18.67	16.17	0.0414
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	18.11	15.61	0.0364
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	18.40	15.90	0.0389
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	18.42	15.92	0.0391
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	19.84	17.34	0.0542
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	100@0	18.02	15.52	0.0356
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	100@0	18.02	15.52	0.0356
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	100@0	18.15	15.65	0.0367
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@1	12.35	9.85	0.0097
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@0	12.36	9.86	0.0097
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@104	11.87	9.37	0.0086
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	2@0	12.40	9.90	0.0098
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	50@25	12.25	9.75	0.0094
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	2@104	11.88	9.38	0.0087
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	100@0	12.18	9.68	0.0093
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@1	12.31	9.81	0.0096



48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	12.37	9.87	0.0097
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@104	11.86	9.36	0.0086
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	2@0	12.37	9.87	0.0097
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	50@25	12.19	9.69	0.0093
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	2@104	11.88	9.38	0.0087
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	100@0	12.16	9.66	0.0092
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@1	11.93	9.43	0.0088
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@1	11.92	9.42	0.0087
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@1	11.78	9.28	0.0085
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	100@0	11.64	9.14	0.0082
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	100@0	11.66	9.16	0.0082
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	100@0	11.63	9.13	0.0082



Frequency Stability

Test Result


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0035	PASS	NV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0075	PASS	LV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0040	PASS	HV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0000	PASS	-30℃
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0040	PASS	-20℃
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0012	PASS	-10℃
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0035	PASS	0℃
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0035	PASS	10℃
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0012	PASS	20℃
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0046	PASS	30℃
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0012	PASS	40℃
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0075	PASS	50℃

**Peak to Average Ratio****Test Result**

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Result	Verdict
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@0	3.89	13
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	4.04	13
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	4.42	13
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	4.66	13



Test Graphs

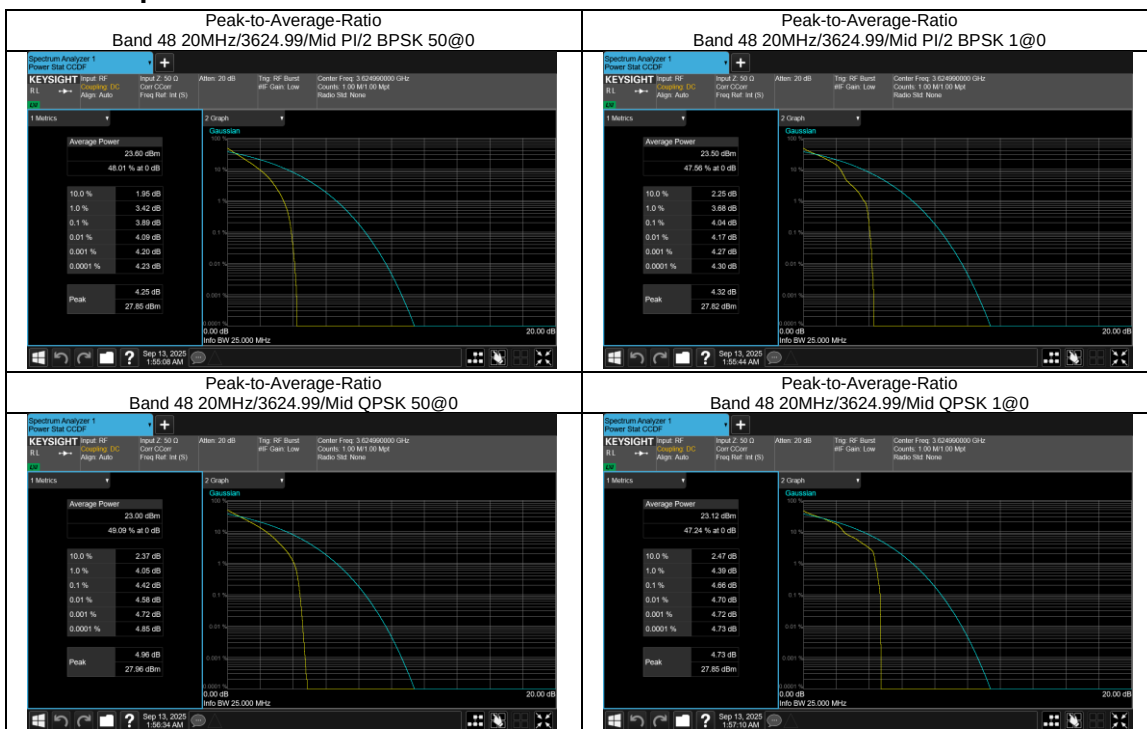




Occupied Bandwidth


Test Result

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	OBW(MHz)	26dB OBW(MHz)
48	30	10	641666	3624.99	CP-OFDM QPSK	24@0	8.56	9.491
48	30	10	641666	3624.99	CP-OFDM 16 QAM	24@0	8.55	9.499
48	30	15	641666	3624.99	CP-OFDM QPSK	38@0	13.55	14.86
48	30	15	641666	3624.99	CP-OFDM 16 QAM	38@0	13.6	14.57
48	30	20	641666	3624.99	CP-OFDM QPSK	51@0	18.16	19.37
48	30	20	641666	3624.99	CP-OFDM 16 QAM	51@0	18.16	19.55
48	30	30	641666	3624.99	CP-OFDM QPSK	78@0	27.86	29.27
48	30	30	641666	3624.99	CP-OFDM 16 QAM	78@0	27.81	29.5
48	30	40	641666	3624.99	CP-OFDM QPSK	106@0	37.8	39.2
48	30	40	641666	3624.99	CP-OFDM 16 QAM	106@0	37.86	39.68



Test Graphs

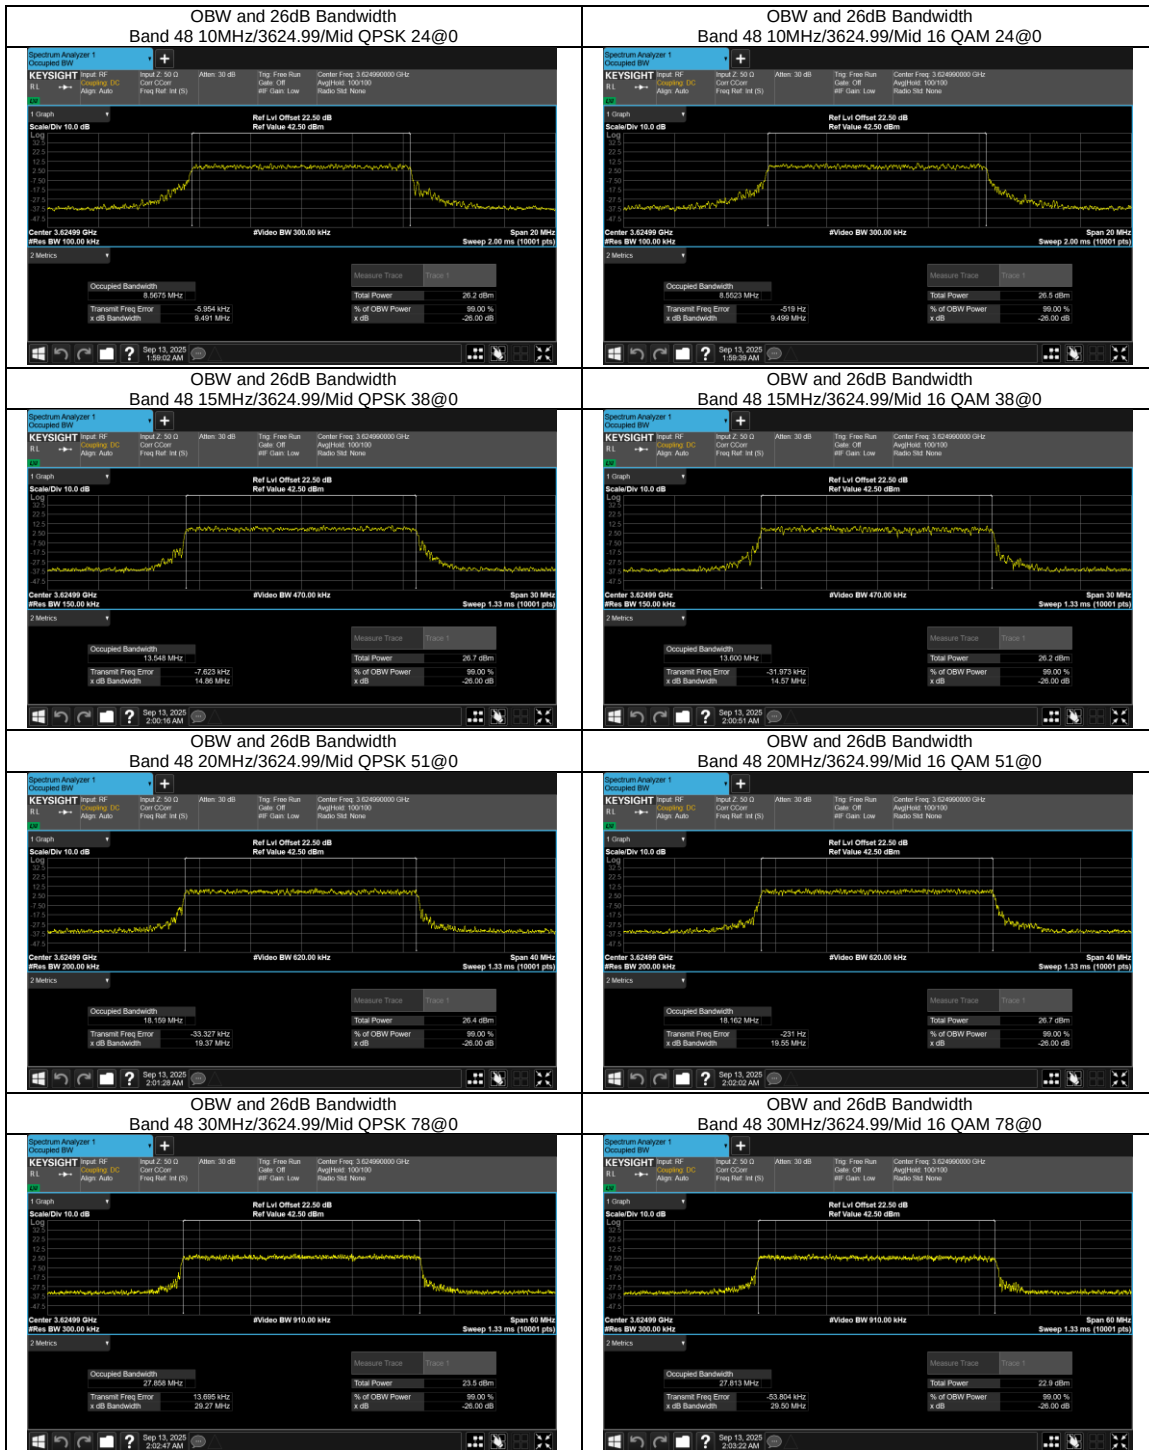

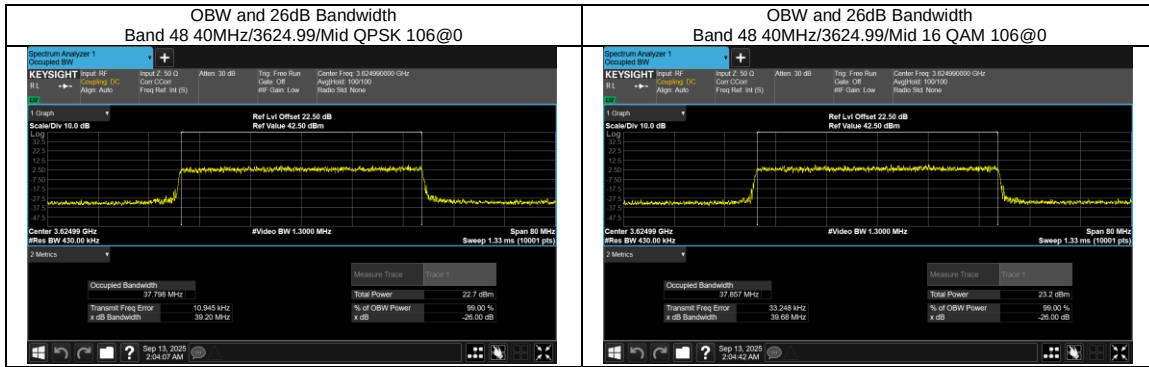




Conducted Spurious Emissions


Test Result


NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Result	Verdict
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	15	637168	3557.52	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	15	637168	3557.52	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	15	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	15	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	15	646166	3692.49	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	15	646166	3692.49	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS



Test Graphs

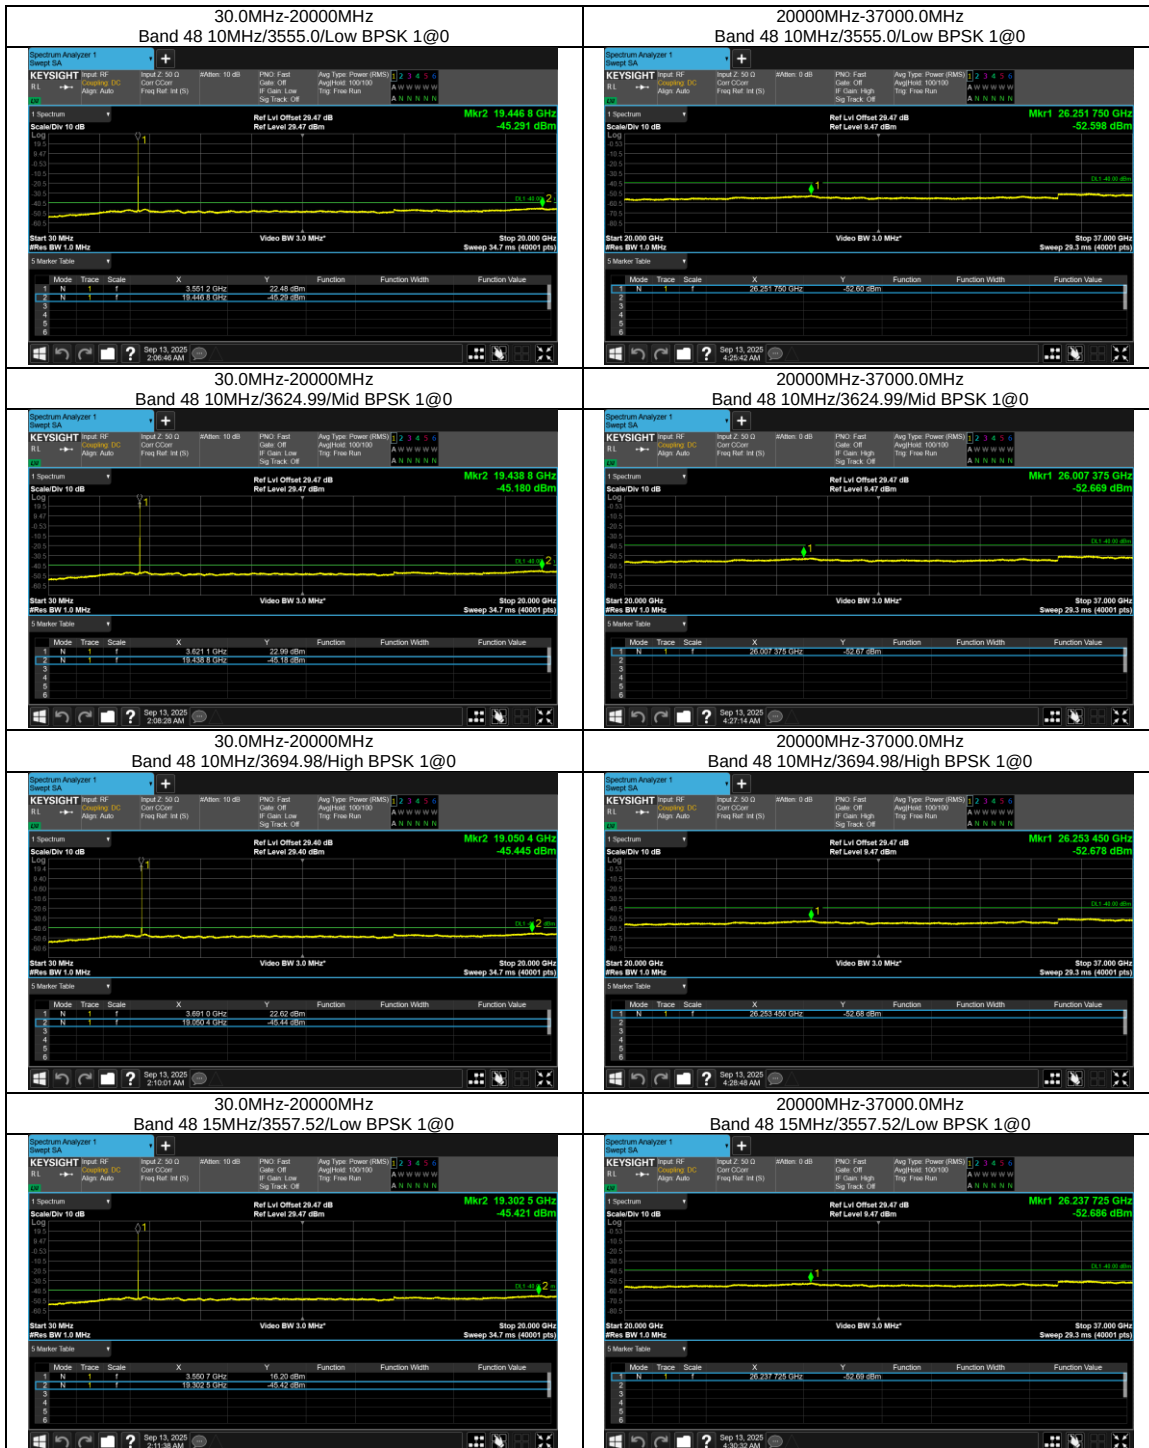

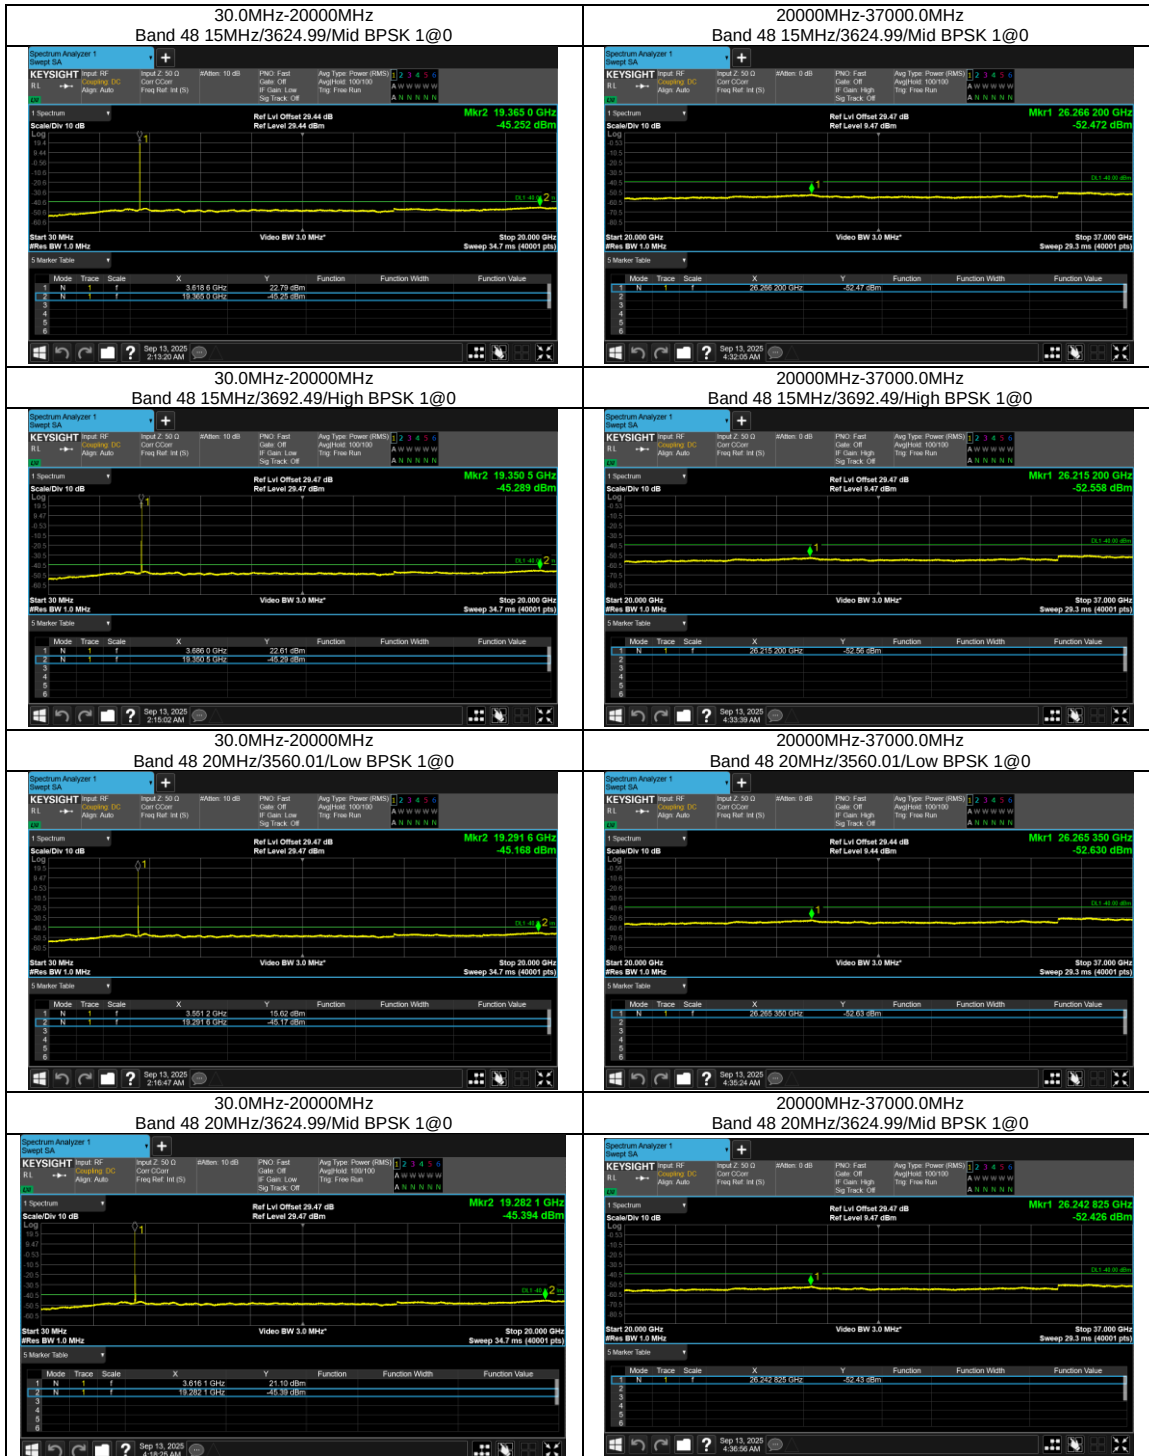

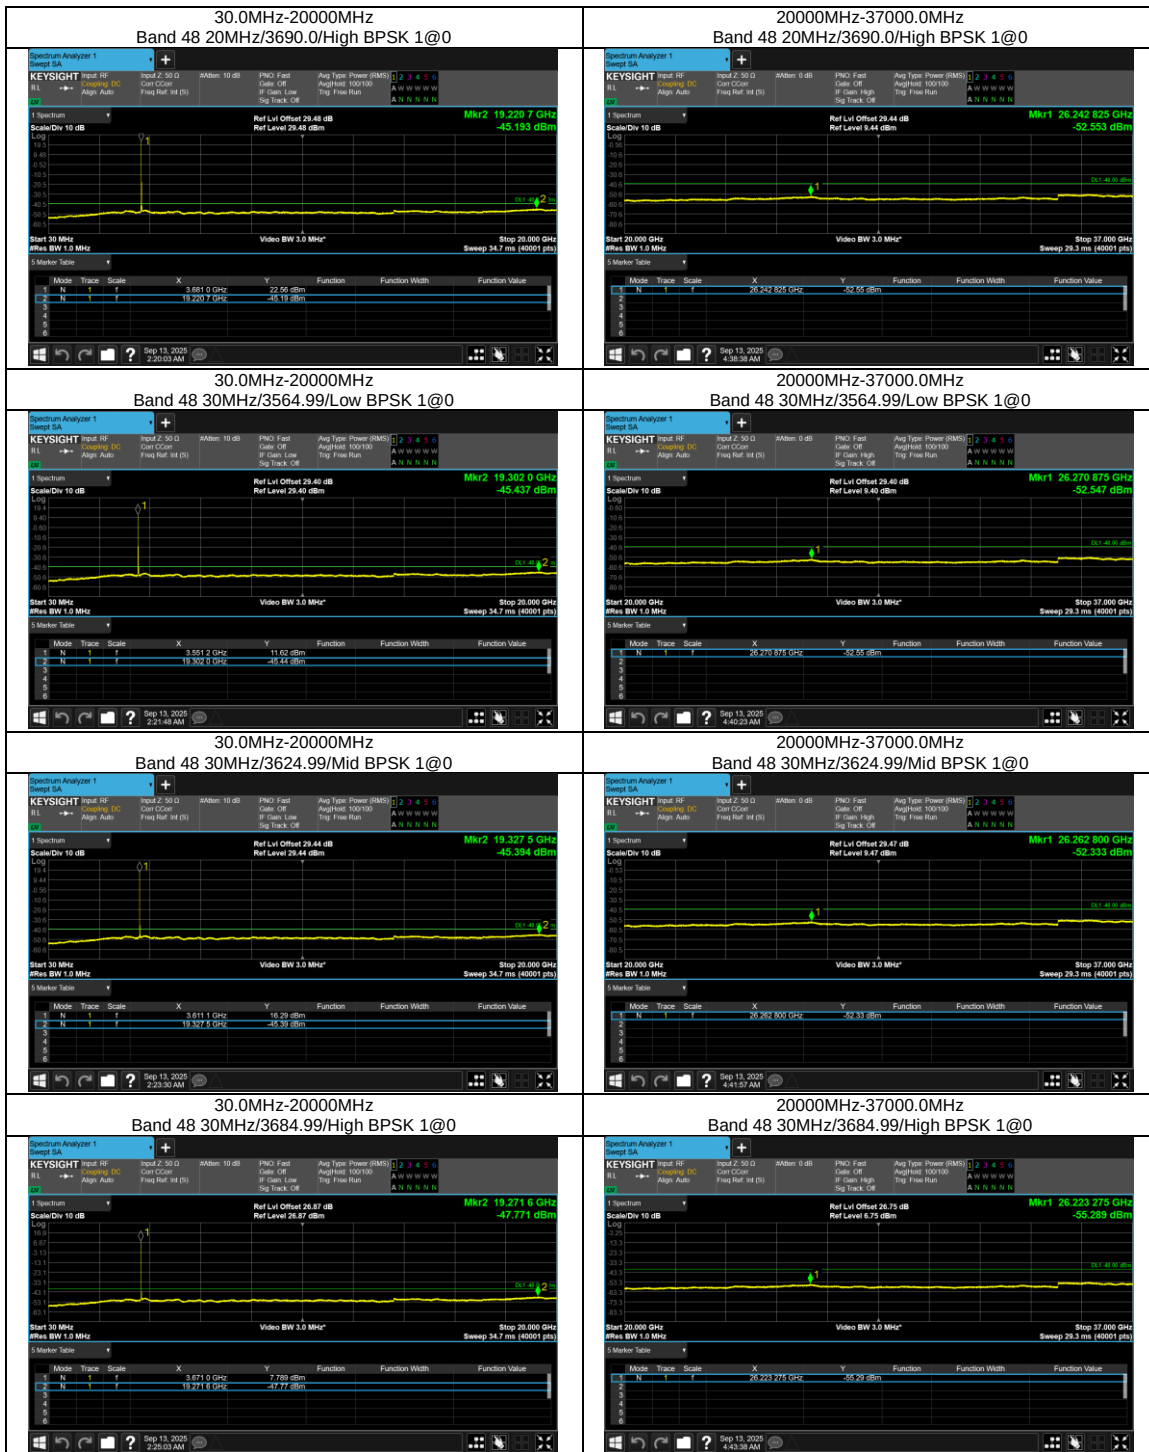





Conducted Band Edge

Test Result

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Result	Verdict
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@23	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@23	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	24@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	24@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@23	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@23	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	24@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	24@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@23	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@23	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	24@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	24@0	see graph	PASS
48	30	15	637168	3557.52	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	15	637168	3557.52	DFT-s-OFDM BPSK	1@37	see graph	PASS
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	1@37	see graph	PASS
48	30	15	637168	3557.52	DFT-s-OFDM BPSK	36@0	see graph	PASS
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	36@0	see graph	PASS
48	30	15	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	15	641666	3624.99	DFT-s-OFDM BPSK	1@37	see graph	PASS
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	1@37	see graph	PASS
48	30	15	641666	3624.99	DFT-s-OFDM BPSK	36@0	see graph	PASS
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	36@0	see graph	PASS
48	30	15	646166	3692.49	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	15	646166	3692.49	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	15	646166	3692.49	DFT-s-OFDM BPSK	1@37	see graph	PASS
48	30	15	646166	3692.49	DFT-s-OFDM QPSK	1@37	see graph	PASS
48	30	15	646166	3692.49	DFT-s-OFDM BPSK	36@0	see graph	PASS



48	30	15	646166	3692.49	DFT-s-OFDM QPSK	36@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM BPSK	1@77	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@77	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM BPSK	75@0	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	75@0	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM BPSK	1@77	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@77	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM BPSK	75@0	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	75@0	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM BPSK	1@77	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@77	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM BPSK	75@0	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	75@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM	1@0	see graph	PASS



					QPSK			
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	100@0	see graph	PASS



Test Graphs

