



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : POCO
MODEL NAME : 2510DPC44G
FCC ID : 2AFZZPC44G
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Sep. 07, 2025 ~ Sep. 18, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	9
1.6 Testing Location	9
1.7 Test Software	10
1.8 Applicable Standards	10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	11
2.1 Carrier Frequency and Channel	11
2.2 Test Mode	13
2.3 Connection Diagram of Test System	15
2.4 Support Unit used in test configuration and system	16
2.5 EUT Operation Test Setup	16
2.6 Measurement Results Explanation Example	16
3 TEST RESULT	17
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	17
3.2 Maximum Conducted Output Power Measurement	23
3.3 Power Spectral Density Measurement	25
3.4 Unwanted Emissions Measurement	30
3.5 AC Conducted Emission Measurement	35
3.6 Antenna Requirements	37
4 LIST OF MEASURING EQUIPMENT	38
5 MEASUREMENT UNCERTAINTY	39
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR582814E	Rev. 01	Initial issue of report	Sep. 28, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.25 dB at 5359.80 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 14.97 dB at 0.634 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	POCO
Model Name	2510DPC44G
FCC ID	2AFZZPC44G
IMEI Code	Conducted: 68972080028328/868972080028336 Conduction: 868972080042345/868972080042352 Radiation: 868972080027981
HW Version	1351P2502
SW Version	Xiaomi HyperOS 3.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	MIMO <Ant. 8 + 10> <5180 MHz ~ 5240 MHz> 802.11a : 21.52 dBm / 0.1419 W 802.11n HT20 : 18.34 dBm / 0.0682 W 802.11n HT40 : 20.00 dBm / 0.1000 W 802.11ac VHT20: 21.51 dBm / 0.1416 W 802.11ac VHT40: 21.16 dBm / 0.1306 W 802.11ac VHT80: 18.23 dBm / 0.0665 W 802.11ax HE20: 17.40 dBm / 0.0550 W 802.11ax HE40: 20.65 dBm / 0.1161 W 802.11ax HE80: 18.43 dBm / 0.0697 W 802.11be EHT20: 21.64 dBm / 0.1459 W 802.11be EHT40: 21.25 dBm / 0.1334 W 802.11be EHT80: 18.54 dBm / 0.0714 W <5260 MHz ~ 5320 MHz> 802.11a : 21.59 dBm / 0.1442 W 802.11n HT20 : 19.39 dBm / 0.0869 W 802.11n HT40 : 21.12 dBm / 0.1294 W 802.11ac VHT20: 21.63 dBm / 0.1455 W 802.11ac VHT40: 21.18 dBm / 0.1312 W 802.11ac VHT80: 17.60 dBm / 0.0575 W 802.11ac VHT160: 19.67 dBm / 0.0927 W 802.11ax HE20: 20.21 dBm / 0.1050 W 802.11ax HE40: 21.16 dBm / 0.1306 W 802.11ax HE80: 17.79 dBm / 0.0601 W 802.11ax HE160: 19.71 dBm / 0.0935 W 802.11be EHT20: 21.76 dBm / 0.1500 W 802.11be EHT40: 21.25 dBm / 0.1334 W 802.11be EHT80: 17.90 dBm / 0.0617 W 802.11be EHT160: 19.78 dBm / 0.0951 W <5500 MHz ~ 5720 MHz > 802.11a : 21.38 dBm / 0.1374 W 802.11n HT20 : 19.35 dBm / 0.0861 W 802.11n HT40 : 20.88 dBm / 0.1225 W 802.11ac VHT20: 21.50 dBm / 0.1413 W 802.11ac VHT40: 20.94 dBm / 0.1242 W 802.11ac VHT80: 19.62 dBm / 0.0916 W 802.11ac VHT160: 19.41 dBm / 0.0873 W 802.11ax HE20: 19.49 dBm / 0.0889 W 802.11ax HE40: 20.91 dBm / 0.1233 W 802.11ax HE80: 19.35 dBm / 0.0861 W 802.11ax HE160: 19.45 dBm / 0.0881 W 802.11be EHT20: 21.62 dBm / 0.1452 W 802.11be EHT40: 21.00 dBm / 0.1259 W 802.11be EHT80: 19.84 dBm / 0.0964 W 802.11be EHT160: 19.51 dBm / 0.0893 W <5745 MHz ~ 5825 MHz>



	802.11a : 21.38 dBm / 0.1374 W 802.11n HT20 : 21.33 dBm / 0.1358 W 802.11n HT40 : 20.94 dBm / 0.1242 W 802.11ac VHT20: 21.39 dBm / 0.1377 W 802.11ac VHT40: 21.01 dBm / 0.1262 W 802.11ac VHT80: 19.58 dBm / 0.0908 W 802.11ax HE20: 21.56 dBm / 0.1432 W 802.11ax HE40: 20.98 dBm / 0.1253 W 802.11ax HE80: 19.63 dBm / 0.0918 W 802.11be EHT20: 21.60 dBm / 0.1445 W 802.11be EHT40: 21.01 dBm / 0.1262 W 802.11be EHT80: 19.70 dBm / 0.0933 W
99% Occupied Bandwidth	<Ant. 8/10> <5180 MHz ~ 5240 MHz> 802.11a : 18.06 MHz 802.11be EHT20: 19.19 MHz 802.11be EHT40: 38.10 MHz 802.11be EHT80: 77.94 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.44 MHz 802.11be EHT20: 19.19 MHz 802.11be EHT40: 38.11 MHz 802.11be EHT80: 77.92 MHz 802.11be EHT160: 157.71 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.40 MHz 802.11be EHT20: 19.23 MHz 802.11be EHT40: 38.11 MHz 802.11be EHT80: 77.93 MHz 802.11be EHT160: 157.62 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.51 MHz 802.11be EHT20: 19.22 MHz 802.11be EHT40: 38.10 MHz 802.11be EHT80: 77.97 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> <Ant. 8> : PIFA Antenna with gain -2.3 dBi <Ant. 10> : PIFA Antenna with gain -1.8 dBi <5260 MHz ~ 5320 MHz> <Ant. 8> : PIFA Antenna with gain -2.3 dBi <Ant. 10> : PIFA Antenna with gain -1.6 dBi <5500 MHz ~ 5720 MHz> <Ant. 8> : PIFA Antenna with gain -1.6 dBi <Ant. 10> : PIFA Antenna with gain -1.6 dBi <5745 MHz ~ 5825 MHz> <Ant. 8> : PIFA Antenna with gain -1.5 dBi <Ant. 10> : PIFA Antenna with gain -1.6 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

Note:

1. WLAN MIMO support CDD mode.
2. For WLAN SISO/MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.
3. For 802.11n/11ac/11ax/11be mode, the whole testing has assessed only 802.11be EHT20/EHT40/EHT80/EHT160 by referring to the higher output power.
4. 802.11ax/be support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power/PSD, the full RU PSD > partial RU, therefore the full RU perform full, and partial RU verify bandedge/spurious of RSE.
5. 802.11be support small size RU, Large size RU and Puncturing modes as below, and these partial RU Power/PSD less than full RU, therefore these partial RU only assess Power Density/RSE

<Small size RU 52+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	26	52	1	38	1
20MHz	52	26	38	4	2
20MHz	52	26	39	7	3

<Small size RU 106+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	106	26	53	4	1
20MHz	26	106	4	54	2

<Large size RU 484+242 tone> & <80M BW Puncturing 20MHz>:

Bandwidth	Tones		Index		For test modes configure
80MHz	242	484	62	66	1
80MHz	242	484	61	66	2
80MHz	484	242	65	64	3
80MHz	484	242	65	63	4

<Large size RU 996+484 tone> & <160M BW Puncturing 40MHz>:

Bandwidth	Tones		Index		For test modes configure
160MHz	484-Left	996-Right	66-Left	67-Right	1
160MHz	484-Left	996-Right	65-Left	67-Right	2
160MHz	996-Left	484-Right	67-Left	66-Right	3
160MHz	996-Left	484-Right	67-Left	65-Right	4

<Large size RU 996+484+242 tone> & <160M BW Puncturing 20MHz>:

Bandwidth	Tones			Index			For test modes configure
160MHz	242-Left	484-Left	996-Right	62-Left	66-Left	67-Right	1
160MHz	242-Left	484-Left	996-Right	61-Left	66-Left	67-Right	2
160MHz	484-Left	242-Left	996-Right	65-Left	64-Left	67-Right	3
160MHz	484-Left	242-Left	996-Right	65-Left	63-Left	67-Right	4
160MHz	996-Left	242-Right	484-Right	67-Left	62-Right	66-Right	5
160MHz	996-Left	242-Right	484-Right	67-Left	61-Right	66-Right	6
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	64-Right	7
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	63-Right	8

Only the worse cases are shown in this report.

6. The worse cases of RSE for partial RU, Large size RU and small size RU are shown in this report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH03-KS	CN1257	314309



Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test data subcontracted: Conducted test cases in section 3.1~3.3 of this report.

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2020

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	50 ^{##}	5250
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825



Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640
	-	-	114 ^{##}	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.
3. The above Frequency and Channel in "^{##}" are 160MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0

RSE Co-location modes

BLE 2Mbps CH38 2478MHz Tx + 802.11be EHT40 CH62 5310MHz Tx + LTE B48 20MHz Link
802.11g CH11 2462MHz Tx + 802.11be EHT40 CH62 5310MHz Tx + LTE B48 20MHz Link

AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable 1 (Charging from Adapter 1)
Remark: For Radiated Test Cases, The tests were performed with Adapter 1 and USB Cable 1.	



Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		160M BW		160M BW	160M BW
M	Middle	50		114	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

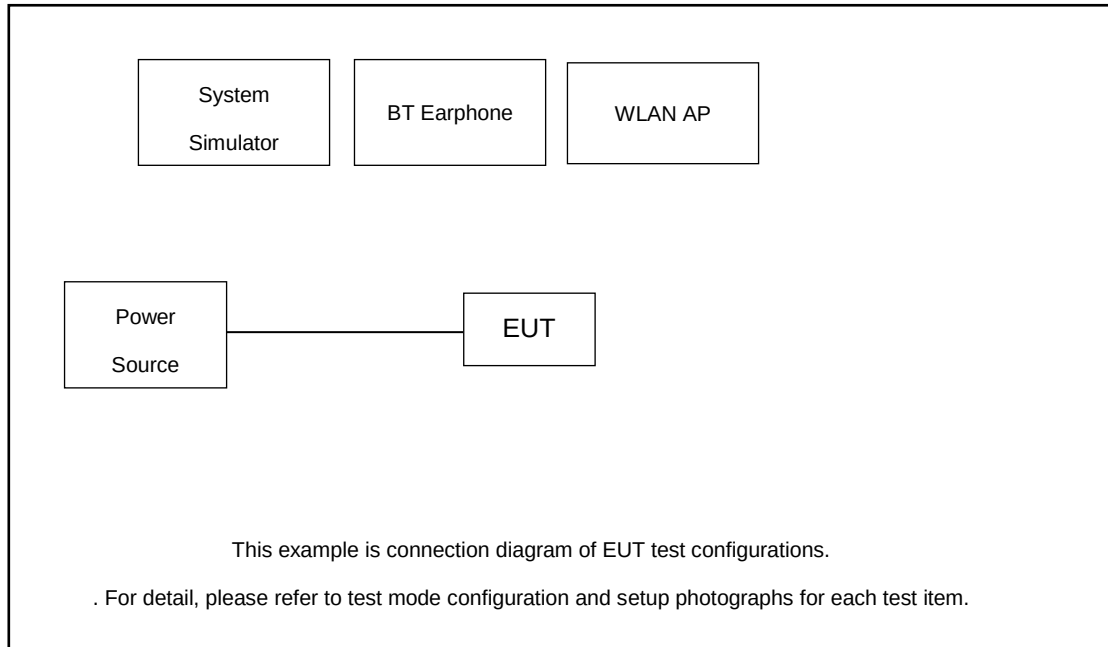

Radiated Emission:

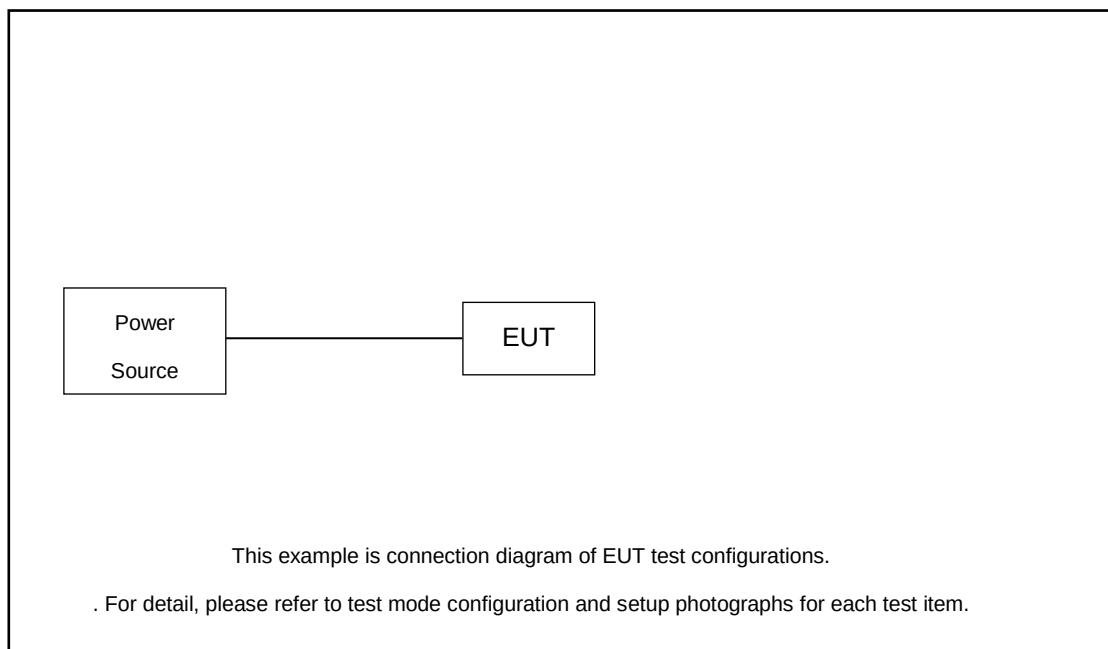

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.8 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 2.8 + 10 = 12.8 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 \times$ RBW. 7. Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	1. Set RBW = 100kHz. 2. Set the VBW $\geq 3 \times$ RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.



3.1.4 Test Setup







3.1.5 Test Result of 6dB Bandwidth



Please refer to Appendix A.

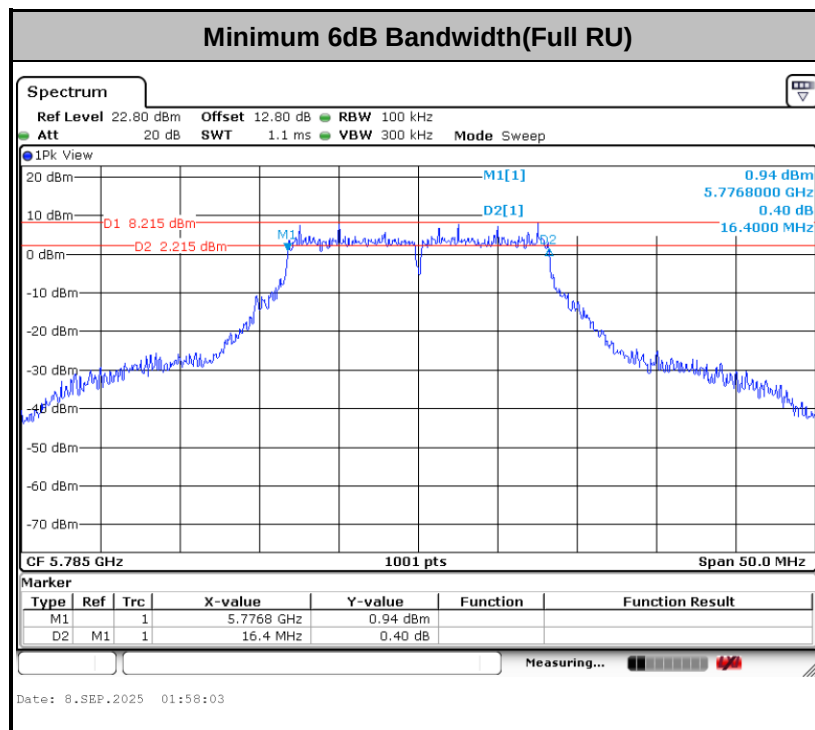

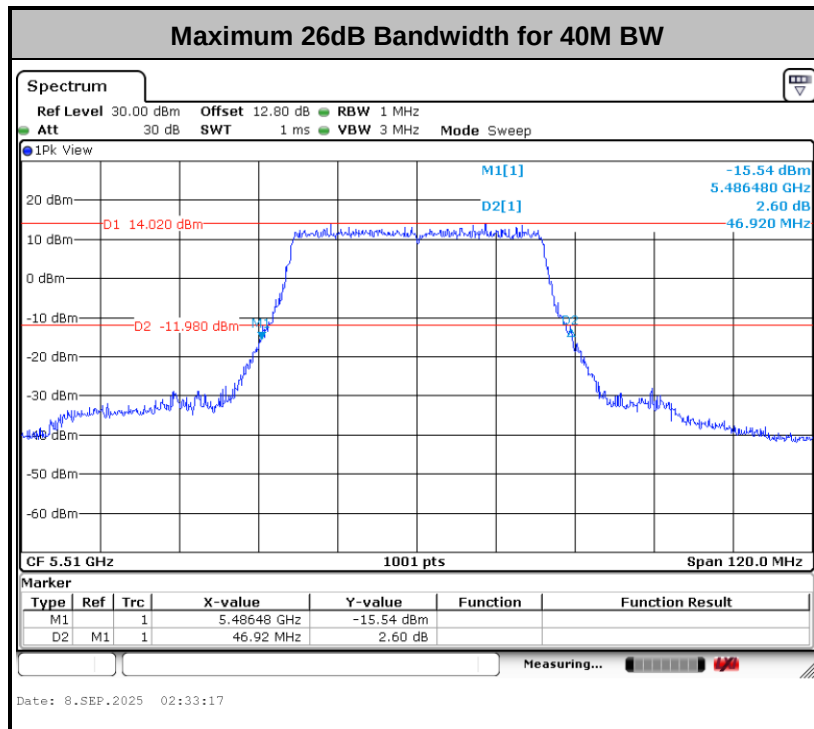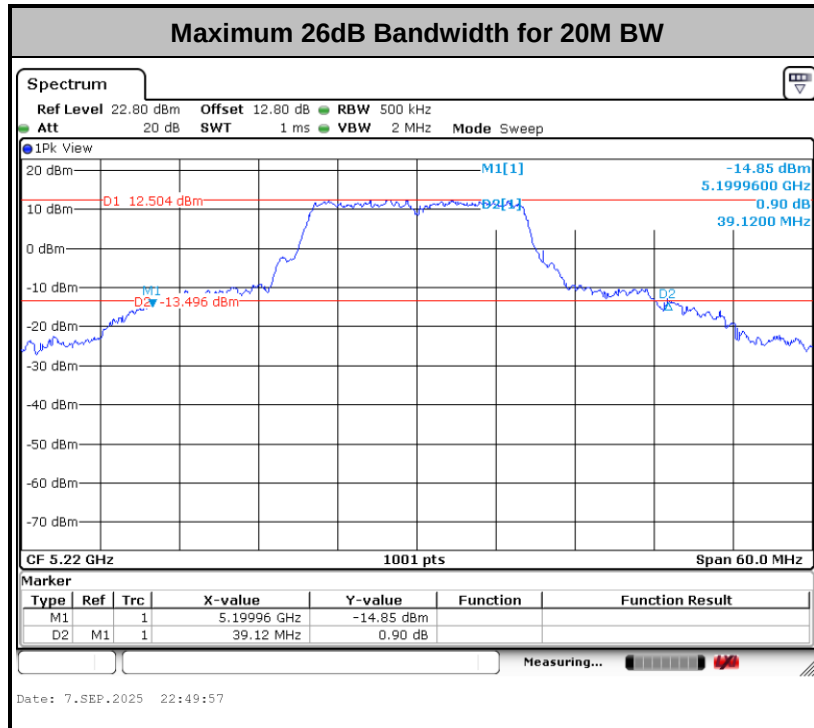

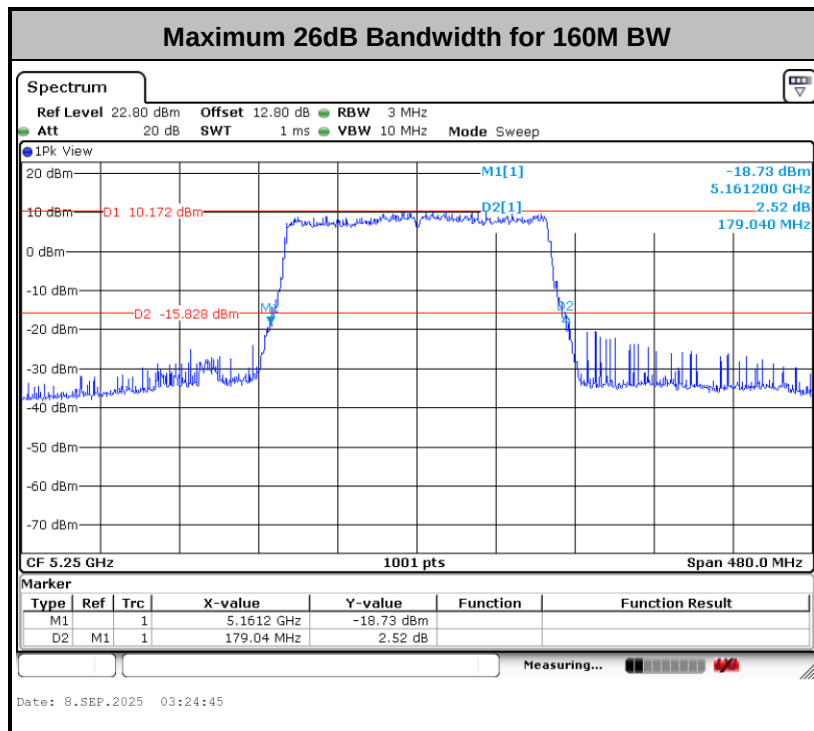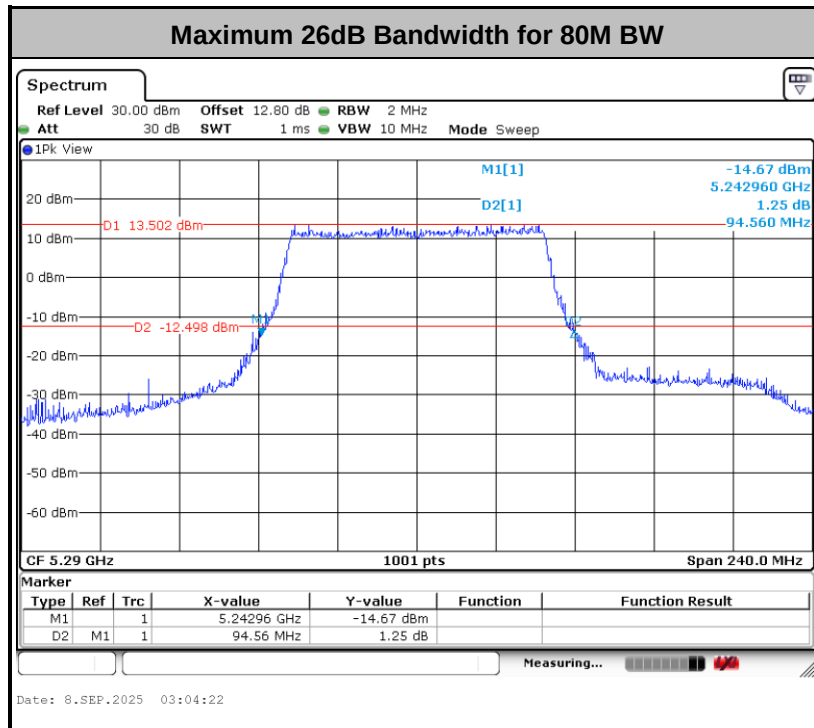

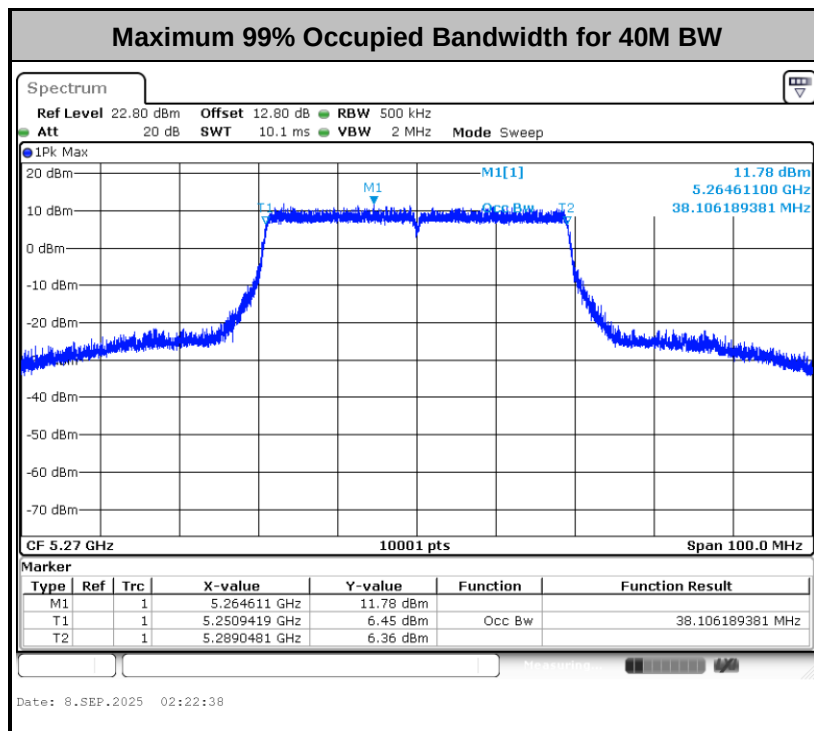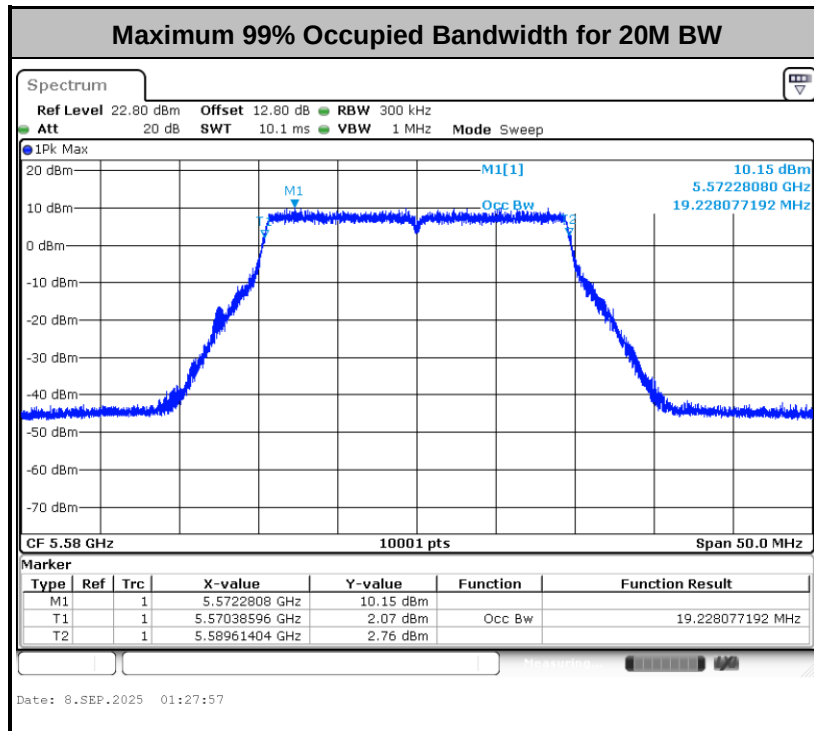

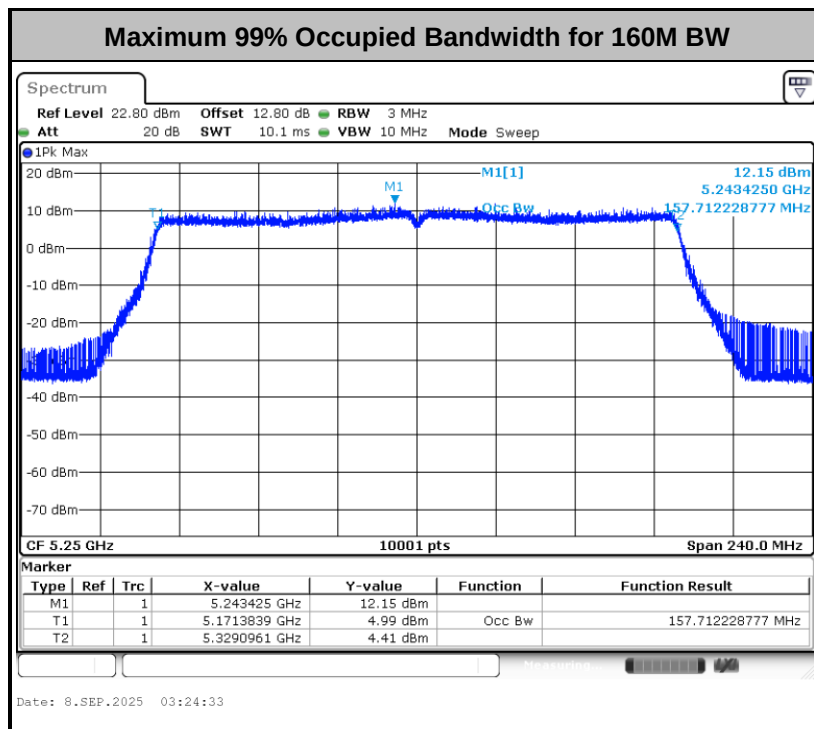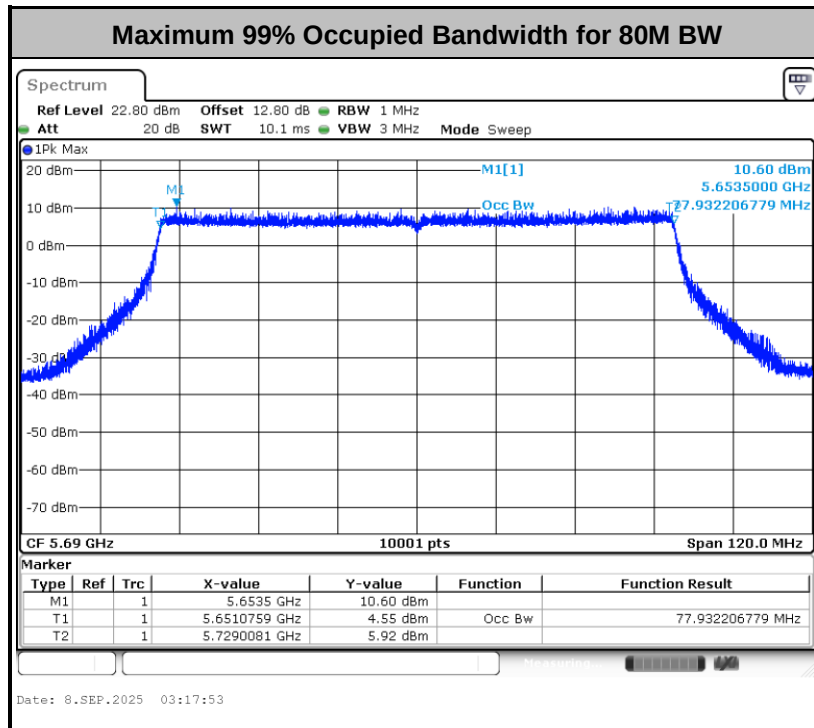

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log₁₀ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup



3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

<TXBF Modes>

Method SA-3

(power averaging (rms) detection with max hold):

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time $\leq$ (number of points in sweep) $\times$ T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
- Detector = power averaging (rms).
- Trace mode = max hold.
- Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

For devices operating in the band UNII-3**# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
 - Set VBW ≥ 1 MHz.
 - Number of points in sweep ≥ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a) for UNII-1/21-2C: Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (c) for UNII-3: Measure and add $10 \log(N_{\text{ANT}})$ dB, where N_{ANT} is the number of outputs. The measurement on each individual output were performed with the same span and number on each individual output. The quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit.


3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.

For devices operating in the bands UNII-1/2A/2C

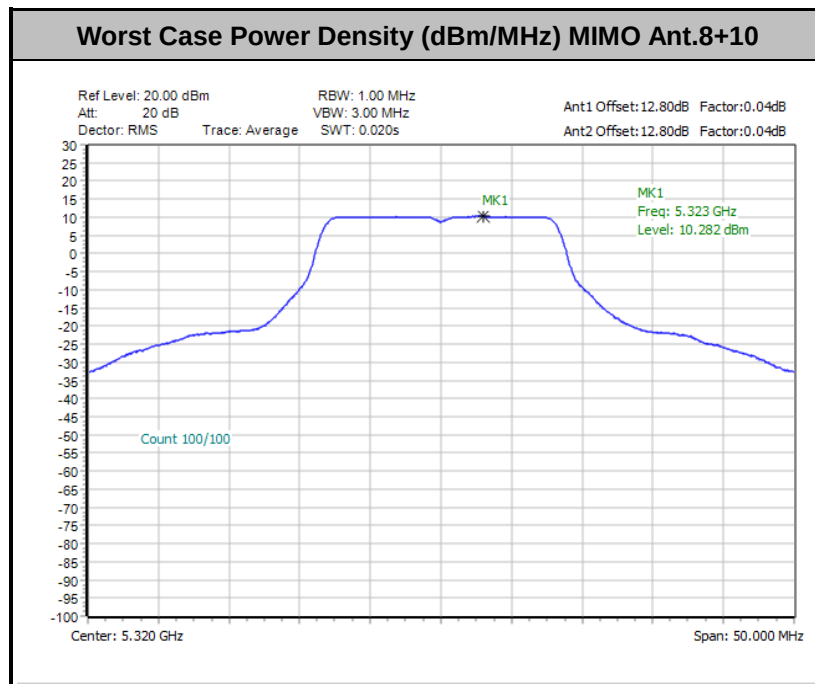



For devices operating in the band UNII-3

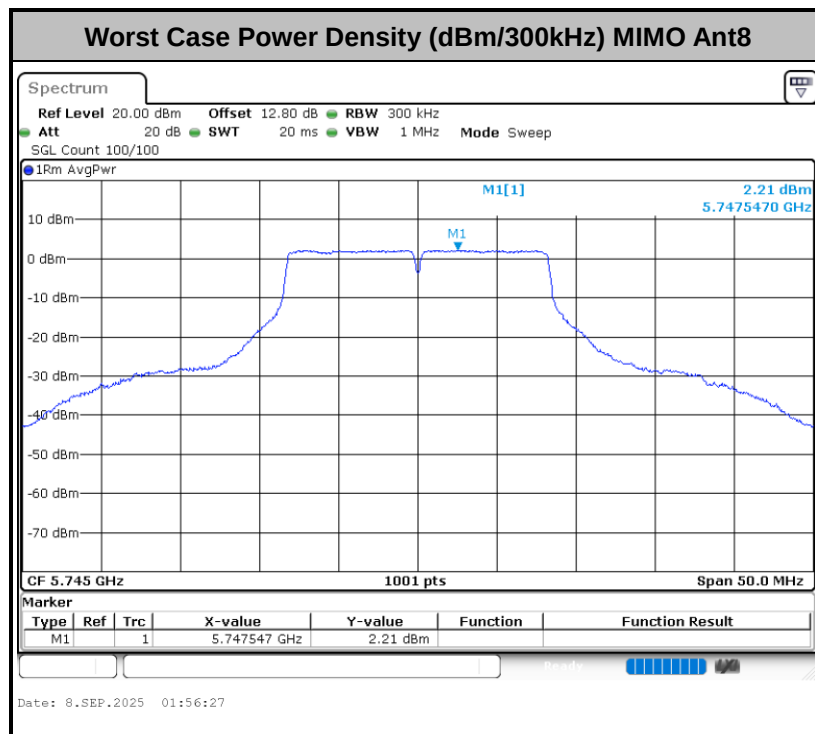

Note: Average Power Density (dB) = Measured value+ Duty Factor + 10 log(500kHz/RBW)



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

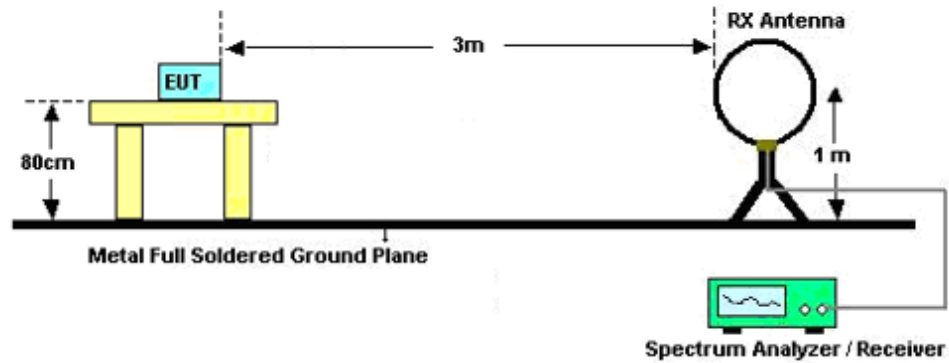

For radiated emissions from 30MHz to 1GHz

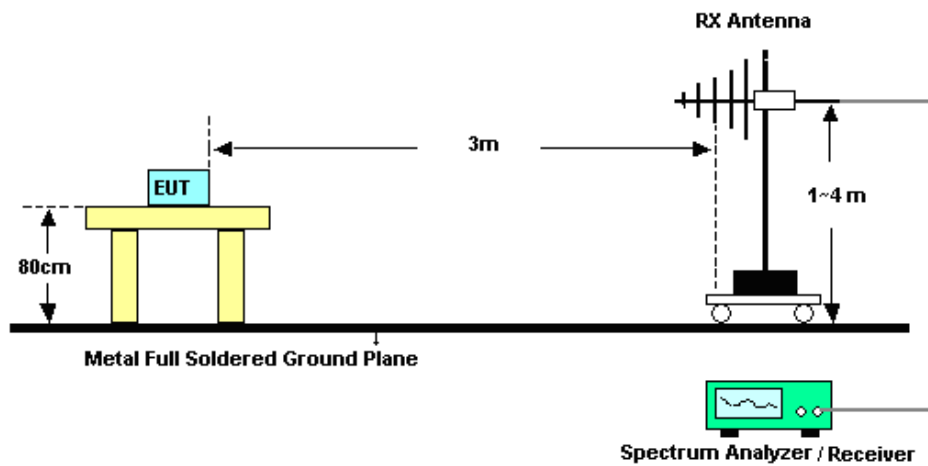

For radiated emissions above 1GHz

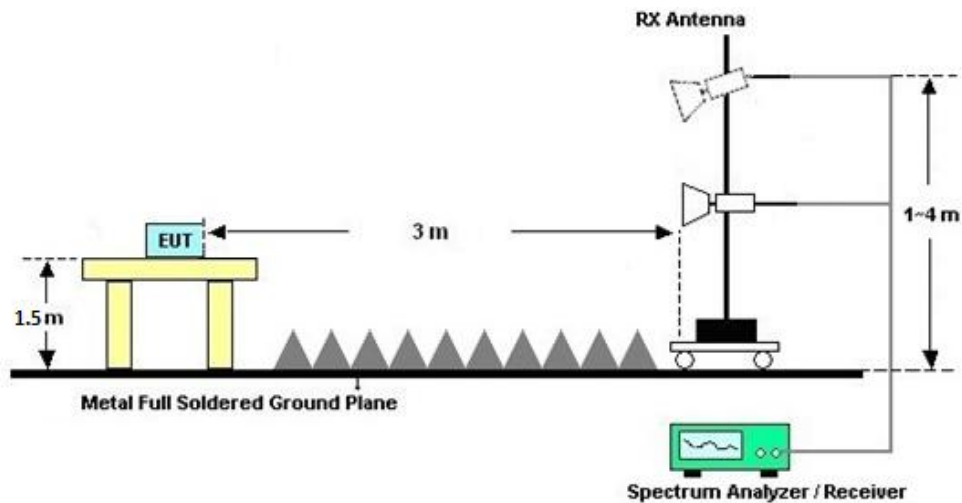

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

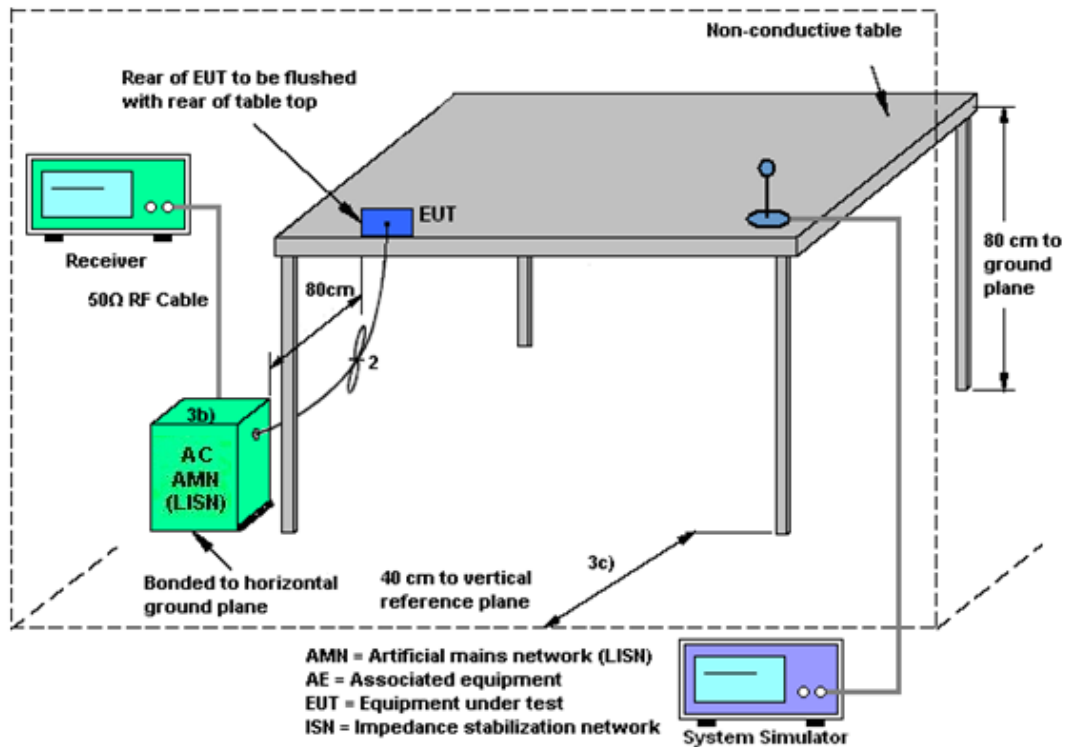

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(\text{NANT}/\text{NSS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $\text{NANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 8 (dBi)	Ant. 10 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
UNII-1	-2.30	-1.80	-1.80	0.96	0.00	0.00
UNII-2A	-2.30	-1.60	-1.60	1.07	0.00	0.00
UNII-2C	-1.60	-1.60	-1.60	1.41	0.00	0.00
UNII-3	-1.50	-1.60	-1.50	1.46	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Ma x 30dBm	Oct. 11, 2024	Sep. 18, 2025	Oct. 10, 2025	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2025	Sep. 18, 2025	Apr. 17, 2026	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2025	Sep. 18, 2025	Sep. 07, 2026	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Nov. 23, 2024	Sep. 18, 2025	Nov. 22, 2025	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251982	1GHz~18GHz	Aug. 16, 2025	Sep. 18, 2025	Aug. 15, 2026	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Sep. 18, 2025	Oct. 21, 2025	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 02, 2025	Sep. 18, 2025	Jul. 01, 2026	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 02, 2025	Sep. 18, 2025	Jan. 01, 2026	Radiation (03CH03-KS)
high gain Amplifier	EM	EM01G18GA	060834	1Ghz~18Ghz	Dec. 02, 2024	Sep. 18, 2025	Dec. 01, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM01G18GA	EM	1GHz~26.5GHz	Oct. 09, 2024	Sep. 18, 2025	Oct. 08, 2025	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 18, 2025	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 18, 2025	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 18, 2025	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 16, 2025	Sep. 16, 2025	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 19, 2025	Sep. 16, 2025	Aug. 18, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Sep. 16, 2025	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Sep. 16, 2025	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Sep. 07, 2025~Sep. 09, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Sep. 07, 2025~Sep. 09, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct.14,2024	Sep. 07, 2025~Sep. 09, 2025	Oct. 13, 2025	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.20 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.32 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	He Qingsheng	Temperature:	21~25	°C
Test Date:	2025/9/7~2025/9/9	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

UNII-1															
Mod.	Data Rate	NTx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	36	Full	5180	0.04	0.04	17.56	17.42	20.50	24.00		-1.80		Pass
11a	6Mbps	2	44	Full	5220	0.04	0.04	18.30	18.16	21.24	24.00		-1.80		Pass
11a	6Mbps	2	48	Full	5240	0.04	0.04	18.71	18.30	21.52	24.00		-1.80		Pass
HT20	MCS0	2	36	Full	5180	0.00	0.00	15.26	15.33	18.31	24.00		-1.80		Pass
HT20	MCS0	2	44	Full	5220	0.00	0.00	15.56	15.08	18.34	24.00		-1.80		Pass
HT20	MCS0	2	48	Full	5240	0.00	0.00	15.45	15.04	18.26	24.00		-1.80		Pass
HT40	MCS0	2	38	Full	5190	0.00	0.00	16.07	15.80	18.95	24.00		-1.80		Pass
HT40	MCS0	2	46	Full	5230	0.00	0.00	17.26	16.70	20.00	24.00		-1.80		Pass
VHT20	MCS0	2	36	Full	5180	0.00	0.00	18.13	18.50	21.33	24.00		-1.80		Pass
VHT20	MCS0	2	44	Full	5220	0.00	0.00	18.66	18.34	21.51	24.00		-1.80		Pass
VHT20	MCS0	2	48	Full	5240	0.00	0.00	18.75	18.16	21.48	24.00		-1.80		Pass
VHT40	MCS0	2	38	Full	5190	0.00	0.00	16.09	15.82	18.97	24.00		-1.80		Pass
VHT40	MCS0	2	46	Full	5230	0.00	0.00	18.33	17.96	21.16	24.00		-1.80		Pass
VHT80	MCS0	2	42	Full	5210	0.00	0.00	15.37	15.07	18.23	24.00		-1.80		Pass
HE20	MCS0	2	36	Full	5180	0.00	0.00	14.38	14.35	17.38	24.00		-1.80		Pass
			44	Full	5220	0.00	0.00	14.61	14.16	17.40	24.00		-1.80		Pass
			48	Full	5240	0.00	0.00	14.63	14.14	17.40	24.00		-1.80		Pass
HE40	MCS0	2	38	Full	5190	0.00	0.00	16.11	15.84	18.99	24.00		-1.80		Pass
			46	Full	5230	0.00	0.00	17.82	17.46	20.65	24.00		-1.80		Pass
HE80	MCS0	2	42	Full	5210	0.00	0.00	15.50	15.33	18.43	24.00		-1.80		Pass

TEST RESULTS DATA
26dB and 99% OBW

UNII-1													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	36	5180	17.32	17.36	27.72	35.34	-		22.39		
11a	6Mbps	2	44	5220	18.06	17.34	39.12	24.06	-		22.39		
11a	6Mbps	2	48	5240	17.33	17.23	24.18	23.52	-		22.36		

TEST RESULTS DATA
Power Spectral Density

UNII-1													
Mod.	Data Rate	NTx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 8	Ant 10		SUM		Ant 8	Ant 10	
11a	6Mbps	2	36	Full	5180	0.04	0.04	10.01	11.00		0.96		Pass
11a	6Mbps	2	44	Full	5220	0.04	0.04	9.78	11.00		0.96		Pass
11a	6Mbps	2	48	Full	5240	0.04	0.04	9.80	11.00		0.96		Pass

TEST RESULTS DATA
Average Power Table

UNII-2A																
Mod.	Data Rate	Ntx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10		
11a	6Mbps	2	52	Full	5260	0.04	0.04	18.49	18.12	21.32	23.98		-1.60		30	Pass
11a	6Mbps	2	60	Full	5300	0.04	0.04	18.84	18.28	21.58	23.98		-1.60		30	Pass
11a	6Mbps	2	64	Full	5320	0.04	0.04	18.59	18.57	21.59	23.98		-1.60		30	Pass
HT20	MCS0	2	52	Full	5260	0.00	0.00	16.49	16.02	19.27	23.98		-1.60		30	Pass
HT20	MCS0	2	60	Full	5300	0.00	0.00	16.53	16.15	19.35	23.98		-1.60		30	Pass
HT20	MCS0	2	64	Full	5320	0.00	0.00	16.33	16.42	19.39	23.98		-1.60		30	Pass
HT40	MCS0	2	54	Full	5270	0.00	0.00	18.43	17.77	21.12	23.98		-1.60		30	Pass
HT40	MCS0	2	62	Full	5310	0.00	0.00	17.24	17.00	20.13	23.98		-1.60		30	Pass
VHT20	MCS0	2	52	Full	5260	0.00	0.00	18.80	18.27	21.55	23.98		-1.60		30	Pass
VHT20	MCS0	2	60	Full	5300	0.00	0.00	18.83	18.25	21.56	23.98		-1.60		30	Pass
VHT20	MCS0	2	64	Full	5320	0.00	0.00	18.57	18.66	21.63	23.98		-1.60		30	Pass
VHT40	MCS0	2	54	Full	5270	0.00	0.00	18.46	17.85	21.18	23.98		-1.60		30	Pass
VHT40	MCS0	2	62	Full	5310	0.00	0.00	17.25	17.02	20.15	23.98		-1.60		30	Pass
VHT80	MCS0	2	58	Full	5290	0.00	0.00	14.65	14.52	17.60	23.98		-1.60		30	Pass
VHT160	MCS0	2	50	Full	5250	0.00	0.00	16.74	16.57	19.67	23.98		-1.60		30	Pass
HE20	MCS0	2	52	Full	5260	0.00	0.00	17.26	16.63	19.97	23.98		-1.60		30	Pass
			60	Full	5300	0.00	0.00	17.17	16.95	20.07	23.98		-1.60		30	Pass
			64	Full	5320	0.00	0.00	17.21	17.19	20.21	23.98		-1.60		30	Pass
HE40	MCS0	2	54	Full	5270	0.00	0.00	18.46	17.81	21.16	23.98		-1.60		30	Pass
			62	Full	5310	0.00	0.00	17.27	17.04	20.17	23.98		-1.60		30	Pass
HE80	MCS0	2	58	Full	5290	0.00	0.00	14.86	14.70	17.79	23.98		-1.60		30	Pass
HE160	MCS0	2	50	Full	5250	0.00	0.00	16.80	16.60	19.71	23.98		-1.60		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

UNII-2A															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	52	5260	17.36	17.26	24.48	24.12	23.37		29.37		23.98		
11a	6Mbps	2	60	5300	17.32	17.21	24.30	23.88	23.36		29.36		23.98		
11a	6Mbps	2	64	5320	17.44	17.22	24.96	24.00	23.36		29.36		23.98		

TEST RESULTS DATA
Power Spectral Density

UNII-2A													
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	52	Full	5260	0.04	0.04	9.77	11.00		1.07		Pass
11a	6Mbps	2	60	Full	5300	0.04	0.04	10.00	11.00		1.07		Pass
11a	6Mbps	2	64	Full	5320	0.04	0.04	10.28	11.00		1.07		Pass

TEST RESULTS DATA
Average Power Table

UNII-2C																
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10		
11a	6Mbps	2	100	Full	5500	0.04	0.04	18.61	17.20	20.97	23.98		-1.60		30	Pass
11a	6Mbps	2	116	Full	5580	0.04	0.04	18.30	18.43	21.38	23.98		-1.60		30	Pass
11a	6Mbps	2	140	Full	5700	0.04	0.04	18.47	18.06	21.28	23.98		-1.60		30	Pass
11a	6Mbps	2	144	Full	5720	0.04	0.04	18.45	18.18	21.33	23.98		-1.60		30	Pass
HT20	MCS0	2	100	Full	5500	0.00	0.00	16.45	16.23	19.35	23.98		-1.60		30	Pass
HT20	MCS0	2	116	Full	5580	0.00	0.00	16.12	16.26	19.20	23.98		-1.60		30	Pass
HT20	MCS0	2	140	Full	5700	0.00	0.00	16.20	15.65	18.94	23.98		-1.60		30	Pass
HT20	MCS0	2	144	Full	5720	0.00	0.00	16.14	16.06	19.11	23.98		-1.60		30	Pass
HT40	MCS0	2	102	Full	5510	0.00	0.00	15.87	15.85	18.87	23.98		-1.60		30	Pass
HT40	MCS0	2	110	Full	5550	0.00	0.00	17.79	17.95	20.88	23.98		-1.60		30	Pass
HT40	MCS0	2	134	Full	5670	0.00	0.00	17.76	17.38	20.58	23.98		-1.60		30	Pass
HT40	MCS0	2	142	Full	5710	0.00	0.00	17.81	17.76	20.80	23.98		-1.60		30	Pass
VHT20	MCS0	2	100	Full	5500	0.00	0.00	18.62	18.35	21.50	23.98		-1.60		30	Pass
VHT20	MCS0	2	116	Full	5580	0.00	0.00	18.22	18.34	21.29	23.98		-1.60		30	Pass
VHT20	MCS0	2	140	Full	5700	0.00	0.00	18.43	17.86	21.16	23.98		-1.60		30	Pass
VHT20	MCS0	2	144	Full	5720	0.00	0.00	18.36	18.21	21.30	23.98		-1.60		30	Pass
VHT40	MCS0	2	102	Full	5510	0.00	0.00	15.89	15.86	18.89	23.98		-1.60		30	Pass
VHT40	MCS0	2	110	Full	5550	0.00	0.00	17.86	17.99	20.94	23.98		-1.60		30	Pass
VHT40	MCS0	2	134	Full	5670	0.00	0.00	17.82	17.45	20.65	23.98		-1.60		30	Pass
VHT40	MCS0	2	142	Full	5710	0.00	0.00	17.90	17.78	20.85	23.98		-1.60		30	Pass
VHT80	MCS0	2	106	Full	5530	0.00	0.00	14.95	15.13	18.05	23.98		-1.60		30	Pass
VHT80	MCS0	2	122	Full	5610	0.00	0.00	16.42	16.80	19.62	23.98		-1.60		30	Pass
VHT80	MCS0	2	138	Full	5690	0.00	0.00	16.50	16.46	19.49	23.98		-1.60		30	Pass
VHT160	MCS0	2	114	Full	5570	0.00	0.00	16.26	16.53	19.41	23.98		-1.60		30	Pass
HE20	MCS0	2	100	Full	5500	0.00	0.00	16.50	16.46	19.49	23.98		-1.60		30	Pass
			116	Full	5580	0.00	0.00	16.24	16.30	19.28	23.98		-1.60		30	Pass
			140	Full	5700	0.00	0.00	16.27	15.88	19.09	23.98		-1.60		30	Pass
			144	Full	5720	0.00	0.00	16.31	16.16	19.25	23.98		-1.60		30	Pass
HE40	MCS0	2	102	Full	5510	0.00	0.00	15.91	15.89	18.91	23.98		-1.60		30	Pass
			110	Full	5550	0.00	0.00	17.82	17.97	20.91	23.98		-1.60		30	Pass
			134	Full	5670	0.00	0.00	17.77	17.42	20.61	23.98		-1.60		30	Pass
			142	Full	5710	0.00	0.00	17.85	17.80	20.84	23.98		-1.60		30	Pass
HE80	MCS0	2	106	Full	5530	0.00	0.00	15.20	15.29	18.26	23.98		-1.60		30	Pass
			122	Full	5610	0.00	0.00	16.13	16.54	19.35	23.98		-1.60		30	Pass
			138	Full	5690	0.00	0.00	16.27	16.20	19.25	23.98		-1.60		30	Pass
HE160	MCS0	2	114	Full	5570	0.00	0.00	16.29	16.58	19.45	23.98		-1.60		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

UNII-2C															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	100	5500	17.28	17.21	24.54	24.00	23.36		29.36		23.98		
11a	6Mbps	2	116	5580	17.28	17.18	24.42	23.46	23.35		29.35		23.98		
11a	6Mbps	2	140	5700	17.40	17.18	24.84	24.06	23.35		29.35		23.98		
11a	6Mbps	2	144	5720	17.40	17.17	24.36	23.46	23.35		29.35		23.98		

TEST RESULTS DATA
Power Spectral Density

UNII-2C													
Mod.	Data Rate	NTX	CH.		Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	100	Full	5500	0.04	0.04	9.99	11.00		1.41		Pass
11a	6Mbps	2	116	Full	5580	0.04	0.04	10.00	11.00		1.41		Pass
11a	6Mbps	2	140	Full	5700	0.04	0.04	9.78	11.00		1.41		Pass
11a	6Mbps	2	144	Full	5720	0.04	0.04	9.96	11.00		1.41		Pass

TEST RESULTS DATA
26dB and 99% OBW

UNII-1														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	
EHT20	MCS0	2	36	5180	Full	19.19	19.16	23.94	24.72	-		22.82		
EHT20	MCS0	2	44	5220	Full	19.17	19.17	23.82	24.84	-		22.83		
EHT20	MCS0	2	48	5240	Full	19.17	19.19	23.82	24.72	-		22.83		
EHT40	MCS0	2	38	5190	Full	38.10	38.09	45.36	45.72	-		23.01		
EHT40	MCS0	2	46	5230	Full	38.06	38.07	45.72	45.24	-		23.01		
EHT80	MCS0	2	42	5210	Full	77.94	77.86	93.60	92.64	-		23.01		

TEST RESULTS DATA
Average Power Table

UNII-1																
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10		
EHT20	MCS0	2	36	Full	5180	0.00	0.00	18.25	18.62	21.45	24.00		-1.80		Pass	19
				26/0		0.00	0.00	8.85	8.28	11.58	24.00		-1.80		Pass	8.5
				52/37		0.00	0.00	11.92	11.65	14.80	24.00		-1.80		Pass	11.5
				106/53		0.00	0.00	14.86	14.76	17.82	24.00		-1.80		Pass	14.5
				52+26/38+1		0.00	0.00	13.34	13.27	16.32	24.00		-1.80		Pass	13
				106+26/53+4		0.00	0.00	15.92	15.88	18.91	24.00		-1.80		Pass	15.5
			44	Full	5220	0.00	0.00	18.79	18.47	21.64	24.00		-1.80		Pass	19
			48	Full	5240	0.00	0.00	18.86	18.27	21.59	24.00		-1.80		Pass	19
EHT40	MCS0	2	38	Full	5190	0.00	0.00	16.16	16.04	19.11	24.00		-1.80		Pass	16
			46	Full	5230	0.00	0.00	18.40	18.07	21.25	24.00		-1.80		Pass	18
EHT80	MCS0	2	42	Full	5210	0.00	0.00	15.61	15.44	18.54	24.00		-1.80		Pass	15.5
				Large RU 484+242 ^①		0.00	0.00	14.50	14.00	17.27	24.00		-1.80		Pass	14
				Puncturing 20M ^②		0.00	0.00	14.71	14.12	17.44	24.00		-1.80		Pass	14

TEST RESULTS DATA
Power Spectral Density

UNII-1													
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
EHT20	MCS0	2	36	Full	5180	0.00	0.00	9.35	11.00		0.96		Pass
				26/0		0.00	0.00	8.90	11.00		0.96		Pass
				52/37		0.00	0.00	9.13	11.00		0.96		Pass
				106/53		0.00	0.00	9.07	11.00		0.96		Pass
				52+26/38+1		0.00	0.00	8.85	11.00		0.96		Pass
				106+26/53+4		0.00	0.00	9.17	11.00		0.96		Pass
	MCS0	2	44	Full	5220	0.00	0.00	9.60	11.00		0.96		Pass
	MCS0	2	48	Full	5240	0.00	0.00	9.21	11.00		0.96		Pass
EHT40	MCS0	2	38	Full	5190	0.00	0.00	5.65	11.00		0.96		Pass
	MCS0	2	46	Full	5230	0.00	0.00	5.75	11.00		0.96		Pass
EHT80	MCS0	2	42	Full	5210	0.00	0.00	2.54	11.00		0.96		Pass
				Large RU 484+242④		0.00	0.00	1.98	11.00		0.96		Pass
				Puncturing 20M④		0.00	0.00	2.05	11.00		0.96		Pass

TEST RESULTS DATA
26dB and 99% OBW

UNII-2A																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	
EHT20	MCS0	2	52	5260	Full	19.19	19.17	23.76	24.24	23.83		29.83		23.98		
EHT20	MCS0	2	60	5300	Full	19.17	19.18	23.94	24.30	23.83		29.83		23.98		
EHT20	MCS0	2	64	5320	Full	19.17	19.18	23.64	24.18	23.83		29.83		23.98		
EHT40	MCS0	2	54	5270	Full	38.11	38.07	46.68	46.32	23.98		30.00		23.98		
EHT40	MCS0	2	62	5310	Full	38.07	38.07	45.84	45.84	23.98		30.00		23.98		
EHT80	MCS0	2	58	5290	Full	77.92	77.88	94.56	92.16	23.98		30.00		23.98		
					Puncturing 20M①	60.65	62.36	-	-	23.98		30.00		-		
EHT160	MCS0	2	50	5250	Full	157.50	157.71	178.08	179.04	23.98		30.00		23.98		
					Puncturing 20M⑧	139.45	138.73	-	-	23.98		30.00		-		
					Puncturing 40M④	119.24	119.72	-	-	23.98		30.00		-		

TEST RESULTS DATA
Average Power Table

UNII-2A																	
Mod.	Data Rate	Ntx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10			
EHT20	MCS0	2	52	Full	5260	0.00	0.00	18.93	18.40	21.68	23.98	-1.60	30	Pass	19		
			60	Full	5300	0.00	0.00	18.95	18.37	21.68	23.98	-1.60	30	Pass	19		
			64	Full	5320	0.00	0.00	18.70	18.79	21.76	23.98	-1.60	30	Pass	19		
				26/8		0.00	0.00	9.03	8.18	11.64	23.98	-1.60	30	Pass	8.5		
				52/40		0.00	0.00	11.78	11.60	14.70	23.98	-1.60	30	Pass	11.5		
				106/54		0.00	0.00	15.01	14.73	17.88	23.98	-1.60	30	Pass	14.5		
				52+26/39+7		0.00	0.00	13.48	13.36	16.43	23.98	-1.60	30	Pass	13		
				106+26/54+4		0.00	0.00	15.96	15.71	18.85	23.98	-1.60	30	Pass	15.5		
EHT40	MCS0	2	54	Full	5270	0.00	0.00	18.56	17.90	21.25	23.98	-1.60	30	Pass	18		
			62	Full	5310	0.00	0.00	17.36	17.23	20.31	23.98	-1.60	30	Pass	17		
			EHT80	MCS0	2	58	Full	5290	0.00	0.00	14.97	14.81	17.90	23.98	-1.60	30	Pass
Large RU 484+242②	0.00	0.00				14.03	13.42		16.75	23.98	-1.60	30	Pass	13.5			
Puncturing 20M①	0.00	0.00				14.03	13.38		16.73	23.98	-1.60	30	Pass	13.5			
EHT160	MCS0	2	50	Full	5250	0.00	0.00	16.88	16.66	19.78	23.98	-1.60	30	Pass	16		
				Large RU 996+484④		0.00	0.00	14.58	14.03	17.32	23.98	-1.60	30	Pass	14		
				Puncturing 20M①		0.00	0.00	15.75	14.92	18.37	23.98	-1.60	30	Pass	15		
				Puncturing 20M⑧		0.00	0.00	15.68	14.93	18.33	23.98	-1.60	30	Pass	15		
				Puncturing 40M①		0.00	0.00	15.14	14.45	17.82	23.98	-1.60	30	Pass	14.5		
				Puncturing 40M④		0.00	0.00	14.53	14.05	17.31	23.98	-1.60	30	Pass	14		

TEST RESULTS DATA
Power Spectral Density

UNII-2A													
Mod.	Data Rate	Ntx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
EHT20	MCS0	2	52	Full	5260	0.00	0.00	9.17	11.00		1.07		Pass
EHT20	MCS0	2	60	Full	5300	0.00	0.00	9.41	11.00		1.07		Pass
EHT20	MCS0	2	64	Full	5320	0.00	0.00	9.56	11.00		1.07		Pass
				26/8		0.00	0.00	9.15	11.00		1.07		Pass
				52/40		0.00	0.00	9.32	11.00		1.07		Pass
				106/54		0.00	0.00	9.37	11.00		1.07		Pass
				52+26/39+7		0.00	0.00	9.13	11.00		1.07		Pass
				106+26/54+4		0.00	0.00	9.48	11.00		1.07		Pass
EHT40	MCS0	2	54	Full	5270	0.00	0.00	5.75	11.00		1.07		Pass
EHT40	MCS0	2	62	Full	5310	0.00	0.00	5.77	11.00		1.07		Pass
EHT80	MCS0	2	58	Full	5290	0.00	0.00	2.63	11.00		1.07		Pass
				Large RU 484+242②		0.00	0.00	2.36	11.00		1.07		Pass
				Puncturing 20M①		0.00	0.00	2.43	11.00		1.07		Pass
EHT160	MCS0	2	50	Full	5250	0.00	0.00	-1.43	11.00		1.07		Pass
				Large RU 996+484④		0.00	0.00	-1.87	11.00		1.07		Pass
				Puncturing 20M①		0.00	0.00	-1.54	11.00		1.07		Pass
				Puncturing 20M③		0.00	0.00	-1.45	11.00		1.07		Pass
				Puncturing 40M①		0.00	0.00	-1.58	11.00		1.07		Pass
				Puncturing 40M④		0.00	0.00	-1.83	11.00		1.07		Pass

TEST RESULTS DATA
26dB and 99% OBW

UNII-2C																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	
EHT20	MCS0	2	100	5500	Full	19.18	19.16	23.94	24.72	23.82		29.82		23.98		
EHT20	MCS0	2	116	5580	Full	19.16	19.23	23.70	24.48	23.82		29.82		23.98		
EHT20	MCS0	2	140	5700	Full	19.21	19.19	23.58	24.30	23.83		29.83		23.98		
EHT20	MCS0	2	144	5720	Full	19.21	19.19	23.70	24.78	23.83		29.83		23.98		
EHT40	MCS0	2	102	5510	Full	38.04	38.05	46.20	46.92	23.98		30.00		23.98		
EHT40	MCS0	2	110	5550	Full	38.03	38.03	46.32	44.88	23.98		30.00		23.98		
EHT40	MCS0	2	134	5670	Full	38.07	38.06	46.08	45.72	23.98		30.00		23.98		
EHT40	MCS0	2	142	5710	Full	38.11	38.06	45.60	46.08	23.98		30.00		23.98		
EHT80	MCS0	2	106	5530	Full	77.87	77.88	93.60	93.12	23.98		30.00		23.98		
					Puncturing 20M④	59.26	59.14	-	-	23.98		30.00		-		
EHT80	MCS0	2	122	5610	Full	77.90	77.87	92.64	93.12	23.98		30.00		23.98		
					Puncturing 20M①	60.35	62.60	-	-	23.98		30.00		-		
EHT80	MCS0	2	138	5690	Full	77.93	77.90	94.08	92.88	23.98		30.00		23.98		
EHT160	MCS0	2	114	5570	Full	157.62	157.26	176.16	175.68	23.98		30.00		23.98		
					Puncturing 20M③	138.95	138.25	-	-	23.98		30.00		-		
					Puncturing 40M④	119.10	118.72	-	-	23.98		30.00		-		

TEST RESULTS DATA
Average Power Table

UNII-2C																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10			
EHT20	MCS0	2	100	Full	5500	0.00	0.00	18.74	18.47	21.62	23.98	-1.60	30	Pass	19		
				26/0		0.00	0.00	8.81	8.24	11.54	23.98	-1.60	30	Pass	8.5		
				52/37		0.00	0.00	11.55	11.69	14.63	23.98	-1.60	30	Pass	11.5		
				106/53		0.00	0.00	14.82	14.76	17.80	23.98	-1.60	30	Pass	14.5		
				52+26/38+1		0.00	0.00	13.18	13.37	16.29	23.98	-1.60	30	Pass	13		
				106+26/53+4		0.00	0.00	15.88	15.73	18.82	23.98	-1.60	30	Pass	15.5		
			140	Full	5580	0.00	0.00	18.35	18.48	21.43	23.98	-1.60	30	Pass	19		
				Full	5700	0.00	0.00	18.54	18.00	21.29	23.98	-1.60	30	Pass	19		
				26/8		0.00	0.00	8.79	7.77	11.32	23.98	-1.60	30	Pass	8.5		
				52/40		0.00	0.00	11.52	11.18	14.36	23.98	-1.60	30	Pass	11.5		
				106/54		0.00	0.00	14.79	14.26	17.54	23.98	-1.60	30	Pass	14.5		
				52+26/39+7		0.00	0.00	13.65	13.13	16.41	23.98	-1.60	30	Pass	13.5		
				106+26/54+4		0.00	0.00	15.68	15.23	18.47	23.98	-1.60	30	Pass	15.5		
				144	Full	5720	0.00	0.00	18.49	18.33	21.42	23.98	-1.60	30	Pass	19	
EHT40	MCS0	2	102	Full	5510	0.00	0.00	16.03	16.06	19.06	23.98	-1.60	30	Pass	16		
			110	Full	5550	0.00	0.00	17.91	18.07	21.00	23.98	-1.60	30	Pass	18		
			134	Full	5670	0.00	0.00	17.87	17.52	20.71	23.98	-1.60	30	Pass	18		
			142	Full	5710	0.00	0.00	17.94	17.89	20.93	23.98	-1.60	30	Pass	18		
EHT80	MCS0	2	106	Full	5530	0.00	0.00	15.22	15.32	18.28	23.98	-1.60	30	Pass	15.5		
				Large RU 484+242 ①		0.00	0.00	14.14	14.04	17.10	23.98	-1.60	30	Pass	14		
				Puncturing 20M ④		0.00	0.00	14.14	14.07	17.12	23.98	-1.60	30	Pass	14		
			122	Full	5610	0.00	0.00	16.61	17.04	19.84	23.98	-1.60	30	Pass	17		
				Large RU 484+242 ②		0.00	0.00	15.55	15.65	18.61	23.98	-1.60	30	Pass	15.5		
				Puncturing 20M ①		0.00	0.00	15.53	15.62	18.59	23.98	-1.60	30	Pass	15.5		
138	Full	5690	0.00	0.00	16.72	16.65	19.70	23.98	-1.60	30	Pass	17					
EHT160	MCS0	2	114	Full	5570	0.00	0.00	16.36	16.63	19.51	23.98	-1.60	30	Pass	16		
				Large RU 996+484 ①		0.00	0.00	14.08	14.20	17.15	23.98	-1.60	30	Pass	14		
				Puncturing 20M ①		0.00	0.00	15.10	15.11	18.12	23.98	-1.60	30	Pass	15		
				Puncturing 20M ③		0.00	0.00	14.17	14.18	17.19	23.98	-1.60	30	Pass	14		
				Puncturing 40M ①		0.00	0.00	14.12	14.15	17.15	23.98	-1.60	30	Pass	14		
				Puncturing 40M ④		0.00	0.00	14.57	14.67	17.63	23.98	-1.60	30	Pass	14.5		

TEST RESULTS DATA
Power Spectral Density

UNII-2C													
Mod.	Data Rate	NTx	CH.		Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
EHT20	MCS0	2	100	Full	5500	0.00	0.00	9.58	11.00	1.41		Pass	
				26/0		0.00	0.00	9.05	11.00	1.41	Pass		
				52/37		0.00	0.00	9.18	11.00	1.41	Pass		
				106/53		0.00	0.00	9.26	11.00	1.41	Pass		
				52+26/38+1		0.00	0.00	9.01	11.00	1.41	Pass		
				106+26/53+4		0.00	0.00	9.39	11.00	1.41	Pass		
EHT20	MCS0	2	116	Full	5580	0.00	0.00	9.40	11.00	1.41		Pass	
EHT20	MCS0	2	140	Full	5700	0.00	0.00	9.12	11.00	1.41		Pass	
				26/8		0.00	0.00	8.56	11.00	1.41	Pass		
				52/40		0.00	0.00	8.69	11.00	1.41	Pass		
				106/54		0.00	0.00	8.81	11.00	1.41	Pass		
				52+26/39+7		0.00	0.00	8.95	11.00	1.41	Pass		
				106+26/54+4		0.00	0.00	8.95	11.00	1.41	Pass		
EHT20	MCS0	2	144	Full	5720	0.00	0.00	9.25	11.00	1.41		Pass	
EHT40	MCS0	2	102	Full	5510	0.00	0.00	5.45	11.00	1.41		Pass	
EHT40	MCS0	2	110	Full	5550	0.00	0.00	5.47	11.00	1.41		Pass	
EHT40	MCS0	2	134	Full	5670	0.00	0.00	5.34	11.00	1.41		Pass	
EHT40	MCS0	2	142	Full	5710	0.00	0.00	5.29	11.00	1.41		Pass	
EHT80	MCS0	2	106	Full	5530	0.00	0.00	2.32	11.00	1.41		Pass	
				Large RU 484+242 ^④		0.00	0.00	1.72	11.00	1.41	Pass		
				Puncturing 20M ^④		0.00	0.00	1.67	11.00	1.41	Pass		
EHT80	MCS0	2	122	Full	5610	0.00	0.00	2.07	11.00	1.41		Pass	
				Large RU 484+242 ^②		0.00	0.00	1.87	11.00	1.41	Pass		
				Puncturing 20M ^①		0.00	0.00	1.93	11.00	1.41	Pass		
EHT80	MCS0	2	138	Full	5690	0.00	0.00	1.93	11.00	1.41		Pass	
EHT160	MCS0	2	114	Full	5570	0.00	0.00	-1.60	11.00	1.41		Pass	
				Large RU 996+484 ^④		0.00	0.00	-2.16	11.00	1.41	Pass		
				Puncturing 20M ^①		0.00	0.00	-1.70	11.00	1.41	Pass		
				Puncturing 20M ^⑧		0.00	0.00	-1.77	11.00	1.41	Pass		
				Puncturing 40M ^①		0.00	0.00	-2.12	11.00	1.41	Pass		
				Puncturing 40M ^④		0.00	0.00	-1.74	11.00	1.41	Pass		

TEST RESULTS DATA
Average Power Table

UNII-3																
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10		
11a	6Mbps	2	149	Full	5745	0.04	0.04	18.47	18.26	21.38	30.00	-1.50		Pass	19	
11a	6Mbps	2	157	Full	5785	0.04	0.04	18.56	18.10	21.35	30.00	-1.50		Pass	19	
11a	6Mbps	2	165	Full	5825	0.04	0.04	18.24	18.17	21.22	30.00	-1.50		Pass	19	
HT20	MCS0	2	149	Full	5745	0.00	0.00	18.28	18.11	21.21	30.00	-1.50		Pass	19	
HT20	MCS0	2	157	Full	5785	0.00	0.00	18.43	18.20	21.33	30.00	-1.50		Pass	19	
HT20	MCS0	2	165	Full	5825	0.00	0.00	18.38	18.12	21.26	30.00	-1.50		Pass	19	
HT40	MCS0	2	151	Full	5755	0.00	0.00	18.12	17.74	20.94	30.00	-1.50		Pass	18	
HT40	MCS0	2	159	Full	5795	0.00	0.00	18.06	17.68	20.88	30.00	-1.50		Pass	18	
VHT20	MCS0	2	149	Full	5745	0.00	0.00	18.52	18.24	21.39	30.00	-1.50		Pass	19	
VHT20	MCS0	2	157	Full	5785	0.00	0.00	18.45	18.21	21.34	30.00	-1.50		Pass	19	
VHT20	MCS0	2	165	Full	5825	0.00	0.00	18.41	18.15	21.29	30.00	-1.50		Pass	19	
VHT40	MCS0	2	151	Full	5755	0.00	0.00	18.18	17.81	21.01	30.00	-1.50		Pass	18	
VHT40	MCS0	2	159	Full	5795	0.00	0.00	18.11	17.69	20.92	30.00	-1.50		Pass	18	
VHT80	MCS0	2	155	Full	5775	0.00	0.00	16.72	16.41	19.58	30.00	-1.50		Pass	17	
HE20	MCS0	2	149	Full	5745	0.00	0.00	18.72	18.38	21.56	30.00	-1.50		Pass	19	
HE20	MCS0	2	157	Full	5785	0.00	0.00	18.64	18.37	21.52	30.00	-1.50		Pass	19	
HE20	MCS0	2	165	Full	5825	0.00	0.00	18.58	18.27	21.44	30.00	-1.50		Pass	19	
HE40	MCS0	2	151	Full	5755	0.00	0.00	18.16	17.77	20.98	30.00	-1.50		Pass	18	
HE40	MCS0	2	159	Full	5795	0.00	0.00	18.10	17.71	20.92	30.00	-1.50		Pass	18	
HE80	MCS0	2	155	Full	5775	0.00	0.00	16.76	16.48	19.63	30.00	-1.50		Pass	17	

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

UNII-3													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	149	5745	17.51	17.19	24.90	24.06	16.45	16.45	0.5		Pass
11a	6Mbps	2	157	5785	17.34	17.15	24.54	23.76	16.40	16.40	0.5		Pass
11a	6Mbps	2	165	5825	17.27	17.16	24.42	24.00	16.45	16.45	0.5		Pass

TEST RESULTS DATA
Power Spectral Density

UNII-3																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Worst+3.01	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	149	Full	5745	0.04	0.04	2.22	4.47	3.89	7.48	30.00		1.46		Pass	
11a	6Mbps	2	157	Full	5785	0.04	0.04	2.22	4.41	4.18	7.42	30.00		1.46		Pass	
11a	6Mbps	2	165	Full	5825	0.04	0.04	2.22	4.20	4.02	7.21	30.00		1.46		Pass	

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

UNII-3														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	
EHT20	MCS0	2	149	5745	Full	19.21	19.22	23.82	24.73	19.15	19.05	0.5		Pass
					26/0	-	-	-	-	2.10	2.10	0.5		Pass
EHT20	MCS0	2	157	5785	Full	19.18	19.18	23.64	24.84	19.10	19.05	0.5		Pass
					Full	19.18	19.18	24.12	24.60	19.10	18.95	0.5		Pass
EHT20	MCS0	2	165	5825	Full	-	-	-	-	2.15	2.10	0.5		Pass
					26/8	-	-	-	-	2.15	2.10	0.5		Pass
EHT40	MCS0	2	151	5755	Full	38.10	38.07	45.60	45.48	38.34	38.43	0.5		Pass
EHT40	MCS0	2	159	5795	Full	38.04	38.08	46.32	45.96	38.25	38.25	0.5		Pass
					Full	77.97	77.91	94.08	92.88	78.56	78.56	0.5		Pass
EHT80	MCS0	2	155	5775	Puncturing 20MHz	59.37	59.18	-	-	-	-	0.5		Pass
					Puncturing 20MHz	60.38	62.95	-	-	-	-	0.5		Pass

TEST RESULTS DATA
Average Power Table


UNII-3																
Mod.	Data Rate	NTx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10		
EHT20	MCS0	2	149	Full	5745	0.00	0.00	18.77	18.40	21.60	30.00		-1.50	Pass	19	
				26/0		0.00	0.00	9.10	8.60	11.87	30.00		-1.50	Pass	8.5	
				52/37		0.00	0.00	11.95	11.56	14.77	30.00		-1.50	Pass	11.5	
				106/53		0.00	0.00	15.05	14.57	17.83	30.00		-1.50	Pass	14.5	
				52+26/38+1		0.00	0.00	14.05	13.50	16.79	30.00		-1.50	Pass	13.5	
				106+26/53+4		0.00	0.00	16.18	15.54	18.88	30.00		-1.50	Pass	15.5	
EHT20	MCS0	2	157	Full	5785	0.00	0.00	18.68	18.39	21.55	30.00		-1.50	Pass	19	
EHT20	MCS0	2	165	Full	5825	0.00	0.00	18.61	18.30	21.47	30.00		-1.50	Pass	19	
				26/8		0.00	0.00	8.94	8.51	11.74	30.00		-1.50	Pass	8.5	
				52/40		0.00	0.00	11.68	11.83	14.77	30.00		-1.50	Pass	11.5	
				106/54		0.00	0.00	14.96	14.62	17.80	30.00		-1.50	Pass	14.5	
				52+26/39+7		0.00	0.00	13.74	13.66	16.71	30.00		-1.50	Pass	13.5	
				106+26/54+4		0.00	0.00	15.96	15.56	18.77	30.00		-1.50	Pass	15.5	
EHT40	MCS0	2	151	Full	5755	0.00	0.00	18.18	17.81	21.01	30.00		-1.50	Pass	18	
EHT40	MCS0	2	159	Full	5795	0.00	0.00	18.13	17.76	20.96	30.00		-1.50	Pass	18	
EHT80	MCS0	2	155	Full	5775	0.00	0.00	16.83	16.54	19.70	30.00		-1.50	Pass	17	
				Large RU 484+242 ⁽⁴⁾		0.00	0.00	16.07	15.57	18.84	30.00		-1.50	Pass	15.5	
				Puncturing 20M ⁽⁴⁾		0.00	0.00	16.05	15.58	18.83	30.00		-1.50	Pass	15.5	
				Puncturing 20M ⁽¹⁾		0.00	0.00	15.94	15.45	18.71	30.00		-1.50	Pass	15.5	

TEST RESULTS DATA
Power Spectral Density

UNII-3																	
Mod.	Data Rate	Ntx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Worst+3.01	Ant 8	Ant 10	Ant 8	Ant 10	
EHT20	MCS0	2	149	Full	5745	0.00	0.00	2.22	2.22	3.89	3.19	6.90	30.00		1.46	Pass	
				26/0		0.00	0.00	2.22	3.48	2.91	6.49	30.00		1.46	Pass		
				52/37		0.00	0.00	2.22	3.28	2.95	6.29	30.00		1.46	Pass		
				106/53		0.00	0.00	2.22	3.24	2.88	6.25	30.00		1.46	Pass		
				52+26/38+1		0.00	0.00	2.22	3.62	3.10	6.63	30.00		1.46	Pass		
				106+26/53+4		0.00	0.00	2.22	3.43	2.89	6.44	30.00		1.46	Pass		
EHT20	MCS0	2	157	Full	5785	0.00	0.00	2.22	3.74	3.43	6.75	30.00		1.46	Pass		
EHT20	MCS0	2	165	Full	5825	0.00	0.00	2.22	3.36	3.51	6.52	30.00		1.46	Pass		
				26/8		0.00	0.00	2.22	3.29	2.75	6.30	30.00		1.46	Pass		
				52/40		0.00	0.00	2.22	2.95	3.13	6.14	30.00		1.46	Pass		
				106/54		0.00	0.00	2.22	3.11	2.81	6.12	30.00		1.46	Pass		
				52+26/39+7		0.00	0.00	2.22	3.27	3.20	6.28	30.00		1.46	Pass		
				106+26/54+4		0.00	0.00	2.22	3.31	3.01	6.32	30.00		1.46	Pass		
EHT40	MCS0	2	151	Full	5755	0.00	0.00	2.22	-0.16	-0.60	2.85	30.00		1.46	Pass		
EHT40	MCS0	2	159	Full	5795	0.00	0.00	2.22	0.00	-0.36	3.01	30.00		1.46	Pass		
EHT80	MCS0	2	155	Full	5775	0.00	0.00	2.22	-3.38	-3.94	-0.37	30.00		1.46	Pass		
	MCS0	2				0.00	0.00	2.22	-3.61	-4.10	-0.60	30.00		1.46	Pass		
	MCS0	2				0.00	0.00	2.22	-3.83	-4.35	-0.82	30.00		1.46	Pass		
	MCS0	2				0.00	0.00	2.22	-3.45	-3.98	-0.44	30.00		1.46	Pass		

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3 ~ 26.2°C
		Relative Humidity :	38 ~ 40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

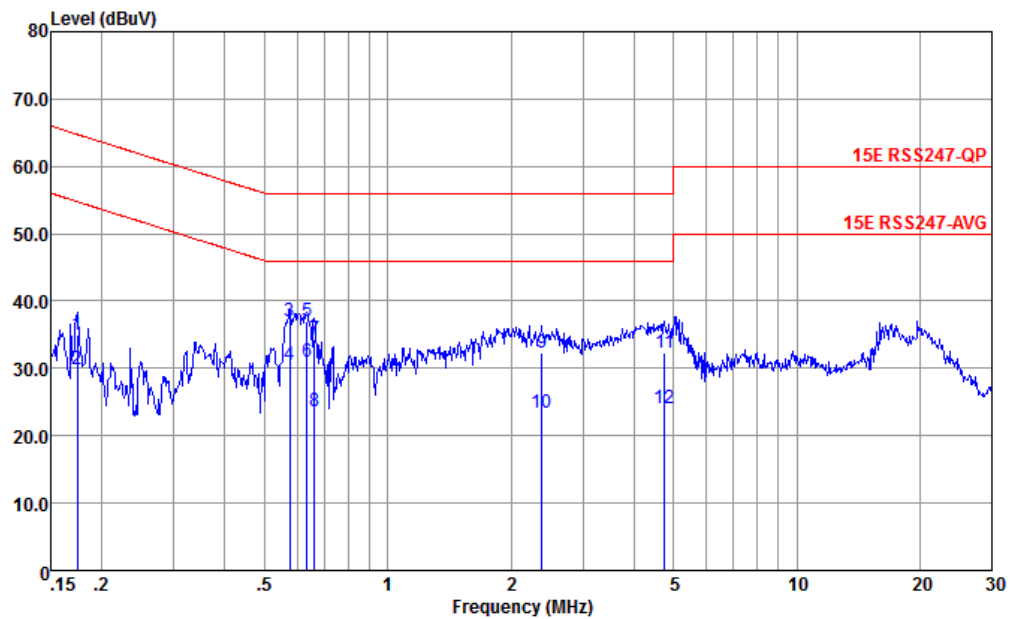


Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-L 24+80 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.174	35.01	-29.76	64.77	24.30	0.25	10.46	QP
2	0.174	29.91	-24.86	54.77	19.20	0.25	10.46	Average
3	0.576	37.05	-18.95	56.00	26.30	0.37	10.38	QP
4	0.576	30.55	-15.45	46.00	19.80	0.37	10.38	Average
5	0.634	37.03	-18.97	56.00	26.30	0.37	10.36	QP
6 *	0.634	31.03	-14.97	46.00	20.30	0.37	10.36	Average
7	0.661	34.23	-21.77	56.00	23.50	0.38	10.35	QP
8	0.661	23.53	-22.47	46.00	12.80	0.38	10.35	Average
9	2.384	32.25	-23.75	56.00	21.60	0.42	10.23	QP
10	2.384	23.45	-22.55	46.00	12.80	0.42	10.23	Average
11	4.746	32.21	-23.79	56.00	21.60	0.41	10.20	QP
12	4.746	24.11	-21.89	46.00	13.50	0.41	10.20	Average



Test Engineer :	Amos	Temperature :	25.3 ~ 26.2°C
		Relative Humidity :	38 ~ 40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

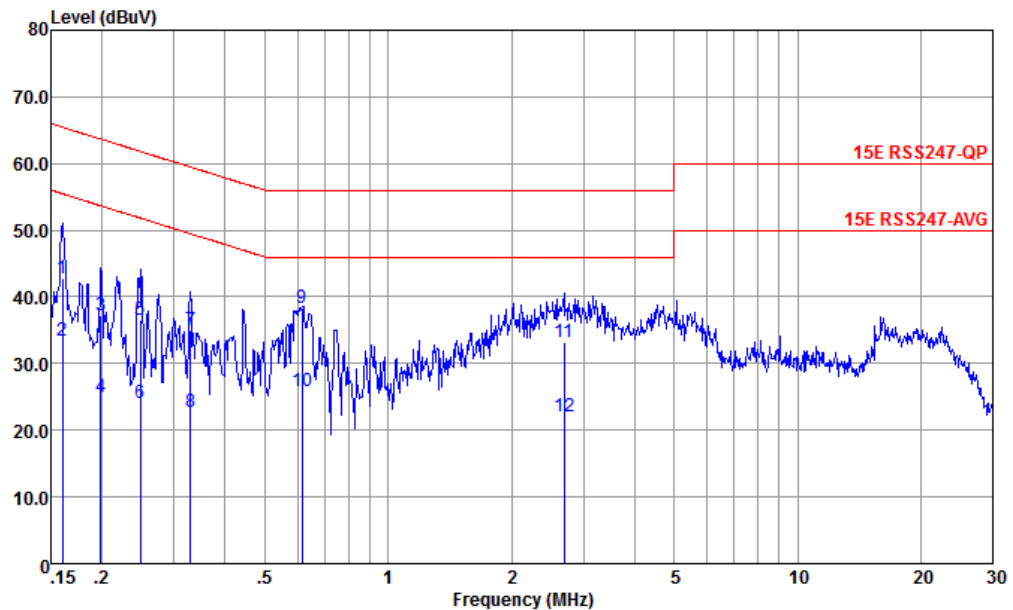

Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-N 24+80 NEUTRAL
 Project : (FZ) 582814

	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	42.89	-22.58	65.47	32.20	0.24	10.45	QP
2	0.160	33.49	-21.98	55.47	22.80	0.24	10.45	Average
3	0.199	37.20	-26.47	63.67	26.50	0.24	10.46	QP
4	0.199	25.02	-28.65	53.67	14.32	0.24	10.46	Average
5	0.248	36.44	-25.38	61.82	25.70	0.27	10.47	QP
6	0.248	24.14	-27.68	51.82	13.40	0.27	10.47	Average
7	0.329	35.08	-24.41	59.49	24.30	0.30	10.48	QP
8	0.329	22.68	-26.81	49.49	11.90	0.30	10.48	Average
9 *	0.617	38.23	-17.77	56.00	27.50	0.36	10.37	QP
10	0.617	25.93	-30.07	56.00	15.20	0.36	10.37	Peak
11	2.692	33.22	-22.78	56.00	22.60	0.39	10.23	QP
12	2.692	22.12	-23.88	46.00	11.50	0.39	10.23	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Chris	Relative Humidity :	52~26%
		Temperature :	22 ~ 25 °C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	CDD 8+10	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	CDD 8+10	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	CDD 8+10	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	CDD 8+10	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	CDD 8+10	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	CDD 8+10	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	CDD 8+10	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	CDD 8+10	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	CDD 8+10	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	CDD 8+10	802.11be EHT20	36	5180	MCS0	Full	-
Mode 11	U-NII-1	5.15-5.25	CDD 8+10	802.11be EHT20	44	5220	MCS0	Full	-
Mode 12	U-NII-1	5.15-5.25	CDD 8+10	802.11be EHT20	48	5240	MCS0	Full	-
Mode 13	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT20	52	5260	MCS0	Full	-
Mode 14	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT20	60	5300	MCS0	Full	-
Mode 15	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT20	64	5320	MCS0	Full	-
Mode 16	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT20	100	5500	MCS0	Full	-
Mode 17	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT20	116	5580	MCS0	Full	-
Mode 18	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT20	140	5700	MCS0	Full	-
Mode 19	U-NII-1	5.15-5.25	CDD 8+10	802.11be EHT40	38	5190	MCS0	Full	-
Mode 20	U-NII-1	5.15-5.25	CDD 8+10	802.11be EHT40	46	5230	MCS0	Full	-
Mode 21	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT40	54	5270	MCS0	Full	-
Mode 22	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT40	62	5310	MCS0	Full	-
Mode 23	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT40	102	5510	MCS0	Full	-
Mode 24	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT40	110	5550	MCS0	Full	-
Mode 25	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT40	134	5670	MCS0	Full	-
Mode 26	U-NII-1	5.15-5.25	CDD 8+10	802.11be EHT80	42	5210	MCS0	Full	-
Mode 27	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT80	58	5290	MCS0	Full	-
Mode 28	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT80	106	5530	MCS0	Full	-
Mode 29	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT80	122	5610	MCS0	Full	-
Mode 30	U-NII-2A	5.15-5.35	CDD 8+10	802.11be EHT160	50	5250	MCS0	Full	-
Mode 31	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT160	114	5570	MCS0	Full	-
Mode 32	U-NII-3	5.725-5.85	CDD 8+10	802.11a	149	5745	6Mbps	-	-
Mode 33	U-NII-3	5.725-5.85	CDD 8+10	802.11a	157	5785	6Mbps	-	-
Mode 34	U-NII-3	5.725-5.85	CDD 8+10	802.11a	165	5825	6Mbps	-	-
Mode 35	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT20	149	5745	MCS0	Full	-
Mode 36	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT20	157	5785	MCS0	Full	-
Mode 37	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT20	165	5825	MCS0	Full	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 38	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT40	151	5755	MCS0	Full	-
Mode 39	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT40	159	5795	MCS0	Full	-
Mode 40	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT80	155	5775	MCS0	Full	-
Mode 41	U-NII-2C	5.47-5.85	CDD 8+10	802.11a	144	5720	6Mbps	-	-
Mode 42	U-NII-2C	5.47-5.85	CDD 8+10	802.11be EHT20	144	5720	MCS0	Full	-
Mode 43	U-NII-2C	5.47-5.85	CDD 8+10	802.11be EHT40	142	5710	MCS0	Full	-
Mode 44	U-NII-2C	5.47-5.85	CDD 8+10	802.11be EHT80	138	5690	MCS0	Full	-
Mode 45	U-NII-1	5.15-5.25	CDD 8+10	802.11be EHT20	36	5180	MCS0	Single RU 106/53	-
Mode 46	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT20	64	5320	MCS0	Single RU 106/54	-
Mode 47	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT20	100	5500	MCS0	Single RU 106/53	-
Mode 48	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT20	140	5700	MCS0	Single RU 106/54	-
Mode 49	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT20	149	5745	MCS0	Single RU 106/53	-
Mode 50	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT20	165	5825	MCS0	Single RU 106/54	-
Mode 51	U-NII-1	5.15-5.25	CDD 8+10	802.11be EHT20	36	5180	MCS0	Small RU 53+4	-
Mode 52	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT20	64	5320	MCS0	Small RU 54+4	-
Mode 53	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT20	100	5500	MCS0	Small RU 53+4	-
Mode 54	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT20	140	5700	MCS0	Small RU 54+4	-
Mode 55	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT20	149	5745	MCS0	Small RU 53+4	-
Mode 56	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT20	165	5825	MCS0	Small RU 54+4	-
Mode 57	U-NII-1	5.15-5.25	CDD 8+10	802.11be EHT80	42	5210	MCS0	Puncturing 20M ④	-
Mode 58	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT80	58	5290	MCS0	Puncturing 20M ①	-
Mode 59	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT80	106	5530	MCS0	Puncturing 20M ④	-
Mode 60	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT80	122	5610	MCS0	Puncturing 20M ①	-
Mode 61	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT80	155	5775	MCS0	Puncturing 20M ④	-
Mode 62	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT80	155	5775	MCS0	Puncturing 20M ①	-
Mode 63	U-NII-2A	5.15-5.35	CDD 8+10	802.11be EHT160	50	5250	MCS0	Puncturing 20M ①	-
Mode 64	U-NII-2A	5.15-5.35	CDD 8+10	802.11be EHT160	50	5250	MCS0	Puncturing 20M ⑧	-
Mode 65	U-NII-2A	5.15-5.35	CDD 8+10	802.11be EHT160	50	5250	MCS0	Puncturing 40M ①	-
Mode 66	U-NII-2A	5.15-5.35	CDD 8+10	802.11be EHT160	50	5250	MCS0	Puncturing 40M ④	-
Mode 67	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT160	114	5570	MCS0	Puncturing 20M ①	-
Mode 68	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT160	114	5570	MCS0	Puncturing 20M ⑧	-
Mode 69	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT160	114	5570	MCS0	Puncturing 40M ①	-
Mode 70	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT160	114	5570	MCS0	Puncturing 40M ④	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 71	U-NII-1	5.15-5.25	CDD 8+10	802.11be EHT80	42	5210	MCS0	Large RU 484+242 ④	-
Mode 72	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT80	58	5290	MCS0	Large RU 484+242 ②	-
Mode 73	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT80	106	5530	MCS0	Large RU 484+242 ④	-
Mode 74	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT80	122	5610	MCS0	Large RU 484+242 ②	-
Mode 75	U-NII-3	5.725-5.85	CDD 8+10	802.11be EHT80	155	5775	MCS0	Large RU 484+242 ④	-
Mode 76	U-NII-2A	5.15-5.35	CDD 8+10	802.11be EHT160	50	5250	MCS0	Large RU 996+484 ④	-
Mode 77	U-NII-2C	5.47-5.725	CDD 8+10	802.11be EHT160	114	5570	MCS0	Large RU 996+484 ④	-

For co-location mode:

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 78	2400-2483.5	2.4-2.4835	12	Bluetooth-LE_GSFK	38	2478	2Mbps	-	-
	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT40	62	5310	MCS0	Full	-
Part 96 LTE B48 BW-20M									
Mode 79	2400-2483.5	2.4-2.4835	CDD 12+7	802.11g	11	2462	MCS0	-	-
	U-NII-2A	5.25-5.35	CDD 8+10	802.11be EHT40	62	5310	MCS0	Full	-
Part 96 LTE B48 BW-20M									



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5150.00	50.43	54.00	-3.57	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	46.49	68.20	-21.71	V	PEAK	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	44.54	68.20	-23.66	V	PEAK	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	44.99	68.20	-23.21	H	PEAK	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	44.30	68.20	-23.90	V	PEAK	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	10600.00	43.60	68.20	-24.60	V	PEAK	Pass	Harmonic
6	802.11a	64	5351.50	48.63	54.00	-5.37	H	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	43.79	74.00	-30.21	V	PEAK	Pass	Harmonic
7	802.11a	100	5459.92	49.35	54.00	-4.65	H	AVERAGE	Pass	Band Edge
7	802.11a	100	11000.00	44.60	74.00	-29.40	V	PEAK	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	11160.00	43.44	74.00	-30.56	H	PEAK	Pass	Harmonic
9	802.11a	140	5727.24	64.46	68.20	-3.74	H	PEAK	Pass	Band Edge
9	802.11a	140	11400.00	43.14	74.00	-30.86	V	PEAK	Pass	Harmonic
10	802.11be EHT20	36	5149.20	49.21	54.00	-4.79	H	AVERAGE	Pass	Band Edge
10	802.11be EHT20	36	10360.00	43.74	68.20	-24.46	V	PEAK	Pass	Harmonic
11	802.11be EHT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11be EHT20	44	10440.00	45.44	68.20	-22.76	H	PEAK	Pass	Harmonic
12	802.11be EHT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11be EHT20	48	10480.00	44.59	68.20	-23.61	V	PEAK	Pass	Harmonic
13	802.11be EHT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11be EHT20	52	10520.00	45.02	68.20	-23.18	H	PEAK	Pass	Harmonic
14	802.11be EHT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11be EHT20	60	10600.00	43.61	68.20	-24.59	H	PEAK	Pass	Harmonic
15	802.11be EHT20	64	5350.00	49.79	54.00	-4.21	H	AVERAGE	Pass	Band Edge
15	802.11be EHT20	64	10640.00	44.17	74.00	-29.83	H	PEAK	Pass	Harmonic
16	802.11be EHT20	100	5459.12	47.95	54.00	-6.05	H	AVERAGE	Pass	Band Edge
16	802.11be EHT20	100	11000.00	44.82	74.00	-29.18	V	PEAK	Pass	Harmonic
17	802.11be EHT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11be EHT20	116	11160.00	43.56	74.00	-30.44	V	PEAK	Pass	Harmonic
18	802.11be EHT20	140	5725.80	58.51	68.20	-9.69	H	PEAK	Pass	Band Edge
18	802.11be EHT20	140	11400.00	43.36	74.00	-30.64	V	PEAK	Pass	Harmonic
19	802.11be EHT40	38	5149.92	50.15	54.00	-3.85	H	AVERAGE	Pass	Band Edge
19	802.11be EHT40	38	10380.00	44.60	68.20	-23.60	H	PEAK	Pass	Harmonic
20	802.11be EHT40	46	-	-	-	-	-	-	-	Band Edge
20	802.11be EHT40	46	10460.00	44.25	68.20	-23.95	V	PEAK	Pass	Harmonic
21	802.11be EHT40	54	-	-	-	-	-	-	-	Band Edge
21	802.11be EHT40	54	10540.00	44.12	68.20	-24.08	H	PEAK	Pass	Harmonic
22	802.11be EHT40	62	5359.80	50.75	54.00	-3.25	H	AVERAGE	Pass	Band Edge
22	802.11be EHT40	62	10620.00	43.60	74.00	-30.40	H	PEAK	Pass	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
23	802.11be EHT40	102	5459.92	49.77	54.00	-4.23	H	AVERAGE	Pass	Band Edge
23	802.11be EHT40	102	11020.00	45.49	74.00	-28.51	V	PEAK	Pass	Harmonic
24	802.11be EHT40	110	-	-	-	-	-	-	-	Band Edge
24	802.11be EHT40	110	11100.00	44.31	74.00	-29.69	H	PEAK	Pass	Harmonic
25	802.11be EHT40	134	5459.12	47.54	54.00	-6.46	H	AVERAGE	Pass	Band Edge
25	802.11be EHT40	134	11340.00	42.77	74.00	-31.23	V	PEAK	Pass	Harmonic
26	802.11be EHT80	42	5133.92	50.63	54.00	-3.37	H	AVERAGE	Pass	Band Edge
26	802.11be EHT80	42	10420.00	43.97	68.20	-24.23	H	PEAK	Pass	Harmonic
27	802.11be EHT80	58	5382.50	50.35	54.00	-3.65	H	AVERAGE	Pass	Band Edge
27	802.11be EHT80	58	10580.00	43.65	68.20	-24.55	H	PEAK	Pass	Harmonic
28	802.11be EHT80	106	5457.36	50.04	54.00	-3.96	H	AVERAGE	Pass	Band Edge
28	802.11be EHT80	106	11060.00	43.31	74.00	-30.69	V	PEAK	Pass	Harmonic
29	802.11be EHT80	122	5453.04	40.47	54.00	-13.53	H	AVERAGE	Pass	Band Edge
29	802.11be EHT80	122	11220.00	42.88	74.00	-31.12	H	PEAK	Pass	Harmonic
30	802.11be EHT160	50	5137.00	46.03	54.00	-7.97	H	AVERAGE	Pass	Band Edge
30	802.11be EHT160	50	10500.00	43.63	68.20	-24.57	V	PEAK	Pass	Harmonic
31	802.11be EHT160	114	5458.24	46.16	54.00	-7.84	H	AVERAGE	Pass	Band Edge
31	802.11be EHT160	114	11140.00	43.91	74.00	-30.09	V	PEAK	Pass	Harmonic
32	802.11a	149	5603.60	51.55	68.20	-16.65	H	PEAK	Pass	Band Edge
32	802.11a	149	11490.00	44.56	74.00	-29.44	V	PEAK	Pass	Harmonic
33	802.11a	157	-	-	-	-	-	-	-	Band Edge
33	802.11a	157	11570.00	43.85	74.00	-30.15	H	PEAK	Pass	Harmonic
34	802.11a	165	5931.20	50.01	68.20	-18.19	H	PEAK	Pass	Band Edge
34	802.11a	165	11650.00	43.81	74.00	-30.19	H	PEAK	Pass	Harmonic
35	802.11be EHT20	149	5643.60	51.83	68.20	-16.37	H	PEAK	Pass	Band Edge
35	802.11be EHT20	149	11490.00	43.35	74.00	-30.65	H	PEAK	Pass	Harmonic
36	802.11be EHT20	157	-	-	-	-	-	-	-	Band Edge
36	802.11be EHT20	157	11570.00	43.64	74.00	-30.36	V	PEAK	Pass	Harmonic
37	802.11be EHT20	165	5982.40	50.37	68.20	-17.83	H	PEAK	Pass	Band Edge
37	802.11be EHT20	165	11650.00	43.37	74.00	-30.63	V	PEAK	Pass	Harmonic
38	802.11be EHT40	151	5648.21	54.49	68.20	-13.71	H	PEAK	Pass	Band Edge
38	802.11be EHT40	151	11510.00	42.59	74.00	-31.41	H	PEAK	Pass	Harmonic
39	802.11be EHT40	159	5644.00	50.59	68.20	-17.61	H	PEAK	Pass	Band Edge
39	802.11be EHT40	159	11590.00	44.04	74.00	-29.96	H	PEAK	Pass	Harmonic
40	802.11be EHT80	155	5638.00	55.05	68.20	-13.15	H	PEAK	Pass	Band Edge
40	802.11be EHT80	155	11550.00	42.91	74.00	-31.09	V	PEAK	Pass	Harmonic
41	802.11a	144	-	-	-	-	-	-	-	Band Edge
41	802.11a	144	11440.00	43.51	74.00	-30.49	V	PEAK	Pass	Harmonic
42	802.11be EHT20	144	-	-	-	-	-	-	-	Band Edge
42	802.11be EHT20	144	11440.00	43.61	74.00	-30.39	H	PEAK	Pass	Harmonic
43	802.11be EHT40	142	-	-	-	-	-	-	-	Band Edge
43	802.11be EHT40	142	11420.00	43.42	74.00	-30.58	V	PEAK	Pass	Harmonic
44	802.11be EHT80	138	-	-	-	-	-	-	-	Band Edge
44	802.11be EHT80	138	11380.00	42.10	74.00	-31.90	H	PEAK	Pass	Harmonic
45	802.11be EHT20	36	5150.00	41.69	54.00	-12.31	H	AVERAGE	Pass	Band Edge







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
45	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
46	802.11be EHT20	64	5350.20	41.24	54.00	-12.76	H	AVERAGE	Pass	Band Edge
46	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
47	802.11be EHT20	100	5458.96	40.57	54.00	-13.43	H	AVERAGE	Pass	Band Edge
47	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
48	802.11be EHT20	140	5728.12	50.41	68.20	-17.79	V	PEAK	Pass	Band Edge
48	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
49	802.11be EHT20	149	5636.00	49.29	68.20	-18.91	H	PEAK	Pass	Band Edge
49	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
50	802.11be EHT20	165	5950.80	49.43	68.20	-18.77	H	PEAK	Pass	Band Edge
50	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
51	802.11be EHT20	36	5141.10	48.85	54.00	-5.15	H	AVERAGE	Pass	Band Edge
51	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
52	802.11be EHT20	64	5350.00	47.27	54.00	-6.73	H	AVERAGE	Pass	Band Edge
52	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
53	802.11be EHT20	100	5459.92	47.83	54.00	-6.17	H	AVERAGE	Pass	Band Edge
53	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
54	802.11be EHT20	140	5761.24	58.63	68.20	-9.57	V	PEAK	Pass	Band Edge
54	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
55	802.11be EHT20	149	5635.20	57.77	68.20	-10.43	H	PEAK	Pass	Band Edge
55	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
56	802.11be EHT20	165	5946.80	58.42	68.20	-9.78	H	PEAK	Pass	Band Edge
56	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
57	802.11be EHT80	42	5149.92	47.78	54.00	-6.22	V	AVERAGE	Pass	Band Edge
57	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic
58	802.11be EHT80	58	5365.10	44.81	54.00	-9.19	H	AVERAGE	Pass	Band Edge
58	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
59	802.11be EHT80	106	5462.00	60.66	68.20	-7.54	H	PEAK	Pass	Band Edge
59	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
60	802.11be EHT80	122	5725.32	58.26	68.20	-9.94	H	PEAK	Pass	Band Edge
60	802.11be EHT80	122	-	-	-	-	-	-	-	Harmonic
61	802.11be EHT80	155	5646.80	56.08	68.20	-12.12	H	PEAK	Pass	Band Edge
61	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
62	802.11be EHT80	155	5650.80	55.21	68.80	-13.59	H	PEAK	Pass	Band Edge
62	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
63	802.11be EHT160	50	5355.00	49.84	54.00	-4.16	H	AVERAGE	Pass	Band Edge
63	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
64	802.11be EHT160	50	5140.00	50.40	54.00	-3.60	H	AVERAGE	Pass	Band Edge
64	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
65	802.11be EHT160	50	5365.71	45.57	54.00	-8.43	H	AVERAGE	Pass	Band Edge
65	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
66	802.11be EHT160	50	5142.75	44.67	54.00	-9.33	H	AVERAGE	Pass	Band Edge
66	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
67	802.11be EHT160	114	5736.34	63.91	68.20	-4.29	H	PEAK	Pass	Band Edge
67	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
68	802.11be EHT160	114	5421.06	67.88	74.00	-6.12	H	PEAK	Pass	Band Edge
68	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
69	802.11be EHT160	114	5743.16	57.05	68.20	-11.15	H	PEAK	Pass	Band Edge
69	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
70	802.11be EHT160	114	5452.08	49.77	54.00	-4.23	H	AVERAGE	Pass	Band Edge
70	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
71	802.11be EHT80	42	5138.08	45.60	54.00	-8.40	H	AVERAGE	Pass	Band Edge
71	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic
72	802.11be EHT80	58	5382.20	50.68	54.00	-3.32	H	AVERAGE	Pass	Band Edge
72	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
73	802.11be EHT80	106	5454.80	48.48	54.00	-5.52	H	AVERAGE	Pass	Band Edge
73	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
74	802.11be EHT80	122	5732.76	59.73	68.20	-8.47	H	PEAK	Pass	Band Edge
74	802.11be EHT80	122	-	-	-	-	-	-	-	Harmonic
75	802.11be EHT80	155	5624.80	51.29	68.20	-16.91	H	PEAK	Pass	Band Edge
75	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
76	802.11be EHT160	50	5135.50	45.12	54.00	-8.88	H	AVERAGE	Pass	Band Edge
76	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
77	802.11be EHT160	114	5459.78	47.98	54.00	-6.02	H	AVERAGE	Pass	Band Edge
77	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
78	Bluetooth-LE_GSKF	38	2500.00	40.88	54.00	-13.12	V	AVERAGE	Pass	Band Edge
78	Bluetooth-LE_GSKF	38	7434.00	43.54	74.00	-30.46	H	PEAK	Pass	Harmonic
78	802.11be EHT40	62	5350.00	48.80	54.00	-5.20	H	AVERAGE	Pass	Band Edge
78	802.11be EHT40	62	10620.00	44.18	74.00	-29.82	V	PEAK	Pass	Harmonic
79	802.11g	11	2483.50	45.73	54.00	-8.27	H	AVERAGE	Pass	Band Edge
79	802.11g	11	7386.00	41.55	74.00	-32.45	H	PEAK	Pass	Harmonic
79	802.11be EHT40	62	5357.10	48.68	54.00	-5.32	H	AVERAGE	Pass	Band Edge
79	802.11be EHT40	62	10620.00	43.98	74.00	-30.02	V	PEAK	Pass	Harmonic

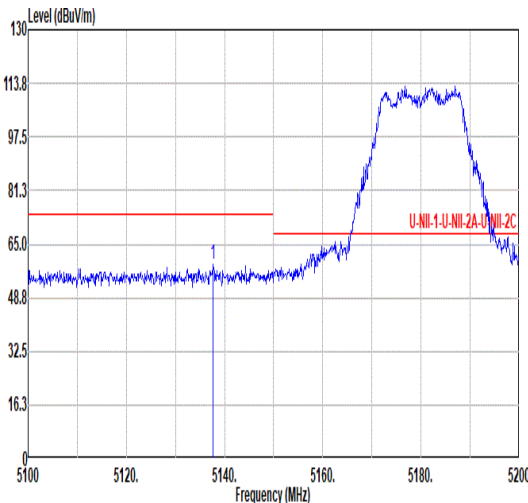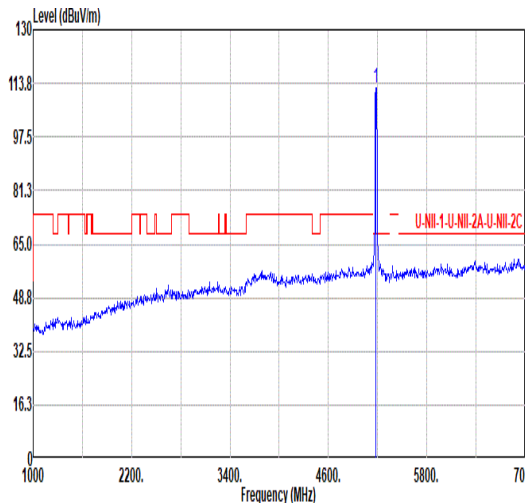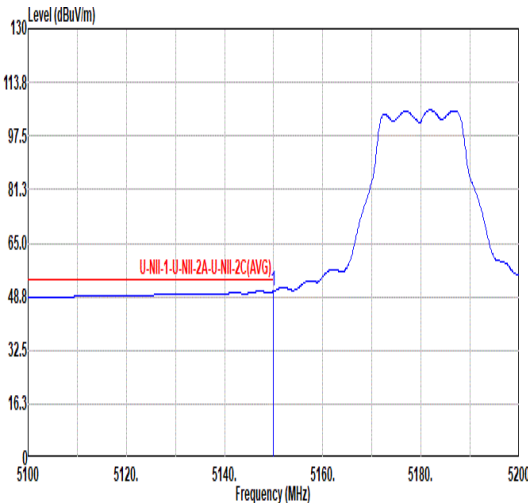
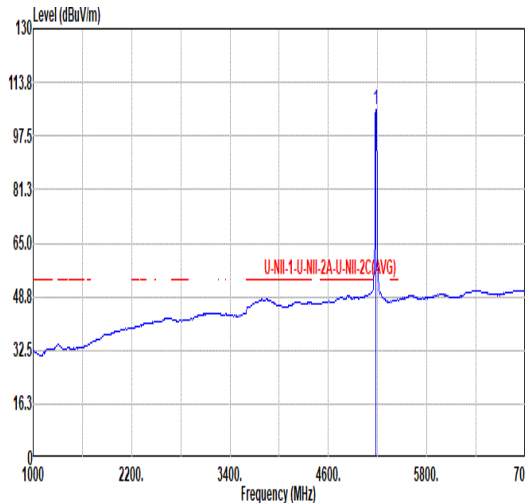


Mode	1																																																										
	Band Edge																																																										
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																										
ANT	CDD 8+10																																																										
Pol.	Horizontal						Fundamental																																																				
Peak																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5137.70</td><td>58.92</td><td>74.00</td><td>-15.08</td><td>51.12</td><td>34.60</td><td>10.64</td><td>37.44</td><td>0.00</td><td>106</td><td>120 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5137.70	58.92	74.00	-15.08	51.12	34.60	10.64	37.44	0.00	106
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	5137.70	58.92	74.00	-15.08	51.12	34.60	10.64	37.44	0.00	106	120 PEAK																																																
Fundamental																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>112.41</td><td>-----</td><td>-----</td><td>104.42</td><td>34.72</td><td>10.69</td><td>37.42</td><td>0.00</td><td>106</td><td>120 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	112.41	-----	-----	104.42	34.72	10.69	37.42	0.00	106
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	5180.00	112.41	-----	-----	104.42	34.72	10.69	37.42	0.00	106	120 PEAK																																																
Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>50.43</td><td>54.00</td><td>-3.57</td><td>42.61</td><td>34.60</td><td>10.65</td><td>37.43</td><td>0.00</td><td>106</td><td>120 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5150.00	50.43	54.00	-3.57	42.61	34.60	10.65	37.43	0.00	106
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	5150.00	50.43	54.00	-3.57	42.61	34.60	10.65	37.43	0.00	106	120 AVERAGE																																																
Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>105.41</td><td>-----</td><td>-----</td><td>97.41</td><td>34.73</td><td>10.69</td><td>37.42</td><td>0.00</td><td>106</td><td>120 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	105.41	-----	-----	97.41	34.73	10.69	37.42	0.00	106
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	5180.00	105.41	-----	-----	97.41	34.73	10.69	37.42	0.00	106	120 AVERAGE																																																

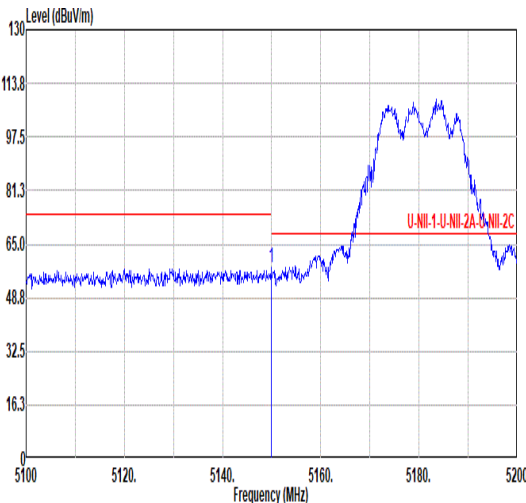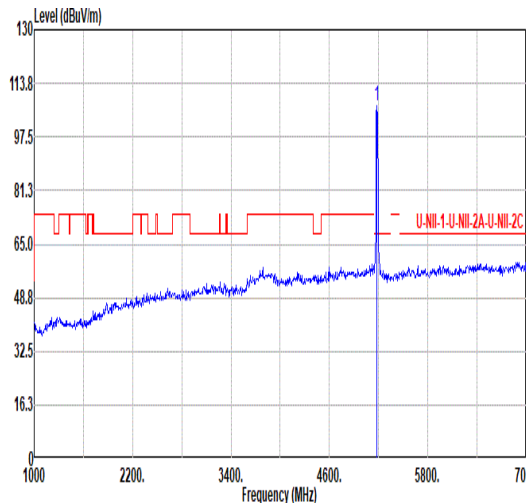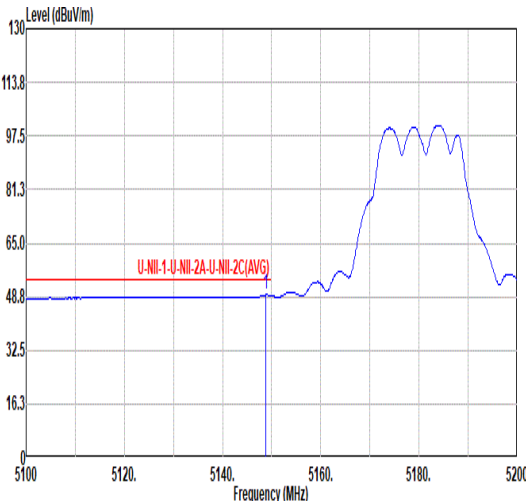
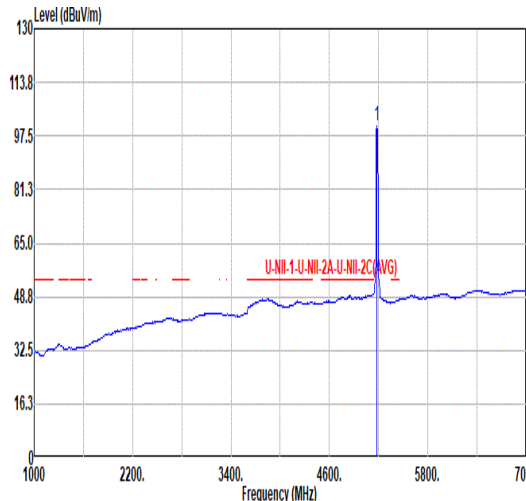


Mode	1																																																										
	Band Edge																																																										
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																										
ANT	CDD 8+10																																																										
Pol.	Vertical						Fundamental																																																				
Peak																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5149.90</td><td>57.96</td><td>74.00</td><td>-16.04</td><td>50.14</td><td>34.60</td><td>10.65</td><td>37.43</td><td>0.00</td><td>354</td><td>104 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5149.90	57.96	74.00	-16.04	50.14	34.60	10.65	37.43	0.00	354
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																		
1	5149.90	57.96	74.00	-16.04	50.14	34.60	10.65	37.43	0.00	354	104 PEAK																																																
Fundamental																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5180.00</td><td>106.97</td><td>-----</td><td>-----</td><td>99.01</td><td>34.70</td><td>10.68</td><td>37.42</td><td>0.00</td><td>354</td><td>104 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5180.00	106.97	-----	-----	99.01	34.70	10.68	37.42	0.00	354
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																		
1	5180.00	106.97	-----	-----	99.01	34.70	10.68	37.42	0.00	354	104 PEAK																																																
Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5148.00</td><td>49.31</td><td>54.00</td><td>-4.69</td><td>41.49</td><td>34.60</td><td>10.65</td><td>37.43</td><td>0.00</td><td>354</td><td>104 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5148.00	49.31	54.00	-4.69	41.49	34.60	10.65	37.43	0.00	354
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																		
1	5148.00	49.31	54.00	-4.69	41.49	34.60	10.65	37.43	0.00	354	104 AVERAGE																																																
Fundamental																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5180.00</td><td>100.74</td><td>-----</td><td>-----</td><td>92.74</td><td>34.73</td><td>10.69</td><td>37.42</td><td>0.00</td><td>354</td><td>104 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5180.00	100.74	-----	-----	92.74	34.73	10.69	37.42	0.00	354
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																		
1	5180.00	100.74	-----	-----	92.74	34.73	10.69	37.42	0.00	354	104 AVERAGE																																																

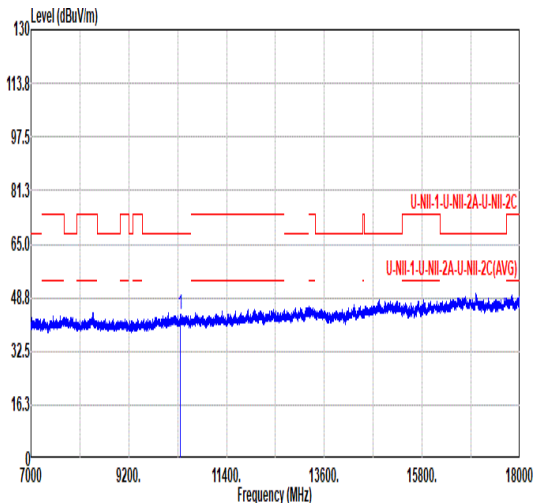
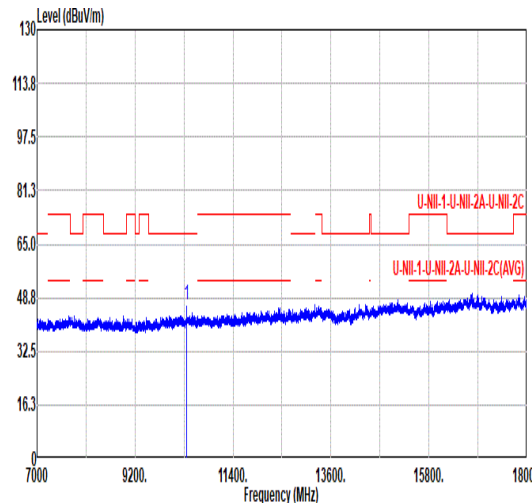


Mode	1																																																																																																			
	Harmonic																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																			
ANT	CDD 8+10																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>43.66</td><td>68.20</td><td>-24.54</td><td>57.98</td><td>37.80</td><td>15.29</td><td>67.41</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	43.66	68.20	-24.54	57.98	37.80	15.29	67.41	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.49</td><td>68.20</td><td>-21.71</td><td>60.78</td><td>37.80</td><td>15.30</td><td>67.39</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.49	68.20	-21.71	60.78	37.80	15.30	67.39	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	10360.00	43.66	68.20	-24.54	57.98	37.80	15.29	67.41	0.00	---	---	PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	10360.00	46.49	68.20	-21.71	60.78	37.80	15.30	67.39	0.00	---	---	PEAK																																																																																								

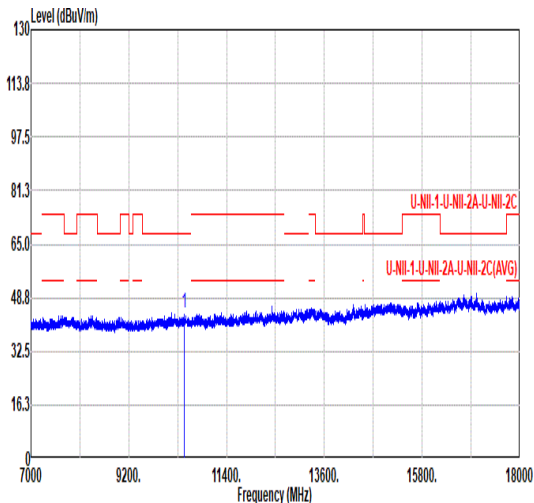
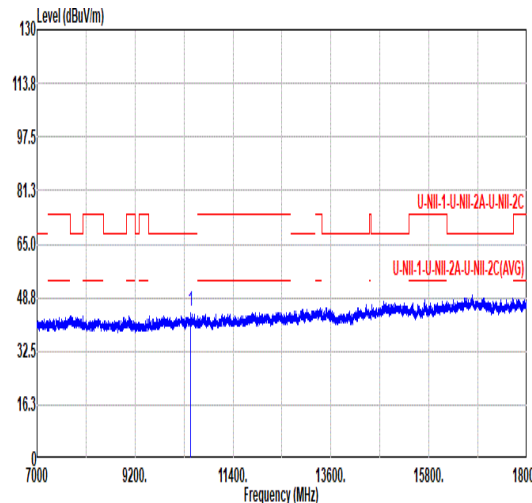


Mode	2																																																																																																			
	Harmonic																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																			
ANT	CDD 8+10																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>44.38</td><td>68.20</td><td>-23.82</td><td>58.44</td><td>37.85</td><td>15.36</td><td>67.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	44.38	68.20	-23.82	58.44	37.85	15.36	67.27	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>44.54</td><td>68.20</td><td>-23.66</td><td>58.62</td><td>37.84</td><td>15.36</td><td>67.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	44.54	68.20	-23.66	58.62	37.84	15.36	67.28	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	10440.00	44.38	68.20	-23.82	58.44	37.85	15.36	67.27	0.00	---	---	PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	10440.00	44.54	68.20	-23.66	58.62	37.84	15.36	67.28	0.00	---	---	PEAK																																																																																								

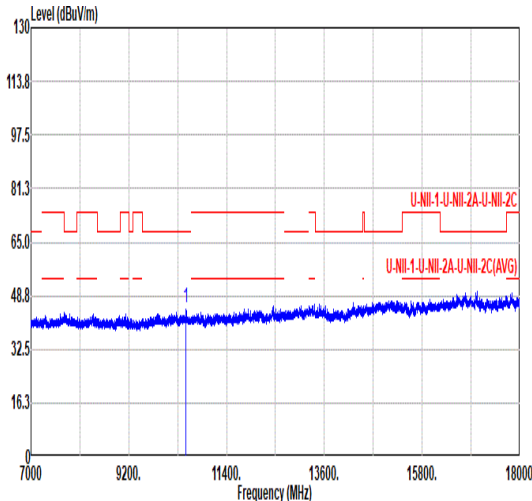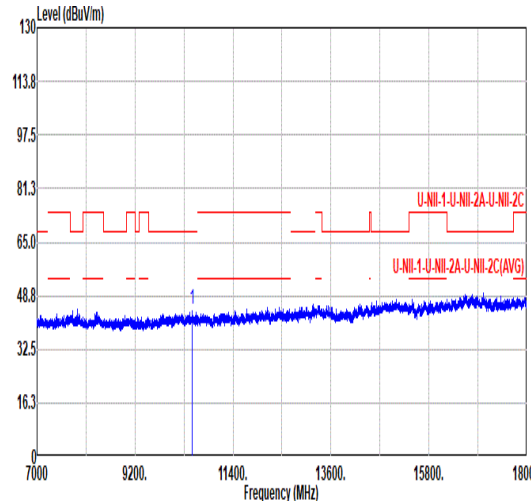

Mode	3																																																																																																			
	Harmonic																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																			
ANT	CDD 8+10																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>44.99</td><td>68.20</td><td>-23.21</td><td>58.94</td><td>37.88</td><td>15.39</td><td>67.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	44.99	68.20	-23.21	58.94	37.88	15.39	67.22	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>44.50</td><td>68.20</td><td>-23.70</td><td>58.49</td><td>37.87</td><td>15.38</td><td>67.24</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	44.50	68.20	-23.70	58.49	37.87	15.38	67.24	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	10480.00	44.99	68.20	-23.21	58.94	37.88	15.39	67.22	0.00	---	---	PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	10480.00	44.50	68.20	-23.70	58.49	37.87	15.38	67.24	0.00	---	---	PEAK																																																																																								

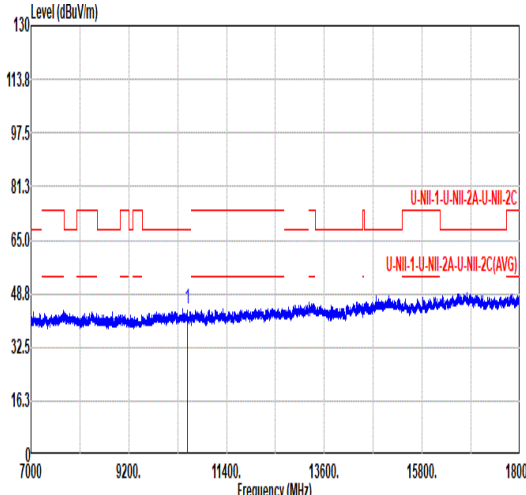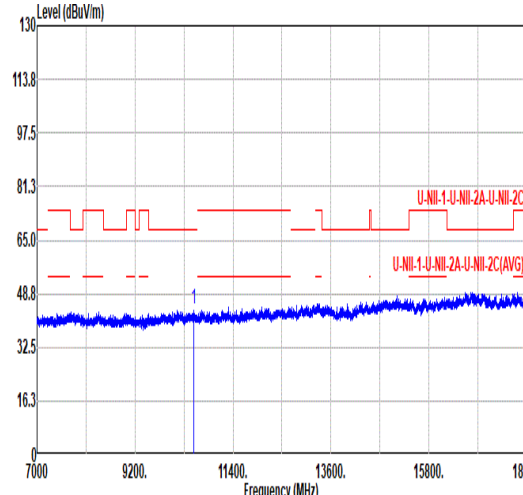

Mode	4																																																																																																					
	Harmonic																																																																																																					
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																					
ANT	CDD 8+10																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>44.26</td><td>68.20</td><td>-23.94</td><td>58.15</td><td>37.89</td><td>15.41</td><td>67.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	44.26	68.20	-23.94	58.15	37.89	15.41	67.19	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>44.30</td><td>68.20</td><td>-23.90</td><td>58.19</td><td>37.89</td><td>15.41</td><td>67.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	44.30	68.20	-23.90	58.19	37.89	15.41	67.19	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	10520.00	44.26	68.20	-23.94	58.15	37.89	15.41	67.19	0.00	---	PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	10520.00	44.30	68.20	-23.90	58.19	37.89	15.41	67.19	0.00	---	PEAK																																																																																											







Mode	5																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																									
ANT	CDD 8+10																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10600.00</td><td>43.25</td><td>68.20</td><td>-24.95</td><td>57.10</td><td>37.80</td><td>15.47</td><td>67.12</td><td>0.00</td><td>---</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	43.25	68.20	-24.95	57.10	37.80	15.47	67.12	0.00	---											PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10600.00</td><td>43.60</td><td>68.20</td><td>-24.60</td><td>57.45</td><td>37.80</td><td>15.47</td><td>67.12</td><td>0.00</td><td>---</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	43.60	68.20	-24.60	57.45	37.80	15.47	67.12	0.00	---											PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	10600.00	43.25	68.20	-24.95	57.10	37.80	15.47	67.12	0.00	---																																																																																																																
										PEAK																																																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	10600.00	43.60	68.20	-24.60	57.45	37.80	15.47	67.12	0.00	---																																																																																																																
										PEAK																																																																																																																





Mode	6																																																							
	Band Edge																																																							
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																							
ANT	CDD 8+10																																																							
Pol.	Horizontal																																																							
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.10</td><td>57.81</td><td>74.00</td><td>-16.19</td><td>49.52</td><td>34.00</td><td>10.84</td><td>37.35</td><td>0.00</td><td>100</td><td>121 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.10	57.81	74.00	-16.19	49.52	34.00	10.84	37.35	0.00	100	121 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5351.10	57.81	74.00	-16.19	49.52	34.00	10.84	37.35	0.00	100	121 PEAK																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>110.58</td><td>-----</td><td>-----</td><td>102.39</td><td>34.74</td><td>10.81</td><td>37.36</td><td>0.00</td><td>100</td><td>121 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	110.58	-----	-----	102.39	34.74	10.81	37.36	0.00	100	121 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5320.00	110.58	-----	-----	102.39	34.74	10.81	37.36	0.00	100	121 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.50</td><td>48.63</td><td>54.00</td><td>-5.37</td><td>40.34</td><td>34.00</td><td>10.84</td><td>37.35</td><td>0.00</td><td>100</td><td>121 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.50	48.63	54.00	-5.37	40.34	34.00	10.84	37.35	0.00	100	121 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5351.50	48.63	54.00	-5.37	40.34	34.00	10.84	37.35	0.00	100	121 AVERAGE																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>104.17</td><td>-----</td><td>-----</td><td>95.98</td><td>34.74</td><td>10.81</td><td>37.36</td><td>0.00</td><td>100</td><td>121 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	104.17	-----	-----	95.98	34.74	10.81	37.36	0.00	100	121 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5320.00	104.17	-----	-----	95.98	34.74	10.81	37.36	0.00	100	121 AVERAGE																																													

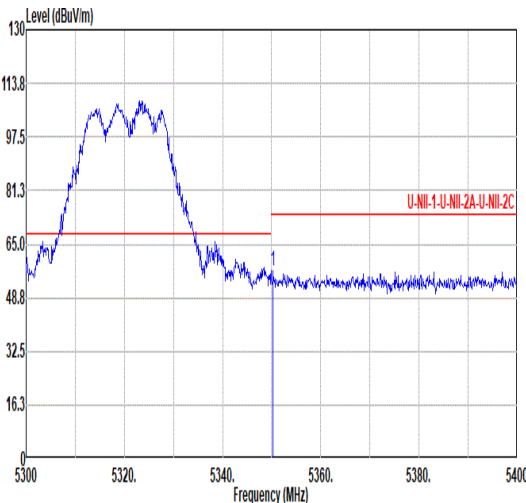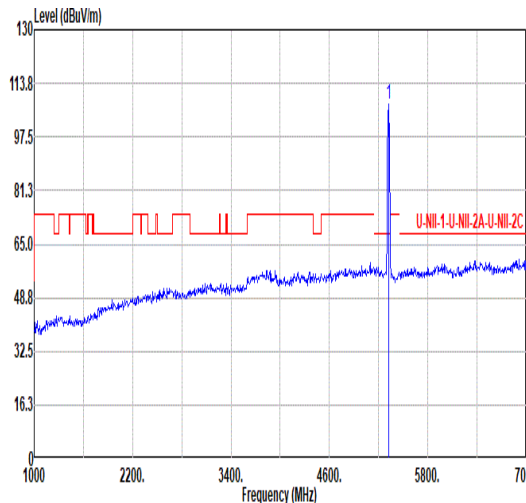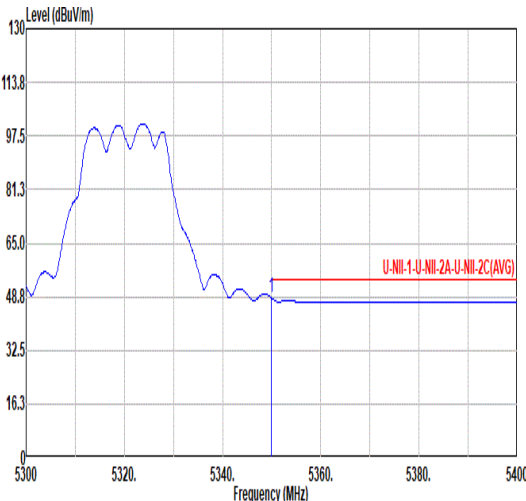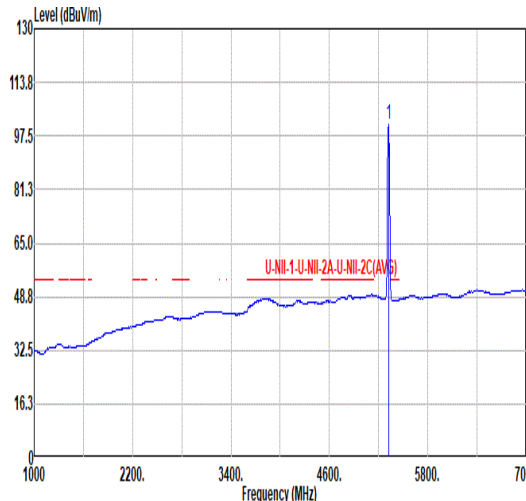

Mode	6																																																						
	Band Edge																																																						
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																						
ANT	CDD 8+10																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.30</td><td>56.77</td><td>74.00</td><td>-17.23</td><td>48.48</td><td>34.00</td><td>10.84</td><td>37.35</td><td>0.00</td><td>332 93 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.30	56.77	74.00	-17.23	48.48	34.00	10.84	37.35	0.00	332 93 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5350.30	56.77	74.00	-17.23	48.48	34.00	10.84	37.35	0.00	332 93 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>107.68</td><td>-----</td><td>-----</td><td>99.47</td><td>34.75</td><td>10.82</td><td>37.36</td><td>0.00</td><td>332 93 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	107.68	-----	-----	99.47	34.75	10.82	37.36	0.00	332 93 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5320.00	107.68	-----	-----	99.47	34.75	10.82	37.36	0.00	332 93 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>48.39</td><td>54.00</td><td>-5.61</td><td>40.10</td><td>34.00</td><td>10.84</td><td>37.35</td><td>0.00</td><td>332 93 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.00	48.39	54.00	-5.61	40.10	34.00	10.84	37.35	0.00	332 93 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5350.00	48.39	54.00	-5.61	40.10	34.00	10.84	37.35	0.00	332 93 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>101.20</td><td>-----</td><td>-----</td><td>92.99</td><td>34.75</td><td>10.82</td><td>37.36</td><td>0.00</td><td>332 93 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	101.20	-----	-----	92.99	34.75	10.82	37.36	0.00	332 93 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5320.00	101.20	-----	-----	92.99	34.75	10.82	37.36	0.00	332 93 AVERAGE																																													



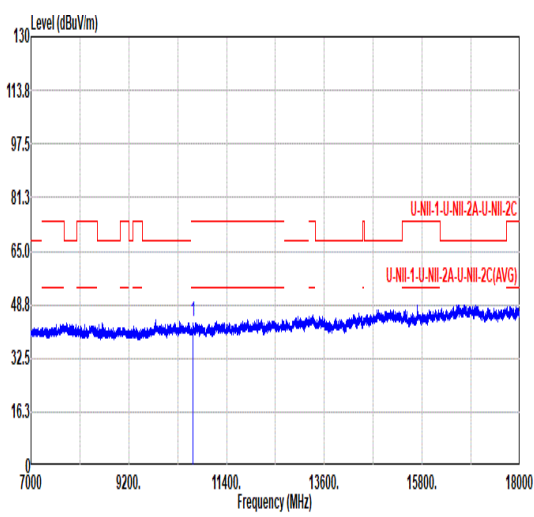
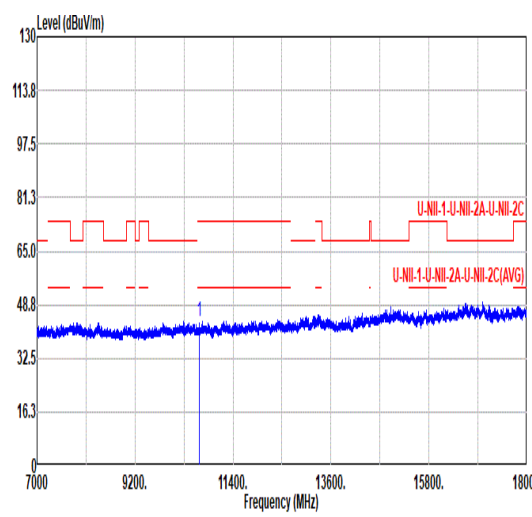


Mode	6																																																																																																					
	Harmonic																																																																																																					
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																					
ANT	CDD 8+10																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><td></td><td>Limit</td><td>Over</td><td>Read</td><td>Ant</td><td>Cable</td><td>Preamp</td><td>Aux</td><td>APos</td><td>TPos</td><td></td></tr><tr><td>Freq</td><td>Level</td><td>Line</td><td>Limit</td><td>Level</td><td>Factor</td><td>Loss</td><td>Factor</td><td>Factor</td><td></td><td>Remark</td></tr><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1 10640.00</td><td>43.78</td><td>74.00</td><td>-30.22</td><td>57.49</td><td>37.88</td><td>15.50</td><td>67.09</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10640.00	43.78	74.00	-30.22	57.49	37.88	15.50	67.09	0.00	---	---	PEAK	<table><tr><td></td><td>Limit</td><td>Over</td><td>Read</td><td>Ant</td><td>Cable</td><td>Preamp</td><td>Aux</td><td>APos</td><td>TPos</td><td></td></tr><tr><td>Freq</td><td>Level</td><td>Line</td><td>Limit</td><td>Level</td><td>Factor</td><td>Loss</td><td>Factor</td><td>Factor</td><td></td><td>Remark</td></tr><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1 10640.00</td><td>43.79</td><td>74.00</td><td>-30.21</td><td>57.50</td><td>37.88</td><td>15.50</td><td>67.09</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10640.00	43.79	74.00	-30.21	57.50	37.88	15.50	67.09	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1 10640.00	43.78	74.00	-30.22	57.49	37.88	15.50	67.09	0.00	---	---	PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1 10640.00	43.79	74.00	-30.21	57.50	37.88	15.50	67.09	0.00	---	---	PEAK																																																																																											




Mode	7																																																																	
	Band Edge																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																	
ANT	CDD 8+10																																																																	
Pol.	Horizontal																																																																	
Peak																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5453.04</td><td>58.22</td><td>74.00</td><td>-15.78</td><td>49.57</td><td>34.99</td><td>10.96</td><td>37.30</td><td>0.00</td><td>112 115 PEAK</td></tr><tr><td>2</td><td>5464.56</td><td>59.17</td><td>68.20</td><td>-9.03</td><td>50.53</td><td>34.97</td><td>10.97</td><td>37.30</td><td>0.00</td><td>112 115 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5453.04	58.22	74.00	-15.78	49.57	34.99	10.96	37.30	0.00	112 115 PEAK	2	5464.56	59.17	68.20	-9.03	50.53	34.97	10.97	37.30	0.00	112 115 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5453.04	58.22	74.00	-15.78	49.57	34.99	10.96	37.30	0.00	112 115 PEAK																																																								
2	5464.56	59.17	68.20	-9.03	50.53	34.97	10.97	37.30	0.00	112 115 PEAK																																																								
Fundamental																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>112.67</td><td>-----</td><td>-----</td><td>104.03</td><td>34.90</td><td>11.02</td><td>37.28</td><td>0.00</td><td>112 115 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	112.67	-----	-----	104.03	34.90	11.02	37.28	0.00	112 115 PEAK											
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5500.00	112.67	-----	-----	104.03	34.90	11.02	37.28	0.00	112 115 PEAK																																																								
Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.92</td><td>49.35</td><td>54.00</td><td>-4.65</td><td>40.70</td><td>34.90</td><td>10.97</td><td>37.30</td><td>0.00</td><td>112 115 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	49.35	54.00	-4.65	40.70	34.90	10.97	37.30	0.00	112 115 AVERAGE											
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5459.92	49.35	54.00	-4.65	40.70	34.90	10.97	37.30	0.00	112 115 AVERAGE																																																								
Fundamental																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>105.58</td><td>-----</td><td>-----</td><td>96.94</td><td>34.90</td><td>11.02</td><td>37.28</td><td>0.00</td><td>112 115 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	105.58	-----	-----	96.94	34.90	11.02	37.28	0.00	112 115 AVERAGE											
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5500.00	105.58	-----	-----	96.94	34.90	11.02	37.28	0.00	112 115 AVERAGE																																																								

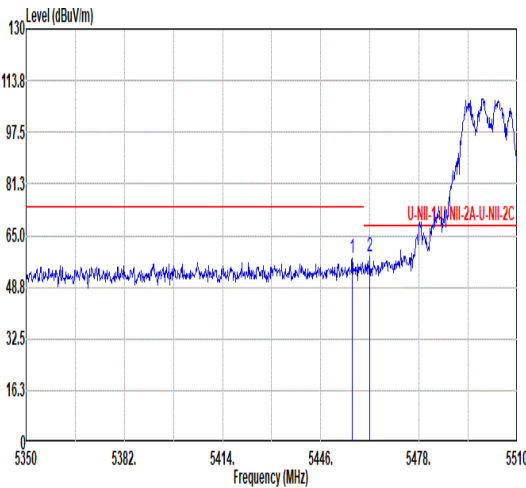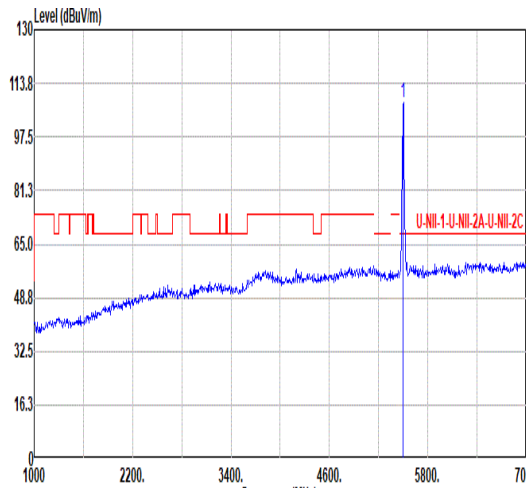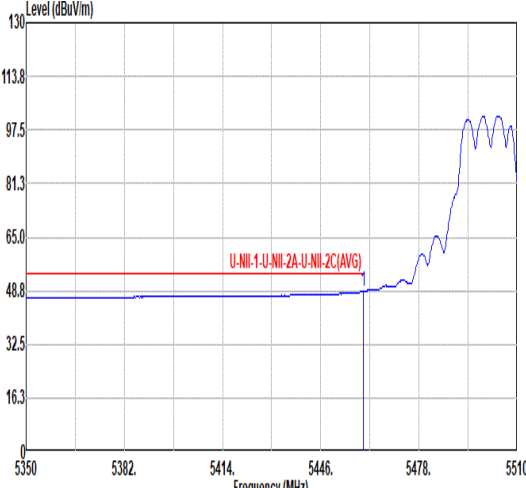
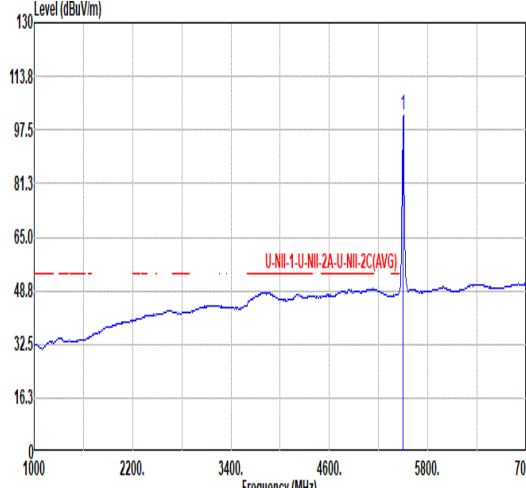


		7																																																																				
Mode		Band Edge																																																																				
		U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																				
ANT		CDD 8+10																																																																				
Pol.		Fundamental																																																																				
Peak	Vertical	 <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5456.24</td><td>57.87</td><td>74.00</td><td>-16.13</td><td>49.22</td><td>34.99</td><td>10.96</td><td>37.30</td><td>0.00</td><td>351</td><td>108 PEAK</td></tr><tr><td>2</td><td>5461.84</td><td>58.43</td><td>68.20</td><td>-9.77</td><td>49.78</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>351</td><td>108 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.24	57.87	74.00	-16.13	49.22	34.99	10.96	37.30	0.00	351	108 PEAK	2	5461.84	58.43	68.20	-9.77	49.78	34.98	10.97	37.30	0.00	351	108 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	5456.24	57.87	74.00	-16.13	49.22	34.99	10.96	37.30	0.00	351	108 PEAK																																																											
2	5461.84	58.43	68.20	-9.77	49.78	34.98	10.97	37.30	0.00	351	108 PEAK																																																											
Fundamental	 <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>107.87</td><td>-----</td><td>-----</td><td>99.22</td><td>34.90</td><td>11.03</td><td>37.28</td><td>0.00</td><td>351</td><td>108 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	107.87	-----	-----	99.22	34.90	11.03	37.28	0.00	351	108 PEAK																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	5500.00	107.87	-----	-----	99.22	34.90	11.03	37.28	0.00	351	108 PEAK																																																											
Avg	Vertical	 <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.76</td><td>48.42</td><td>54.00</td><td>-5.58</td><td>39.77</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>351</td><td>108 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	48.42	54.00	-5.58	39.77	34.98	10.97	37.30	0.00	351	108 AVERAGE												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	5459.76	48.42	54.00	-5.58	39.77	34.98	10.97	37.30	0.00	351	108 AVERAGE																																																											
Fundamental	 <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>101.81</td><td>-----</td><td>-----</td><td>93.16</td><td>34.90</td><td>11.03</td><td>37.28</td><td>0.00</td><td>351</td><td>108 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	101.81	-----	-----	93.16	34.90	11.03	37.28	0.00	351	108 AVERAGE																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	5500.00	101.81	-----	-----	93.16	34.90	11.03	37.28	0.00	351	108 AVERAGE																																																											



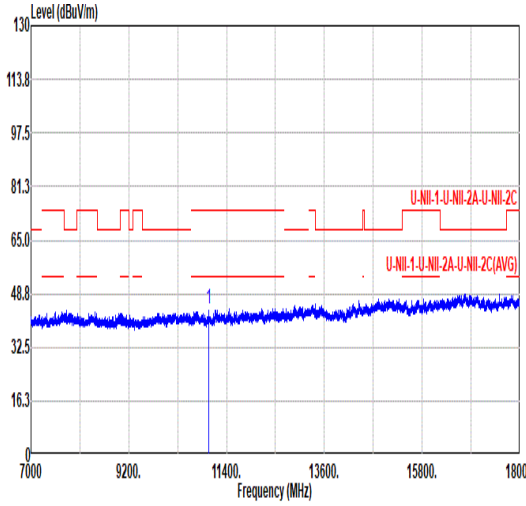


		7																																																								
Mode		Harmonic																																																								
		U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																								
ANT		CDD 8+10																																																								
Pol.		Horizontal																																																								
Peak Avg																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>43.97</td><td>74.00</td><td>-30.03</td><td>56.81</td><td>38.20</td><td>15.76</td><td>66.80</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	43.97	74.00	-30.03	56.81	38.20	15.76	66.80	0.00	---	PEAK	
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																
1	11000.00	43.97	74.00	-30.03	56.81	38.20	15.76	66.80	0.00	---	PEAK																																															
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>44.60</td><td>74.00</td><td>-29.40</td><td>57.44</td><td>38.20</td><td>15.76</td><td>66.80</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	44.60	74.00	-29.40	57.44	38.20	15.76	66.80	0.00	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																
1	11000.00	44.60	74.00	-29.40	57.44	38.20	15.76	66.80	0.00	---	PEAK																																															
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>44.60</td><td>74.00</td><td>-29.40</td><td>57.44</td><td>38.20</td><td>15.76</td><td>66.80</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	44.60	74.00	-29.40	57.44	38.20	15.76	66.80	0.00	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																
1	11000.00	44.60	74.00	-29.40	57.44	38.20	15.76	66.80	0.00	---	PEAK																																															


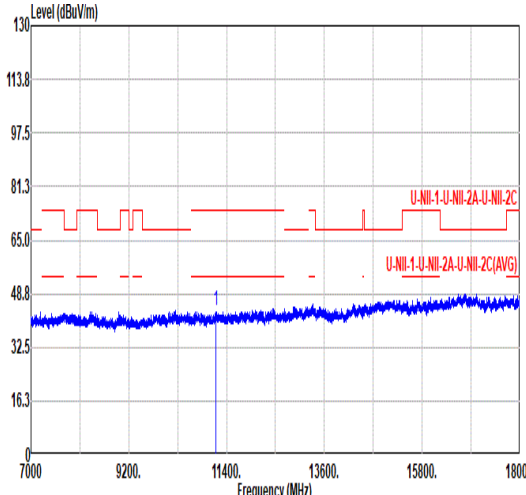
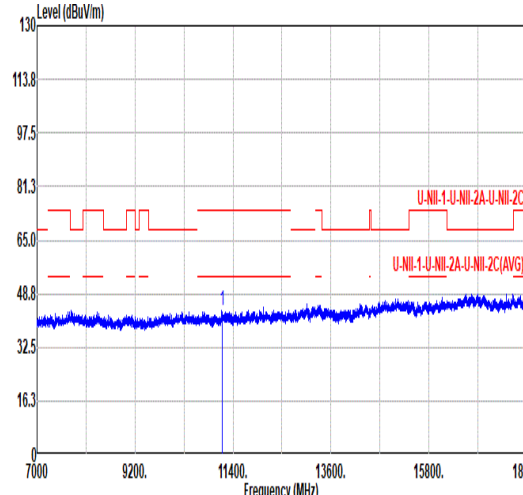


Mode	8																																																																																																			
	Harmonic																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																			
ANT	CDD 8+10																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11160.00</td><td>43.44</td><td>74.00</td><td>-30.56</td><td>56.19</td><td>38.14</td><td>15.88</td><td>66.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	43.44	74.00	-30.56	56.19	38.14	15.88	66.77	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11160.00</td><td>43.43</td><td>74.00</td><td>-30.57</td><td>56.18</td><td>38.14</td><td>15.88</td><td>66.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	43.43	74.00	-30.57	56.18	38.14	15.88	66.77	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	11160.00	43.44	74.00	-30.56	56.19	38.14	15.88	66.77	0.00	---	---	PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	11160.00	43.43	74.00	-30.57	56.18	38.14	15.88	66.77	0.00	---	---	PEAK																																																																																								

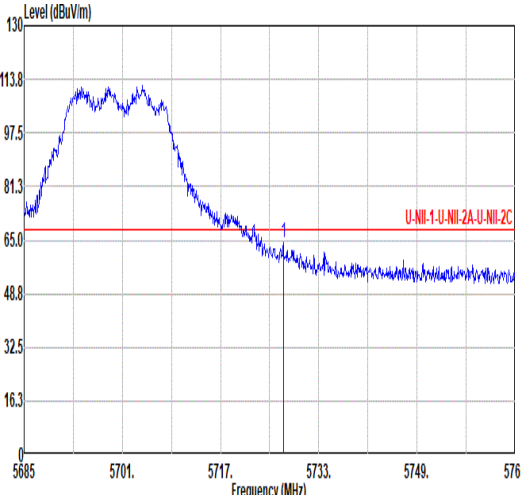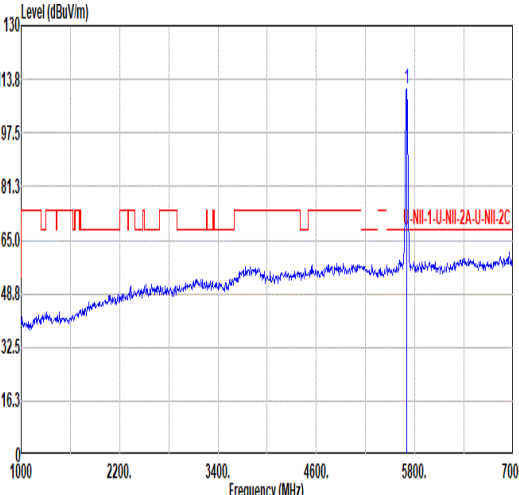
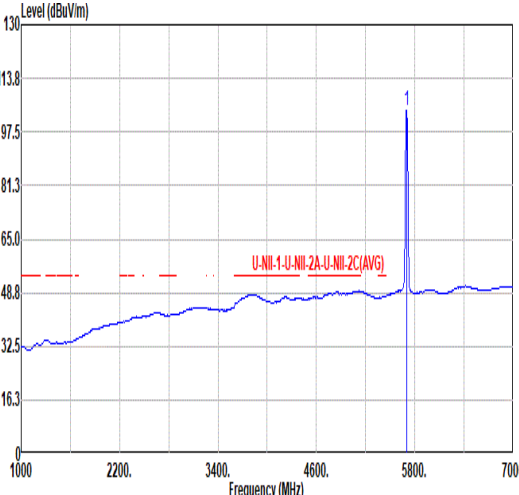


Mode	9																																																																																																			
	Band Edge																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																			
ANT	CDD 8+10																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) U-NII-1-U-NII-2A-U-NII-2C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5727.24</td><td>64.46</td><td>68.20</td><td>-3.74</td><td>55.74</td><td>34.95</td><td>11.33</td><td>37.56</td><td>0.00</td><td>100</td><td>295</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5727.24	64.46	68.20	-3.74	55.74	34.95	11.33	37.56	0.00	100	295	PEAK	 Level (dBuV/m) Frequency (MHz) U-NII-1-U-NII-2A-U-NII-2C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>110.82</td><td>-----</td><td>-----</td><td>102.07</td><td>34.90</td><td>11.29</td><td>37.44</td><td>0.00</td><td>100</td><td>295</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	110.82	-----	-----	102.07	34.90	11.29	37.44	0.00	100	295	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5727.24	64.46	68.20	-3.74	55.74	34.95	11.33	37.56	0.00	100	295	PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5700.00	110.82	-----	-----	102.07	34.90	11.29	37.44	0.00	100	295	PEAK																																																																																								
Avg	Blank						 Level (dBuV/m) Frequency (MHz) U-NII-1-U-NII-2A-U-NII-2C(AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>104.12</td><td>-----</td><td>-----</td><td>95.37</td><td>34.90</td><td>11.29</td><td>37.44</td><td>0.00</td><td>100</td><td>295</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	104.12	-----	-----	95.37	34.90	11.29	37.44	0.00	100	295	AVERAGE																																												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5700.00	104.12	-----	-----	95.37	34.90	11.29	37.44	0.00	100	295	AVERAGE																																																																																								


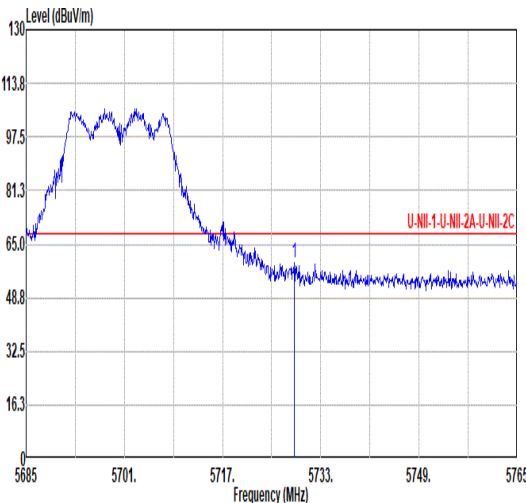
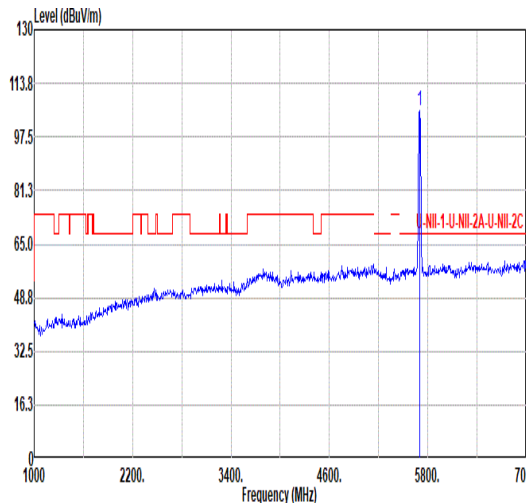
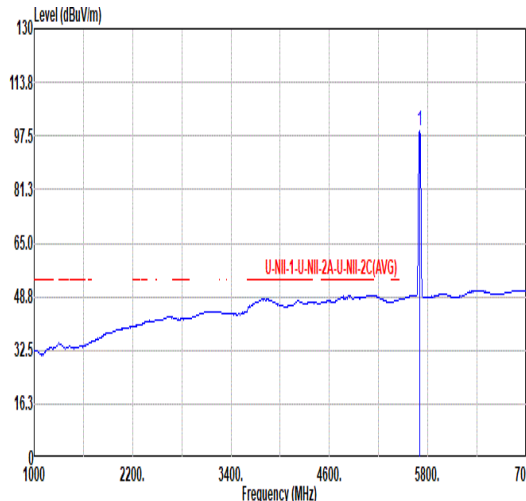


Mode	9																																																																																																		
	Band Edge																																																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																		
ANT	CDD 8+10																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5728.68</td><td>59.47</td><td>68.20</td><td>-8.73</td><td>50.73</td><td>34.96</td><td>11.34</td><td>37.56</td><td>0.00</td><td>300</td><td>118</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5728.68	59.47	68.20	-8.73	50.73	34.96	11.34	37.56	0.00	300	118	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>105.62</td><td>-----</td><td>-----</td><td>96.87</td><td>34.90</td><td>11.29</td><td>37.44</td><td>0.00</td><td>300</td><td>118</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	105.62	-----	-----	96.87	34.90	11.29	37.44	0.00	300	118
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5728.68	59.47	68.20	-8.73	50.73	34.96	11.34	37.56	0.00	300	118	PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5700.00	105.62	-----	-----	96.87	34.90	11.29	37.44	0.00	300	118	PEAK																																																																																							
Avg	Blank																																																																																																		
							<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>98.87</td><td>-----</td><td>-----</td><td>90.13</td><td>34.91</td><td>11.30</td><td>37.47</td><td>0.00</td><td>300</td><td>118</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	98.87	-----	-----	90.13	34.91	11.30	37.47	0.00	300	118	AVERAGE																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5700.00	98.87	-----	-----	90.13	34.91	11.30	37.47	0.00	300	118	AVERAGE																																																																																							



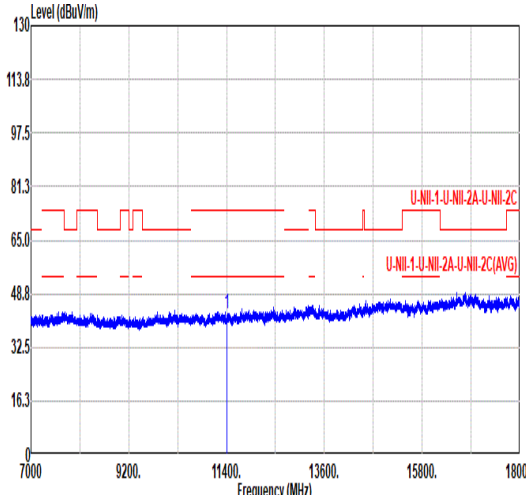
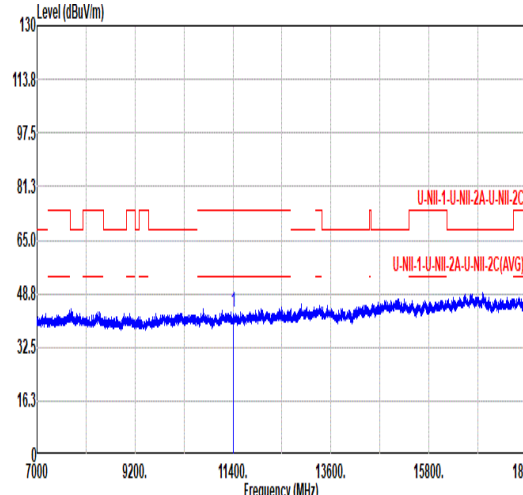


Mode	9																																																																																																									
	Harmonic																																																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																									
ANT	CDD 8+10																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak Avg																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>42.49</td><td>74.00</td><td>-31.51</td><td>54.96</td><td>38.20</td><td>16.05</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11400.00	42.49	74.00	-31.51	54.96	38.20	16.05	66.72	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>43.14</td><td>74.00</td><td>-30.86</td><td>55.61</td><td>38.20</td><td>16.05</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11400.00	43.14	74.00	-30.86	55.61	38.20	16.05	66.72	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	11400.00	42.49	74.00	-31.51	54.96	38.20	16.05	66.72	0.00	---	---	PEAK																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	11400.00	43.14	74.00	-30.86	55.61	38.20	16.05	66.72	0.00	---	---	PEAK																																																																																														

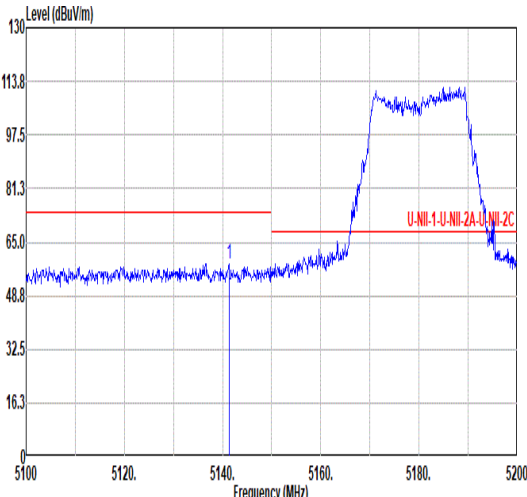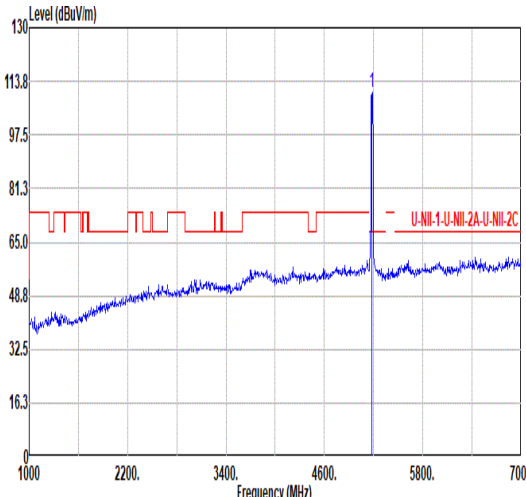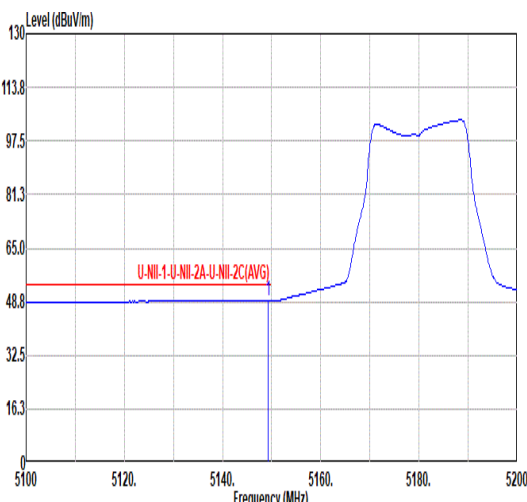
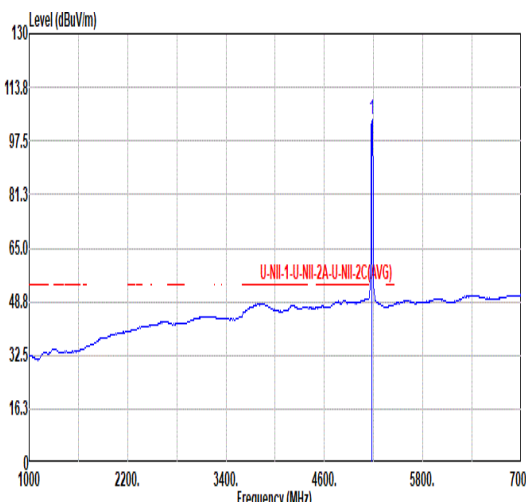


Mode	10																																																																																																				
	Band Edge																																																																																																				
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full_5180MHz																																																																																																				
ANT	CDD 8+10																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5141.30</td><td>58.56</td><td>74.00</td><td>-15.44</td><td>50.75</td><td>34.60</td><td>10.65</td><td>37.44</td><td>0.00</td><td>100</td><td>117 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5141.30	58.56	74.00	-15.44	50.75	34.60	10.65	37.44	0.00	100	117 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>110.57</td><td>-----</td><td>-----</td><td>102.54</td><td>34.75</td><td>10.70</td><td>37.42</td><td>0.00</td><td>100</td><td>117 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	110.57	-----	-----	102.54	34.75	10.70	37.42	0.00	100	117 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5141.30	58.56	74.00	-15.44	50.75	34.60	10.65	37.44	0.00	100	117 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5180.00	110.57	-----	-----	102.54	34.75	10.70	37.42	0.00	100	117 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.20</td><td>49.21</td><td>54.00</td><td>-4.79</td><td>41.39</td><td>34.60</td><td>10.65</td><td>37.43</td><td>0.00</td><td>100</td><td>117 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.20	49.21	54.00	-4.79	41.39	34.60	10.65	37.43	0.00	100	117 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.01</td><td>-----</td><td>-----</td><td>95.98</td><td>34.75</td><td>10.70</td><td>37.42</td><td>0.00</td><td>100</td><td>117 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	104.01	-----	-----	95.98	34.75	10.70	37.42	0.00	100	117 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5149.20	49.21	54.00	-4.79	41.39	34.60	10.65	37.43	0.00	100	117 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5180.00	104.01	-----	-----	95.98	34.75	10.70	37.42	0.00	100	117 AVERAGE																																																																																										

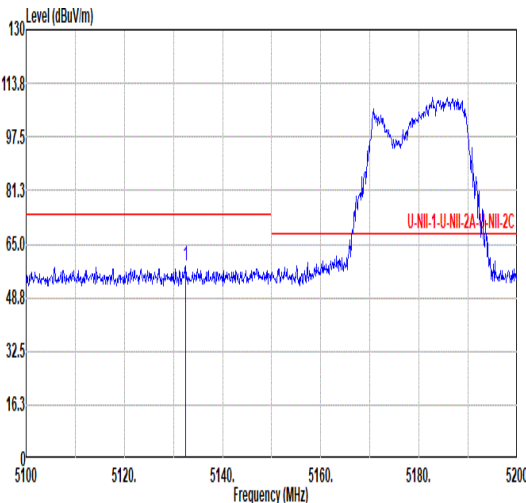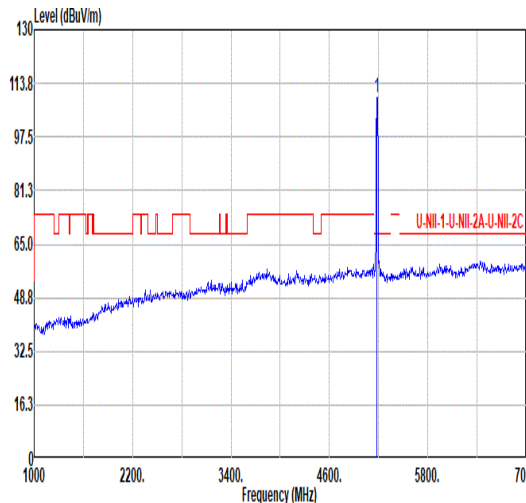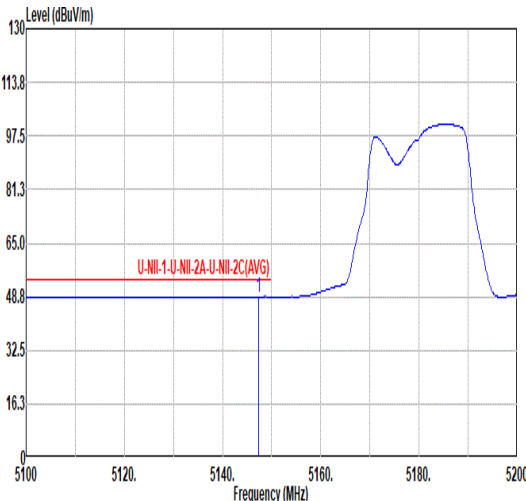
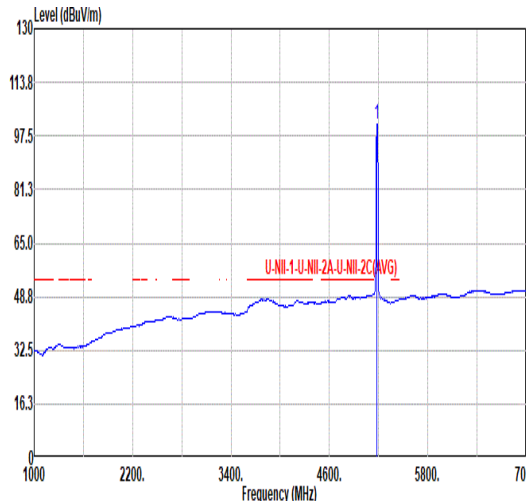


Mode	10																																																										
	Band Edge																																																										
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full_5180MHz																																																										
ANT	CDD 8+10																																																										
Pol.	Vertical						Fundamental																																																				
Peak																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5132.40</td><td>58.36</td><td>74.00</td><td>-15.64</td><td>50.56</td><td>34.60</td><td>10.64</td><td>37.44</td><td>0.00</td><td>341</td><td>54 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5132.40	58.36	74.00	-15.64	50.56	34.60	10.64	37.44	0.00	341
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																		
1	5132.40	58.36	74.00	-15.64	50.56	34.60	10.64	37.44	0.00	341	54 PEAK																																																
Fundamental																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5180.00</td><td>109.58</td><td>-----</td><td>-----</td><td>101.55</td><td>34.75</td><td>10.70</td><td>37.42</td><td>0.00</td><td>341</td><td>54 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5180.00	109.58	-----	-----	101.55	34.75	10.70	37.42	0.00	341
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																		
1	5180.00	109.58	-----	-----	101.55	34.75	10.70	37.42	0.00	341	54 PEAK																																																
Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5147.40</td><td>48.81</td><td>54.00</td><td>-5.19</td><td>41.00</td><td>34.60</td><td>10.65</td><td>37.44</td><td>0.00</td><td>341</td><td>54 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5147.40	48.81	54.00	-5.19	41.00	34.60	10.65	37.44	0.00	341
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																		
1	5147.40	48.81	54.00	-5.19	41.00	34.60	10.65	37.44	0.00	341	54 AVERAGE																																																
Fundamental																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5180.00</td><td>101.21</td><td>-----</td><td>-----</td><td>93.18</td><td>34.75</td><td>10.70</td><td>37.42</td><td>0.00</td><td>341</td><td>54 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5180.00	101.21	-----	-----	93.18	34.75	10.70	37.42	0.00	341
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																		
1	5180.00	101.21	-----	-----	93.18	34.75	10.70	37.42	0.00	341	54 AVERAGE																																																

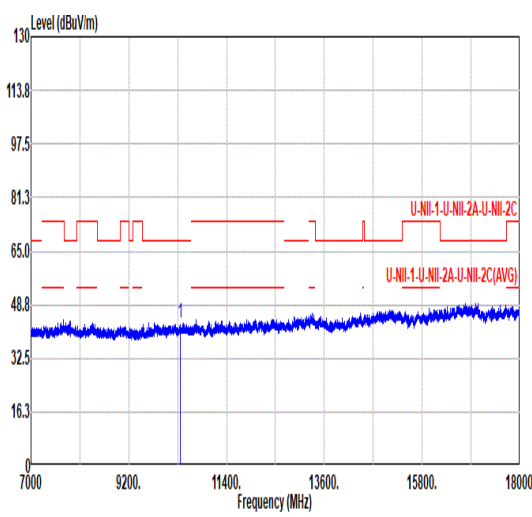
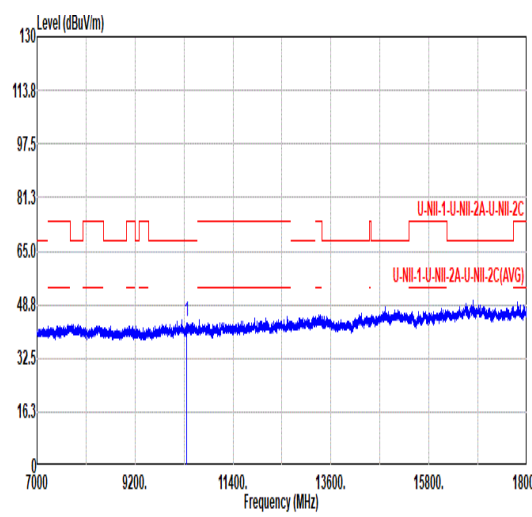


Mode	10																																																																																																			
	Harmonic																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full_5180MHz																																																																																																			
ANT	CDD 8+10																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>43.35</td><td>68.20</td><td>-24.85</td><td>57.65</td><td>37.80</td><td>15.30</td><td>67.40</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	43.35	68.20	-24.85	57.65	37.80	15.30	67.40	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>43.74</td><td>68.20</td><td>-24.46</td><td>58.06</td><td>37.80</td><td>15.29</td><td>67.41</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	43.74	68.20	-24.46	58.06	37.80	15.29	67.41	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	10360.00	43.35	68.20	-24.85	57.65	37.80	15.30	67.40	0.00	---	---	PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	10360.00	43.74	68.20	-24.46	58.06	37.80	15.29	67.41	0.00	---	---	PEAK																																																																																								

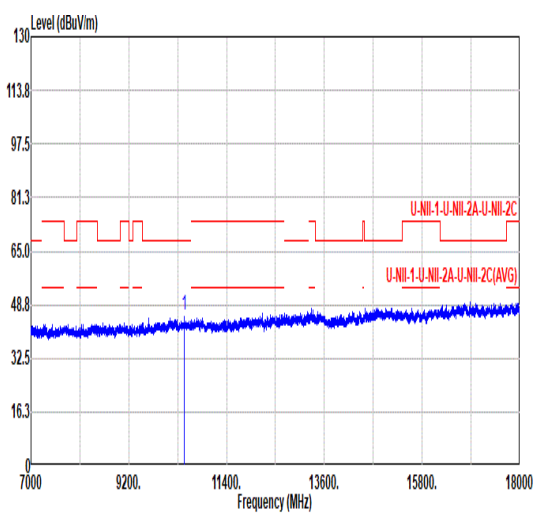
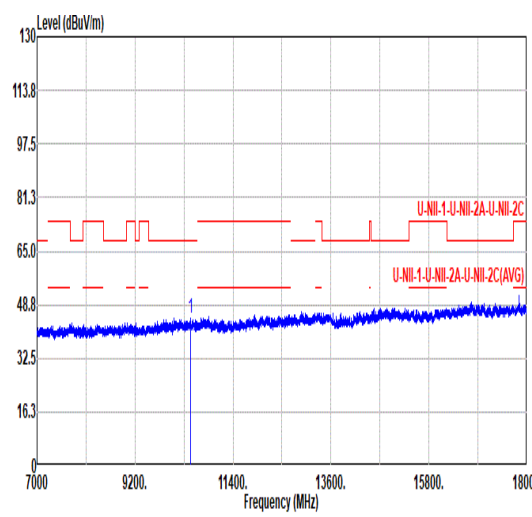


Mode	11																																																								
	Harmonic																																																								
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full_5220MHz																																																								
ANT	CDD 8+10																																																								
Pol.	Horizontal						Vertical																																																		
Peak Avg																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10440.00</td><td>45.44</td><td>68.20</td><td>-22.76</td><td>59.56</td><td>37.83</td><td>15.35</td><td>67.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10440.00	45.44	68.20	-22.76	59.56	37.83	15.35	67.30	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1 10440.00	45.44	68.20	-22.76	59.56	37.83	15.35	67.30	0.00	---	---	PEAK																																														
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10440.00</td><td>44.84</td><td>68.20</td><td>-23.36</td><td>58.95</td><td>37.83</td><td>15.35</td><td>67.29</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10440.00	44.84	68.20	-23.36	58.95	37.83	15.35	67.29	0.00	---	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1 10440.00	44.84	68.20	-23.36	58.95	37.83	15.35	67.29	0.00	---	---	PEAK																																														

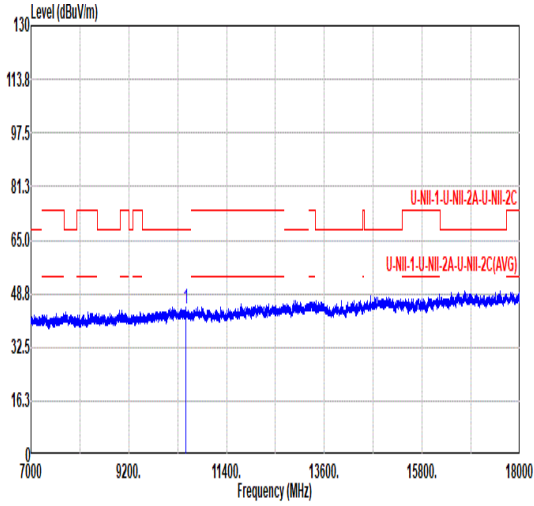
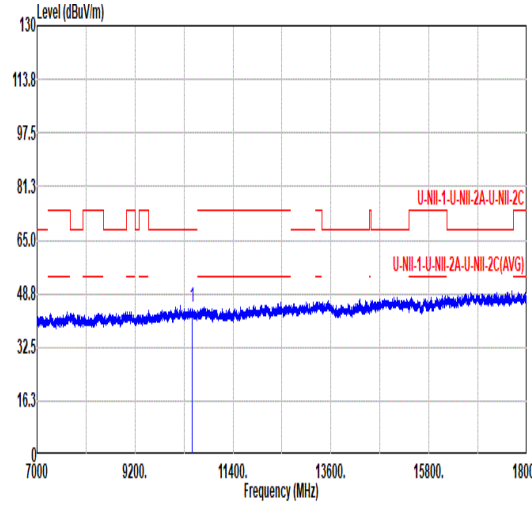


Mode	12																																																																																																			
	Harmonic																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full_5240MHz																																																																																																			
ANT	CDD 8+10																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>44.35</td><td>68.20</td><td>-23.85</td><td>58.32</td><td>37.88</td><td>15.38</td><td>67.23</td><td>0.00</td><td>---</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	44.35	68.20	-23.85	58.32	37.88	15.38	67.23	0.00	---	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>44.59</td><td>68.20</td><td>-23.61</td><td>58.54</td><td>37.88</td><td>15.39</td><td>67.22</td><td>0.00</td><td>---</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	44.59	68.20	-23.61	58.54	37.88	15.39	67.22	0.00	---
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	10480.00	44.35	68.20	-23.85	58.32	37.88	15.38	67.23	0.00	---																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	10480.00	44.59	68.20	-23.61	58.54	37.88	15.39	67.22	0.00	---																																																																																										
	PEAK						PEAK																																																																																													



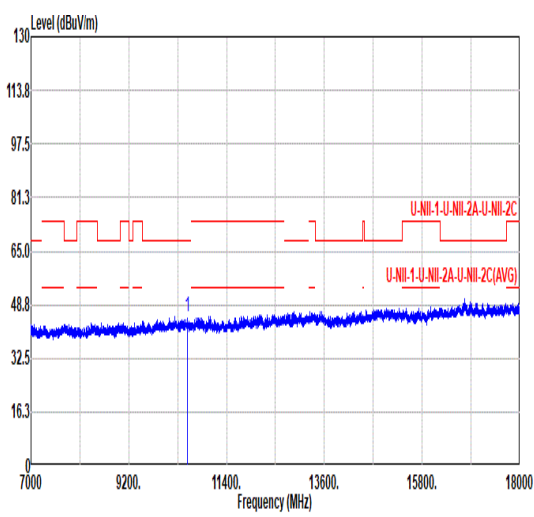
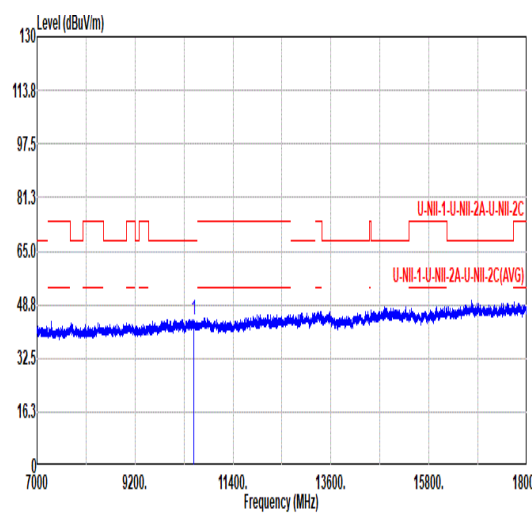


		13																																																									
Mode		Harmonic																																																									
		U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full_5260MHz																																																									
ANT		CDD 8+10																																																									
Pol.		Horizontal																																																									
Peak Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>45.02</td><td>68.20</td><td>-23.18</td><td>58.92</td><td>37.88</td><td>15.41</td><td>67.19</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10520.00	45.02	68.20	-23.18	58.92	37.88	15.41	67.19	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	10520.00	45.02	68.20	-23.18	58.92	37.88	15.41	67.19	0.00	---	---	PEAK																																															
		Vertical																																																									
Peak Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>43.92</td><td>68.20</td><td>-24.28</td><td>57.82</td><td>37.88</td><td>15.41</td><td>67.19</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10520.00	43.92	68.20	-24.28	57.82	37.88	15.41	67.19	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	10520.00	43.92	68.20	-24.28	57.82	37.88	15.41	67.19	0.00	---	---	PEAK																																															



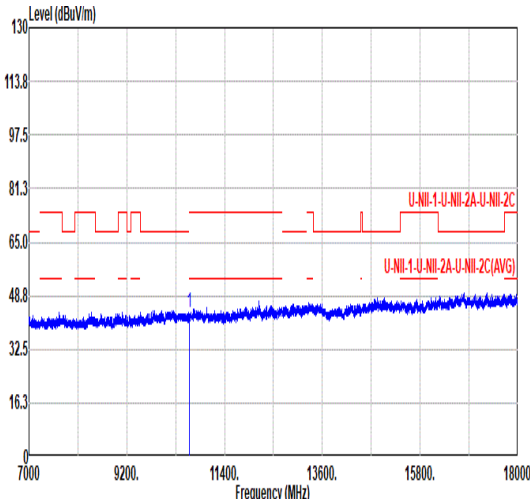
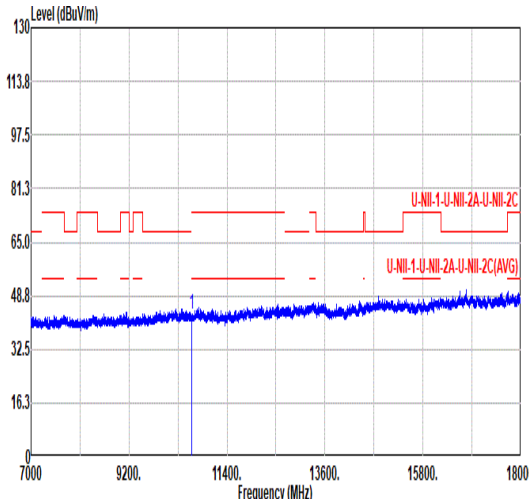


Mode	14																																																																																		
	Harmonic																																																																																		
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_Full_5300MHz																																																																																		
ANT	CDD 8+10																																																																																		
Pol.	Horizontal											Vertical																																																																							
Peak Avg																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>10600.00</td><td>43.61</td><td>68.20</td><td>-24.59</td><td>57.46</td><td>37.00</td><td>15.47</td><td>67.12</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	1	10600.00	43.61	68.20	-24.59	57.46	37.00	15.47	67.12	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>10600.00</td><td>43.33</td><td>68.20</td><td>-24.87</td><td>57.18</td><td>37.00</td><td>15.47</td><td>67.12</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	1	10600.00	43.33	68.20	-24.87	57.18	37.00	15.47	67.12	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																									
1	10600.00	43.61	68.20	-24.59	57.46	37.00	15.47	67.12	0.00	---	---	PEAK																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																									
1	10600.00	43.33	68.20	-24.87	57.18	37.00	15.47	67.12	0.00	---	---	PEAK																																																																							
<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10600.00</td><td>43.61</td><td>68.20</td><td>-24.59</td><td>57.46</td><td>37.00</td><td>15.47</td><td>67.12</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>												MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	43.61	68.20	-24.59	57.46	37.00	15.47	67.12	0.00	---	---	PEAK	<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10600.00</td><td>43.33</td><td>68.20</td><td>-24.87</td><td>57.18</td><td>37.00</td><td>15.47</td><td>67.12</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	43.33	68.20	-24.87	57.18	37.00	15.47	67.12	0.00	---	---	PEAK																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1	10600.00	43.61	68.20	-24.59	57.46	37.00	15.47	67.12	0.00	---	---	PEAK																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1	10600.00	43.33	68.20	-24.87	57.18	37.00	15.47	67.12	0.00	---	---	PEAK																																																																							

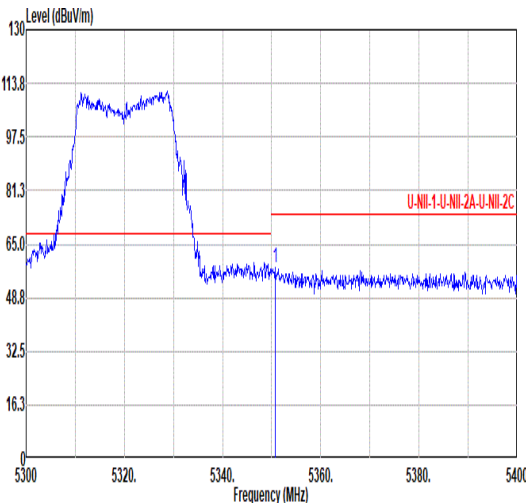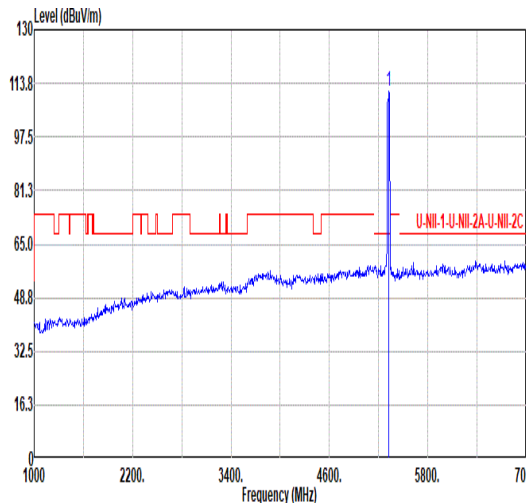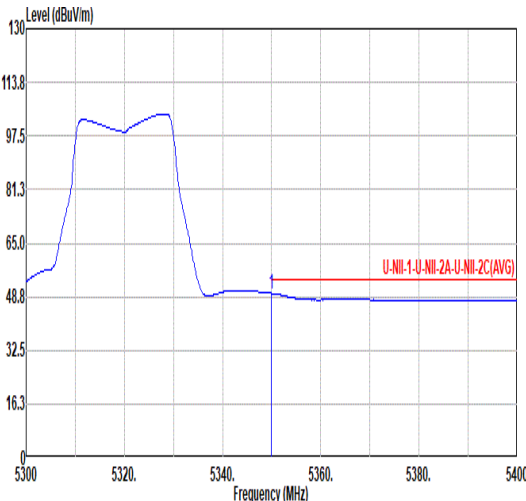
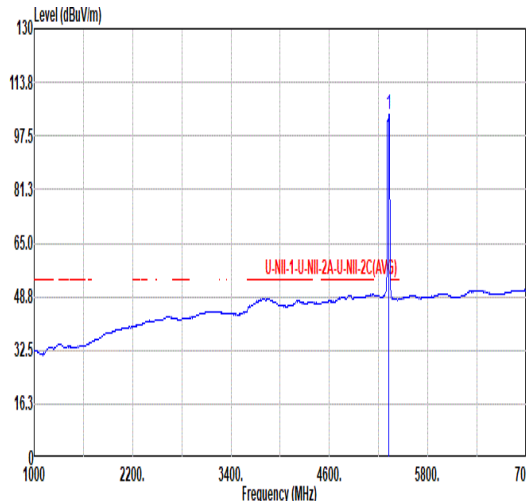


Mode	15																																																						
	Band Edge																																																						
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Full_5320MHz																																																						
ANT	CDD 8+10																																																						
Pol.	Horizontal																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.70</td><td>57.89</td><td>74.00</td><td>-16.11</td><td>49.60</td><td>34.80</td><td>10.84</td><td>37.35</td><td>0.00</td><td>107 116 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.70	57.89	74.00	-16.11	49.60	34.80	10.84	37.35	0.00	107 116 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5350.70	57.89	74.00	-16.11	49.60	34.80	10.84	37.35	0.00	107 116 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>111.31</td><td>-----</td><td>-----</td><td>103.10</td><td>34.75</td><td>10.82</td><td>37.36</td><td>0.00</td><td>107 116 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	111.31	-----	-----	103.10	34.75	10.82	37.36	0.00	107 116 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5320.00	111.31	-----	-----	103.10	34.75	10.82	37.36	0.00	107 116 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>49.79</td><td>54.00</td><td>-4.21</td><td>41.50</td><td>34.80</td><td>10.84</td><td>37.35</td><td>0.00</td><td>107 116 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.00	49.79	54.00	-4.21	41.50	34.80	10.84	37.35	0.00	107 116 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5350.00	49.79	54.00	-4.21	41.50	34.80	10.84	37.35	0.00	107 116 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>104.20</td><td>-----</td><td>-----</td><td>95.99</td><td>34.75</td><td>10.82</td><td>37.36</td><td>0.00</td><td>107 116 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	104.20	-----	-----	95.99	34.75	10.82	37.36	0.00	107 116 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5320.00	104.20	-----	-----	95.99	34.75	10.82	37.36	0.00	107 116 AVERAGE																																													

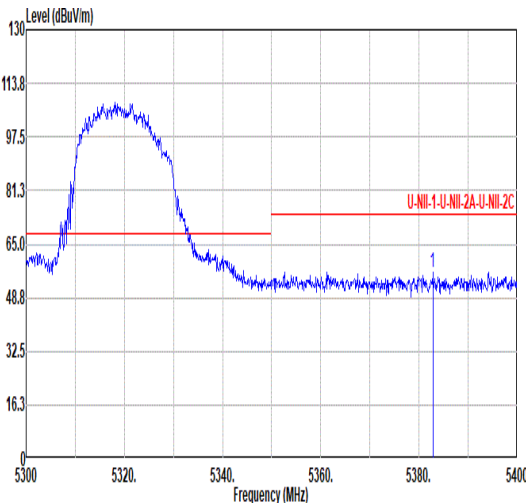
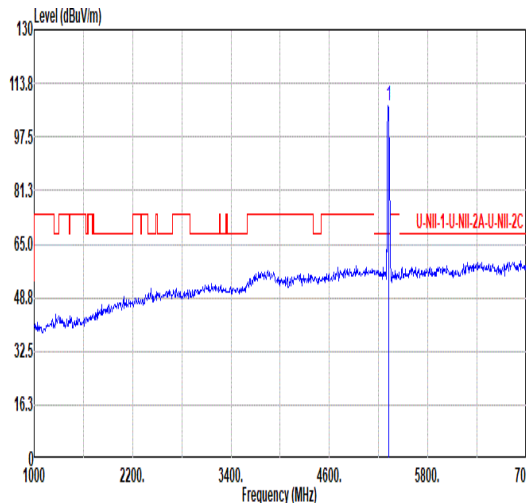
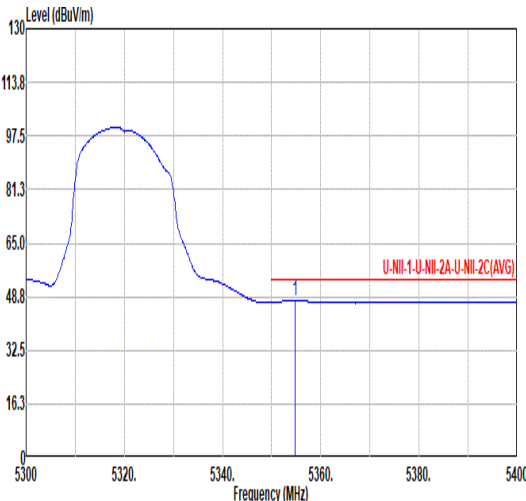
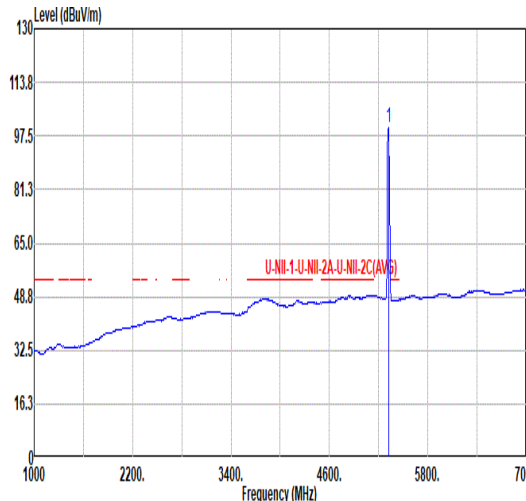


Mode	15																																																							
	Band Edge																																																							
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Full_5320MHz																																																							
ANT	CDD 8+10																																																							
Pol.	Vertical																																																							
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5382.80</td><td>56.35</td><td>74.00</td><td>-17.65</td><td>47.94</td><td>34.87</td><td>10.87</td><td>37.33</td><td>0.00</td><td>342</td><td>81 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5382.80	56.35	74.00	-17.65	47.94	34.87	10.87	37.33	0.00	342	81 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5382.80	56.35	74.00	-17.65	47.94	34.87	10.87	37.33	0.00	342	81 PEAK																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>106.97</td><td>-----</td><td>-----</td><td>98.80</td><td>34.73</td><td>10.80</td><td>37.36</td><td>0.00</td><td>342</td><td>81 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	106.97	-----	-----	98.80	34.73	10.80	37.36	0.00	342	81 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5320.00	106.97	-----	-----	98.80	34.73	10.80	37.36	0.00	342	81 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.70</td><td>47.55</td><td>54.00</td><td>-6.45</td><td>39.24</td><td>34.81</td><td>10.84</td><td>37.34</td><td>0.00</td><td>342</td><td>81 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5354.70	47.55	54.00	-6.45	39.24	34.81	10.84	37.34	0.00	342	81 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5354.70	47.55	54.00	-6.45	39.24	34.81	10.84	37.34	0.00	342	81 AVERAGE																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>100.13</td><td>-----</td><td>-----</td><td>91.94</td><td>34.74</td><td>10.81</td><td>37.36</td><td>0.00</td><td>342</td><td>81 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	100.13	-----	-----	91.94	34.74	10.81	37.36	0.00	342	81 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5320.00	100.13	-----	-----	91.94	34.74	10.81	37.36	0.00	342	81 AVERAGE																																													



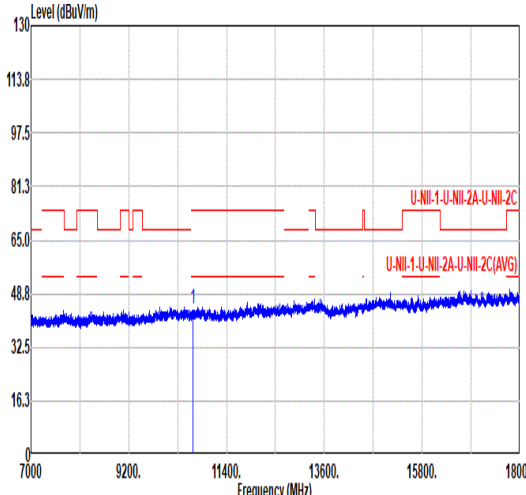
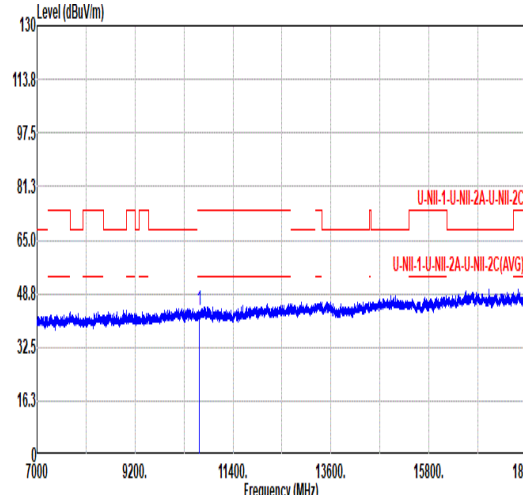


		15																																																								
Mode		Harmonic																																																								
		U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Full_5320MHz																																																								
ANT		CDD 8+10																																																								
Pol.		Horizontal																																																								
Peak Avg																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>44.17</td><td>74.00</td><td>-29.83</td><td>57.88</td><td>37.88</td><td>15.50</td><td>67.09</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10640.00	44.17	74.00	-29.83	57.88	37.88	15.50	67.09	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	10640.00	44.17	74.00	-29.83	57.88	37.88	15.50	67.09	0.00	---	PEAK																																															
		Vertical																																																								
Peak Avg																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>43.86</td><td>74.00</td><td>-30.14</td><td>57.57</td><td>37.88</td><td>15.50</td><td>67.09</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10640.00	43.86	74.00	-30.14	57.57	37.88	15.50	67.09	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	10640.00	43.86	74.00	-30.14	57.57	37.88	15.50	67.09	0.00	---	PEAK																																															

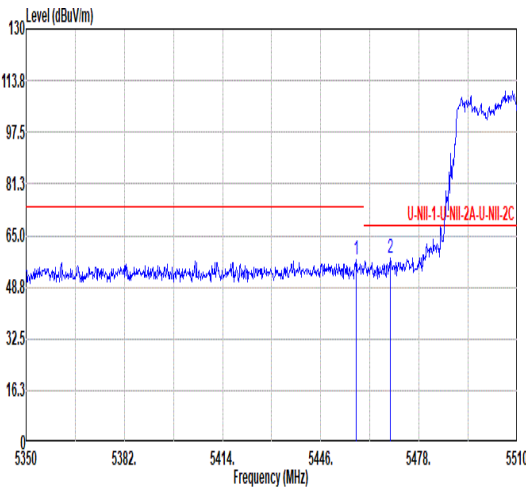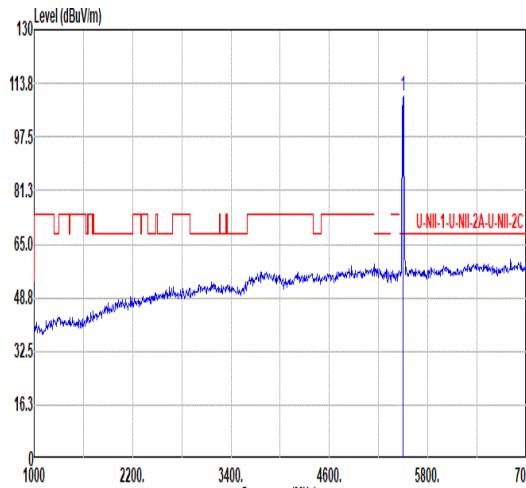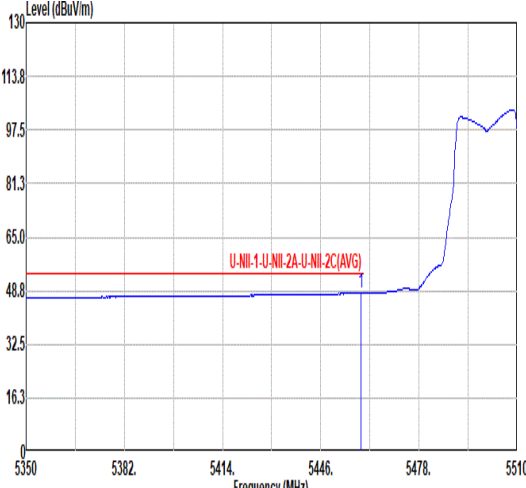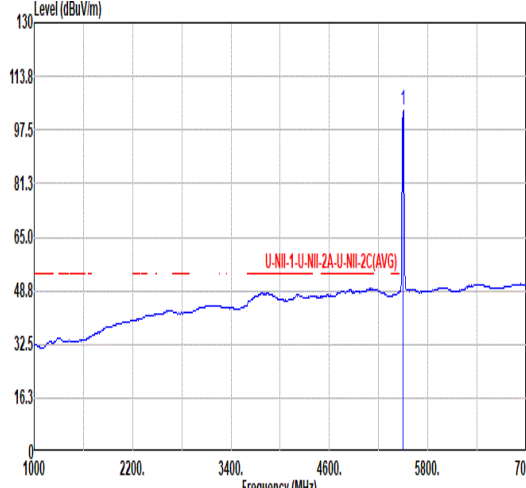

Mode	16																																																																			
	Band Edge																																																																			
	U-NII-2C_5.47-5.725_802.11be EHT20_CH100_Full_5500MHz																																																																			
ANT	CDD 8+10																																																																			
Pol.	Horizontal																																																																			
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.52</td><td>57.59</td><td>74.00</td><td>-16.41</td><td>48.95</td><td>34.98</td><td>10.96</td><td>37.30</td><td>0.00</td><td>112</td><td>117 PEAK</td></tr><tr><td>2</td><td>5468.72</td><td>57.78</td><td>68.20</td><td>-10.42</td><td>49.13</td><td>34.96</td><td>10.98</td><td>37.29</td><td>0.00</td><td>112</td><td>117 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.52	57.59	74.00	-16.41	48.95	34.98	10.96	37.30	0.00	112	117 PEAK	2	5468.72	57.78	68.20	-10.42	49.13	34.96	10.98	37.29	0.00	112	117 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5457.52	57.59	74.00	-16.41	48.95	34.98	10.96	37.30	0.00	112	117 PEAK																																																									
2	5468.72	57.78	68.20	-10.42	49.13	34.96	10.98	37.29	0.00	112	117 PEAK																																																									
Fundamental																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>109.97</td><td>-----</td><td>-----</td><td>101.32</td><td>34.90</td><td>11.03</td><td>37.28</td><td>0.00</td><td>112</td><td>117 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	109.97	-----	-----	101.32	34.90	11.03	37.28	0.00	112	117 PEAK												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5500.00	109.97	-----	-----	101.32	34.90	11.03	37.28	0.00	112	117 PEAK																																																									
Avg																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.12</td><td>47.95</td><td>54.00</td><td>-6.05</td><td>39.30</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>112</td><td>117 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.12	47.95	54.00	-6.05	39.30	34.98	10.97	37.30	0.00	112	117 AVERAGE												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5459.12	47.95	54.00	-6.05	39.30	34.98	10.97	37.30	0.00	112	117 AVERAGE																																																									
Fundamental																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>103.60</td><td>-----</td><td>-----</td><td>94.95</td><td>34.90</td><td>11.03</td><td>37.28</td><td>0.00</td><td>112</td><td>117 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	103.60	-----	-----	94.95	34.90	11.03	37.28	0.00	112	117 AVERAGE												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5500.00	103.60	-----	-----	94.95	34.90	11.03	37.28	0.00	112	117 AVERAGE																																																									

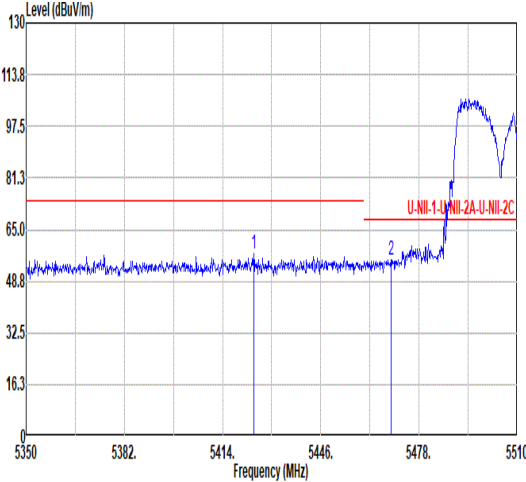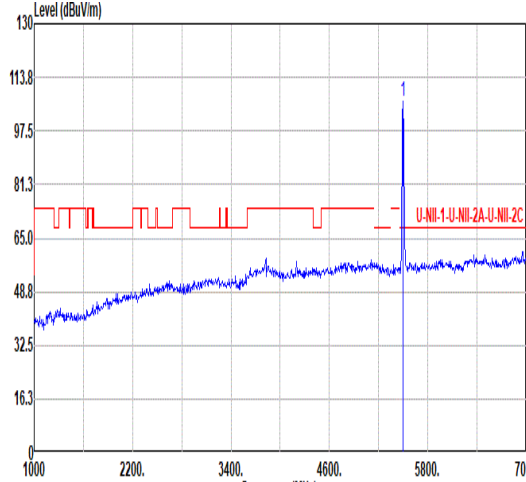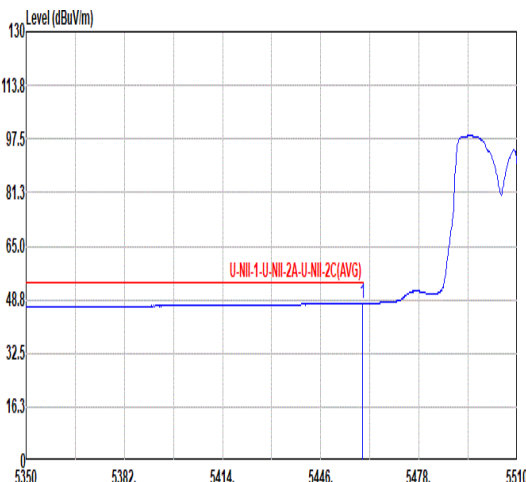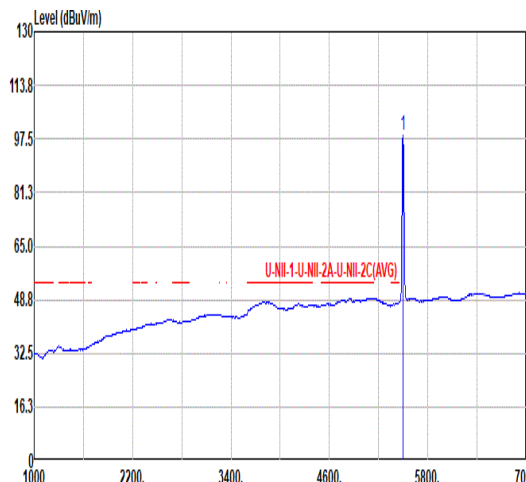


Mode	16																																																																																																															
	Band Edge																																																																																																															
	U-NII-2C_5.47-5.725_802.11be EHT20_CH100_Full_5500MHz																																																																																																															
ANT	CDD 8+10																																																																																																															
Pol.	Vertical						Fundamental																																																																																																									
Peak																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5424.24</td><td>57.37</td><td>74.00</td><td>-16.63</td><td>48.81</td><td>34.95</td><td>10.92</td><td>37.31</td><td>0.00</td><td>300</td><td>107 PEAK</td></tr><tr><td>2</td><td>5468.88</td><td>55.56</td><td>68.20</td><td>-12.64</td><td>46.91</td><td>34.96</td><td>10.98</td><td>37.29</td><td>0.00</td><td>300</td><td>107 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5424.24	57.37	74.00	-16.63	48.81	34.95	10.92	37.31	0.00	300	107 PEAK	2	5468.88	55.56	68.20	-12.64	46.91	34.96	10.98	37.29	0.00	300	107 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>106.56</td><td>-----</td><td>-----</td><td>97.92</td><td>34.91</td><td>11.01</td><td>37.28</td><td>0.00</td><td>300</td><td>107 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	106.56	-----	-----	97.92	34.91	11.01	37.28	0.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5424.24	57.37	74.00	-16.63	48.81	34.95	10.92	37.31	0.00	300	107 PEAK																																																																																																					
2	5468.88	55.56	68.20	-12.64	46.91	34.96	10.98	37.29	0.00	300	107 PEAK																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5500.00	106.56	-----	-----	97.92	34.91	11.01	37.28	0.00	300	107 PEAK																																																																																																					
Avg																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.60</td><td>47.66</td><td>54.00</td><td>-6.34</td><td>39.01</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>300</td><td>107 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	47.66	54.00	-6.34	39.01	34.98	10.97	37.30	0.00	300	107 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>98.47</td><td>-----</td><td>-----</td><td>89.83</td><td>34.91</td><td>11.01</td><td>37.28</td><td>0.00</td><td>300</td><td>107 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	98.47	-----	-----	89.83	34.91	11.01	37.28	0.00	300	107 AVERAGE											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5459.60	47.66	54.00	-6.34	39.01	34.98	10.97	37.30	0.00	300	107 AVERAGE																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5500.00	98.47	-----	-----	89.83	34.91	11.01	37.28	0.00	300	107 AVERAGE																																																																																																					






		16																																																								
Mode		Harmonic																																																								
		U-NII-2C_5.47-5.725_802.11be EHT20_CH100_Full_5500MHz																																																								
ANT		CDD 8+10																																																								
Pol.		Horizontal						Vertical																																																		
Peak Avg																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>44.20</td><td>74.00</td><td>-29.80</td><td>57.04</td><td>38.20</td><td>15.76</td><td>66.80</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	44.20	74.00	-29.80	57.04	38.20	15.76	66.80	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																
1	11000.00	44.20	74.00	-29.80	57.04	38.20	15.76	66.80	0.00	---	---	PEAK																																														
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>44.82</td><td>74.00</td><td>-29.18</td><td>57.66</td><td>38.20</td><td>15.76</td><td>66.80</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11000.00	44.82	74.00	-29.18	57.66	38.20	15.76	66.80	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	11000.00	44.82	74.00	-29.18	57.66	38.20	15.76	66.80	0.00	---	---	PEAK																																														



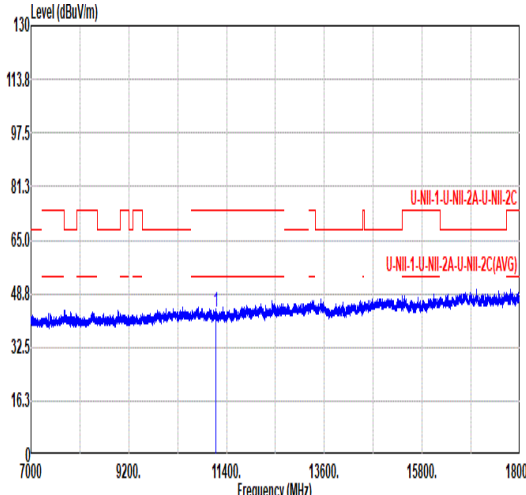


		17																																																								
Mode		Harmonic																																																								
		U-NII-2C_5.47-5.725_802.11be EHT20_CH116_Full_5580MHz																																																								
ANT		CDD 8+10																																																								
Pol.		Horizontal																																																								
Peak Avg																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11160.00</td><td>43.02</td><td>74.00</td><td>-30.98</td><td>55.77</td><td>38.14</td><td>15.88</td><td>66.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11160.00	43.02	74.00	-30.98	55.77	38.14	15.88	66.77	0.00	---	---	PEAK	
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1 11160.00	43.02	74.00	-30.98	55.77	38.14	15.88	66.77	0.00	---	---	PEAK																																															
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11160.00</td><td>43.56</td><td>74.00</td><td>-30.44</td><td>56.31</td><td>38.14</td><td>15.88</td><td>66.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11160.00	43.56	74.00	-30.44	56.31	38.14	15.88	66.77	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1 11160.00	43.56	74.00	-30.44	56.31	38.14	15.88	66.77	0.00	---	---	PEAK																																															
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11160.00</td><td>43.56</td><td>74.00</td><td>-30.44</td><td>56.31</td><td>38.14</td><td>15.88</td><td>66.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11160.00	43.56	74.00	-30.44	56.31	38.14	15.88	66.77	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1 11160.00	43.56	74.00	-30.44	56.31	38.14	15.88	66.77	0.00	---	---	PEAK																																															

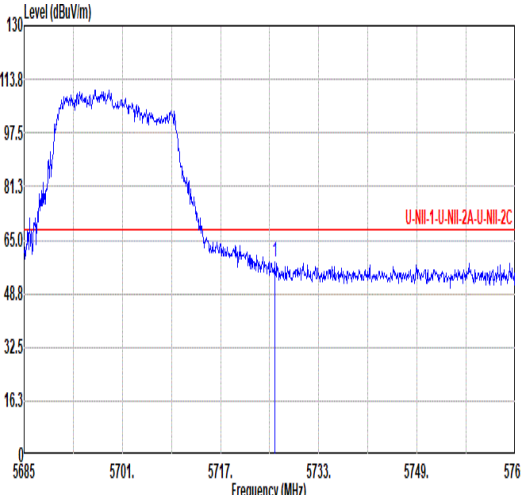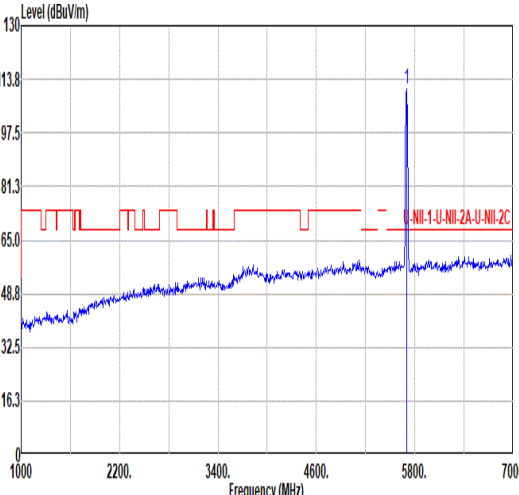
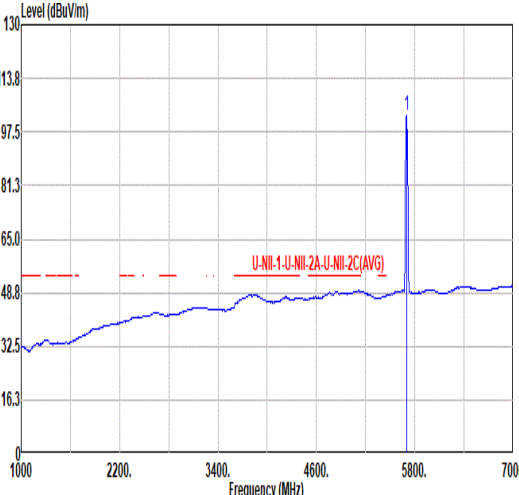


Mode	18																																																																																																			
	Band Edge																																																																																																			
	U-NII-2C_5.47-5.725_802.11be EHT20_CH140_Full_5700MHz																																																																																																			
ANT	CDD 8+10																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) U-NII-1-U-NII-2A-U-NII-2C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>58.51</td><td>68.20</td><td>-9.69</td><td>49.78</td><td>34.95</td><td>11.33</td><td>37.55</td><td>0.00</td><td>105</td><td>302</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.00	58.51	68.20	-9.69	49.78	34.95	11.33	37.55	0.00	105	302	PEAK	 Level (dBuV/m) Frequency (MHz) U-NII-1-U-NII-2A-U-NII-2C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>110.77</td><td>-----</td><td>-----</td><td>102.02</td><td>34.90</td><td>11.29</td><td>37.44</td><td>0.00</td><td>105</td><td>302</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	110.77	-----	-----	102.02	34.90	11.29	37.44	0.00	105	302	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5725.00	58.51	68.20	-9.69	49.78	34.95	11.33	37.55	0.00	105	302	PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5700.00	110.77	-----	-----	102.02	34.90	11.29	37.44	0.00	105	302	PEAK																																																																																								
Avg	Blank						 Level (dBuV/m) Frequency (MHz) U-NII-1-U-NII-2A-U-NII-2C(AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>102.40</td><td>-----</td><td>-----</td><td>93.65</td><td>34.90</td><td>11.29</td><td>37.44</td><td>0.00</td><td>105</td><td>302</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	102.40	-----	-----	93.65	34.90	11.29	37.44	0.00	105	302	AVERAGE																																												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5700.00	102.40	-----	-----	93.65	34.90	11.29	37.44	0.00	105	302	AVERAGE																																																																																								


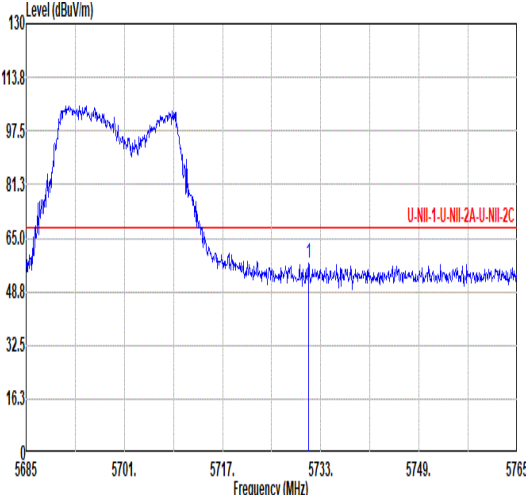
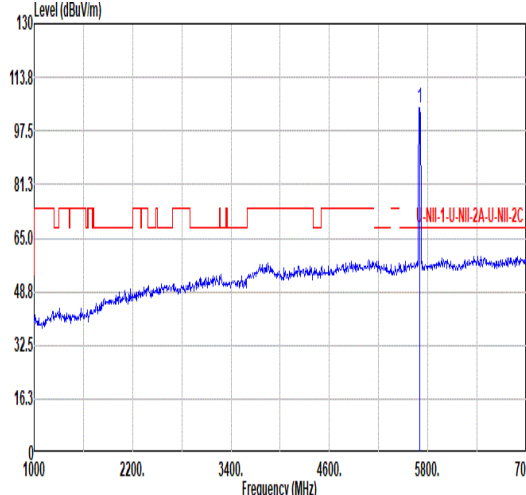
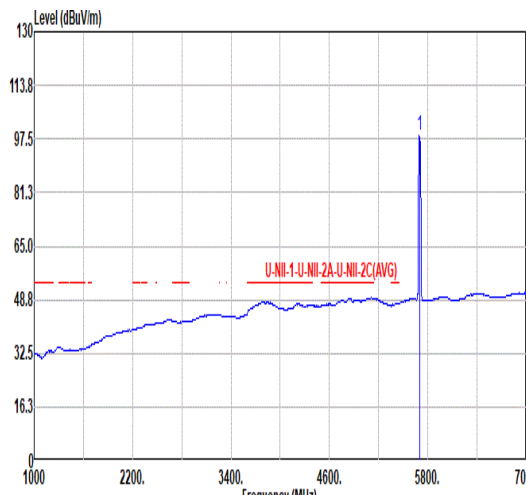


Mode	18																																																																																																		
	Band Edge																																																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT20_CH140_Full_5700MHz																																																																																																		
ANT	CDD 8+10																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5731.00</td><td>57.15</td><td>68.20</td><td>-11.05</td><td>48.42</td><td>34.96</td><td>11.34</td><td>37.57</td><td>0.00</td><td>283</td><td>113</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5731.00	57.15	68.20	-11.05	48.42	34.96	11.34	37.57	0.00	283	113	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>104.45</td><td>-----</td><td>-----</td><td>95.69</td><td>34.90</td><td>11.28</td><td>37.42</td><td>0.00</td><td>283</td><td>113</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	104.45	-----	-----	95.69	34.90	11.28	37.42	0.00	283	113
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5731.00	57.15	68.20	-11.05	48.42	34.96	11.34	37.57	0.00	283	113	PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5700.00	104.45	-----	-----	95.69	34.90	11.28	37.42	0.00	283	113	PEAK																																																																																							
Avg	Blank																																																																																																		
							<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>98.45</td><td>-----</td><td>-----</td><td>89.69</td><td>34.90</td><td>11.28</td><td>37.42</td><td>0.00</td><td>283</td><td>113</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	98.45	-----	-----	89.69	34.90	11.28	37.42	0.00	283	113	AVERAGE																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5700.00	98.45	-----	-----	89.69	34.90	11.28	37.42	0.00	283	113	AVERAGE																																																																																							

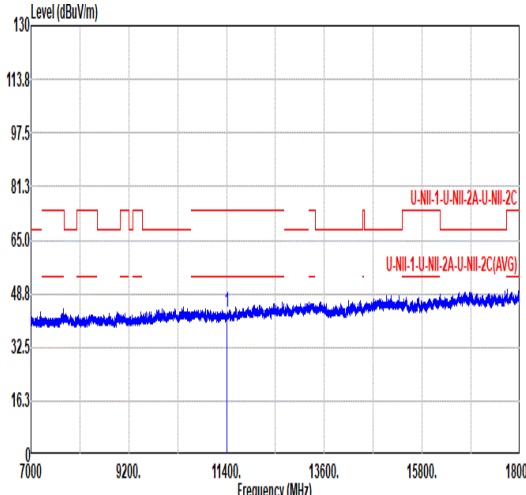
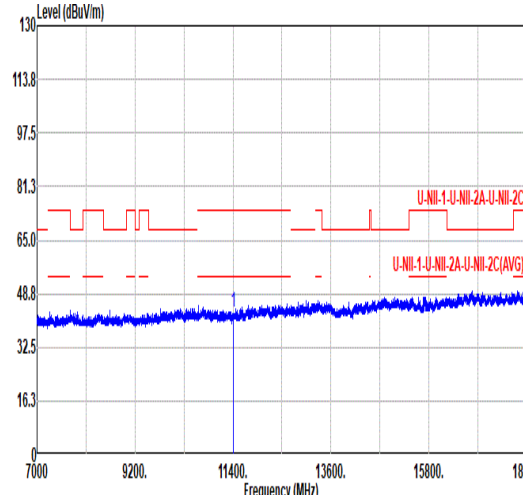


		18																																																							
Mode		Harmonic																																																							
		U-NII-2C_5.47-5.725_802.11be EHT20_CH140_Full_5700MHz																																																							
ANT		CDD 8+10																																																							
Pol.		Horizontal						Vertical																																																	
Peak Avg																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11400.00</td><td>42.93</td><td>74.00</td><td>-31.07</td><td>55.40</td><td>38.20</td><td>16.05</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11400.00	42.93	74.00	-31.07	55.40	38.20	16.05	66.72	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1 11400.00	42.93	74.00	-31.07	55.40	38.20	16.05	66.72	0.00	---	---	PEAK																																														
																																																									
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11400.00</td><td>43.36</td><td>74.00</td><td>-30.64</td><td>55.83</td><td>38.20</td><td>16.05</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11400.00	43.36	74.00	-30.64	55.83	38.20	16.05	66.72	0.00	---	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1 11400.00	43.36	74.00	-30.64	55.83	38.20	16.05	66.72	0.00	---	---	PEAK																																														

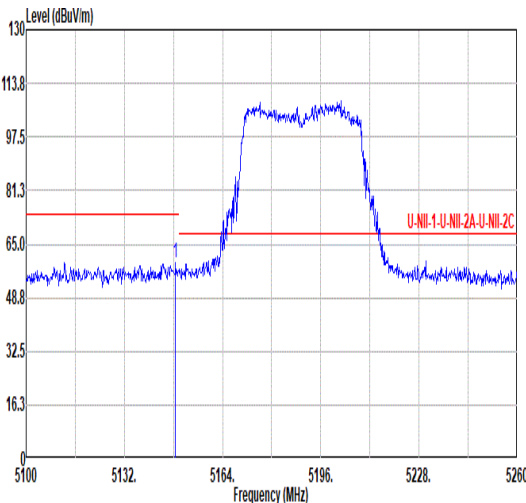
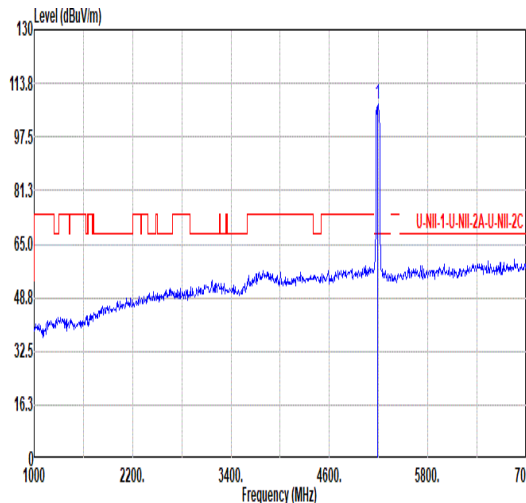
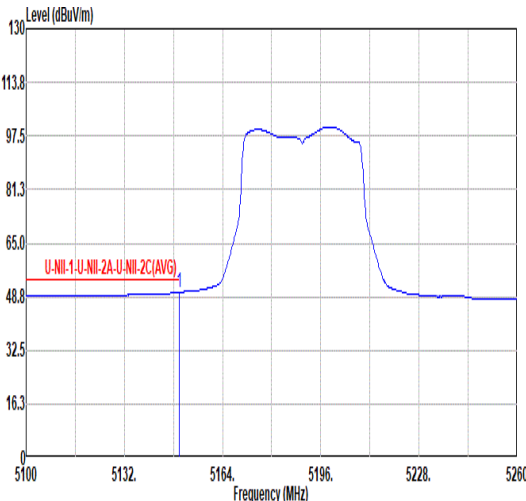
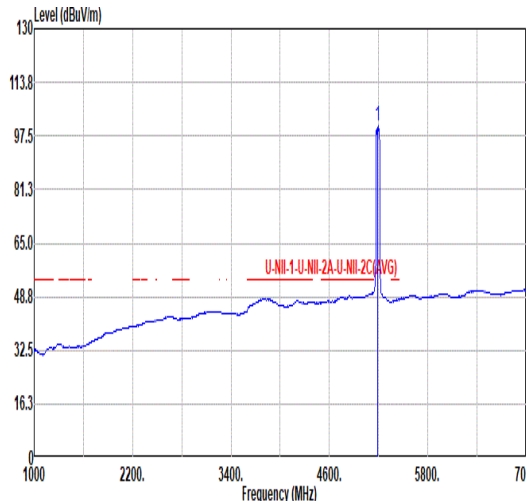


Mode	19																																																																																																																								
	Band Edge - L																																																																																																																								
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																																																																																								
ANT	CDD 8+10																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																		
Peak																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5148.64</td><td>59.15</td><td>74.00</td><td>-14.85</td><td>51.33</td><td>34.60</td><td>10.65</td><td>37.43</td><td>0.00</td><td>113</td><td>121</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5148.64	59.15	74.00	-14.85	51.33	34.60	10.65	37.43	0.00	113	121	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5190.00</td><td>107.24</td><td>-----</td><td>-----</td><td>99.14</td><td>34.80</td><td>10.71</td><td>37.41</td><td>0.00</td><td>113</td><td>121</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5190.00	107.24	-----	-----	99.14	34.80	10.71	37.41	0.00	113	121
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																
1	5148.64	59.15	74.00	-14.85	51.33	34.60	10.65	37.43	0.00	113	121	PEAK																																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																
1	5190.00	107.24	-----	-----	99.14	34.80	10.71	37.41	0.00	113	121	PEAK																																																																																																													
Avg																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5149.92</td><td>50.15</td><td>54.00</td><td>-3.85</td><td>42.33</td><td>34.60</td><td>10.65</td><td>37.43</td><td>0.00</td><td>113</td><td>121</td><td>AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5149.92	50.15	54.00	-3.85	42.33	34.60	10.65	37.43	0.00	113	121	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5190.00</td><td>100.49</td><td>-----</td><td>-----</td><td>92.39</td><td>34.80</td><td>10.71</td><td>37.41</td><td>0.00</td><td>113</td><td>121</td><td>AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5190.00	100.49	-----	-----	92.39	34.80	10.71	37.41	0.00	113	121
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																
1	5149.92	50.15	54.00	-3.85	42.33	34.60	10.65	37.43	0.00	113	121	AVERAGE																																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																
1	5190.00	100.49	-----	-----	92.39	34.80	10.71	37.41	0.00	113	121	AVERAGE																																																																																																													

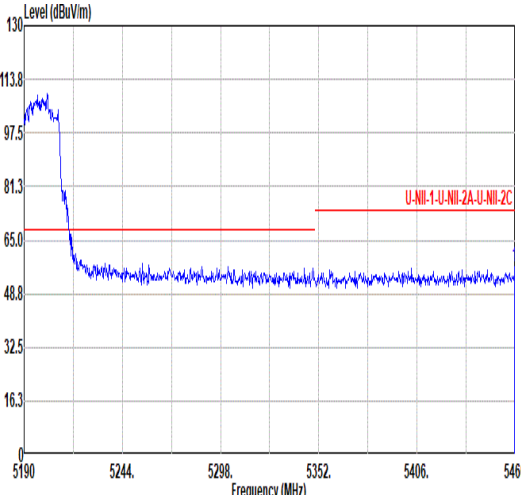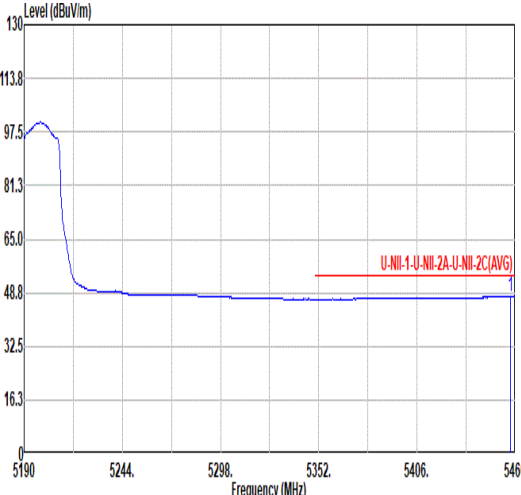

Mode	19																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																		
ANT	CDD 8+10																																																		
Pol.	Horizontal						Fundamental																																												
Peak							Blank																																												
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.73</td><td>56.80</td><td>74.00</td><td>-17.20</td><td>48.15</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>113</td><td>121</td><td>PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.73	56.80	74.00	-17.20	48.15	34.98
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5459.73	56.80	74.00	-17.20	48.15	34.98	10.97	37.30	0.00	113	121	PEAK																																							
Avg							Blank																																												
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5457.57</td><td>47.55</td><td>54.00</td><td>-6.45</td><td>38.91</td><td>34.98</td><td>10.96</td><td>37.30</td><td>0.00</td><td>113</td><td>121</td><td>AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.57	47.55	54.00	-6.45	38.91	34.98
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5457.57	47.55	54.00	-6.45	38.91	34.98	10.96	37.30	0.00	113	121	AVERAGE																																							

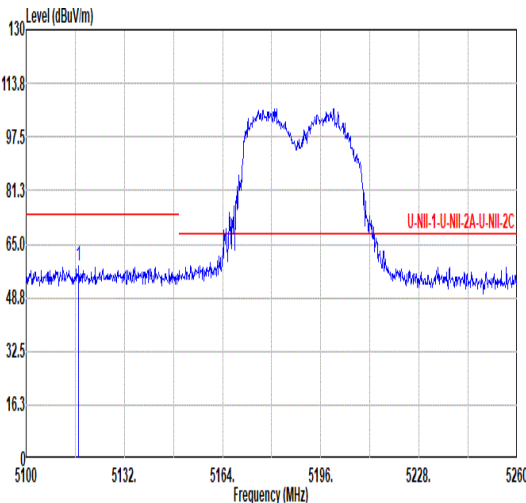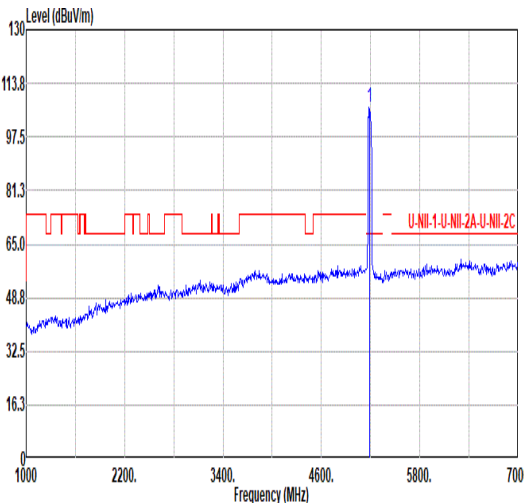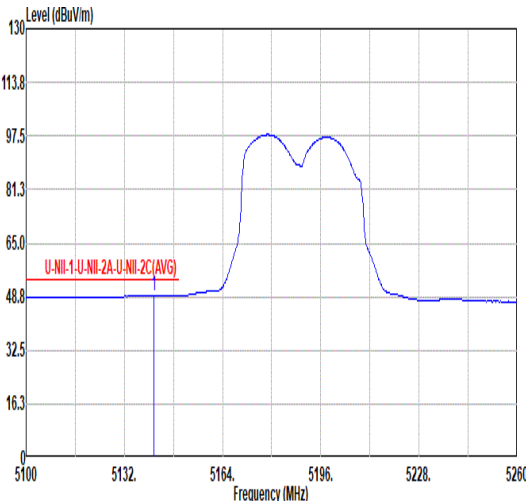
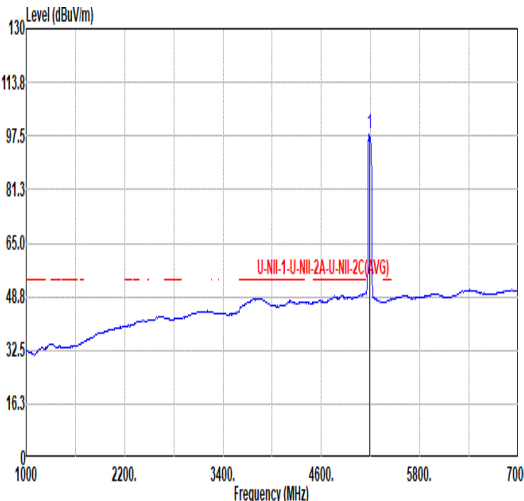


Mode	19																																																																																																																
	Band Edge - L																																																																																																																
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																																																																																
ANT	CDD 8+10																																																																																																																
Pol.	Vertical						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5117.12</td><td>58.44</td><td>74.00</td><td>-15.56</td><td>50.67</td><td>34.60</td><td>10.62</td><td>37.45</td><td>0.00</td><td>379</td><td>51 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5117.12	58.44	74.00	-15.56	50.67	34.60	10.62	37.45	0.00	379	51 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>106.52</td><td>-----</td><td>-----</td><td>98.52</td><td>34.73</td><td>10.69</td><td>37.42</td><td>0.00</td><td>379</td><td>51 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5190.00	106.52	-----	-----	98.52	34.73	10.69	37.42	0.00	379
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5117.12	58.44	74.00	-15.56	50.67	34.60	10.62	37.45	0.00	379	51 PEAK																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5190.00	106.52	-----	-----	98.52	34.73	10.69	37.42	0.00	379	51 PEAK																																																																																																						
Avg																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5141.60</td><td>49.18</td><td>54.00</td><td>-4.82</td><td>41.37</td><td>34.60</td><td>10.65</td><td>37.44</td><td>0.00</td><td>379</td><td>51 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5141.60	49.18	54.00	-4.82	41.37	34.60	10.65	37.44	0.00	379	51 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>98.02</td><td>-----</td><td>-----</td><td>90.06</td><td>34.70</td><td>10.68</td><td>37.42</td><td>0.00</td><td>379</td><td>51 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5190.00	98.02	-----	-----	90.06	34.70	10.68	37.42	0.00	379
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5141.60	49.18	54.00	-4.82	41.37	34.60	10.65	37.44	0.00	379	51 AVERAGE																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5190.00	98.02	-----	-----	90.06	34.70	10.68	37.42	0.00	379	51 AVERAGE																																																																																																						





Mode	19																																																								
	Band Edge - R																																																								
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																								
ANT	CDD 8+10																																																								
Pol.	Vertical																																																								
Peak	Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5356.05</td><td>56.68</td><td>74.00</td><td>-17.32</td><td>48.36</td><td>34.81</td><td>10.85</td><td>37.34</td><td>0.00</td><td>379</td><td>51 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5356.05	56.68	74.00	-17.32	48.36	34.81	10.85	37.34	0.00	379	51 PEAK	Blank
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5356.05	56.68	74.00	-17.32	48.36	34.81	10.85	37.34	0.00	379	51 PEAK																																														
Avg	Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.65</td><td>47.43</td><td>54.00</td><td>-6.57</td><td>38.78</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>379</td><td>51 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.65	47.43	54.00	-6.57	38.78	34.98	10.97	37.30	0.00	379	51 AVERAGE	Blank
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5458.65	47.43	54.00	-6.57	38.78	34.98	10.97	37.30	0.00	379	51 AVERAGE																																														

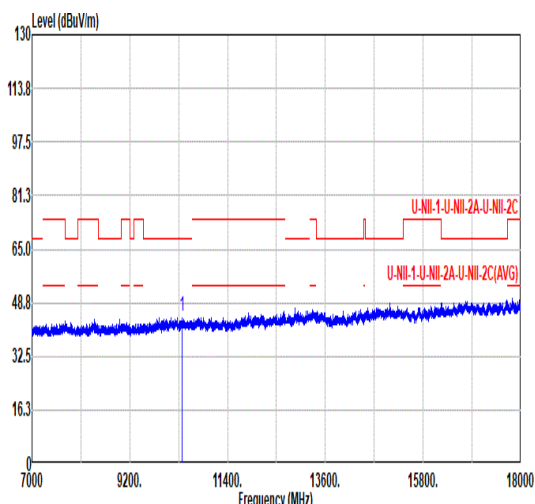
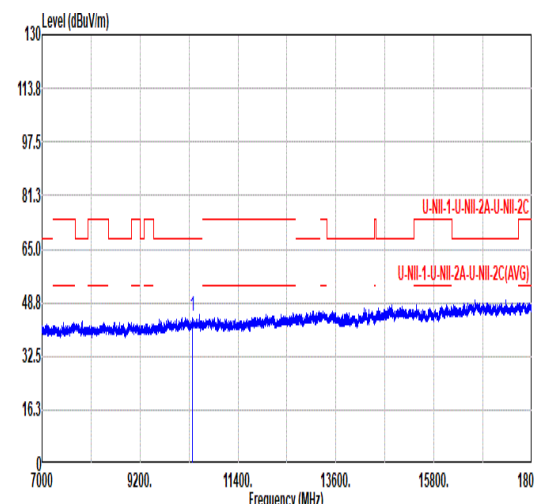


		19																																																																																																			
Mode	Harmonic																																																																																																				
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																																																																				
ANT	CDD 8+10																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10380.00</td><td>44.60</td><td>68.20</td><td>-23.60</td><td>58.81</td><td>37.80</td><td>15.33</td><td>67.34</td><td>0.00</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	44.60	68.20	-23.60	58.81	37.80	15.33	67.34	0.00	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10380.00</td><td>44.55</td><td>68.20</td><td>-23.65</td><td>58.82</td><td>37.80</td><td>15.31</td><td>67.38</td><td>0.00</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	44.55	68.20	-23.65	58.82	37.80	15.31	67.38	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	10380.00	44.60	68.20	-23.60	58.81	37.80	15.33	67.34	0.00	---	PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	10380.00	44.55	68.20	-23.65	58.82	37.80	15.31	67.38	0.00	---	PEAK																																																																																										



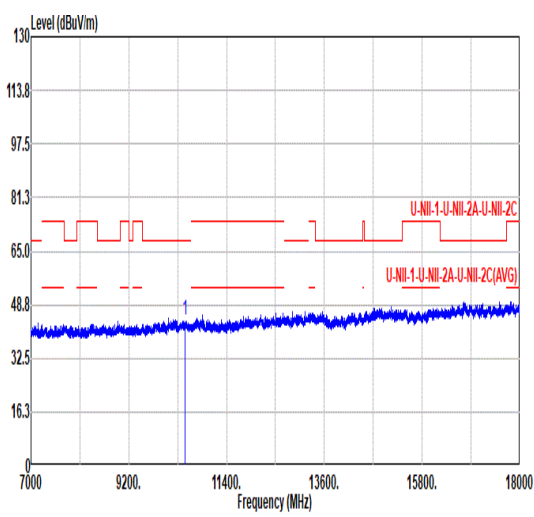
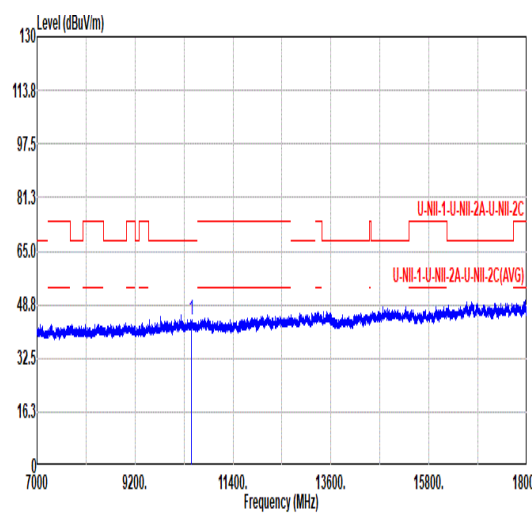


		20																																																									
Mode		Harmonic																																																									
		U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full_5230MHz																																																									
ANT		CDD 8+10																																																									
Pol.		Horizontal																																																									
Peak Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10460.00</td><td>44.23</td><td>68.20</td><td>-23.97</td><td>58.25</td><td>37.86</td><td>15.37</td><td>67.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10460.00	44.23	68.20	-23.97	58.25	37.86	15.37	67.25	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	10460.00	44.23	68.20	-23.97	58.25	37.86	15.37	67.25	0.00	---	---	PEAK																																															
		Vertical																																																									
Peak Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10460.00</td><td>44.25</td><td>68.20</td><td>-23.95</td><td>58.33</td><td>37.84</td><td>15.36</td><td>67.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10460.00	44.25	68.20	-23.95	58.33	37.84	15.36	67.28	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	10460.00	44.25	68.20	-23.95	58.33	37.84	15.36	67.28	0.00	---	---	PEAK																																															

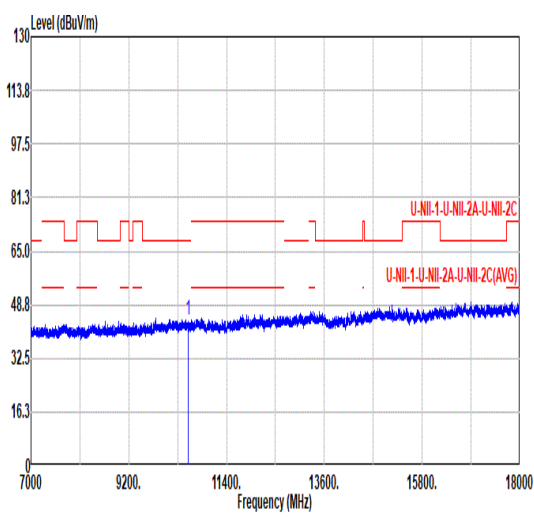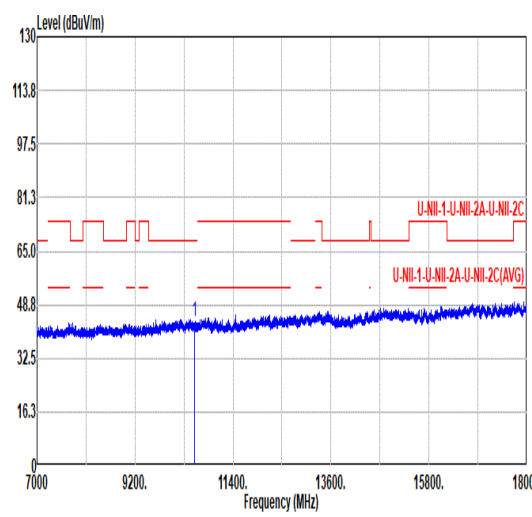

		21																																																																																																																		
Mode		Harmonic																																																																																																																		
		U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full_5270MHz																																																																																																																		
ANT		CDD 8+10																																																																																																																		
Pol.		Horizontal						Vertical																																																																																																												
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10540.00</td><td>44.12</td><td>68.20</td><td>-24.08</td><td>58.00</td><td>37.86</td><td>15.43</td><td>67.17</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10540.00	44.12	68.20	-24.08	58.00	37.86	15.43	67.17	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10540.00</td><td>43.61</td><td>68.20</td><td>-24.59</td><td>57.49</td><td>37.88</td><td>15.42</td><td>67.18</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10540.00	43.61	68.20	-24.59	57.49	37.88	15.42	67.18	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	10540.00	44.12	68.20	-24.08	58.00	37.86	15.43	67.17	0.00	---	---	PEAK																																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	10540.00	43.61	68.20	-24.59	57.49	37.88	15.42	67.18	0.00	---	---	PEAK																																																																																																								

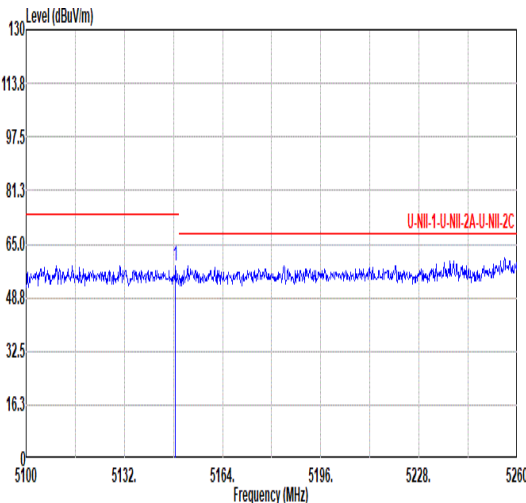
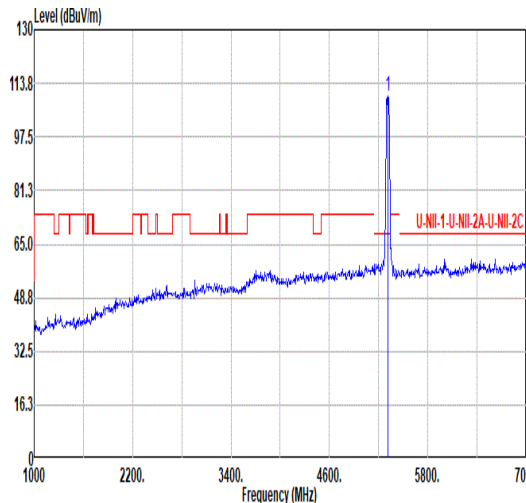
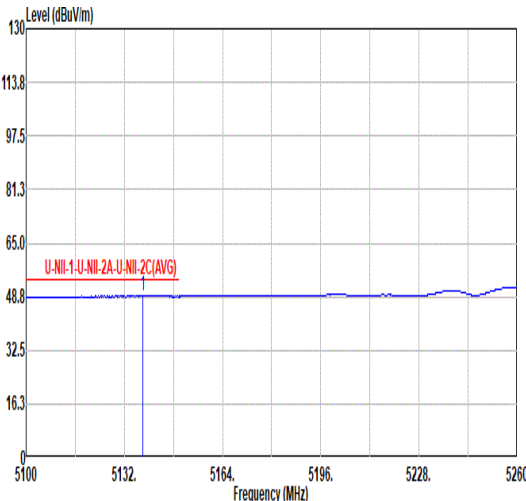
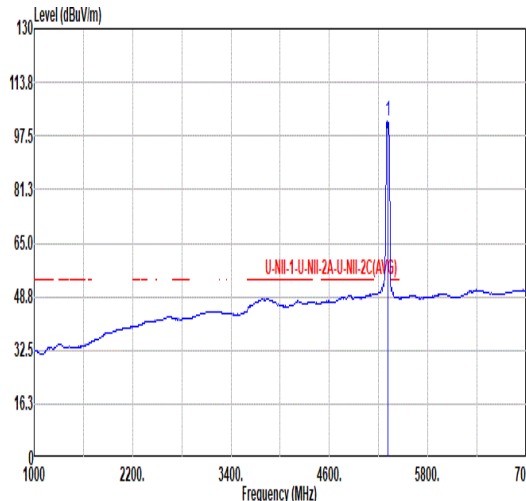


Mode	22																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz																																																																																																																						
ANT	CDD 8+10																																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																																
Peak																																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5148.64</td><td>58.39</td><td>74.00</td><td>-15.61</td><td>50.57</td><td>34.60</td><td>10.65</td><td>37.43</td><td>0.00</td><td>100</td><td>118 PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5148.64	58.39	74.00	-15.61	50.57	34.60	10.65	37.43	0.00	100	118 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>109.91</td><td>-----</td><td>-----</td><td>101.74</td><td>34.73</td><td>10.80</td><td>37.36</td><td>0.00</td><td>100</td><td>118 PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5310.00	109.91	-----	-----	101.74	34.73	10.80	37.36	0.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5148.64	58.39	74.00	-15.61	50.57	34.60	10.65	37.43	0.00	100	118 PEAK																																																																																																												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5310.00	109.91	-----	-----	101.74	34.73	10.80	37.36	0.00	100	118 PEAK																																																																																																												
Avg																																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5137.92</td><td>48.86</td><td>54.00</td><td>-5.14</td><td>41.06</td><td>34.60</td><td>10.64</td><td>37.44</td><td>0.00</td><td>100</td><td>118 AVERAGE</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5137.92	48.86	54.00	-5.14	41.06	34.60	10.64	37.44	0.00	100	118 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>101.86</td><td>-----</td><td>-----</td><td>93.74</td><td>34.70</td><td>10.79</td><td>37.37</td><td>0.00</td><td>100</td><td>118 AVERAGE</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5310.00	101.86	-----	-----	93.74	34.70	10.79	37.37	0.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5137.92	48.86	54.00	-5.14	41.06	34.60	10.64	37.44	0.00	100	118 AVERAGE																																																																																																												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5310.00	101.86	-----	-----	93.74	34.70	10.79	37.37	0.00	100	118 AVERAGE																																																																																																												





Mode	22										
	Band Edge - R										
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz										
ANT	CDD 8+10										
Pol.	Horizontal										
Peak	Level (dBuV/m)										

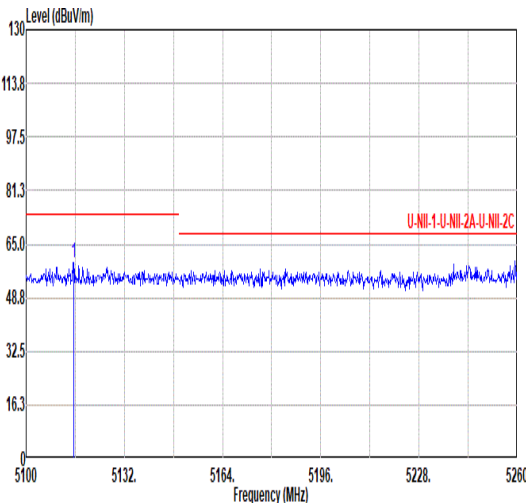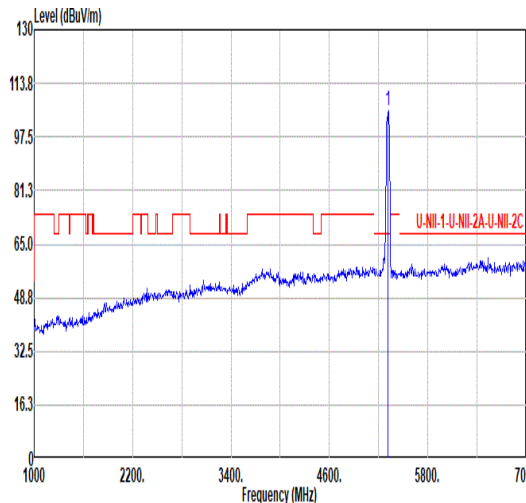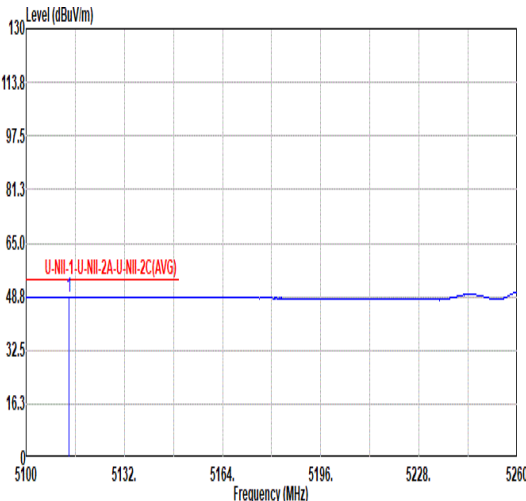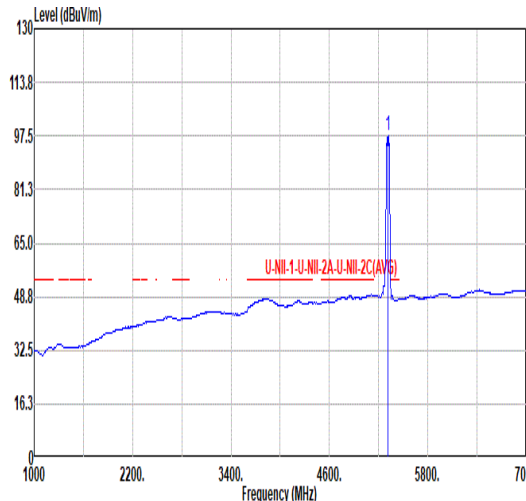

Mode	22																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz																																																																																																																						
ANT	CDD 8+10																																																																																																																						
Pol.	Vertical						Fundamental																																																																																																																
Peak																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5113.52</td><td>59.25</td><td>74.00</td><td>-14.75</td><td>51.48</td><td>34.60</td><td>10.62</td><td>37.45</td><td>0.00</td><td>335</td><td>108 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5113.52	59.25	74.00	-14.75	51.48	34.60	10.62	37.45	0.00	335	108 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>105.43</td><td>-----</td><td>-----</td><td>97.22</td><td>34.75</td><td>10.82</td><td>37.36</td><td>0.00</td><td>335</td><td>108 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	105.43	-----	-----	97.22	34.75	10.82	37.36	0.00	335
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5113.52	59.25	74.00	-14.75	51.48	34.60	10.62	37.45	0.00	335	108 PEAK																																																																																																												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5310.00	105.43	-----	-----	97.22	34.75	10.82	37.36	0.00	335	108 PEAK																																																																																																												
Avg																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5113.92</td><td>48.59</td><td>54.00</td><td>-5.41</td><td>40.82</td><td>34.60</td><td>10.62</td><td>37.45</td><td>0.00</td><td>335</td><td>108 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5113.92	48.59	54.00	-5.41	40.82	34.60	10.62	37.45	0.00	335	108 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>97.55</td><td>-----</td><td>-----</td><td>89.34</td><td>34.75</td><td>10.82</td><td>37.36</td><td>0.00</td><td>335</td><td>108 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	97.55	-----	-----	89.34	34.75	10.82	37.36	0.00	335
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5113.92	48.59	54.00	-5.41	40.82	34.60	10.62	37.45	0.00	335	108 AVERAGE																																																																																																												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5310.00	97.55	-----	-----	89.34	34.75	10.82	37.36	0.00	335	108 AVERAGE																																																																																																												



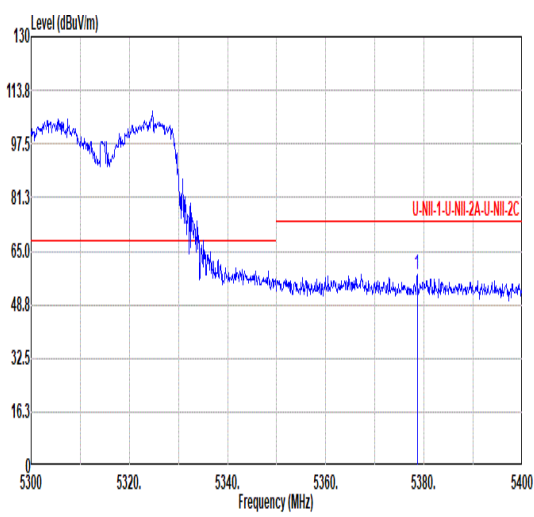
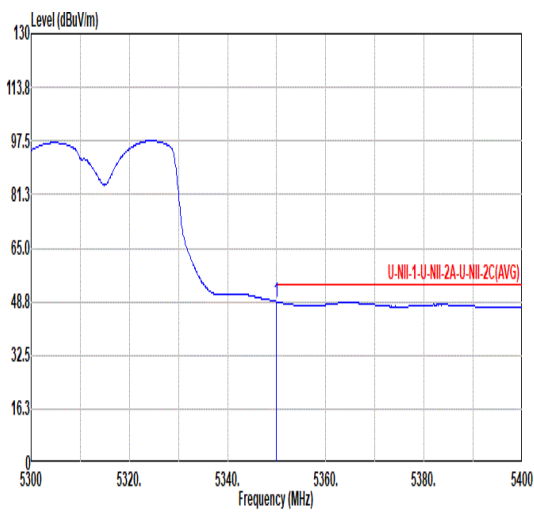


Mode	22																																																						
	Band Edge - R																																																						
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz																																																						
ANT	CDD 8+10																																																						
Pol.	Vertical						Fundamental																																																
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5378.60</td><td>57.93</td><td>74.00</td><td>-16.07</td><td>49.53</td><td>34.86</td><td>10.87</td><td>37.33</td><td>0.00</td><td>335</td><td>100</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5378.60	57.93	74.00	-16.07	49.53	34.86	10.87	37.33	0.00	335	100	PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5378.60	57.93	74.00	-16.07	49.53	34.86	10.87	37.33	0.00	335	100	PEAK																																											
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>48.71</td><td>54.00</td><td>-5.29</td><td>40.42</td><td>34.80</td><td>10.84</td><td>37.35</td><td>0.00</td><td>335</td><td>100</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.00	48.71	54.00	-5.29	40.42	34.80	10.84	37.35	0.00	335	100	AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5350.00	48.71	54.00	-5.29	40.42	34.80	10.84	37.35	0.00	335	100	AVERAGE																																											




		22																																																											
Mode		Harmonic																																																											
		U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz																																																											
ANT		CDD 8+10																																																											
Pol.		Horizontal						Vertical																																																					
Peak Avg																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10620.00</td><td>43.60</td><td>74.00</td><td>-30.40</td><td>57.37</td><td>37.84</td><td>15.49</td><td>67.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10620.00	43.60	74.00	-30.40	57.37	37.84	15.49	67.10	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																		
1	10620.00	43.60	74.00	-30.40	57.37	37.84	15.49	67.10	0.00	---	---	PEAK																																																	
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10620.00</td><td>42.66</td><td>74.00</td><td>-31.34</td><td>56.43</td><td>37.84</td><td>15.49</td><td>67.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10620.00	42.66	74.00	-31.34	56.43	37.84	15.49	67.10	0.00	---	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																		
1	10620.00	42.66	74.00	-31.34	56.43	37.84	15.49	67.10	0.00	---	---	PEAK																																																	

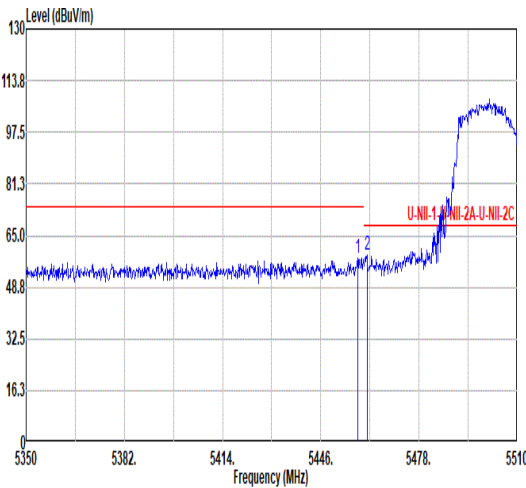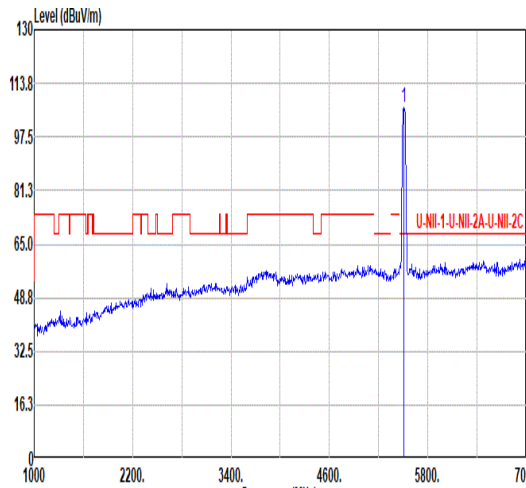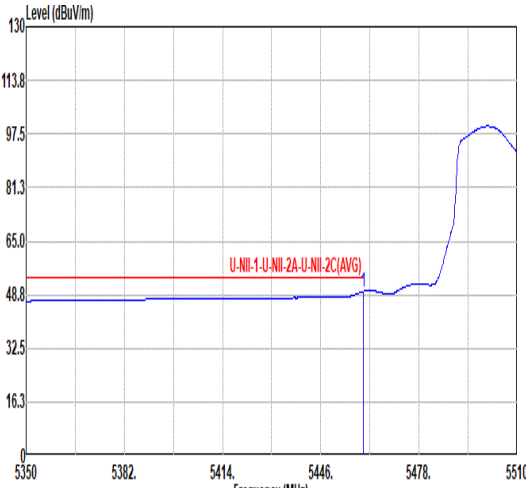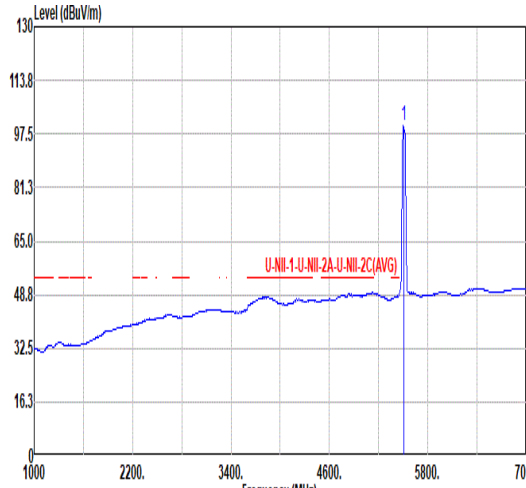

Mode	23																																																																																																																
	Band Edge - L																																																																																																																
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz																																																																																																																
ANT	CDD 8+10																																																																																																																
Pol.	Horizontal						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.00</td><td>57.78</td><td>74.00</td><td>-16.22</td><td>49.13</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>112</td><td>117 PEAK</td></tr><tr><td>2</td><td>5461.04</td><td>58.63</td><td>68.20</td><td>-9.57</td><td>49.98</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>112</td><td>117 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.00	57.78	74.00	-16.22	49.13	34.98	10.97	37.30	0.00	112	117 PEAK	2	5461.04	58.63	68.20	-9.57	49.98	34.98	10.97	37.30	0.00	112	117 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>106.68</td><td>-----</td><td>-----</td><td>98.03</td><td>34.90</td><td>11.03</td><td>37.28</td><td>0.00</td><td>112</td><td>117 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	106.68	-----	-----	98.03	34.90	11.03	37.28	0.00	112	117 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5458.00	57.78	74.00	-16.22	49.13	34.98	10.97	37.30	0.00	112	117 PEAK																																																																																																						
2	5461.04	58.63	68.20	-9.57	49.98	34.98	10.97	37.30	0.00	112	117 PEAK																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5510.00	106.68	-----	-----	98.03	34.90	11.03	37.28	0.00	112	117 PEAK																																																																																																						
Avg																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.92</td><td>49.77</td><td>54.00</td><td>-4.23</td><td>41.12</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>112</td><td>117 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	49.77	54.00	-4.23	41.12	34.98	10.97	37.30	0.00	112	117 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>99.96</td><td>-----</td><td>-----</td><td>91.32</td><td>34.90</td><td>11.02</td><td>37.28</td><td>0.00</td><td>112</td><td>117 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	99.96	-----	-----	91.32	34.90	11.02	37.28	0.00	112	117 AVERAGE												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5459.92	49.77	54.00	-4.23	41.12	34.98	10.97	37.30	0.00	112	117 AVERAGE																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5510.00	99.96	-----	-----	91.32	34.90	11.02	37.28	0.00	112	117 AVERAGE																																																																																																						

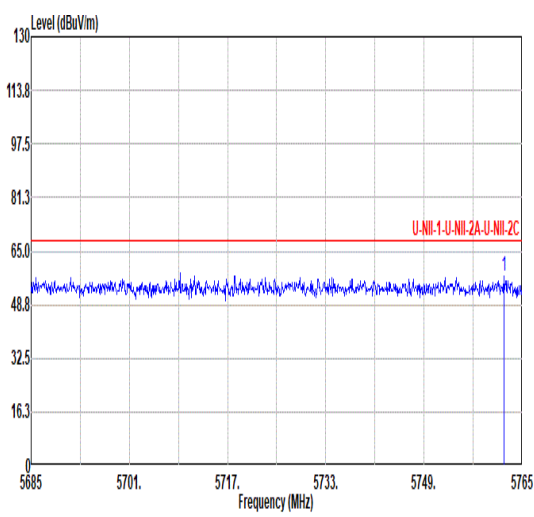

Mode	23																																																						
	Band Edge - R																																																						
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz																																																						
ANT	CDD 8+10																																																						
Pol.	Horizontal						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5762.04</td><td>57.29</td><td>68.20</td><td>-10.91</td><td>48.57</td><td>35.02</td><td>11.39</td><td>37.69</td><td>0.00</td><td>112 117 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5762.04	57.29	68.20	-10.91	48.57	35.02	11.39	37.69	0.00	112 117 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5762.04	57.29	68.20	-10.91	48.57	35.02	11.39	37.69	0.00	112 117 PEAK																																													




Mode	23																																																																																																																				
	Band Edge - L																																																																																																																				
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz																																																																																																																				
ANT	CDD 8+10																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																														
Peak																																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5432.08</td><td>57.38</td><td>74.00</td><td>-16.62</td><td>48.80</td><td>34.96</td><td>10.93</td><td>37.31</td><td>0.00</td><td>362</td><td>107</td><td>PEAK</td></tr><tr><td>2</td><td>5465.36</td><td>57.35</td><td>68.20</td><td>-10.85</td><td>48.71</td><td>34.97</td><td>10.97</td><td>37.30</td><td>0.00</td><td>362</td><td>107</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5432.08	57.38	74.00	-16.62	48.80	34.96	10.93	37.31	0.00	362	107	PEAK	2	5465.36	57.35	68.20	-10.85	48.71	34.97	10.97	37.30	0.00	362	107	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>102.78</td><td>-----</td><td>-----</td><td>94.13</td><td>34.90</td><td>11.03</td><td>37.28</td><td>0.00</td><td>362</td><td>107</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	102.78	-----	-----	94.13	34.90	11.03	37.28	0.00	362	107	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5432.08	57.38	74.00	-16.62	48.80	34.96	10.93	37.31	0.00	362	107	PEAK																																																																																																									
2	5465.36	57.35	68.20	-10.85	48.71	34.97	10.97	37.30	0.00	362	107	PEAK																																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5510.00	102.78	-----	-----	94.13	34.90	11.03	37.28	0.00	362	107	PEAK																																																																																																									
Avg																																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.92</td><td>47.79</td><td>54.00</td><td>-6.21</td><td>39.14</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>362</td><td>107</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	47.79	54.00	-6.21	39.14	34.98	10.97	37.30	0.00	362	107	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>95.39</td><td>-----</td><td>-----</td><td>86.74</td><td>34.90</td><td>11.03</td><td>37.28</td><td>0.00</td><td>362</td><td>107</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	95.39	-----	-----	86.74	34.90	11.03	37.28	0.00	362	107	AVERAGE													
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5459.92	47.79	54.00	-6.21	39.14	34.98	10.97	37.30	0.00	362	107	AVERAGE																																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5510.00	95.39	-----	-----	86.74	34.90	11.03	37.28	0.00	362	107	AVERAGE																																																																																																									




Mode	23																																														
	Band Edge - R																																														
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz																																														
ANT	CDD 8+10																																														
Pol.	Vertical						Fundamental																																								
Peak	Level (dBuV/m) Frequency (MHz) U-NII-1-U-NII-2A-U-NII-2C <table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5759.88</td><td>57.63</td><td>68.20</td><td>-10.57</td><td>48.90</td><td>35.02</td><td>11.39</td><td>37.68</td></tr></table> Remark						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5759.88	57.63	68.20	-10.57	48.90	35.02	11.39	37.68	Blank				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1	5759.88	57.63	68.20	-10.57	48.90	35.02	11.39	37.68																																							




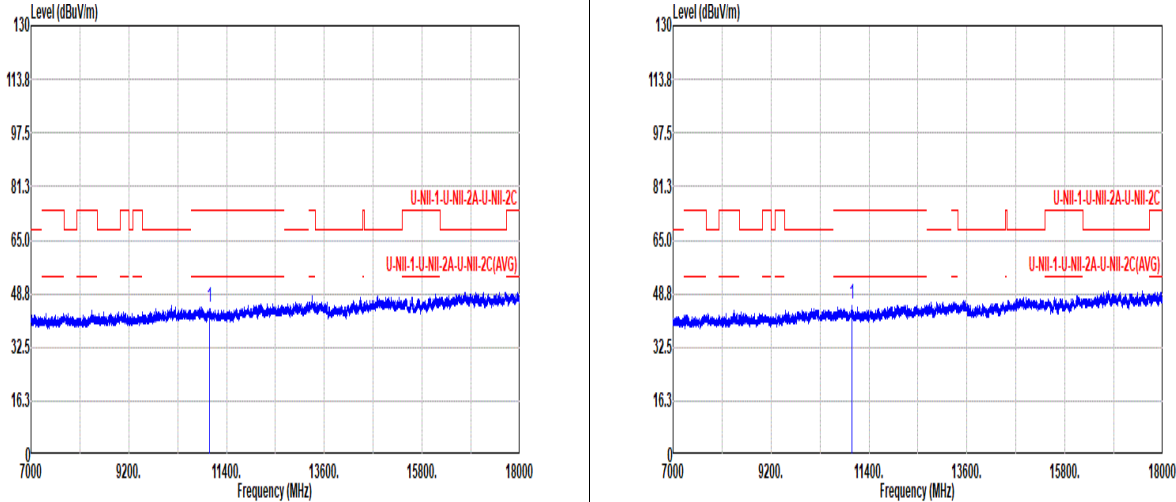


		23																																																							
Mode		Harmonic																																																							
		U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz																																																							
ANT		CDD 8+10																																																							
Pol.		Horizontal						Vertical																																																	
Peak Avg																																																									
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11020.00</td><td>44.60</td><td>74.00</td><td>-29.40</td><td>57.43</td><td>38.20</td><td>15.77</td><td>66.80</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11020.00	44.60	74.00	-29.40	57.43	38.20	15.77	66.80	0.00	---	---	PEAK
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	11020.00	44.60	74.00	-29.40	57.43	38.20	15.77	66.80	0.00	---	---	PEAK																																													
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11020.00</td><td>45.49</td><td>74.00</td><td>-28.51</td><td>58.32</td><td>38.20</td><td>15.77</td><td>66.80</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11020.00	45.49	74.00	-28.51	58.32	38.20	15.77	66.80	0.00	---	---	PEAK		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	11020.00	45.49	74.00	-28.51	58.32	38.20	15.77	66.80	0.00	---	---	PEAK																																													

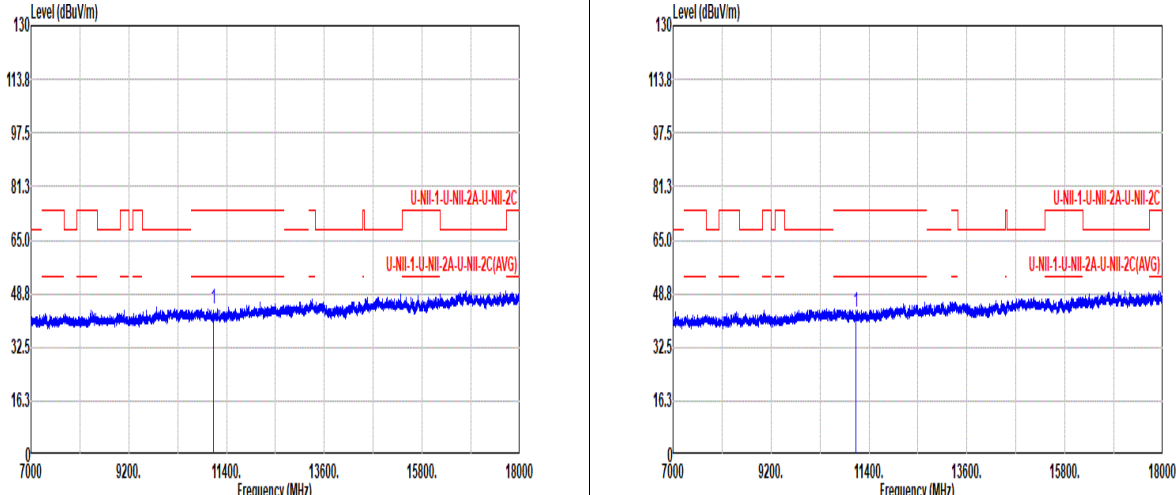


		24																																																							
Mode		Harmonic																																																							
		U-NII-2C_5.47-5.725_802.11be EHT40_CH110_Full_5550MHz																																																							
ANT		CDD 8+10																																																							
Pol.		Horizontal						Vertical																																																	
Peak Avg																																																									
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11100.00</td><td>44.31</td><td>74.00</td><td>-29.69</td><td>57.06</td><td>38.20</td><td>15.83</td><td>66.78</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11100.00	44.31	74.00	-29.69	57.06	38.20	15.83	66.78	0.00	---	---	PEAK
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	11100.00	44.31	74.00	-29.69	57.06	38.20	15.83	66.78	0.00	---	---	PEAK																																													
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11100.00</td><td>43.18</td><td>74.00</td><td>-30.82</td><td>55.93</td><td>38.20</td><td>15.83</td><td>66.78</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11100.00	43.18	74.00	-30.82	55.93	38.20	15.83	66.78	0.00	---	---	PEAK		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	11100.00	43.18	74.00	-30.82	55.93	38.20	15.83	66.78	0.00	---	---	PEAK																																													

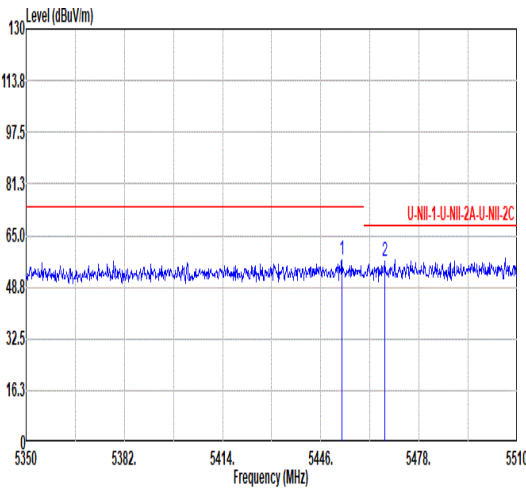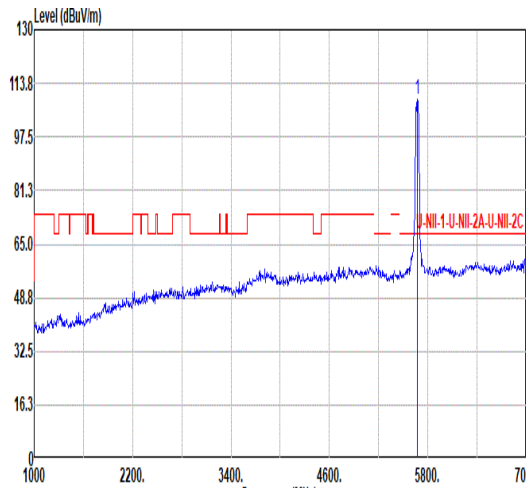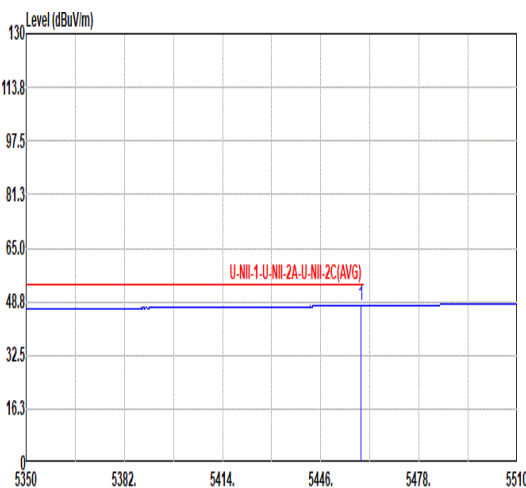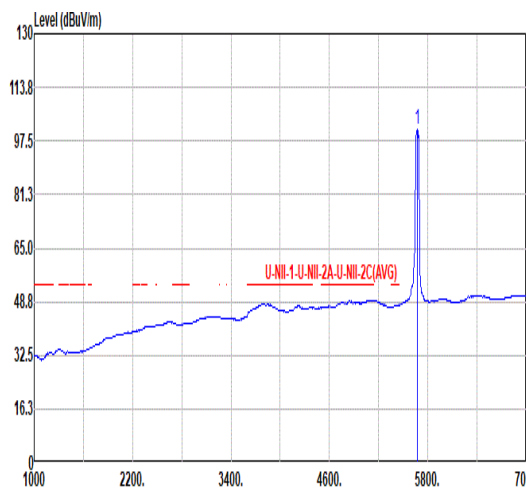

Mode	25																																																																																																																
	Band Edge - L																																																																																																																
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full_5670MHz																																																																																																																
ANT	CDD 8+10																																																																																																																
Pol.	Horizontal						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5452.88</td><td>57.28</td><td>74.00</td><td>-16.72</td><td>48.63</td><td>34.99</td><td>10.96</td><td>37.30</td><td>0.00</td><td>100</td><td>302 PEAK</td></tr><tr><td>2</td><td>5466.96</td><td>57.04</td><td>68.20</td><td>-11.16</td><td>48.39</td><td>34.97</td><td>10.98</td><td>37.30</td><td>0.00</td><td>100</td><td>302 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5452.88	57.28	74.00	-16.72	48.63	34.99	10.96	37.30	0.00	100	302 PEAK	2	5466.96	57.04	68.20	-11.16	48.39	34.97	10.98	37.30	0.00	100	302 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>108.95</td><td>-----</td><td>-----</td><td>100.15</td><td>34.90</td><td>11.25</td><td>37.35</td><td>0.00</td><td>100</td><td>302 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	108.95	-----	-----	100.15	34.90	11.25	37.35	0.00	100	302 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5452.88	57.28	74.00	-16.72	48.63	34.99	10.96	37.30	0.00	100	302 PEAK																																																																																																						
2	5466.96	57.04	68.20	-11.16	48.39	34.97	10.98	37.30	0.00	100	302 PEAK																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5670.00	108.95	-----	-----	100.15	34.90	11.25	37.35	0.00	100	302 PEAK																																																																																																						
Avg																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.12</td><td>47.54</td><td>54.00</td><td>-6.46</td><td>38.89</td><td>34.98</td><td>10.97</td><td>37.30</td><td>0.00</td><td>100</td><td>302 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.12	47.54	54.00	-6.46	38.89	34.98	10.97	37.30	0.00	100	302 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>101.07</td><td>-----</td><td>-----</td><td>92.25</td><td>34.90</td><td>11.25</td><td>37.33</td><td>0.00</td><td>100</td><td>302 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	101.07	-----	-----	92.25	34.90	11.25	37.33	0.00	100	302 AVERAGE												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5459.12	47.54	54.00	-6.46	38.89	34.98	10.97	37.30	0.00	100	302 AVERAGE																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5670.00	101.07	-----	-----	92.25	34.90	11.25	37.33	0.00	100	302 AVERAGE																																																																																																						

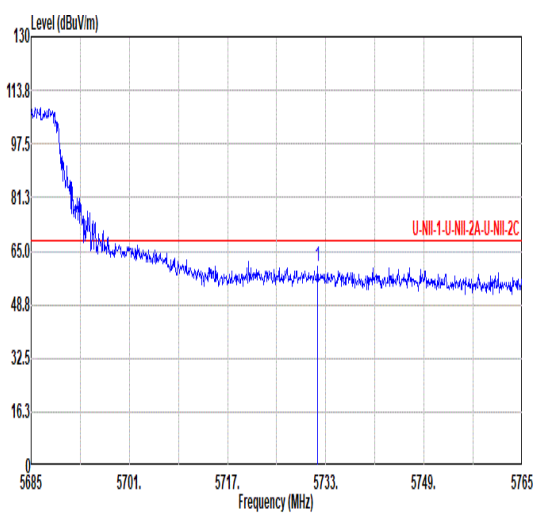

Mode	25																																																					
	Band Edge - R																																																					
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full_5670MHz																																																					
ANT	CDD 8+10																																																					
Pol.	Horizontal						Fundamental																																															
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5731.72</td><td>60.31</td><td>68.20</td><td>-7.89</td><td>51.59</td><td>34.96</td><td>11.34</td><td>37.58</td><td>0.00</td><td>100</td><td>302 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5731.72	60.31	68.20	-7.89	51.59	34.96	11.34	37.58	0.00	100	302 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5731.72	60.31	68.20	-7.89	51.59	34.96	11.34	37.58	0.00	100	302 PEAK																																											