

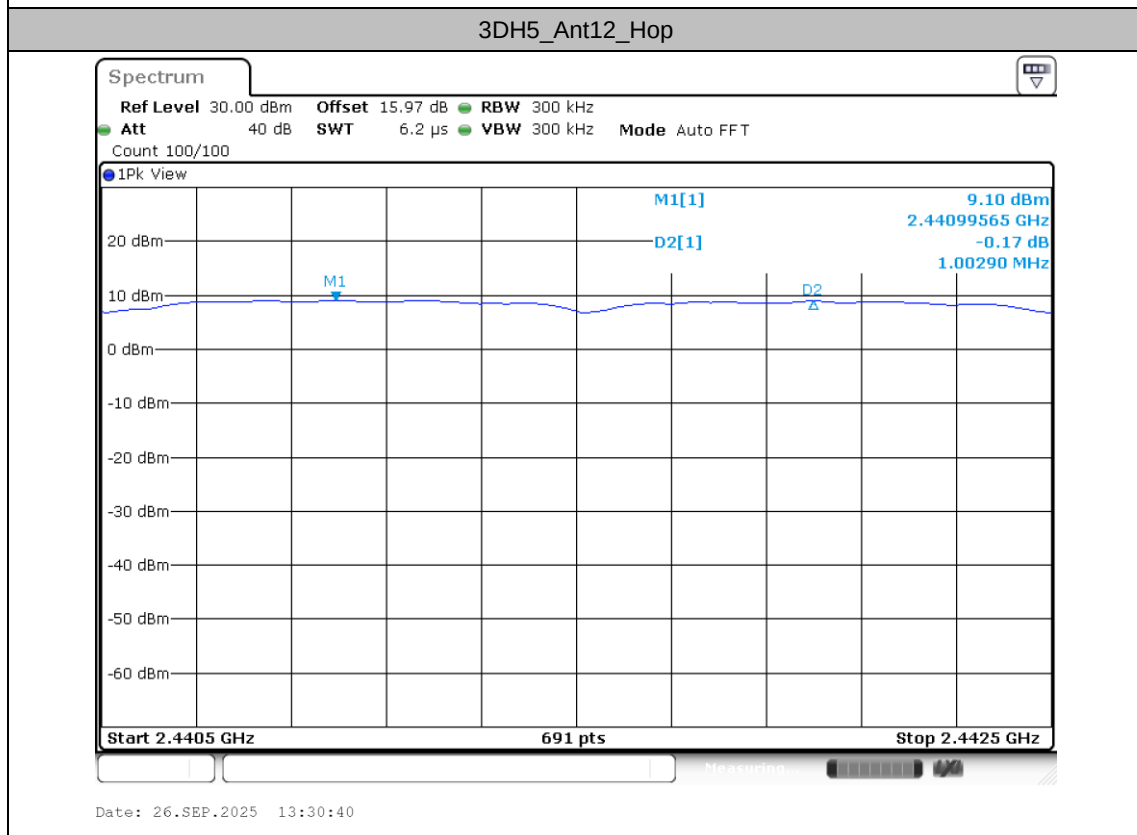


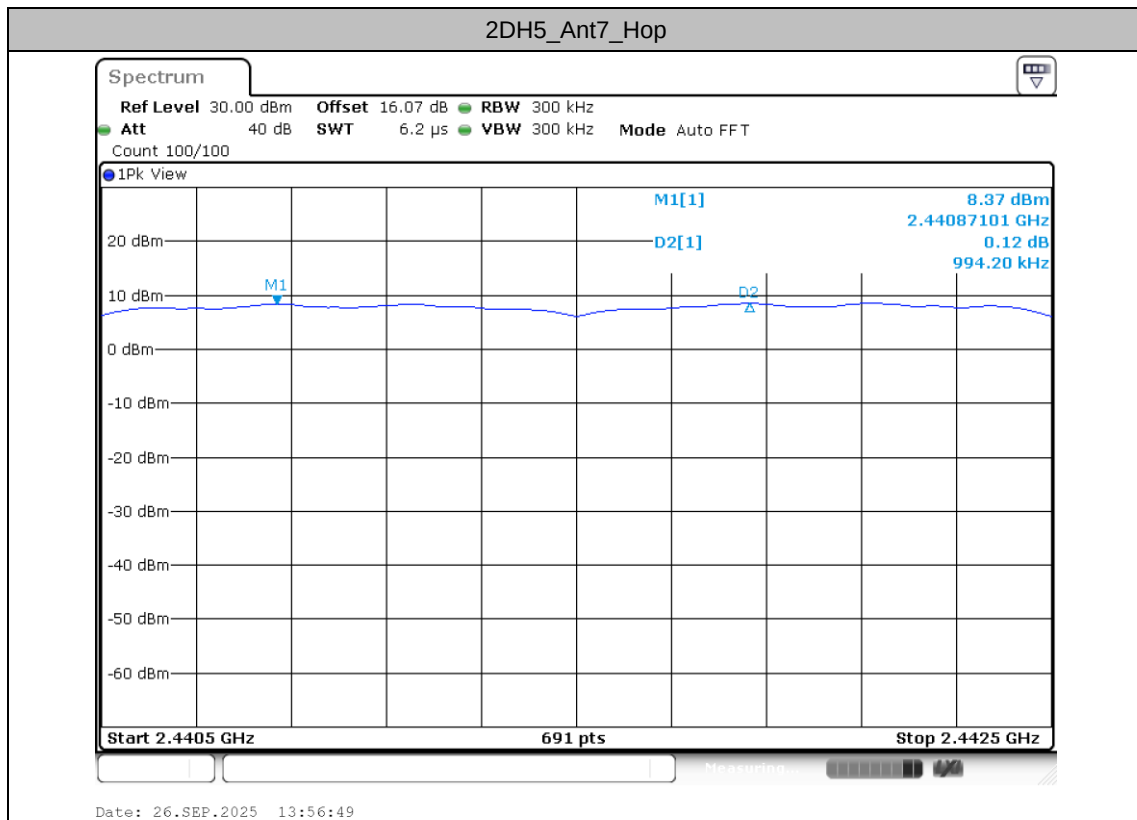

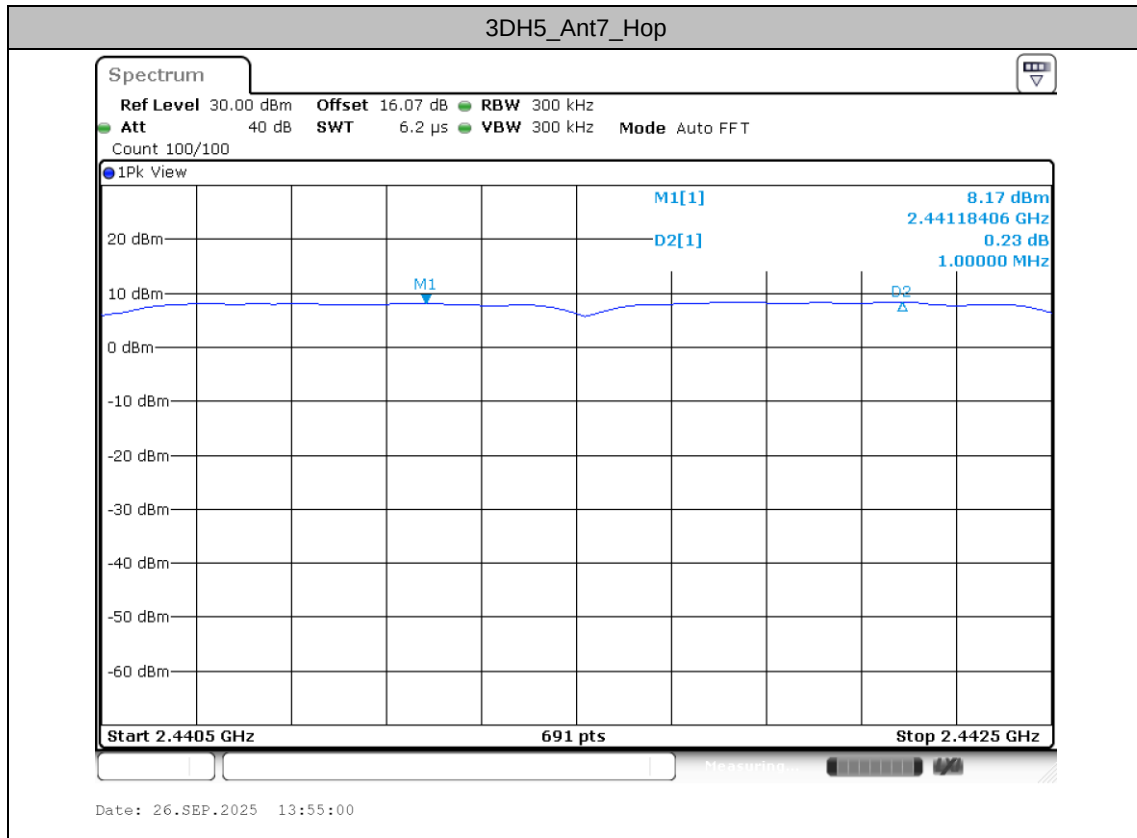

Time of occupancy

Test Result

Ant 12

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass

Ant 7


Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass


Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots (5 Transmit and 1 Receive slot) in 79 hopping channels.
With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s),
Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate $(800 / 6 / 20)$ in Occupancy Time Limit (0.4×20) (s),
Hops Over Occupancy Time comes to $(800 / 6 / 20) \times (0.4 \times 20) = 53.33$ hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Test Graphs

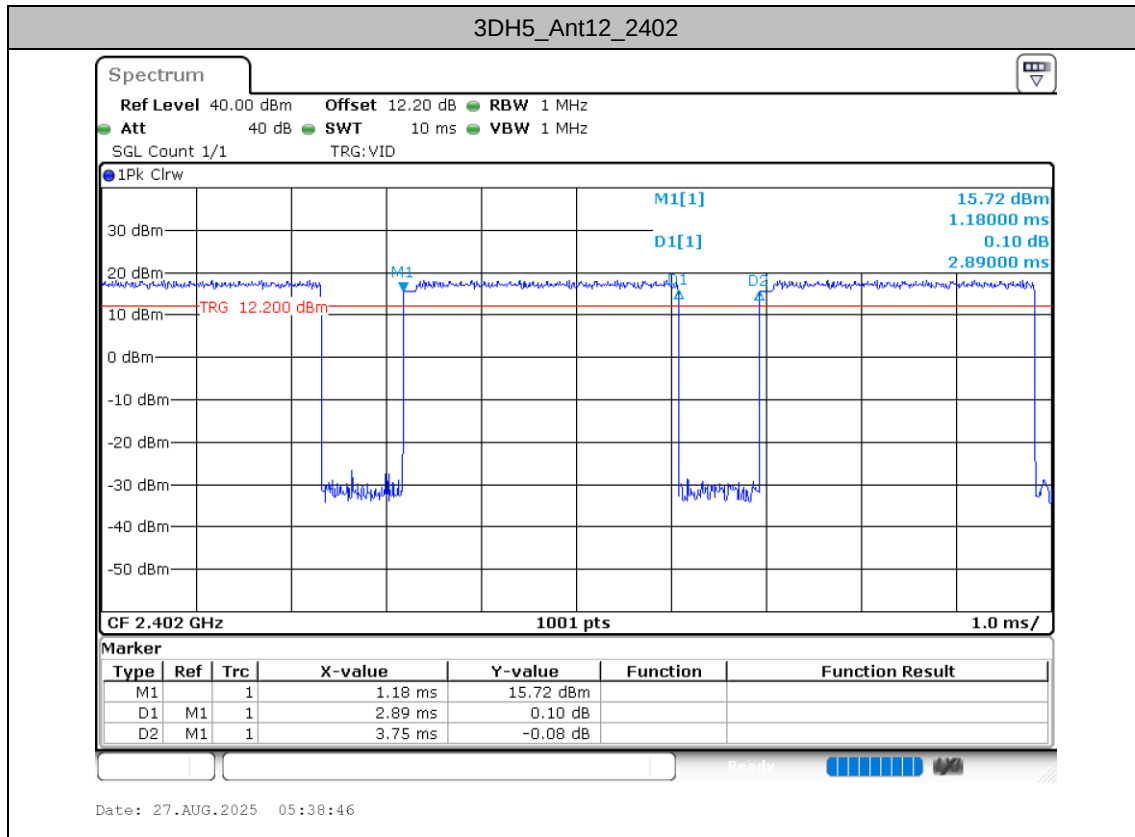

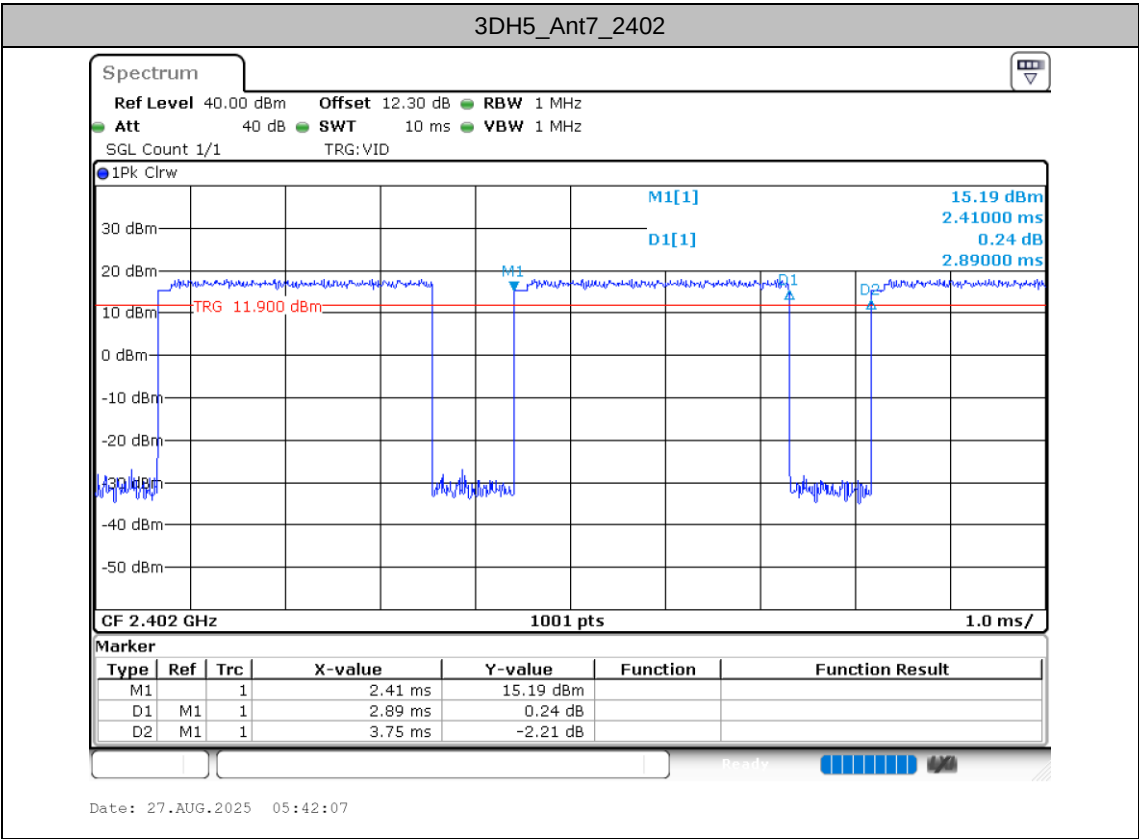





Number of hopping channels

Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
3DH5	Ant12	Hop	79	≥15	PASS
	Ant7	Hop	79	≥15	PASS

Test Graphs

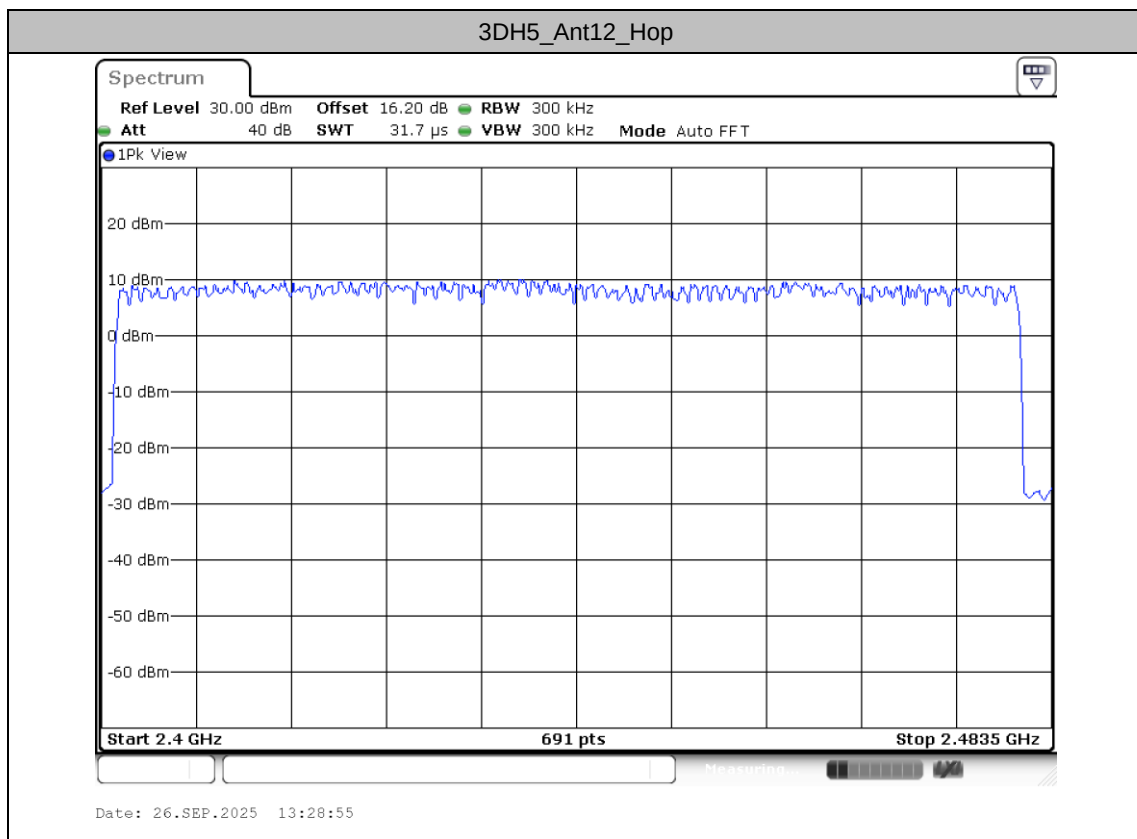

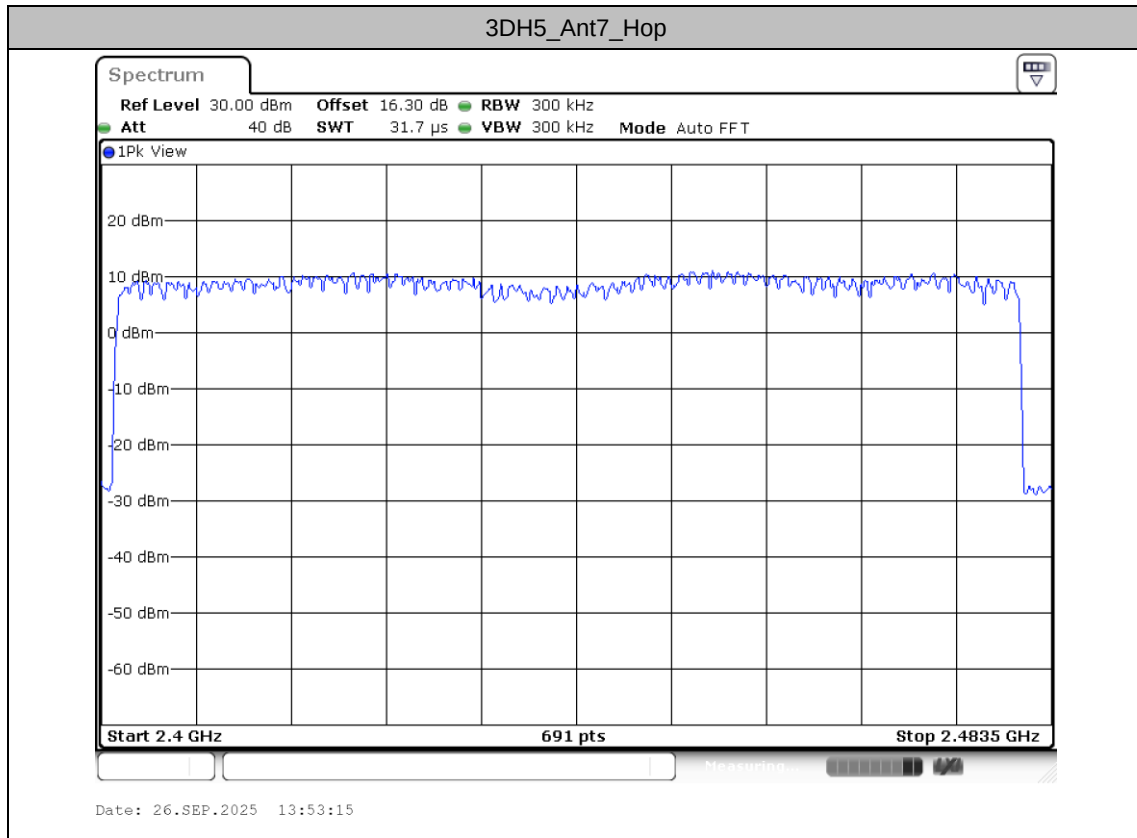




Band edge measurements


Test Result


TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant12	Low	2402	12.42	-39.76	≤ -7.58	PASS
	Ant7	Low	2402	11.65	-40.19	≤ -8.35	PASS
	Ant12	High	2480	11.76	-39.79	≤ -8.24	PASS
	Ant7	High	2480	11.55	-38.69	≤ -8.45	PASS
	Ant12	Low	Hop_2402	11.73	-39.82	≤ -8.27	PASS
	Ant7	Low	Hop_2402	11.49	-39.91	≤ -8.51	PASS
	Ant12	High	Hop_2480	11.10	-39.54	≤ -8.9	PASS
	Ant7	High	Hop_2480	12.84	-39.34	≤ -7.16	PASS
2DH5	Ant12	Low	2402	8.80	-39.33	≤ -11.2	PASS
	Ant7	Low	2402	9.10	-39.97	≤ -10.9	PASS
	Ant12	High	2480	8.82	-39.17	≤ -11.18	PASS
	Ant7	High	2480	8.56	-39.83	≤ -11.44	PASS
	Ant12	Low	Hop_2402	8.05	-40.36	≤ -11.95	PASS
	Ant7	Low	Hop_2402	8.44	-40.21	≤ -11.56	PASS
	Ant12	High	Hop_2480	7.66	-39.26	≤ -12.34	PASS
	Ant7	High	Hop_2480	8.75	-38.65	≤ -11.25	PASS
3DH5	Ant12	Low	2402	9.17	-40.35	≤ -10.83	PASS
	Ant7	Low	2402	9.20	-40.18	≤ -10.8	PASS
	Ant12	High	2480	8.90	-39.64	≤ -11.1	PASS
	Ant7	High	2480	8.77	-39.73	≤ -11.23	PASS
	Ant12	Low	Hop_2402	8.74	-40.06	≤ -11.26	PASS
	Ant7	Low	Hop_2402	6.91	-39.8	≤ -13.09	PASS
	Ant12	High	Hop_2480	7.36	-39.42	≤ -12.64	PASS
	Ant7	High	Hop_2480	9.96	-39.74	≤ -10.04	PASS





Test Graphs

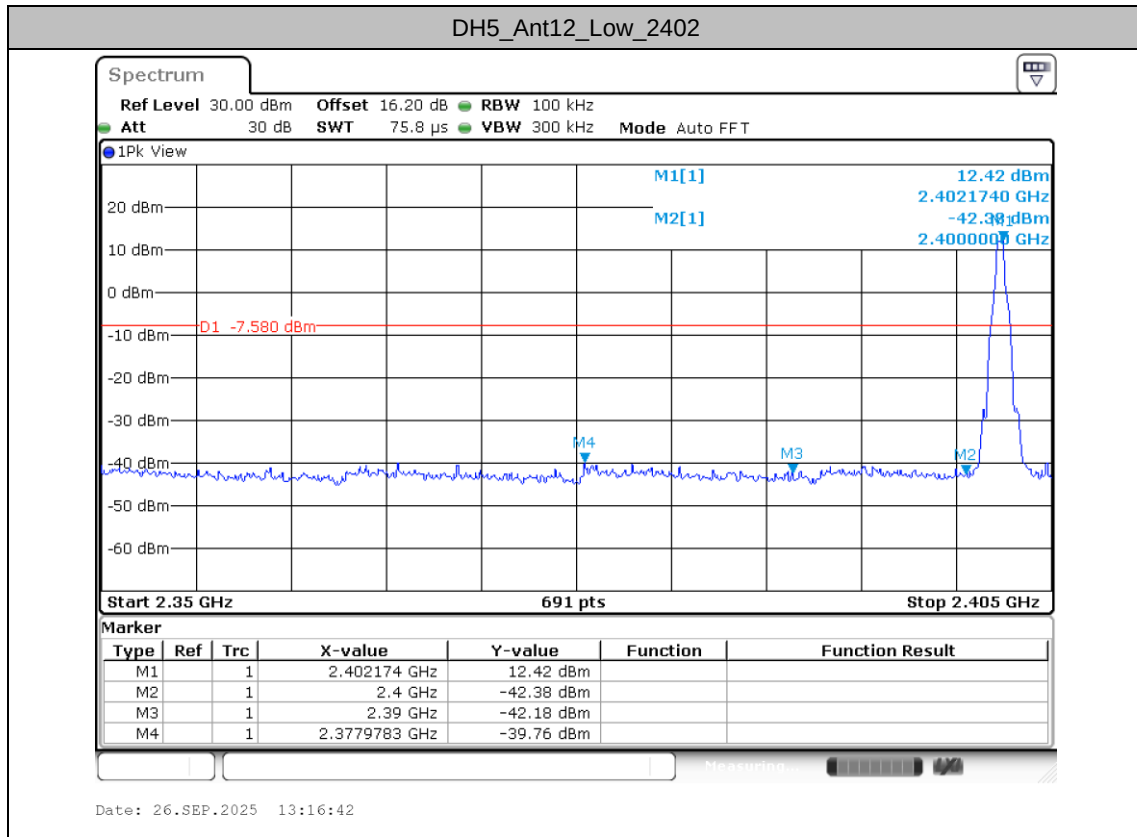


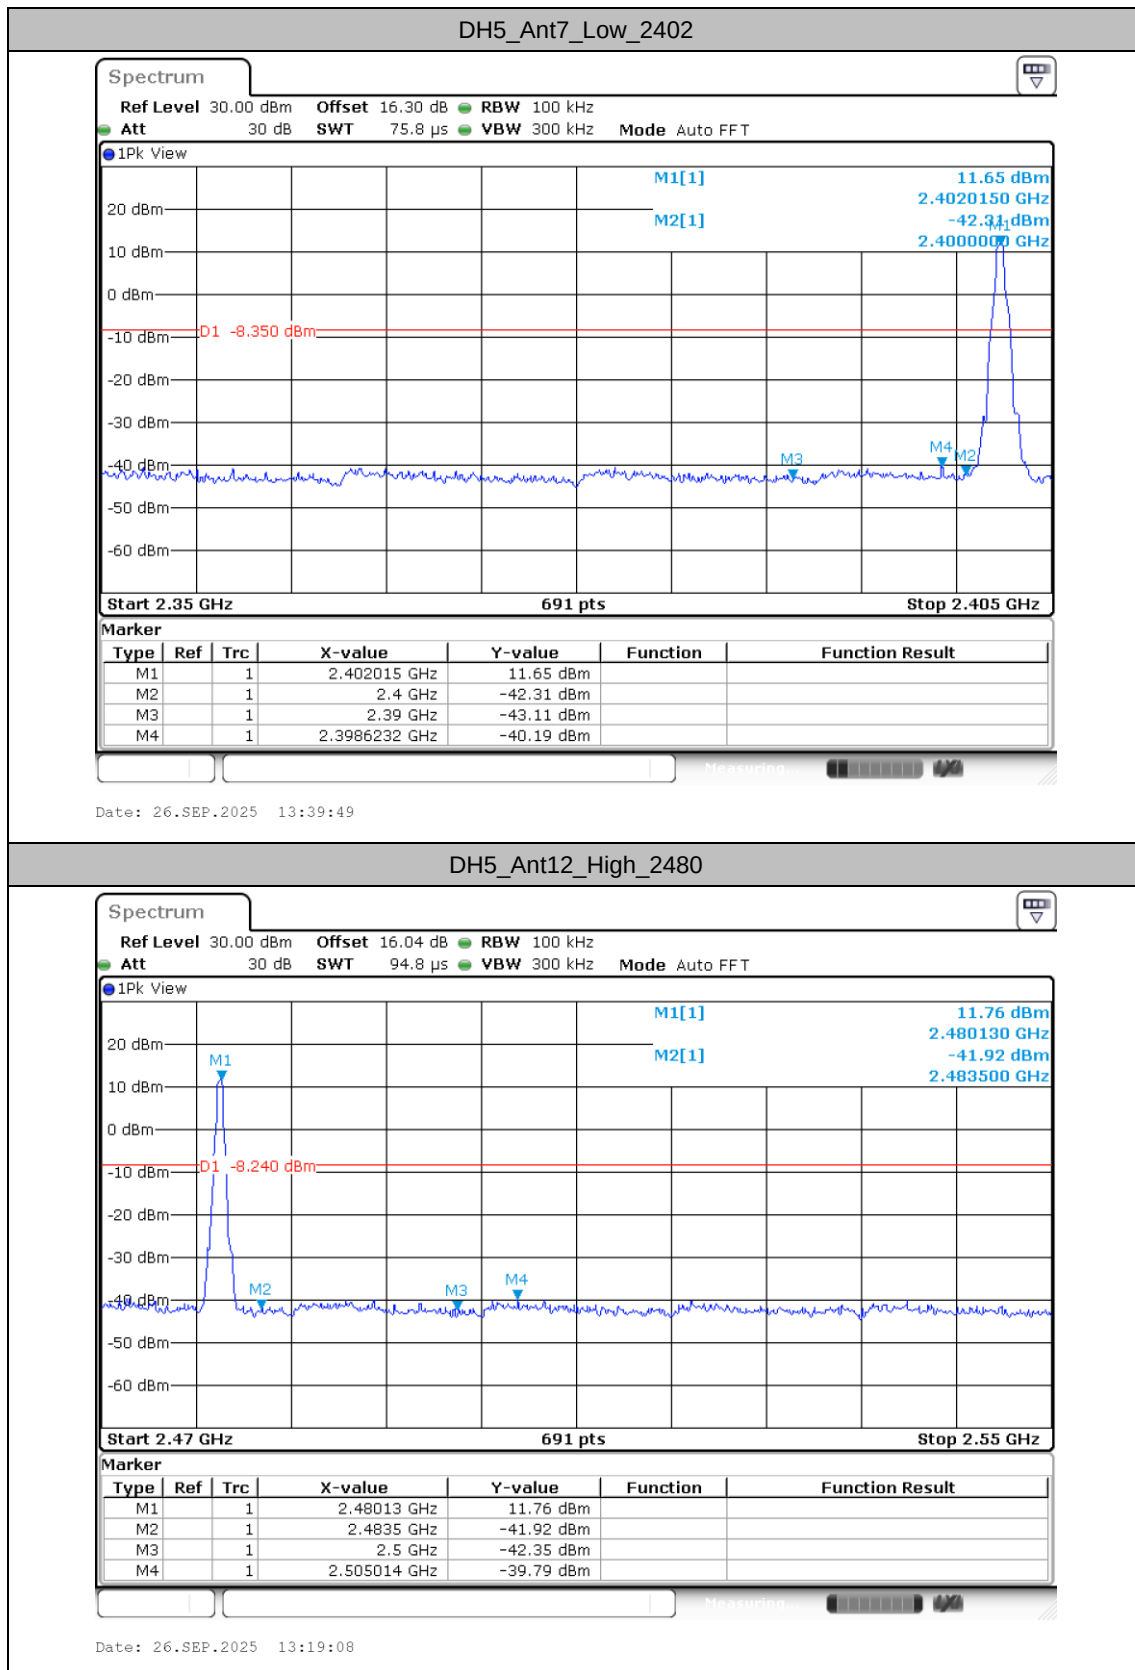


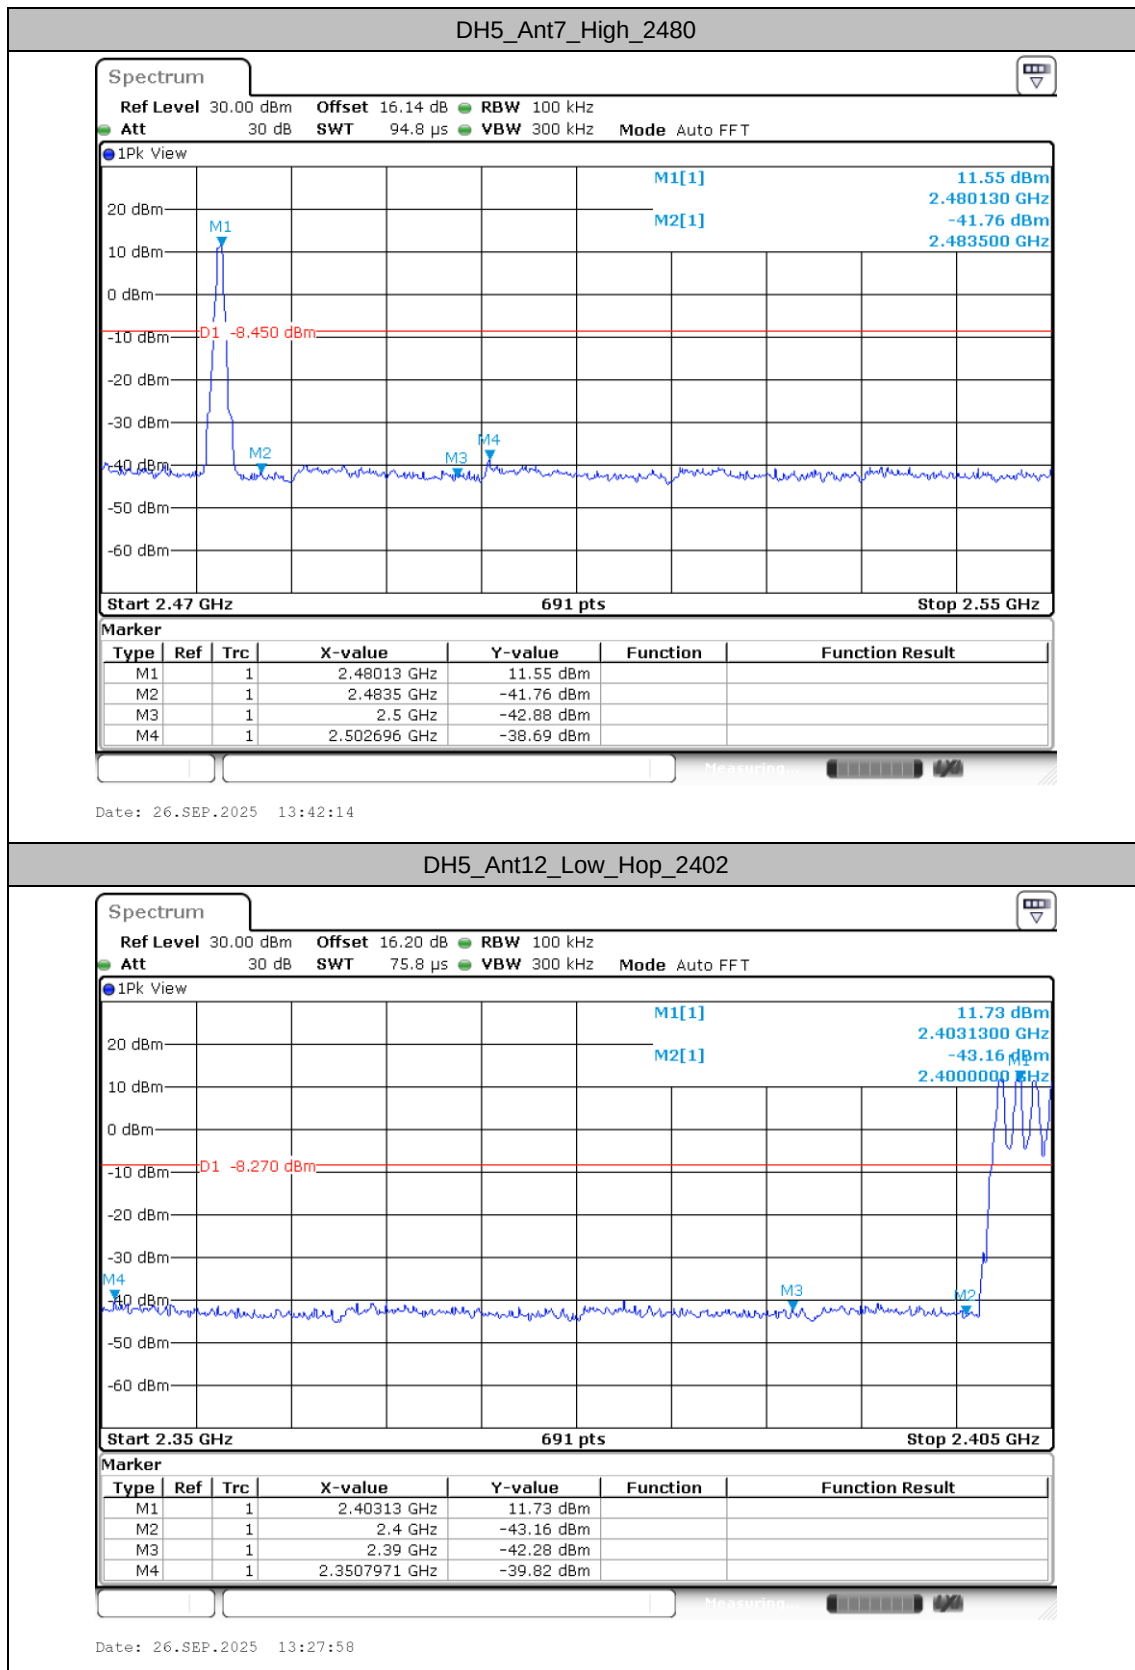


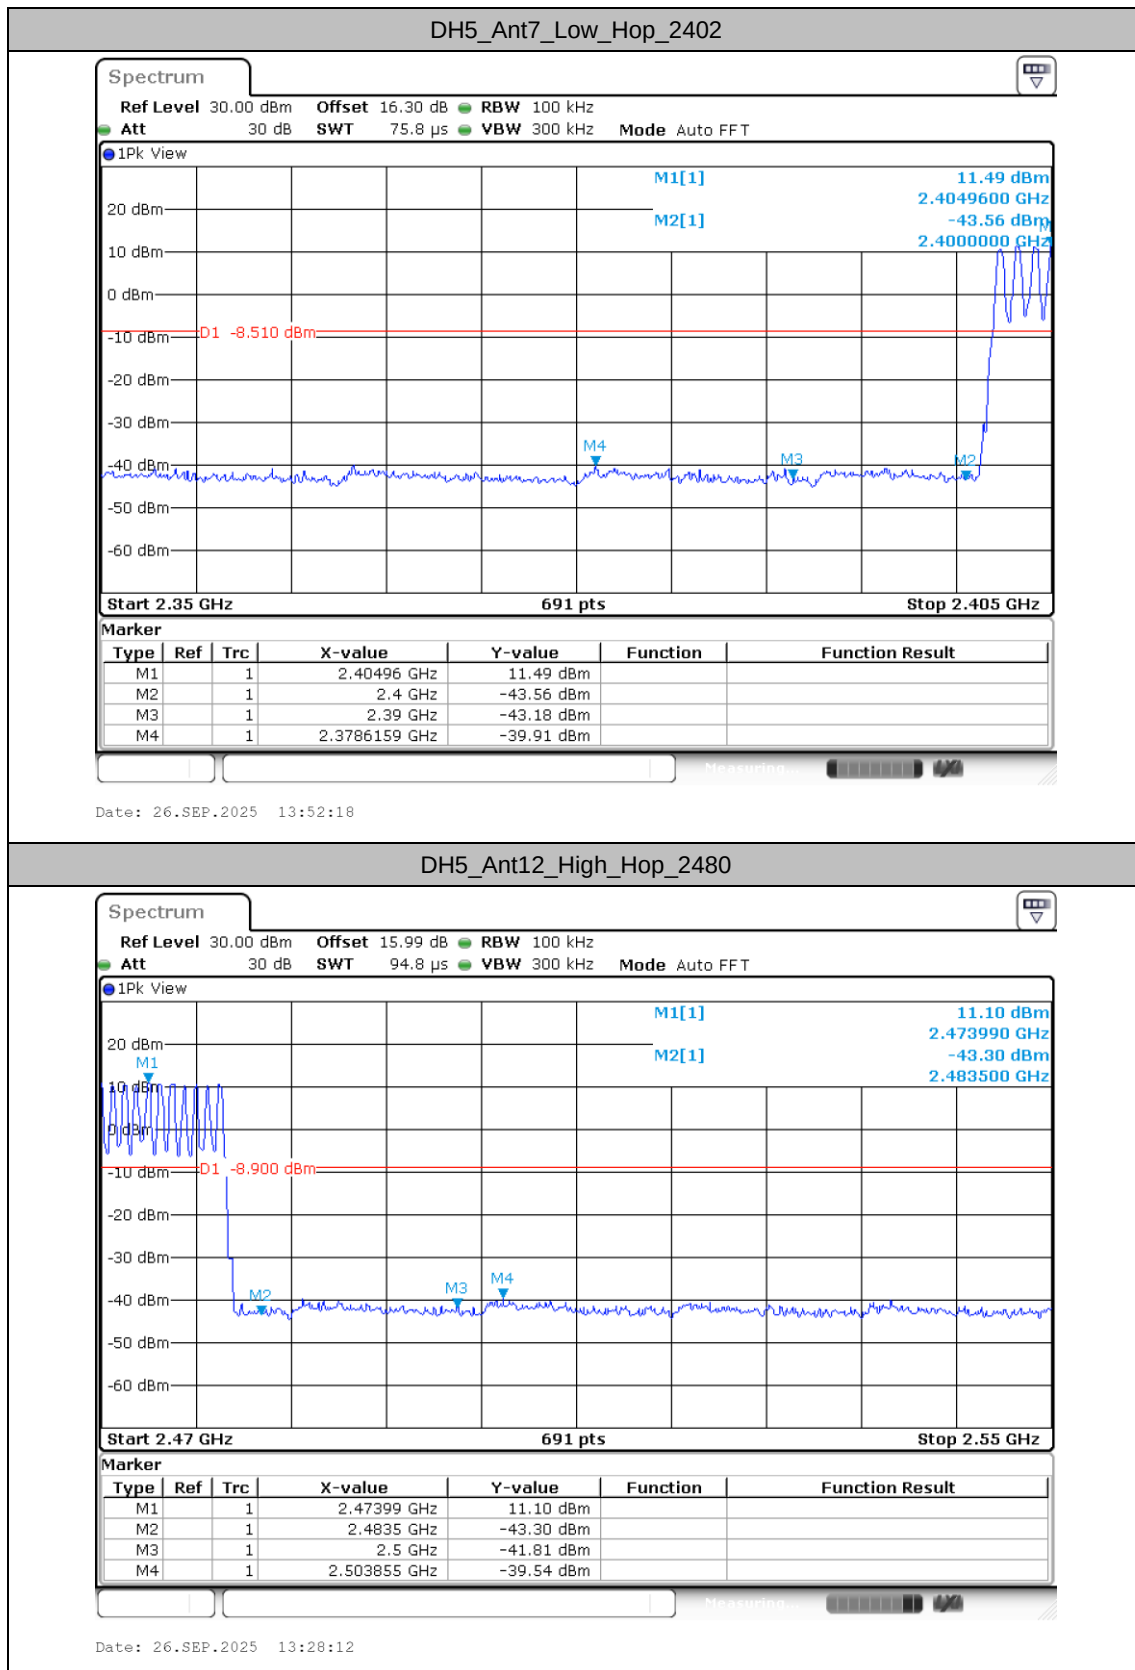


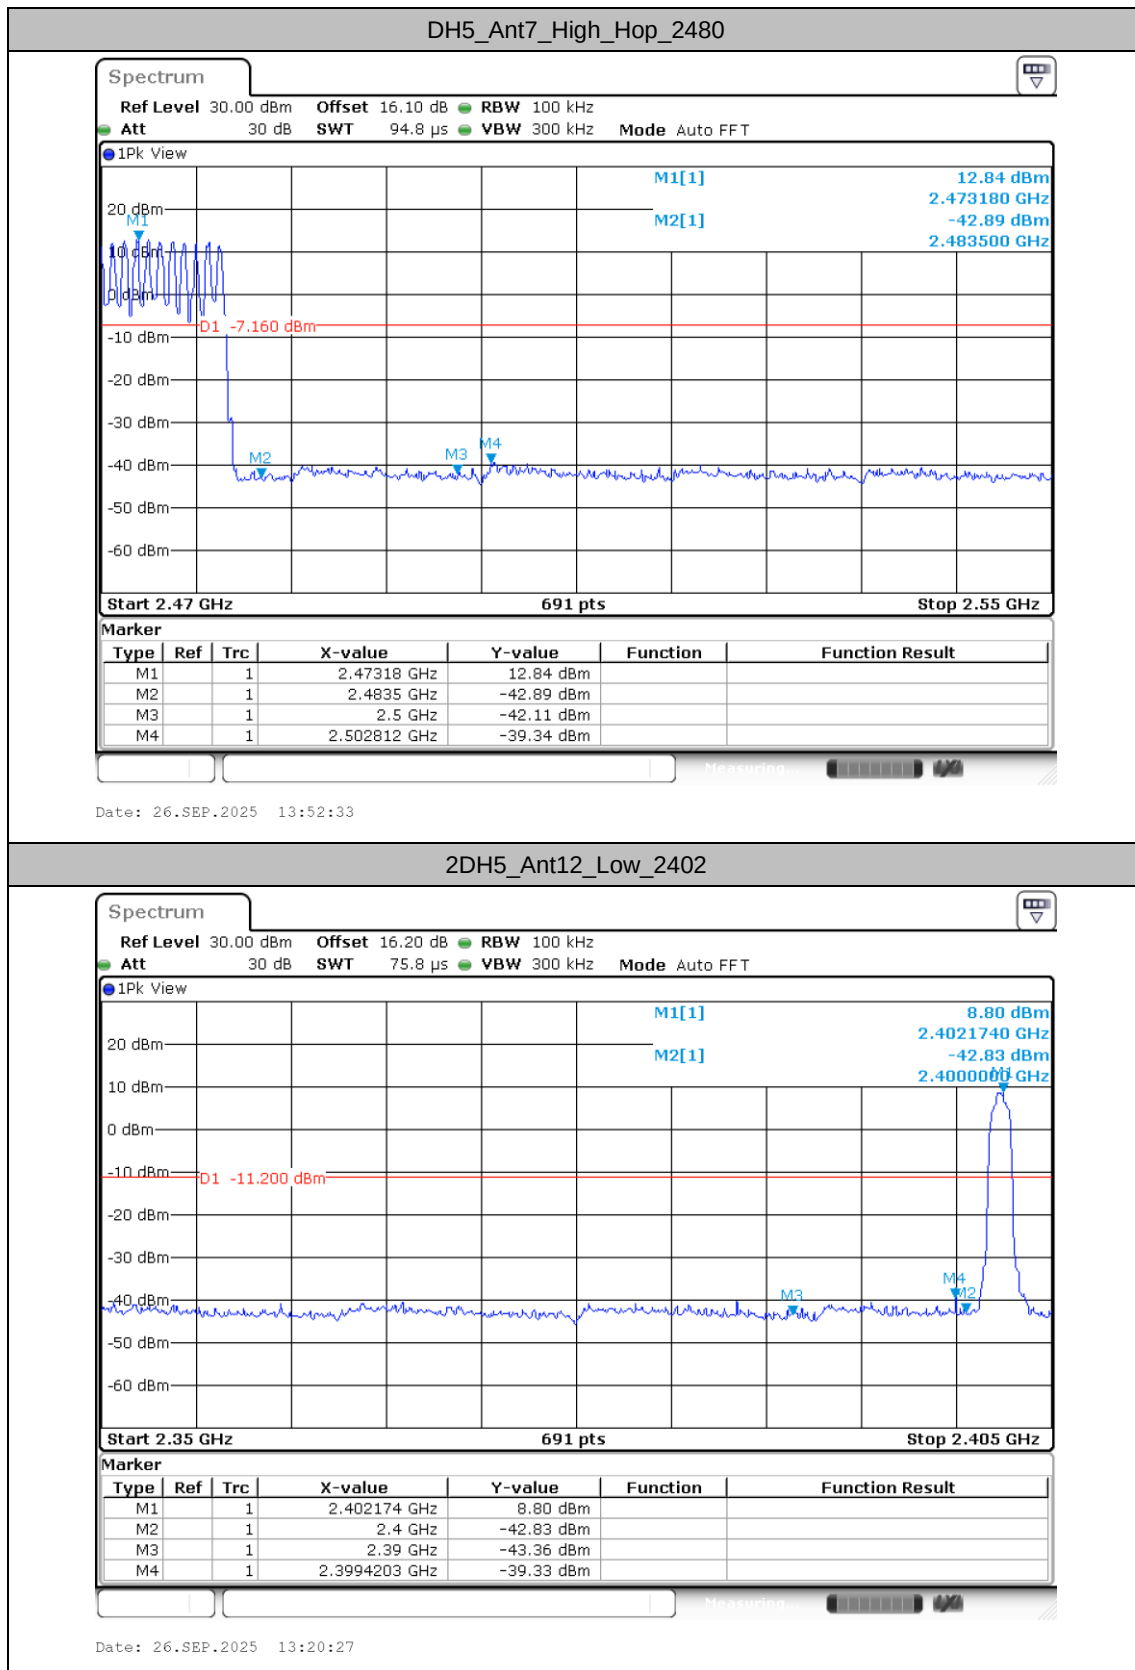


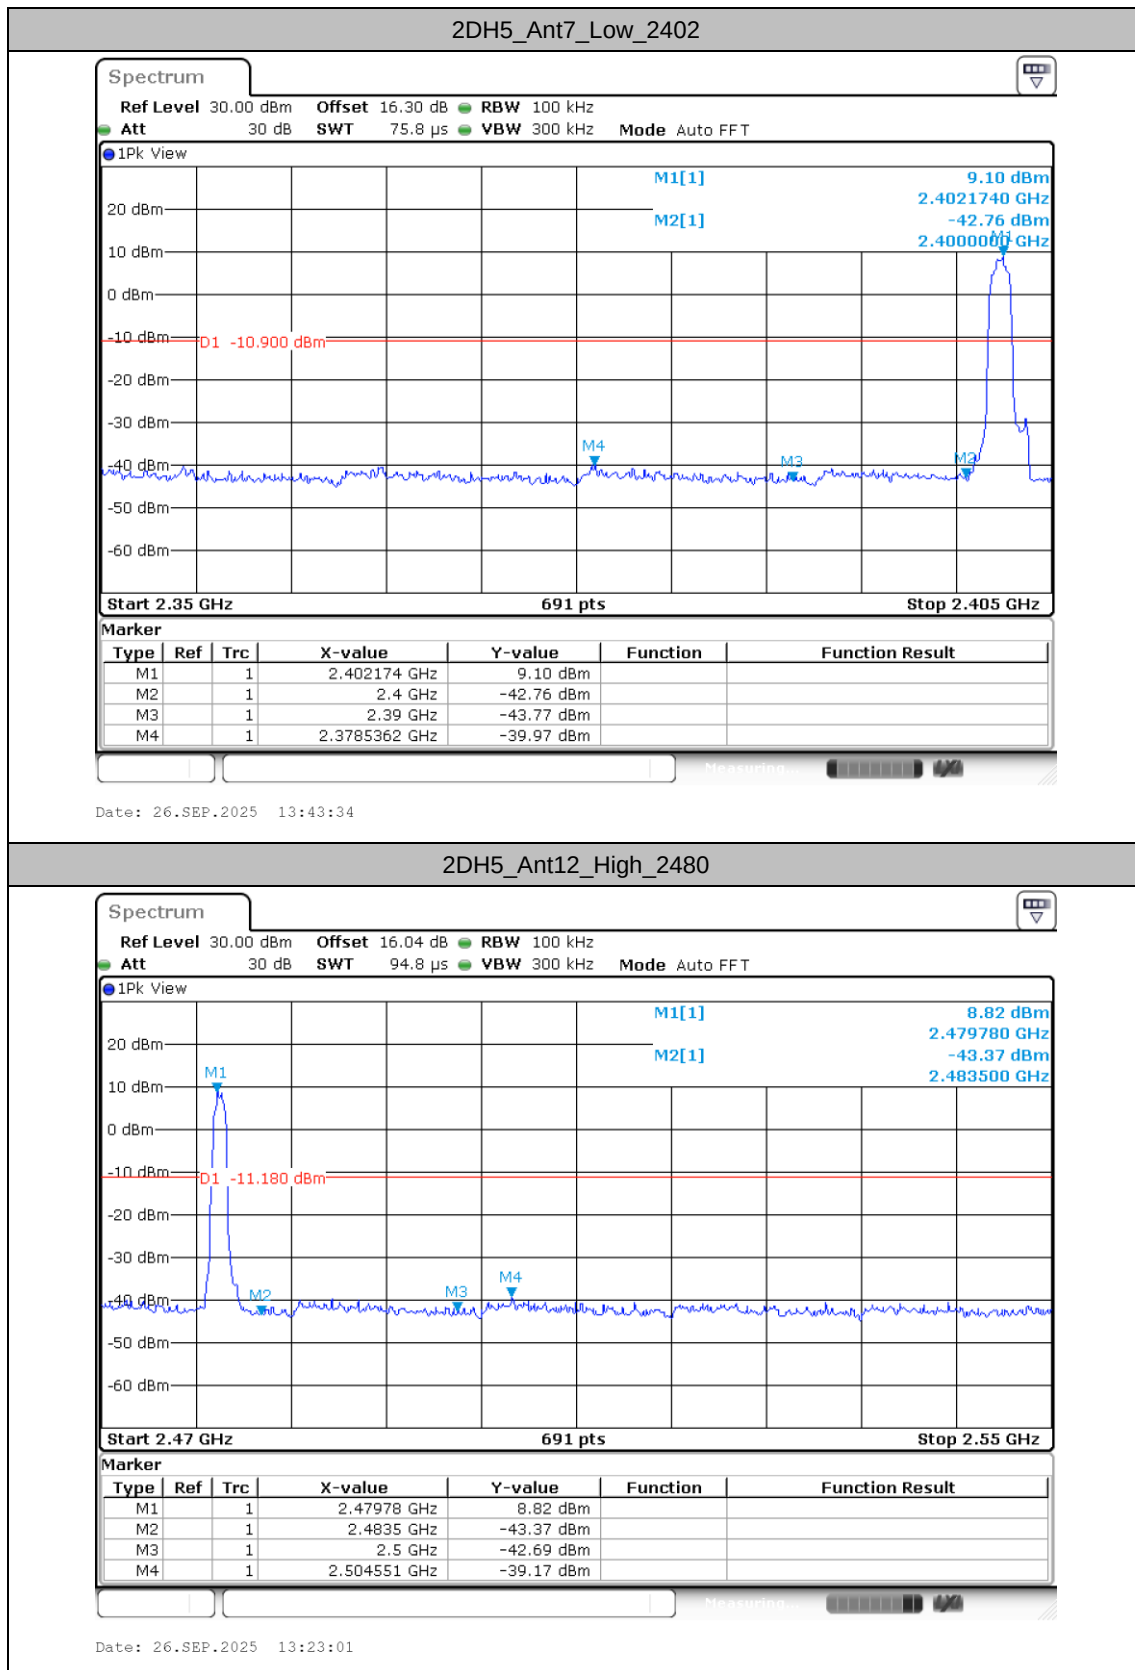


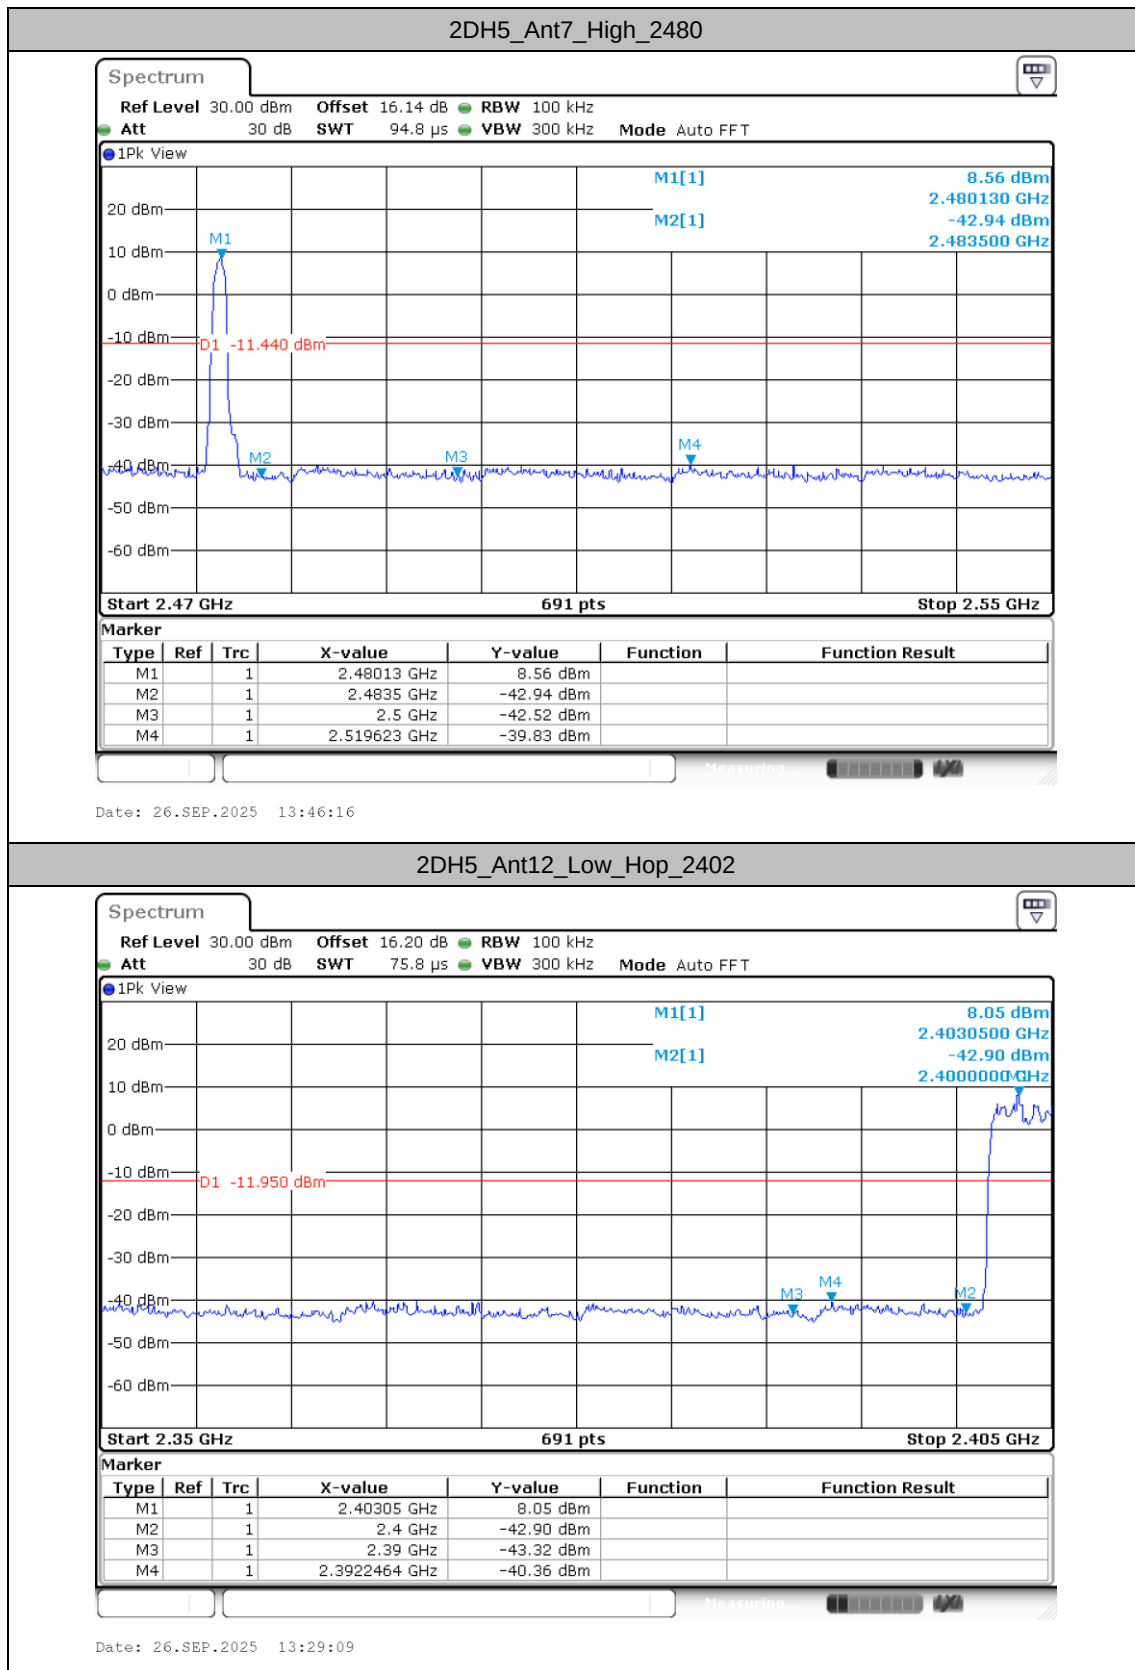


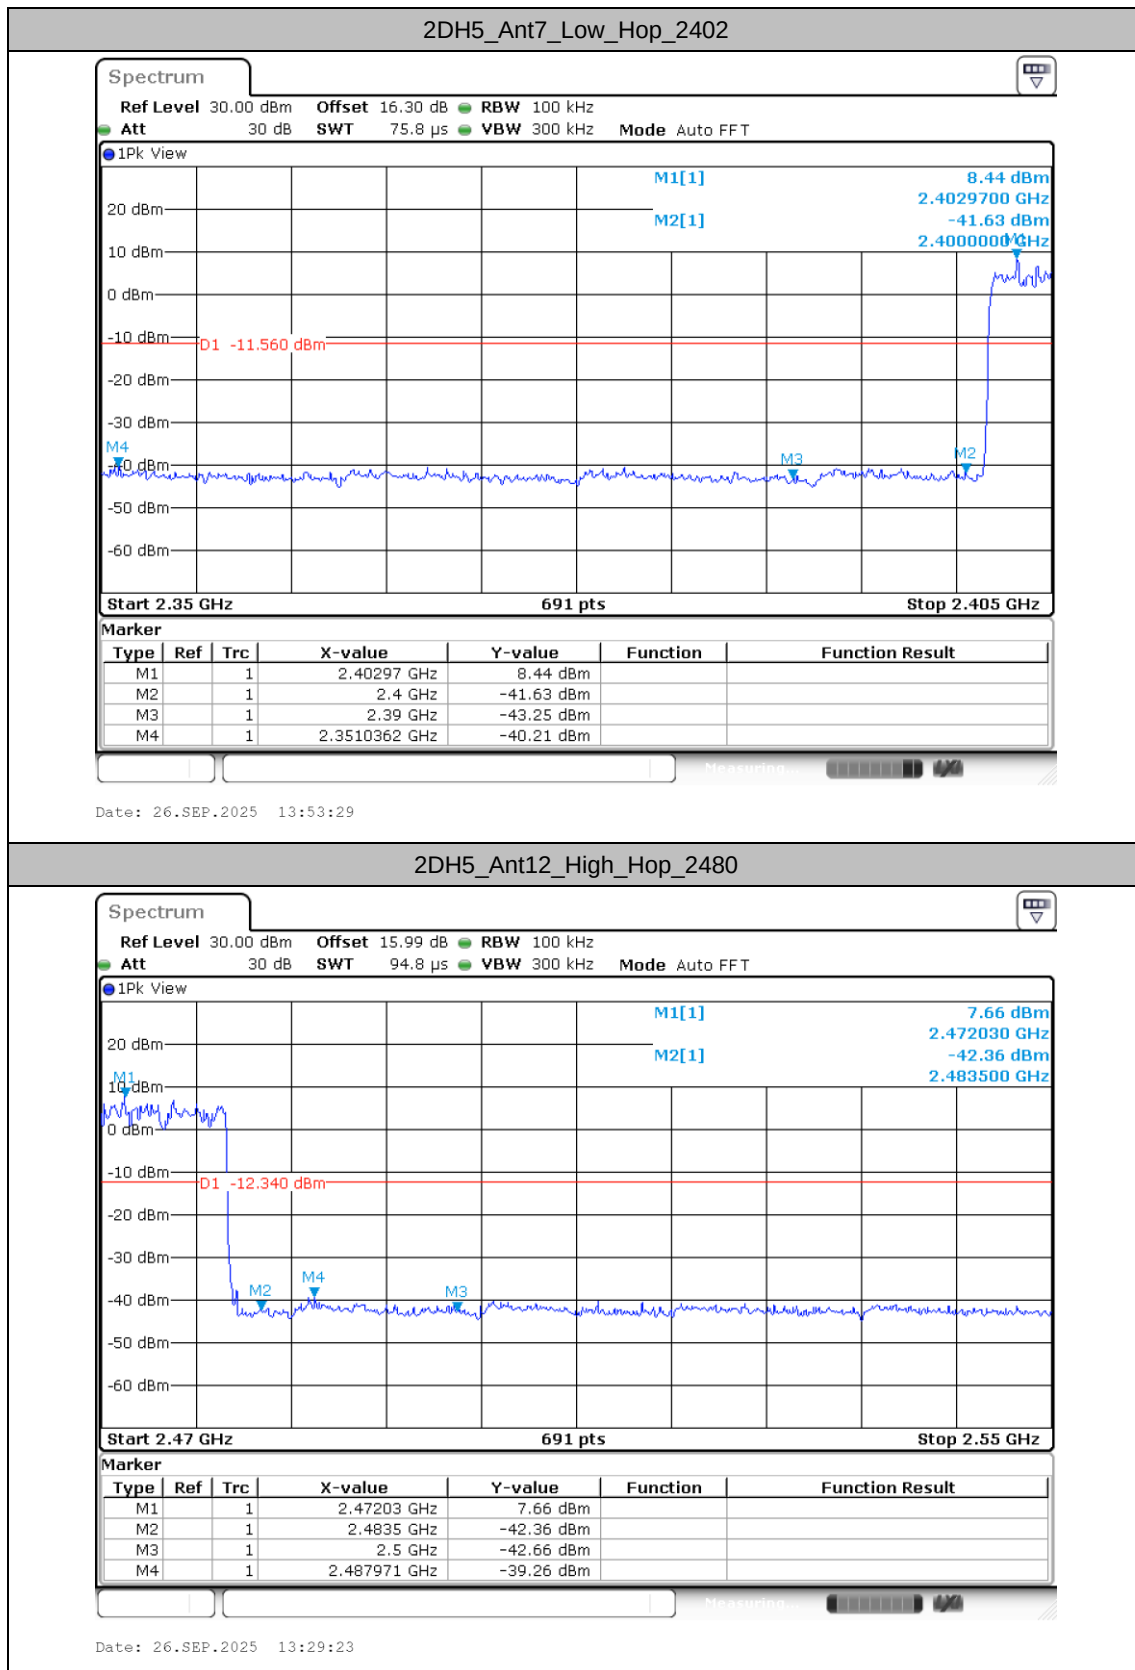


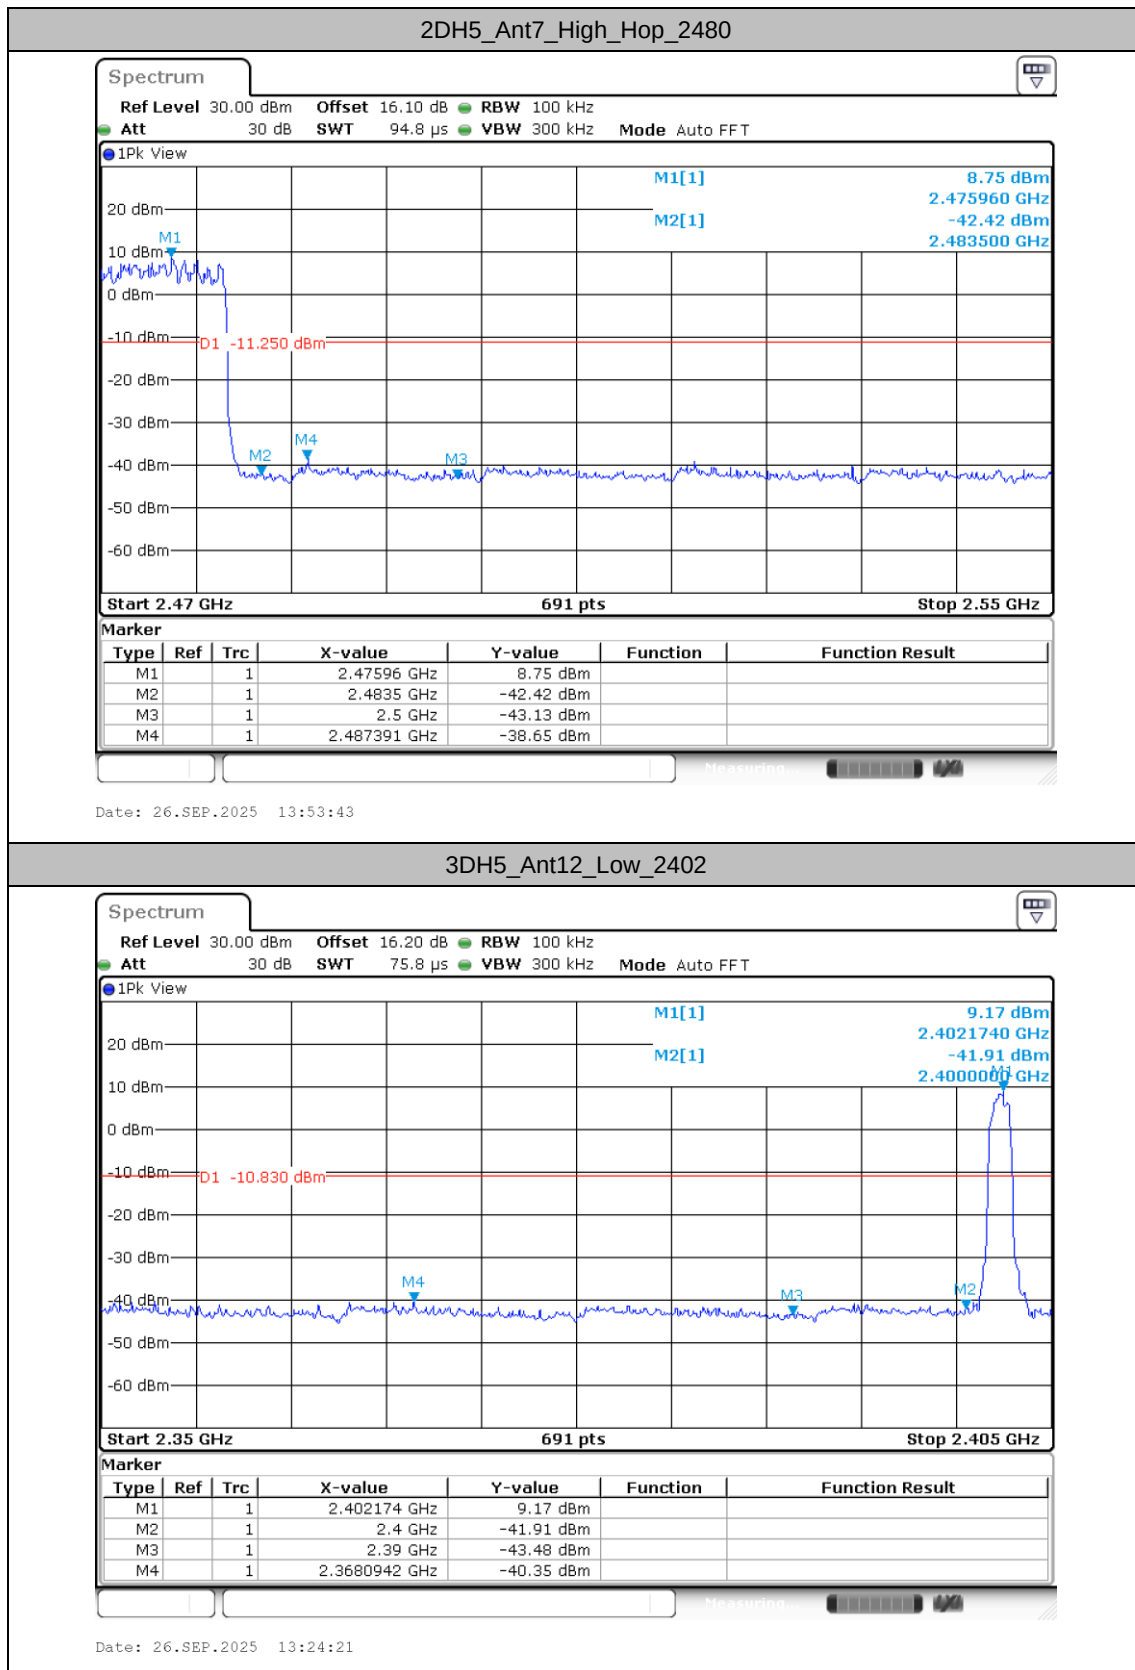

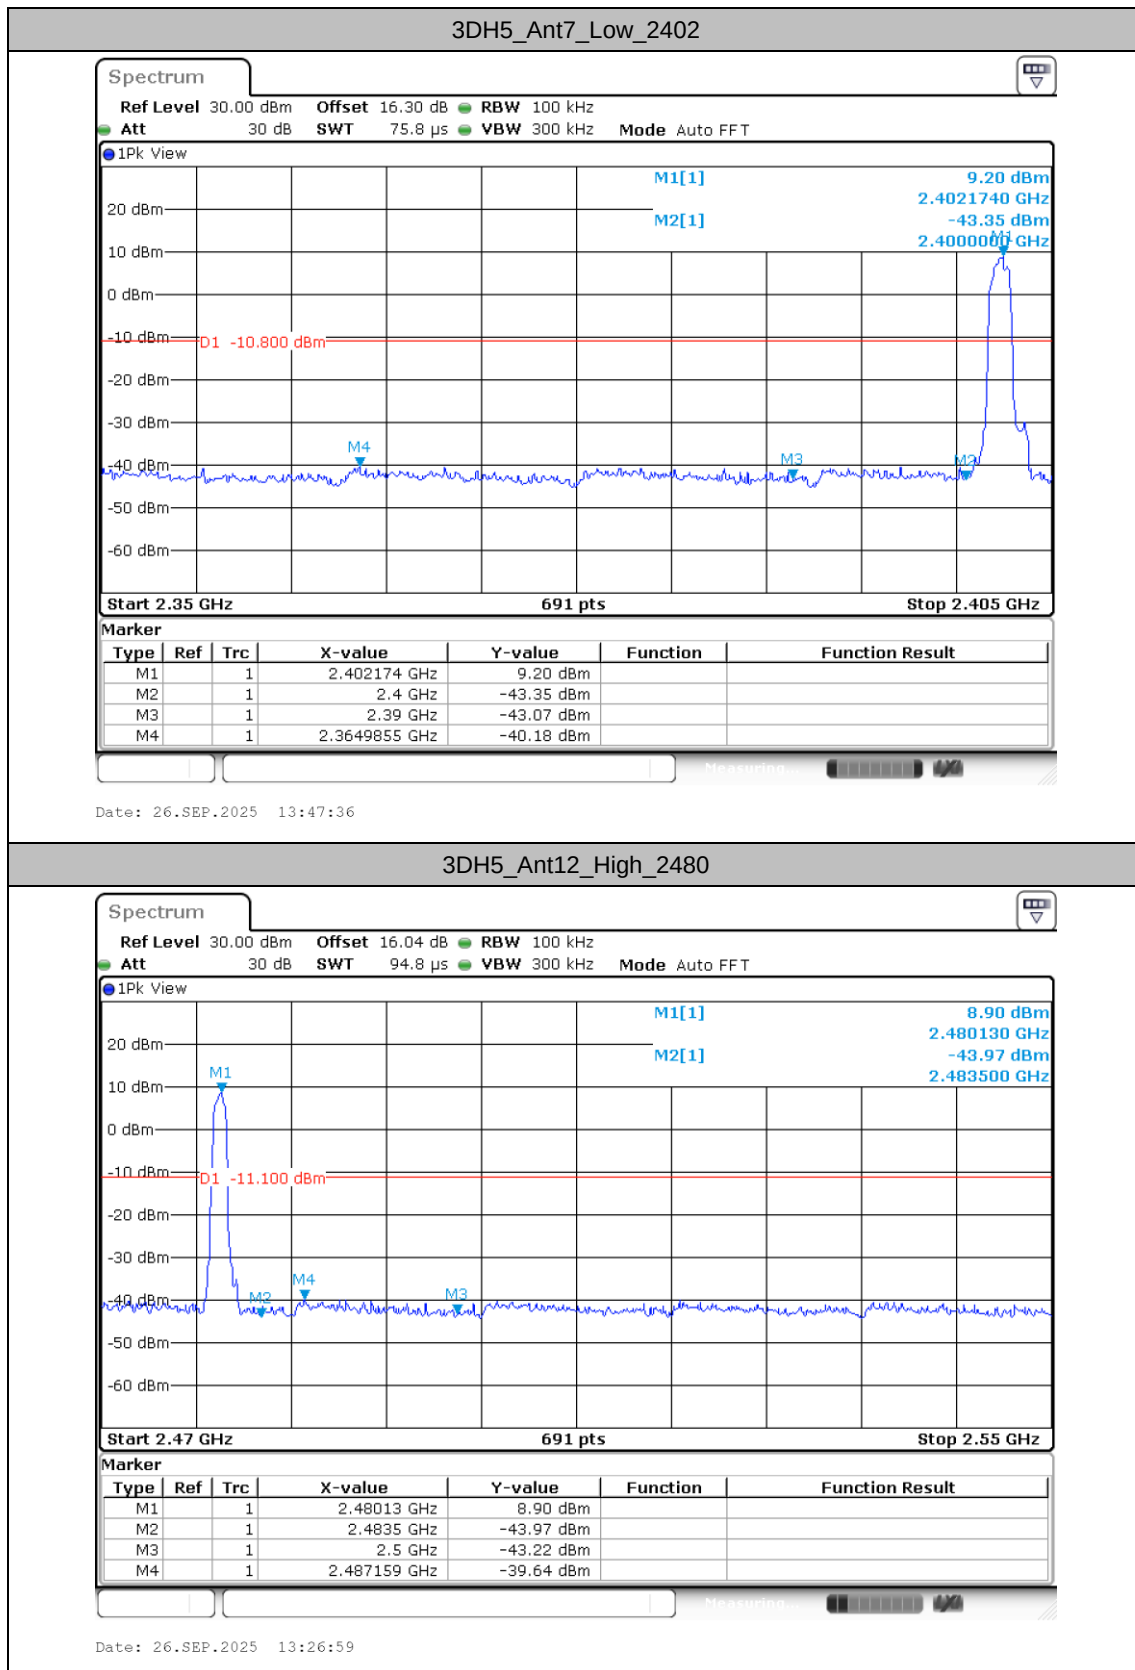

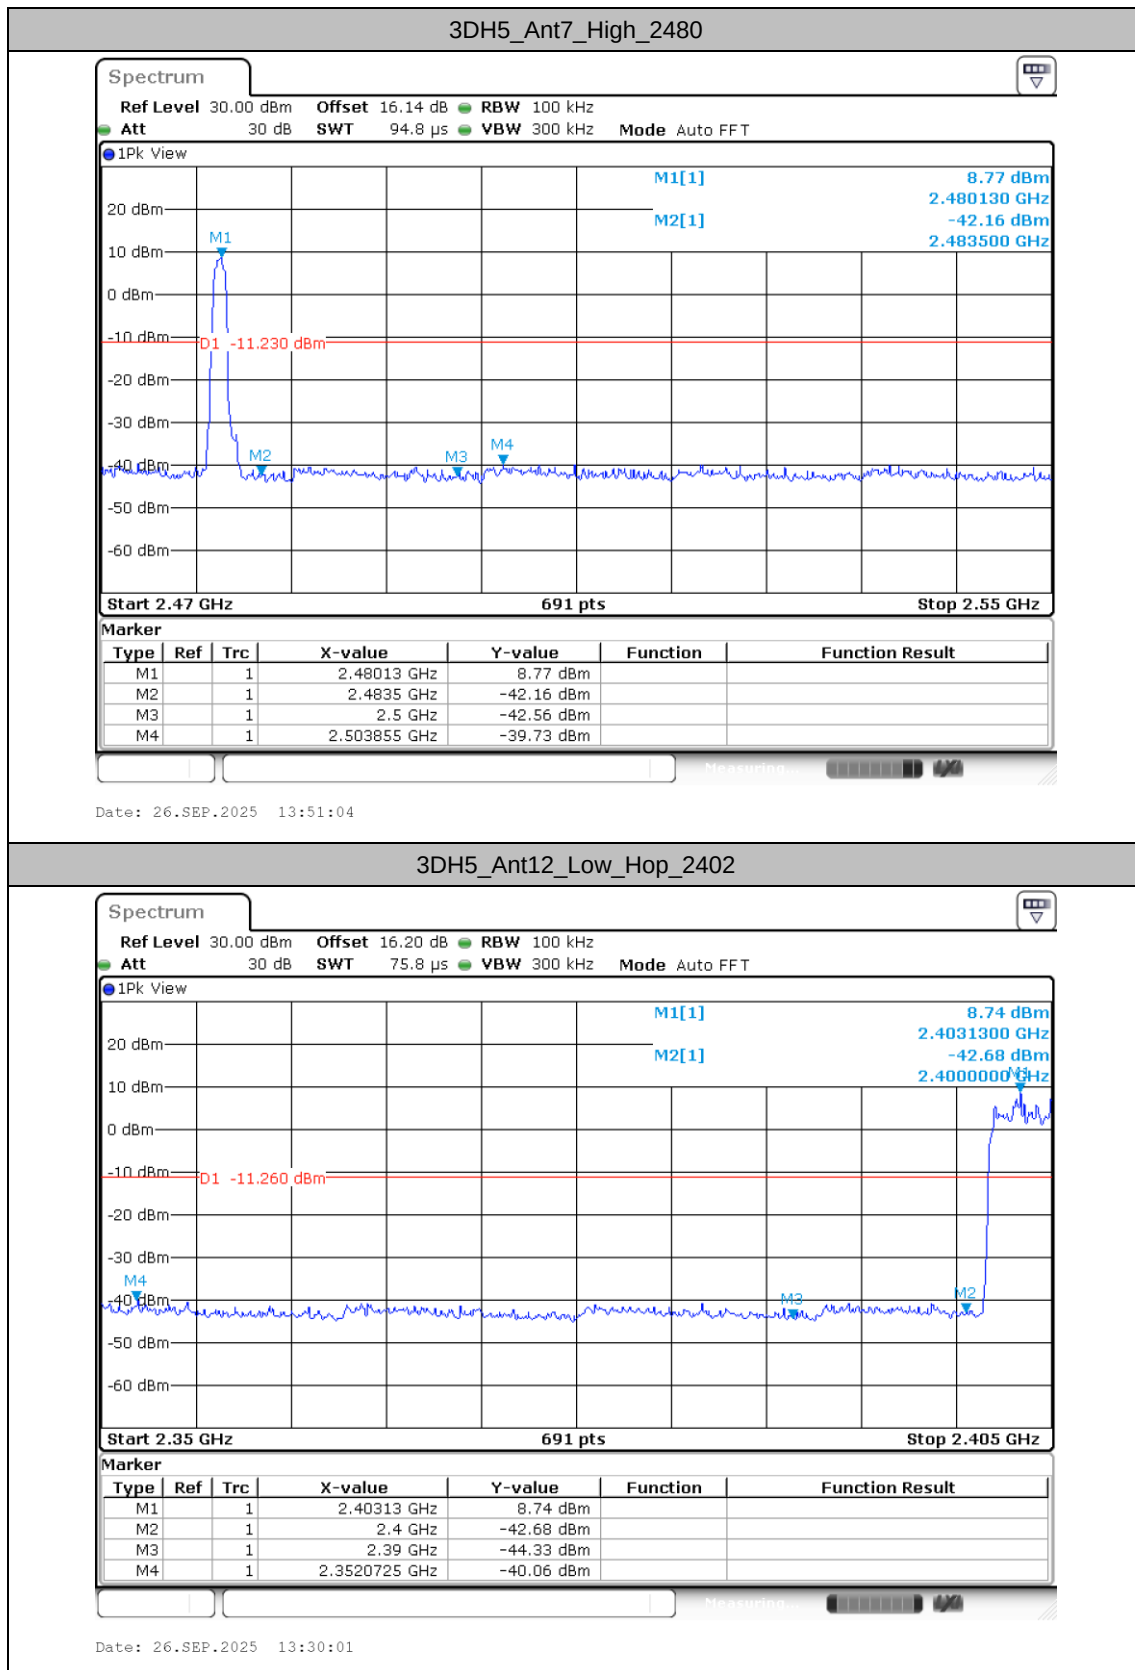

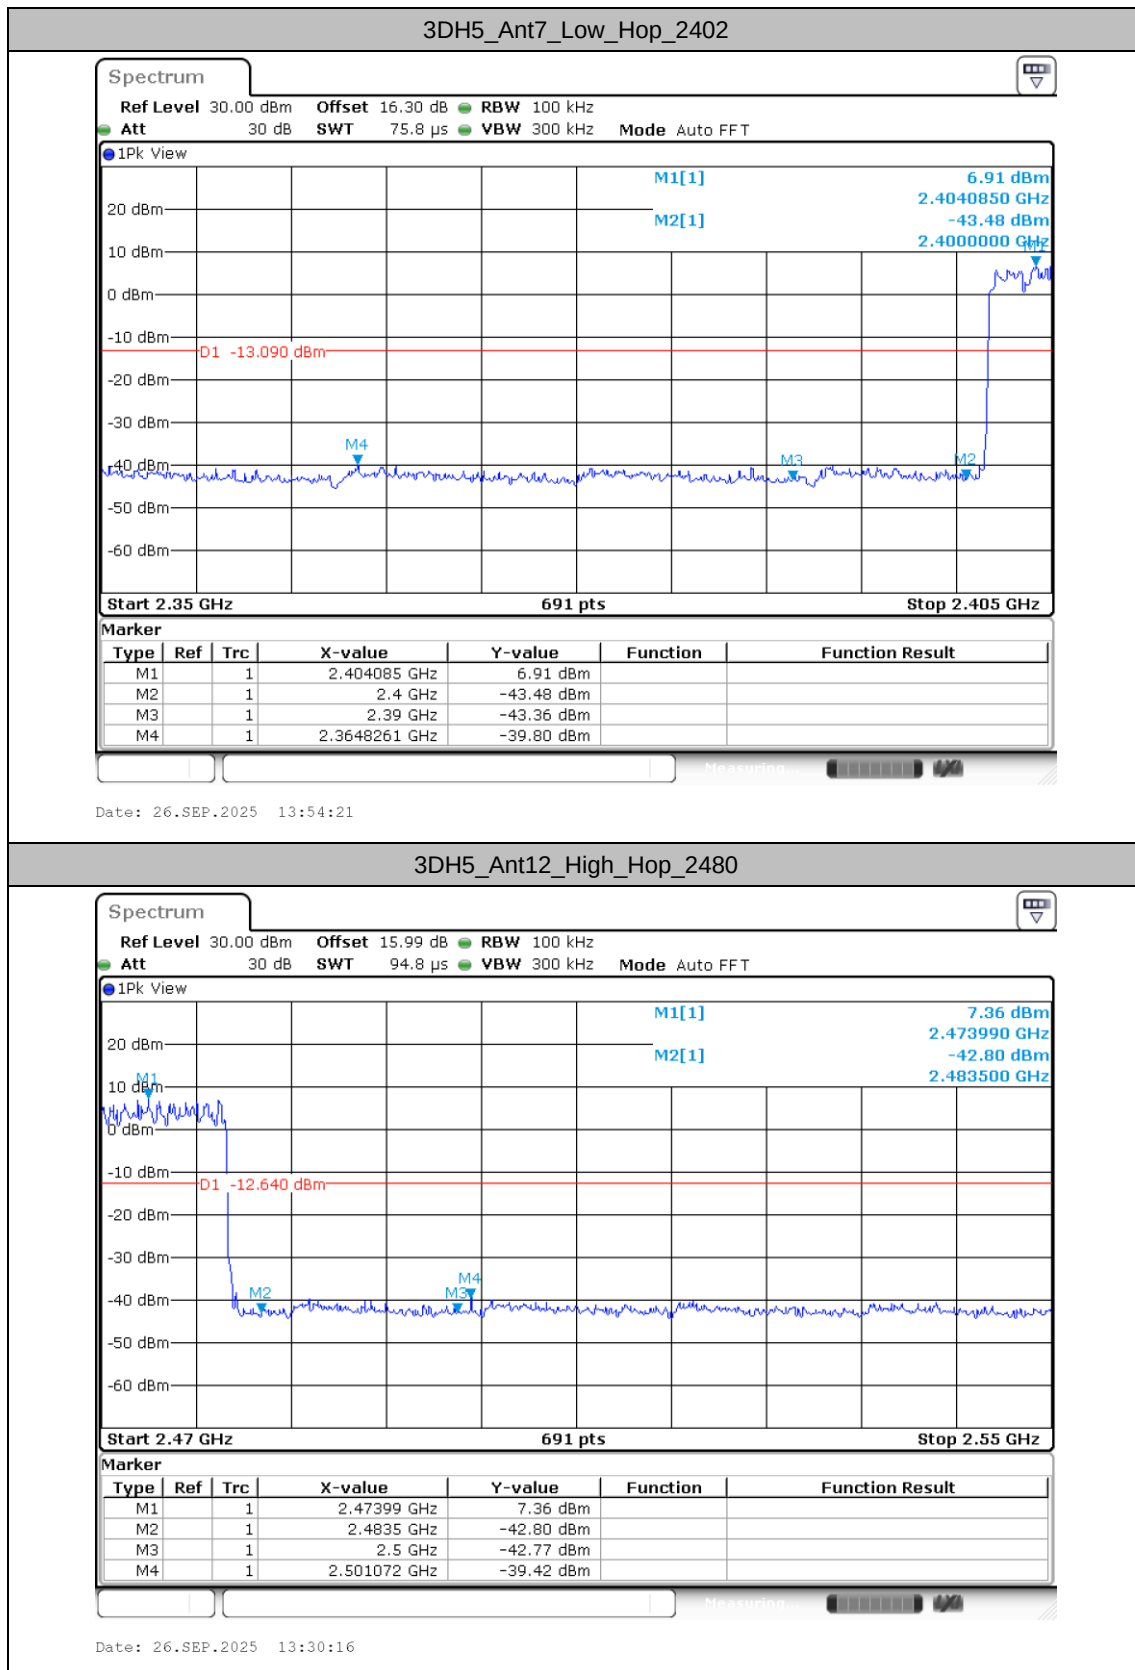

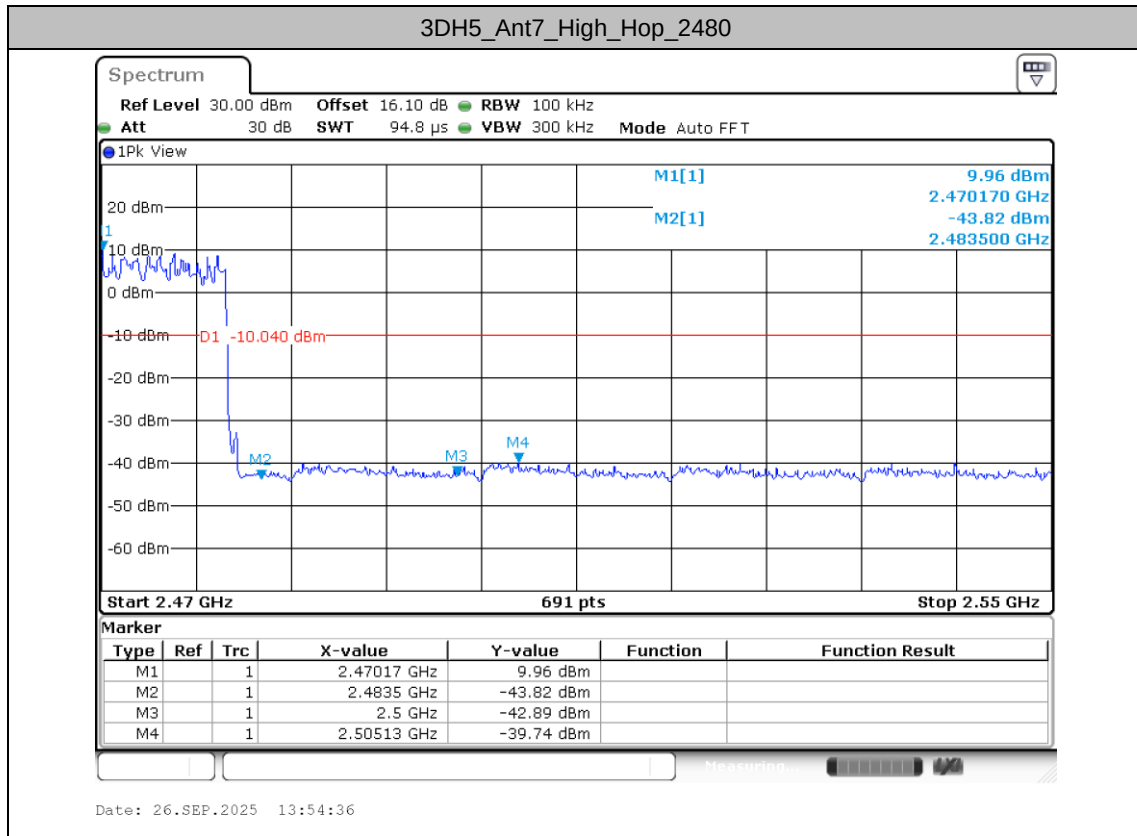



Conducted Spurious Emission

Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant12	2402	Reference	12.23	12.23	---	PASS
			30~1000	12.23	-40.71	≤-7.77	PASS
			1000~26500	12.23	-31.48	≤-7.77	PASS
	Ant7	2402	Reference	12.16	12.16	---	PASS
			30~1000	12.16	-40.27	≤-7.84	PASS
			1000~26500	12.16	-30.91	≤-7.84	PASS
	Ant12	2441	Reference	11.90	11.90	---	PASS
			30~1000	11.90	-41.37	≤-8.1	PASS
			1000~26500	11.90	-30.67	≤-8.1	PASS
	Ant7	2441	Reference	11.41	11.41	---	PASS
			30~1000	11.41	-41.32	≤-8.59	PASS
			1000~26500	11.41	-31.25	≤-8.59	PASS
	Ant12	2480	Reference	11.77	11.77	---	PASS
			30~1000	11.77	-41.29	≤-8.23	PASS
			1000~26500	11.77	-31.93	≤-8.23	PASS
	Ant7	2480	Reference	11.54	11.54	---	PASS
			30~1000	11.54	-40.65	≤-8.46	PASS
			1000~26500	11.54	-31.57	≤-8.46	PASS
2DH5	Ant12	2402	Reference	9.33	9.33	---	PASS
			30~1000	9.33	-41.15	≤-10.67	PASS
			1000~26500	9.33	-31.46	≤-10.67	PASS
	Ant7	2402	Reference	9.22	9.22	---	PASS
			30~1000	9.22	-40.11	≤-10.78	PASS
			1000~26500	9.22	-31.36	≤-10.78	PASS
	Ant12	2441	Reference	8.87	8.87	---	PASS
			30~1000	8.87	-41.03	≤-11.13	PASS
			1000~26500	8.87	-31.73	≤-11.13	PASS
	Ant7	2441	Reference	8.29	8.29	---	PASS
			30~1000	8.29	-40.45	≤-11.71	PASS
			1000~26500	8.29	-31.56	≤-11.71	PASS
	Ant12	2480	Reference	8.77	8.77	---	PASS
			30~1000	8.77	-41.25	≤-11.23	PASS
			1000~26500	8.77	-31.88	≤-11.23	PASS
	Ant7	2480	Reference	8.63	8.63	---	PASS
			30~1000	8.63	-40.87	≤-11.37	PASS
			1000~26500	8.63	-31.87	≤-11.37	PASS
3DH5	Ant12	2402	Reference	9.23	9.23	---	PASS





			30~1000	9.23	-40.75	≤ -10.77	PASS
			1000~26500	9.23	-31.96	≤ -10.77	PASS
	Ant7	2402	Reference	9.29	9.29	---	PASS
			30~1000	9.29	-40.93	≤ -10.71	PASS
			1000~26500	9.29	-31.74	≤ -10.71	PASS
	Ant12	2441	Reference	8.99	8.99	---	PASS
			30~1000	8.99	-40.68	≤ -11.01	PASS
			1000~26500	8.99	-31.65	≤ -11.01	PASS
	Ant7	2441	Reference	8.37	8.37	---	PASS
			30~1000	8.37	-40.14	≤ -11.63	PASS
			1000~26500	8.37	-31.41	≤ -11.63	PASS
	Ant12	2480	Reference	8.88	8.88	---	PASS
			30~1000	8.88	-39.83	≤ -11.12	PASS
			1000~26500	8.88	-31.87	≤ -11.12	PASS
	Ant7	2480	Reference	8.75	8.75	---	PASS
			30~1000	8.75	-41.04	≤ -11.25	PASS
			1000~26500	8.75	-30.95	≤ -11.25	PASS







Test Graphs

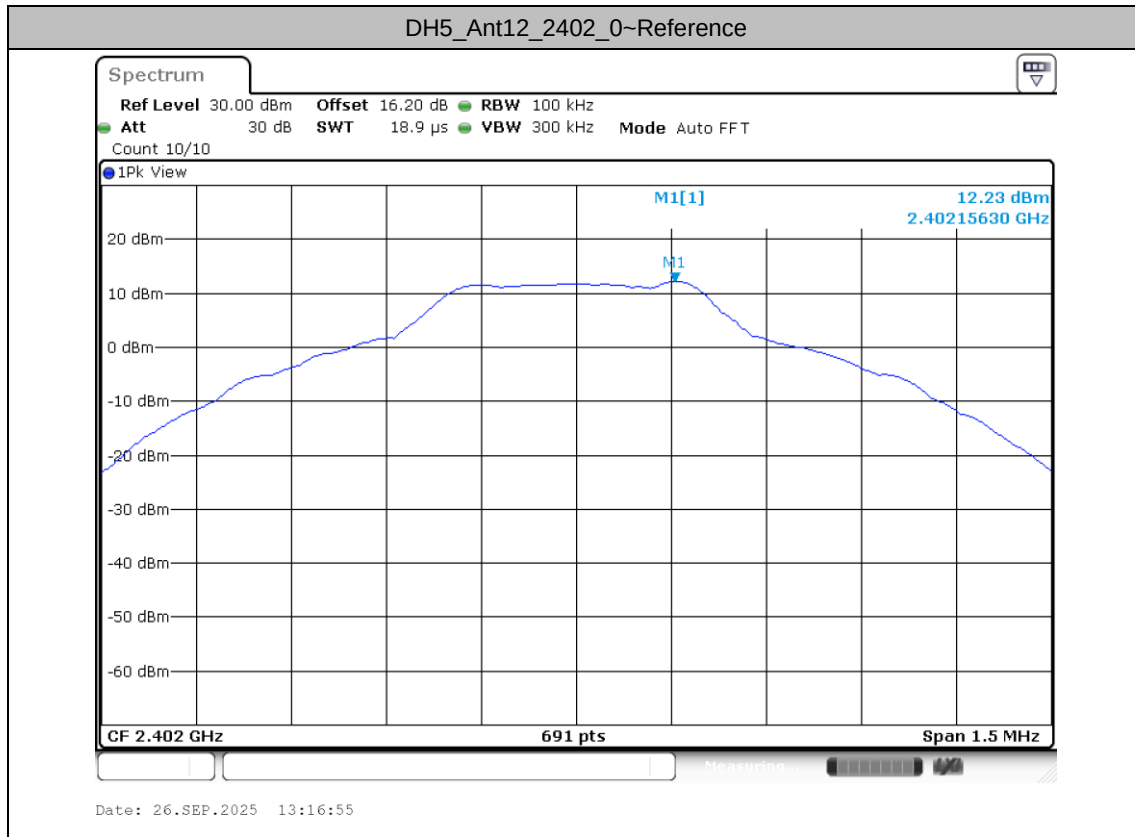



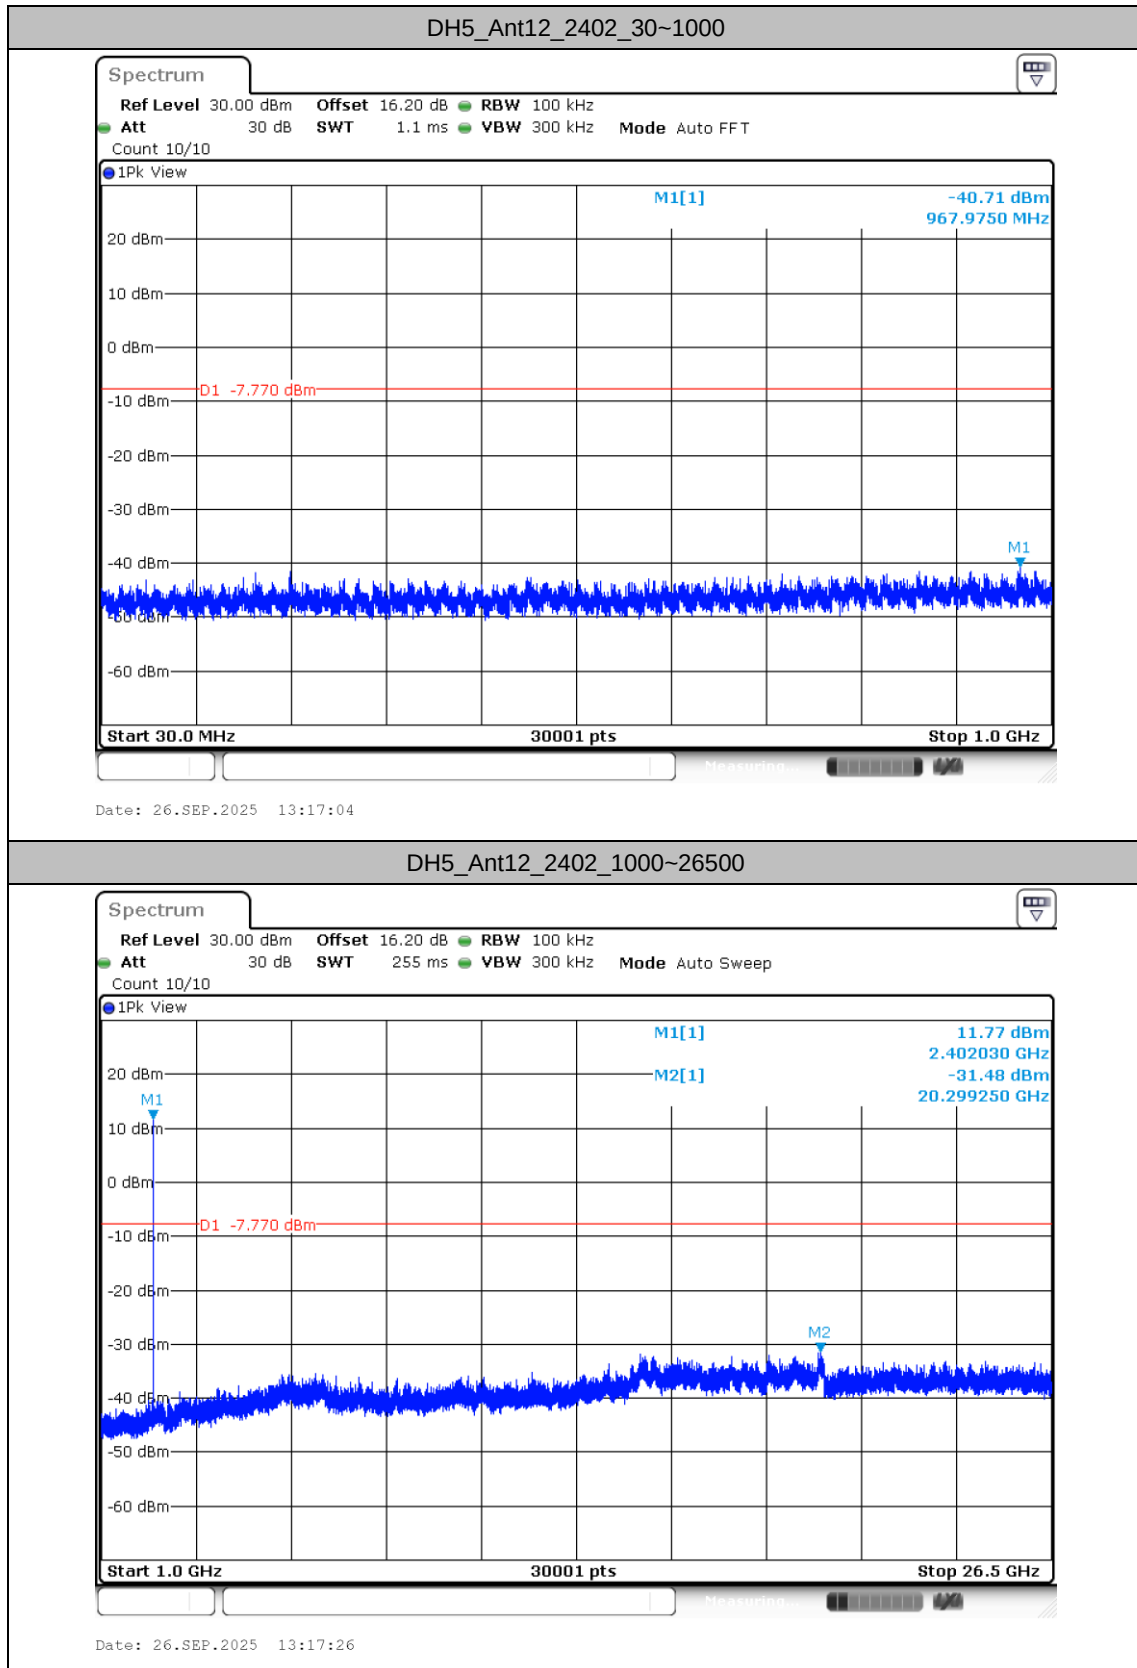



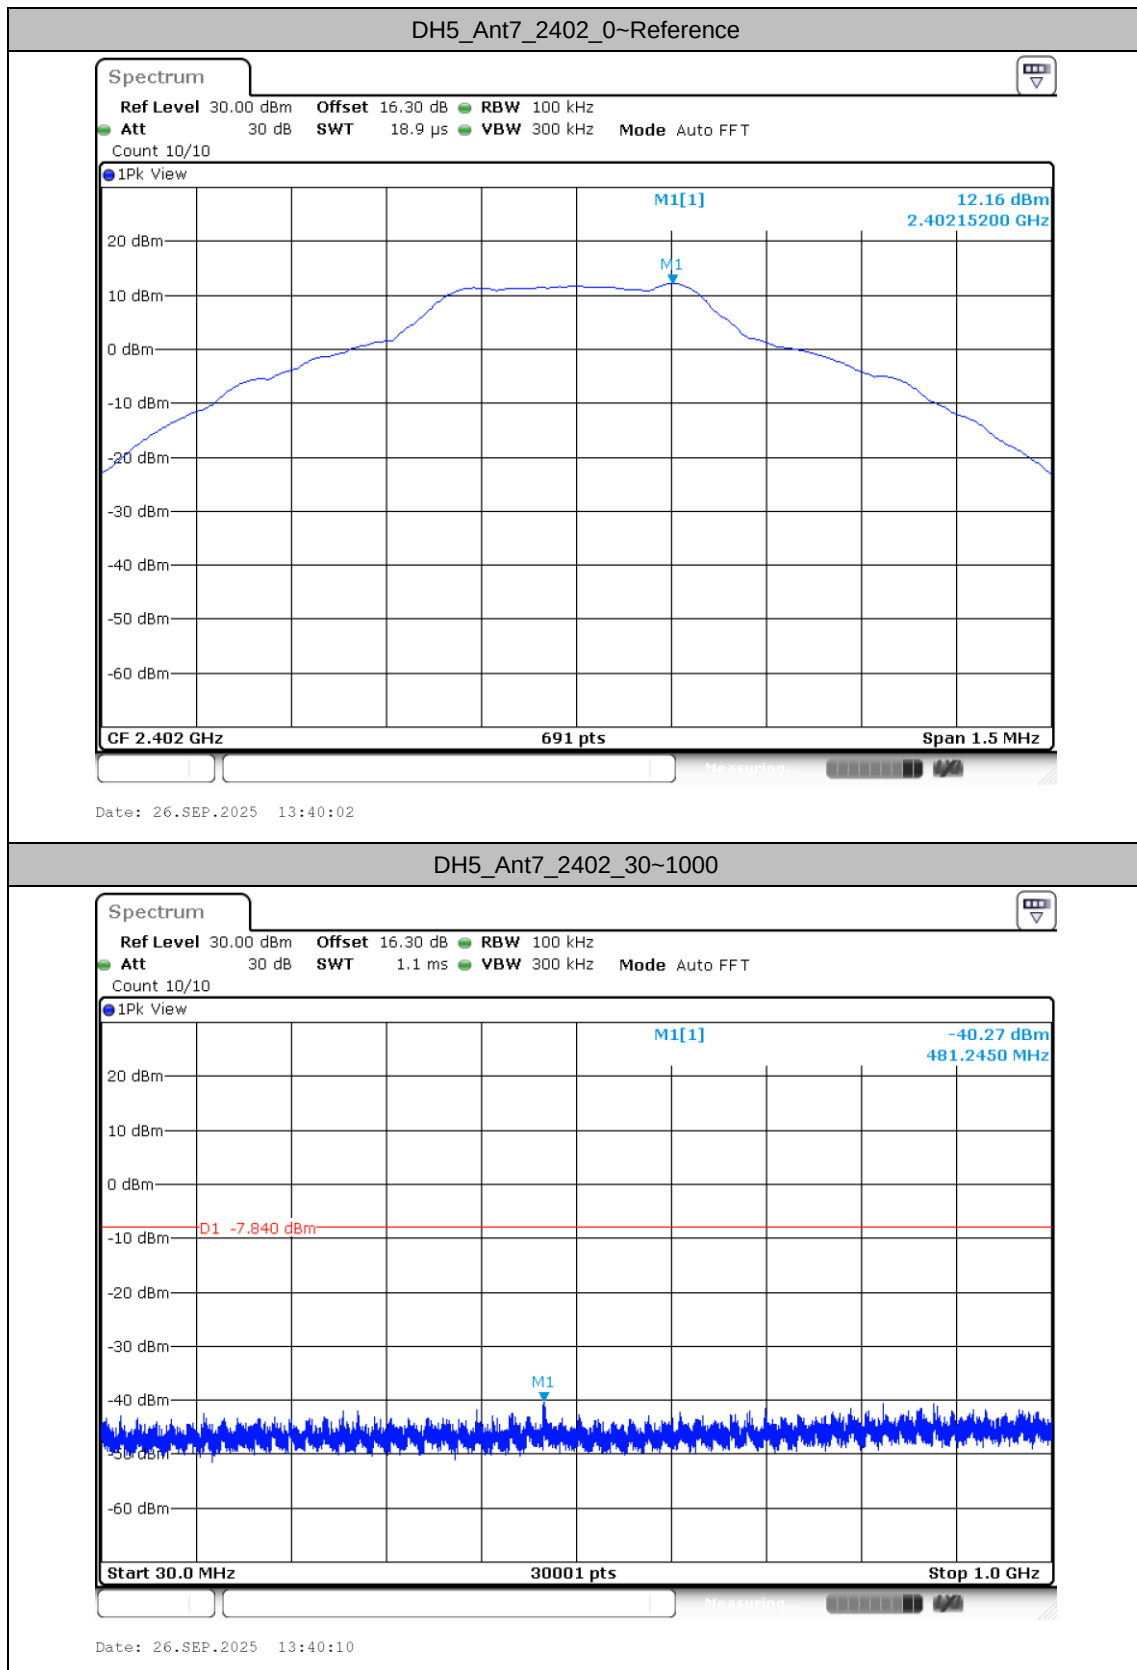


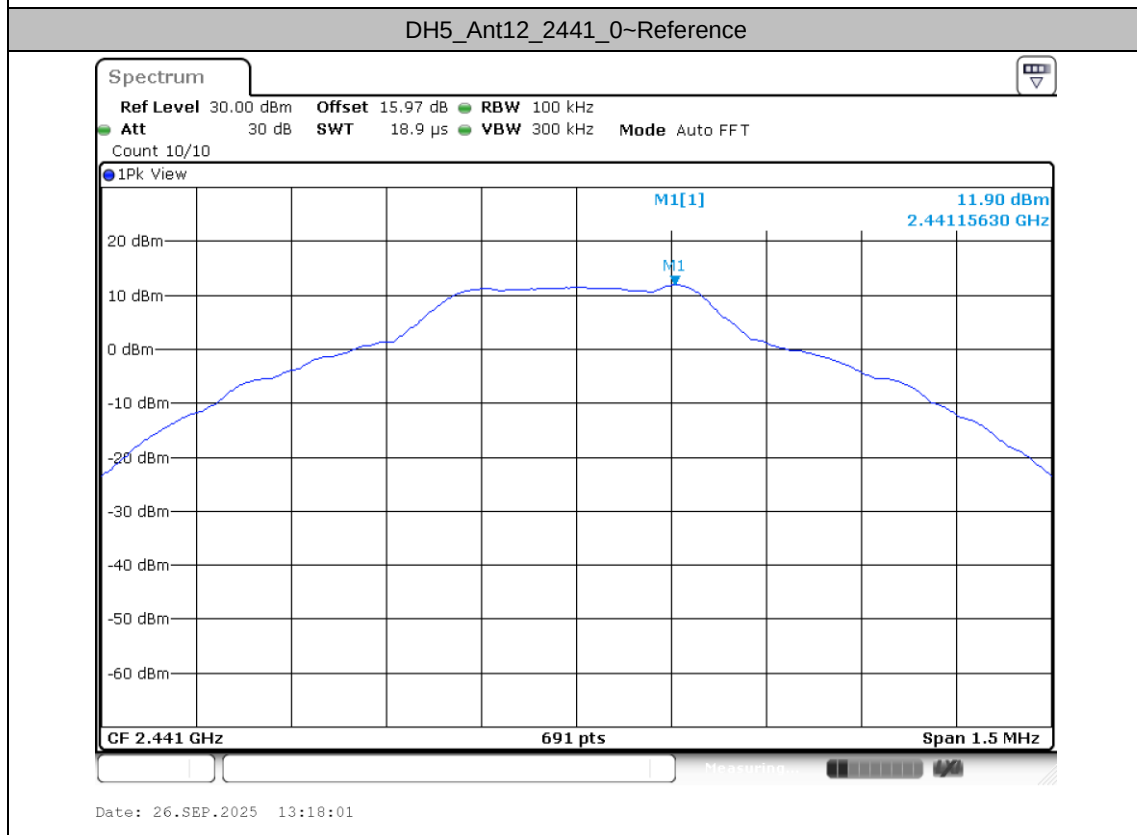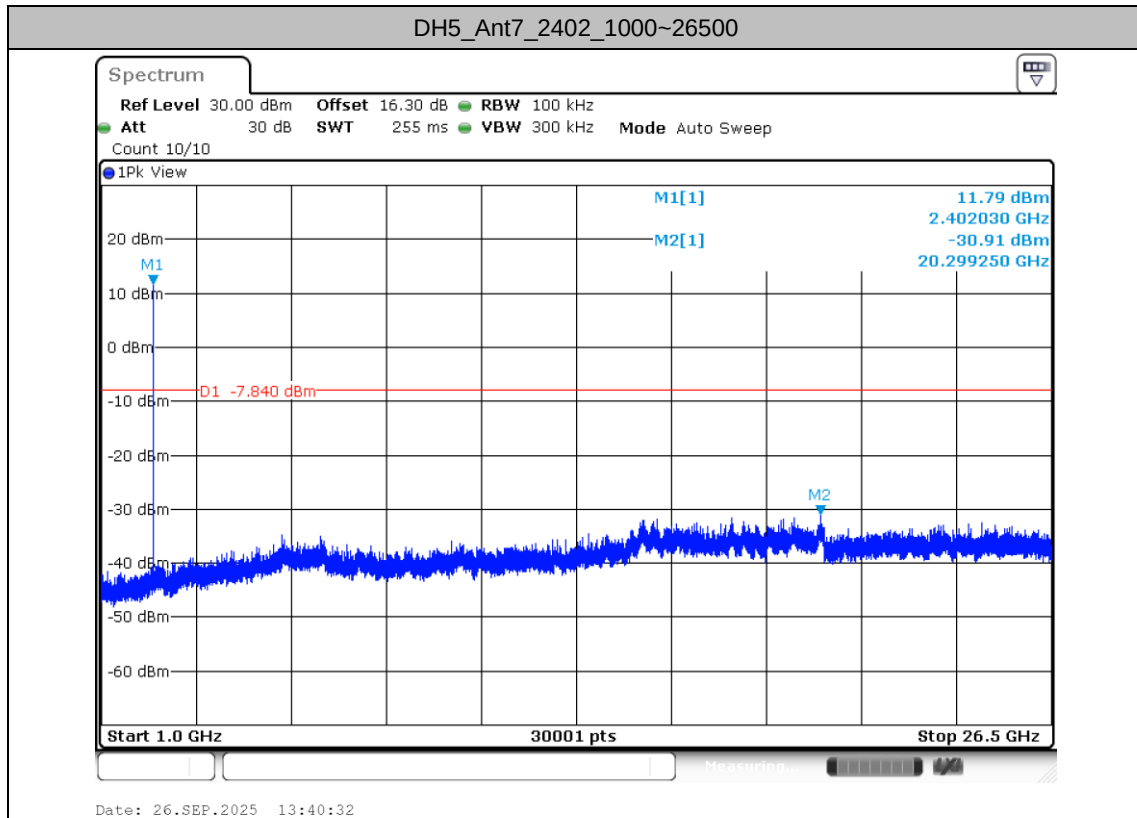


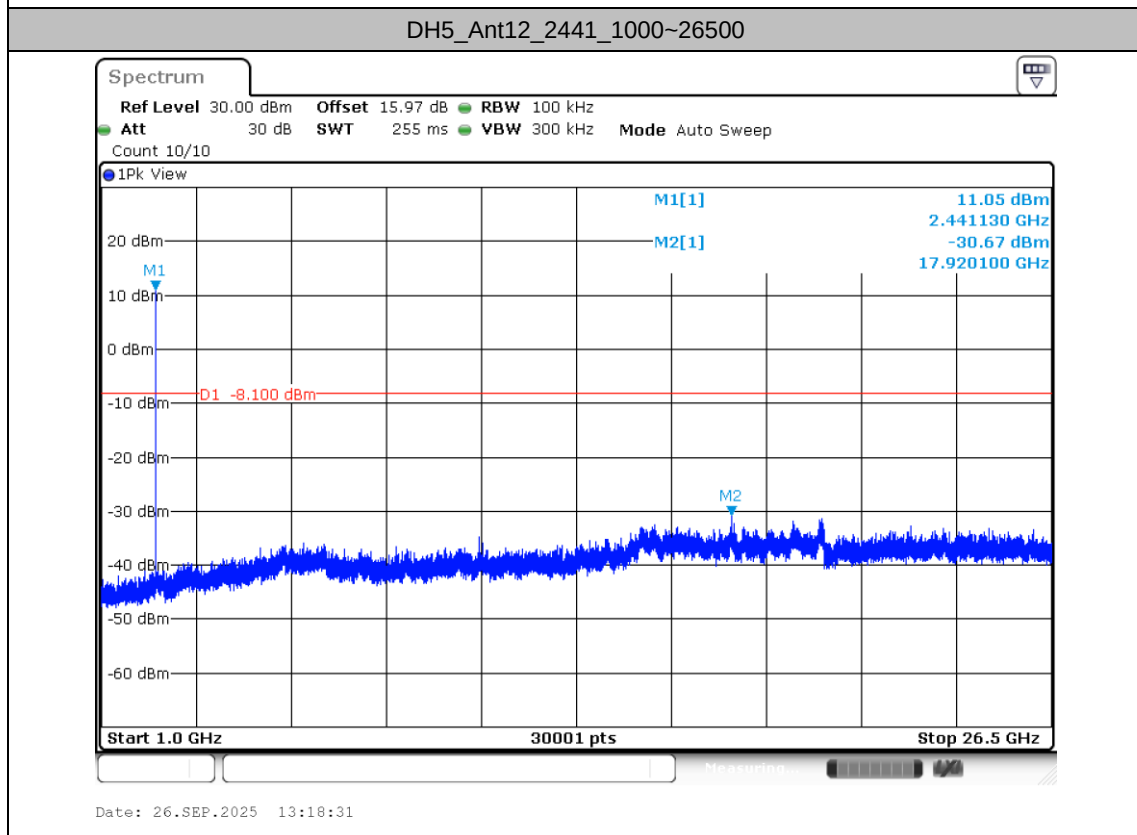
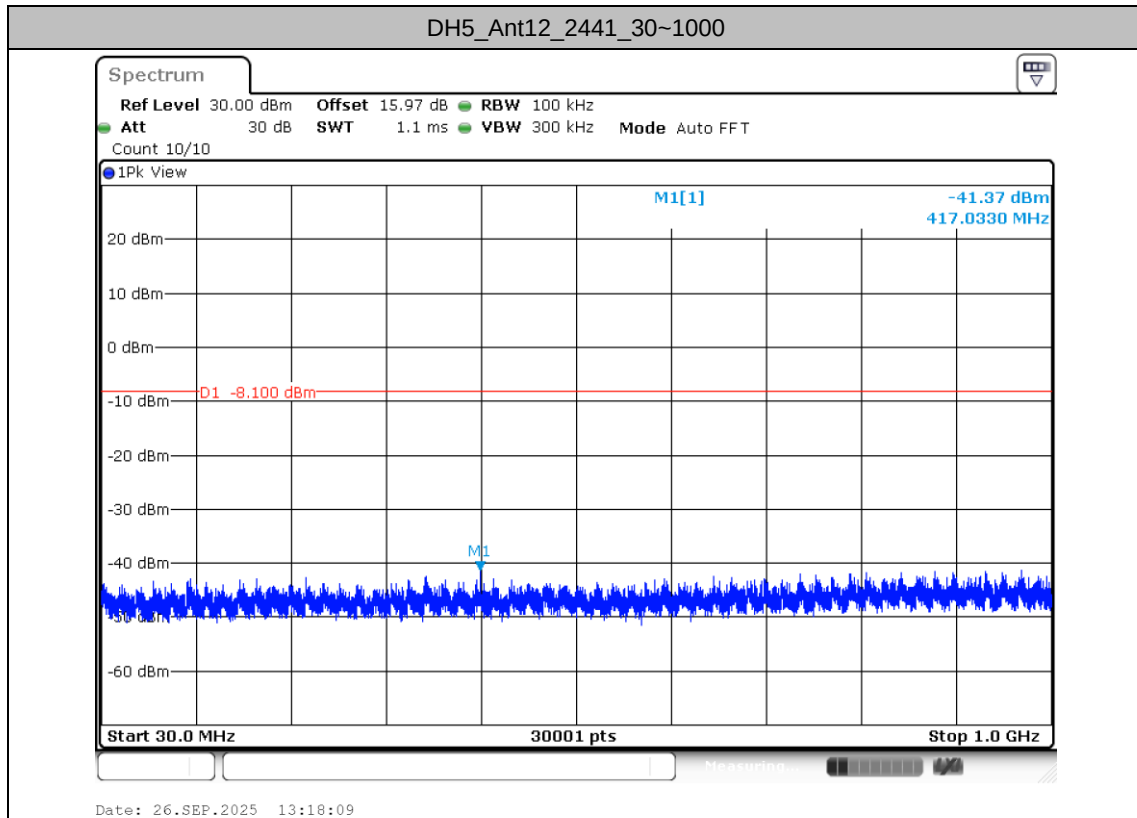



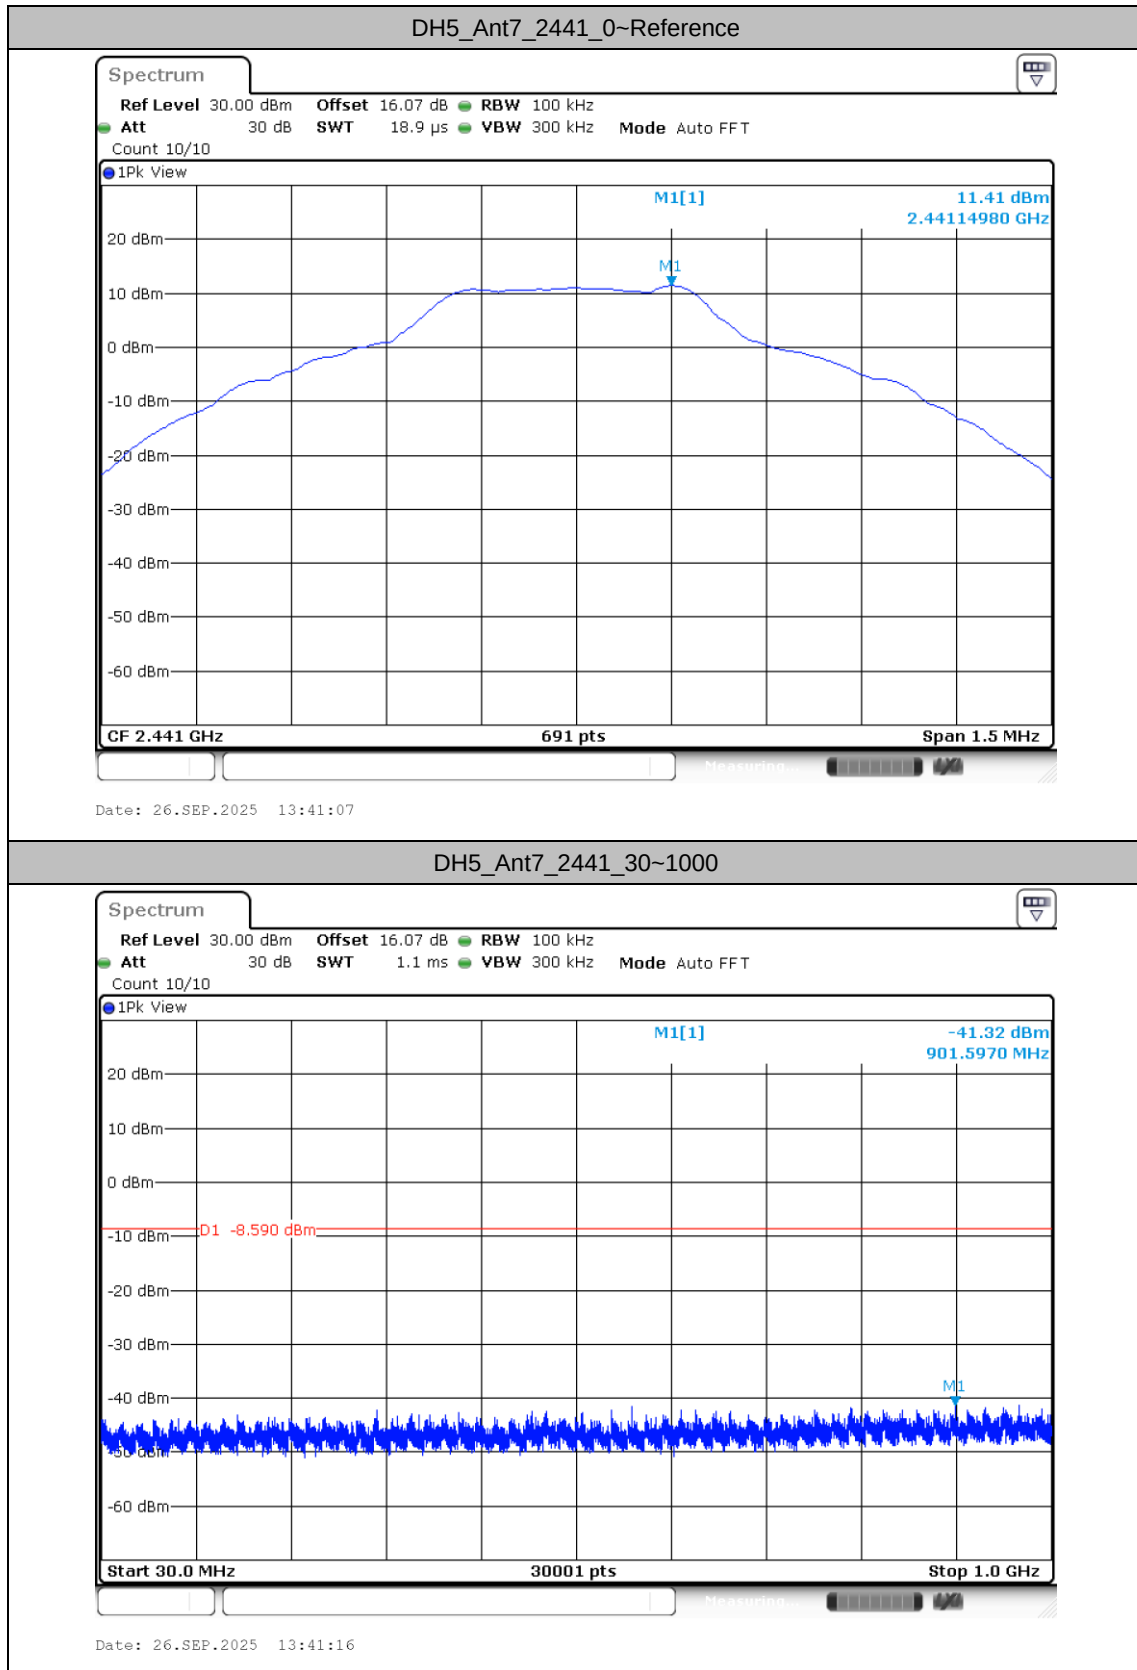


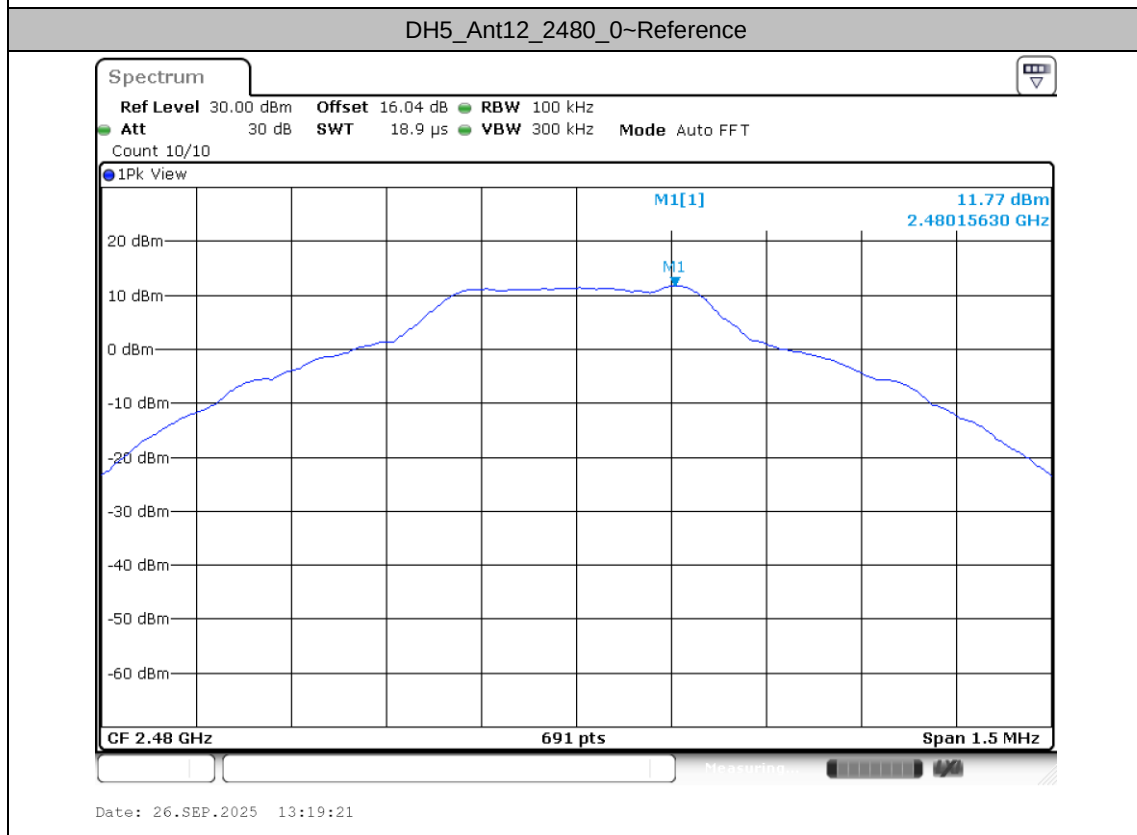
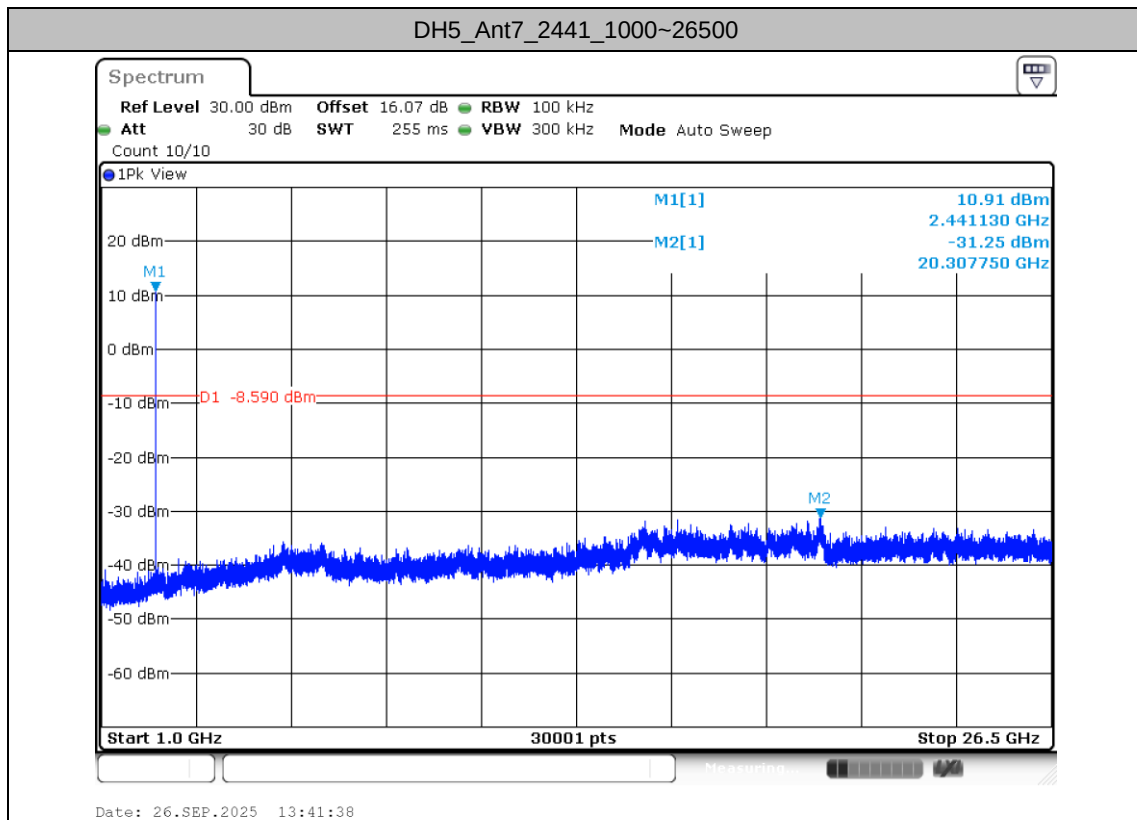


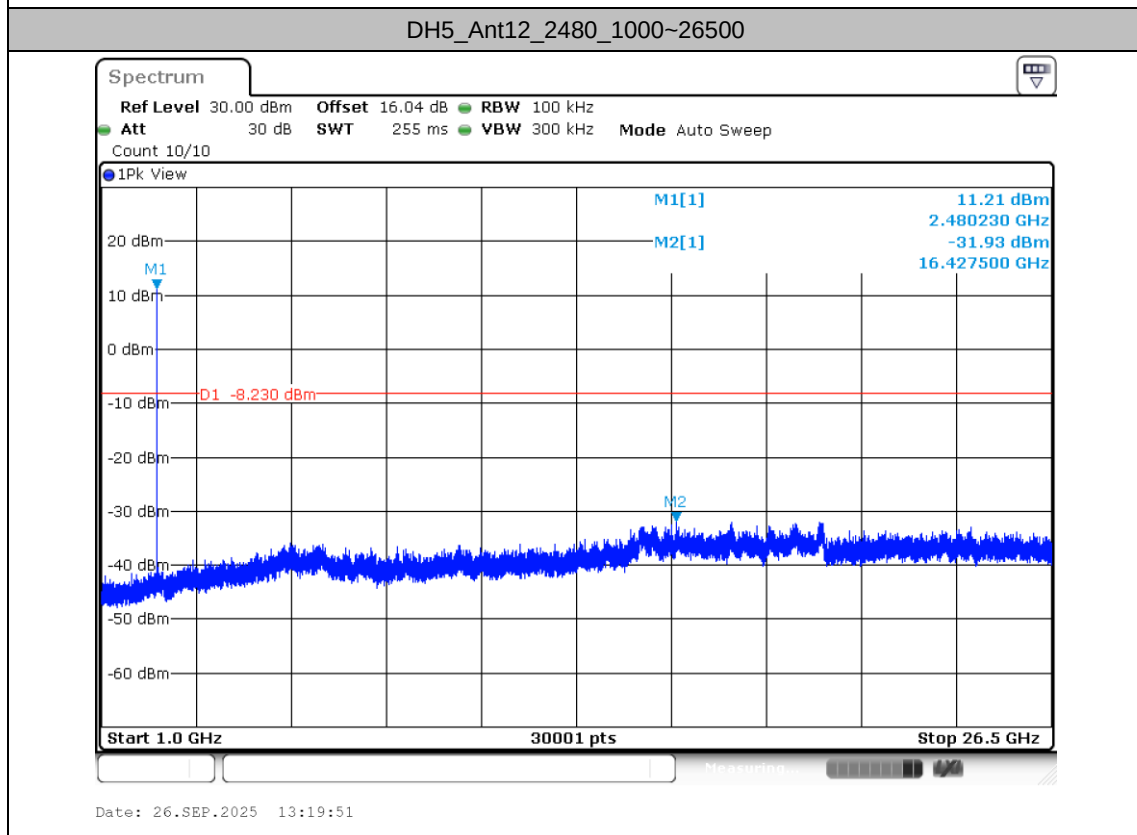
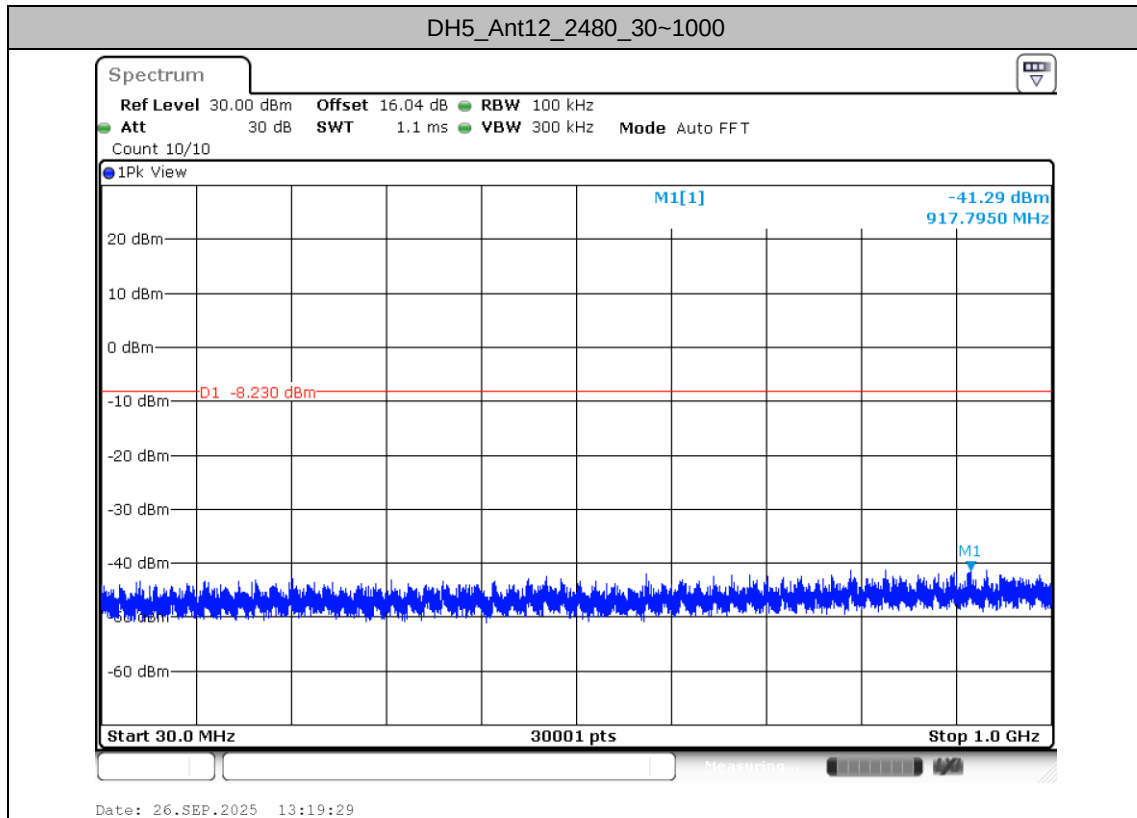


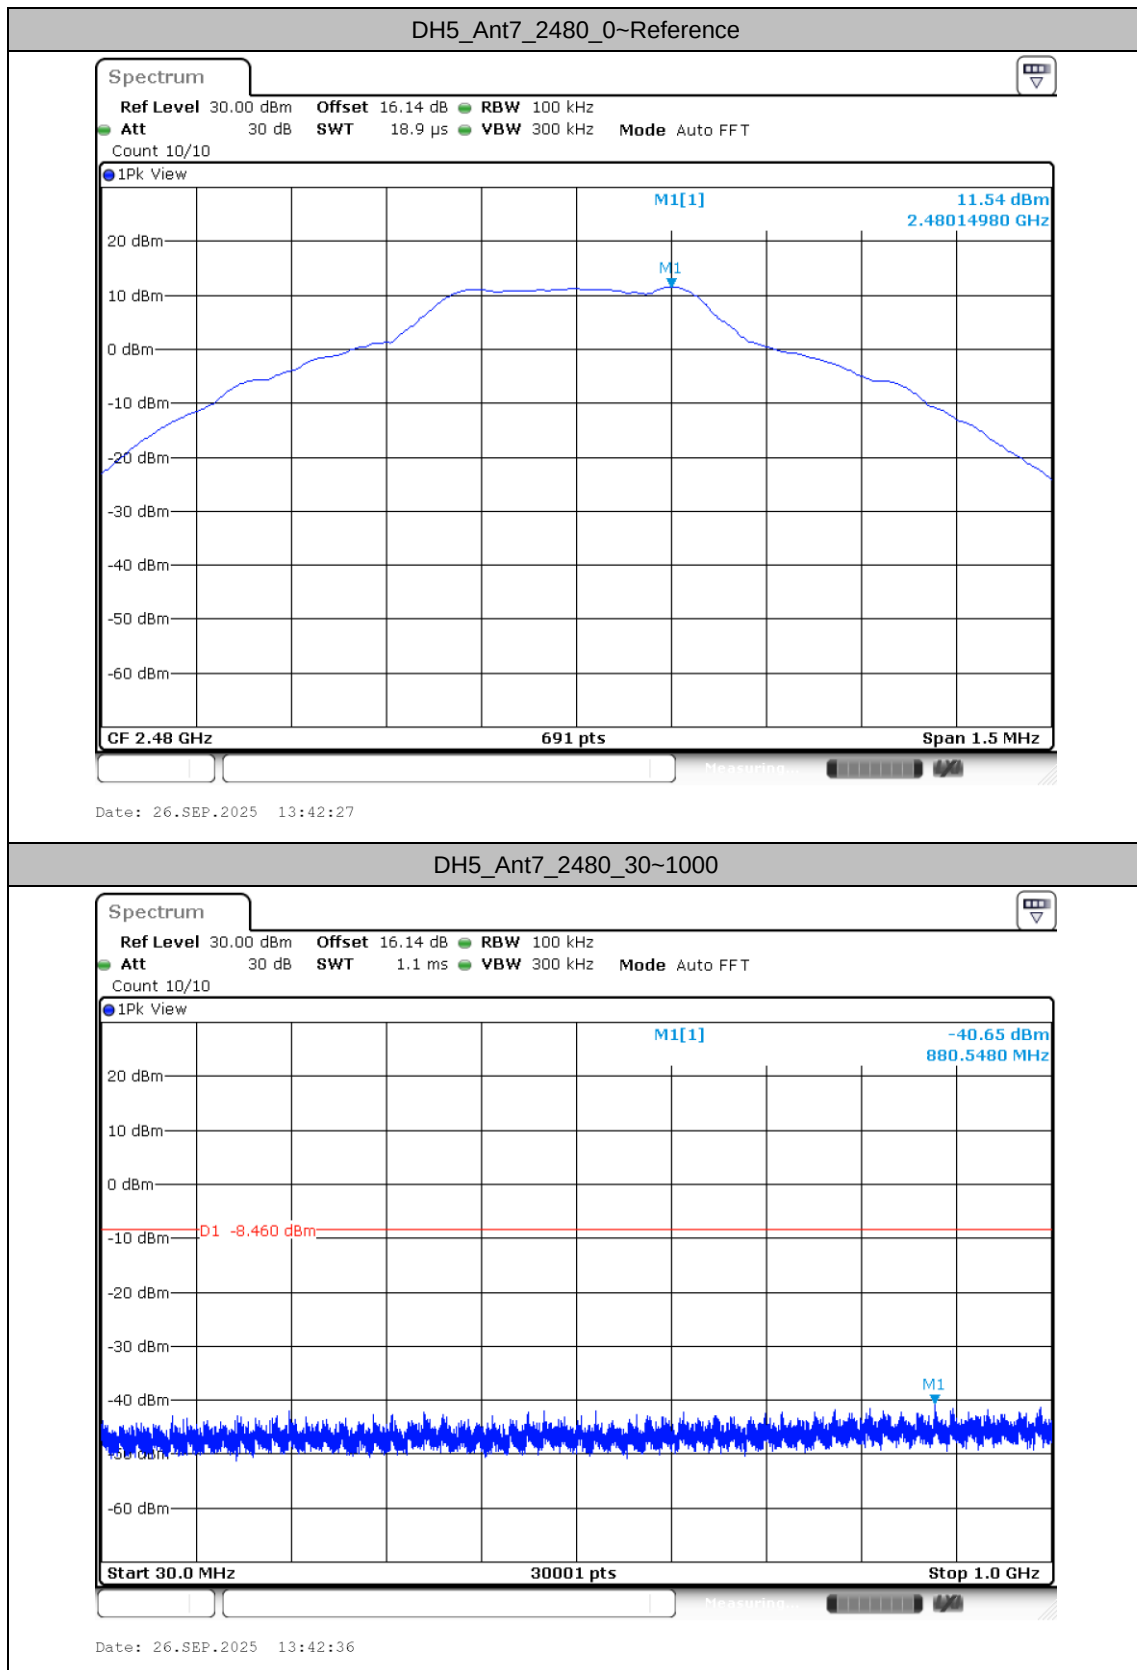


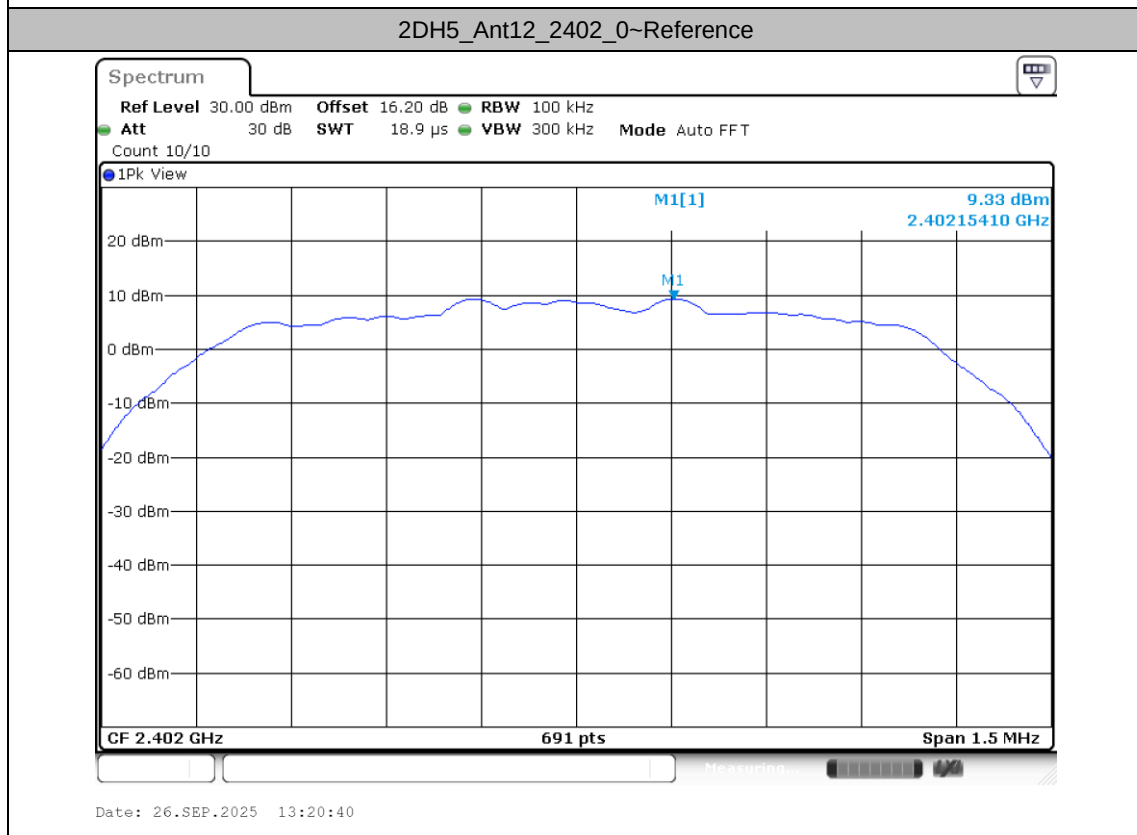
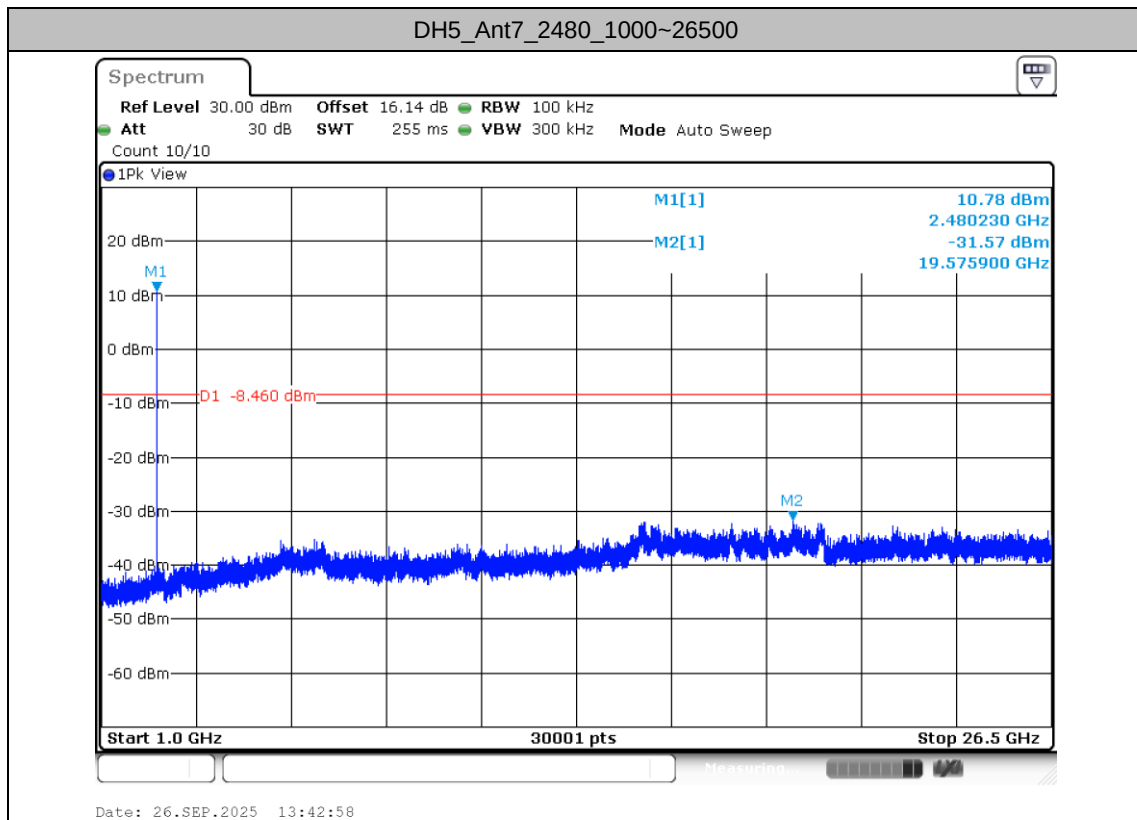


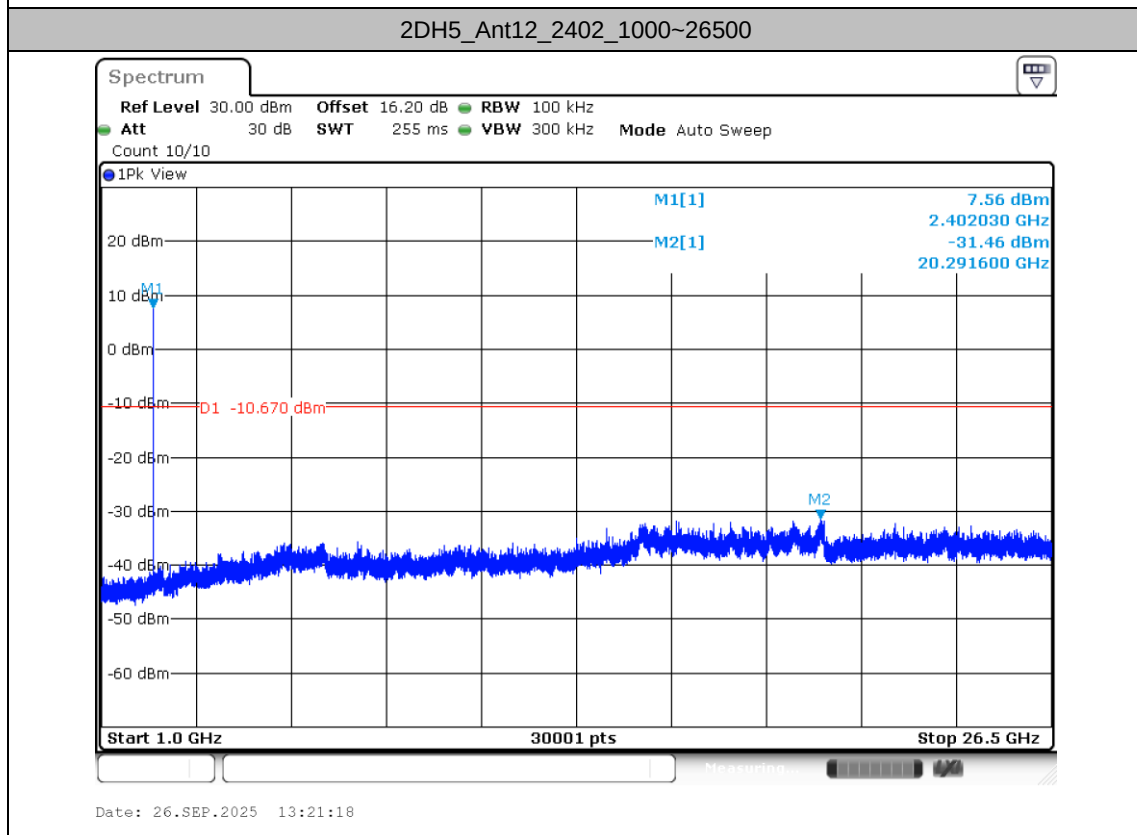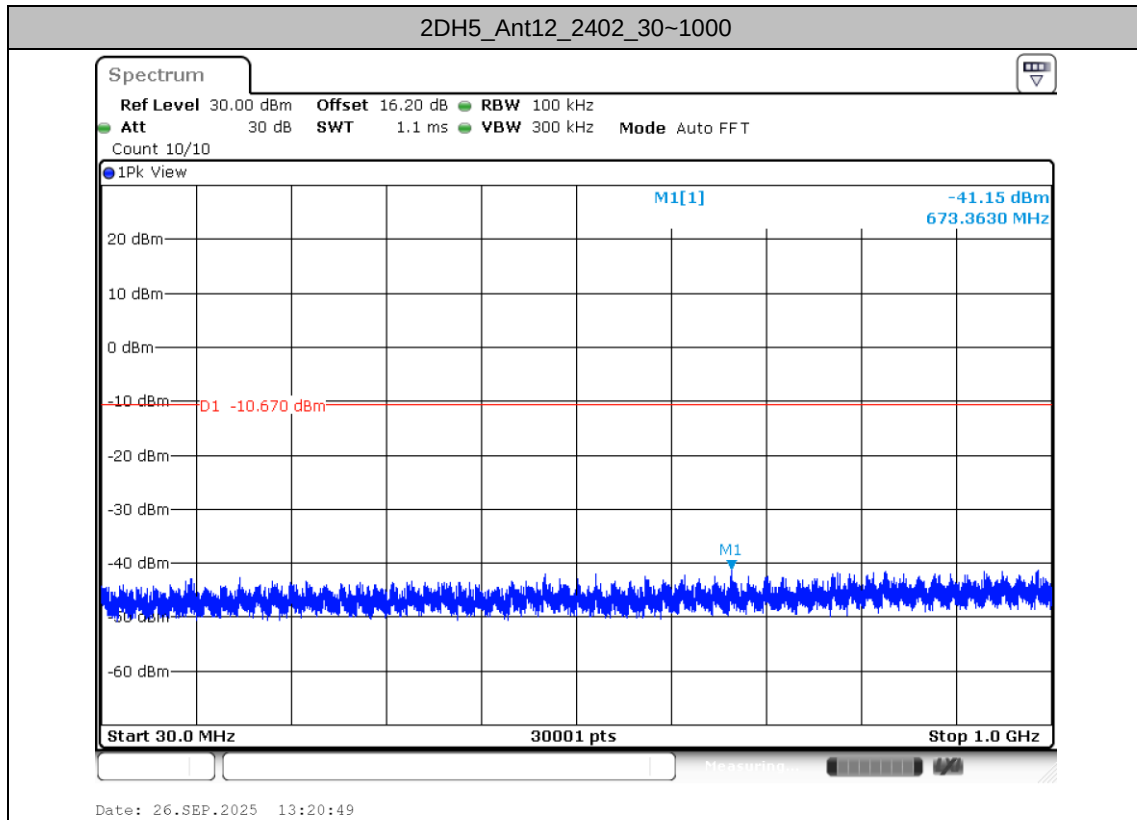


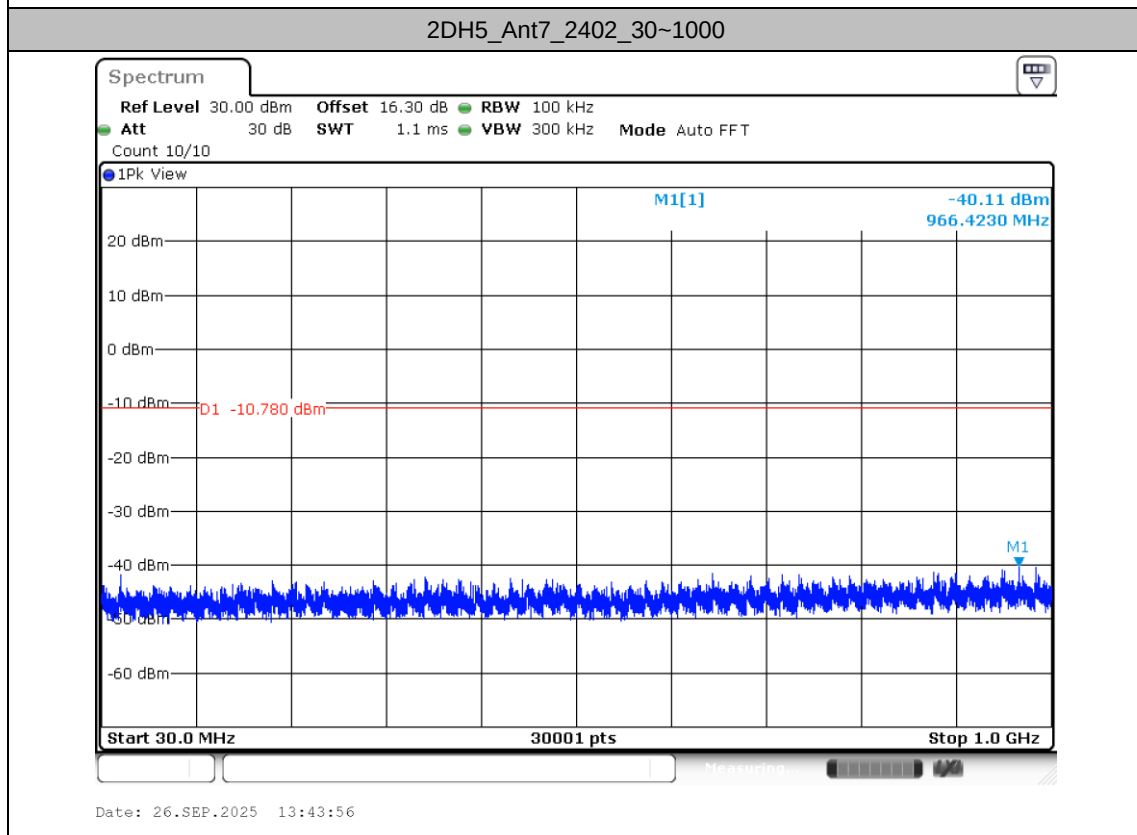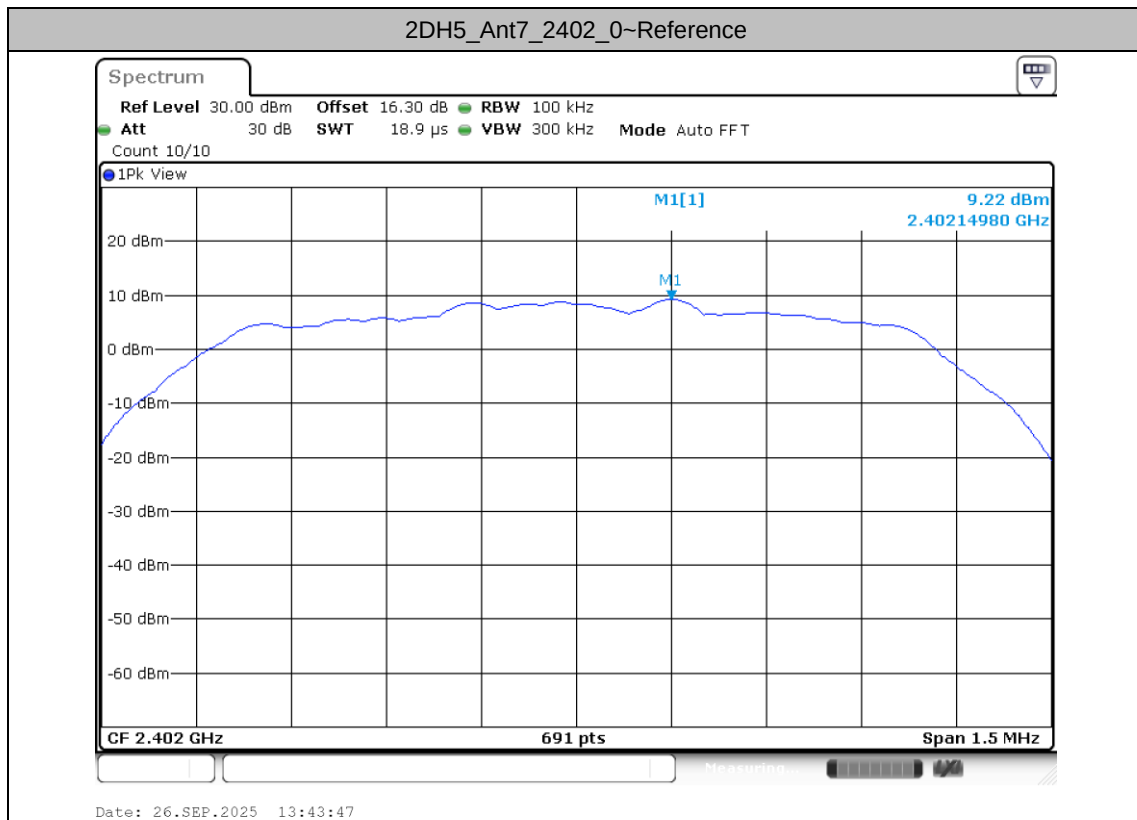


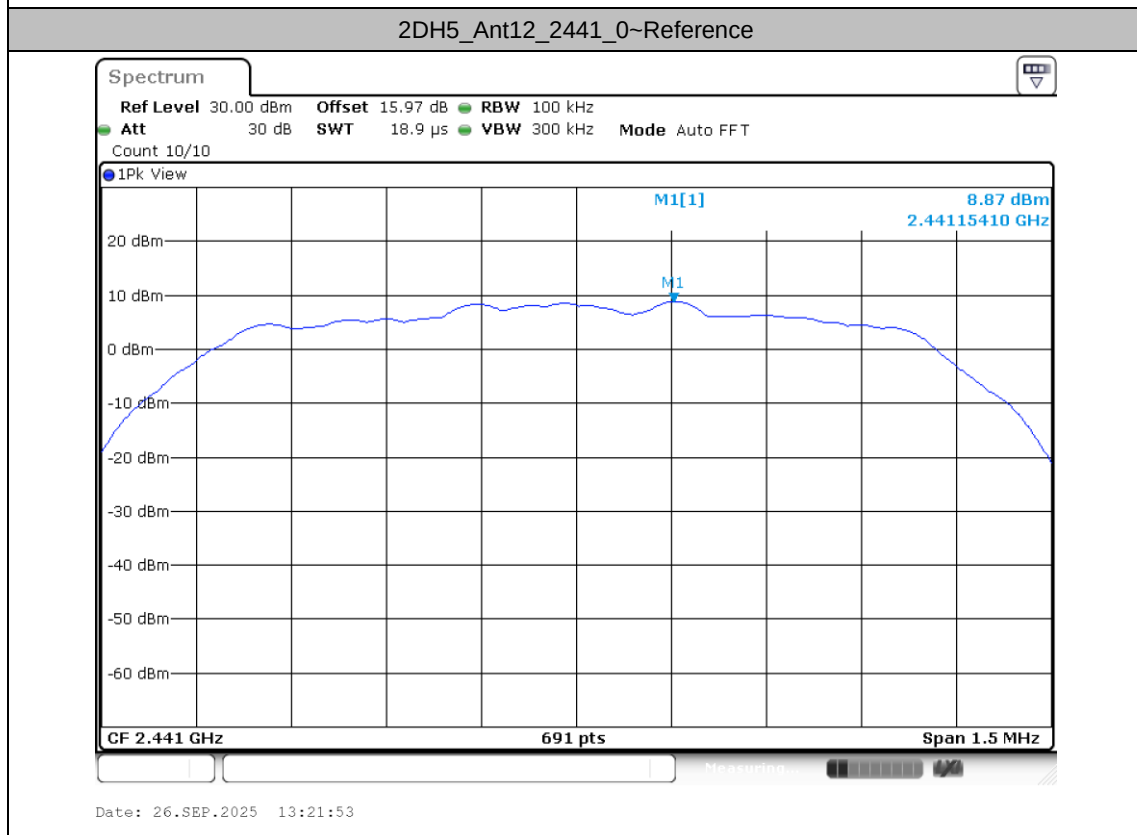
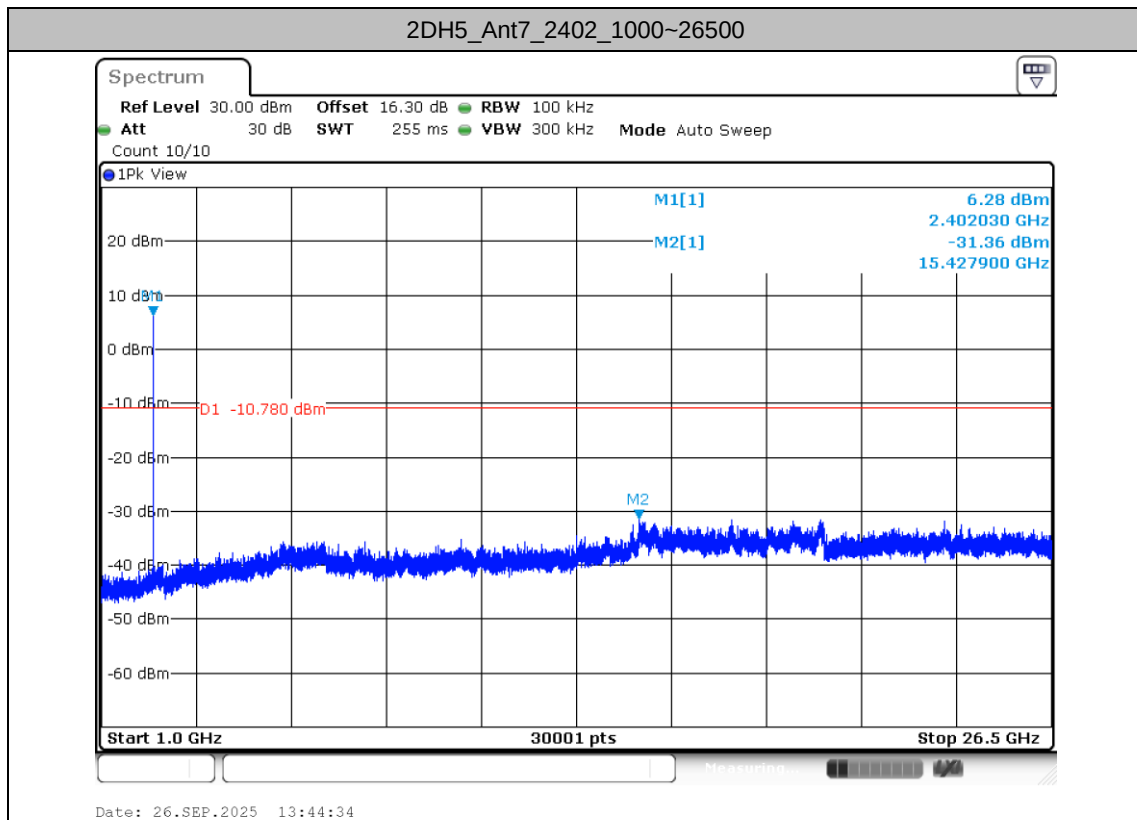



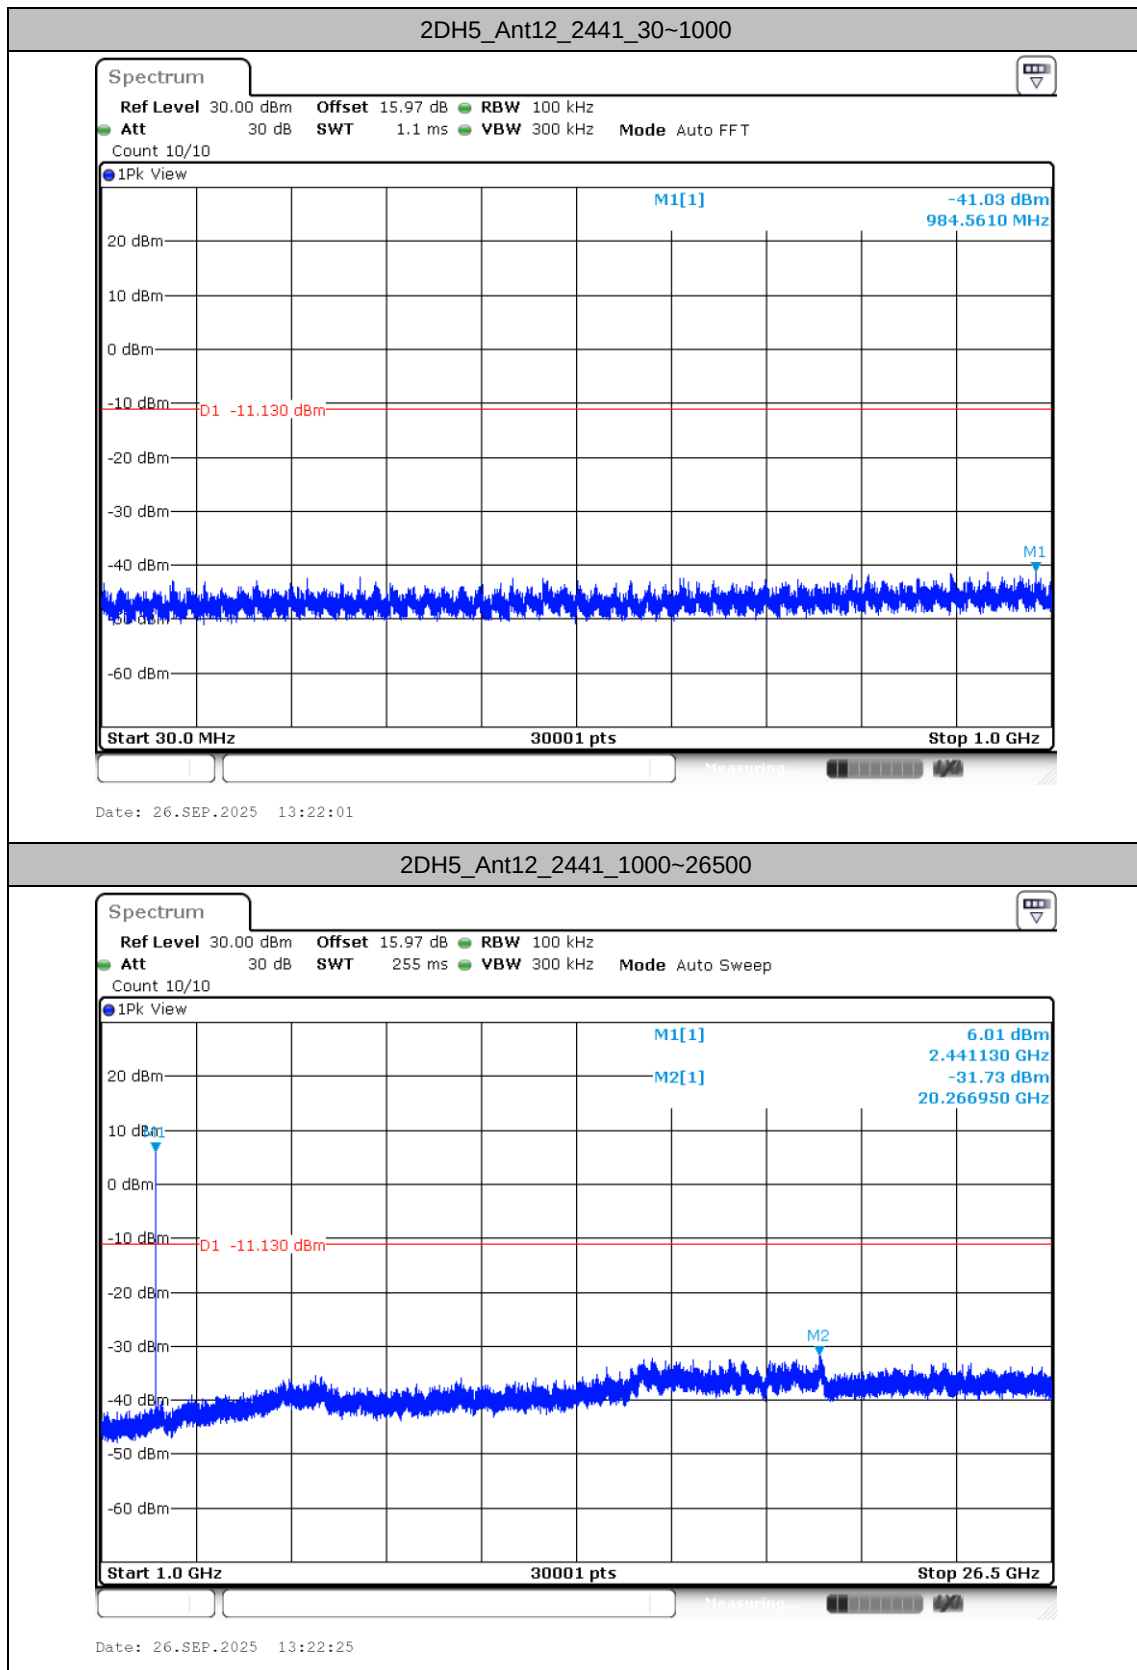


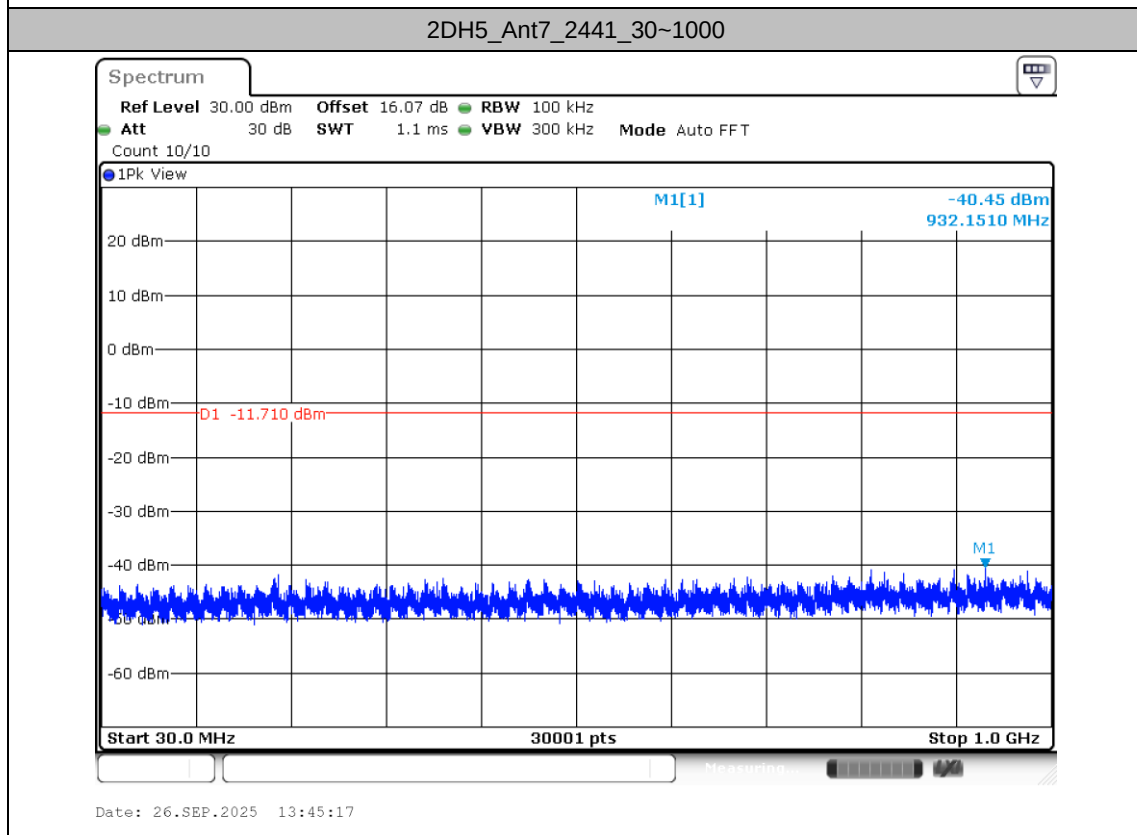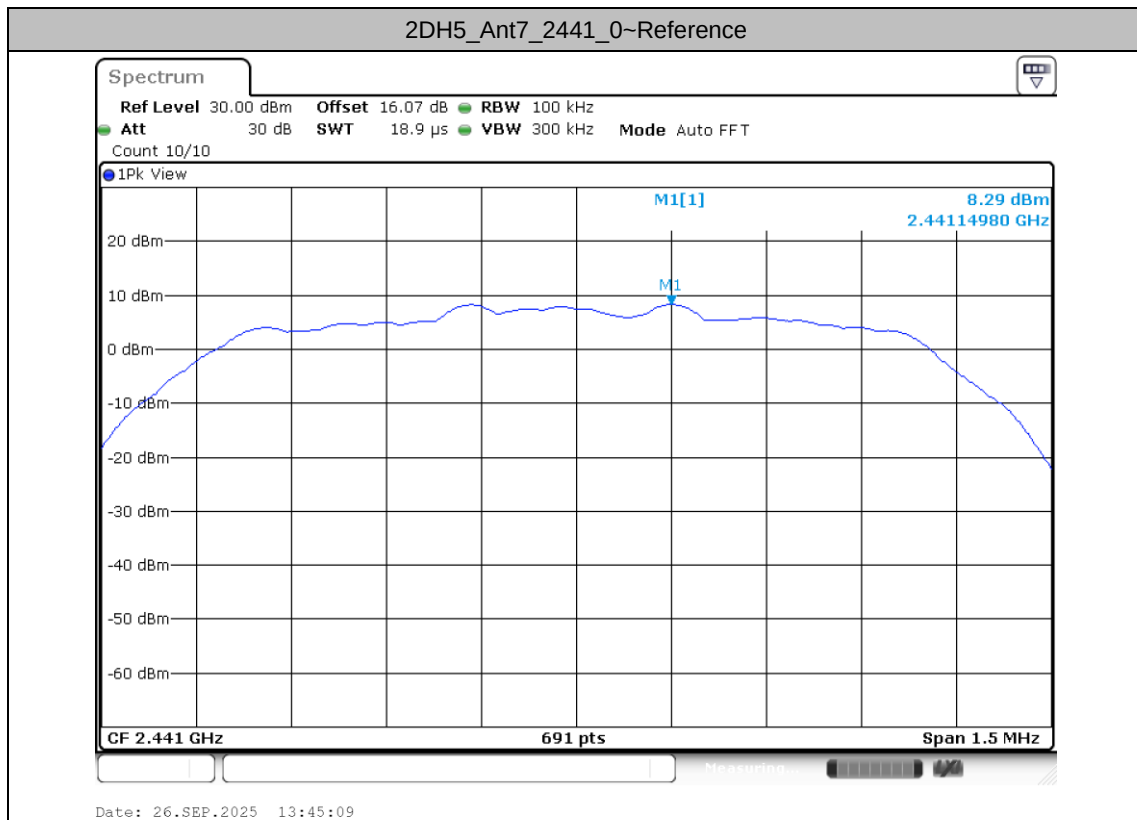


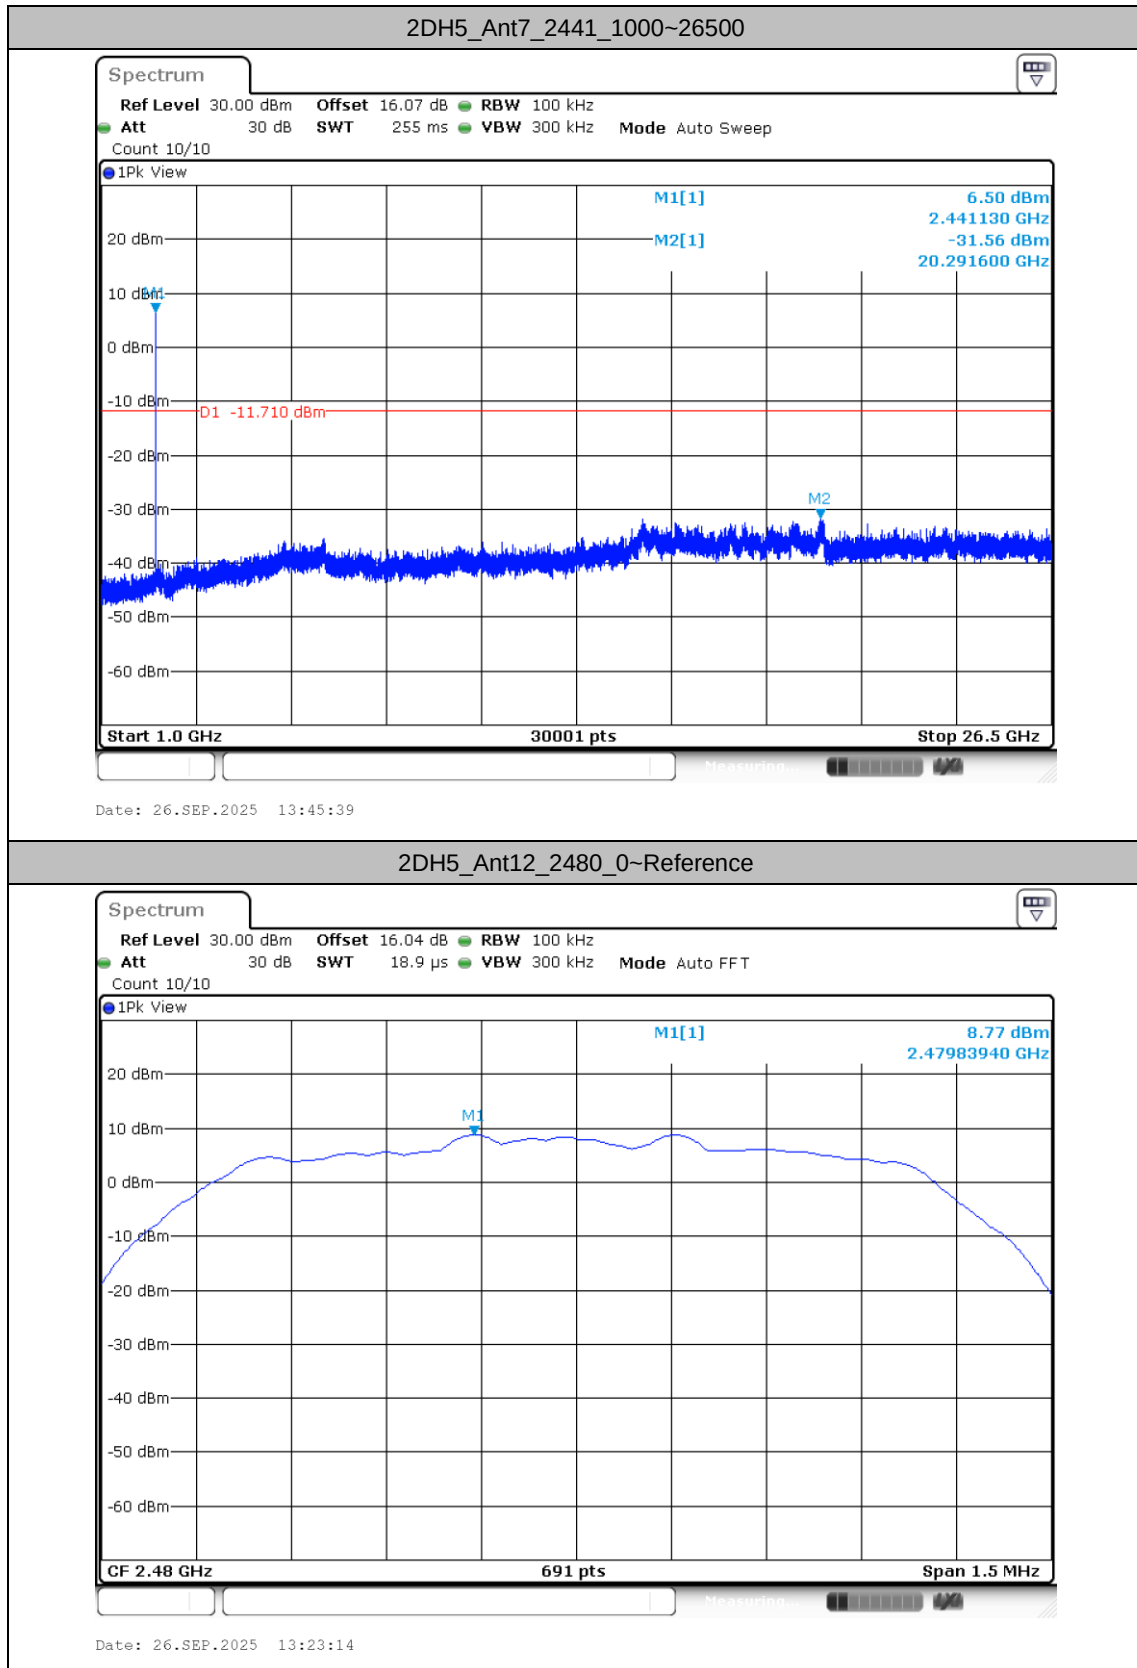


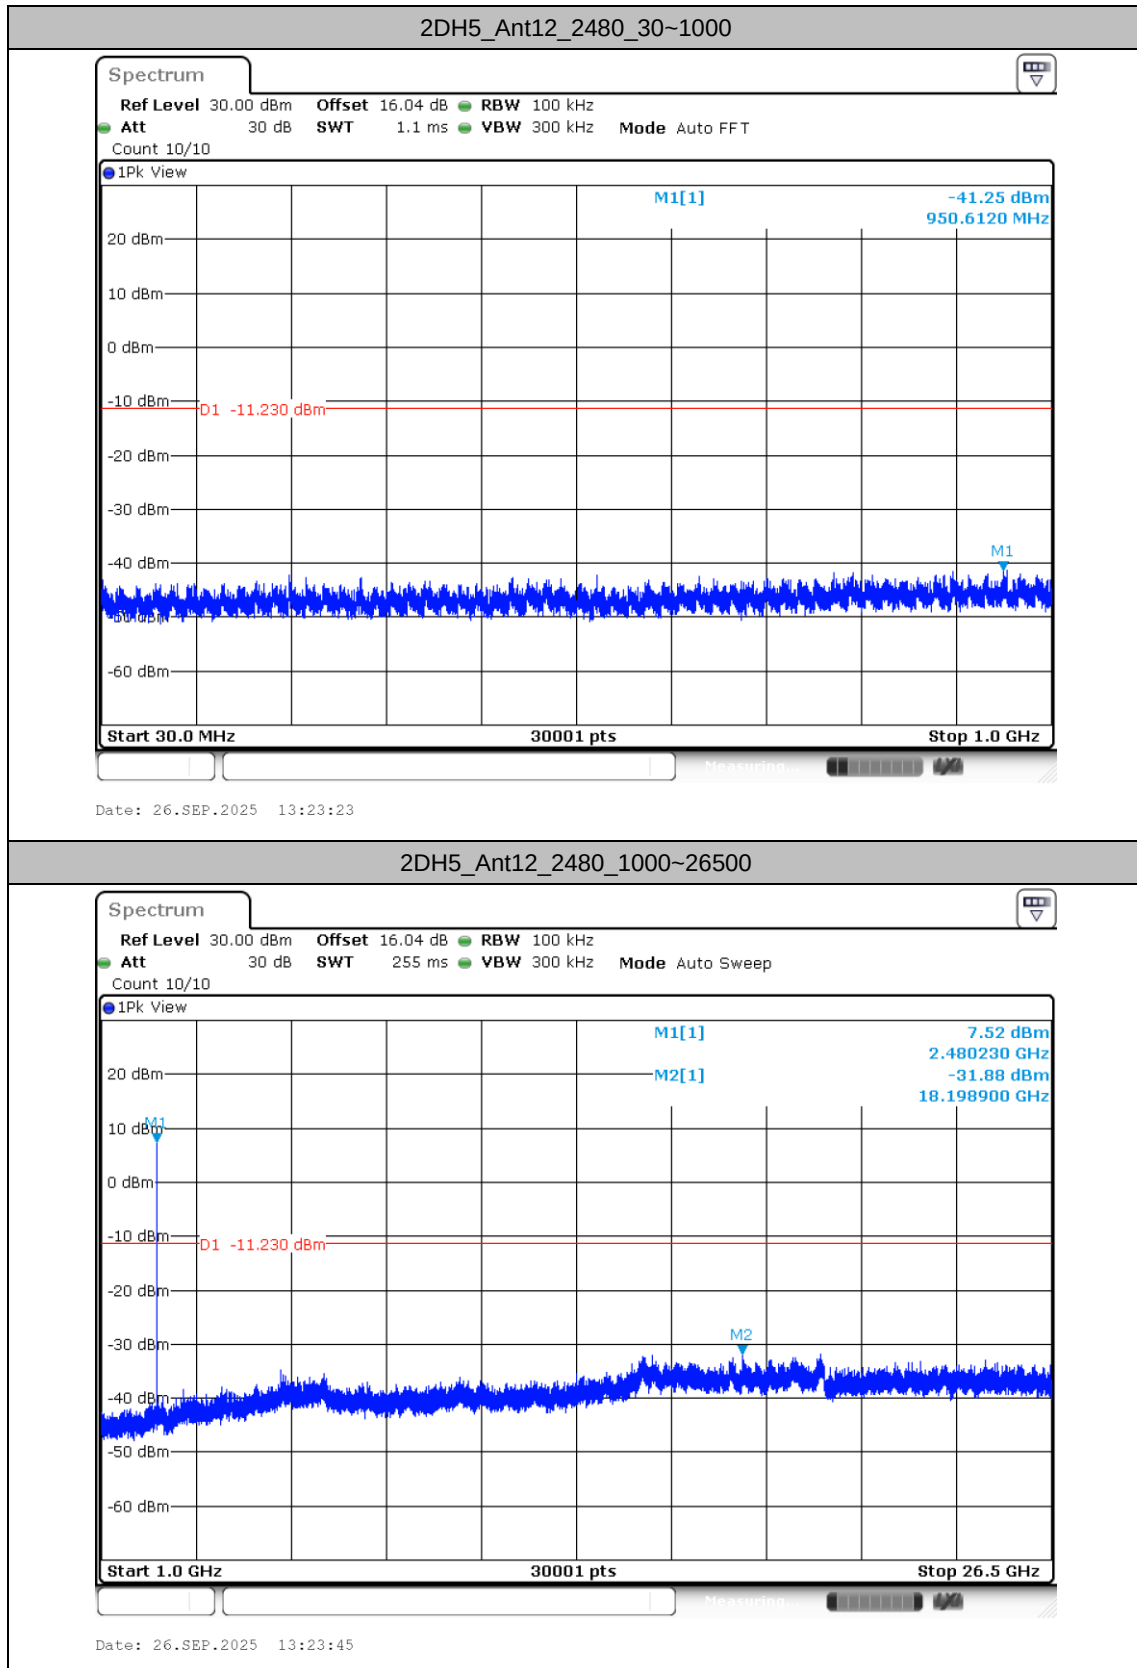


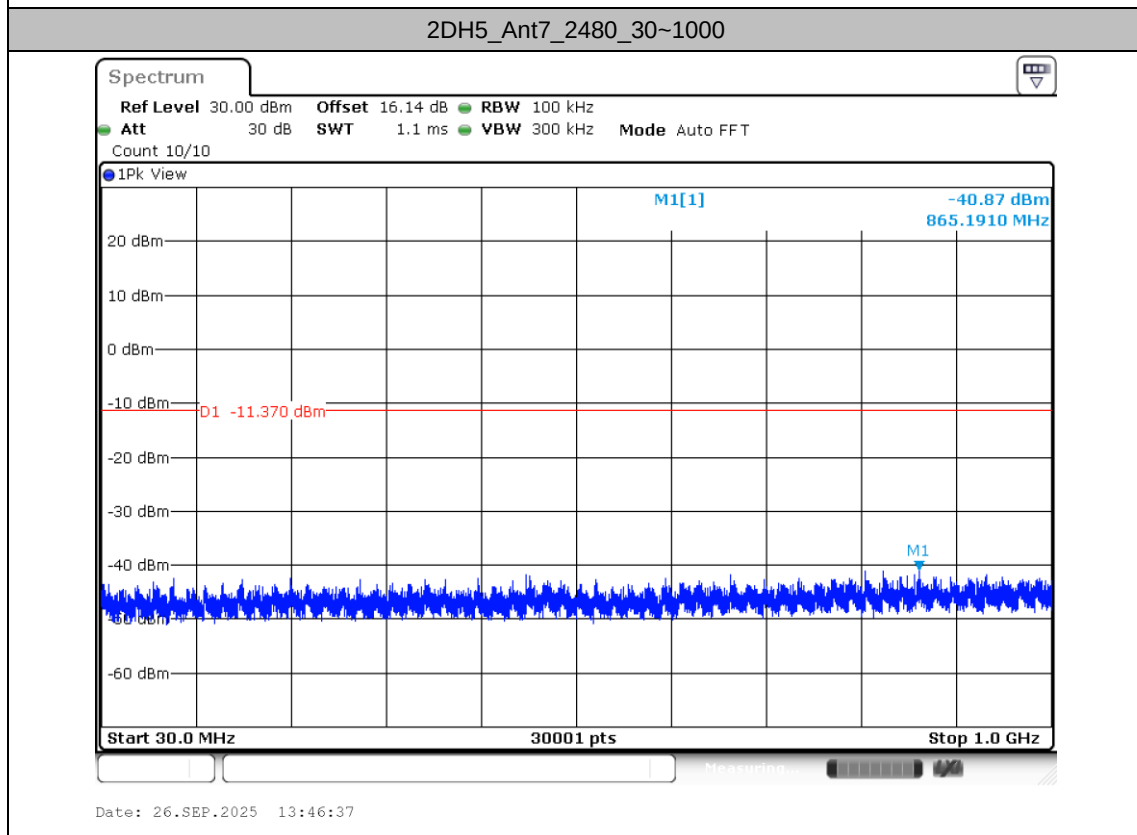
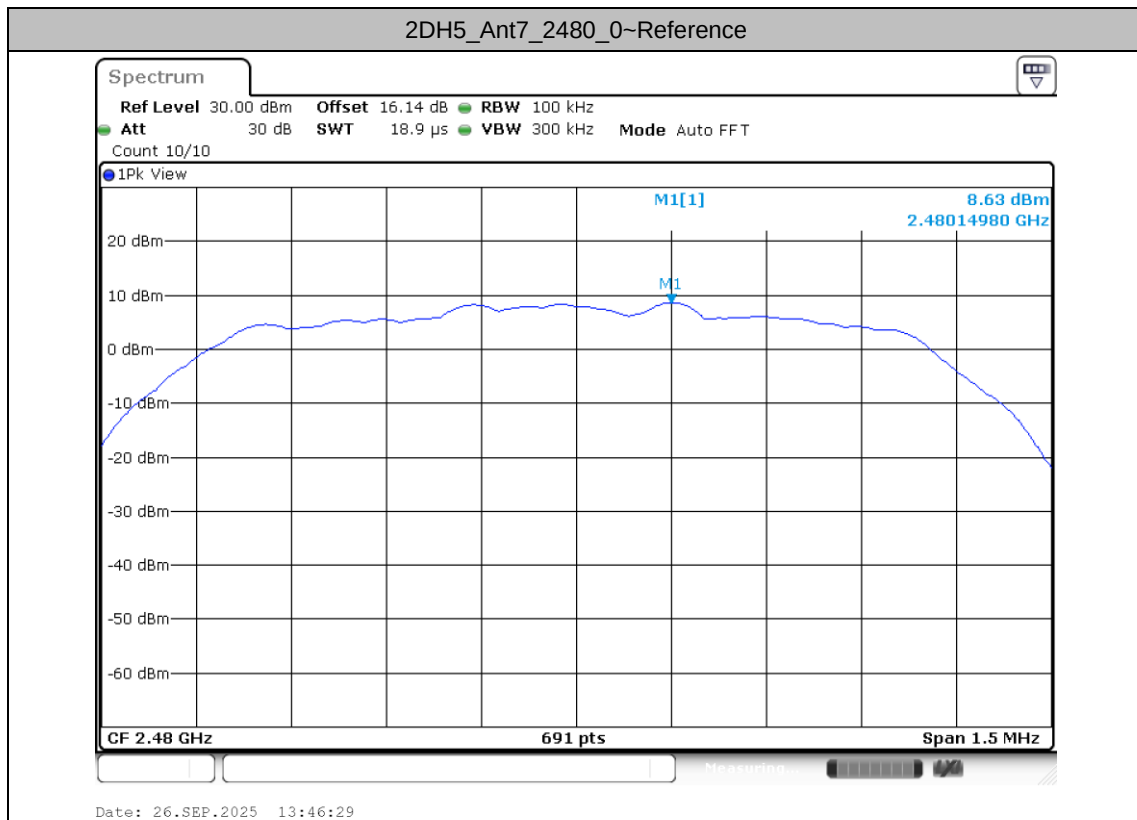


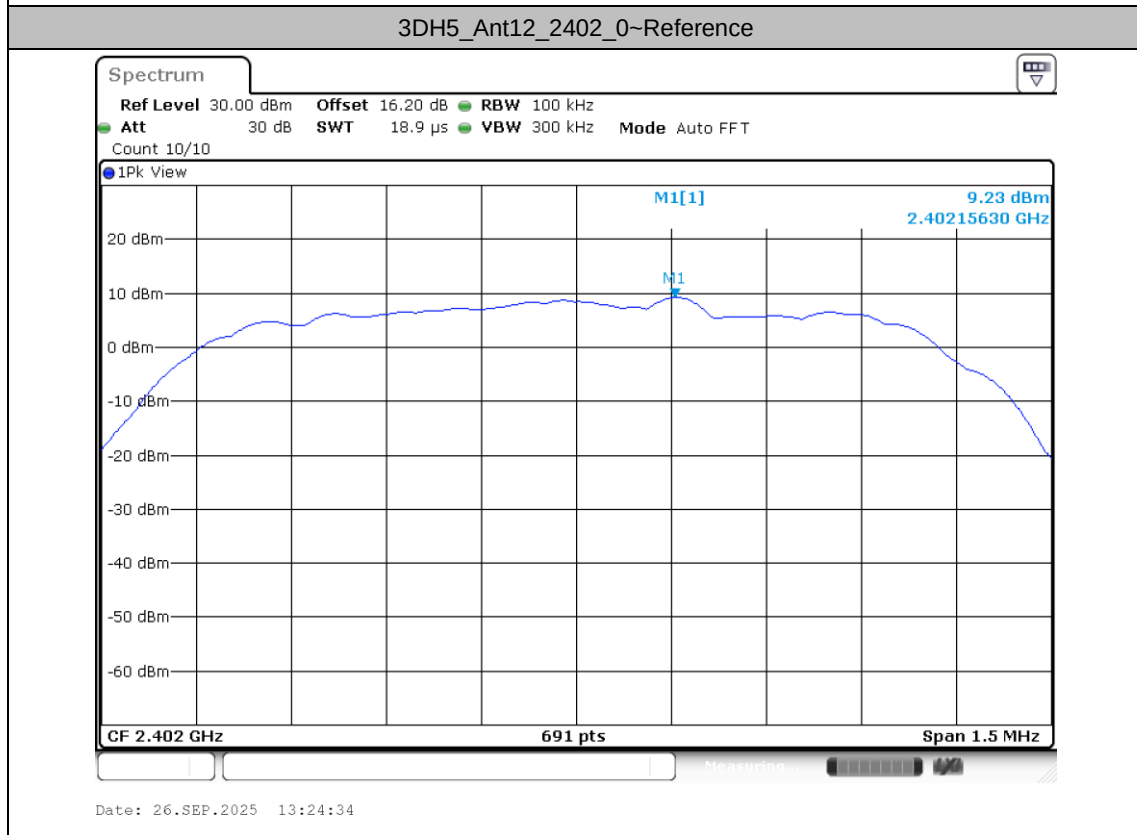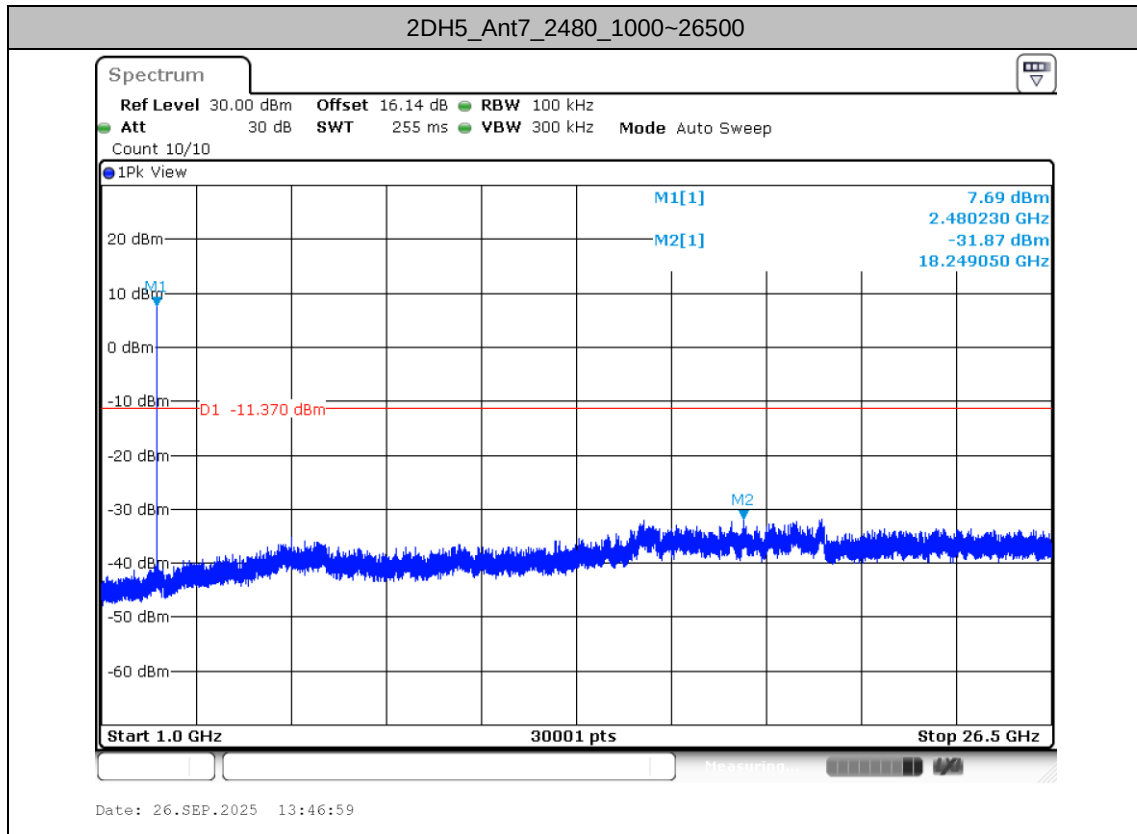



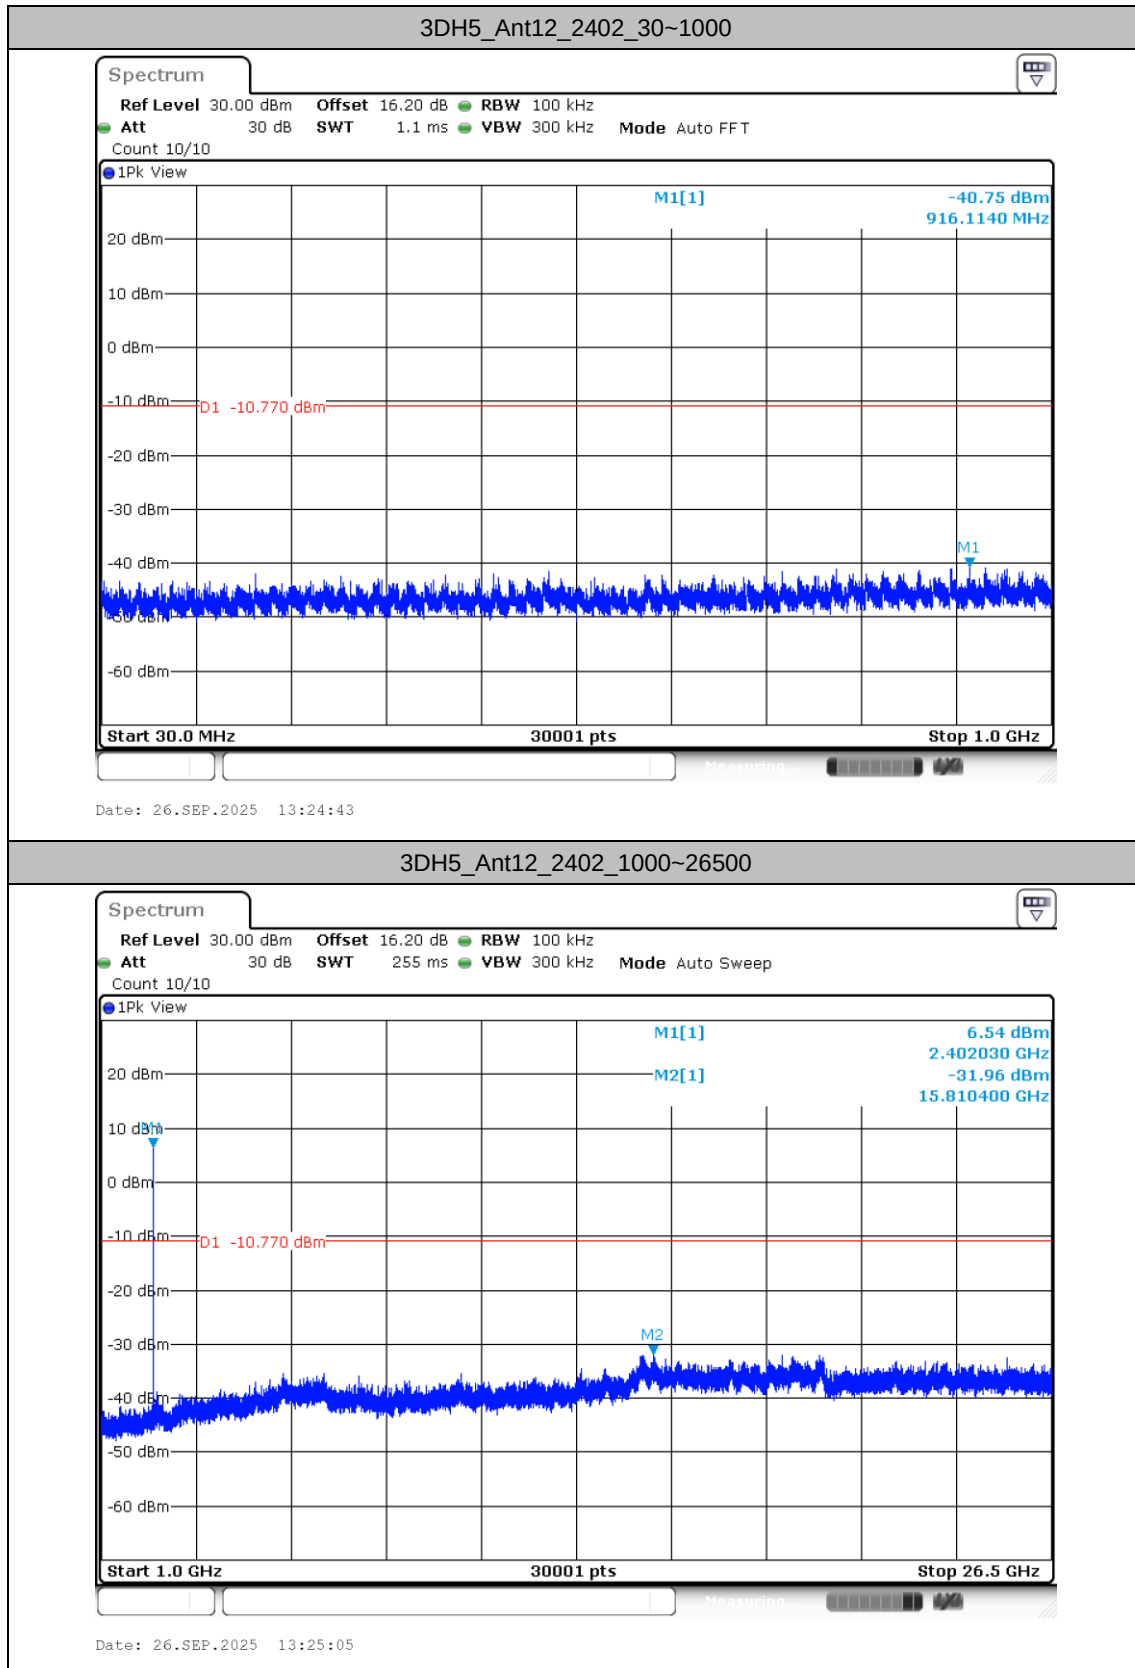


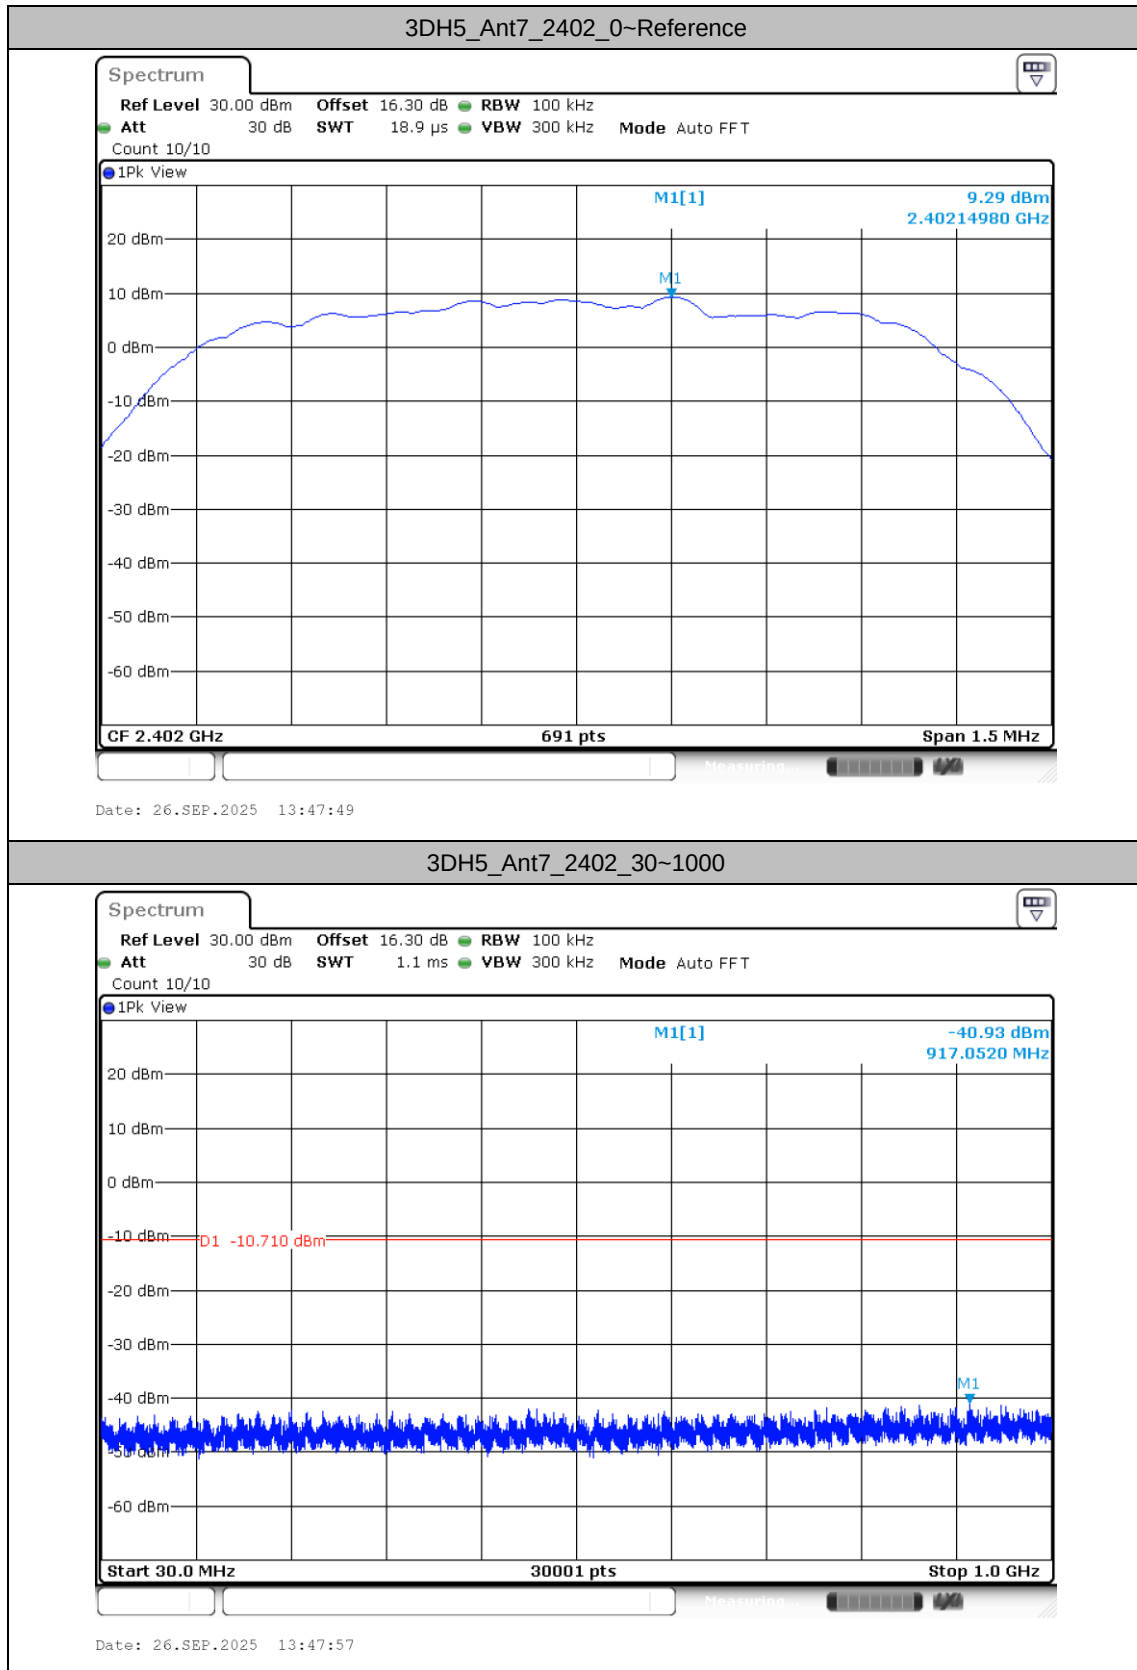


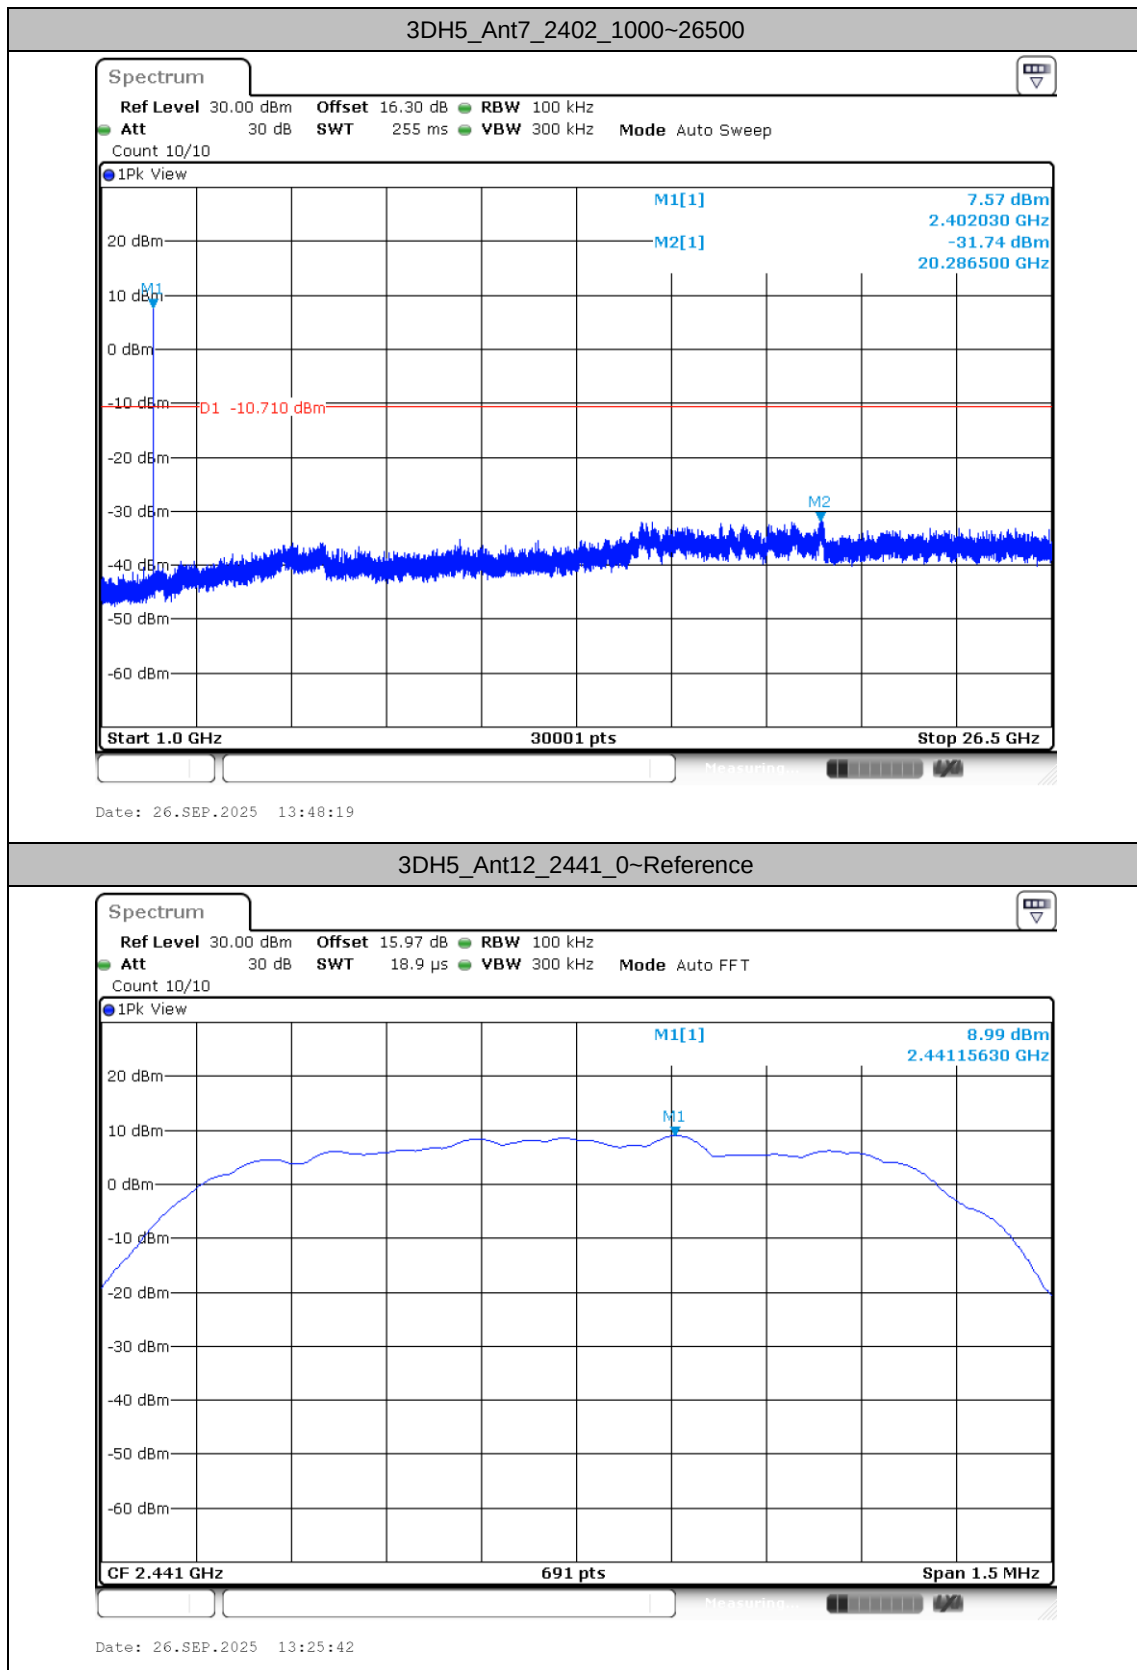


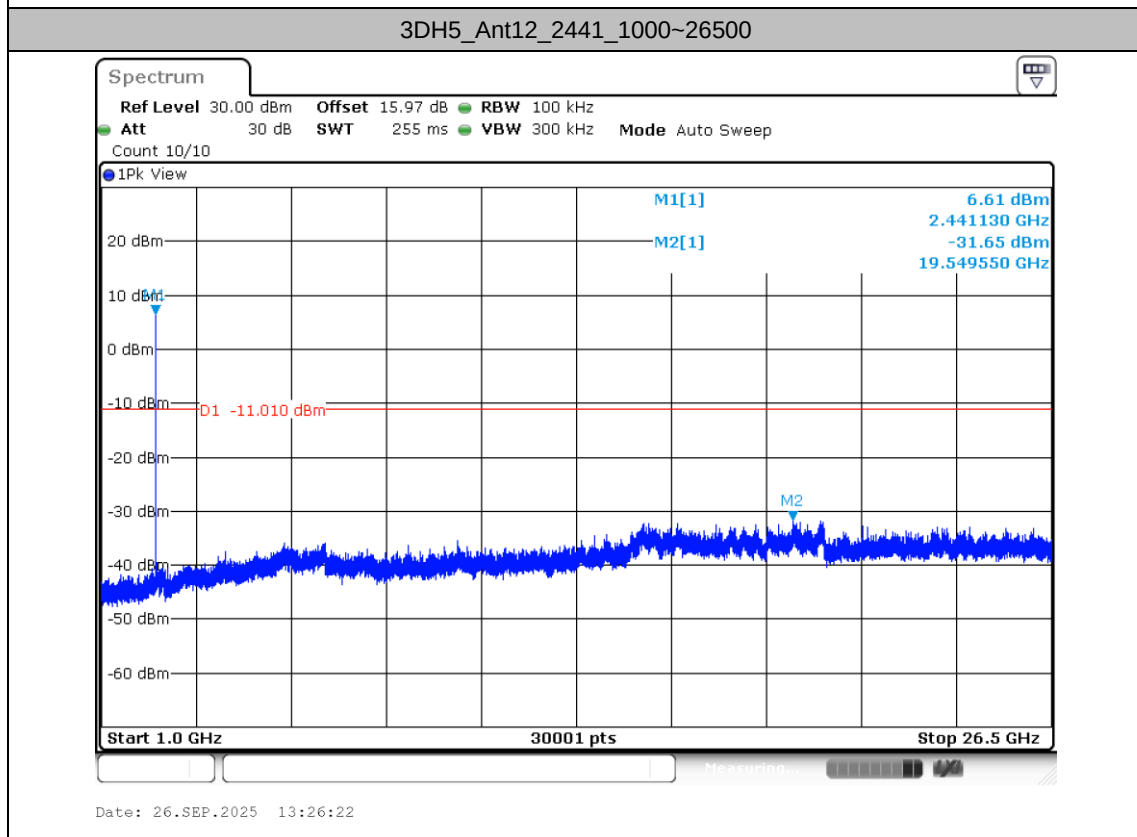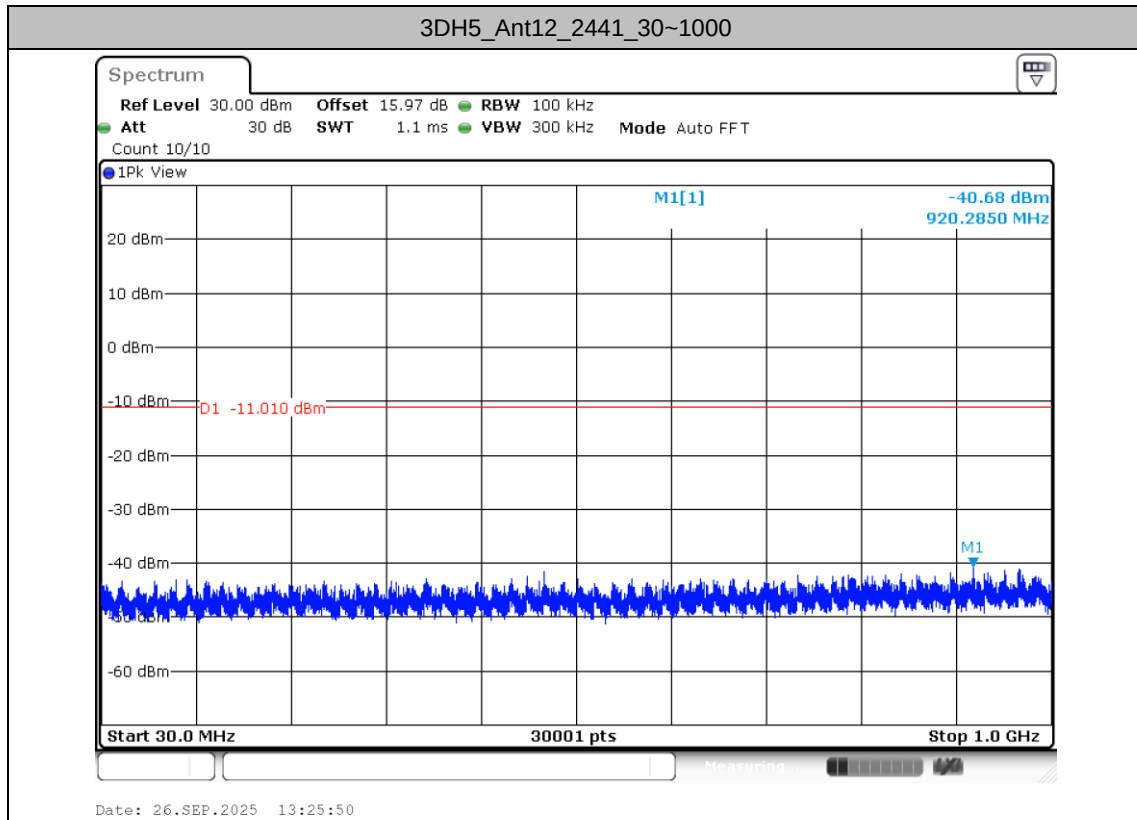


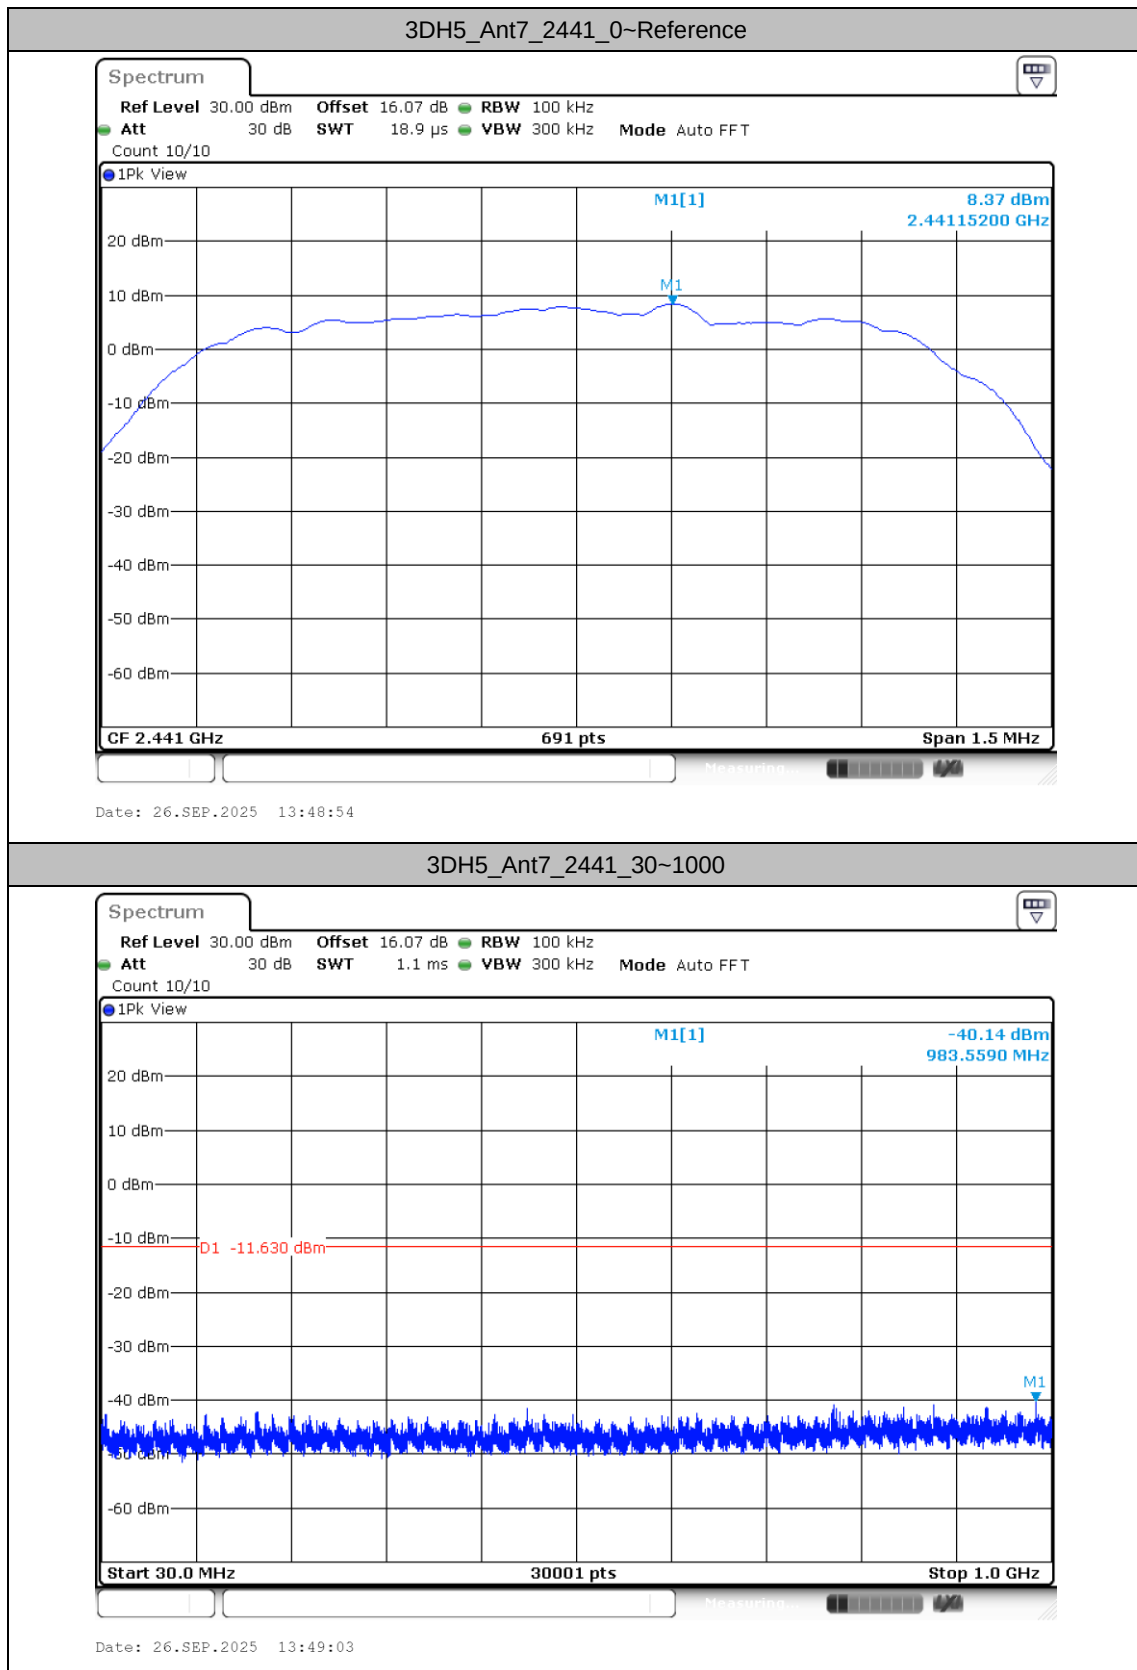

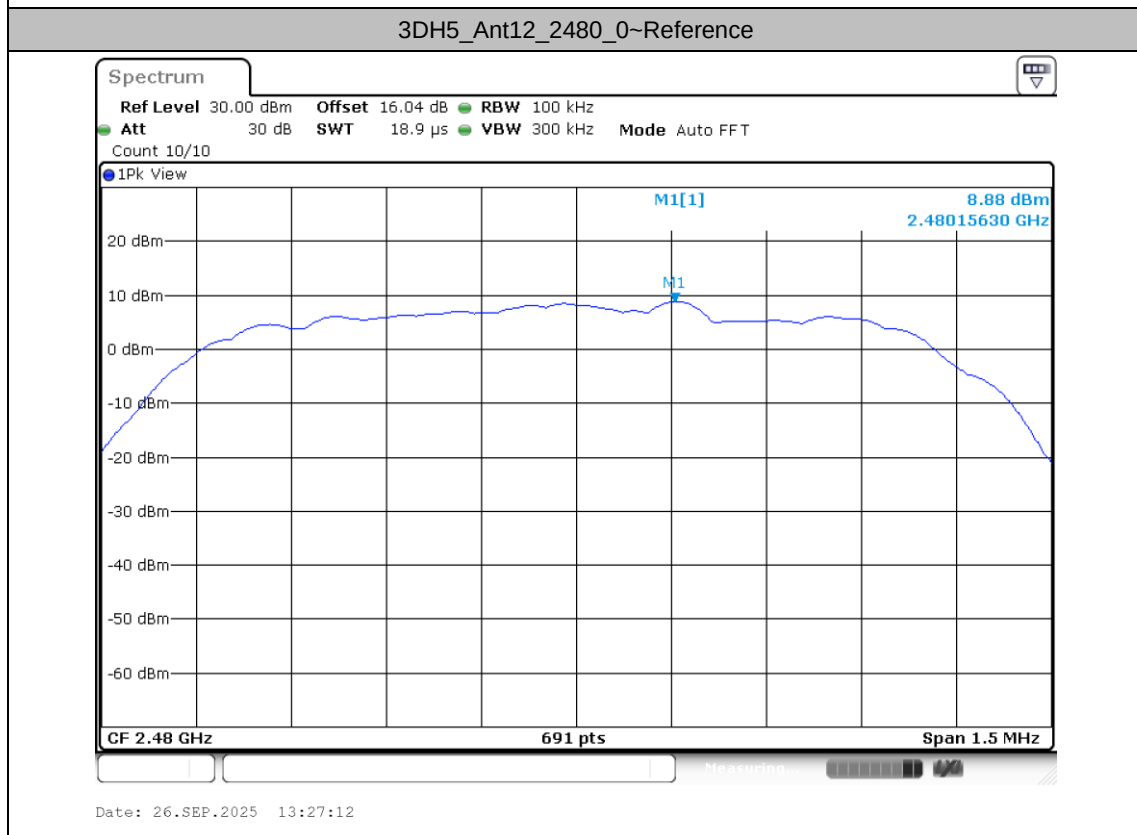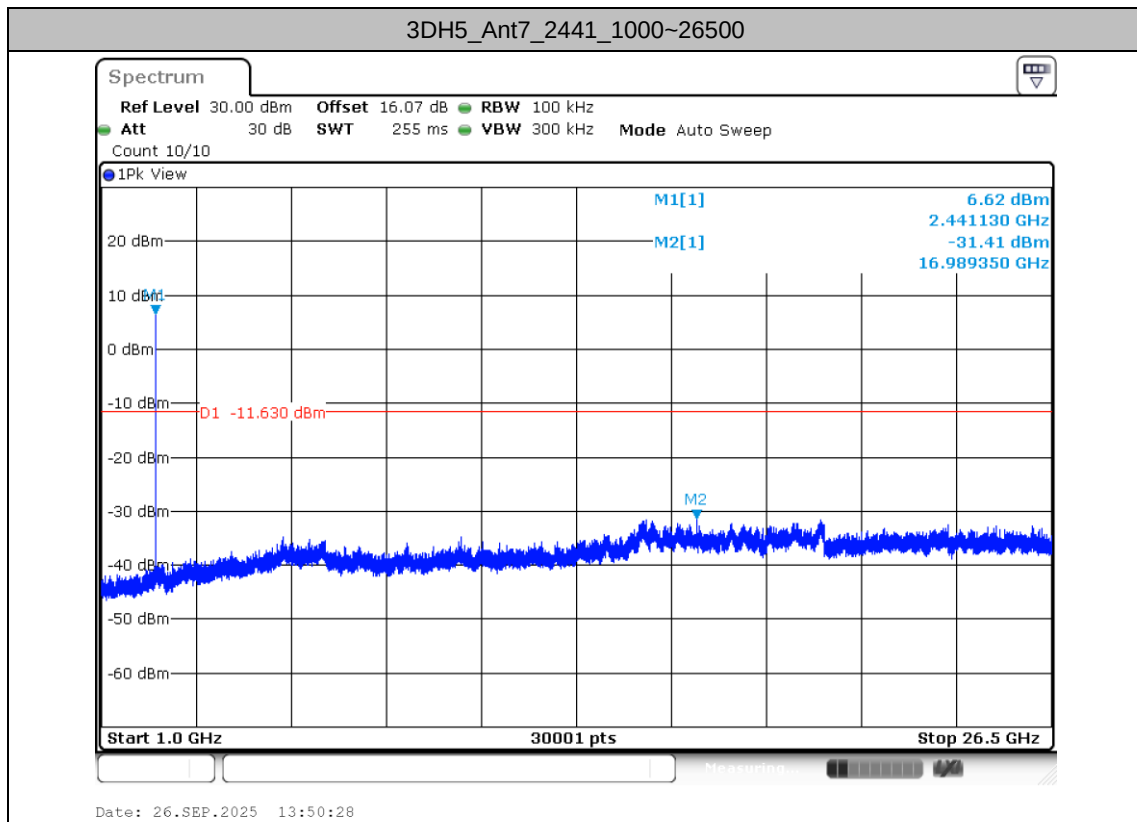

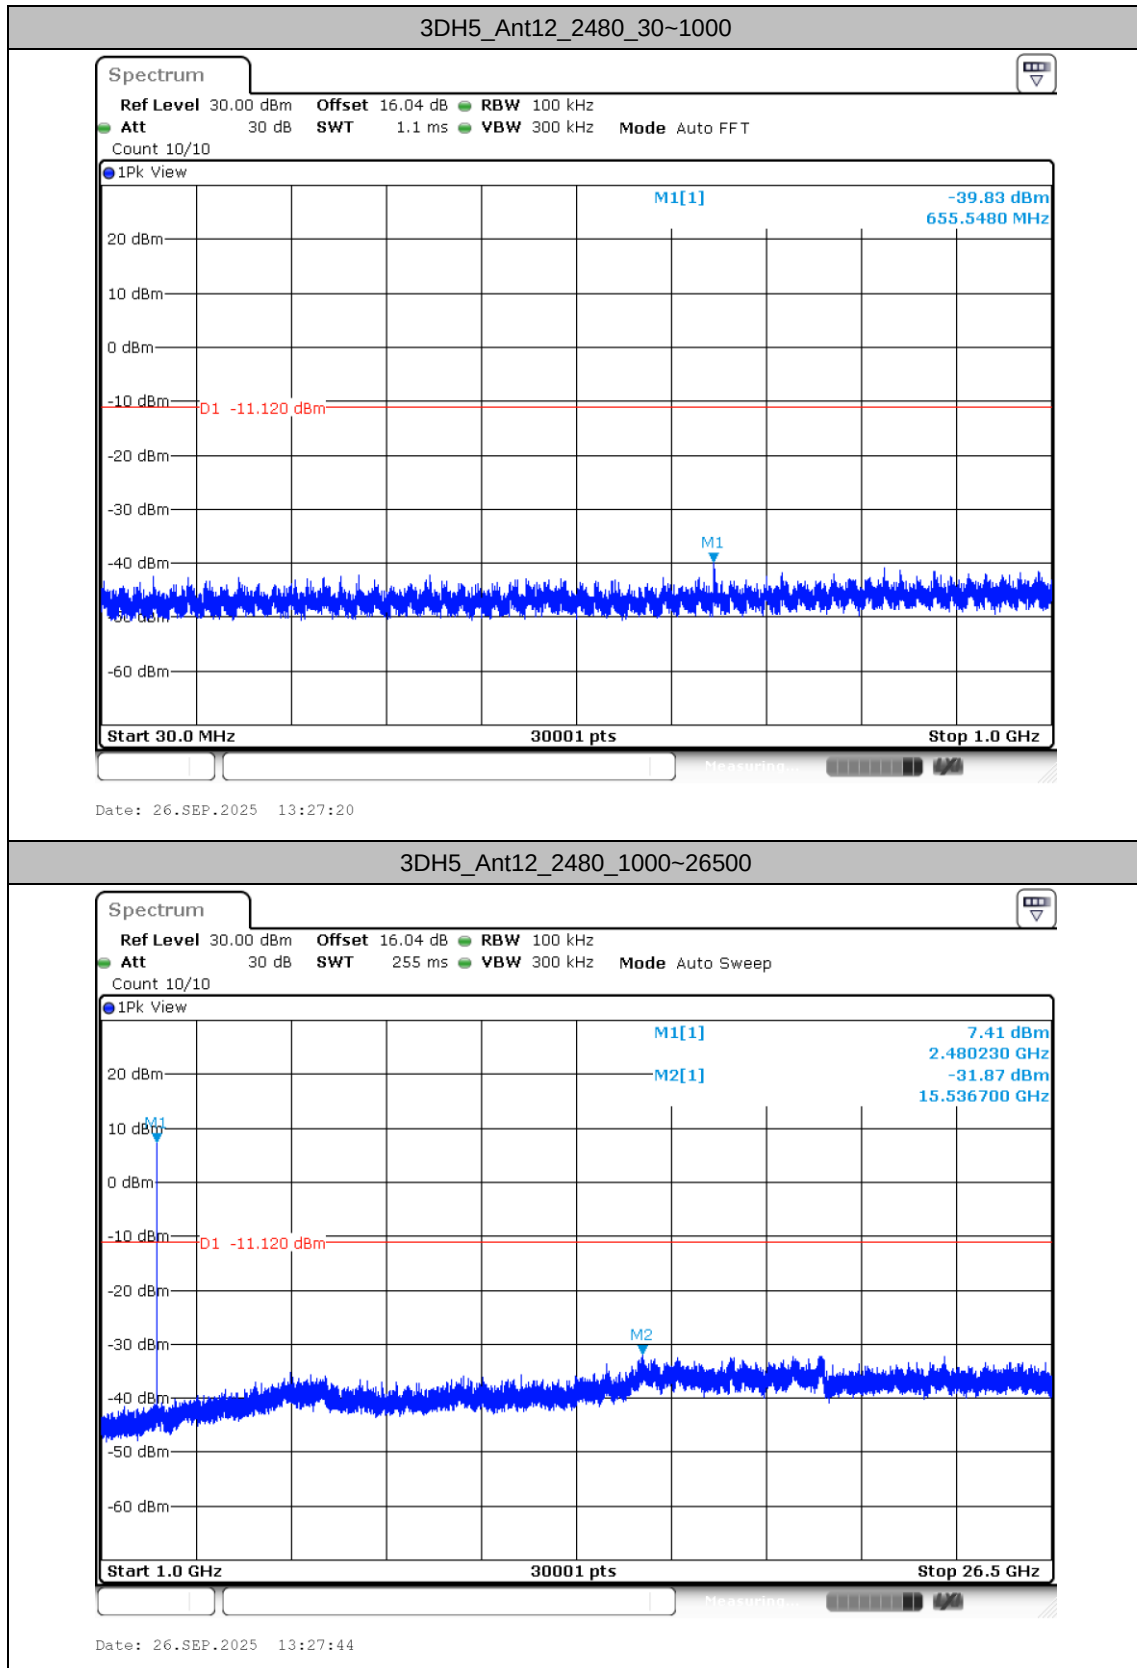

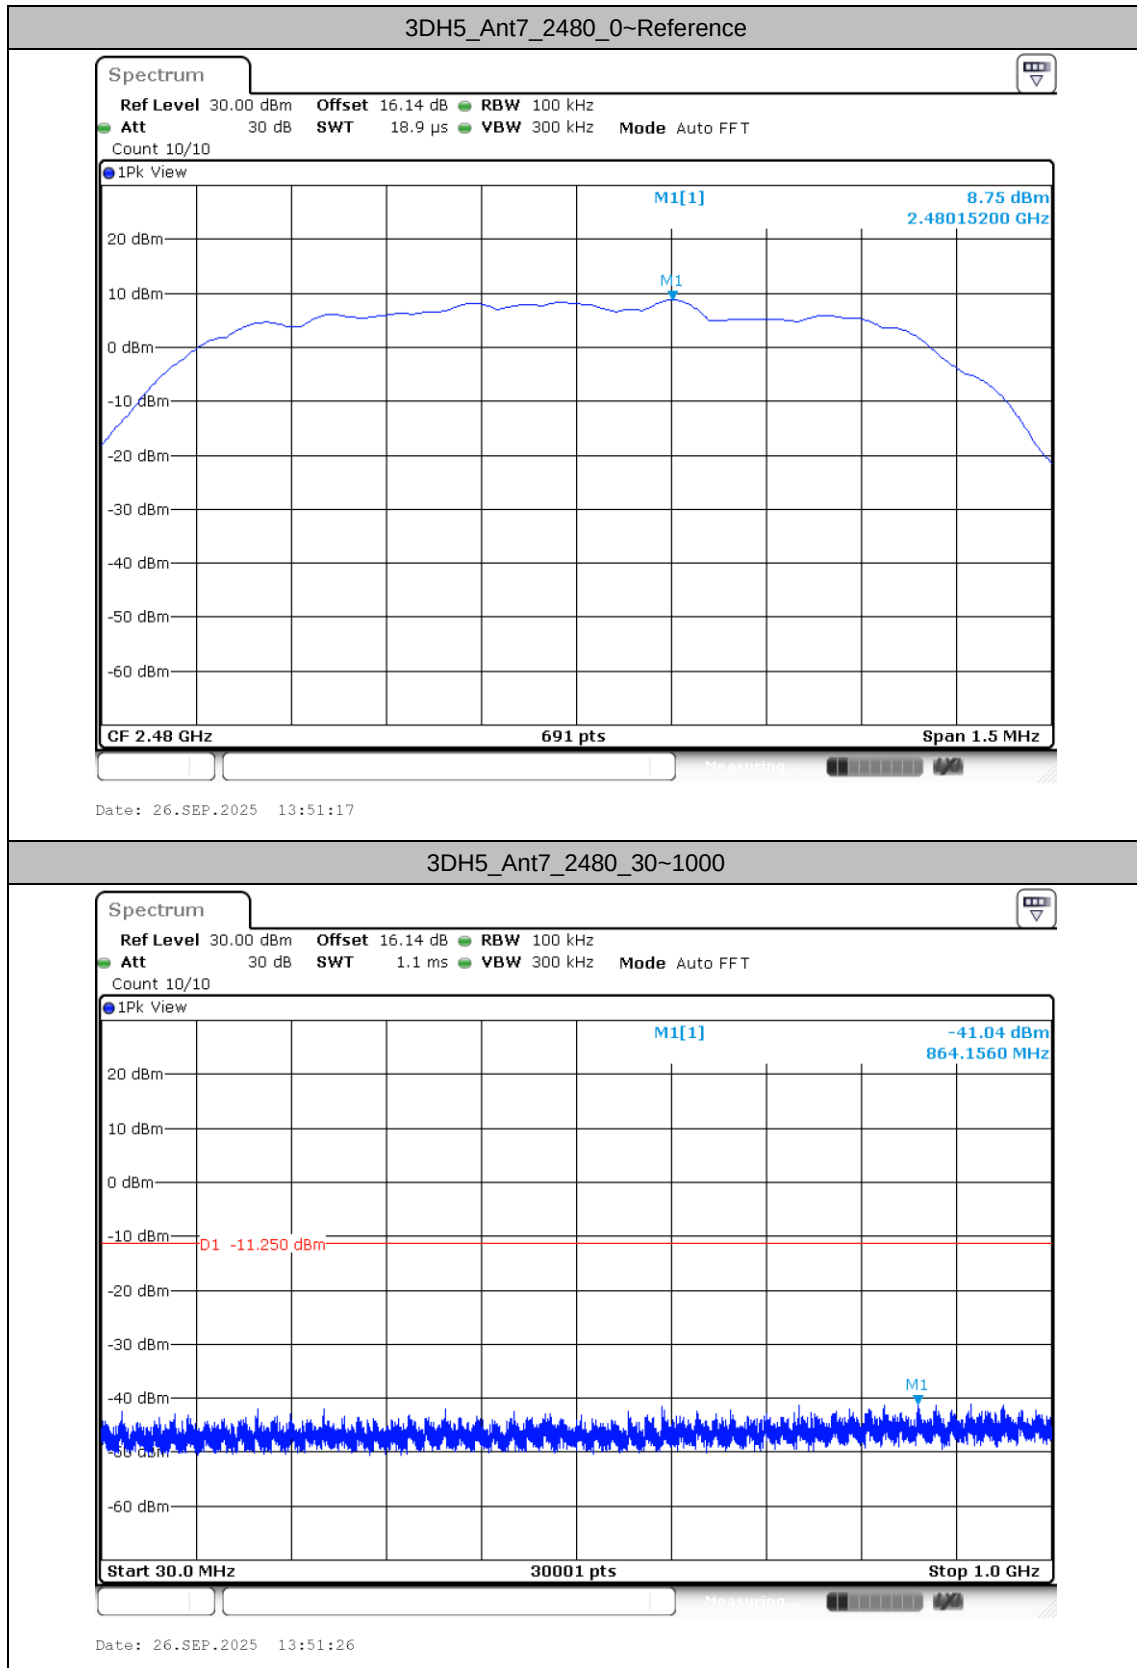


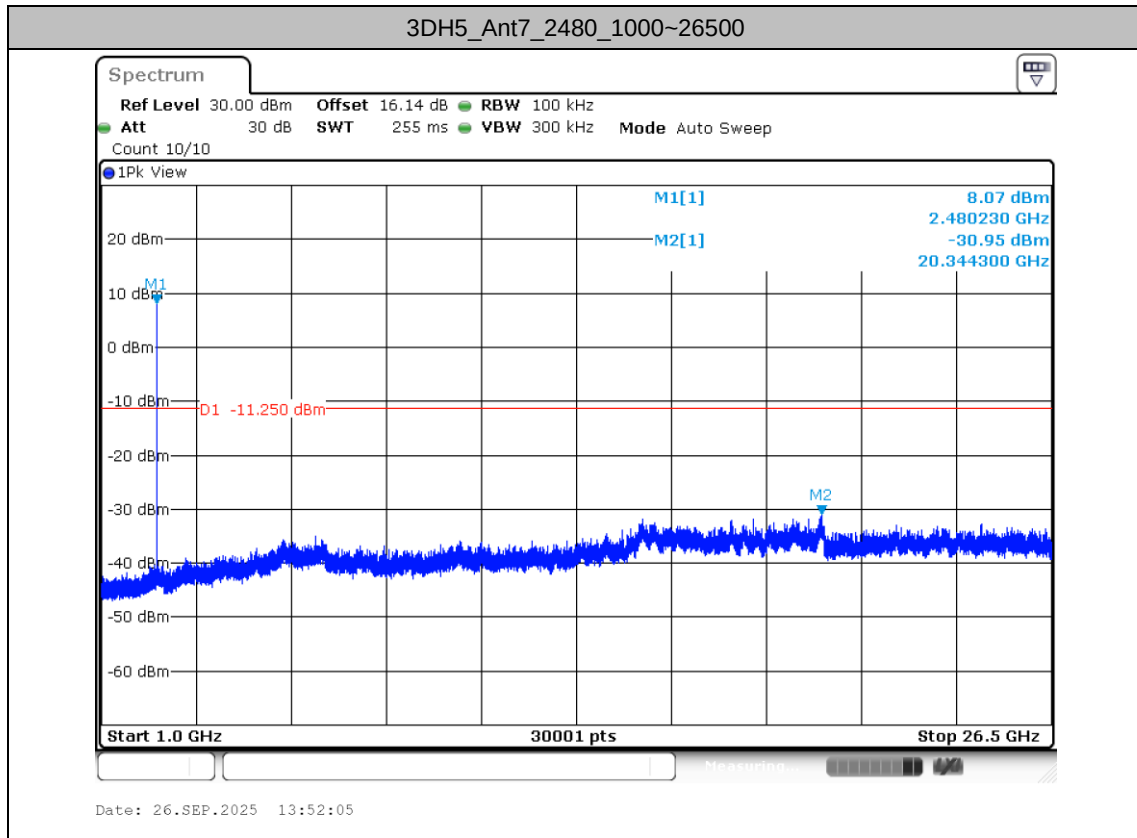



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

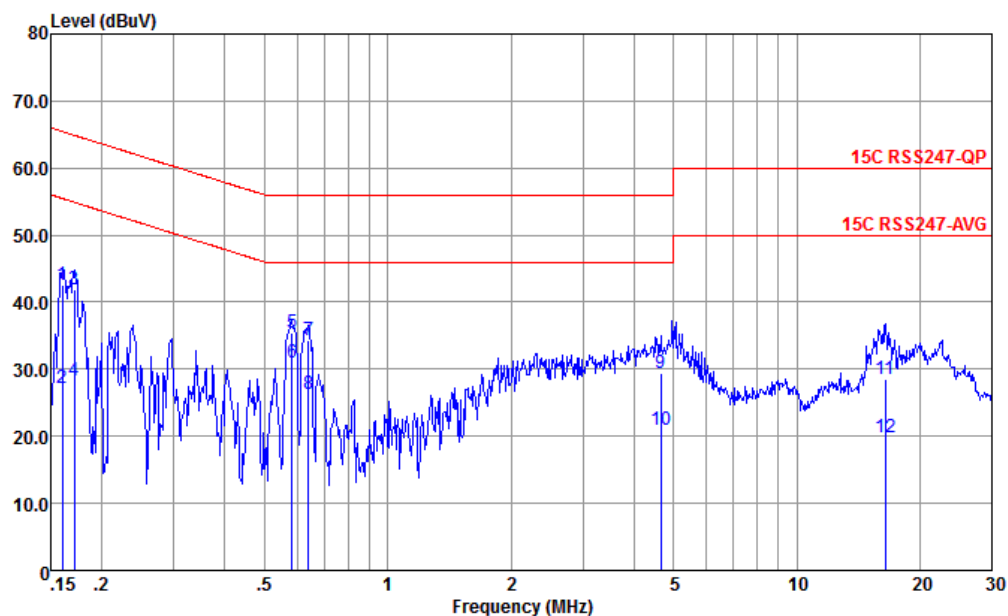

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 24+80 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	42.49	-22.98	65.47	31.80	0.24	10.45	QP
2	0.160	27.29	-28.18	55.47	16.60	0.24	10.45	Average
3	0.171	41.90	-23.00	64.90	31.20	0.25	10.45	QP
4	0.171	28.20	-26.70	54.90	17.50	0.25	10.45	Average
5	0.582	35.35	-20.65	56.00	24.60	0.37	10.38	QP
6 *	0.582	30.95	-15.05	46.00	20.20	0.37	10.38	Average
7	0.641	34.23	-21.77	56.00	23.50	0.37	10.36	QP
8	0.641	26.33	-19.67	46.00	15.60	0.37	10.36	Average
9	4.647	29.51	-26.49	56.00	18.90	0.41	10.20	QP
10	4.647	20.91	-25.09	46.00	10.30	0.41	10.20	Average
11	16.486	28.43	-31.57	60.00	17.20	0.94	10.29	QP
12	16.486	19.73	-30.27	50.00	8.50	0.94	10.29	Average

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

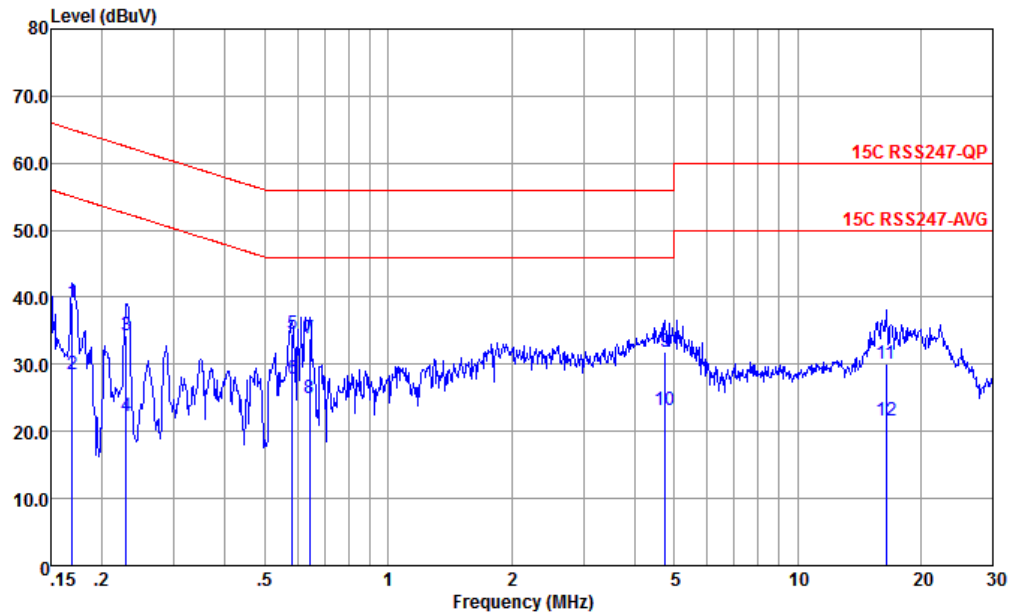

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 24+80 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.169	39.20	-25.79	64.99	28.50	0.25	10.45	QP
2	0.169	28.50	-26.49	54.99	17.80	0.25	10.45	Average
3	0.229	34.32	-28.16	62.48	23.59	0.26	10.47	QP
4	0.229	22.22	-30.26	52.48	11.49	0.26	10.47	Average
5	0.582	34.53	-21.47	56.00	23.79	0.36	10.38	QP
6 *	0.582	27.93	-18.07	46.00	17.19	0.36	10.38	Average
7	0.644	33.92	-22.08	56.00	23.19	0.37	10.36	QP
8	0.644	24.92	-21.08	46.00	14.19	0.37	10.36	Average
9	4.746	31.81	-24.19	56.00	21.21	0.40	10.20	QP
10	4.746	23.11	-22.89	46.00	12.51	0.40	10.20	Average
11	16.486	30.12	-29.88	60.00	18.89	0.94	10.29	QP
12	16.486	21.72	-28.28	50.00	10.49	0.94	10.29	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Koi Ji	Relative Humidity :	46 ~ 48 %
		Temperature :	26.2 ~ 27.5 °C



Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	7	Bluetooth BR_GFSK	0	2402	1Mbps	-	-
Mode 2	2400-2483.5	7	Bluetooth BR_GFSK	39	2441	1Mbps	-	-
Mode 3	2400-2483.5	7	Bluetooth BR_GFSK	78	2480	1Mbps	-	-
Mode 4	2400-2483.5	12	Bluetooth BR_GFSK	0	2402	1Mbps	-	-
Mode 5	2400-2483.5	12	Bluetooth BR_GFSK	39	2441	1Mbps	-	-
Mode 6	2400-2483.5	12	Bluetooth BR_GFSK	78	2480	1Mbps	-	-
Mode 7	2400-2483.5	12+7	Bluetooth EDR_8DPSK	0	2402	3Mbps	-	-
Mode 8	2400-2483.5	12+7	Bluetooth EDR_8DPSK	39	2441	3Mbps	-	-
Mode 9	2400-2483.5	12+7	Bluetooth EDR_8DPSK	78	2480	3Mbps	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	0	2376.82	56.22	74.00	-17.78	H	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	0	4804.00	38.97	74.00	-35.03	V	PEAK	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	42.06	74.00	-31.94	H	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2491.50	56.68	74.00	-17.32	H	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	41.11	74.00	-32.89	V	PEAK	Pass	Harmonic
4	Bluetooth BR_GFSK	0	2384.36	56.07	74.00	-17.93	H	PEAK	Pass	Band Edge
4	Bluetooth BR_GFSK	0	4804.00	39.24	74.00	-34.76	H	PEAK	Pass	Harmonic
5	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
5	Bluetooth BR_GFSK	39	7323.00	41.89	74.00	-32.11	H	PEAK	Pass	Harmonic
6	Bluetooth EDR_8DPSK	78	2489.20	56.30	74.00	-17.70	H	PEAK	Pass	Band Edge
6	Bluetooth EDR_8DPSK	78	7440.00	42.09	74.00	-31.91	H	PEAK	Pass	Harmonic
7	Bluetooth EDR_8DPSK	0	2365.90	51.26	74.00	-22.74	V	PEAK	Pass	Band Edge
7	Bluetooth EDR_8DPSK	0	4804.00	40.26	74.00	-33.74	H	PEAK	Pass	Harmonic
8	Bluetooth EDR_8DPSK	39	-	-	-	-	-	-	-	Band Edge
8	Bluetooth EDR_8DPSK	39	4882.00	40.47	74.00	-33.53	H	PEAK	Pass	Harmonic
9	Bluetooth EDR_8DPSK	78	2498.76	51.61	74.00	-22.39	H	PEAK	Pass	Band Edge
9	Bluetooth EDR_8DPSK	78	4960.00	40.09	74.00	-33.91	V	PEAK	Pass	Harmonic

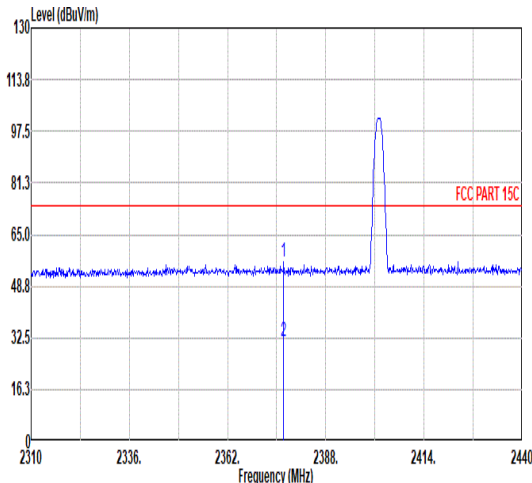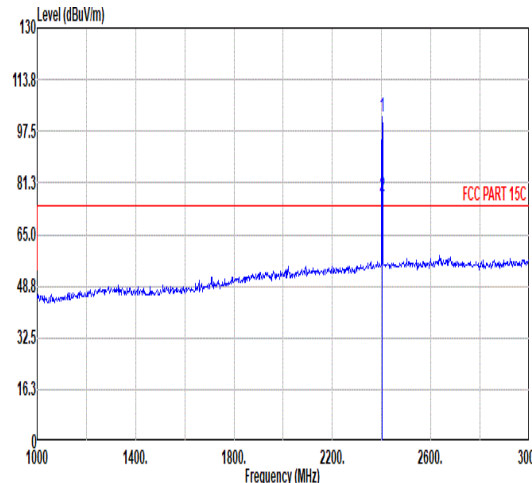

Mode	1																																																																	
	Band Edge																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																	
ANT	7																																																																	
Pol.	Horizontal																																																																	
Peak																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2376.82</td><td>56.22</td><td>74.00</td><td>-17.78</td><td>39.37</td><td>32.45</td><td>9.09</td><td>30.69</td><td>6.00</td><td>249</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>2376.82</td><td>31.43</td><td>54.00</td><td>-22.57</td><td>14.58</td><td>32.45</td><td>9.09</td><td>30.69</td><td>6.00</td><td>249</td><td>360</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2376.82	56.22	74.00	-17.78	39.37	32.45	9.09	30.69	6.00	249	360	PEAK	2	2376.82	31.43	54.00	-22.57	14.58	32.45	9.09	30.69	6.00	249	360	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2376.82	56.22	74.00	-17.78	39.37	32.45	9.09	30.69	6.00	249	360	PEAK																																																						
2	2376.82	31.43	54.00	-22.57	14.58	32.45	9.09	30.69	6.00	249	360	AVERAGE																																																						
Fundamental																																																																		
																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.81</td><td>-----</td><td>-----</td><td>84.85</td><td>32.49</td><td>9.15</td><td>30.68</td><td>6.00</td><td>249</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>77.02</td><td>-----</td><td>-----</td><td>60.06</td><td>32.49</td><td>9.15</td><td>30.68</td><td>6.00</td><td>249</td><td>360</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.81	-----	-----	84.85	32.49	9.15	30.68	6.00	249	360	PEAK	2	2402.00	77.02	-----	-----	60.06	32.49	9.15	30.68	6.00	249	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2402.00	101.81	-----	-----	84.85	32.49	9.15	30.68	6.00	249	360	PEAK																																																						
2	2402.00	77.02	-----	-----	60.06	32.49	9.15	30.68	6.00	249	360	AVERAGE																																																						



Mode	1																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																			
ANT	7																																																																																																			
Pol.	Vertical					Fundamental																																																																																														
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2367.20</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>38.49</td><td>32.43</td><td>9.06</td><td>30.70</td></tr><tr><td>2</td><td>2367.20</td><td>30.49</td><td>54.00</td><td>-23.51</td><td>13.70</td><td>32.43</td><td>9.06</td><td>30.70</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2367.20	55.28	74.00	-18.72	38.49	32.43	9.06	30.70	2	2367.20	30.49	54.00	-23.51	13.70	32.43	9.06	30.70	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2402.00</td><td>97.97</td><td>-----</td><td>-----</td><td>81.01</td><td>32.49</td><td>9.15</td><td>30.68</td></tr><tr><td>2</td><td>2402.00</td><td>73.18</td><td>-----</td><td>-----</td><td>56.22</td><td>32.49</td><td>9.15</td><td>30.68</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	97.97	-----	-----	81.01	32.49	9.15	30.68	2	2402.00	73.18	-----	-----	56.22	32.49	9.15	30.68
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																												
1	2367.20	55.28	74.00	-18.72	38.49	32.43	9.06	30.70																																																																																												
2	2367.20	30.49	54.00	-23.51	13.70	32.43	9.06	30.70																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																												
1	2402.00	97.97	-----	-----	81.01	32.49	9.15	30.68																																																																																												
2	2402.00	73.18	-----	-----	56.22	32.49	9.15	30.68																																																																																												