

APPROVAL SHEET

Sample seal

Customer Name XIAOMI

Product Model RC04

Customer P/N L530100043321

Specifications 2.4GHz/5GHz, 3dBi, 1.13 RFcable, 2G=120mm, 5G=45mm

Southstar P/N 3.N102.1050

Production date 2024-05-25

Revision 1.0

Southstar		
FICTION/TEST	DQE	R&D
Jinjiang Zhang		
Customer		
PUR	QC	R&D

Manufacturers: SHENZHEN SOUTH STAR TECHNOLOGY CO., LTD**Office address:** 803, Tianshu block, Xinggang tongchuanghui, No. 6099, Bao'an Avenue, Xinhe community, Fuhai street, Bao'an District, Shenzhen**Production address:** No. 3, Chigang Nanfang 1st Road, Humen Town, Dongguan City, Guangdong Province**Tel:** 0755-27474071 0769-88086190**Http:** //www.southstar-tech.com



History

[illegible]


Index

一、Cover	1
二、Colophon	2
三、Index	3
四、The basic parameters	4
五、Product Drawing	5
六、Test Equipment & Conditions	6
七、Test Report	7-8
八、Antenna assembly picture	9
九、Packing method	10

Antenna Specification

A. Electrical Characteristics	
Frequency	2400MHz~2500 MHz/5150MHz~5850 MHz
VSWR	≤ 2
Efficiency	$> 60\%$
Impedance	50 Ohm
Polarization	Linear
Gain	3dBi
Note	
B. Material & Mechanical Characteristics	
Material of Radiator	
Cable Type	2G: 1.13 White 5G:1.13 Black
Connector Type	
C. Environmental	
Operation Temperature	- 30 °C ~ + 65 °C
Storage Temperature	- 40 °C ~ + 70 °C

Rev	Description	Date	Remark
A	New drawing		

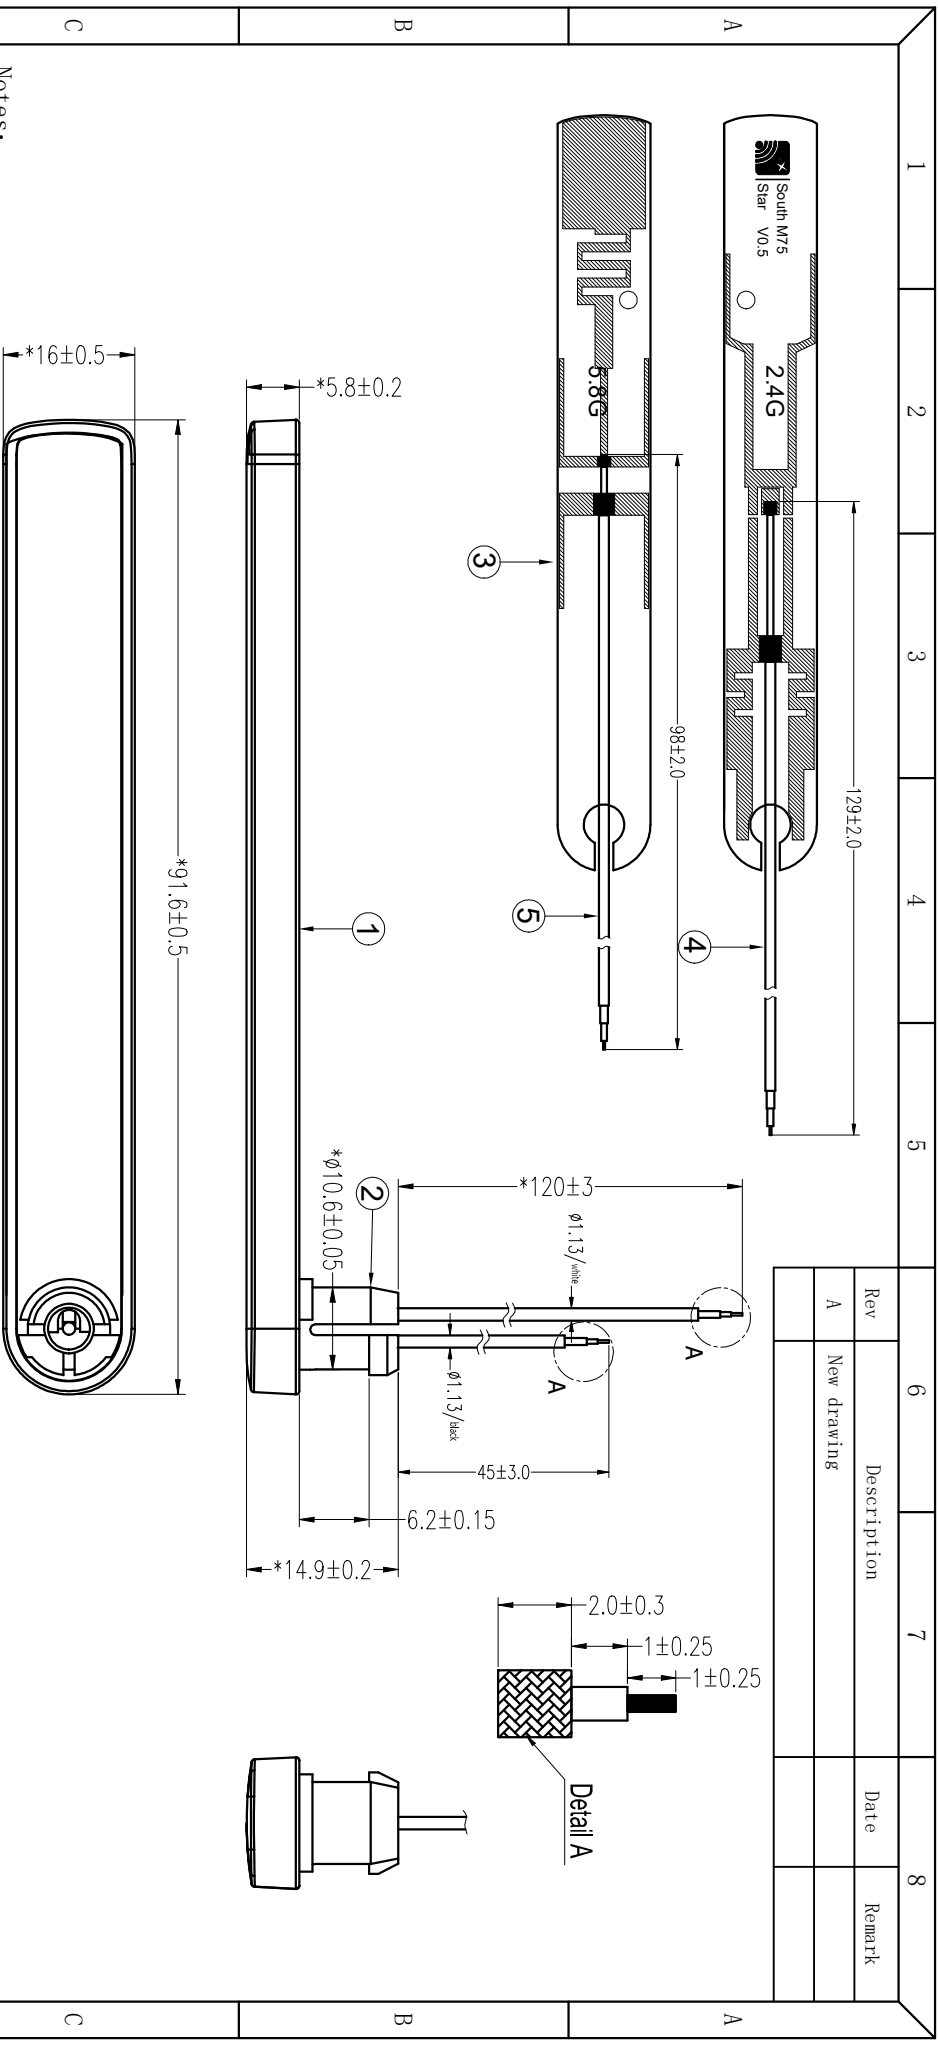

- Notes:
1. Mark “*” means key dimensions;
 2. Unmarked ones refer to drawing;
 3. There should not be cold/false soldering, short/open circuit etc;
 4. ALL Parts must comply with RoHS;
 5. 100% Performance inspection is a must.

No.	Part No.	Name	Specification	Amount	Remark
1					
2					
3					
4					
5					
6					
7					
8					



South
star

SHENZHEN SOUTH STAR TECHNOLOGY CO., LTD

Test Equipment & Conditions

1. NetWork Analyzers:


Keysight E5071C

2. Comprehensive tester:

CMW500 、 MT8000A、 MT8862A

3. 3D Chamber Test System:

Calibrated until:2024. 03. 13

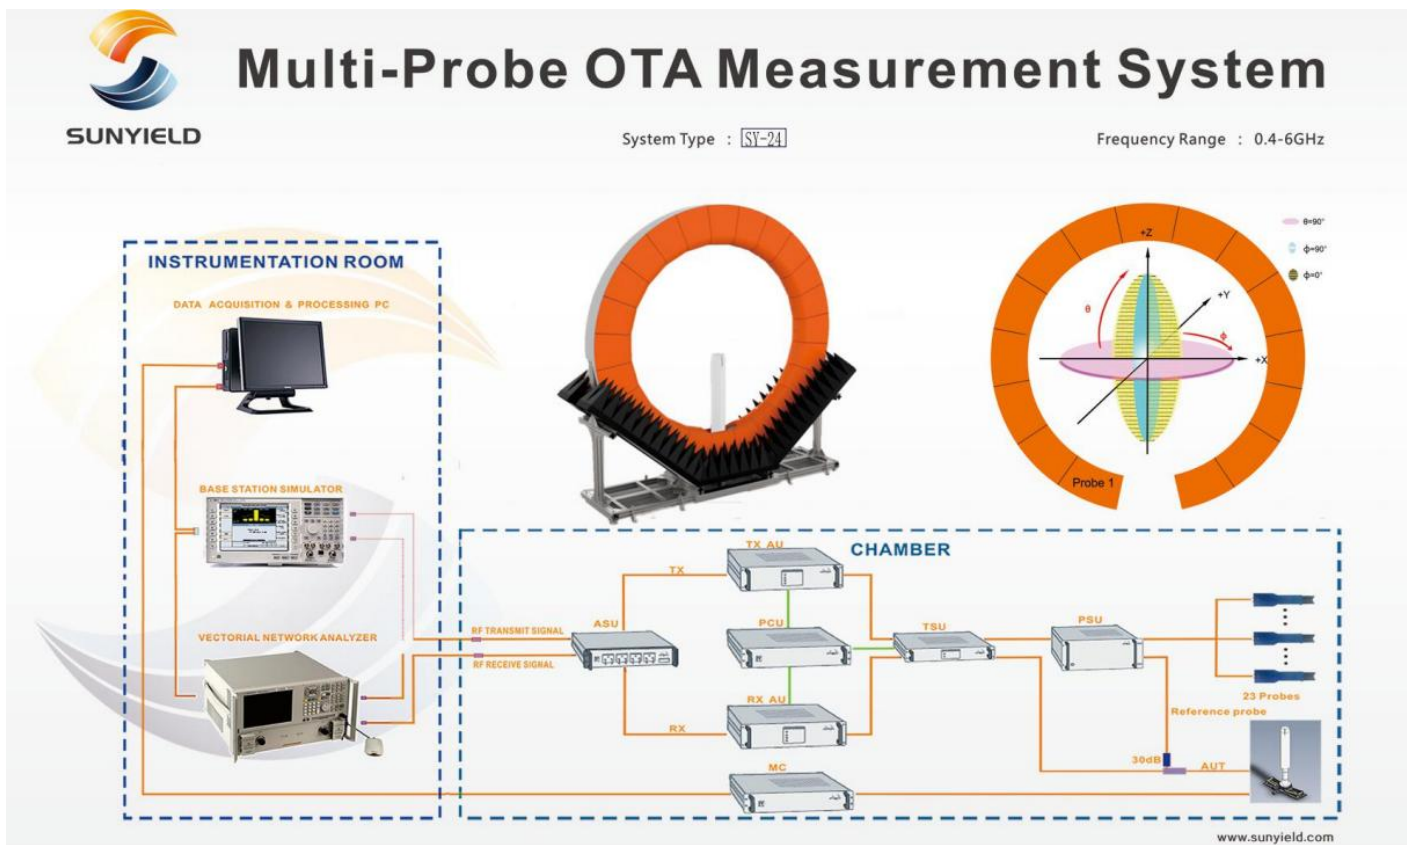




South
star

SHENZHEN SOUTH STAR TECHNOLOGY CO., LTD.

Antenna Impedance: S11

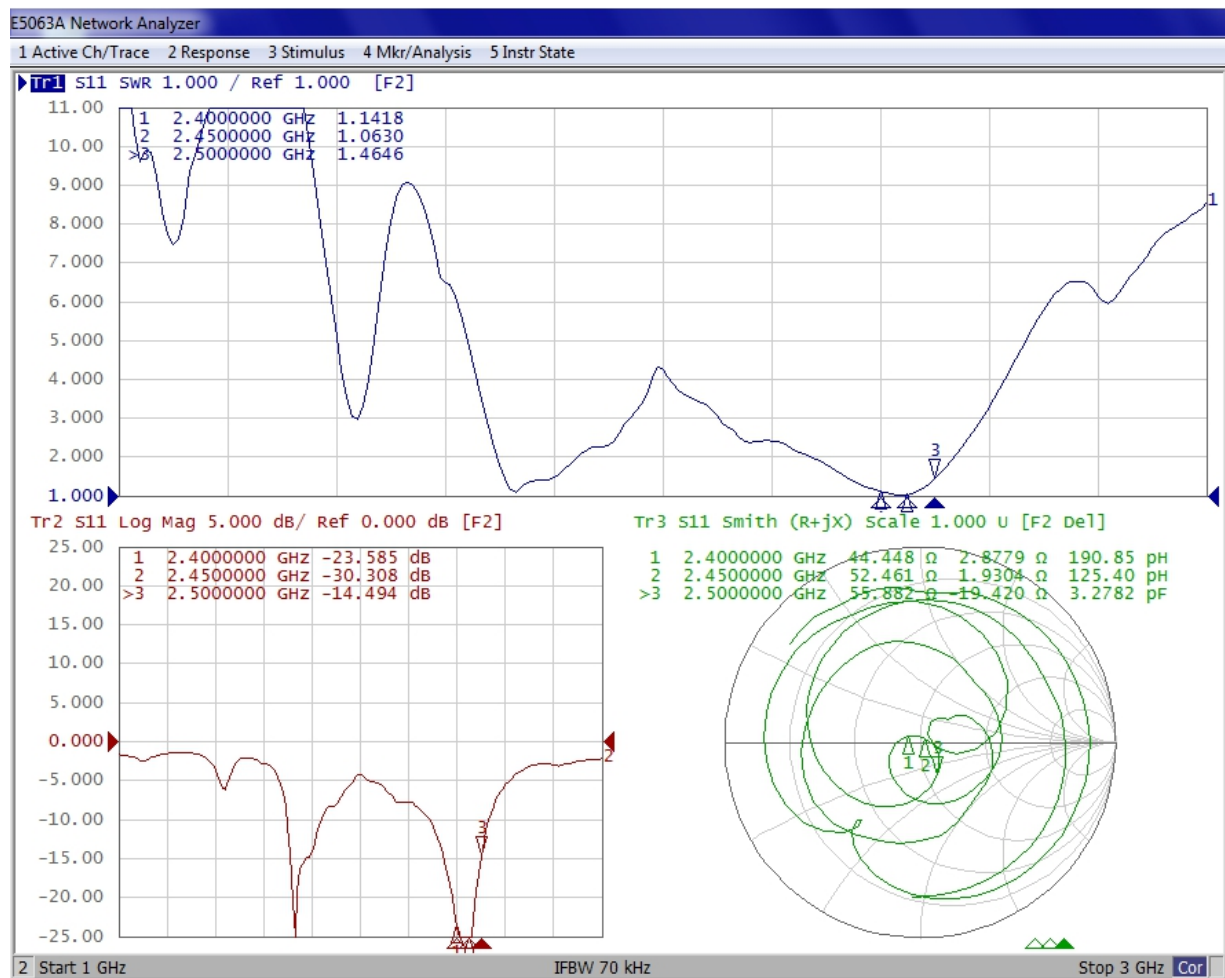




South
star

SHENZHEN SOUTH STAR TECHNOLOGY CO., LTD.


Efficiency& GAIN:

Freq (MHz)	Effi (%)	Gain (dBi)
2400	69.06	3.21
2410	65.76	3.03
2420	66.55	3.12
2430	69.83	2.87
2440	68.91	2.73
2450	64.73	2.61
2460	62.59	2.73
2470	62.44	2.8
2480	64.31	3.05
2490	64.1	3.09
2500	63.59	3.33


2400.000MHz




2450.000MHz




2500.000MHz




Horizontal

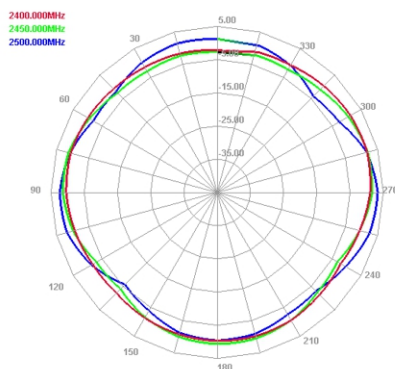


E1 Face

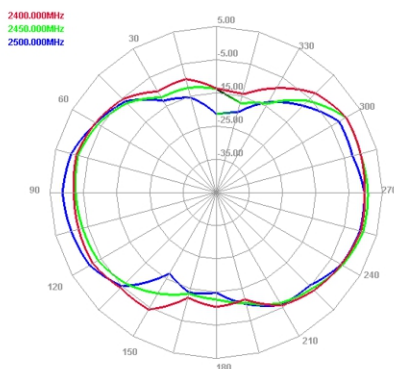

E2 Face





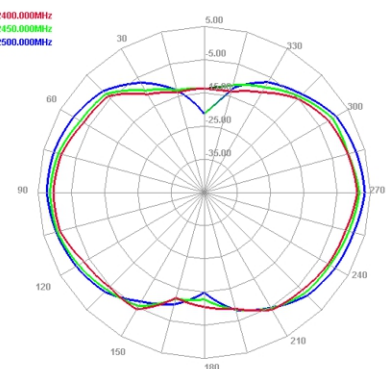


Antenna Impedance: S11

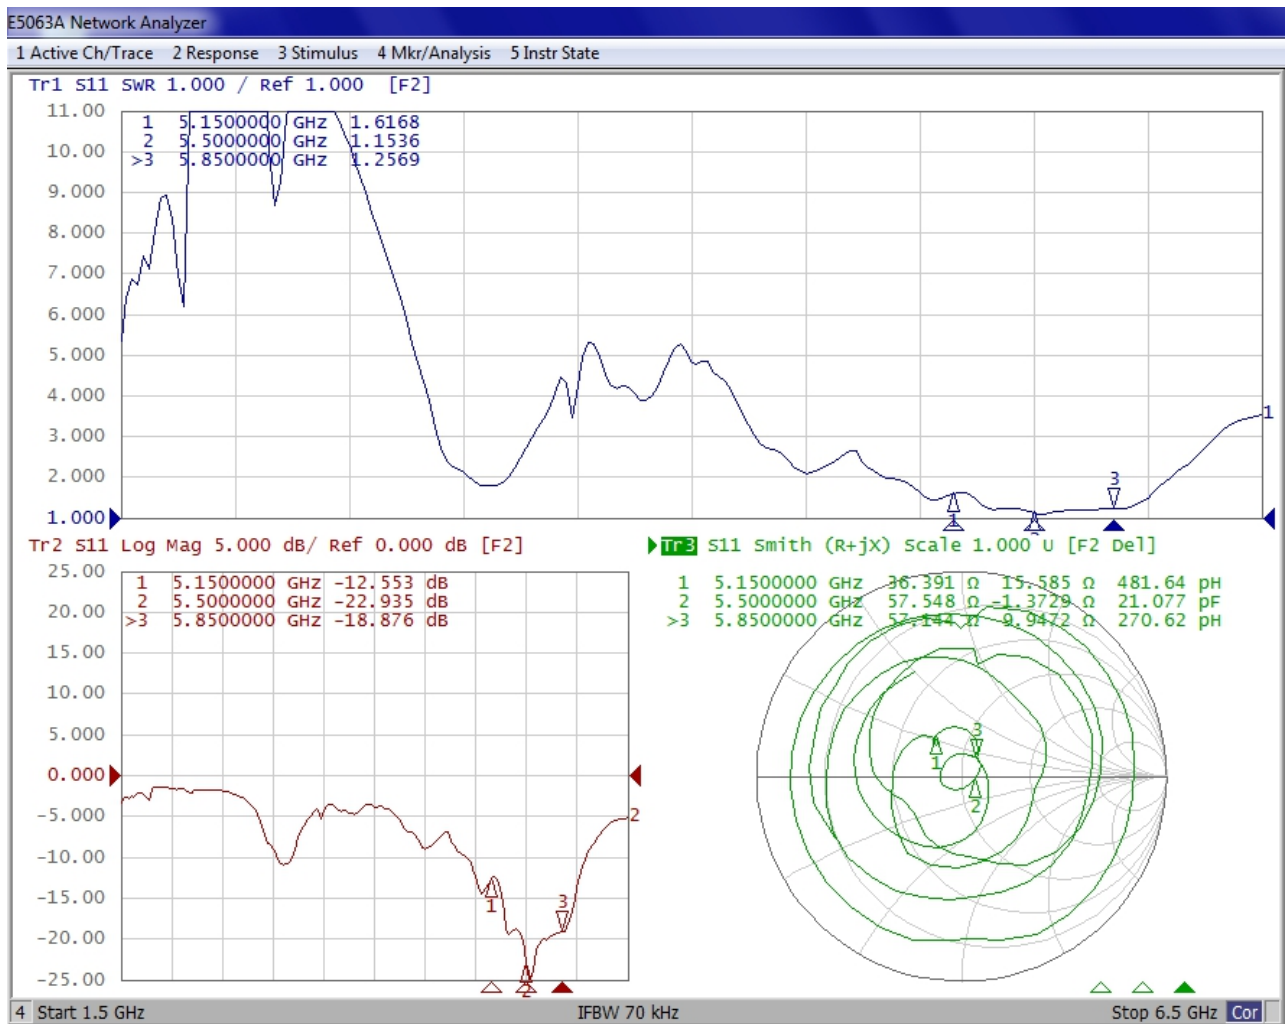

Efficiency& GAIN:

Freq (MHz)	Effi (%)	Gain (dBi)
5150	62.14	2.73
5200	65.08	3.23
5250	65.98	4.05
5300	63.73	4.4
5350	63.95	4.06
5400	66.12	3.67
5450	64.22	3.5
5500	73.32	3.93
5550	75.75	3.7
5600	67.37	2.82
5650	66.1	2.69
5700	72.93	3.25
5750	71.93	3.37
5800	70.07	3.45
5850	66.86	3.62

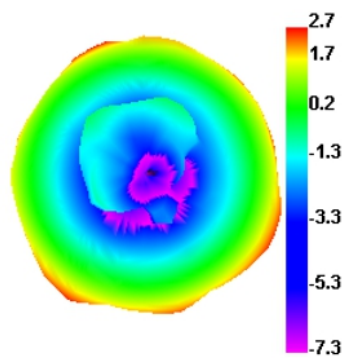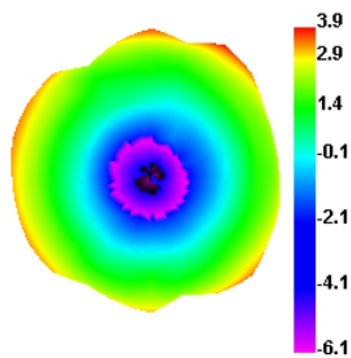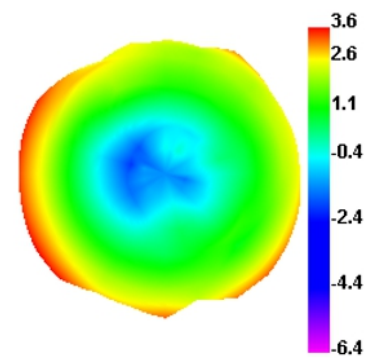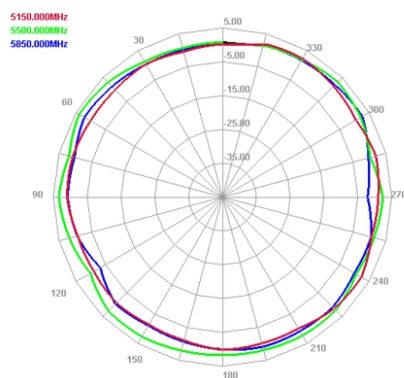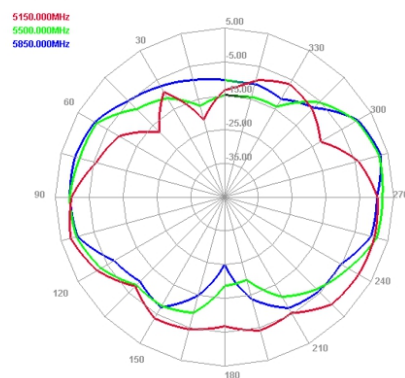5150.000MHz

5500.000MHz

5850.000MHz

Horizontal

E1 Face

E2 Face
