



BUREAU
VERITAS


Test Report No.: W7L-P23030005RF02

Worst case harmonic:

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	47.21	48.40	74.00	-26.79	-1.19	Peak	Horizontal
2 PP	7440.000	49.68	47.70	74.00	-24.32	1.98	Peak	Horizontal

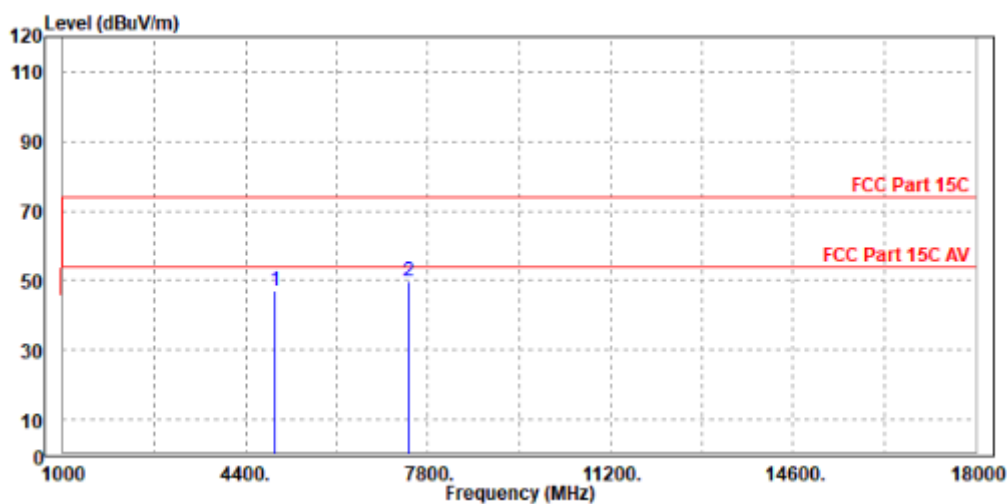




BUREAU
VERITAS

Test Report No.: W7L-P23030005RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4960.000	47.52	48.51	74.00	-26.48	-0.99	Peak	Vertical
2 PP	7443.000	49.79	47.79	74.00	-24.21	2.00	Peak	Vertical

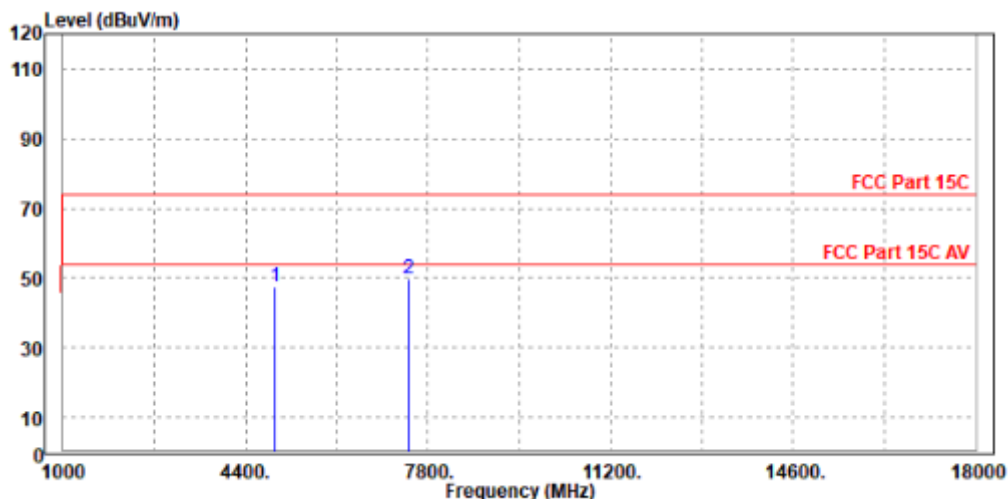

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet

BUREAU
VERITAS

Test Report No.: W7L-P23030005RF02

BT-LE _S2

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.38	58.42	74	-23.62	31.75	6.18	45.97	140	200	Peak
2390	41.48	49.52	54	-12.52	31.75	6.18	45.97	140	200	Average
2402	94.02	102.01	/	/	31.79	6.19	45.97	140	200	Peak
2402	93.57	101.56	/	/	31.79	6.19	45.97	140	200	Average
2483.5	51.75	59.32	74	-22.25	32.05	6.31	45.93	140	200	Peak
2483.5	41.81	49.38	54	-12.19	32.05	6.31	45.93	140	200	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.91	58.56	74	-23.09	32.14	6.18	45.97	100	150	Peak
2390	42.01	49.66	54	-11.99	32.14	6.18	45.97	100	150	Average
2402	91.96	99.58	/	/	32.16	6.19	45.97	100	150	Peak
2402	90.19	97.81	/	/	32.16	6.19	45.97	100	150	Average
2483.5	50.46	57.72	74	-23.54	32.36	6.31	45.93	100	150	Peak
2483.5	41.5	48.76	54	-12.5	32.36	6.31	45.93	100	150	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.5	57.54	74	-24.5	31.75	6.18	45.97	140	200	Peak
2390	41.07	49.11	54	-12.93	31.75	6.18	45.97	140	200	Average
2440	97.03	104.82	/	/	31.91	6.25	45.95	140	200	Peak
2440	96.74	104.53	/	/	31.91	6.25	45.95	140	200	Average
2483.5	49.79	57.36	74	-24.21	32.05	6.31	45.93	140	200	Peak
2483.5	41.81	49.38	54	-12.19	32.05	6.31	45.93	140	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.68	57.33	74	-24.32	32.14	6.18	45.97	100	150	Peak
2390	42.36	50.01	54	-11.64	32.14	6.18	45.97	100	150	Average
2440	93.29	100.73	/	/	32.26	6.25	45.95	100	150	Peak
2440	93.17	100.61	/	/	32.26	6.25	45.95	100	150	Average
2483.5	50.67	57.93	74	-23.33	32.36	6.31	45.93	100	150	Peak
2483.5	41.95	49.21	54	-12.05	32.36	6.31	45.93	100	150	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2440MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-P23030005RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.2	57.24	74	-24.8	31.75	6.18	45.97	140	200	Peak
2390	41.27	49.31	54	-12.73	31.75	6.18	45.97	140	200	Average
2480	97.52	105.11	/	/	32.04	6.3	45.93	140	200	Peak
2480	96.42	104.01	/	/	32.04	6.3	45.93	140	200	Average
2483.5	49.57	57.14	74	-24.43	32.05	6.31	45.93	140	200	Peak
2483.5	42.51	50.08	54	-11.49	32.05	6.31	45.93	140	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.97	57.62	74	-24.03	32.14	6.18	45.97	100	150	Peak
2390	40.92	48.57	54	-13.08	32.14	6.18	45.97	100	150	Average
2480	93.83	101.11	/	/	32.35	6.3	45.93	100	150	Peak
2480	93.6	100.88	/	/	32.35	6.3	45.93	100	150	Average
2483.5	51.03	58.29	74	-22.97	32.36	6.31	45.93	100	150	Peak
2483.5	42.77	50.03	54	-11.23	32.36	6.31	45.93	100	150	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: W7L-P23030005RF02

Worst case harmonic:

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4960.000	46.60	47.79	74.00	-27.40	-1.19	Peak	Horizontal
2 PP	7443.000	49.40	47.42	74.00	-24.60	1.98	Peak	Horizontal

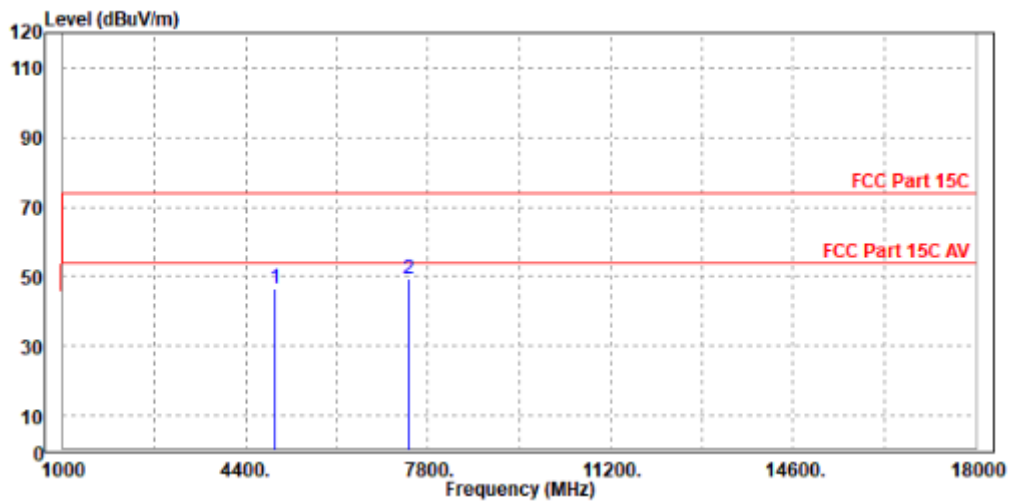




BUREAU
VERITAS

Test Report No.: W7L-P23030005RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	47.74	48.73	74.00	-26.26	-0.99	Peak	Vertical
2 PP	7440.000	50.39	48.38	74.00	-23.61	2.01	Peak	Vertical

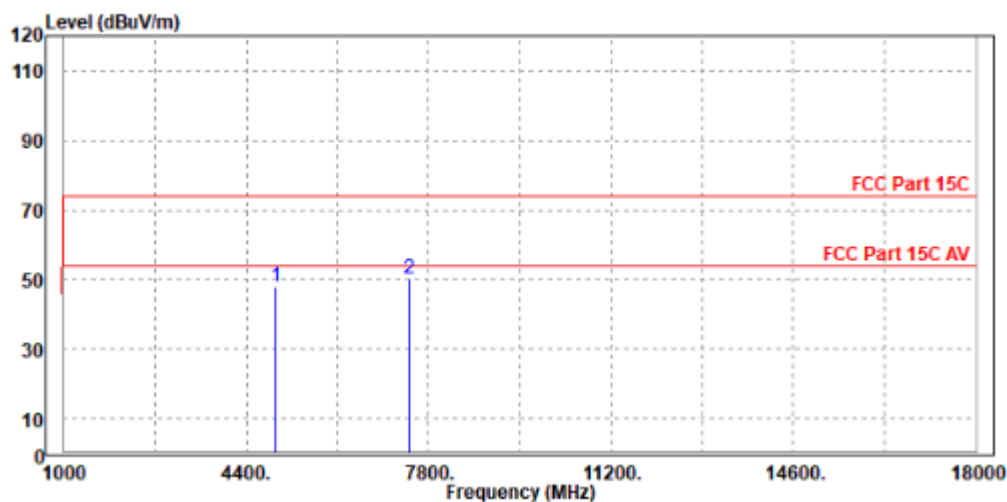

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet



**BUREAU
VERITAS**

Test Report No.: W7L-P23030005RF02

BT-LE _S8

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.22	57.26	74	-24.78	31.75	6.18	45.97	140	200	Peak
2390	41.08	49.12	54	-12.92	31.75	6.18	45.97	140	200	Average
2402	93.98	101.97	/	/	31.79	6.19	45.97	140	200	Peak
2402	93.65	101.64	/	/	31.79	6.19	45.97	140	200	Average
2483.5	50.4	57.97	74	-23.6	32.05	6.31	45.93	140	200	Peak
2483.5	42.14	49.71	54	-11.86	32.05	6.31	45.93	140	200	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.15	58.8	74	-22.85	32.14	6.18	45.97	100	150	Peak
2390	41.61	49.26	54	-12.39	32.14	6.18	45.97	100	150	Average
2402	90.53	98.15	/	/	32.16	6.19	45.97	100	150	Peak
2402	89.69	97.31	/	/	32.16	6.19	45.97	100	150	Average
2483.5	51.23	58.49	74	-22.77	32.36	6.31	45.93	100	150	Peak
2483.5	41.85	49.11	54	-12.15	32.36	6.31	45.93	100	150	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-P23030005RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.11	58.15	74	-23.89	31.75	6.18	45.97	140	200	Peak
2390	41.34	49.38	54	-12.66	31.75	6.18	45.97	140	200	Average
2440	97.07	104.86	/	/	31.91	6.25	45.95	140	200	Peak
2440	96.19	103.98	/	/	31.91	6.25	45.95	140	200	Average
2483.5	51.2	58.77	74	-22.8	32.05	6.31	45.93	140	200	Peak
2483.5	41.91	49.48	54	-12.09	32.05	6.31	45.93	140	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.7	57.35	74	-24.3	32.14	6.18	45.97	100	150	Peak
2390	41.2	48.85	54	-12.8	32.14	6.18	45.97	100	150	Average
2440	92.88	100.32	/	/	32.26	6.25	45.95	100	150	Peak
2440	92.69	100.13	/	/	32.26	6.25	45.95	100	150	Average
2483.5	51.39	58.65	74	-22.61	32.36	6.31	45.93	100	150	Peak
2483.5	41.8	49.06	54	-12.2	32.36	6.31	45.93	100	150	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.32	57.36	74	-24.68	31.75	6.18	45.97	140	200	Peak
2390	40.97	49.01	54	-13.03	31.75	6.18	45.97	140	200	Average
2480	96.16	103.75	/	/	32.04	6.3	45.93	140	200	Peak
2480	94.7	102.29	/	/	32.04	6.3	45.93	140	200	Average
2483.5	51.39	58.96	74	-22.61	32.05	6.31	45.93	140	200	Peak
2483.5	43.03	50.6	54	-10.97	32.05	6.31	45.93	140	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.88	57.53	74	-24.12	32.14	6.18	45.97	100	150	Peak
2390	40.92	48.57	54	-13.08	32.14	6.18	45.97	100	150	Average
2480	93.95	101.23	/	/	32.35	6.3	45.93	100	150	Peak
2480	93.1	100.38	/	/	32.35	6.3	45.93	100	150	Average
2483.5	51.73	58.99	74	-22.27	32.36	6.31	45.93	100	150	Peak
2483.5	42.4	49.66	54	-11.6	32.36	6.31	45.93	100	150	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: W7L-P23030005RF02

Worst case harmonic:

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	46.76	47.95	74.00	-27.24	-1.19	Peak	Horizontal
2 PP	7440.000	49.22	47.24	74.00	-24.78	1.98	Peak	Horizontal

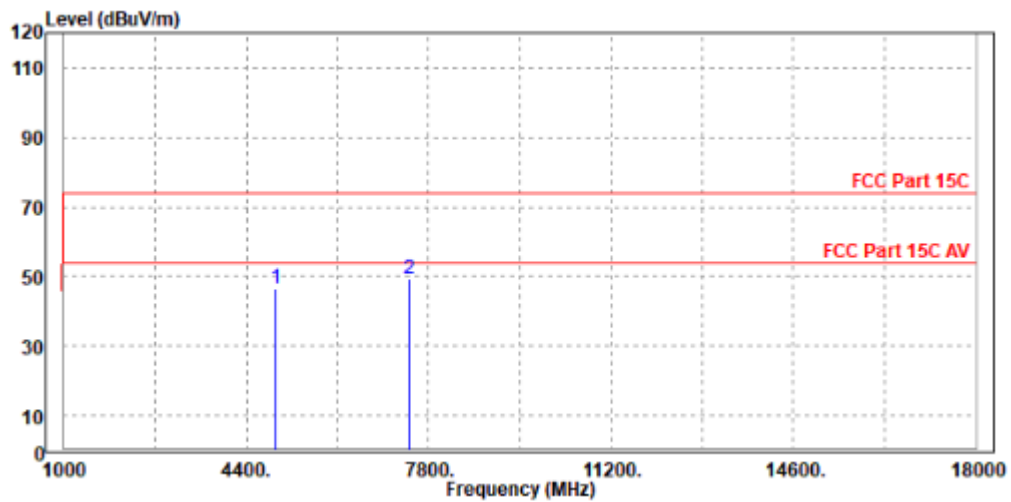




BUREAU
VERITAS

Test Report No.: W7L-P23030005RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4960.000	47.21	48.20	74.00	-26.79	-0.99	Peak	Vertical
2 PP	7443.000	50.30	48.30	74.00	-23.70	2.00	Peak	Vertical

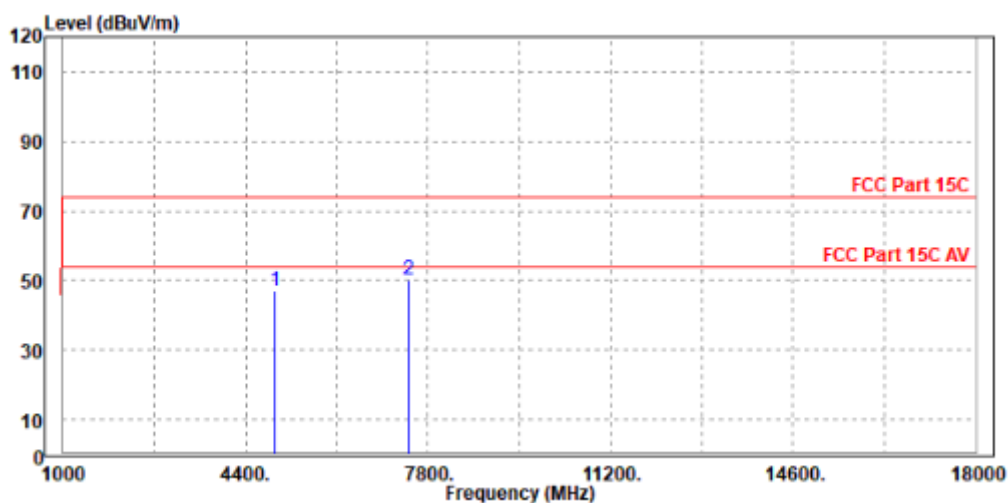

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 14,23	Feb. 13,24
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 17,23	Feb. 16,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.14,22	May.13,23
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 14,23	Feb. 13,24

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

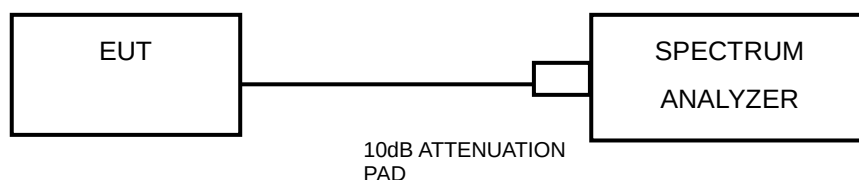

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-P23030005RF02

3.3.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

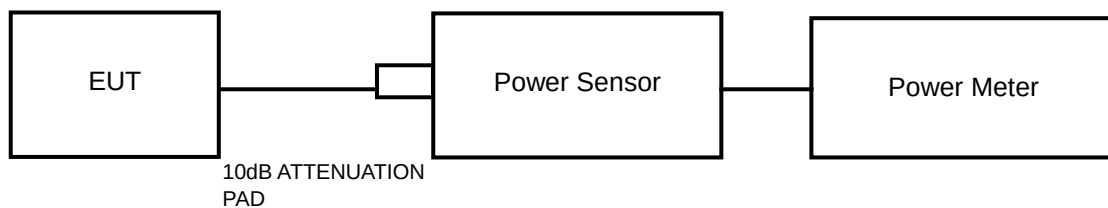

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-P23030005RF02

3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix1/2 Of this test report.



Test Report No.: W7L-P23030005RF02

3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix1/2 Of this test report.




3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-P23030005RF02

3.5.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

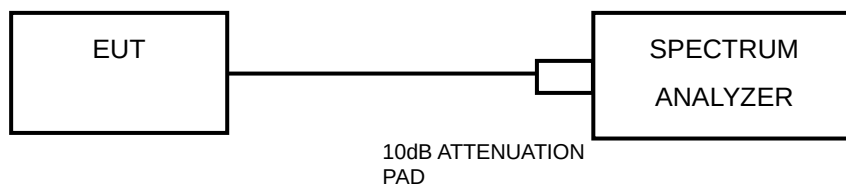

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix1/2 Of this test report.



3.7 ANTENNA REQUIREMENTS

3.7.1 STANDARD APPLICABLE

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.7.3 ANTENNA GAIN

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit and PSD limit



Test Report No.: W7L-P23030005RF02

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).