



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : REDMI
MODEL NAME : 26020RNB4L
FCC ID : 2AFZZRN03L
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jan. 08, 2026

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 EUT Operation Test Setup	9
3 TEST RESULT	10
3.1 Unwanted Emissions Measurement	10
3.2 Antenna Requirements	15
4 LIST OF MEASURING EQUIPMENT	16
5 MEASUREMENT UNCERTAINTY	17
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. DUTY CYCLE PLOTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4D0203-06D	Rev. 01	Initial issue of report	Jan. 13, 2026



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 7.14 dB at 40.67 MHz
3.2	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Note: This is a variant report, the change note could be referred to the 26020RNB4L_Operational Description of Product Equality Declaration which is exhibit separately. According to the change, only UNII-1~2C&UNII-3 worse cases of RSE were verified from original report FR4D0203D.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	REDMI
Model Name	26020RNB4L
FCC ID	2AFZZRN03L
IMEI Code	Radiation: 862670080008185
HW Version	135100C3Z
SW Version	Android 15
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> PIFA Antenna with gain -4.4 dBi <5260 MHz ~ 5320 MHz> PIFA Antenna with gain -4.4 dBi <5500 MHz ~ 5700 MHz> PIFA Antenna with gain -5.3 dBi <5745 MHz ~ 5825 MHz> PIFA Antenna with gain -6.2 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2020

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated:, radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5700MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825



Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


SISO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT80	MCS0

Remark: For Radiated Test Cases, The tests were performance with Adapter1 and USB Cable1.

Ch. #		U-NII-3	U-NII-1
		20M BW	80M BW
L	Low	149	42

2.3 Connection Diagram of Test System

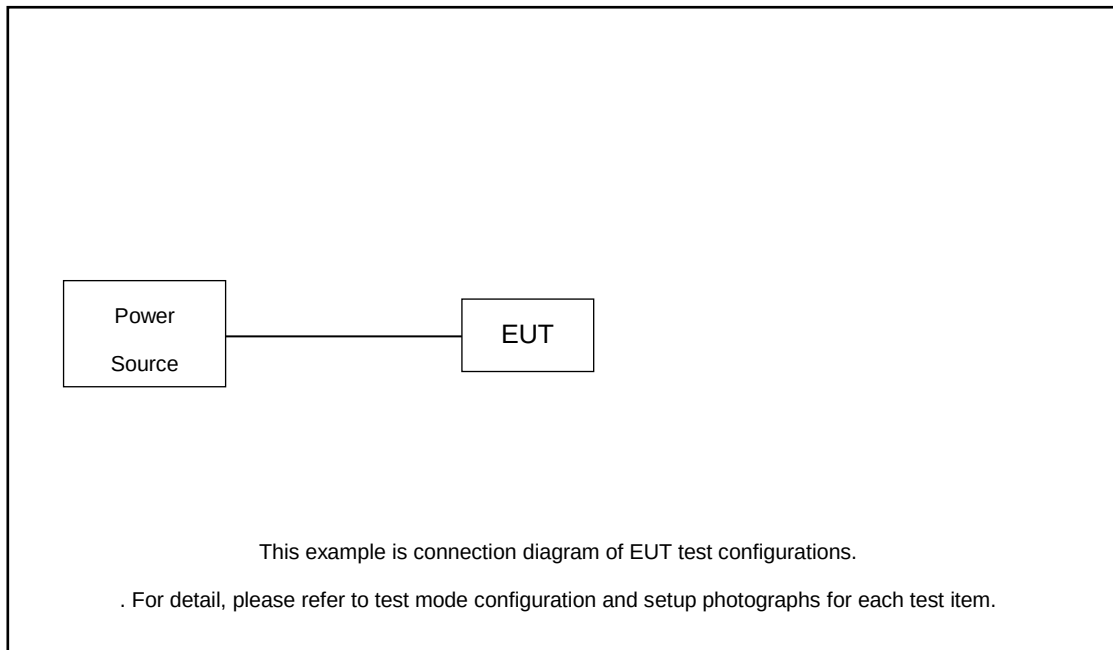

2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

3 Test Result

3.1 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.1.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.1.4 Test Setup


For radiated emissions below 30MHz

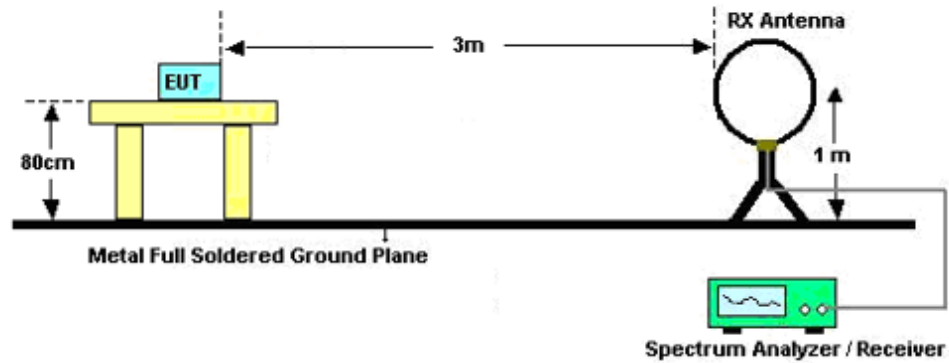

For radiated emissions from 30MHz to 1GHz

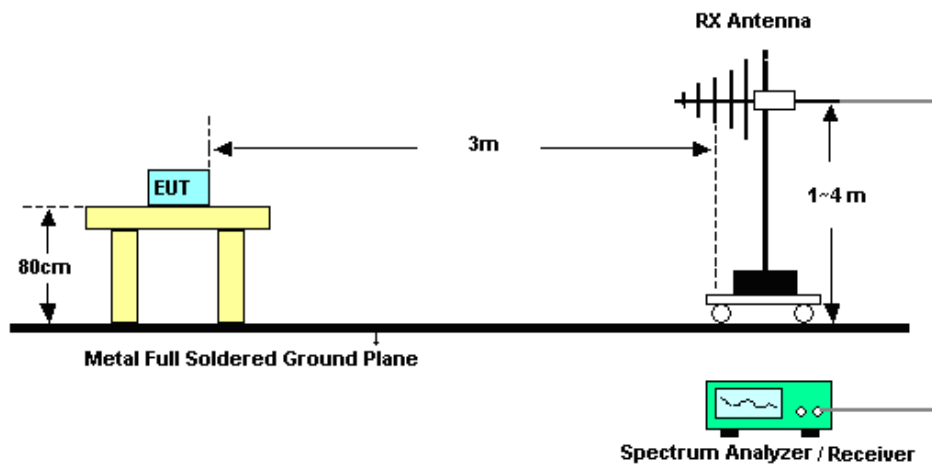

For radiated emissions above 1GHz

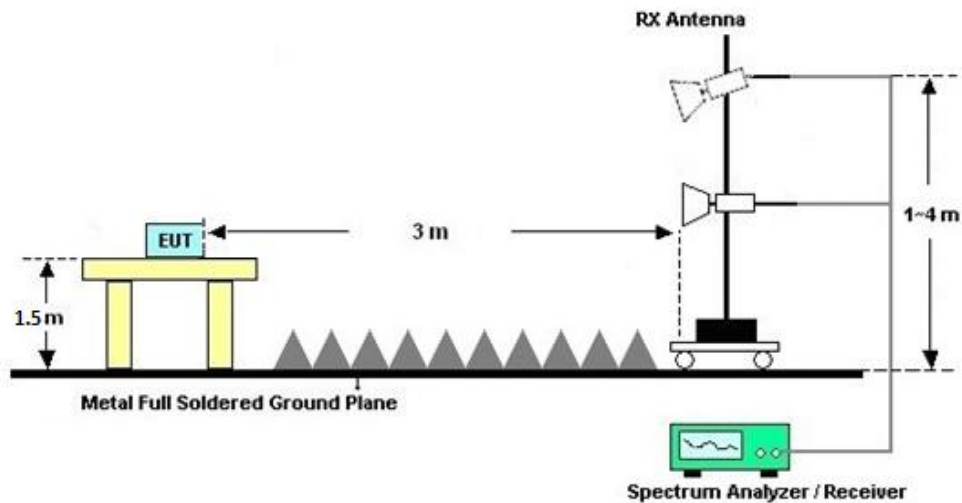

**3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.1.7 Duty Cycle

Please refer to Appendix B.

3.1.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.2 Antenna Requirements

3.2.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.2.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;Max 30dBm	Oct. 10, 2025	Jan. 08, 2026	Oct. 09, 2026	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44GHz	Apr. 18, 2025	Jan. 08, 2026	Apr. 17, 2026	Radiation (03CH03-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Jan. 08, 2026	Aug. 09, 2026	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Nov. 22, 2025	Jan. 08, 2026	Nov. 21, 2026	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251982	1GHz~18GHz	Aug. 22, 2025	Jan. 08, 2026	Aug. 21, 2026	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101116	18GHz~40GHz	Oct. 18, 2025	Jan. 08, 2026	Oct. 17, 2026	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 02, 2025	Jan. 08, 2026	Jul. 01, 2026	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 02, 2026	Jan. 08, 2026	Jan. 01, 2027	Radiation (03CH03-KS)
high gain Amplifier	EM	EM01G18GA	060834	1Ghz~18Ghz	Dec. 02, 2025	Jan. 08, 2026	Dec. 01, 2026	Radiation (03CH03-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 02, 2026	Jan. 08, 2026	Jan. 01, 2027	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jan. 08, 2026	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 08, 2026	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 08, 2026	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.20 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.32 dB
---	---------

----- THE END -----



Appendix A. Radiated Spurious Emission

Test Engineer :	Maven	Relative Humidity :	52~56%
		Temperature :	22~25°C





Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	7	802.11ac VHT80	42	5210	MCS0	-	-
Mode 2	U-NII-3	5.725-5.85	7	802.11a	149	5745	6Mbps	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ac VHT80	42	5137.76	46.32	54.00	-7.68	V	AVERAGE	Pass	Band Edge
1	802.11ac VHT80	42	10420.00	45.11	68.20	-23.09	V	PEAK	Pass	Harmonic
2	802.11a	149	5643.60	49.93	68.20	-18.27	H	PEAK	Pass	Band Edge
2	802.11a	149	11490.00	44.83	54.00	-9.17	V	AVERAGE	Pass	Harmonic

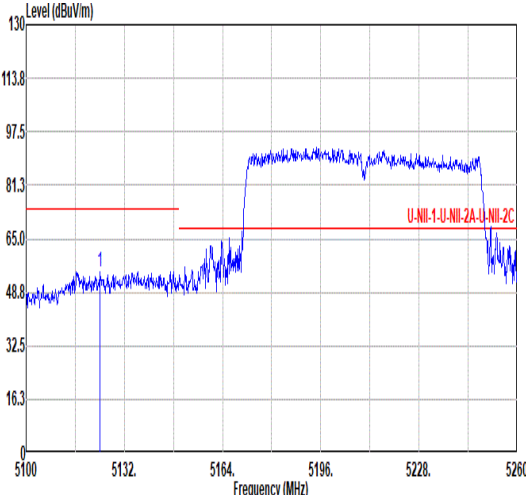
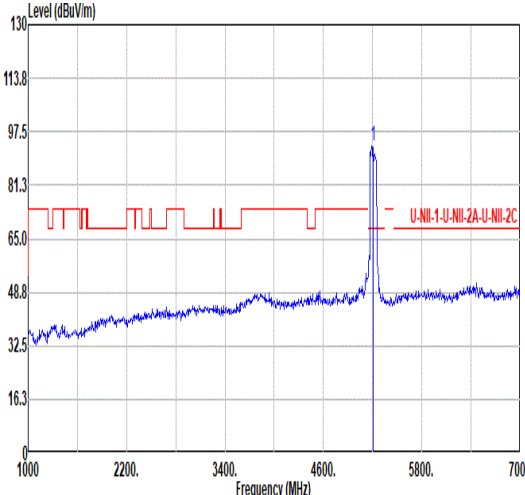
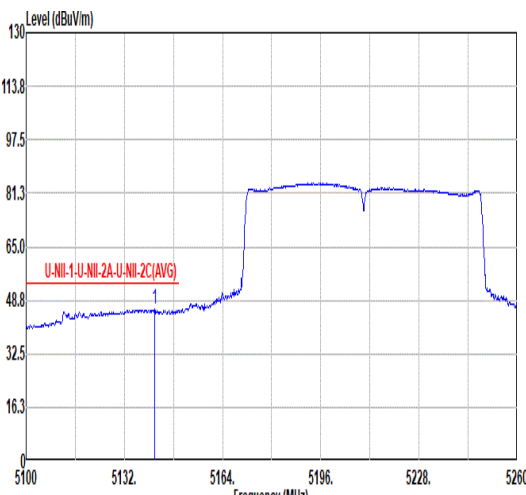
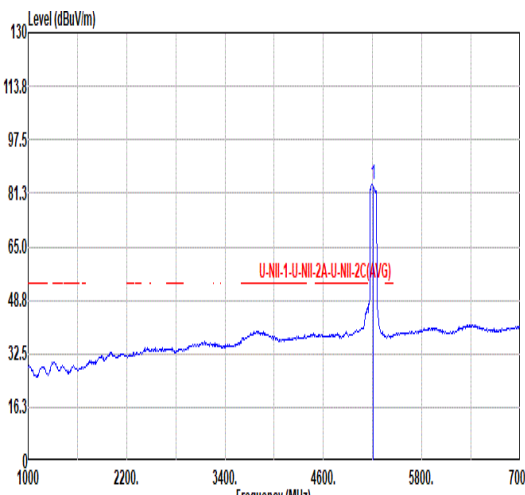


Mode	1																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																																						
ANT	7																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																
Peak																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5124.00</td><td>55.03</td><td>74.00</td><td>-18.97</td><td>47.26</td><td>34.10</td><td>10.63</td><td>36.96</td><td>0.00</td><td>100</td><td>105</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5124.00	55.03	74.00	-18.97	47.26	34.10	10.63	36.96	0.00	100	105	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>93.21</td><td>-----</td><td>-----</td><td>85.33</td><td>34.18</td><td>10.70</td><td>37.00</td><td>0.00</td><td>100</td><td>105</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	93.21	-----	-----	85.33	34.18	10.70	37.00	0.00	100	105
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5124.00	55.03	74.00	-18.97	47.26	34.10	10.63	36.96	0.00	100	105	PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5210.00	93.21	-----	-----	85.33	34.18	10.70	37.00	0.00	100	105	PEAK																																																																																											
Avg																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5141.76</td><td>45.93</td><td>54.00</td><td>-8.07</td><td>38.15</td><td>34.10</td><td>10.65</td><td>36.97</td><td>0.00</td><td>100</td><td>105</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5141.76	45.93	54.00	-8.07	38.15	34.10	10.65	36.97	0.00	100	105	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>84.02</td><td>-----</td><td>-----</td><td>76.14</td><td>34.19</td><td>10.70</td><td>37.01</td><td>0.00</td><td>100</td><td>105</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	84.02	-----	-----	76.14	34.19	10.70	37.01	0.00	100	105
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5141.76	45.93	54.00	-8.07	38.15	34.10	10.65	36.97	0.00	100	105	AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5210.00	84.02	-----	-----	76.14	34.19	10.70	37.01	0.00	100	105	AVERAGE																																																																																											



Mode	1										
	Band Edge - R										
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz										
ANT	7										
Pol.	Horizontal										
Peak	Level (dBuV/m)										

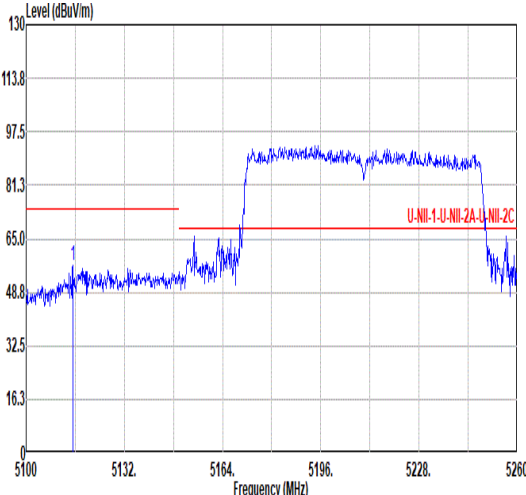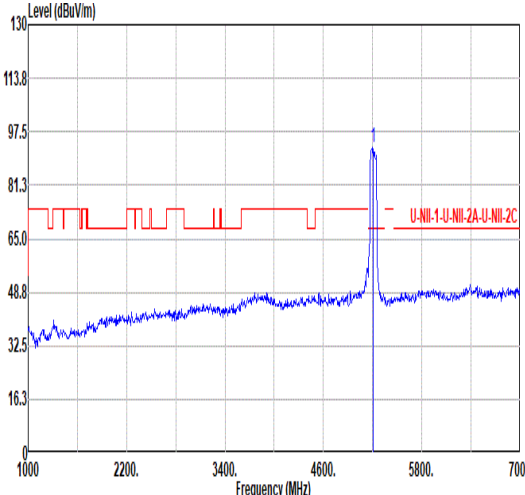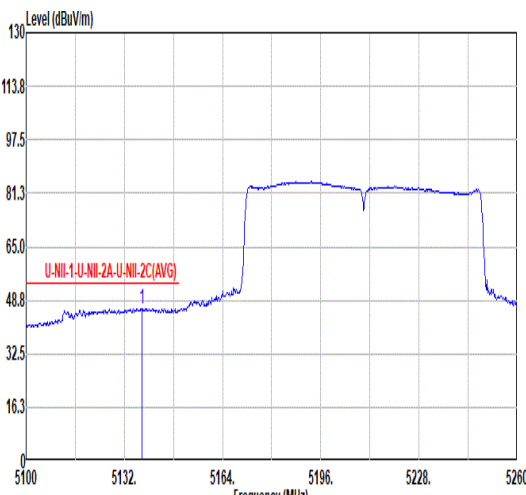
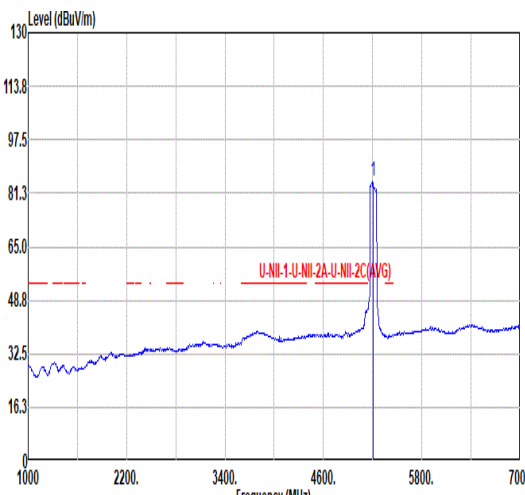



Mode	1																																																																																																								
	Band Edge - L																																																																																																								
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																																								
ANT	7																																																																																																								
Pol.	Vertical						Fundamental																																																																																																		
Peak																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5115.20</td><td>57.07</td><td>74.00</td><td>-16.93</td><td>49.30</td><td>34.10</td><td>10.62</td><td>36.95</td><td>0.00</td><td>100</td><td>110</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5115.20	57.07	74.00	-16.93	49.30	34.10	10.62	36.95	0.00	100	110	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>92.69</td><td>-----</td><td>-----</td><td>84.81</td><td>34.19</td><td>10.70</td><td>37.01</td><td>0.00</td><td>100</td><td>110</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5210.00	92.69	-----	-----	84.81	34.19	10.70	37.01	0.00	100	110
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	5115.20	57.07	74.00	-16.93	49.30	34.10	10.62	36.95	0.00	100	110	PEAK																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	5210.00	92.69	-----	-----	84.81	34.19	10.70	37.01	0.00	100	110	PEAK																																																																																													
Avg																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5137.76</td><td>46.32</td><td>54.00</td><td>-7.68</td><td>38.55</td><td>34.10</td><td>10.64</td><td>36.97</td><td>0.00</td><td>100</td><td>110</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5137.76	46.32	54.00	-7.68	38.55	34.10	10.64	36.97	0.00	100	110	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>84.71</td><td>-----</td><td>-----</td><td>76.83</td><td>34.19</td><td>10.70</td><td>37.01</td><td>0.00</td><td>100</td><td>110</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5210.00	84.71	-----	-----	76.83	34.19	10.70	37.01	0.00	100	110
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	5137.76	46.32	54.00	-7.68	38.55	34.10	10.64	36.97	0.00	100	110	AVERAGE																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	5210.00	84.71	-----	-----	76.83	34.19	10.70	37.01	0.00	100	110	AVERAGE																																																																																													





Mode	1																																																								
	Band Edge - R																																																								
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																								
ANT	7																																																								
Pol.	Vertical										Fundamental																																														
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.62</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>38.53</td><td>34.40</td><td>10.85</td><td>36.83</td><td>0.00</td><td>100</td><td>110</td><td>PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5356.62	46.95	74.00	-27.05	38.53	34.40	10.85	36.83	0.00	100	110	PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5356.62	46.95	74.00	-27.05	38.53	34.40	10.85	36.83	0.00	100	110	PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.48</td><td>38.06</td><td>54.00</td><td>-15.94</td><td>29.66</td><td>34.40</td><td>10.84</td><td>36.84</td><td>0.00</td><td>100</td><td>110</td><td>AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.48	38.06	54.00	-15.94	29.66	34.40	10.84	36.84	0.00	100	110	AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5352.48	38.06	54.00	-15.94	29.66	34.40	10.84	36.84	0.00	100	110	AVERAGE																																													

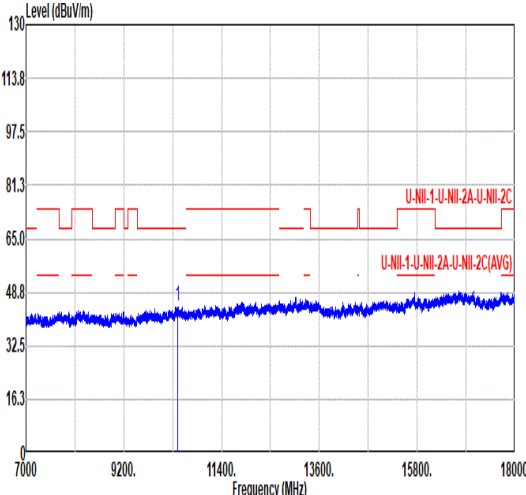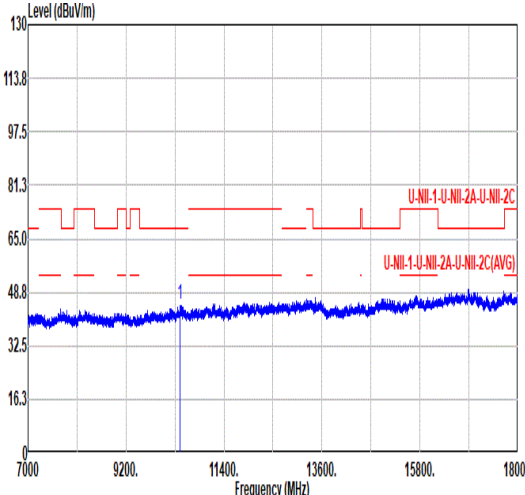



Mode	1																																																																																																		
	Harmonic																																																																																																		
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																																		
ANT	7																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10420.00</td><td>44.63</td><td>68.20</td><td>-23.57</td><td>59.27</td><td>37.39</td><td>15.32</td><td>67.35</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	44.63	68.20	-23.57	59.27	37.39	15.32	67.35	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10420.00</td><td>45.11</td><td>68.20</td><td>-23.09</td><td>59.67</td><td>37.42</td><td>15.34</td><td>67.32</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	45.11	68.20	-23.09	59.67	37.42	15.34	67.32	0.00	---	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	10420.00	44.63	68.20	-23.57	59.27	37.39	15.32	67.35	0.00	---	---	PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	10420.00	45.11	68.20	-23.09	59.67	37.42	15.34	67.32	0.00	---	---	PEAK																																																																																							

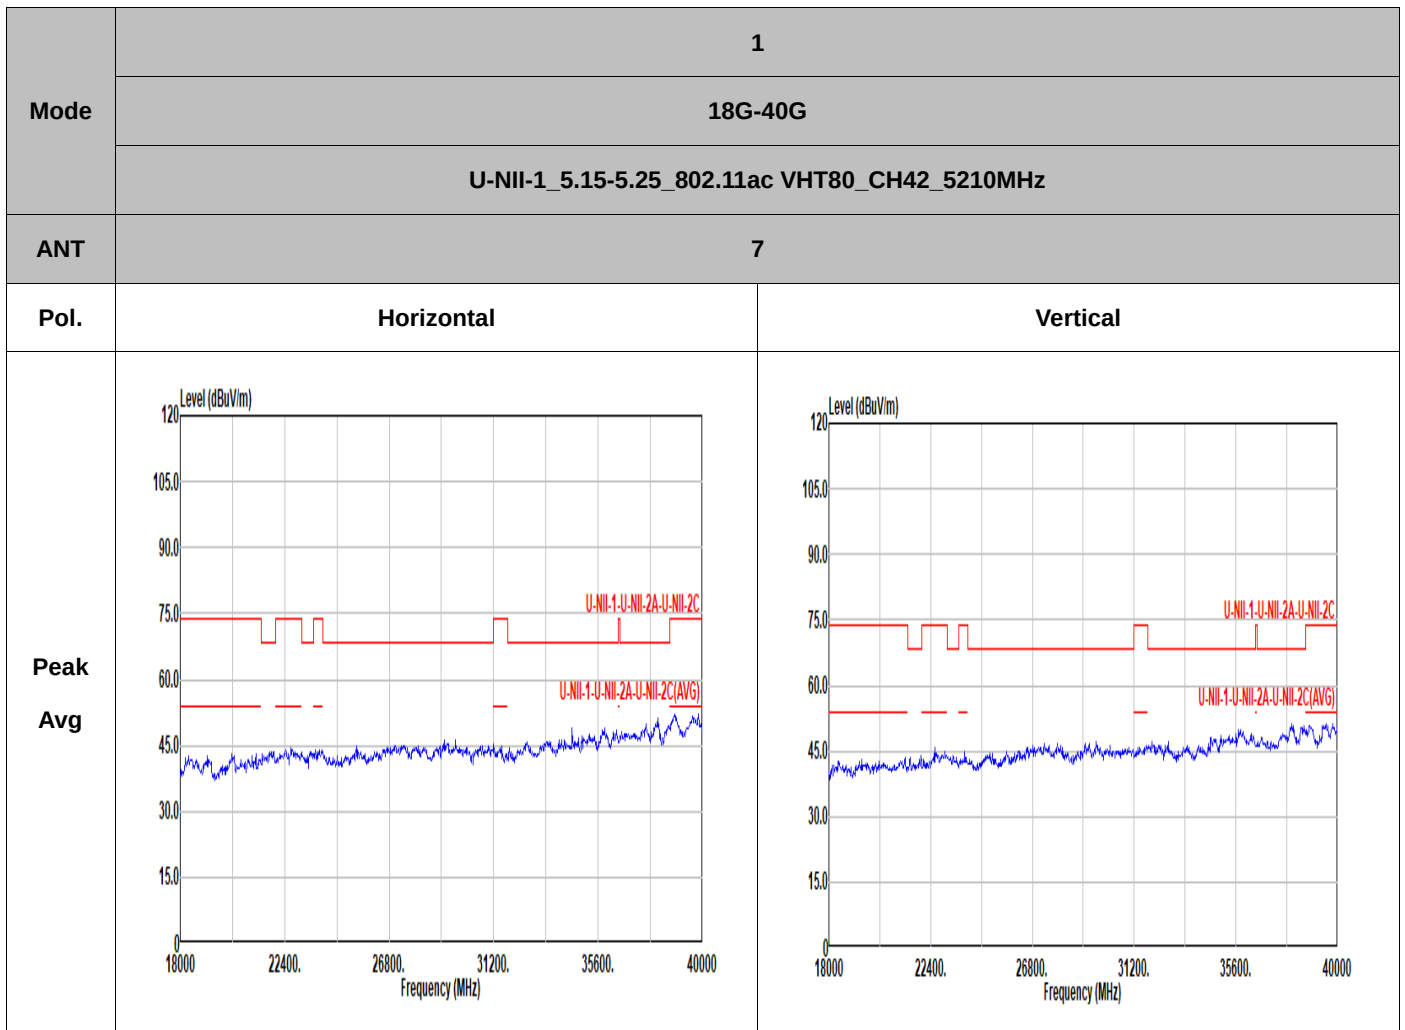


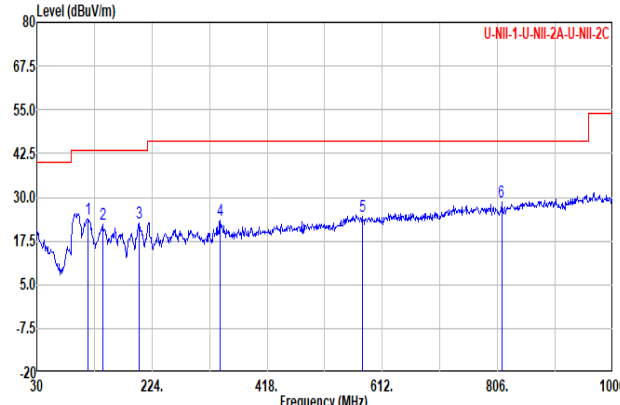
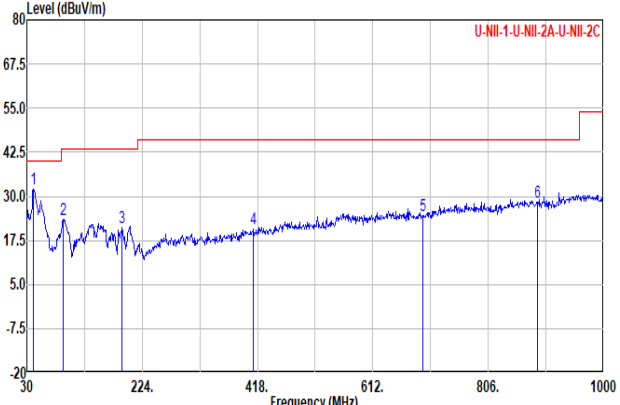


Mode	1										
	30M-1G										
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz										
ANT	7										
Pol.	Horizontal										
Peak											
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	116.33	23.84	43.50	-19.66	36.96	17.41	1.50	32.03	0.00	---	---
2	140.58	22.42	43.50	-21.08	35.37	17.43	1.65	32.03	0.00	---	---
3	202.66	22.57	43.50	-20.93	37.62	15.02	2.00	32.07	0.00	---	---
4	339.43	23.53	46.00	-22.47	33.04	20.01	2.59	32.11	0.00	---	---
5	578.05	24.47	46.00	-21.53	27.54	25.85	3.38	32.30	0.00	---	---
6	812.79	28.52	46.00	-17.48	28.49	27.90	4.02	31.89	0.00	---	---
Peak											
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	40.67	32.02	40.00	-7.98	44.14	19.33	0.62	32.07	0.00	---	---
2	91.11	23.39	43.50	-20.11	39.32	14.84	1.30	32.07	0.00	---	---
3	190.05	21.04	43.50	-22.46	36.47	14.70	1.93	32.06	0.00	---	---
4	411.21	20.77	46.00	-25.23	27.73	22.32	2.87	32.15	0.00	---	---
5	695.42	24.69	46.00	-21.31	26.81	26.49	3.72	32.33	0.00	---	---
6	888.45	28.23	46.00	-17.77	26.11	29.35	4.22	31.45	0.00	---	---

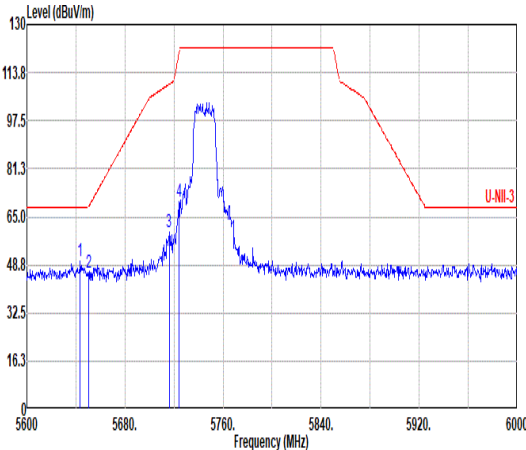
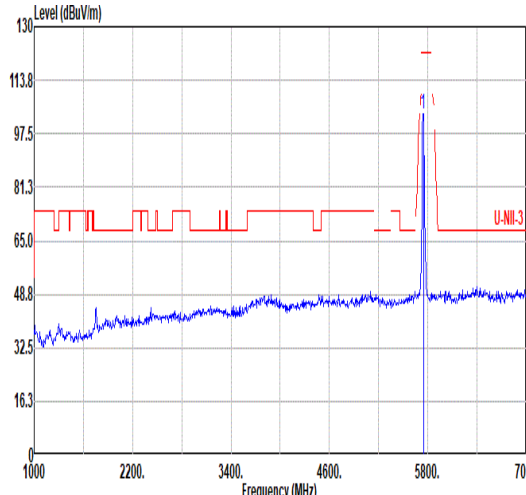


Mode	2																																																																																							
	Band Edge																																																																																							
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																							
ANT	7																																																																																							
Pol.	Horizontal																																																																																							
Peak																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5643.60</td><td>49.93</td><td>68.20</td><td>-18.27</td><td>41.20</td><td>34.49</td><td>11.21</td><td>36.97</td><td>0.00</td><td>100</td><td>90 PEAK</td></tr><tr><td>2 5650.40</td><td>46.12</td><td>68.50</td><td>-22.38</td><td>37.35</td><td>34.50</td><td>11.22</td><td>36.95</td><td>0.00</td><td>100</td><td>90 PEAK</td></tr><tr><td>3 5716.00</td><td>60.02</td><td>109.78</td><td>-49.76</td><td>51.01</td><td>34.50</td><td>11.32</td><td>36.81</td><td>0.00</td><td>100</td><td>90 PEAK</td></tr><tr><td>4 5724.00</td><td>69.91</td><td>120.02</td><td>-50.11</td><td>60.88</td><td>34.50</td><td>11.33</td><td>36.80</td><td>0.00</td><td>100</td><td>90 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5643.60	49.93	68.20	-18.27	41.20	34.49	11.21	36.97	0.00	100	90 PEAK	2 5650.40	46.12	68.50	-22.38	37.35	34.50	11.22	36.95	0.00	100	90 PEAK	3 5716.00	60.02	109.78	-49.76	51.01	34.50	11.32	36.81	0.00	100	90 PEAK	4 5724.00	69.91	120.02	-50.11	60.88	34.50	11.33	36.80	0.00	100	90 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 5643.60	49.93	68.20	-18.27	41.20	34.49	11.21	36.97	0.00	100	90 PEAK																																																																														
2 5650.40	46.12	68.50	-22.38	37.35	34.50	11.22	36.95	0.00	100	90 PEAK																																																																														
3 5716.00	60.02	109.78	-49.76	51.01	34.50	11.32	36.81	0.00	100	90 PEAK																																																																														
4 5724.00	69.91	120.02	-50.11	60.88	34.50	11.33	36.80	0.00	100	90 PEAK																																																																														
Avg	Blank																																																																																							
																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5745.00</td><td>103.36</td><td>-----</td><td>-----</td><td>94.28</td><td>34.50</td><td>11.36</td><td>36.78</td><td>0.00</td><td>100</td><td>90 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5745.00	103.36	-----	-----	94.28	34.50	11.36	36.78	0.00	100	90 PEAK																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 5745.00	103.36	-----	-----	94.28	34.50	11.36	36.78	0.00	100	90 PEAK																																																																														

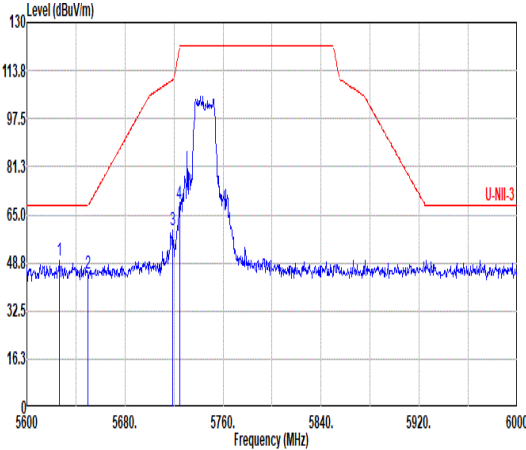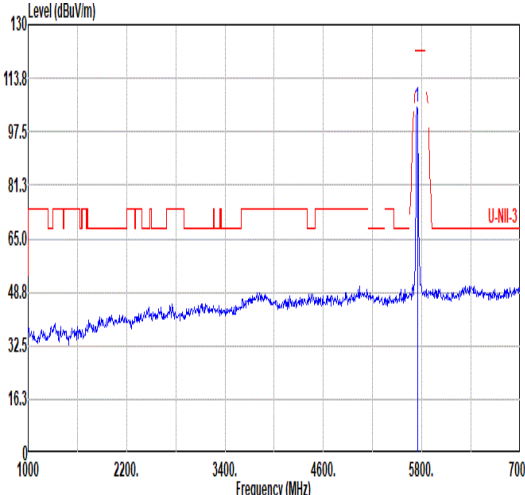
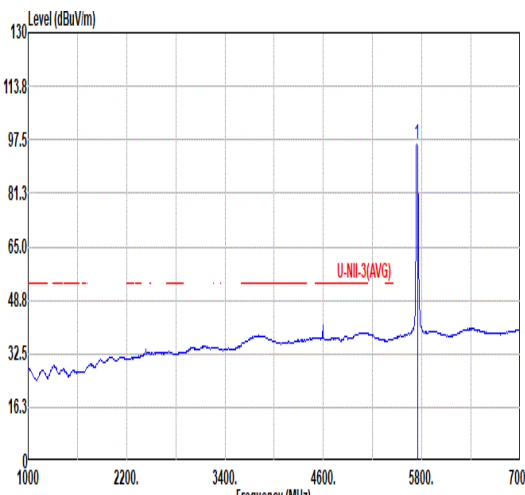


Mode	2																																																																																																																																														
	Band Edge																																																																																																																																														
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																														
ANT	7																																																																																																																																														
Pol.	Vertical						Fundamental																																																																																																																																								
Peak																																																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5626.40</td><td>49.36</td><td>68.20</td><td>-18.84</td><td>40.73</td><td>34.45</td><td>11.19</td><td>37.01</td><td>0.00</td><td>100</td><td>264</td><td>PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>45.22</td><td>68.20</td><td>-22.98</td><td>36.45</td><td>34.50</td><td>11.22</td><td>36.95</td><td>0.00</td><td>100</td><td>264</td><td>PEAK</td></tr><tr><td>3</td><td>5718.00</td><td>59.85</td><td>110.56</td><td>-50.71</td><td>50.84</td><td>34.50</td><td>11.32</td><td>36.81</td><td>0.00</td><td>100</td><td>264</td><td>PEAK</td></tr><tr><td>4</td><td>5724.40</td><td>68.44</td><td>120.93</td><td>-52.49</td><td>59.41</td><td>34.50</td><td>11.33</td><td>36.80</td><td>0.00</td><td>100</td><td>264</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5626.40	49.36	68.20	-18.84	40.73	34.45	11.19	37.01	0.00	100	264	PEAK	2	5650.00	45.22	68.20	-22.98	36.45	34.50	11.22	36.95	0.00	100	264	PEAK	3	5718.00	59.85	110.56	-50.71	50.84	34.50	11.32	36.81	0.00	100	264	PEAK	4	5724.40	68.44	120.93	-52.49	59.41	34.50	11.33	36.80	0.00	100	264	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>104.74</td><td>-----</td><td>-----</td><td>95.68</td><td>34.50</td><td>11.35</td><td>36.79</td><td>0.00</td><td>100</td><td>264</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	104.74	-----	-----	95.68	34.50	11.35	36.79	0.00	100	264
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	5626.40	49.36	68.20	-18.84	40.73	34.45	11.19	37.01	0.00	100	264	PEAK																																																																																																																																			
2	5650.00	45.22	68.20	-22.98	36.45	34.50	11.22	36.95	0.00	100	264	PEAK																																																																																																																																			
3	5718.00	59.85	110.56	-50.71	50.84	34.50	11.32	36.81	0.00	100	264	PEAK																																																																																																																																			
4	5724.40	68.44	120.93	-52.49	59.41	34.50	11.33	36.80	0.00	100	264	PEAK																																																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	5745.00	104.74	-----	-----	95.68	34.50	11.35	36.79	0.00	100	264	PEAK																																																																																																																																			
Avg	Blank																																																																																																																																														
							<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>96.12</td><td>-----</td><td>-----</td><td>87.06</td><td>34.50</td><td>11.35</td><td>36.79</td><td>0.00</td><td>100</td><td>264</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	96.12	-----	-----	87.06	34.50	11.35	36.79	0.00	100	264	AVERAGE																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	5745.00	96.12	-----	-----	87.06	34.50	11.35	36.79	0.00	100	264	AVERAGE																																																																																																																																			

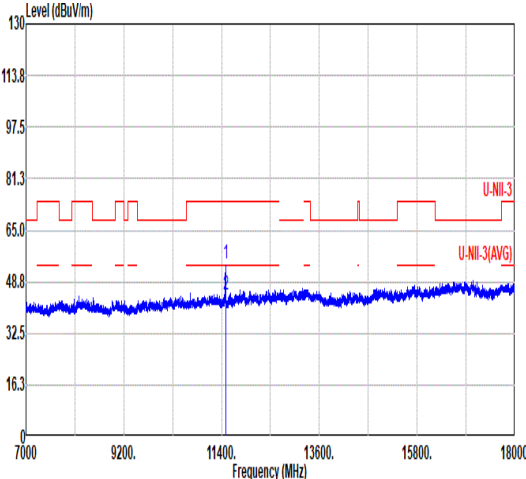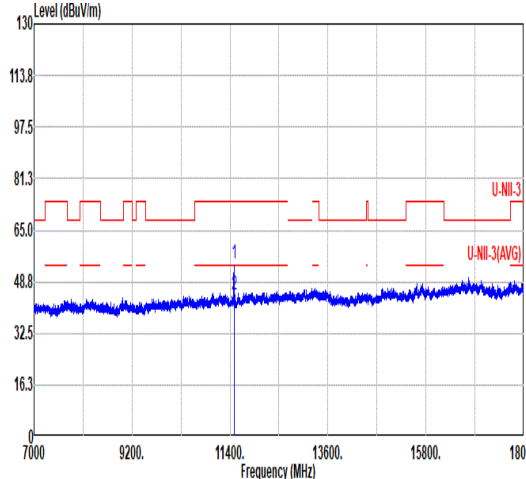

Mode	2																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																							
ANT	7																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11490.00</td><td>54.68</td><td>74.00</td><td>-19.32</td><td>67.17</td><td>38.09</td><td>16.12</td><td>66.70</td><td>0.00</td><td>119</td><td>339 PEAK</td></tr><tr><td>2 11490.00</td><td>44.76</td><td>54.00</td><td>-9.24</td><td>57.25</td><td>38.09</td><td>16.12</td><td>66.70</td><td>0.00</td><td>119</td><td>339 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11490.00	54.68	74.00	-19.32	67.17	38.09	16.12	66.70	0.00	119	339 PEAK	2 11490.00	44.76	54.00	-9.24	57.25	38.09	16.12	66.70	0.00	119	339 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11490.00</td><td>54.48</td><td>74.00</td><td>-19.52</td><td>66.97</td><td>38.09</td><td>16.12</td><td>66.70</td><td>0.00</td><td>100</td><td>316 PEAK</td></tr><tr><td>2 11490.00</td><td>44.83</td><td>54.00</td><td>-9.17</td><td>57.32</td><td>38.09</td><td>16.12</td><td>66.70</td><td>0.00</td><td>100</td><td>316 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11490.00	54.48	74.00	-19.52	66.97	38.09	16.12	66.70	0.00	100	316 PEAK	2 11490.00	44.83	54.00	-9.17	57.32	38.09	16.12	66.70	0.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1 11490.00	54.68	74.00	-19.32	67.17	38.09	16.12	66.70	0.00	119	339 PEAK																																																																																																														
2 11490.00	44.76	54.00	-9.24	57.25	38.09	16.12	66.70	0.00	119	339 AVERAGE																																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1 11490.00	54.48	74.00	-19.52	66.97	38.09	16.12	66.70	0.00	100	316 PEAK																																																																																																														
2 11490.00	44.83	54.00	-9.17	57.32	38.09	16.12	66.70	0.00	100	316 AVERAGE																																																																																																														

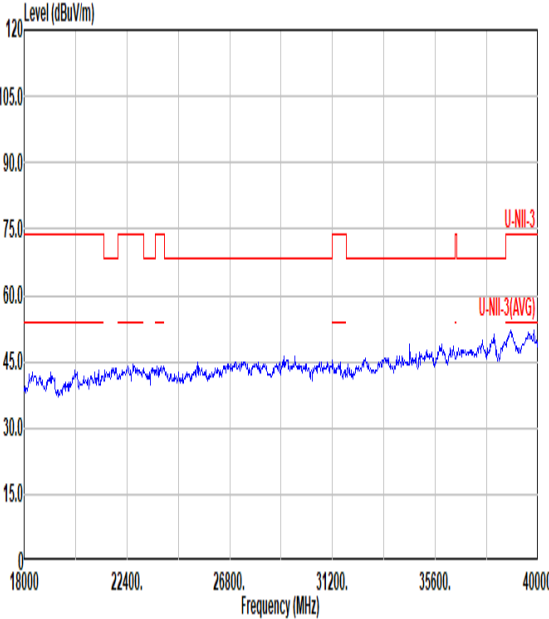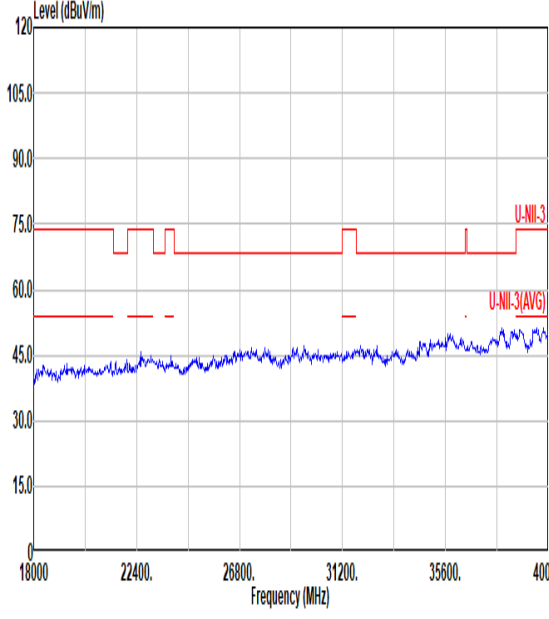

Mode	2	
	18-40G	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	7	
Pol.	Horizontal	Vertical
Peak Avg		




Mode	2																																																																																																																			
	LF																																																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																			
ANT	7																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak																																																																																																																				
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>100.81</td><td>25.11</td><td>43.50</td><td>-18.39</td><td>39.58</td><td>16.15</td><td>1.41</td><td>32.03</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>201.69</td><td>22.27</td><td>43.50</td><td>-21.23</td><td>37.35</td><td>14.99</td><td>2.00</td><td>32.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>343.31</td><td>22.85</td><td>46.00</td><td>-23.15</td><td>32.21</td><td>20.15</td><td>2.60</td><td>32.11</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>552.83</td><td>25.54</td><td>46.00</td><td>-20.46</td><td>28.68</td><td>25.87</td><td>3.31</td><td>32.32</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>849.65</td><td>29.53</td><td>46.00</td><td>-16.47</td><td>27.92</td><td>29.18</td><td>4.12</td><td>31.69</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>974.78</td><td>32.02</td><td>54.00</td><td>-21.98</td><td>27.31</td><td>31.03</td><td>4.41</td><td>30.73</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	100.81	25.11	43.50	-18.39	39.58	16.15	1.41	32.03	0.00	---	---	Peak	2	201.69	22.27	43.50	-21.23	37.35	14.99	2.00	32.07	0.00	---	---	Peak	3	343.31	22.85	46.00	-23.15	32.21	20.15	2.60	32.11	0.00	---	---	Peak	4	552.83	25.54	46.00	-20.46	28.68	25.87	3.31	32.32	0.00	---	---	Peak	5	849.65	29.53	46.00	-16.47	27.92	29.18	4.12	31.69	0.00	---	---	Peak	6	974.78	32.02	54.00	-21.98	27.31	31.03	4.41	30.73	0.00	---	---	Peak
		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	100.81	25.11	43.50	-18.39	39.58	16.15	1.41	32.03	0.00	---	---	Peak																																																																																																								
2	201.69	22.27	43.50	-21.23	37.35	14.99	2.00	32.07	0.00	---	---	Peak																																																																																																								
3	343.31	22.85	46.00	-23.15	32.21	20.15	2.60	32.11	0.00	---	---	Peak																																																																																																								
4	552.83	25.54	46.00	-20.46	28.68	25.87	3.31	32.32	0.00	---	---	Peak																																																																																																								
5	849.65	29.53	46.00	-16.47	27.92	29.18	4.12	31.69	0.00	---	---	Peak																																																																																																								
6	974.78	32.02	54.00	-21.98	27.31	31.03	4.41	30.73	0.00	---	---	Peak																																																																																																								
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>40.67</td><td>32.86</td><td>40.00</td><td>-7.14</td><td>44.98</td><td>19.33</td><td>0.62</td><td>32.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>92.08</td><td>23.43</td><td>43.50</td><td>-20.07</td><td>39.22</td><td>14.97</td><td>1.31</td><td>32.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>184.23</td><td>20.75</td><td>43.50</td><td>-22.75</td><td>36.18</td><td>14.73</td><td>1.90</td><td>32.06</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>291.90</td><td>18.88</td><td>46.00</td><td>-27.12</td><td>29.30</td><td>19.26</td><td>2.40</td><td>32.08</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>471.35</td><td>20.32</td><td>46.00</td><td>-25.68</td><td>26.04</td><td>23.44</td><td>3.06</td><td>32.22</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>745.86</td><td>27.59</td><td>46.00</td><td>-18.41</td><td>27.66</td><td>28.29</td><td>3.85</td><td>32.21</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	40.67	32.86	40.00	-7.14	44.98	19.33	0.62	32.07	0.00	---	---	Peak	2	92.08	23.43	43.50	-20.07	39.22	14.97	1.31	32.07	0.00	---	---	Peak	3	184.23	20.75	43.50	-22.75	36.18	14.73	1.90	32.06	0.00	---	---	Peak	4	291.90	18.88	46.00	-27.12	29.30	19.26	2.40	32.08	0.00	---	---	Peak	5	471.35	20.32	46.00	-25.68	26.04	23.44	3.06	32.22	0.00	---	---	Peak	6	745.86	27.59	46.00	-18.41	27.66	28.29	3.85	32.21	0.00	---	---	Peak	
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	40.67	32.86	40.00	-7.14	44.98	19.33	0.62	32.07	0.00	---	---	Peak																																																																																																								
2	92.08	23.43	43.50	-20.07	39.22	14.97	1.31	32.07	0.00	---	---	Peak																																																																																																								
3	184.23	20.75	43.50	-22.75	36.18	14.73	1.90	32.06	0.00	---	---	Peak																																																																																																								
4	291.90	18.88	46.00	-27.12	29.30	19.26	2.40	32.08	0.00	---	---	Peak																																																																																																								
5	471.35	20.32	46.00	-25.68	26.04	23.44	3.06	32.22	0.00	---	---	Peak																																																																																																								
6	745.86	27.59	46.00	-18.41	27.66	28.29	3.85	32.21	0.00	---	---	Peak																																																																																																								



Appendix B. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	88.22	1.385	0.722	0.75kHz
802.11ac VHT80	62.58	0.291	3.436	4kHz

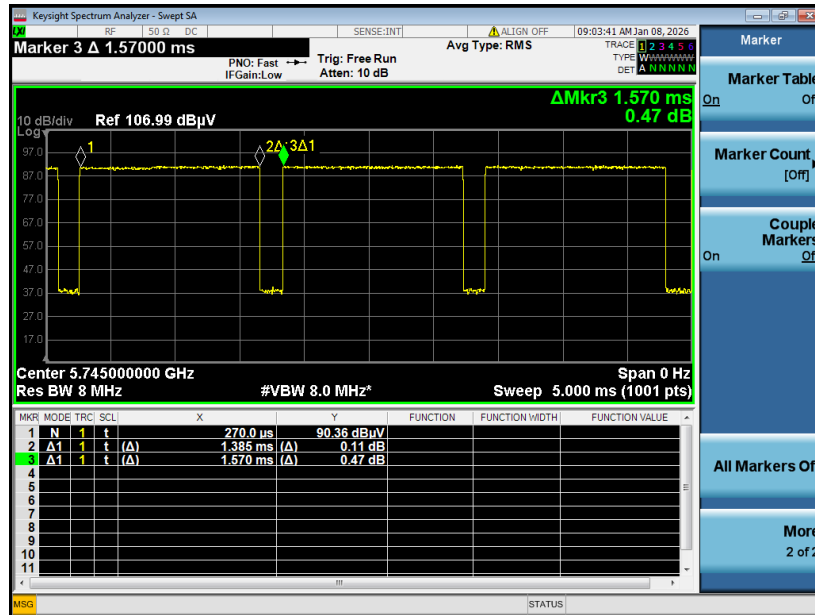802.11a**802.11ac VHT80**