

Ti-CC26040293-ATD
Meas.1 Right Head with Cheek on Low Channel in GPRS850 2Slots mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	GSM 850	GSM, 10024-DAC	824.2, 128	9.99	0.880	42.4	22.2	21.3

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-18	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1710,	2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-18	2025-06-18
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.845	0.831
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.552	0.538
Graded Grid	Yes	Yes	Power Drift [dB]	-0.04	-0.05
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		54.8
			Dist 3dB Peak [mm]		10.7

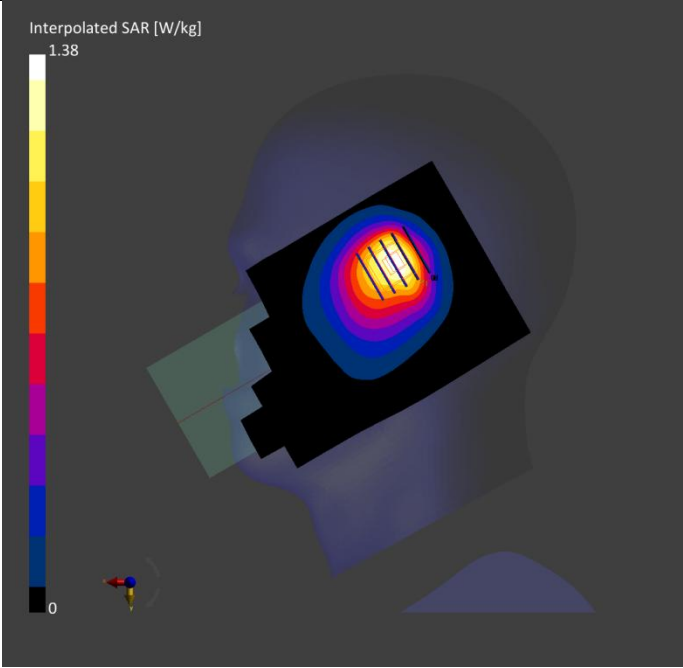

Ti-CC26040293-ATD

Meas.2 Body Plane with Back Side 5mm on Low Channel in GPRS850 2Slots mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	GSM 850	GSM, 10024-DAC	824.2, 128	9.99	0.880	42.4	22.2	21.3

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-18	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-18	2025-06-18
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.719	0.761
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.469	0.448
Graded Grid	Yes	Yes	Power Drift [dB]	0.01	0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		55.2
			Dist 3dB Peak [mm]		10.1

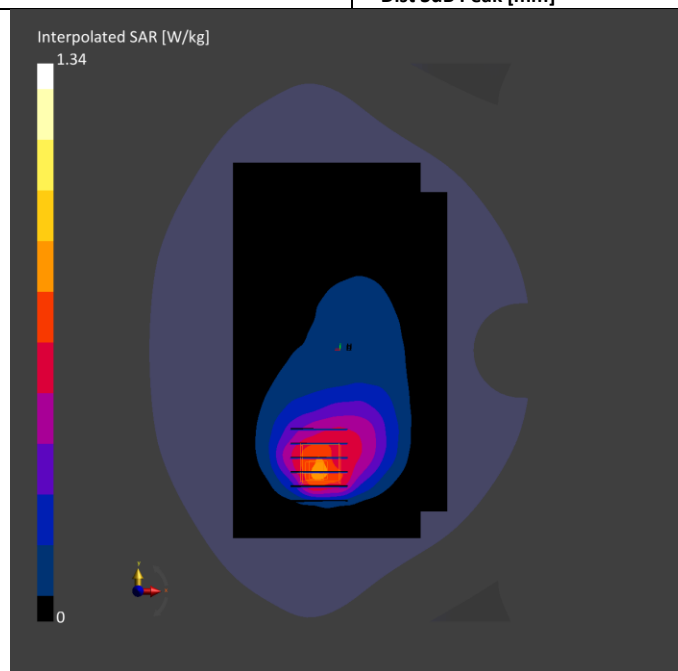


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	GSM 850	GSM, 10024-DAC	824.2, 128	9.99	0.880	42.4	22.2	21.3

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-18	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1710,	2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-18	2025-06-18
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.245	0.253
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.167	0.165
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		60.2
			Dist 3dB Peak [mm]		14.8

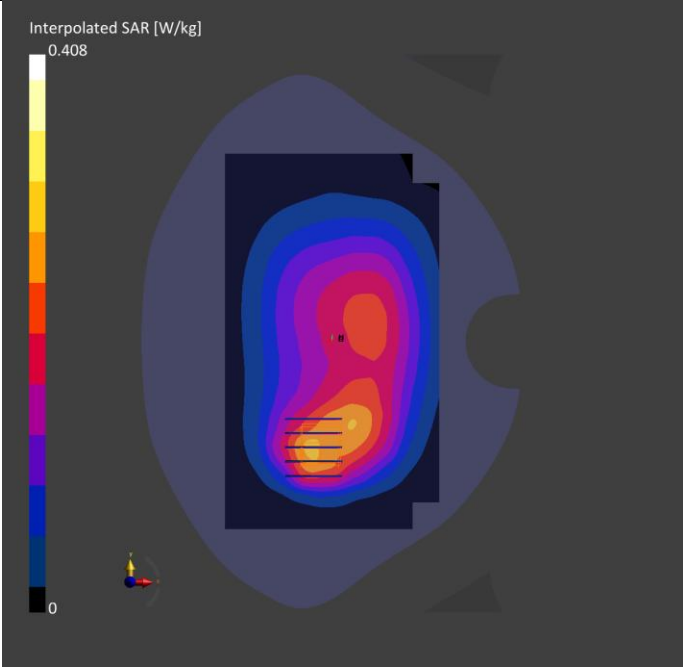

Ti-CC26040293-ATD

Meas.4 Right Head with Tilt on Low Channel in GPRS1900 3Slots mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	PCS 1900	GSM, 10027-DAC	1850.2, 512	7.34	1.36	41.4	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.497	0.701
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.277	0.350
Graded Grid	Yes	Yes	Power Drift [dB]	0.00	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		57.1
			Dist 3dB Peak [mm]		8.4

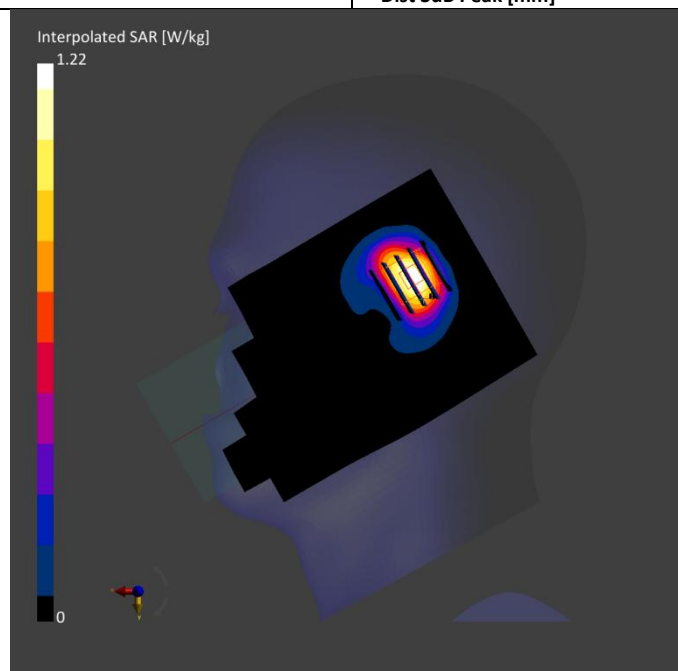

Ti-CC26040293-ATD
Meas.5 Body Plane with Back Side 5mm on Low Channel in GPRS1900 3Slots mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	PCS 1900	GSM, 10027-DAC	1850.2, 512	7.34	1.36	41.4	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-06	EX3DV4 - SN7893,	2024-09-05	DAE4 Sn878,	2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.698	0.729
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.347	0.366
Graded Grid	Yes	Yes	Power Drift [dB]	0.01	0.00
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		57.5
			Dist 3dB Peak [mm]		8.0

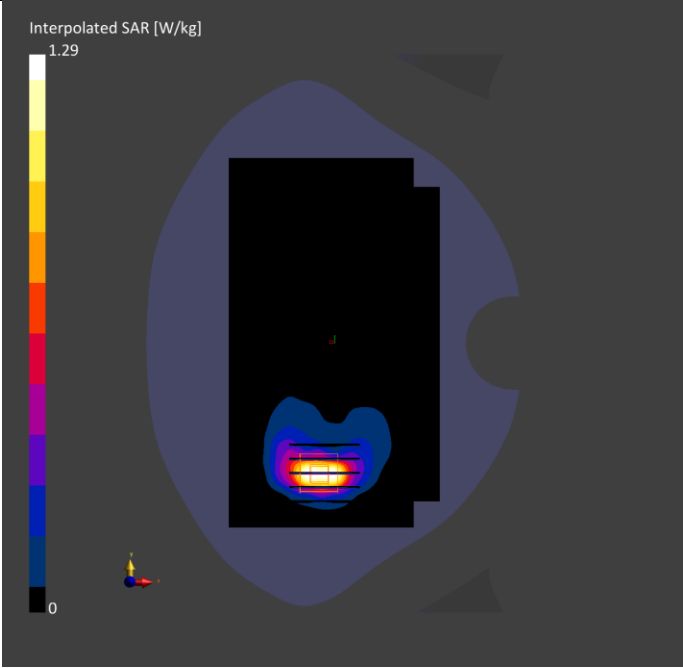

Ti-CC26040293-ATD

Meas.6 Body Plane with Bottom Edge 10mm on Middle Channel in GPRS1900 3Slots mode with Antenna 1


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 10.00	PCS 1900	GSM, 10027-DAC	1880.0, 661	7.34	1.39	40.7	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.658	0.714
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.359	0.410
Graded Grid	Yes	Yes	Power Drift [dB]	-0.08	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		62.6
			Dist 3dB Peak [mm]		11.2

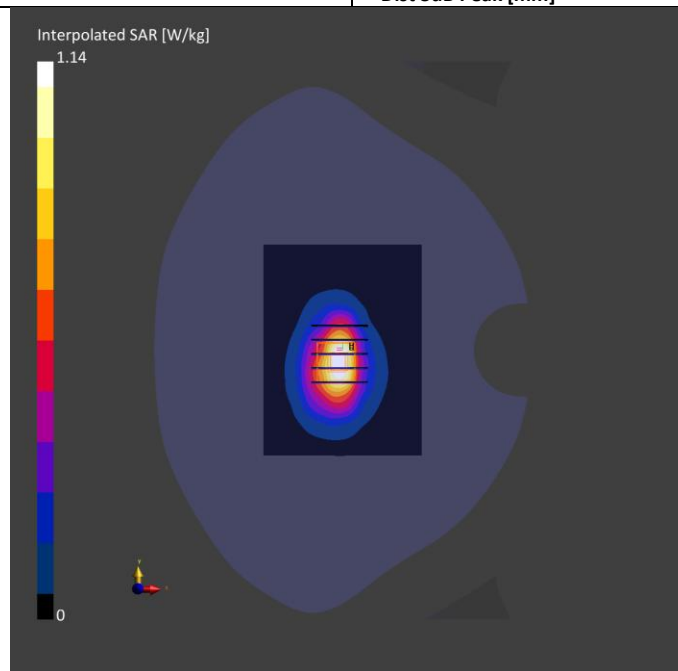

Ti-CC26040293-ATD
Meas.7 Right Head with Tilt on Low Channel in WCDMA Band2 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band 2	WCDMA, 10457-AAB	1852.4, 9262	7.34	1.39	41.0	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.538	0.733
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.296	0.368
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		57.5
			Dist 3dB Peak [mm]		8.2

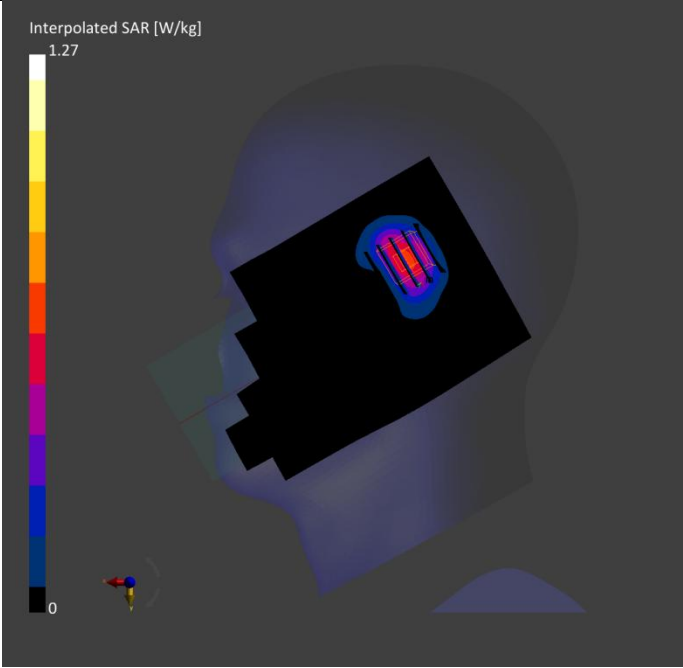


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 2	WCDMA, 10457-AAB	1852.4, 9262	7.34	1.39	41.0	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.606	0.654
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.304	0.328
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	-0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		54.3
			Dist 3dB Peak [mm]		8.4

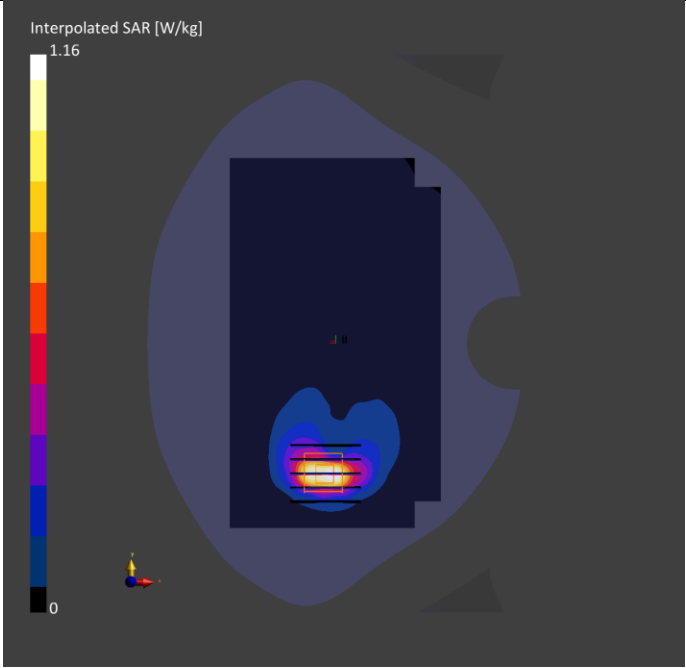


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 10.00	Band 2	WCDMA, 10457-AAB	1907.6, 9538	7.34	1.41	40.5	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.346	0.370
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.186	0.212
Graded Grid	Yes	Yes	Power Drift [dB]	0.04	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		62.0
			Dist 3dB Peak [mm]		11.2

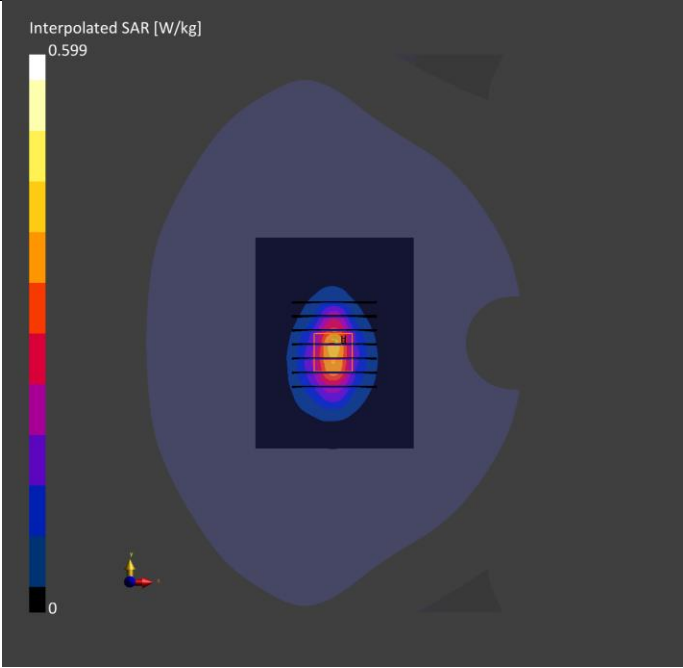

Ti-CC26040293-ATD

Meas.10 Body Plane with Bottom Edge 0mm on High Channel in WCDMA Band2 mode with Antenna 1


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 0.00	Band 2	WCDMA, 10457-AAB	1907.6, 9538	7.34	1.41	40.5	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	2.01	2.33
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.969	1.17
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		50.8
			Dist 3dB Peak [mm]		8.0

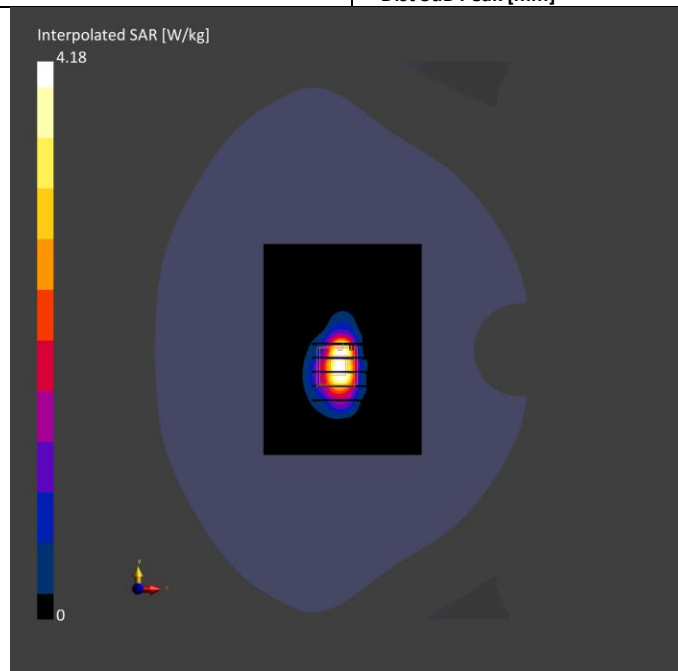

Ti-CC26040293-ATD

Meas.11 Right Head with Tilt on Low Channel in WCDMA Band4 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band 4	WCDMA, 10457-AAB	1712.4, 1312	8.67	1.33	41.0	22.1	21.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-19	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-19	2025-06-19
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.402	0.580
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.223	0.287
Graded Grid	Yes	Yes	Power Drift [dB]	-0.02	0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		58.1
			Dist 3dB Peak [mm]		8.5

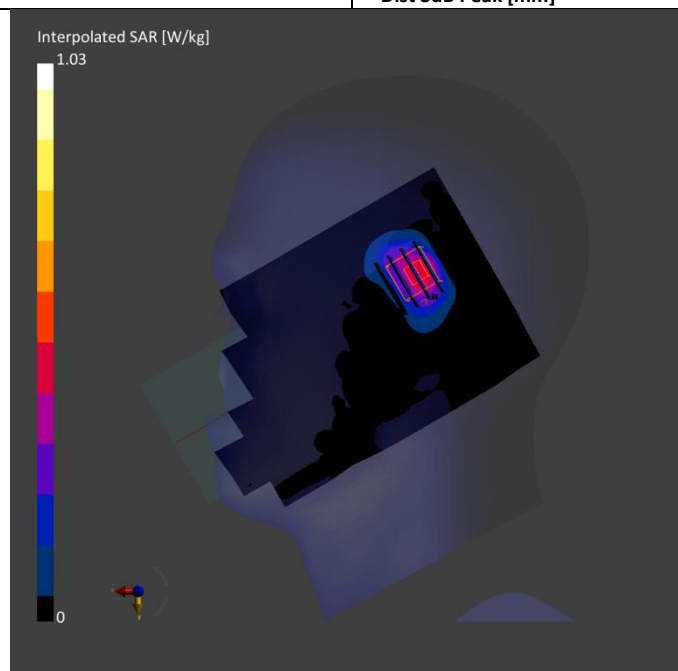

Ti-CC26040293-ATD

Meas.12 Body Plane with Back Side 5mm on Low Channel in WCDMA Band4 mode with Antenna 1


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 4	WCDMA, 10457-AAB	1712.4, 1312	8.67	1.33	41.0	22.1	21.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-19	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-19	2025-06-19
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.530	0.588
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.286	0.331
Graded Grid	Yes	Yes	Power Drift [dB]	-0.03	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		60.0
			Dist 3dB Peak [mm]		9.3

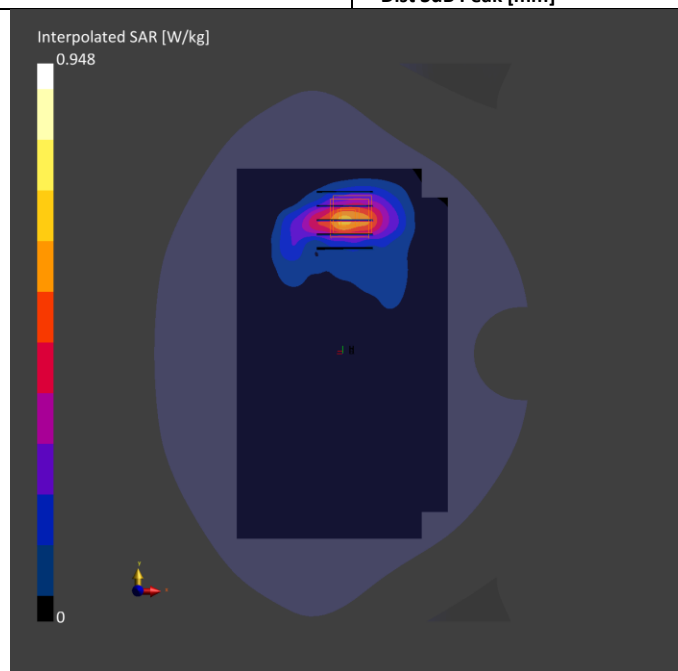

Ti-CC26040293-ATD

Meas.13 Body Plane with Bottom Edge 10mm on Low Channel in WCDMA Band4 mode with Antenna 1


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 10.00	Band 4	WCDMA, 10457-AAB	1732.4, 1412	8.67	1.34	40.4	22.1	21.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-19	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-19	2025-06-19
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.351	0.382
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.190	0.219
Graded Grid	Yes	Yes	Power Drift [dB]	0.13	0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		61.7
			Dist 3dB Peak [mm]		11.2

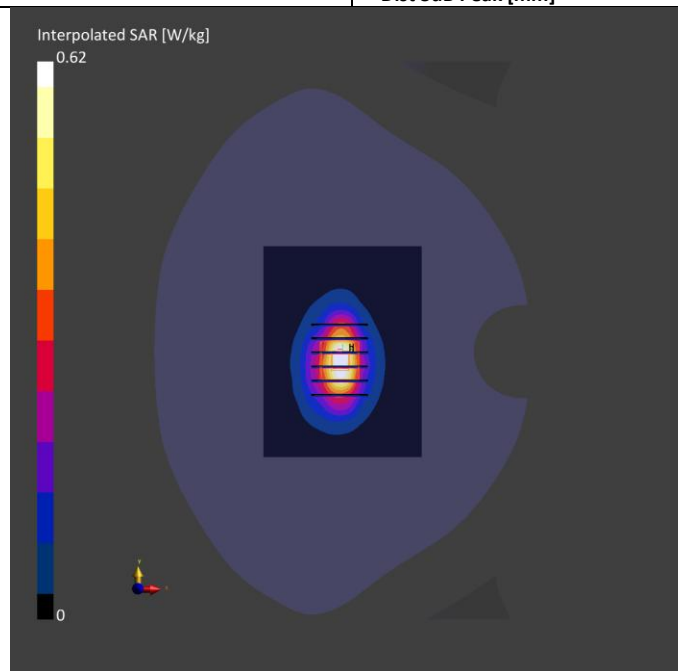

Ti-CC26040293-ATD

Meas.14 Body Plane with Bottom Edge 0mm on Low Channel in WCDMA Band4 mode with Antenna 1


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 0.00	Band 4	WCDMA, 10457-AAB	1712.4, 1312	8.67	1.33	41.0	22.1	21.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-19	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-19	2025-06-19
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	1.62	1.96
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.813	0.920
Graded Grid	Yes	Yes	Power Drift [dB]	0.00	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		51.6
			Dist 3dB Peak [mm]		8.0

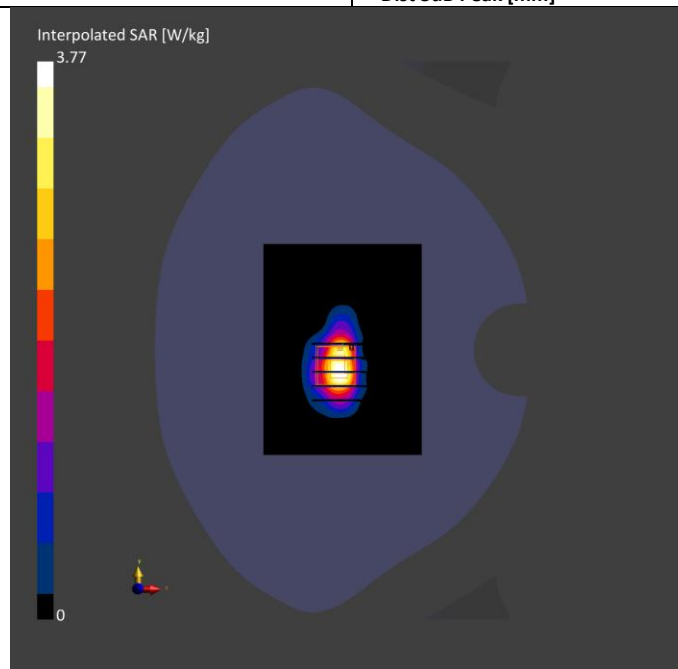

Ti-CC26040293-ATD

Meas.15 Right Head with Cheek on High Channel in WCDMA Band5 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 5	WCDMA, 10457-AAB	846.6, 4233	9.99	0.925	40.3	22.2	21.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-18	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-06-18	2025-06-18
psSAR1g [W/kg]	0.718	0.730
psSAR10g [W/kg]	0.467	0.463
Power Drift [dB]	-0.11	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.2
Dist 3dB Peak [mm]		11.5

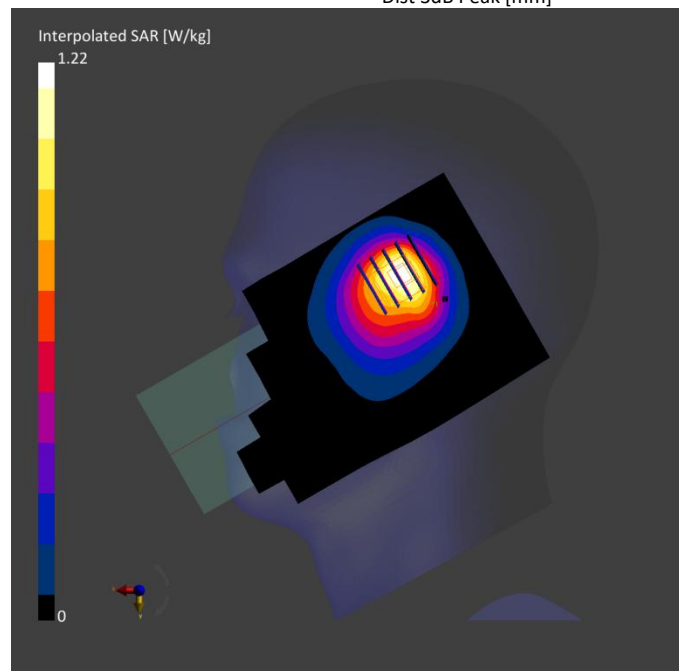

Ti-CC26040293-ATD

Meas.16 Body Plane with Back Side 5mm on High Channel in WCDMA Band5 mode with Antenna 1


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 5	WCDMA, 10457-AAB	846.6, 4233	9.99	0.925	40.3	22.2	21.3

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-18	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-18	2025-06-18
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.756	0.763
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.459	0.421
Graded Grid	Yes	Yes	Power Drift [dB]	-0.05	-0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		48.9
			Dist 3dB Peak [mm]		9.6

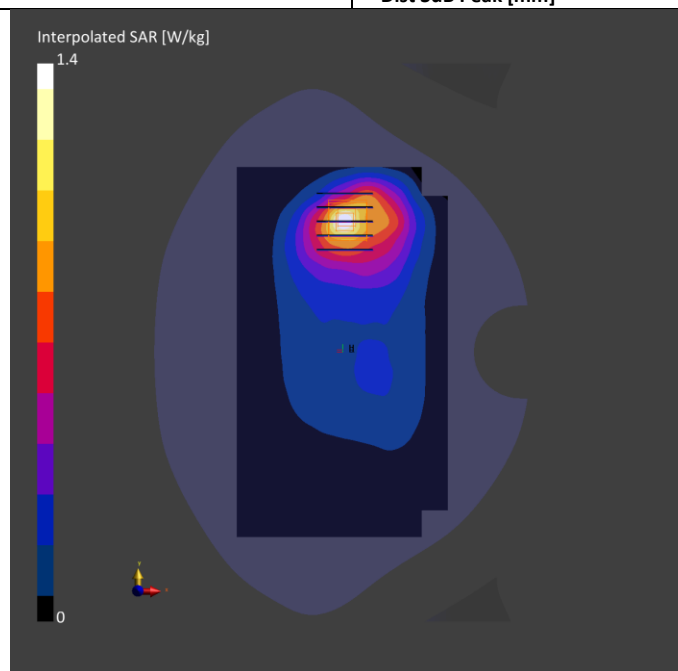


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 5	WCDMA, 10457-AAB	846.6, 4233	9.99	0.925	40.3	22.2	21.3

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-18	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1710,	2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-18	2025-06-18
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.304	0.303
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.190	0.176
Graded Grid	Yes	Yes	Power Drift [dB]	-0.07	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		57.8
			Dist 3dB Peak [mm]		13.7

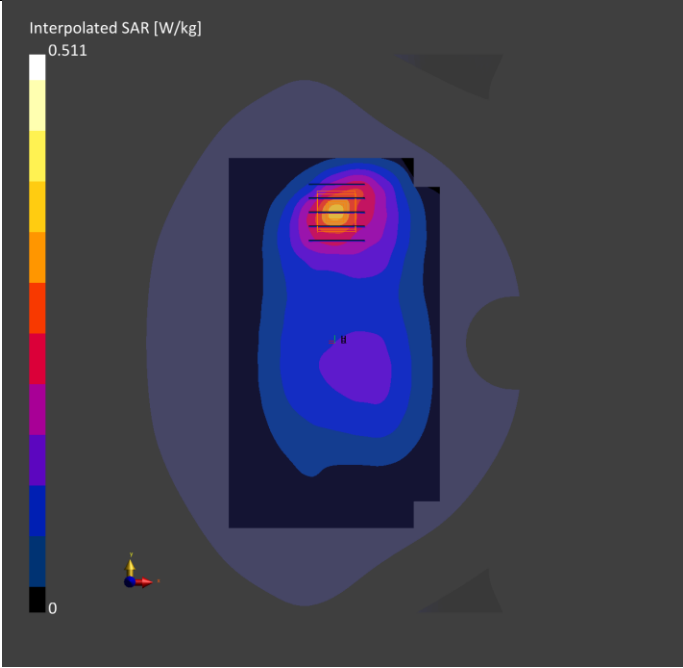

Ti-CC26040293-ATD

Meas.18 Right Head with Tilt on Low Channel in LTE Band2 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band 2	LTE-FDD, 10169-CAF	1860.0, 18700	8.35	1.35	41.2	22.4	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-17	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-17	2026-05-17
psSAR1g [W/kg]	0.627	0.710
psSAR10g [W/kg]	0.296	0.352
Power Drift [dB]	-0.07	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		62.9
Dist 3dB Peak [mm]		10.2

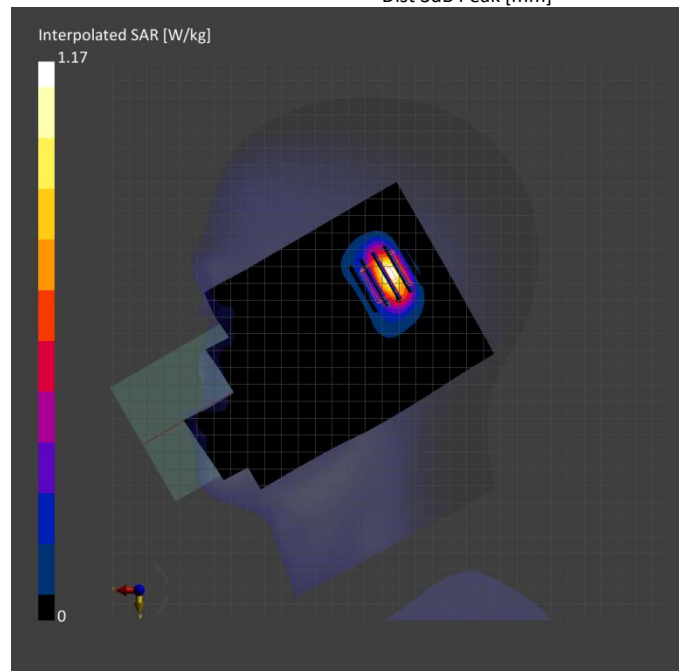

Ti-CC26040293-ATD

Meas.19 Body Plane with Back Side 5mm on Middle Channel in LTE Band2 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 2	LTE-FDD, 10169-CAF	1880.0, 18900	8.35	1.39	40.6	22.4	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-17	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-17	2026-05-17
psSAR1g [W/kg]	0.821	0.833
psSAR10g [W/kg]	0.333	0.345
Power Drift [dB]	-0.02	-0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		54.3
Dist 3dB Peak [mm]		8.4

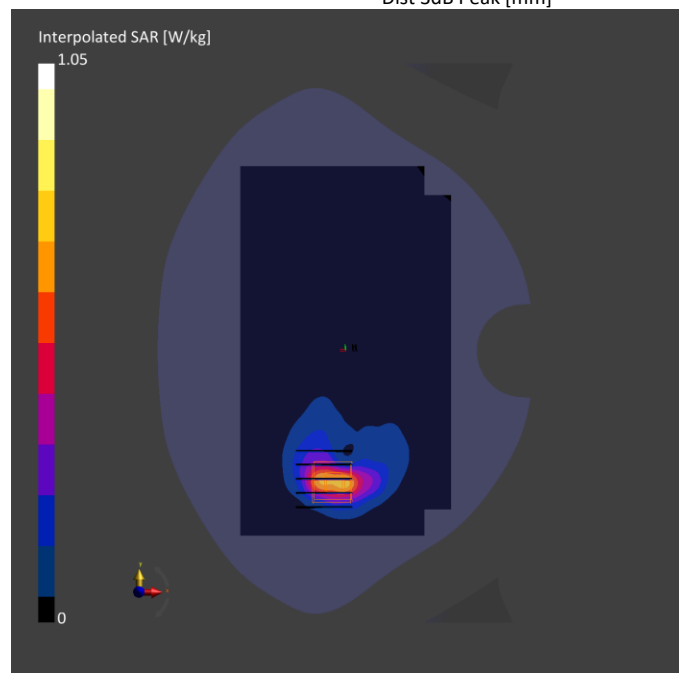

Ti-CC26040293-ATD
 Meas.20 Body Plane with Top Edge 10mm on Middle Channel in LTE Band2 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 10.00	Band 2	LTE-FDD, 10169-CAF	1880.0, 18900	7.34	1.37	39.9	22.2	21.6

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-07	2025-06-07
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.397	0.424
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.200	0.224
Graded Grid	Yes	Yes	Power Drift [dB]	0.03	0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		58.7
			Dist 3dB Peak [mm]		9.6

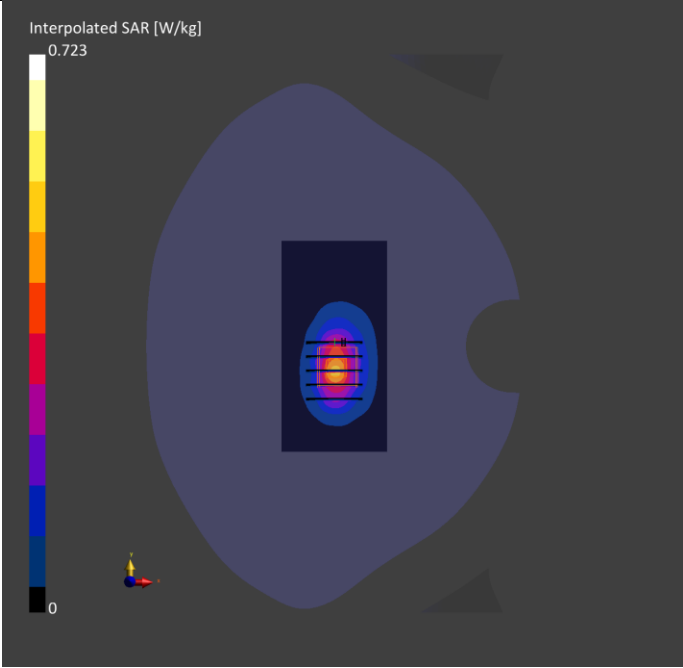

Ti-CC26040293-ATD

Meas.21 Body Plane with Bottom Edge 0mm on Middle Channel in LTE Band2 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 0.00	Band 2	LTE-FDD, 10169-CAF	1880.0, 18900	8.35	1.39	40.6	22.4	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-17	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-17	2026-05-17
psSAR1g [W/kg]	2.49	2.35
psSAR10g [W/kg]	1.18	1.12
Power Drift [dB]	0.02	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		46.1
Dist 3dB Peak [mm]		9.1

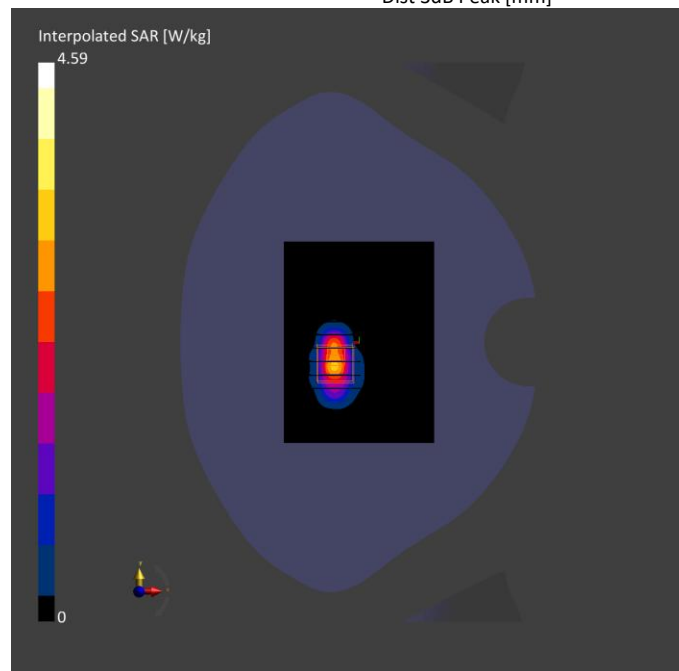

Ti-CC26040293-ATD

Meas.22 Right Head with Tilt on Low Channel in LTE Band4 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band 4	LTE-FDD, 10169-CAF	1720.0, 20050	8.72	1.32	40.8	22.5	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-12	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-12	2026-05-12
psSAR1g [W/kg]	0.683	0.760
psSAR10g [W/kg]	0.317	0.380
Power Drift [dB]	-0.10	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.9
Dist 3dB Peak [mm]		8.6

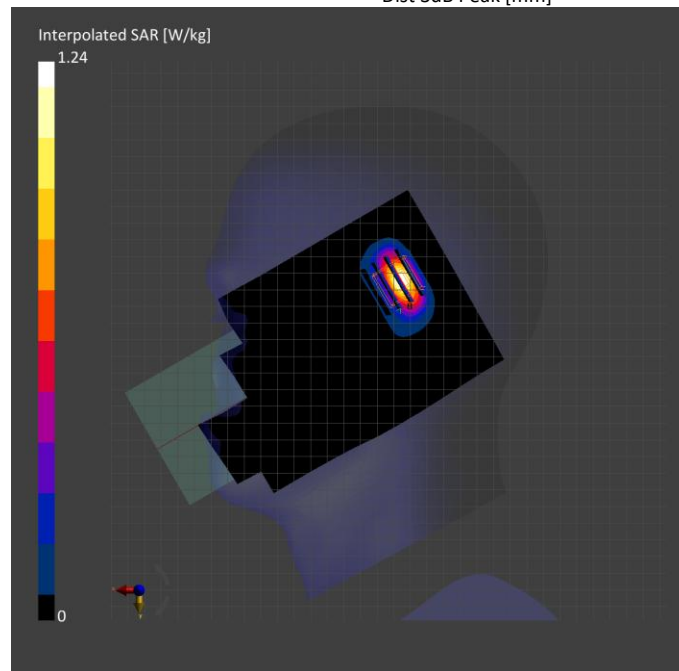

Ti-CC26040293-ATD

Meas.23 Body Plane with Back Side 5mm on Middle Channel in LTE Band4 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 4	LTE-FDD, 10169-CAF	1732.5, 20175	8.72	1.35	40.7	22.5	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-12	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-12	2026-05-12
psSAR1g [W/kg]	0.465	0.474
psSAR10g [W/kg]	0.259	0.277
Power Drift [dB]	-0.11	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.2
Dist 3dB Peak [mm]		9.6

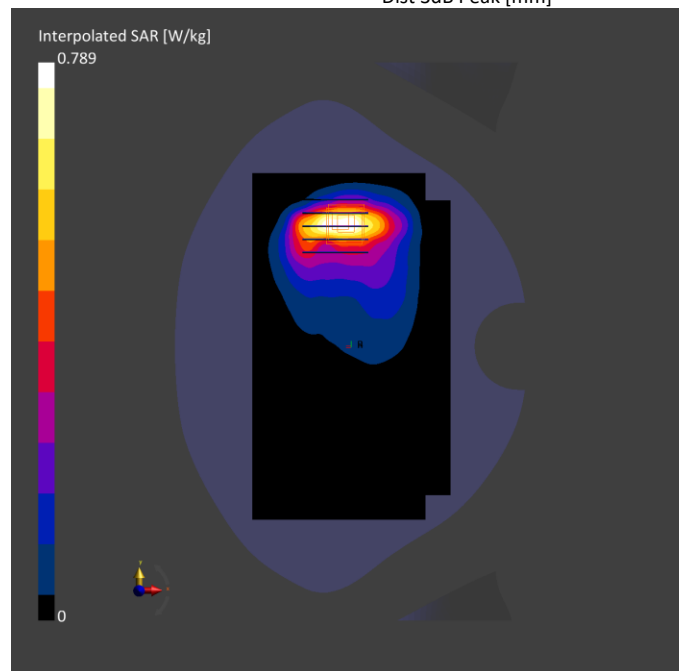

Ti-CC26040293-ATD

Meas.24 Body Plane with Bottom Edge 10mm on Middle Channel in LTE Band4 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 10.00	Band 4	LTE-FDD, 10169-CAF	1732.5, 20175	8.72	1.35	40.7	22.5	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-12	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-12	2026-05-12
psSAR1g [W/kg]	0.296	0.312
psSAR10g [W/kg]	0.163	0.177
Power Drift [dB]	0.07	0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction		No correction
M2/M1 [%]		63.1
Dist 3dB Peak [mm]		11.2

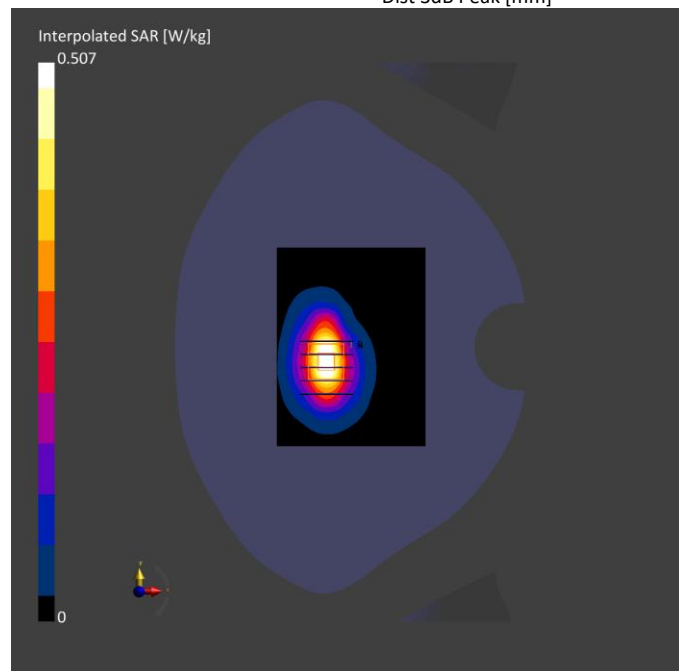

Ti-CC26040293-ATD

Meas.25 Body Plane with Bottom Edge 0mm on Middle Channel in LTE Band4 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 0.00	Band 4	LTE-FDD, 10169-CAF	1732.5, 20175	8.72	1.35	40.7	22.5	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-12	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-12	2026-05-12
psSAR1g [W/kg]	2.17	2.18
psSAR10g [W/kg]	1.04	1.02
Power Drift [dB]	0.12	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.2
Dist 3dB Peak [mm]		11.4

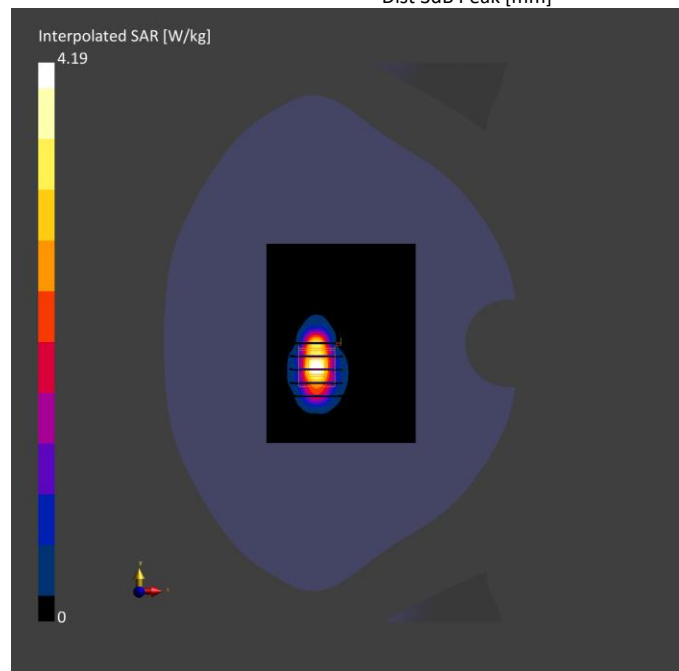

Ti-CC26040293-ATD

Meas.26 Right Head with Cheek on Middle Channel in LTE Band5 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 5	LTE-FDD, 10175-CAH	836.5, 20525	9.99	0.920	42.1	22.6	21.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-16	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-16	2025-06-16
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.739	0.780
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.504	0.533
Graded Grid	Yes	Yes	Power Drift [dB]	0.11	-0.06
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		63.8
			Dist 3dB Peak [mm]		13.6

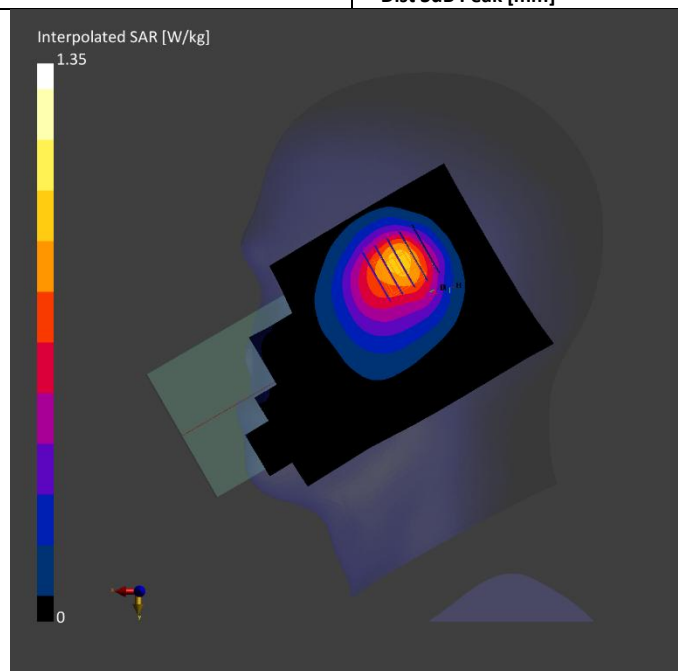

Ti-CC26040293-ATD
Meas.27 Body Plane with Back Side 5mm on Middle Channel in LTE Band5 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 5	LTE-FDD, 10175-CAH	836.5, 20525	9.99	0.920	42.1	22.6	21.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-16	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-06-16	2025-06-16
psSAR1g [W/kg]	0.736	0.763
psSAR10g [W/kg]	0.483	0.447
Power Drift [dB]	-0.03	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		55.5
Dist 3dB Peak [mm]		8.6

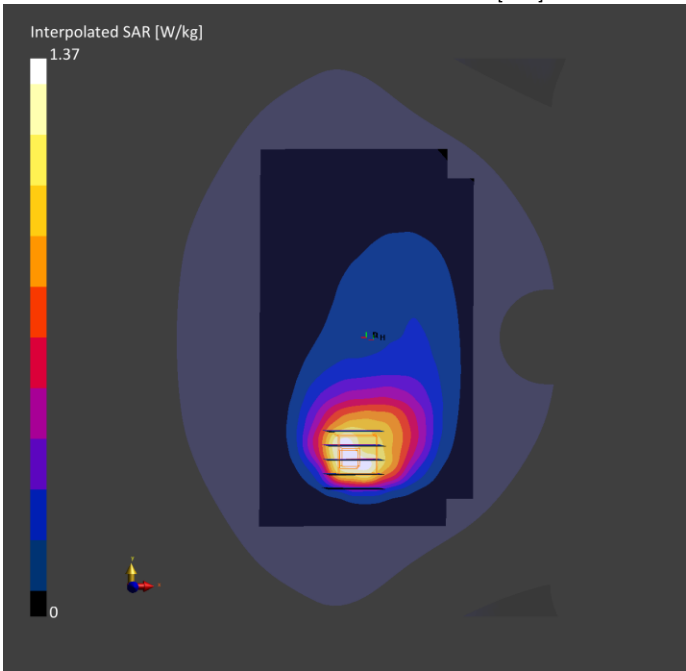

Meas.28 Body Plane with Back Side 10mm on Middle Channel in LTE Band5 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 5	LTE-FDD, 10175-CAH	836.5, 20525	9.99	0.920	42.1	22.6	21.8

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-16	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1710,	2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-16	2025-06-16
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.255	0.249
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.169	0.157
Graded Grid	Yes	Yes	Power Drift [dB]	-0.02	-0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		61.7
			Dist 3dB Peak [mm]		14.8

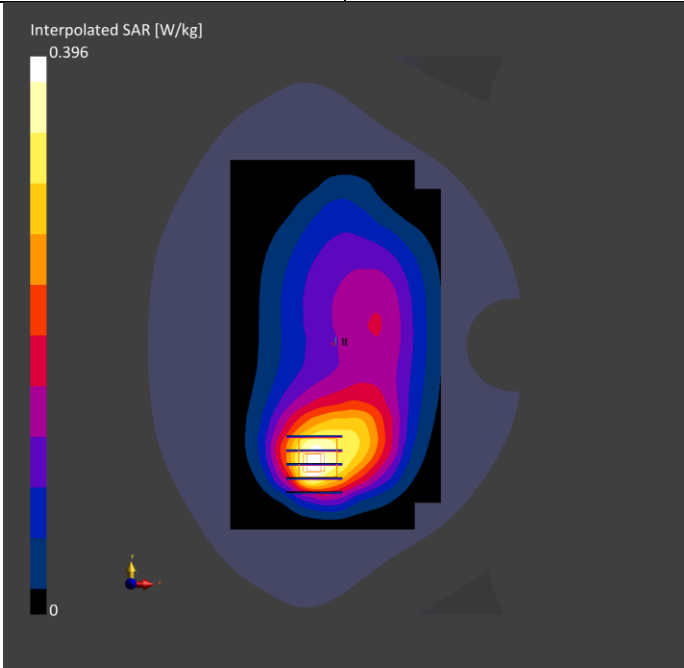

Ti-CC26040293-ATD
 Meas.29 Right Head with Tilt on Low Channel in LTE Band7 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band 7	LTE-FDD, 10169-CAF	2510.0, 20850	7.06	1.84	39.4	22.5	21.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-12	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0	Date	2025-06-12	2025-06-12
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.647	0.850
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.324	0.399
Graded Grid	Yes	Yes	Power Drift [dB]	-0.04	-0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		59.9
			Dist 3dB Peak [mm]		7.0

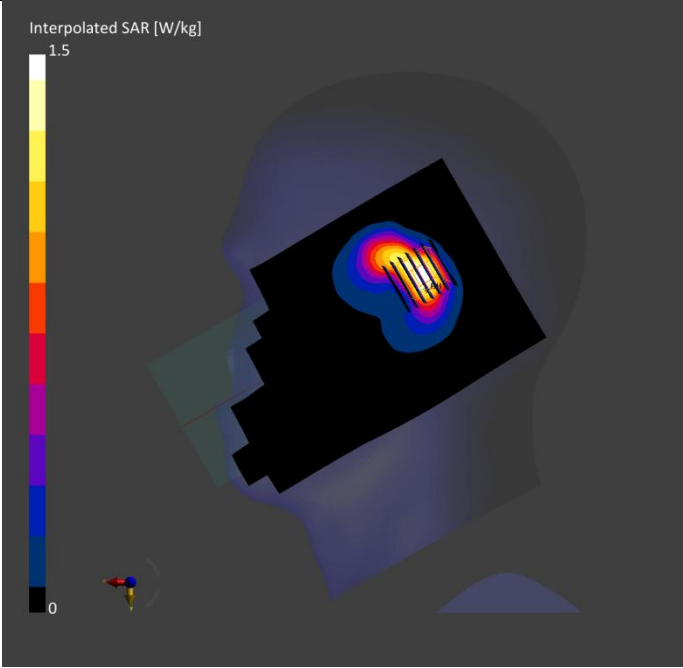

Ti-CC26040293-ATD

Meas.30 Body Plane with Back Side 5mm on High Channel in LTE Band7 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 7	LTE-FDD, 10169-CAF	2560.0, 21350	7.64	1.89	39.6	22.6	21.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-19	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-19	2026-05-19
psSAR1g [W/kg]	0.769	0.801
psSAR10g [W/kg]	0.408	0.442
Power Drift [dB]	-0.05	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		50.5
Dist 3dB Peak [mm]		7.2

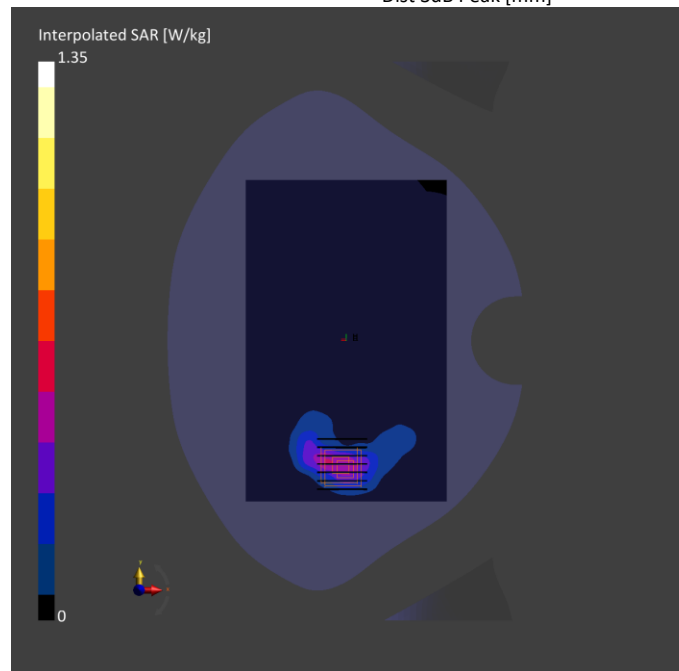

Ti-CC26040293-ATD

Meas.31 Body Plane with Top Edge 10mm on Middle Channel in LTE Band7 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 10.00	Band 7	LTE-FDD, 10169-CAF	2535.0, 21100	7.64	1.85	39.9	22.6	21.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-19	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-19	2026-05-19
psSAR1g [W/kg]	0.452	0.440
psSAR10g [W/kg]	0.225	0.206
Power Drift [dB]	-0.02	0.13
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.1
Dist 3dB Peak [mm]		8.1

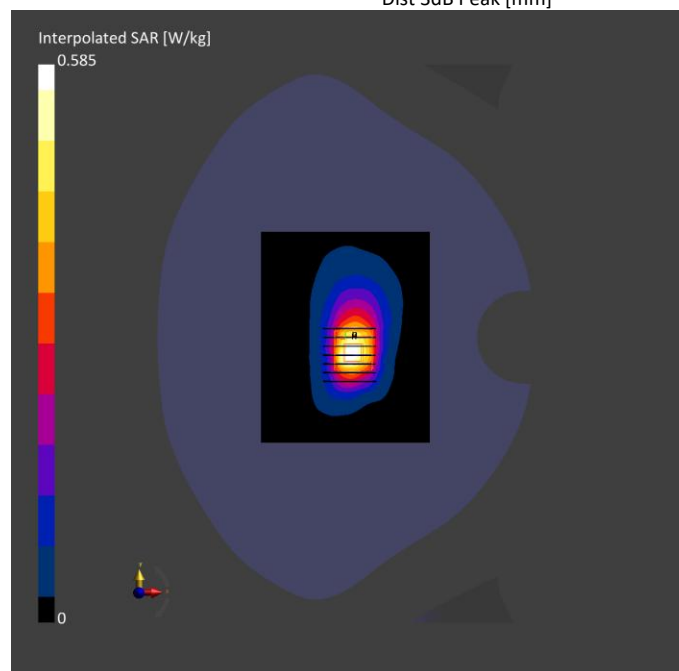

Ti-CC26040293-ATD

Meas.32 Body Plane with Top Edge 0mm on Middle Channel in LTE Band7 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 0.00	Band 7	LTE-FDD, 10169-CAF	2535.0, 21100	7.64	1.85	39.9	22.6	21.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-19	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-19	2026-05-19
psSAR1g [W/kg]	2.53	3.69
psSAR10g [W/kg]	0.858	1.17
Power Drift [dB]	-0.02	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		42.7
Dist 3dB Peak [mm]		5.9

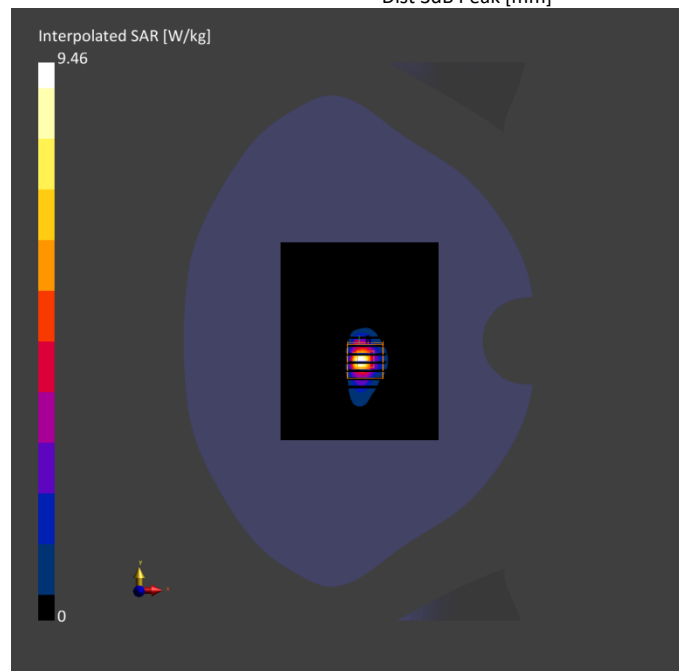

Ti-CC26040293-ATD

Meas.33 Right Head with Cheek on Middle Channel in LTE Band12 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 12	LTE-FDD, 10175-CAH	707.5, 23095	10.29	0.868	41.8	22.1	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-08	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-08	2025-06-08
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.639	0.650
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.420	0.396
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	-0.06
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		48.0
			Dist 3dB Peak [mm]		10.2

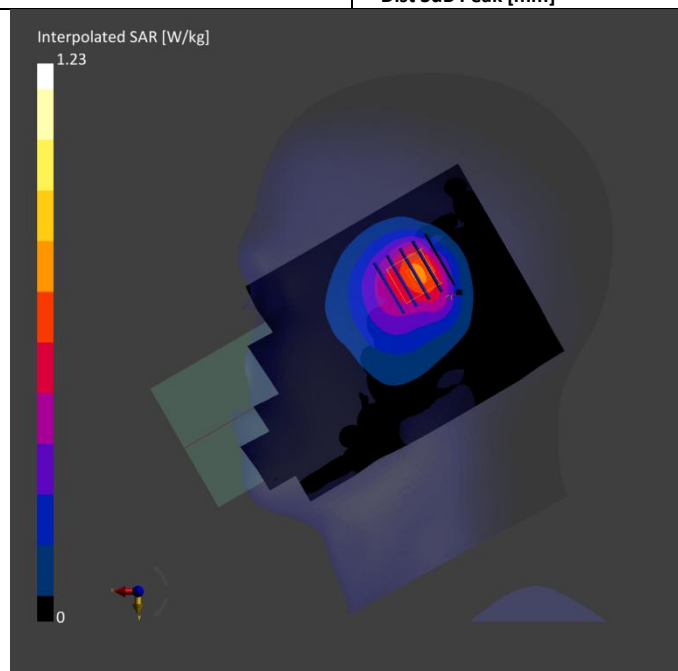


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 12	LTE-FDD, 10175-CAH	707.5, 23095	10.29	0.868	41.8	22.1	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-08	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1710,	2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-08	2025-06-08
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.497	0.520
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.326	0.293
Graded Grid	Yes	Yes	Power Drift [dB]	-0.11	-0.05
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		50.4
			Dist 3dB Peak [mm]		8.6

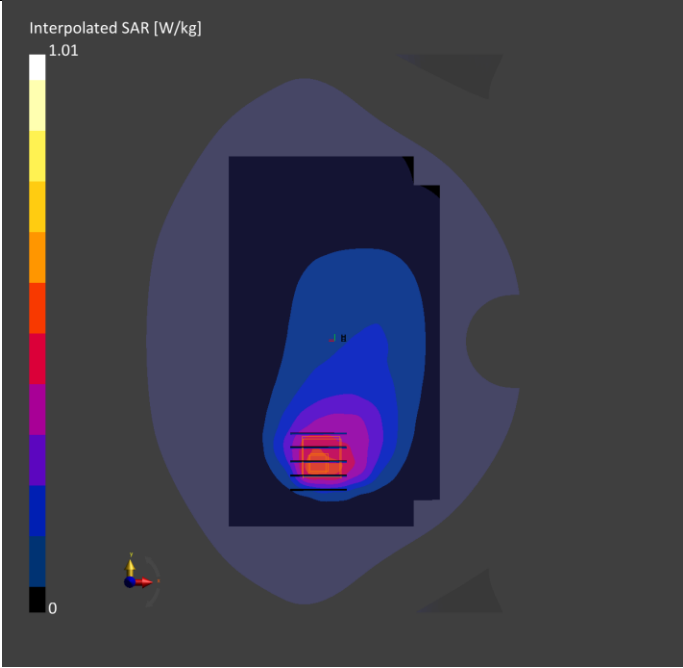


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 12	LTE-FDD, 10175-CAH	707.5, 23095	10.29	0.868	41.8	22.1	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-08	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-08	2025-06-08
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.190	0.183
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.130	0.124
Graded Grid	Yes	Yes	Power Drift [dB]	0.01	0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		60.5
			Dist 3dB Peak [mm]		14.8

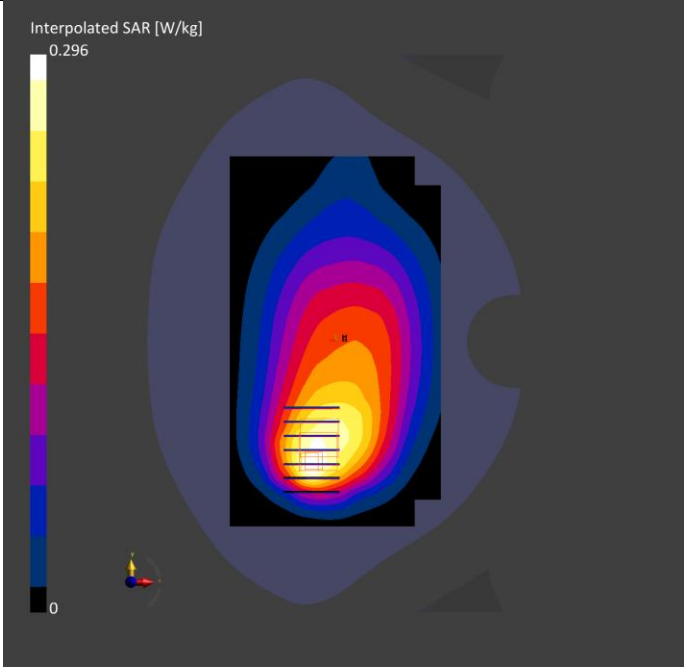

Ti-CC26040293-ATD

Meas.36 Right Head with Cheek on Middle Channel in LTE Band13 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 13	LTE-FDD, 10175-CAH	782.0, 23230	10.29	0.919	40.4	22.5	21.6

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-09	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-09	2025-06-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.776	0.796
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.500	0.473
Graded Grid	Yes	Yes	Power Drift [dB]	-0.03	-0.06
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		44.6
			Dist 3dB Peak [mm]		9.7

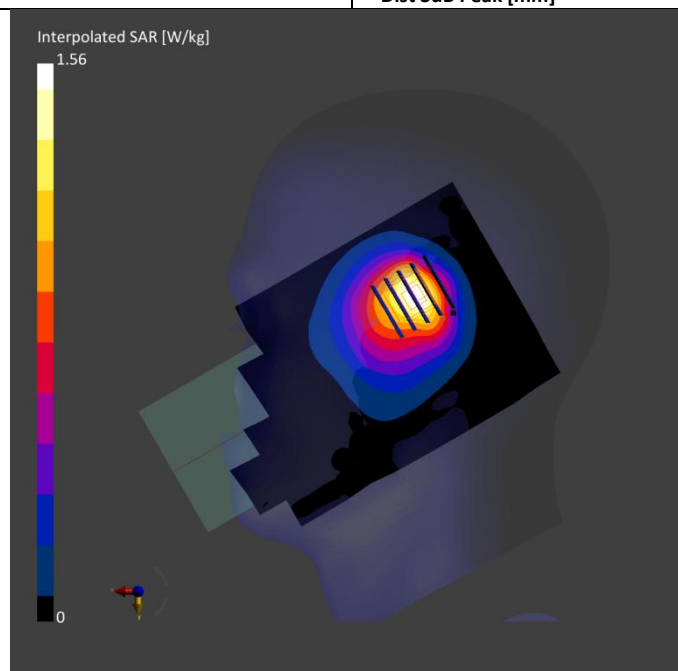

Ti-CC26040293-ATD
Meas.37 Body Plane with Back Side 5mm on Middle Channel in LTE Band 13 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 13	LTE-FDD, 10175-CAH	782.0, 23230	10.29	0.919	40.4	22.5	21.6

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-09	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1710,	2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-09	2025-06-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.701	0.750
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.454	0.409
Graded Grid	Yes	Yes	Power Drift [dB]	-0.03	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		50.0
			Dist 3dB Peak [mm]		8.0

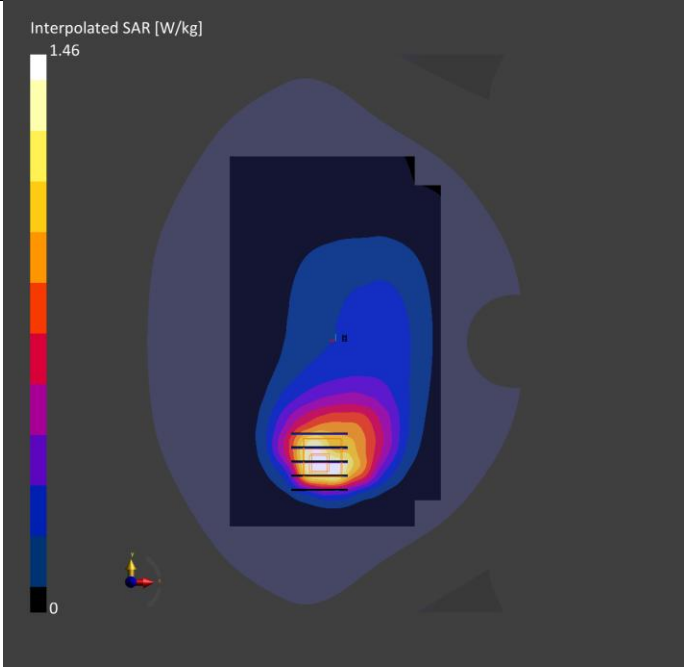


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 13	LTE-FDD, 10175-CAH	782.0, 23230	10.29	0.919	40.4	22.5	21.6

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-09	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-09	2025-06-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.239	0.231
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.158	0.143
Graded Grid	Yes	Yes	Power Drift [dB]	-0.02	-0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		56.3
			Dist 3dB Peak [mm]		13.6

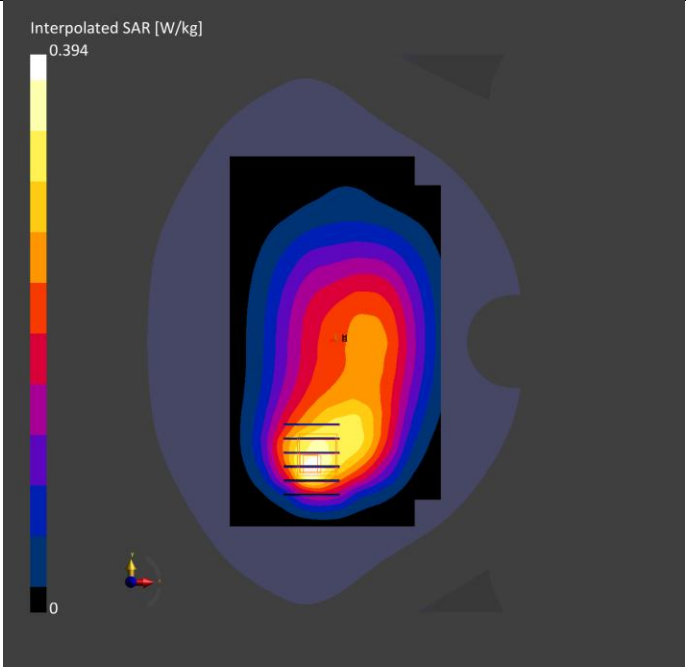

Ti-CC26040293-ATD

Meas.39 Right Head with Cheek on Middle Channel in LTE Band17 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 17	LTE-FDD, 10175-CAH	710.0, 23790	10.29	0.886	41.9	22.1	21.3

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-10	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-10	2025-06-10
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.644	0.668
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.423	0.401
Graded Grid	Yes	Yes	Power Drift [dB]	0.01	-0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		46.2
			Dist 3dB Peak [mm]		10.2

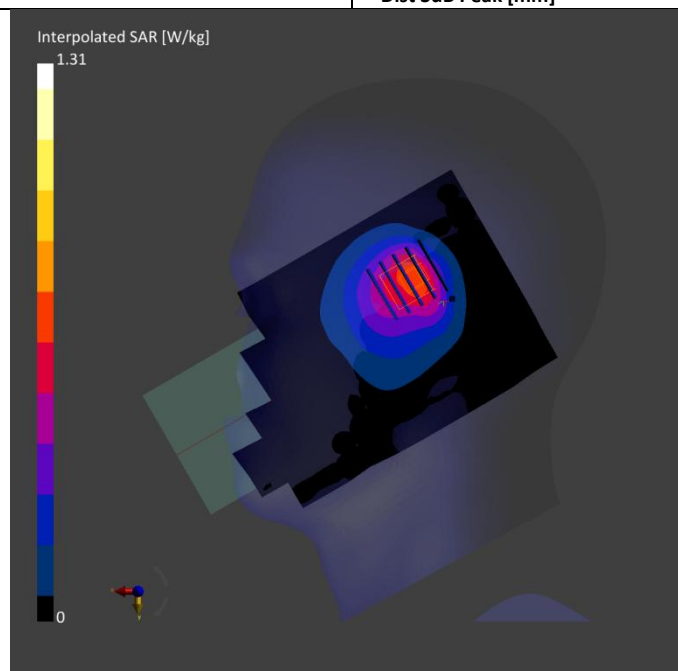

Ti-CC26040293-ATD
Meas.40 Body Plane with Back Side 5mm on Middle Channel in LTE Band 17 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 17	LTE-FDD, 10175-CAH	710.0, 23790	10.29	0.886	41.9	22.1	21.3

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-10	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-10	2025-06-10
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.504	0.526
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.330	0.298
Graded Grid	Yes	Yes	Power Drift [dB]	0.04	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		50.5
			Dist 3dB Peak [mm]		10.7

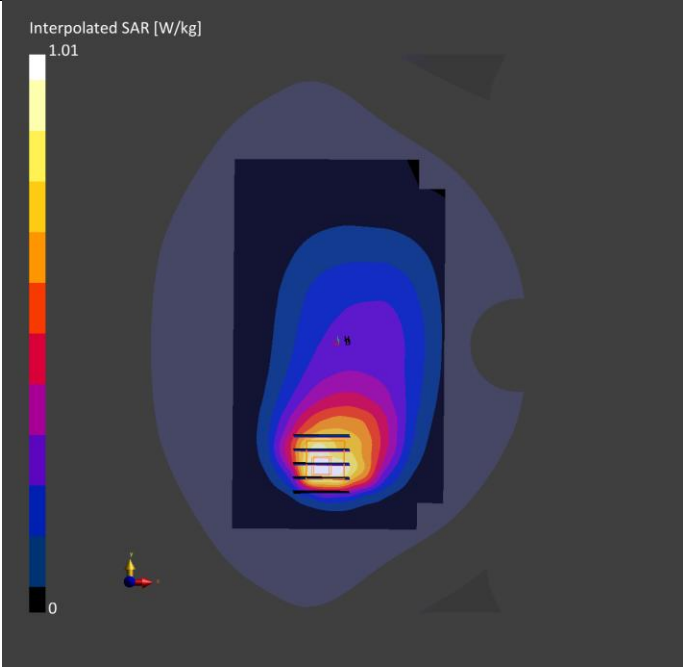

Ti-CC26040293-ATD

Meas.41 Body Plane with Back Side 10mm on Middle Channel in LTE Band 17 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 17	LTE-FDD, 10175-CAH	710.0, 23790	10.29	0.886	41.9	22.1	21.3

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-10	EX3DV4 - SN7510, 2024-06-25		DAE4 Sn1710, 2025-01-20	

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-10	2025-06-10
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.186	0.181
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.128	0.123
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		60.0
			Dist 3dB Peak [mm]		14.8

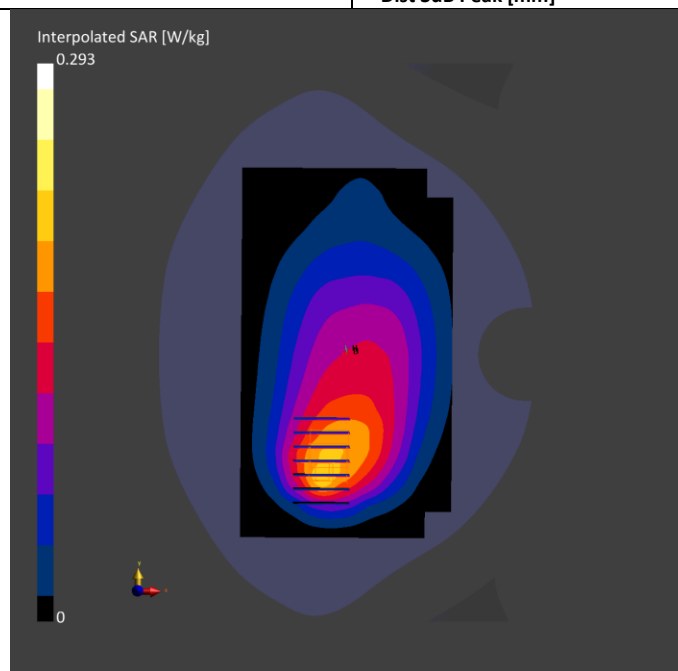

Ti-CC26040293-ATD

Meas.42 Right Head with Cheek on Middle Channel in LTE Band18 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 18	LTE-FDD, 10181-CAF	822.5, 23925	10.25	0.874	43.1	22.1	21.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-08	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-08	2026-05-08
psSAR1g [W/kg]	0.565	0.595
psSAR10g [W/kg]	0.354	0.365
Power Drift [dB]	0.06	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		58.3
Dist 3dB Peak [mm]		11.3

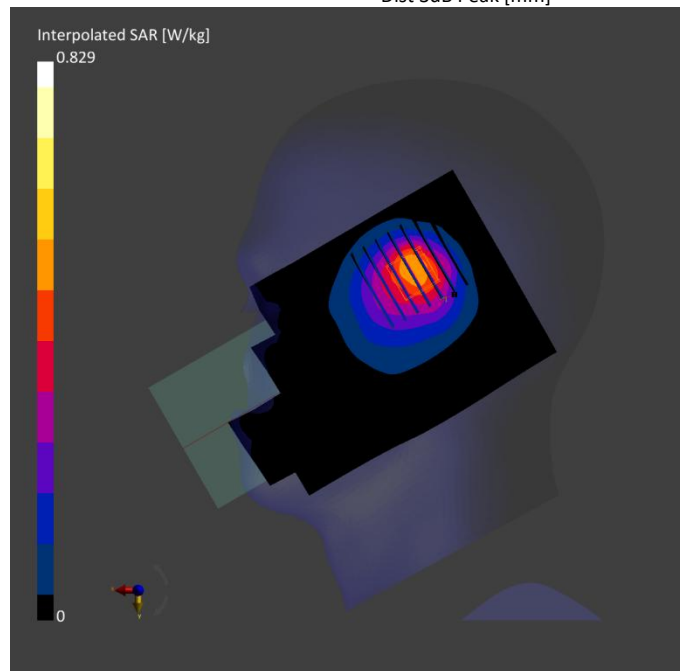

Ti-CC26040293-ATD

Meas.43 Body Plane with Back Side 5mm on Middle Channel in LTE Band18 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 18	LTE-FDD, 10181-CAF	822.5, 23925	10.25	0.874	43.1	22.1	21.8

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2026-05-08	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-08	2026-05-08
psSAR1g [W/kg]	0.701	0.771
psSAR10g [W/kg]	0.387	0.392
Power Drift [dB]	0.05	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		44.5
Dist 3dB Peak [mm]		9.3

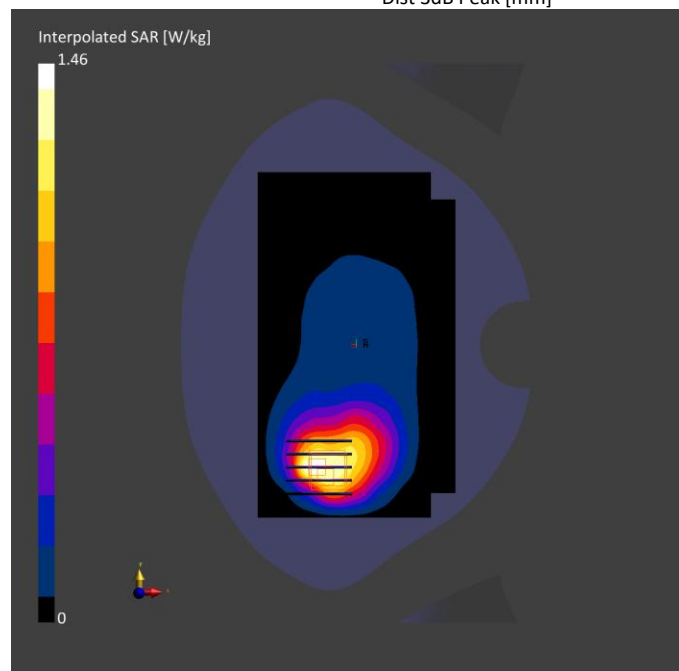

Ti-CC26040293-ATD

Meas.44 Body Plane with Back Side 10mm on Middle Channel in LTE Band18 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 18	LTE-FDD, 10181-CAF	822.5, 23925	10.25	0.874	43.1	22.1	21.8

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2026-05-08	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-08	2026-05-08
psSAR1g [W/kg]	0.202	0.208
psSAR10g [W/kg]	0.129	0.121
Power Drift [dB]	0.03	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		48.1
Dist 3dB Peak [mm]		10.2

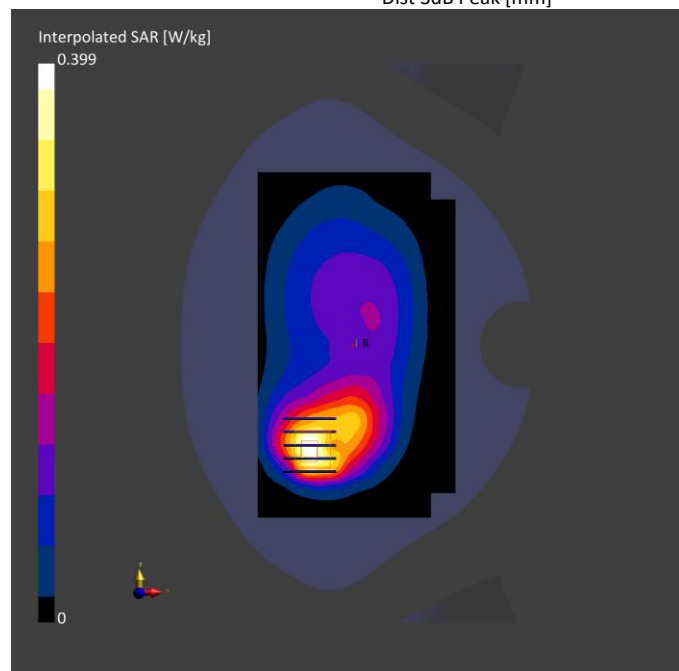

Ti-CC26040293-ATD

Meas.45 Right Head with Cheek on Middle Channel in LTE Band19 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 19	LTE-FDD, 10181-CAF	837.5, 24075	10.25	0.894	42.1	22.1	21.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-08	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-08	2026-05-08
psSAR1g [W/kg]	0.560	0.602
psSAR10g [W/kg]	0.366	0.367
Power Drift [dB]	0.05	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.7
Dist 3dB Peak [mm]		11.3

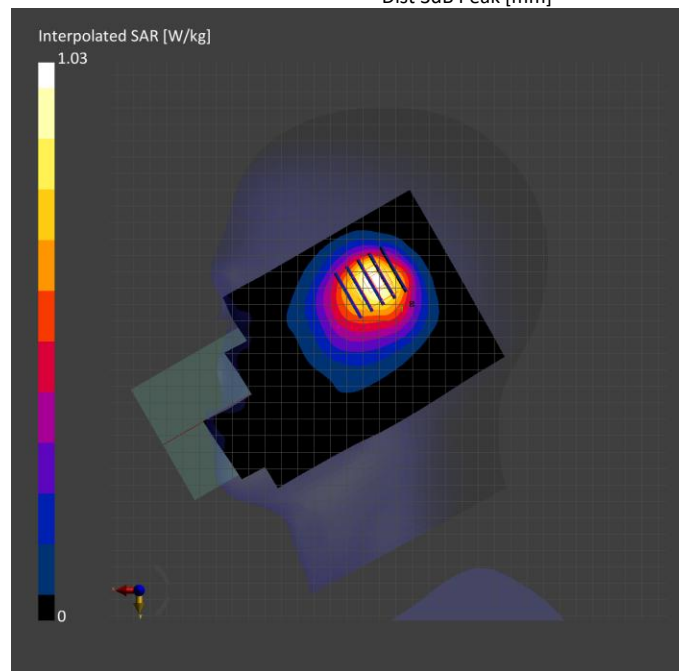

Ti-CC26040293-ATD
 Meas.46 Body Plane with Back Side 5mm on Middle Channel in LTE Band19 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 19	LTE-FDD, 10181-CAF	837.5, 24075	10.25	0.894	42.1	22.1	21.8

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2026-05-08	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-08	2026-05-08
psSAR1g [W/kg]	0.689	0.833
psSAR10g [W/kg]	0.456	0.465
Power Drift [dB]	0.03	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		43.4
Dist 3dB Peak [mm]		8.5

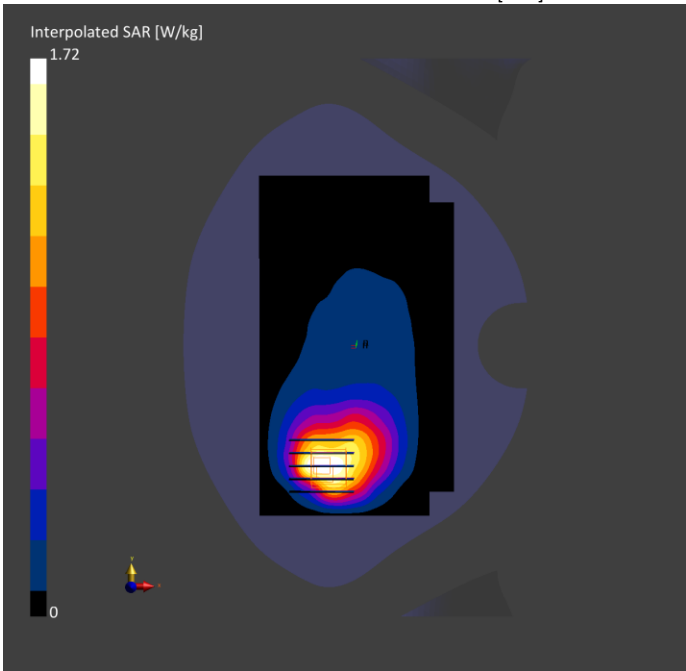


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 19	LTE-FDD, 10181-CAF	837.5, 24075	9.99	0.917	41.3	22.3	21.5

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-15	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1710,	2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-15	2025-06-15
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.242	0.235
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.161	0.151
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		62.6
			Dist 3dB Peak [mm]		14.3

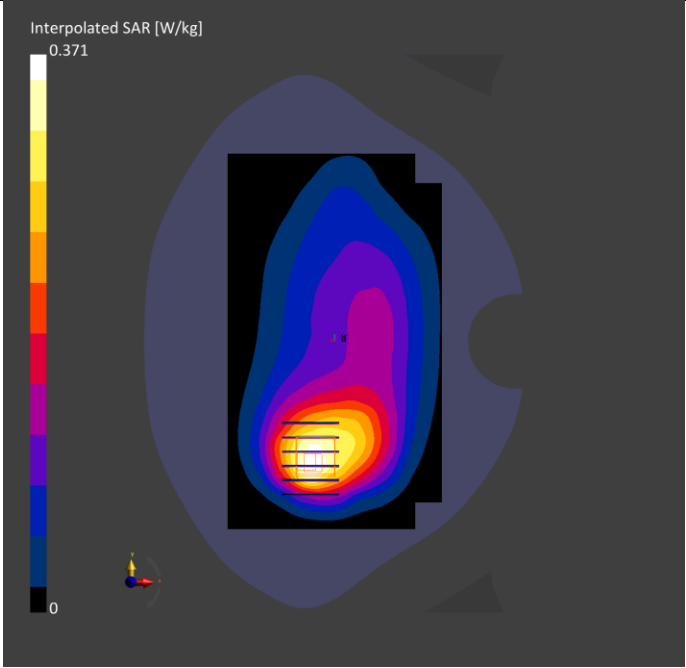

Ti-CC26040293-ATD

Meas.48 Right Head with Cheek on Middle Channel in LTE Band26 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 26	LTE-FDD, 10181-CAF	831.5, 26865	9.99	0.879	42.1	22.6	21.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-12	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-12	2025-06-12
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.701	0.705
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.460	0.457
Graded Grid	Yes	Yes	Power Drift [dB]	-0.12	0.06
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		55.2
			Dist 3dB Peak [mm]		10.7

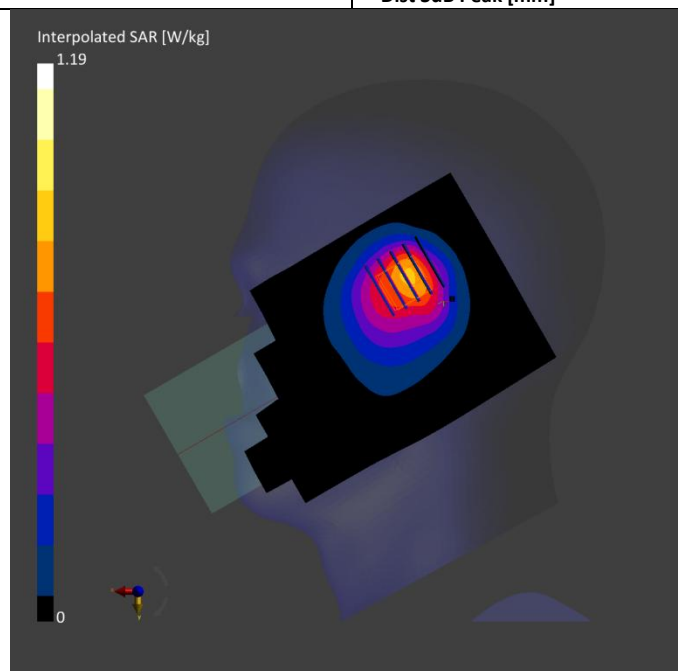

Ti-CC26040293-ATD
 Meas.49 Body Plane with Back Side 5mm on High Channel in LTE Band 26 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 26	LTE-FDD, 10181-CAF	841.5, 26965	9.99	0.917	41.2	22.6	21.7

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-12	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-12	2025-06-12
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.734	0.768
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.481	0.449
Graded Grid	Yes	Yes	Power Drift [dB]	0.01	-0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		54.4
			Dist 3dB Peak [mm]		12.5

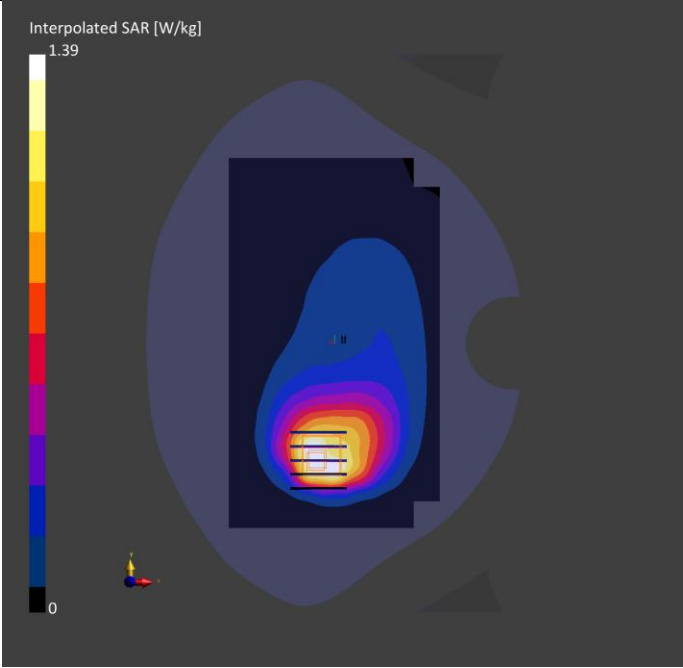

Ti-CC26040293-ATD
Meas.50 Body Plane with Back Side 10mm on High Channel in LTE Band 26 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 26	LTE-FDD, 10181-CAF	841.5, 26965	9.99	0.917	41.2	22.6	21.7

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-12	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1710,	2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-12	2025-06-12
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.258	0.252
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.171	0.162
Graded Grid	Yes	Yes	Power Drift [dB]	0.03	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		62.4
			Dist 3dB Peak [mm]		14.3

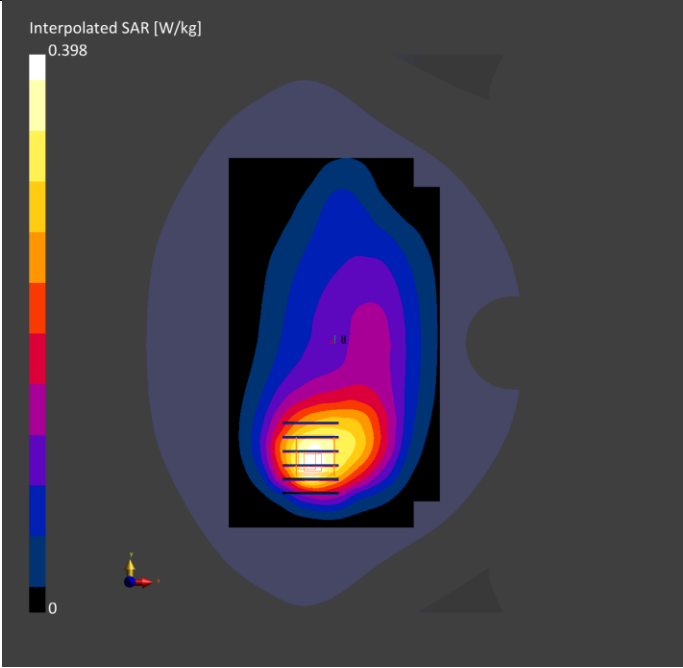

Ti-CC26040293-ATD

Meas.51 Right Head with Tilt on Low Channel in LTE Band66 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band 66	LTE-FDD, 10169-CAF	1720.0, 132072	8.72	1.31	41.1	22.2	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-15	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-15	2026-05-15
psSAR1g [W/kg]	0.700	0.775
psSAR10g [W/kg]	0.325	0.383
Power Drift [dB]	0.00	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.8
Dist 3dB Peak [mm]		8.9

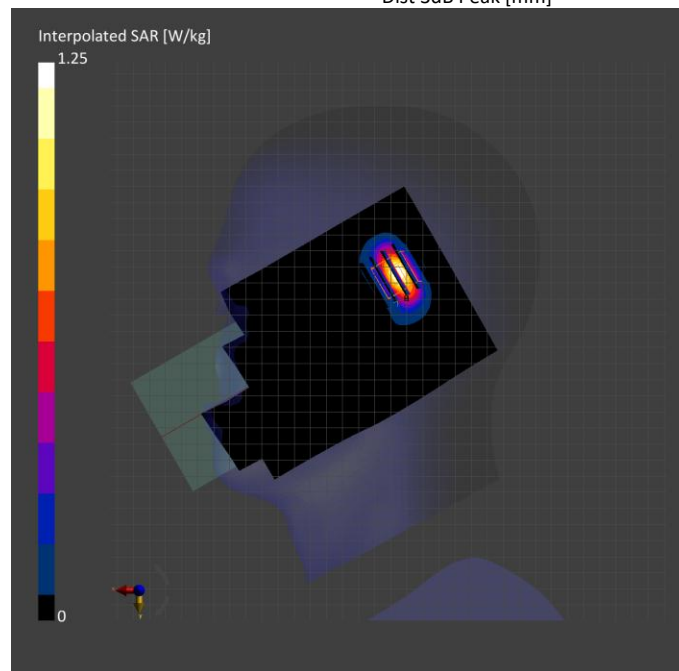

Ti-CC26040293-ATD

Meas.52 Body Plane with Back Side 5mm on Middle Channel in LTE Band66 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 66	LTE-FDD, 10169-CAF	1745.0, 132322	8.72	1.36	40.5	22.5	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-15	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-15	2026-05-15
psSAR1g [W/kg]	0.447	0.467
psSAR10g [W/kg]	0.251	0.270
Power Drift [dB]	-0.09	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		61.3
Dist 3dB Peak [mm]		9.6

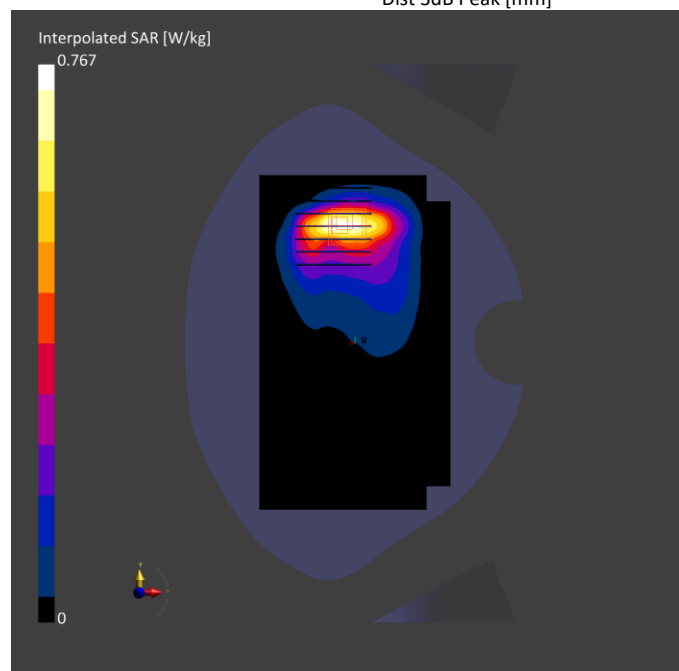

Ti-CC26040293-ATD

Meas.53 Body Plane with Bottom Edge 10mm on Middle Channel in LTE Band66 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 10.00	Band 66	LTE-FDD, 10169-CAF	1745.0, 132322	8.72	1.36	40.5	22.5	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-15	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-15	2026-05-15
psSAR1g [W/kg]	0.293	0.313
psSAR10g [W/kg]	0.161	0.177
Power Drift [dB]	0.13	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		62.1
Dist 3dB Peak [mm]		10.7

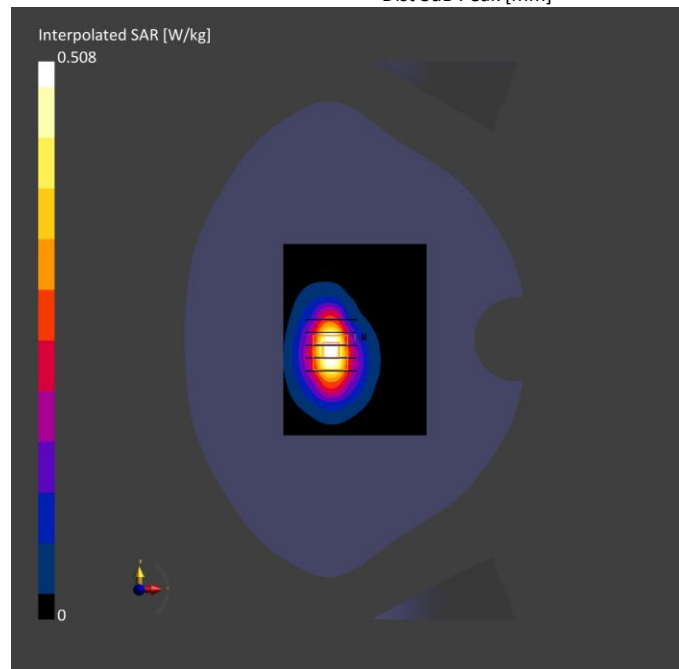

Ti-CC26040293-ATD

Meas.54 Body Plane with Bottom Edge 0mm on Middle Channel in LTE Band66 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 0.00	Band 66	LTE-FDD, 10169-CAF	1745.0, 132322	8.72	1.36	40.5	22.5	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-15	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-15	2026-05-15
psSAR1g [W/kg]	2.13	2.05
psSAR10g [W/kg]	1.02	0.996
Power Drift [dB]	0.15	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		47.7
Dist 3dB Peak [mm]		10.8

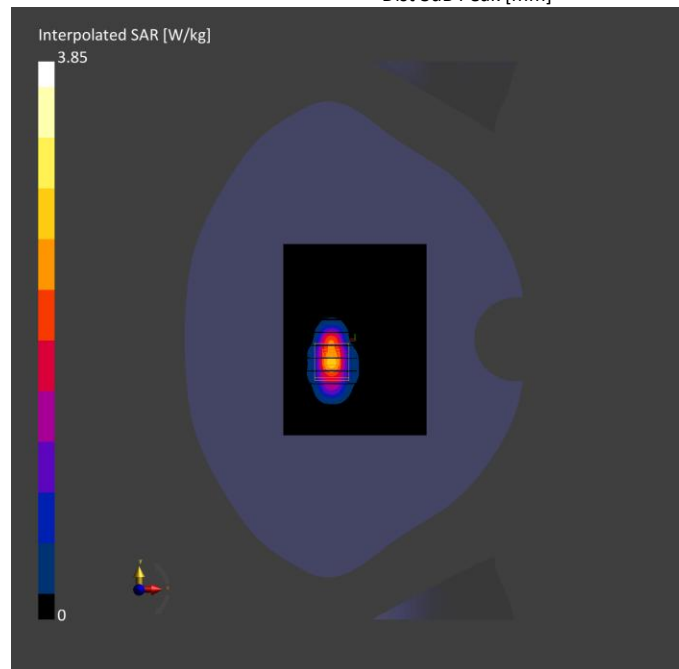

Ti-CC26040293-ATD
Meas.55 Right Head with Cheek on Middle Channel in LTE Band71 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 71	LTE-FDD, 10169-CAF	680.5, 133297	10.29	0.887	42.8	22.5	21.5

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-06	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.526	0.525
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.341	0.320
Graded Grid	Yes	Yes	Power Drift [dB]	-0.04	-0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		47.4
			Dist 3dB Peak [mm]		9.6

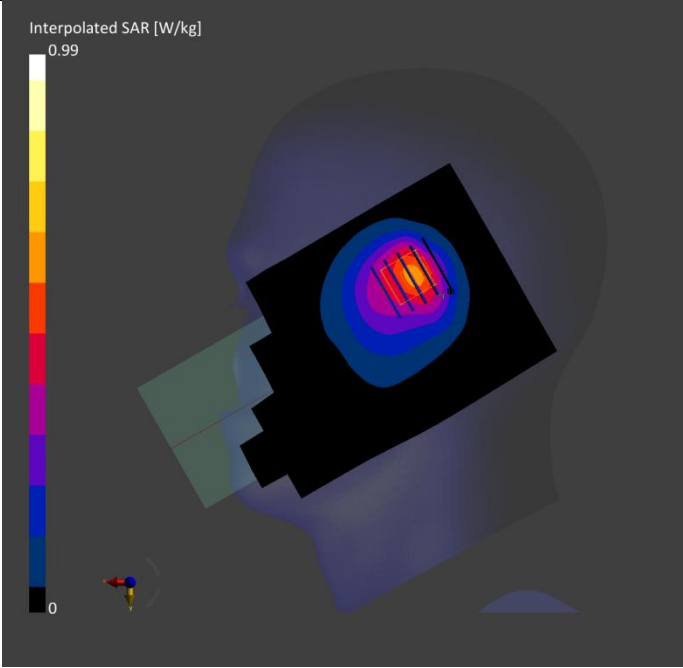

Ti-CC26040293-ATD
Meas.56 Body Plane with Back Side 5mm on Middle Channel in LTE Band 71 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 71	LTE-FDD, 10169-CAF	680.5, 133297	10.29	0.887	42.8	22.5	21.5

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-06	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.457	0.429
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.282	0.234
Graded Grid	Yes	Yes	Power Drift [dB]	-0.06	-0.08
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		46.6
			Dist 3dB Peak [mm]		11.3

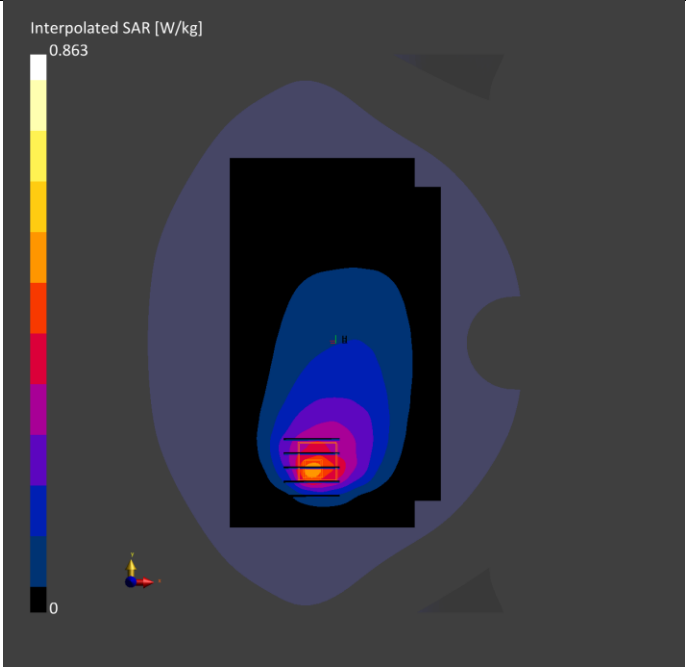


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 71	LTE-FDD, 10169-CAF	680.5, 133297	10.29	0.887	42.8	22.5	21.5

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-06	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.164	0.165
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.115	0.118
Graded Grid	Yes	Yes	Power Drift [dB]	-0.06	-0.11
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		53.6
			Dist 3dB Peak [mm]		12.5

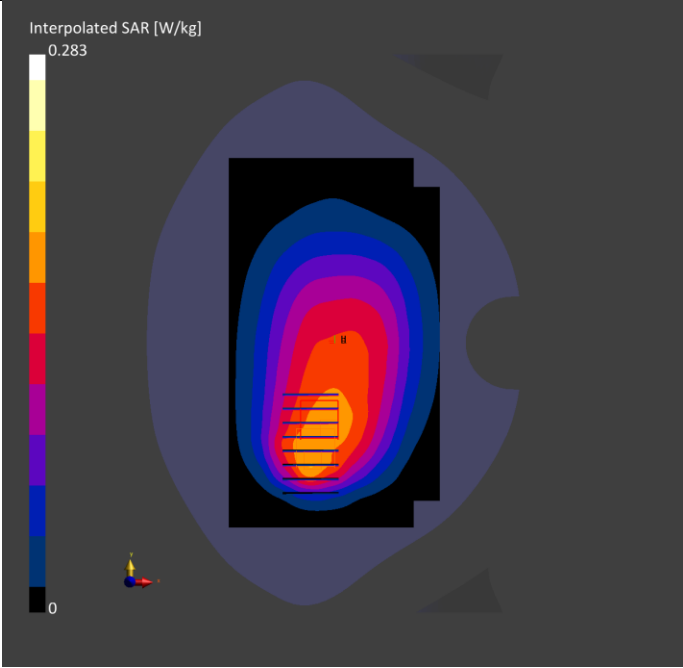

Ti-CC26040293-ATD
Meas.58 Right Head with Tilt on Low Channel in LTE Band38 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band 38	LTE-TDD, 10172-CAH	2580.0, 37850	7.06	1.88	40.1	22.2	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-16	EX3DV4 - SN7893,	2024-09-05	DAE4 Sn878,	2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0	Date	2025-06-16	2025-06-16
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.592	0.743
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.274	0.315
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	0.06
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		50.6
			Dist 3dB Peak [mm]		5.4

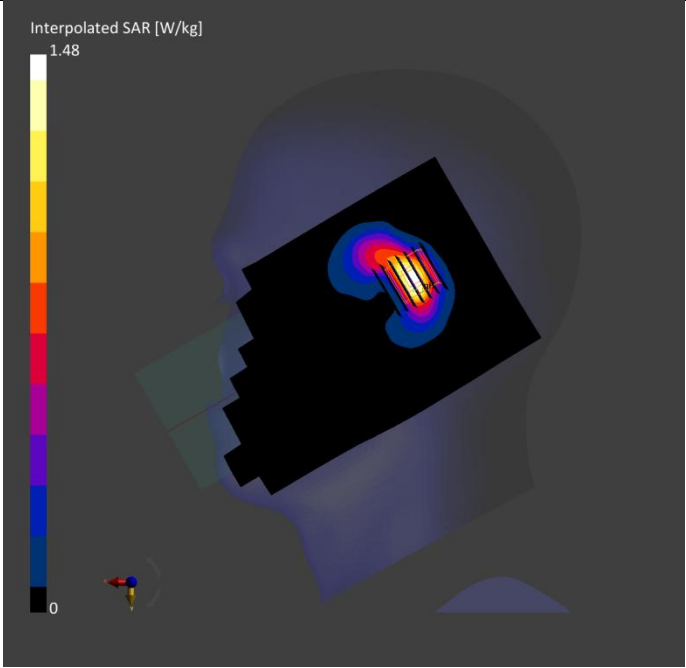

Ti-CC26040293-ATD

Meas.59 Body Plane with Back Side 5mm on Low Channel in LTE Band38 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 38	LTE-TDD, 10172-CAH	2580.0, 37850	7.64	1.96	39.4	22.6	21.6

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2026-05-19	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-19	2026-05-19
psSAR1g [W/kg]	0.423	0.636
psSAR10g [W/kg]	0.206	0.269
Power Drift [dB]	-0.10	0.19
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		46.4
Dist 3dB Peak [mm]		6.0

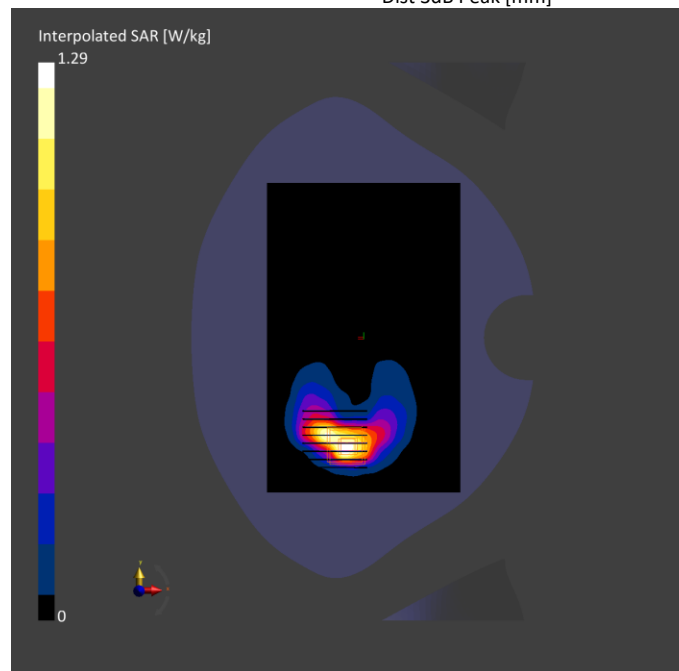

Ti-CC26040293-ATD

Meas.60 Body Plane with Top Edge 10mm on High Channel in LTE Band38 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 10.00	Band 38	LTE-TDD, 10172-CAH	2610.0, 38150	7.64	2.05	37.6	22.6	21.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-19	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-19	2026-05-19
psSAR1g [W/kg]	0.305	0.319
psSAR10g [W/kg]	0.131	0.144
Power Drift [dB]	-0.02	-0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.5
Dist 3dB Peak [mm]		8.5

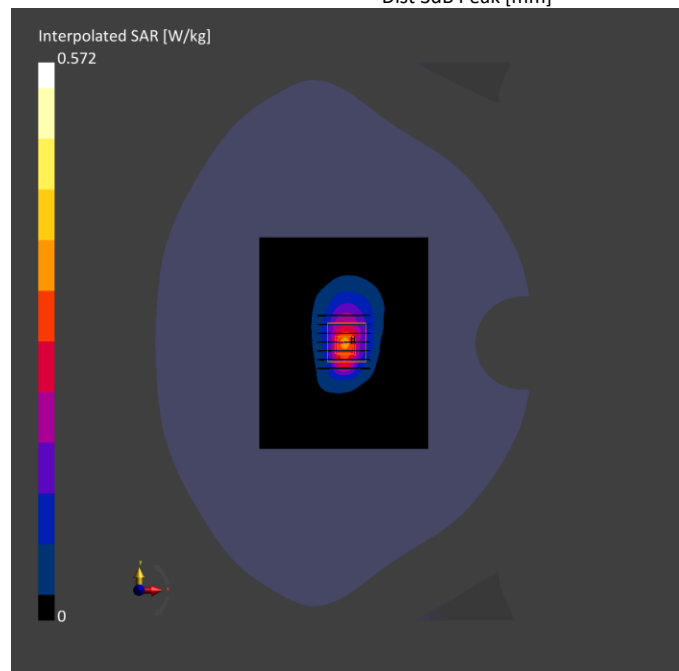

Ti-CC26040293-ATD

Meas.61 Body Plane with Top Edge 0mm on Low Channel in LTE Band38 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 0.00	Band 38	LTE-TDD, 10172-CAH	2580.0, 37850	7.64	1.96	39.4	22.6	21.6

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2026-05-19	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-19	2026-05-19
psSAR1g [W/kg]	2.88	4.21
psSAR10g [W/kg]	0.978	1.24
Power Drift [dB]	-0.13	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		35.6
Dist 3dB Peak [mm]		6.2

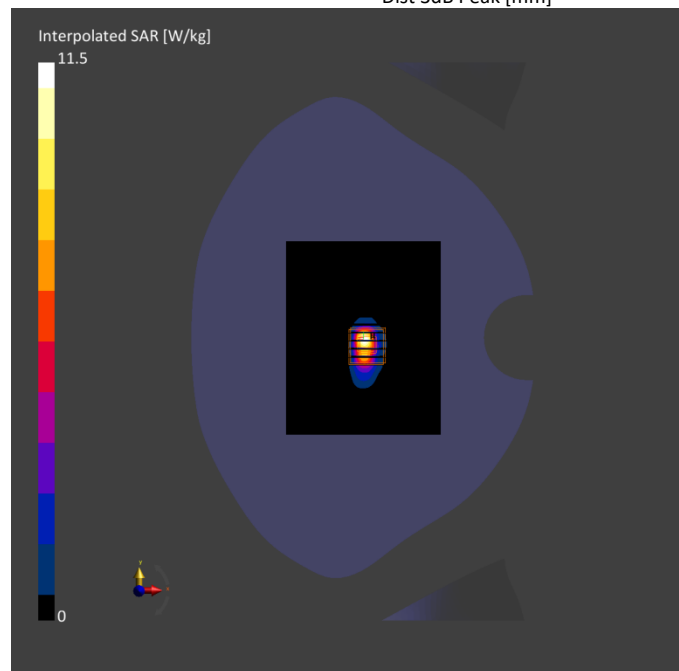

Ti-CC26040293-ATD
Meas.62 Right Head with Tilt on Low Channel in LTE Band41 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band 41	LTE-TDD, 10172-CAH	2506.0, 39750	7.06	1.89	39.2	22.1	21.3

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-20	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0	Date	2025-06-20	2025-06-20
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.617	0.765
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.291	0.334
Graded Grid	Yes	Yes	Power Drift [dB]	0.05	0.05
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		52.1
			Dist 3dB Peak [mm]		6.0

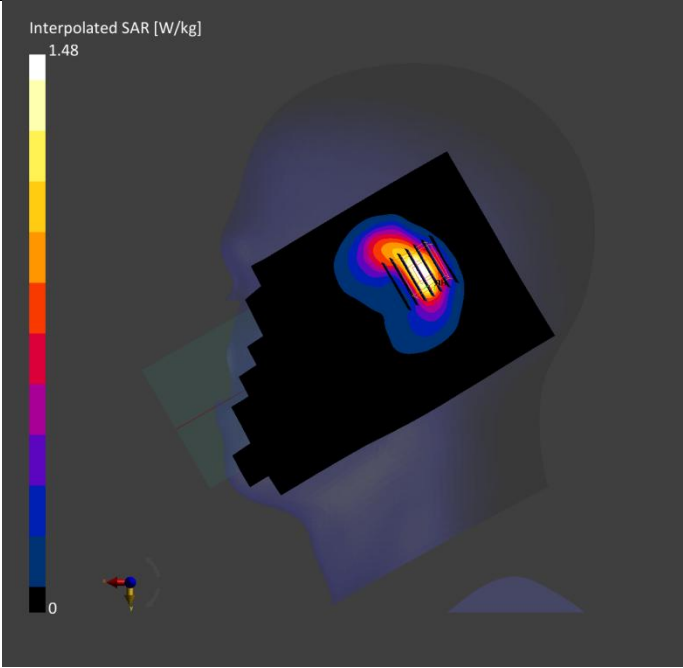

Ti-CC26040293-ATD

Meas.63 Body Plane with Back Side 5mm on High Channel in LTE Band41 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 41	LTE-TDD, 10172-CAH	2680.0, 41490	7.64	2.10	38.0	22.5	21.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-21	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-21	2026-05-21
psSAR1g [W/kg]	0.479	0.653
psSAR10g [W/kg]	0.241	0.290
Power Drift [dB]	-0.15	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		46.2
Dist 3dB Peak [mm]		7.0

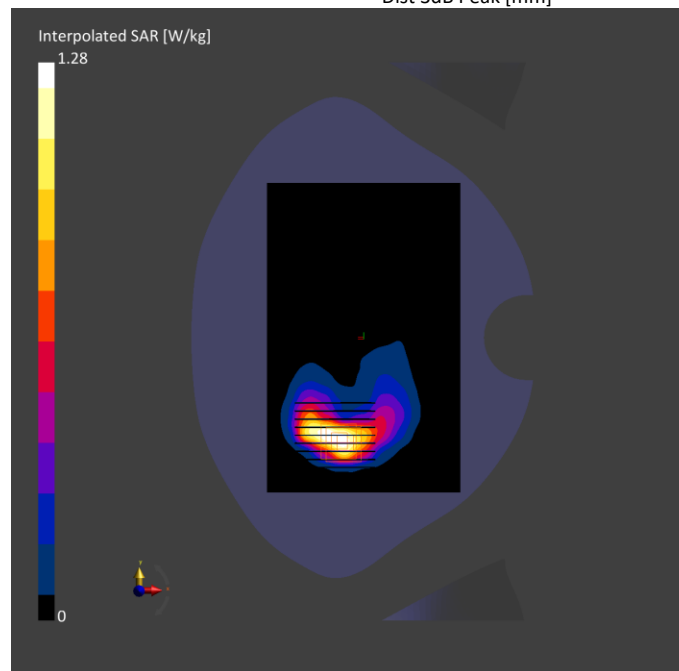

Ti-CC26040293-ATD

Meas.64 Body Plane with Top Edge 10mm on High Channel in LTE Band41 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 10.00	Band 41	LTE-TDD, 10172-CAH	2680.0, 41490	7.64	2.10	38.0	22.5	21.8

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2026-05-21	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-21	2026-05-21
psSAR1g [W/kg]	0.307	0.348
psSAR10g [W/kg]	0.129	0.133
Power Drift [dB]	-0.04	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.0
Dist 3dB Peak [mm]		9.0

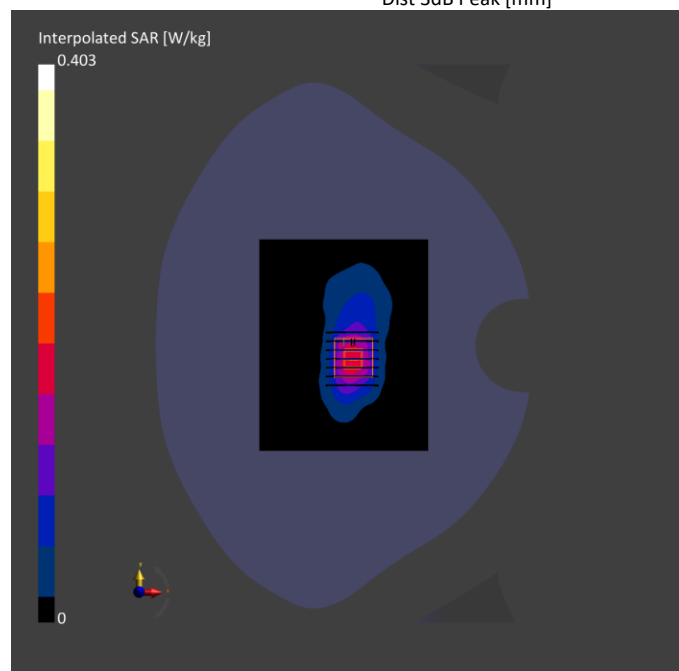

Ti-CC26040293-ATD

Meas.65 Body Plane with Top Edge 0mm on High Channel in LTE Band41 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 0.00	Band 41	LTE-TDD, 10172-CAH	2680.0, 41490	7.64	2.10	38.0	22.5	21.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-21	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-21	2026-05-21
psSAR1g [W/kg]	1.90	4.01
psSAR10g [W/kg]	0.776	1.22
Power Drift [dB]	-0.05	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		36.5
Dist 3dB Peak [mm]		5.1

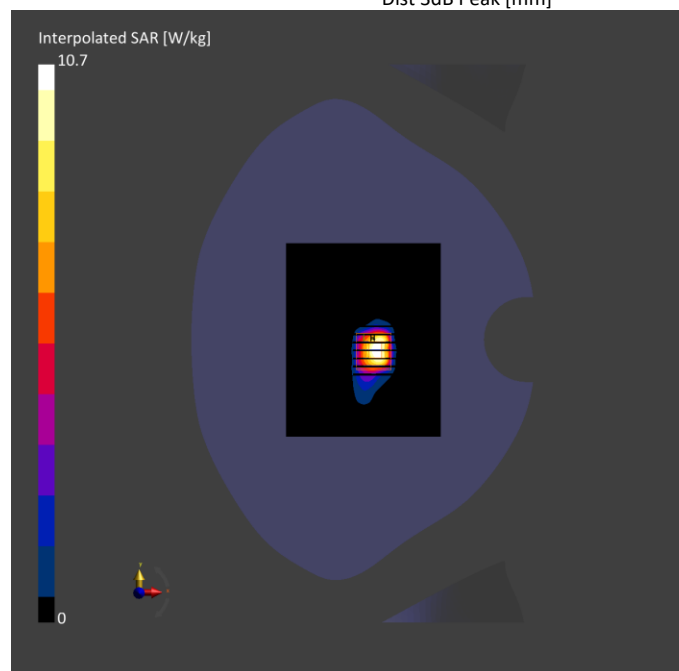

Ti-CC26040293-ATD
Meas.66 Left Head with Tilt on High Channel in LTE Band42 mode with Antenna 5


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
LeftHead, HSL	TILT, 0.00	Band 42	LTE-TDD, 10172-CAH	3590.0, 43490	6.33	2.98	37.0	22.4	21.6

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-26	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	25.0 x 25.0 x 24.0	Date	2025-06-26	2025-06-26
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 4.0	psSAR1g [W/kg]	0.805	0.839
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.318	0.358
Graded Grid	Yes	Yes	Power Drift [dB]	0.18	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		51.7
			Dist 3dB Peak [mm]		7.6

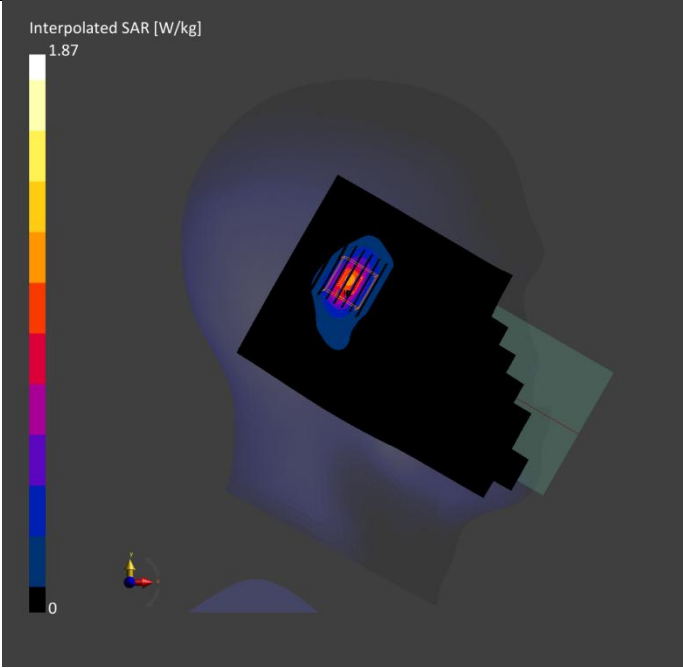


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 42	LTE-TDD, 10172-CAH	3590.0, 43490	6.33	2.98	37.0	22.4	21.6

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-26	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0	Date	2025-06-26	2025-06-26
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 4.0	psSAR1g [W/kg]	0.639	0.714
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.253	0.275
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		45.7
			Dist 3dB Peak [mm]		8.1

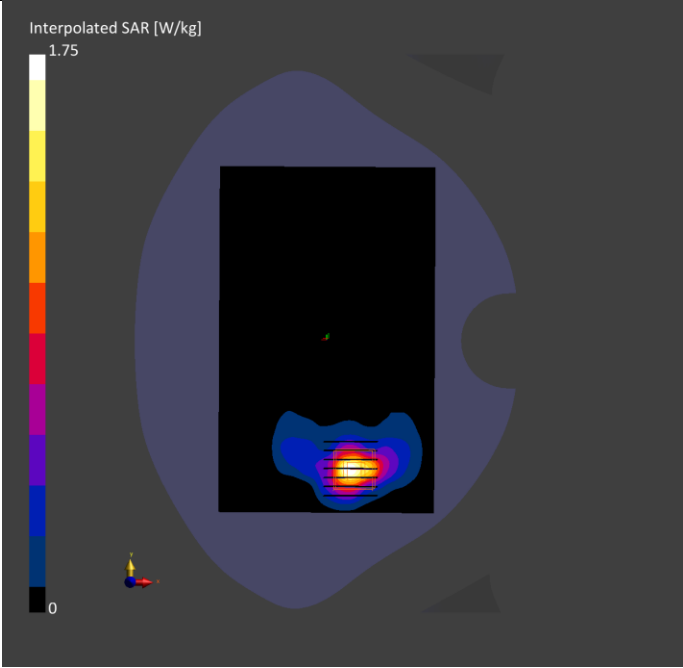


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 42	LTE-TDD, 10172-CAH	3590.0, 43490	6.33	2.98	37.0	22.4	21.6

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-26	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0	Date	2025-06-26	2025-06-26
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 4.0	psSAR1g [W/kg]	0.307	0.319
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.127	0.133
Graded Grid	Yes	Yes	Power Drift [dB]	-0.07	0.09
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		48.4
			Dist 3dB Peak [mm]		9.9

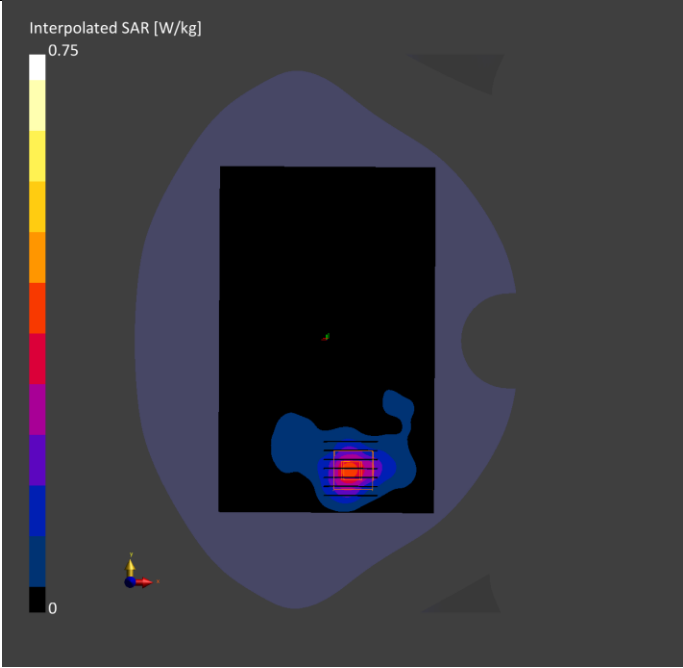


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
LeftHead, HSL	TILT, 0.00	Band 48	LTE-TDD, 10103-CAH	3690.0, 56640	7.11	3.06	37.2	22.5	21.7

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-27	EX3DV4 - SN3794, 2025-06-05	DAE4 Sn1423, 2025-06-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0	Date	2025-06-27	2025-06-27
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 4.0	psSAR1g [W/kg]	0.538	0.671
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.238	0.263
Graded Grid	Yes	Yes	Power Drift [dB]	-0.02	0.05
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		43.6
			Dist 3dB Peak [mm]		7.1

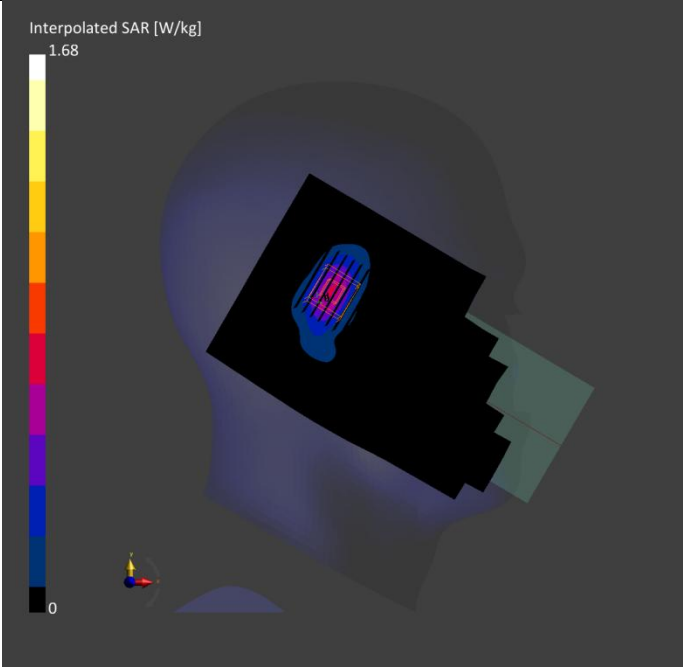

Ti-CC26040293-ATD

Meas.70 Body Plane with Back Side 5mm on Low Channel in LTE Band 48 mode with Antenna 5


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band 48	LTE-TDD, 10103-CAH	3560.0, 55340	7.30	2.90	38.3	22.5	21.7

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-27	EX3DV4 - SN3794, 2025-06-05	DAE4 Sn1423, 2025-06-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0	Date	2025-06-27	2025-06-27
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 4.0	psSAR1g [W/kg]	0.591	0.688
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.250	0.270
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		45.8
			Dist 3dB Peak [mm]		8.2

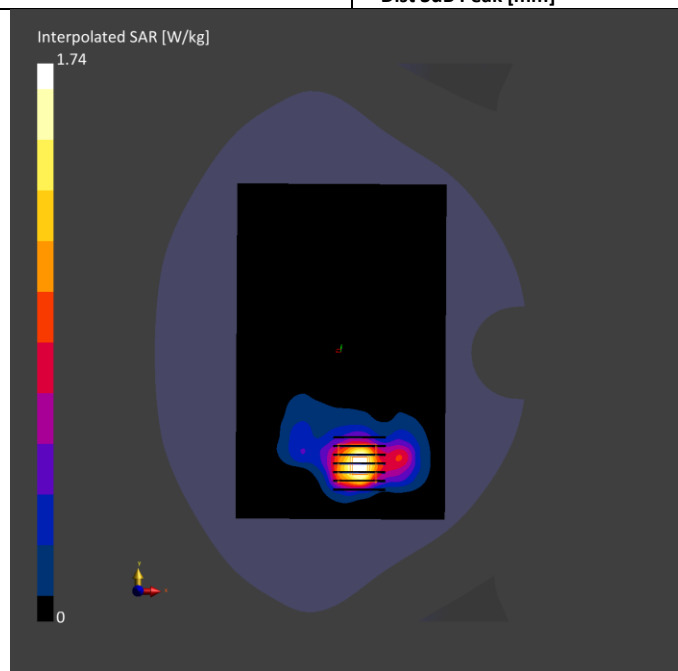

Ti-CC26040293-ATD

Meas.71 Body Plane with Back Side 10mm on Low Channel in LTE Band 48 mode with Antenna 5


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 48	LTE-TDD, 10103-CAH	3560.0, 55340	7.30	2.90	38.3	22.5	21.7

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2025-06-27	EX3DV4 - SN3794, 2025-06-05	DAE4 Sn1423, 2025-06-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0	Date	2025-06-27	2025-06-27
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 4.0	psSAR1g [W/kg]	0.264	0.284
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.115	0.119
Graded Grid	Yes	Yes	Power Drift [dB]	-0.02	-0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		48.5
			Dist 3dB Peak [mm]		10.4

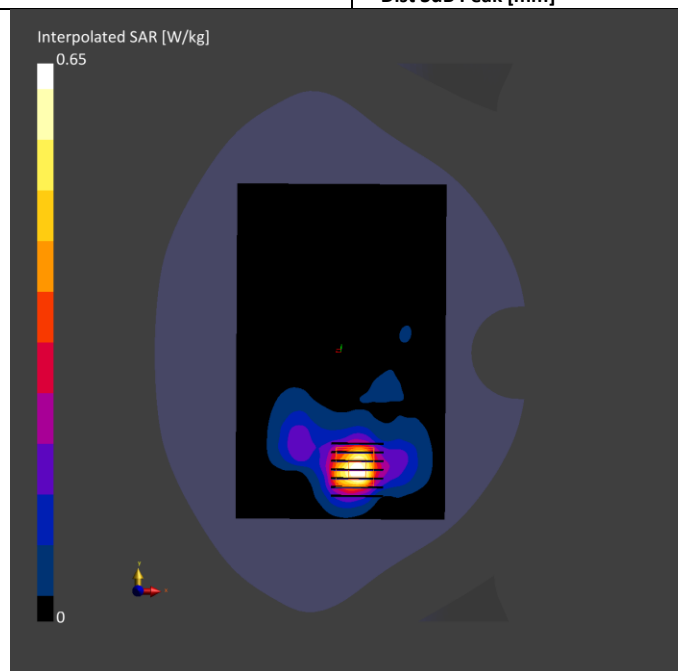

Ti-CC26040293-ATD

Meas.72 Right Head with Tilt on 374000 Channel in NR Band2 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band n2	5G NR FR1 FDD, 10931-AAC	1870.0, 374000	8.35	1.38	40.7	22.4	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-17	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-17	2026-05-17
psSAR1g [W/kg]	0.722	0.788
psSAR10g [W/kg]	0.361	0.397
Power Drift [dB]	-0.03	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.4
Dist 3dB Peak [mm]		9.6

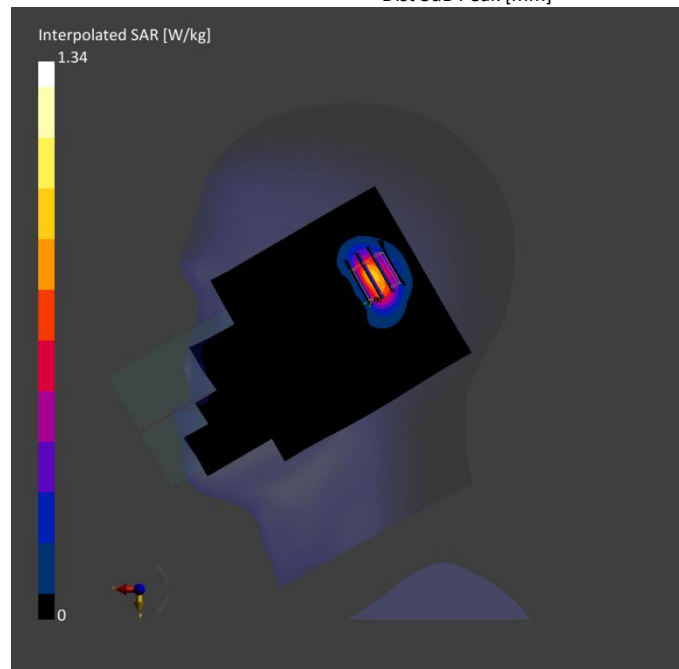

Ti-CC26040293-ATD
 Meas.73 Body Plane with Back Side 5mm on 374000 Channel in NR Band 2 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band n2	5G NR FR1 FDD, 10931-AAC	1870.0, 374000	7.34	1.36	39.9	22.6	21.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-09	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-09	2025-06-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.882	0.894
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.429	0.447
Graded Grid	Yes	Yes	Power Drift [dB]	-0.04	-0.06
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		55.6
			Dist 3dB Peak [mm]		8.0

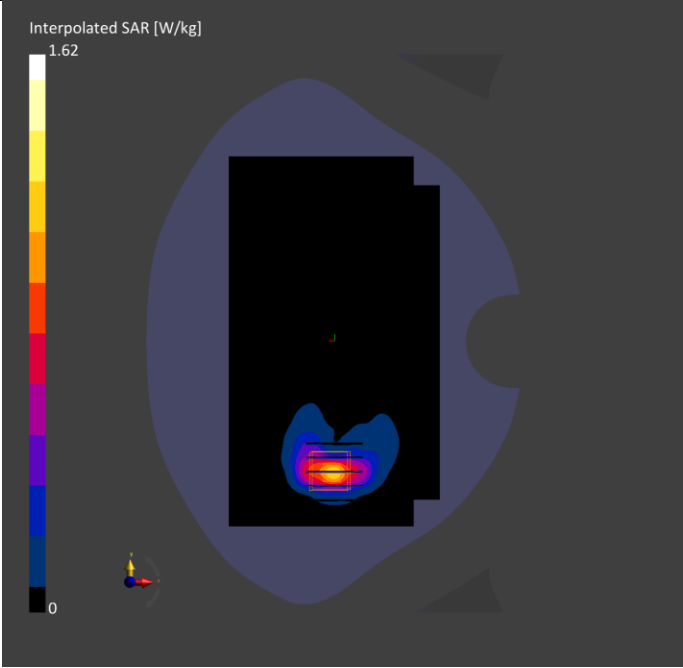


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 10.00	Band n2	5G NR FR1 FDD, 10931-AAC	1870.0, 374000	7.34	1.36	39.9	22.6	21.8

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-09	EX3DV4 - SN7893,	2024-09-05	DAE4 Sn878,	2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-09	2025-06-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.510	0.611
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.277	0.347
Graded Grid	Yes	Yes	Power Drift [dB]	0.00	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		66.6
			Dist 3dB Peak [mm]		9.6

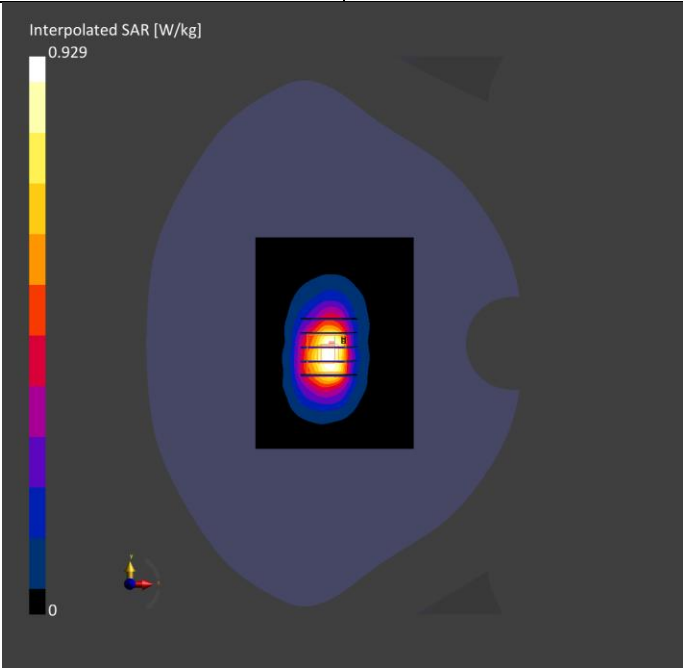

Ti-CC26040293-ATD
 Meas.75 Body Plane with Top Edge 0mm on 374000 Channel in NR Band 2 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 0.00	Band n2	5G NR FR1 FDD, 10931-AAC	1870.0, 374000	7.34	1.36	39.9	22.6	21.8

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2025-06-09	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-09	2025-06-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	2.83	3.36
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	1.33	1.50
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	-0.11
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		49.8
			Dist 3dB Peak [mm]		8.4

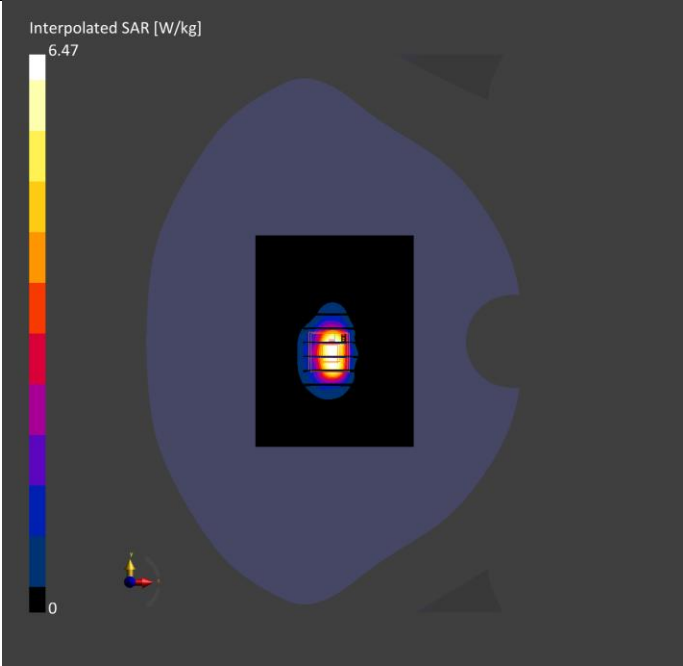

Ti-CC26040293-ATD

Meas.76 Right Head with Cheek on 167300 Channel in NR Band5 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band n5	5G NR FR1 FDD, 10931-AAC	836.5, 167300	10.25	0.896	42.4	22.3	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-10	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-10	2026-05-10
psSAR1g [W/kg]	0.658	0.657
psSAR10g [W/kg]	0.356	0.365
Power Drift [dB]	-0.06	-0.15
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		46.6
Dist 3dB Peak [mm]		8.2

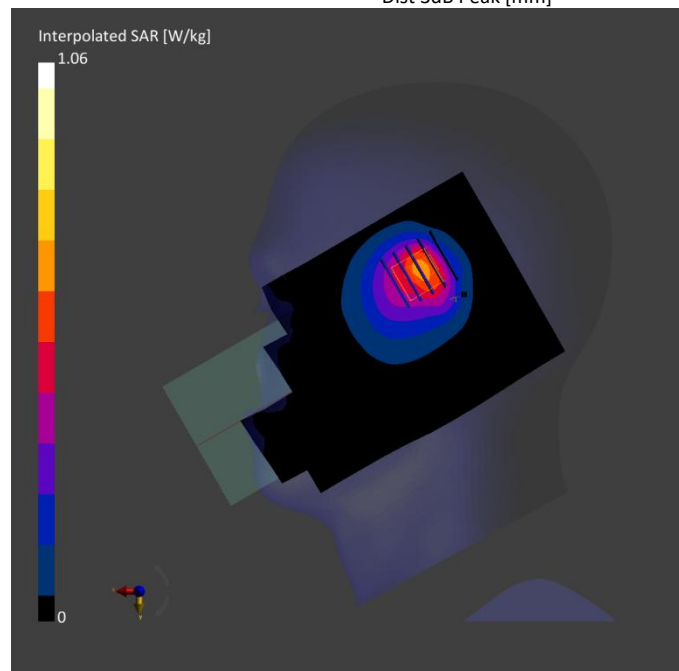


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band n5	5G NR FR1 FDD, 10931-AAC	836.5, 167300	9.99	0.912	41.8	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-17	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-17	2025-06-17
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.684	0.760
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.453	0.448
Graded Grid	Yes	Yes	Power Drift [dB]	-0.10	-0.12
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		50.1
			Dist 3dB Peak [mm]		9.3

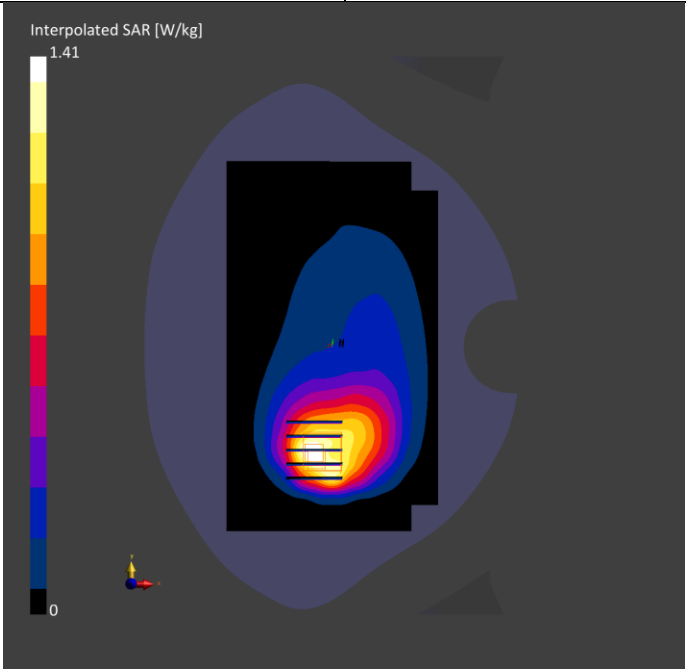

Ti-CC26040293-ATD
 Meas.78 Body Plane with Back Side 10mm on 167300 Channel in NR Band 5 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band n5	5G NR FR1 FDD, 10931-AAC	836.5, 167300	9.99	0.912	41.8	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-17	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-17	2025-06-17
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.292	0.295
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.192	0.187
Graded Grid	Yes	Yes	Power Drift [dB]	-0.11	-0.06
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		56.7
			Dist 3dB Peak [mm]		12.5

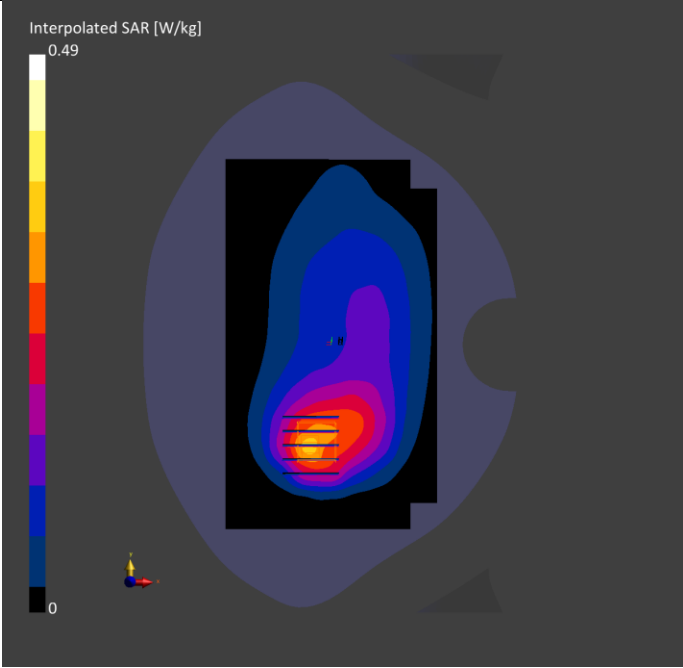

Ti-CC26040293-ATD

Meas.79 Right Head with Tilt on 509000 Channel in NR Band7 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band n7	5G NR FR1 FDD, 10935-AAD	2545.0, 509000	7.64	1.88	39.6	22.4	21.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-22	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-22	2026-05-22
psSAR1g [W/kg]	0.766	0.780
psSAR10g [W/kg]	0.338	0.353
Power Drift [dB]	-0.06	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.5
Dist 3dB Peak [mm]		10.4

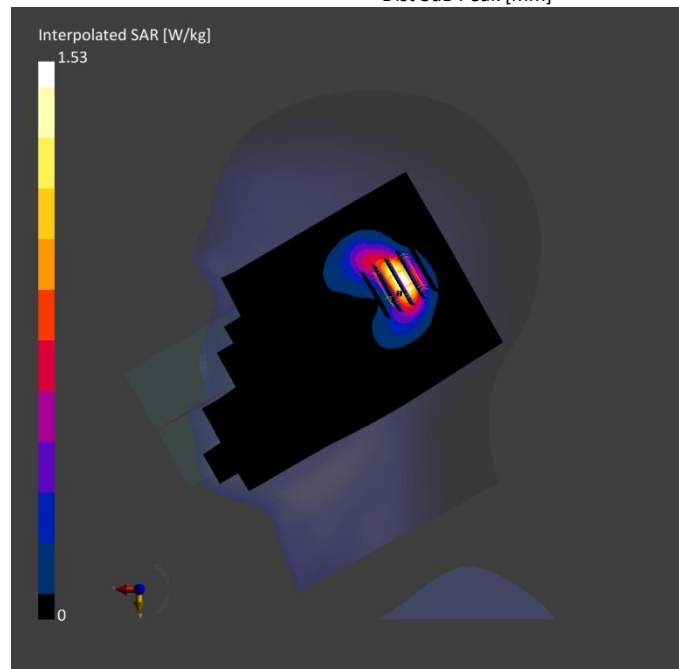

Ti-CC26040293-ATD

Meas.80 Body Plane with Back Side 5mm on 507000 Channel in NR Band7 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band n7	5G NR FR1 FDD, 10935-AAD	2535.0, 507000	7.64	1.85	39.9	22.4	21.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-22	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-22	2026-05-22
psSAR1g [W/kg]	0.603	0.664
psSAR10g [W/kg]	0.273	0.306
Power Drift [dB]	0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		58.2
Dist 3dB Peak [mm]		7.1

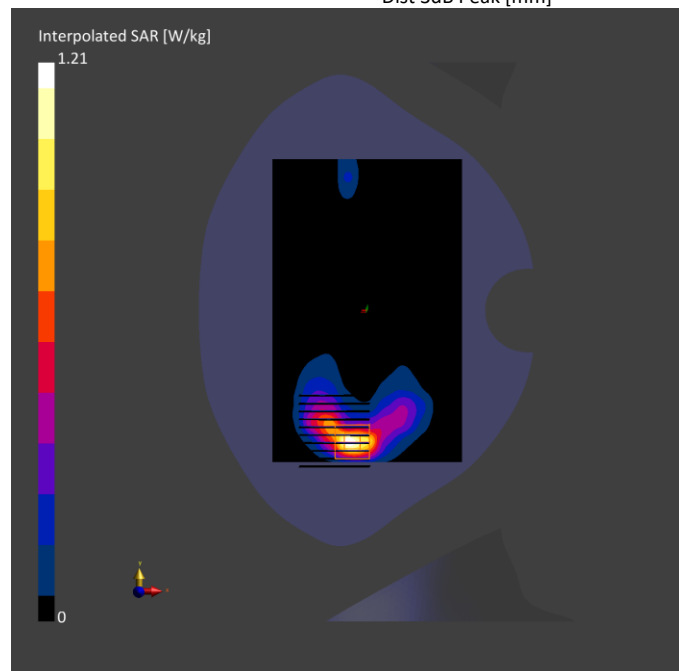

Ti-CC26040293-ATD
 Meas.81 Body Plane with Top Edge 10mm on 507000 Channel in NR Band 7 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 10.00	Band n7	5G NR FR1 FDD, 10935-AAD	2535.0, 507000	7.06	1.89	38.3	22.6	21.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-14	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0	Date	2025-06-14	2025-06-14
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.281	0.339
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.137	0.170
Graded Grid	Yes	Yes	Power Drift [dB]	0.10	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		65.1
			Dist 3dB Peak [mm]		8.2

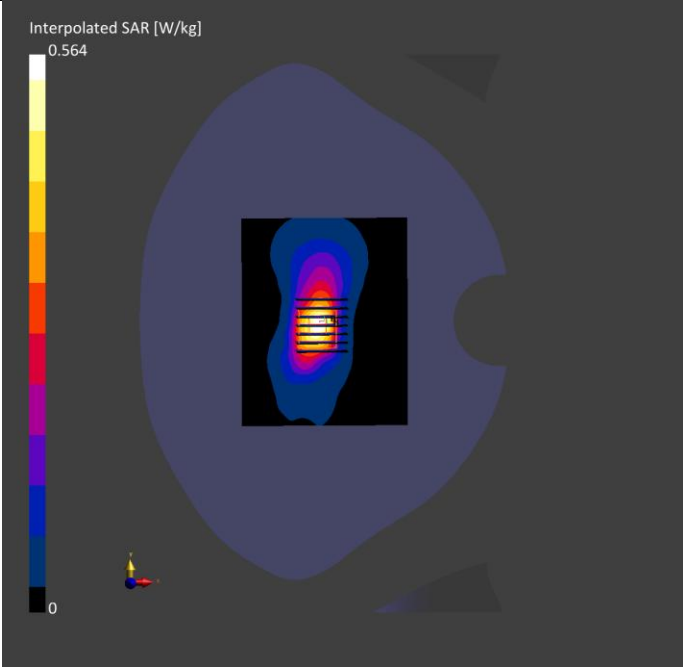

Ti-CC26040293-ATD

Meas.82 Body Plane with Top Edge 0mm on 507000 Channel in NR Band7 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 0.00	Band n7	5G NR FR1 FDD, 10935-AAD	2535.0, 507000	7.64	1.85	39.9	22.4	21.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-22	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-22	2026-05-22
psSAR1g [W/kg]	2.21	3.42
psSAR10g [W/kg]	0.907	1.12
Power Drift [dB]	-0.03	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		37.5
Dist 3dB Peak [mm]		6.0

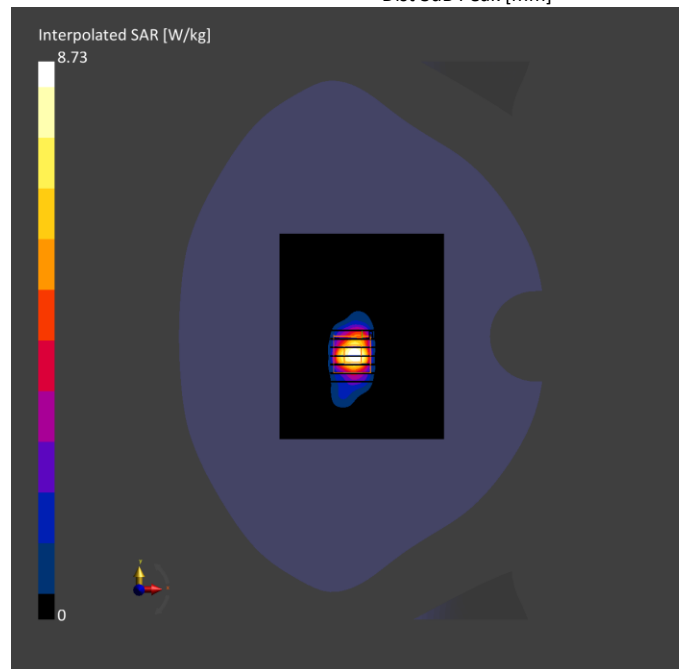

Ti-CC26040293-ATD
 Meas.83 Right Head with Cheek on 141700 Channel in NR Band12 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band n12	5G NR FR1 FDD, 10930-AAC	708.5, 141700	10.29	0.883	41.9	22.5	21.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-11	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-11	2025-06-11
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.600	0.626
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.399	0.396
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		53.1
			Dist 3dB Peak [mm]		12.5

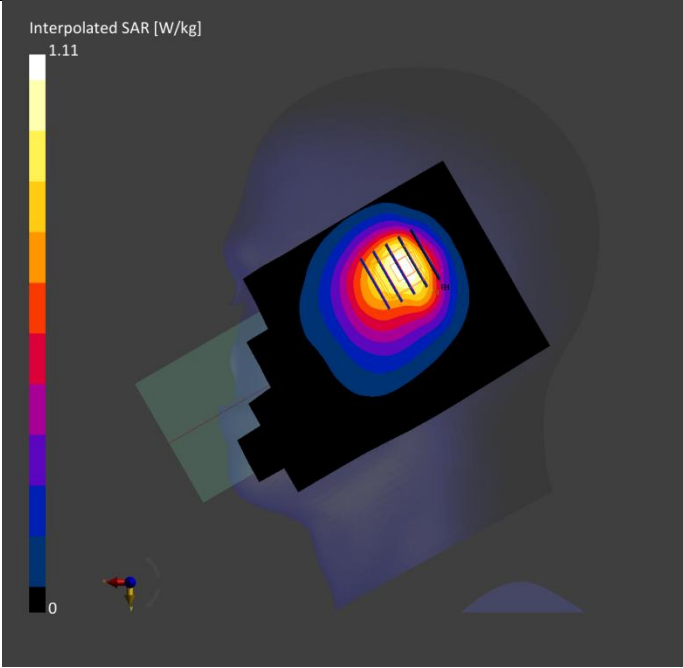


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band n12	5G NR FR1 FDD, 10930-AAC	706.5, 141300	10.29	0.871	43.3	22.5	21.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-11	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-11	2025-06-11
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.404	0.447
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.266	0.255
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		45.6
			Dist 3dB Peak [mm]		9.1

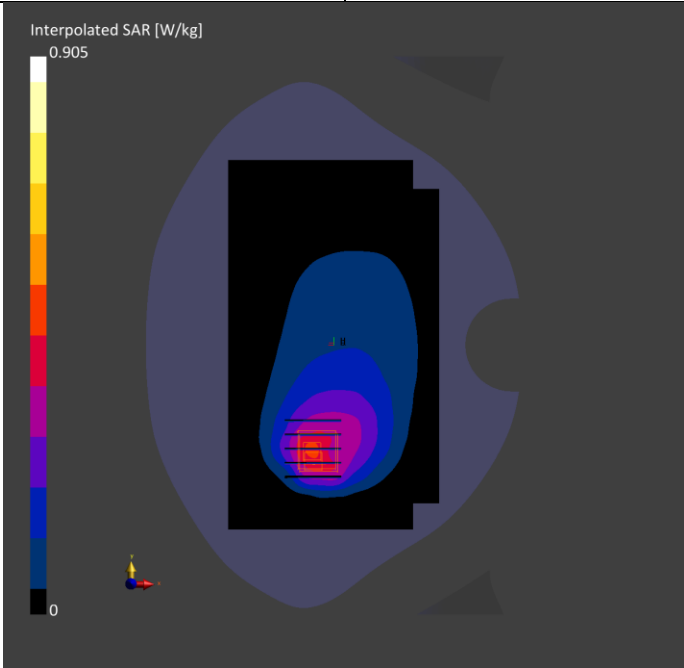

Ti-CC26040293-ATD
Meas.85 Body Plane with Back Side 10mm on 141300 Channel in NR Band 12 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band n12	5G NR FR1 FDD, 10930-AAC	706.5, 141300	10.29	0.871	43.3	22.5	21.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-11	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-11	2025-06-11
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.180	0.176
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.124	0.125
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	-0.09
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		58.1
			Dist 3dB Peak [mm]		14.8

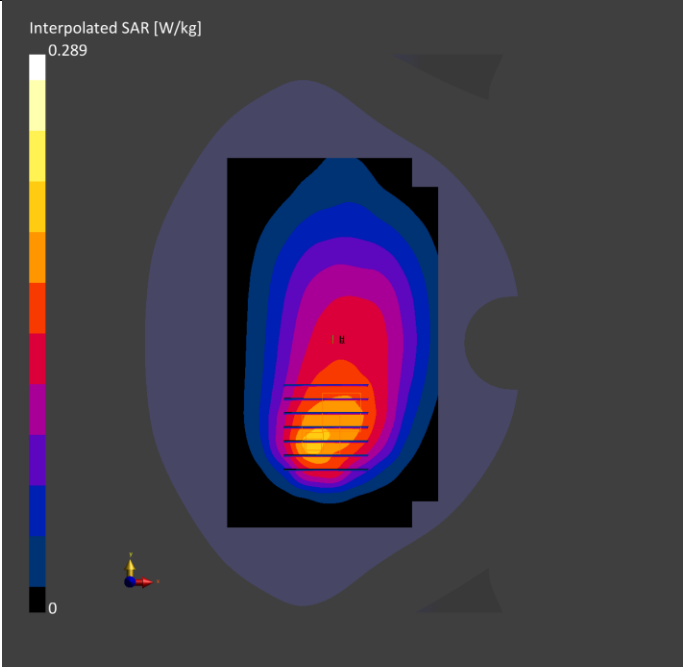

Ti-CC26040293-ATD

Meas.86 Right Head with Cheek on 166800 Channel in NR Band26 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band n26	5G NR FR1 FDD, 10931-AAC	834.0, 166800	10.25	0.891	42.4	22.3	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-10	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-10	2026-05-10
psSAR1g [W/kg]	0.806	0.798
psSAR10g [W/kg]	0.519	0.498
Power Drift [dB]	-0.02	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		48.3
Dist 3dB Peak [mm]		9.6

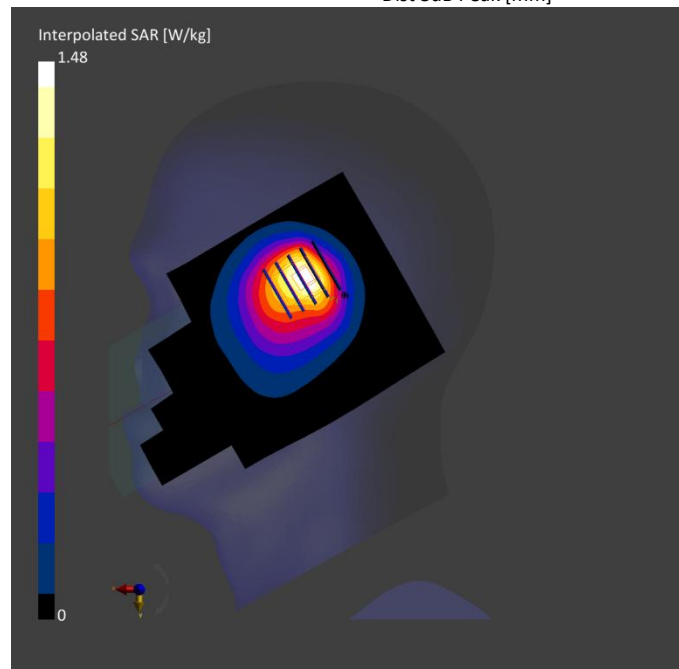

Ti-CC26040293-ATD
 Meas.87 Body Plane with Back Side 5mm on 165800 Channel in NR Band 26 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band n26	5G NR FR1 FDD, 10931-AAC	829.0, 165800	9.99	0.869	42.9	22.1	21.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-13	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-13	2025-06-13
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.619	0.636
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.396	0.383
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		51.9
			Dist 3dB Peak [mm]		10.1

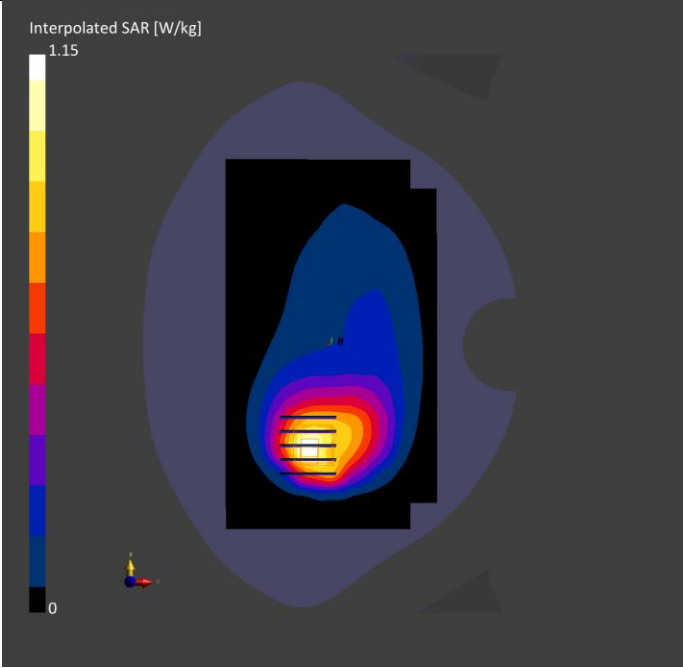

Ti-CC26040293-ATD

Meas.88 Body Plane with Back Side 10mm on 165800 Channel in NR Band 26 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band n26	5G NR FR1 FDD, 10931-AAC	829.0, 165800	9.99	0.869	42.9	22.1	21.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-13	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-13	2025-06-13
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.270	0.275
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.178	0.177
Graded Grid	Yes	Yes	Power Drift [dB]	0.04	-0.13
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		58.4
			Dist 3dB Peak [mm]		11.5

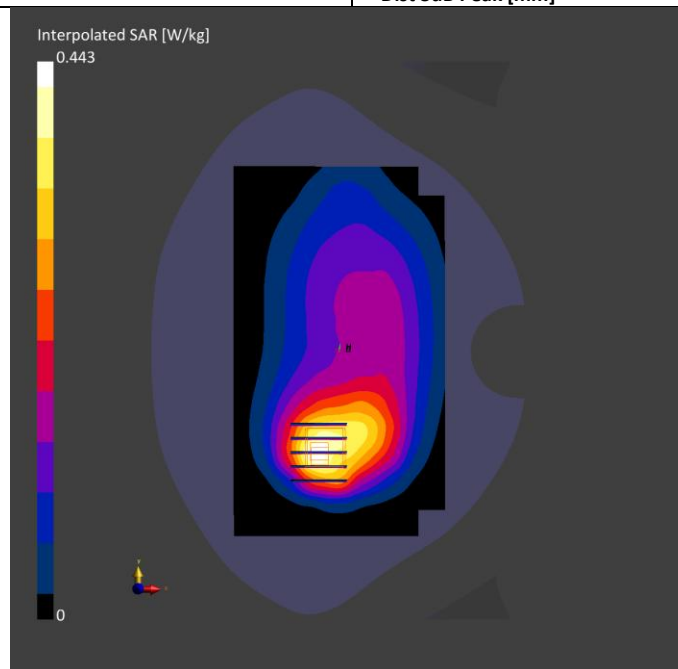

Ti-CC26040293-ATD

Meas.89 Right Head with Tilt on 346500 Channel in NR Band66 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band n66	5G NR FR1 FDD, 10934-AAC	1732.5, 346500	8.72	1.34	40.8	22.2	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-15	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-15	2026-05-15
psSAR1g [W/kg]	0.526	0.705
psSAR10g [W/kg]	0.274	0.361
Power Drift [dB]	0.02	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		67.1
Dist 3dB Peak [mm]		8.4

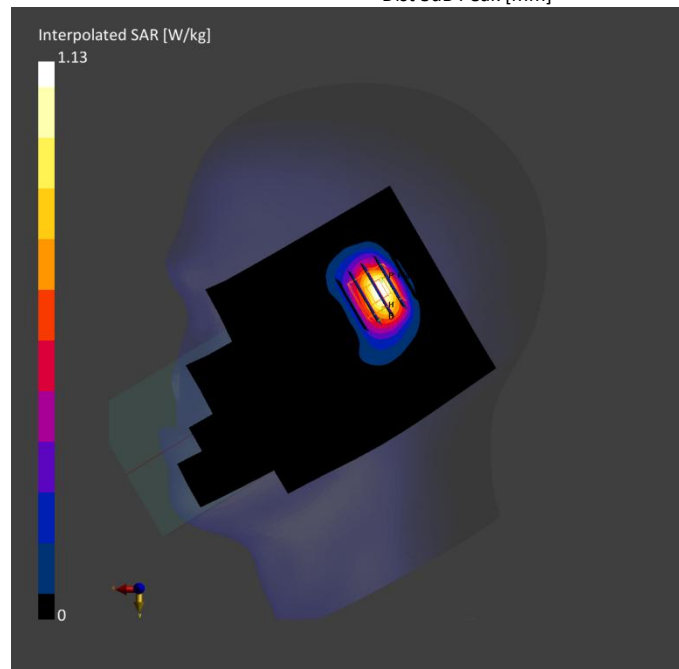

Ti-CC26040293-ATD

Meas.90 Body Plane with Back Side 5mm on 351500 Channel in NR Band66 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band n66	5G NR FR1 FDD, 10934-AAC	1757.5, 351500	8.72	1.41	39.0	22.2	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-15	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-15	2026-05-15
psSAR1g [W/kg]	0.548	0.572
psSAR10g [W/kg]	0.296	0.324
Power Drift [dB]	0.02	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.9
Dist 3dB Peak [mm]		10.1

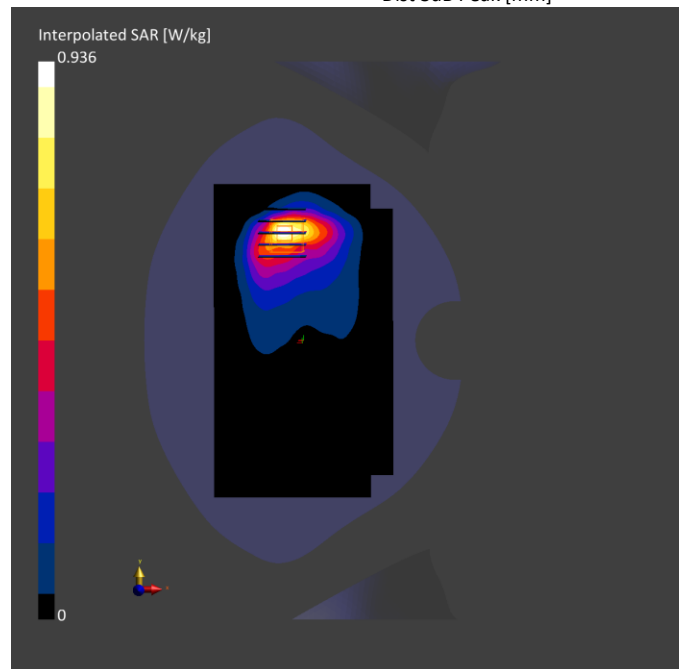

Meas.91 Body Plane with Bottom Edge 10mm on 346500 Channel in NR Band66 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 10.00	Band n66	5G NR FR1 FDD, 10934-AAC	1732.5, 346500	8.72	1.34	40.8	22.2	21.5

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000	2026-05-15	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-15	2026-05-15
psSAR1g [W/kg]	0.379	0.403
psSAR10g [W/kg]	0.157	0.165
Power Drift [dB]	-0.06	0.17
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		63.2
Dist 3dB Peak [mm]		12.7

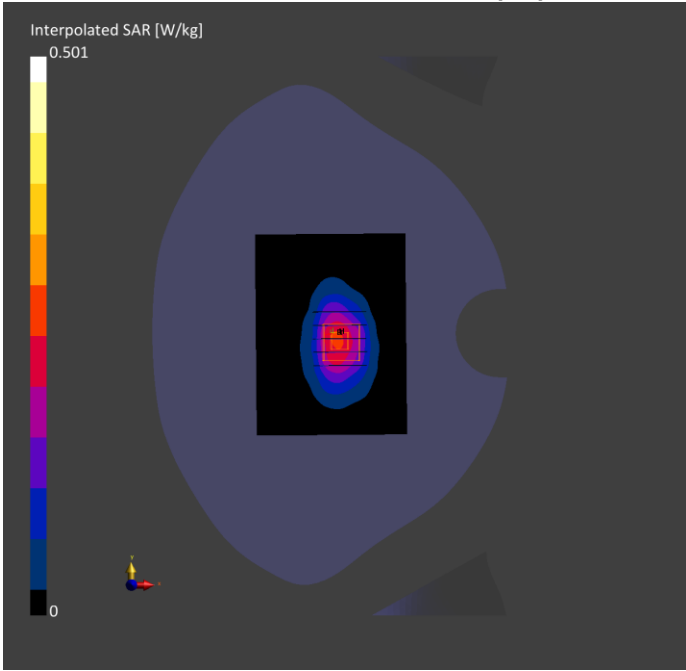

Ti-CC26040293-ATD

Meas.92 Body Plane with Bottom Edge 0mm on 351500 Channel in NR Band66 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 0.00	Band n66	5G NR FR1 FDD, 10934-AAC	1757.5, 351500	8.72	1.41	39.0	22.2	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-15	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-15	2026-05-15
psSAR1g [W/kg]	1.62	1.96
psSAR10g [W/kg]	0.829	0.930
Power Drift [dB]	-0.13	0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		54.0
Dist 3dB Peak [mm]		10.2

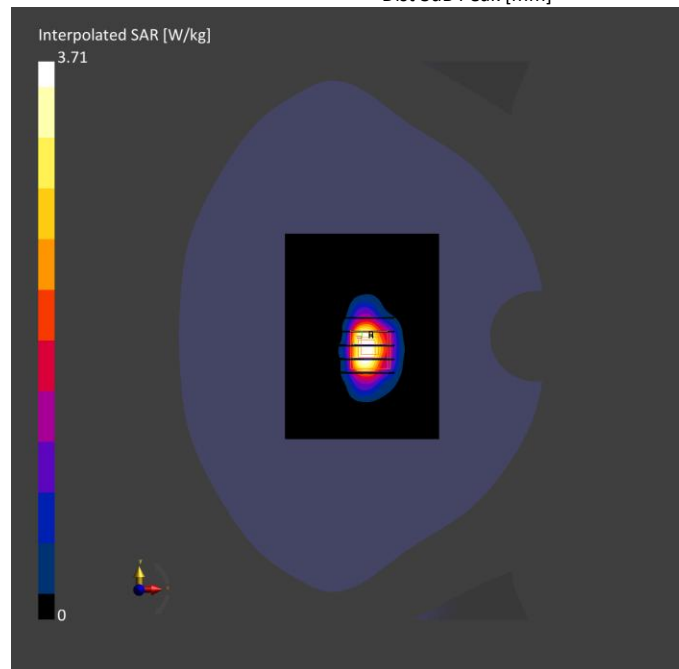

Ti-CC26040293-ATD

Meas.93 Right Head with Cheek on 136100 Channel in NR Band71 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band n71	5G NR FR1 FDD, 10931-AAC	680.5, 136100	10.29	0.864	43.1	22.2	21.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-07	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-07	2025-06-07
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.497	0.534
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.329	0.325
Graded Grid	Yes	Yes	Power Drift [dB]	0.08	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		47.5
			Dist 3dB Peak [mm]		9.6

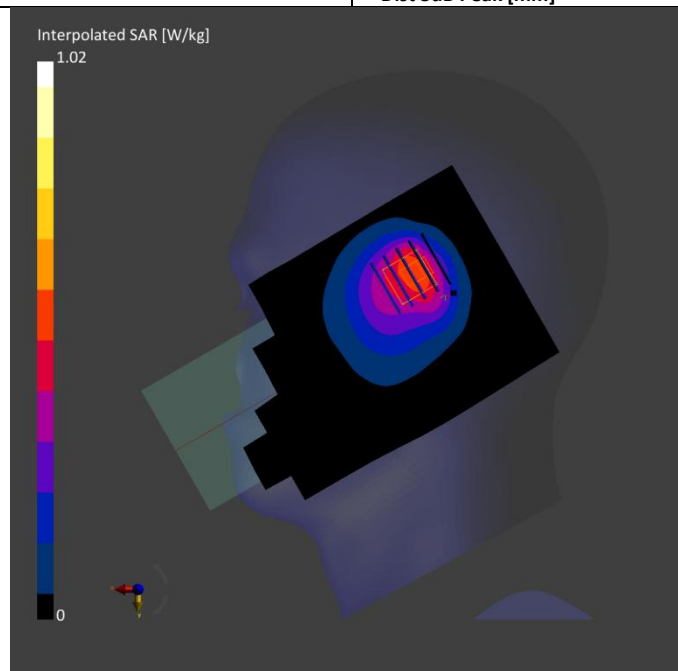

Ti-CC26040293-ATD
 Meas.94 Body Plane with Back Side 5mm on 136100 Channel in NR Band 71 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band n71	5G NR FR1 FDD, 10931-AAC	680.5, 136100	10.29	0.864	43.1	22.2	21.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-07	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-07	2025-06-07
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.378	0.409
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.250	0.234
Graded Grid	Yes	Yes	Power Drift [dB]	-0.02	-0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		45.9
			Dist 3dB Peak [mm]		9.1

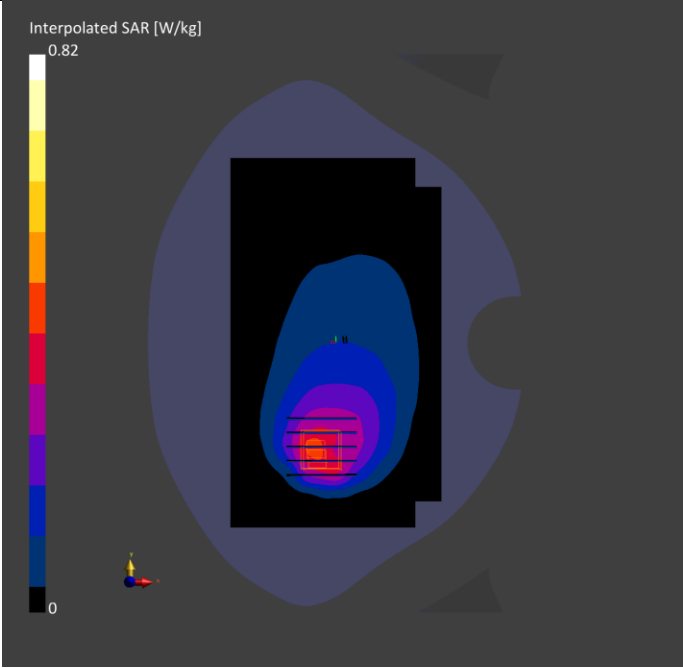

Ti-CC26040293-ATD
 Meas.95 Body Plane with Back Side 10mm on 136100 Channel in NR Band 71 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band n71	5G NR FR1 FDD, 10931-AAC	680.5, 136100	10.29	0.864	43.1	22.2	21.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-07	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2025-06-07	2025-06-07
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.184	0.184
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.126	0.126
Graded Grid	Yes	Yes	Power Drift [dB]	0.11	-0.07
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		57.0
			Dist 3dB Peak [mm]		13.8

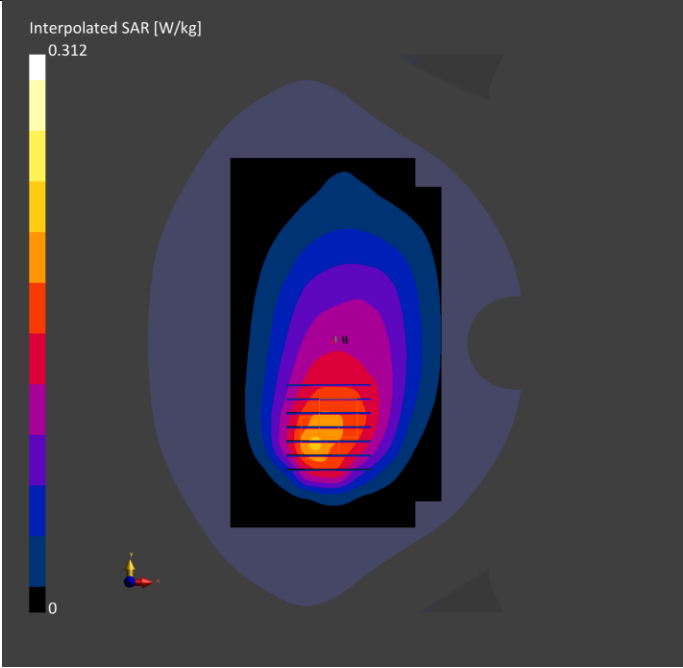

Ti-CC26040293-ATD
 Meas.96 Right Head with Tilt on 518000 Channel in NR Band38 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band n38	5G NR FR1 TDD, 10903-AAD	2590.0, 518000	7.06	1.89	40.4	22.5	21.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-18	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0	Date	2025-06-18	2025-06-18
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.636	0.829
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.303	0.384
Graded Grid	Yes	Yes	Power Drift [dB]	0.01	0.07
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		59.1
			Dist 3dB Peak [mm]		6.1

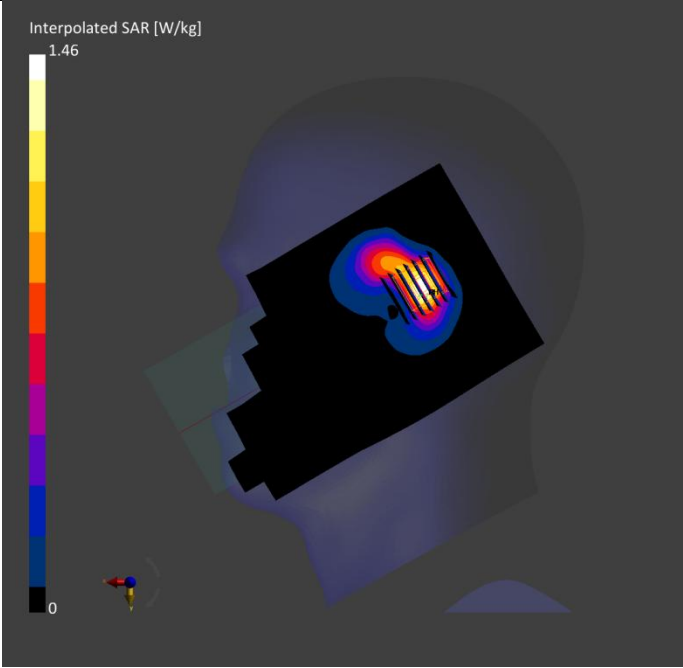


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band n38	5G NR FR1 TDD, 10903-AAD	2595.0, 519000	7.06	1.90	39.6	22.5	21.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-18	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0	Date	2025-06-18	2025-06-18
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.729	0.805
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.314	0.384
Graded Grid	Yes	Yes	Power Drift [dB]	0.04	0.15
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		60.4
			Dist 3dB Peak [mm]		7.1

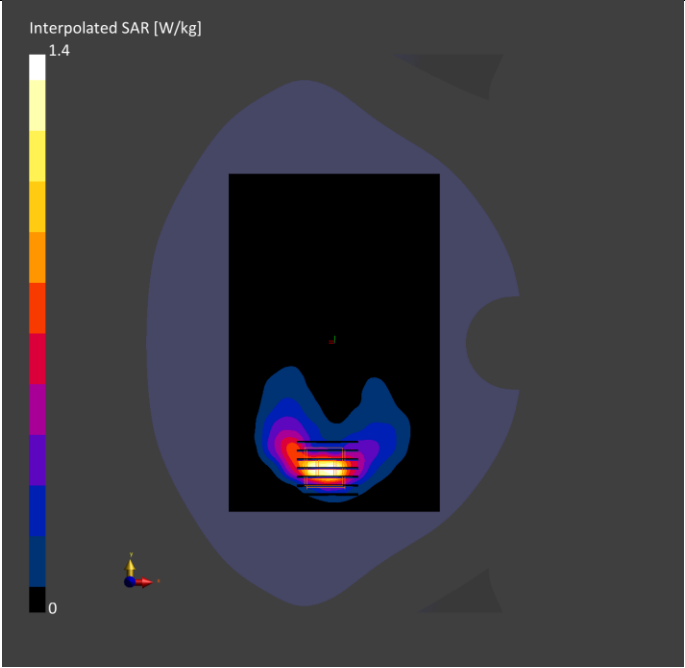

Ti-CC26040293-ATD
 Meas.98 Body Plane with Top Edge 10mm on 519000 Channel in NR Band 38 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 10.00	Band n38	5G NR FR1 TDD, 10903-AAD	2595.0, 519000	7.06	1.90	39.6	22.5	21.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-18	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 120.0	30.0 x 30.0 x 30.0	Date	2025-06-18	2025-06-18
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.491	0.525
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.226	0.246
Graded Grid	Yes	Yes	Power Drift [dB]	0.08	-0.08
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		53.4
			Dist 3dB Peak [mm]		8.0

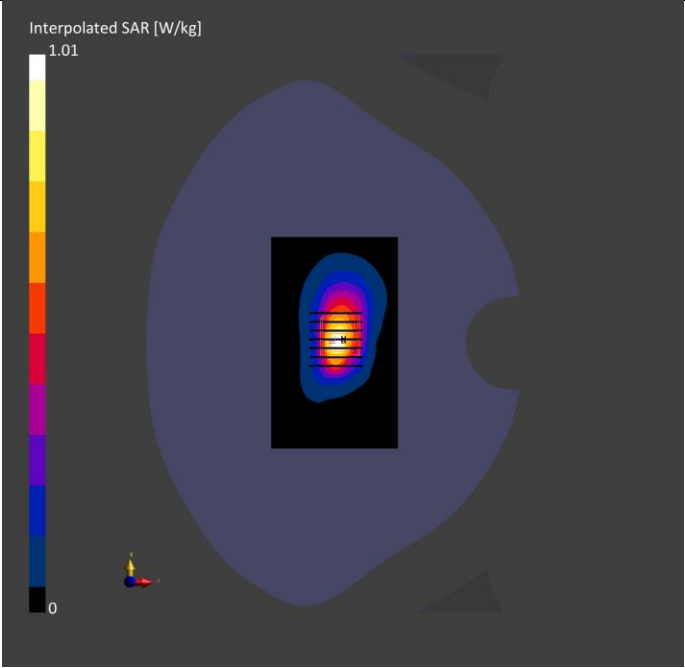

Ti-CC26040293-ATD
 Meas.99 Body Plane with Top Edge 0mm on 519000 Channel in NR Band 38 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 0.00	Band n38	5G NR FR1 TDD, 10903-AAD	2595.0, 519000	7.06	1.90	39.6	22.5	21.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-18	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0	Date	2025-06-18	2025-06-18
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	4.81	5.37
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	1.64	1.68
Graded Grid	Yes	Yes	Power Drift [dB]	-0.02	-0.13
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		39.9
			Dist 3dB Peak [mm]		5.0

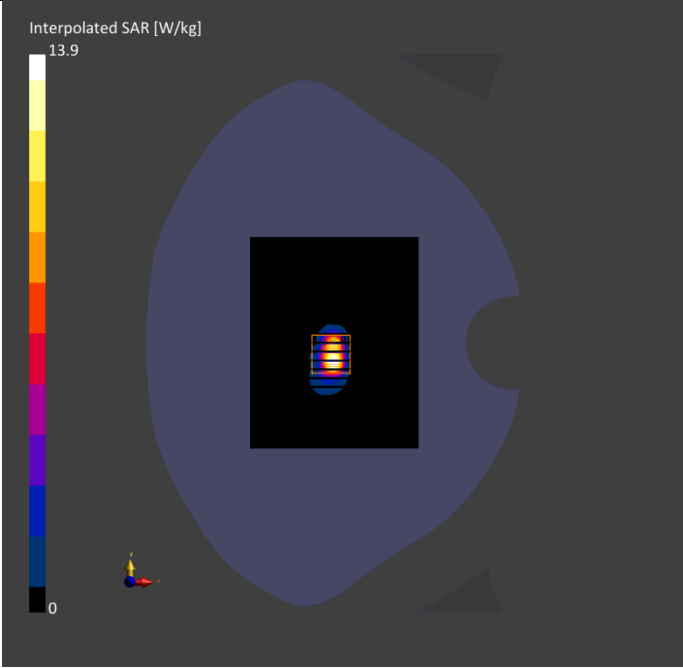

Ti-CC26040293-ATD

Meas.100 Right Head with Tilt on 528000 Channel in NR Band41 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	TILT, 0.00	Band n41	5G NR FR1 TDD, 10866-AAF	2640.0, 528000	7.64	2.05	37.7	22.5	21.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-25	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-25	2026-05-25
psSAR1g [W/kg]	0.781	0.834
psSAR10g [W/kg]	0.335	0.382
Power Drift [dB]	-0.14	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		54.6
Dist 3dB Peak [mm]		8.0

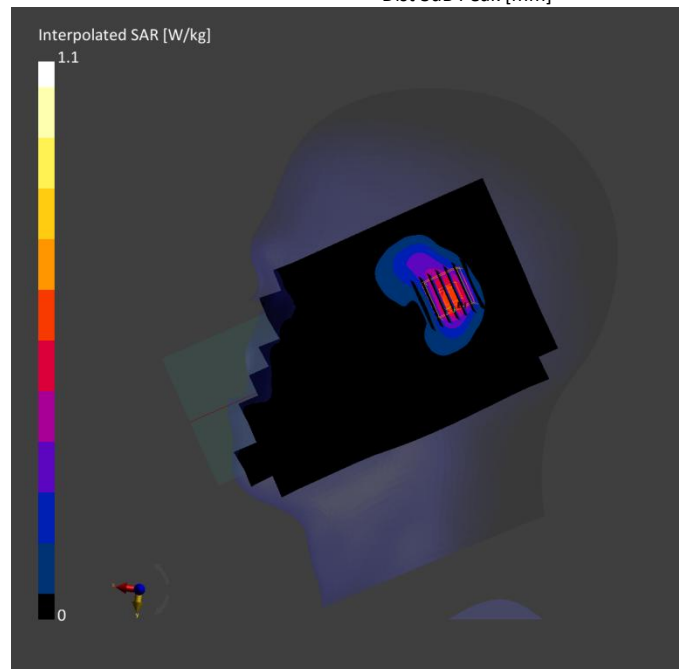


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 5.00	Band n41	5G NR FR1 TDD, 10866-AAF	2593.0, 518598	7.06	1.91	39.6	22.4	21.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-23	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0	Date	2025-06-23	2025-06-23
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.761	0.831
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.326	0.355
Graded Grid	Yes	Yes	Power Drift [dB]	-0.04	0.05
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		52.5
			Dist 3dB Peak [mm]		6.0

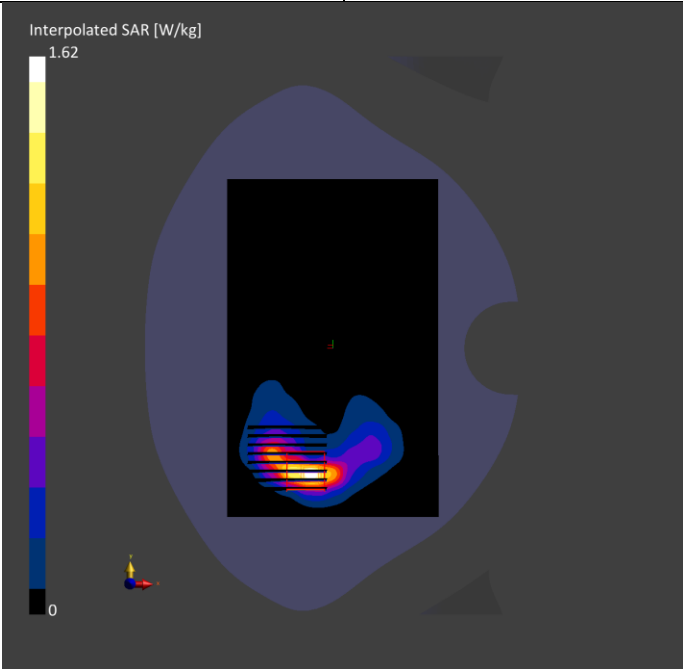

Ti-CC26040293-ATD

Meas.102 Body Plane with Bottom Edge 10mm on 509202 Channel in NR Band41 mode with Antenna 1

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 10.00	Band n41	5G NR FR1 TDD, 10866-AAF	2546.0, 509202	7.64	1.91	40.3	22.5	21.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-05-25	EX3DV4 - SN7664, 2025-06-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-25	2026-05-25
psSAR1g [W/kg]	0.635	0.655
psSAR10g [W/kg]	0.293	0.306
Power Drift [dB]	0.00	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.0
Dist 3dB Peak [mm]		9.0

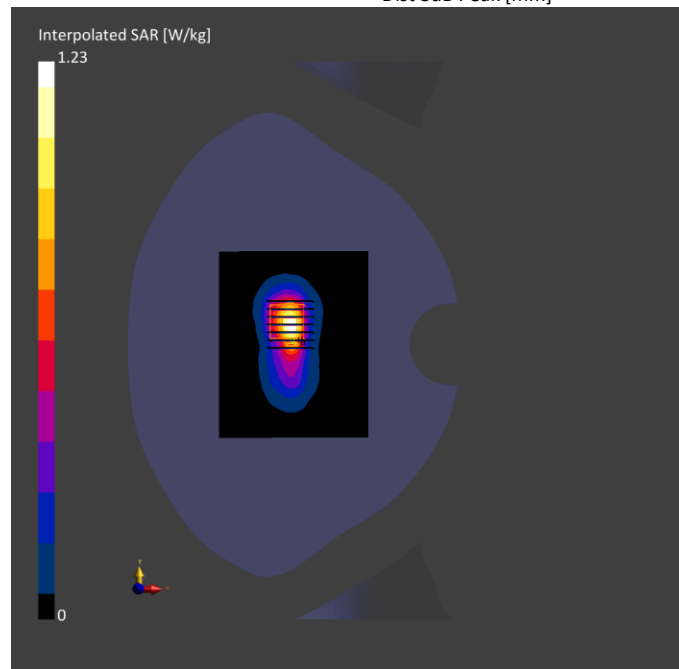

Ti-CC26040293-ATD
 Meas.103 Body Plane with Top Edge 0mm on 513900 Channel in NR Band 41 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 0.00	Band n41	5G NR FR1 TDD, 10866-AAF	2569.5, 513900	7.06	1.87	39.7	22.4	21.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-23	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0	Date	2025-06-23	2025-06-23
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	3.16	5.20
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	1.31	1.89
Graded Grid	Yes	Yes	Power Drift [dB]	-0.07	0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		50.7
			Dist 3dB Peak [mm]		5.1

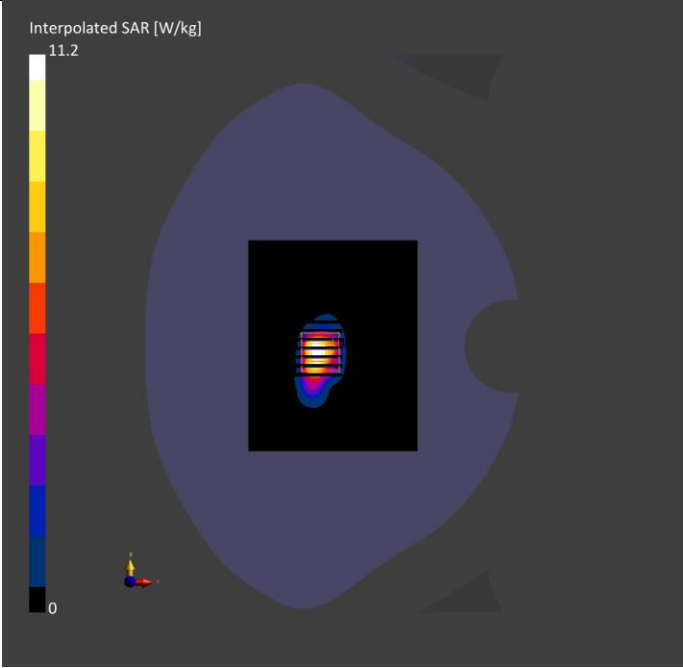

Ti-CC26040293-ATD

Meas.104 Left Head with Tilt on 641666 Channel in NR Band48 mode with Antenna 5

Date: 2025.06.18

Communication System Band: N48; Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3624.99$ MHz; $\sigma = 2.91$ S/m; $\epsilon_r = 38.226$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch641666/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.943 W/kg

Ch641666/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 16.85 V/m; Power Drift = -0.19 dB



Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 0.937 W/kg

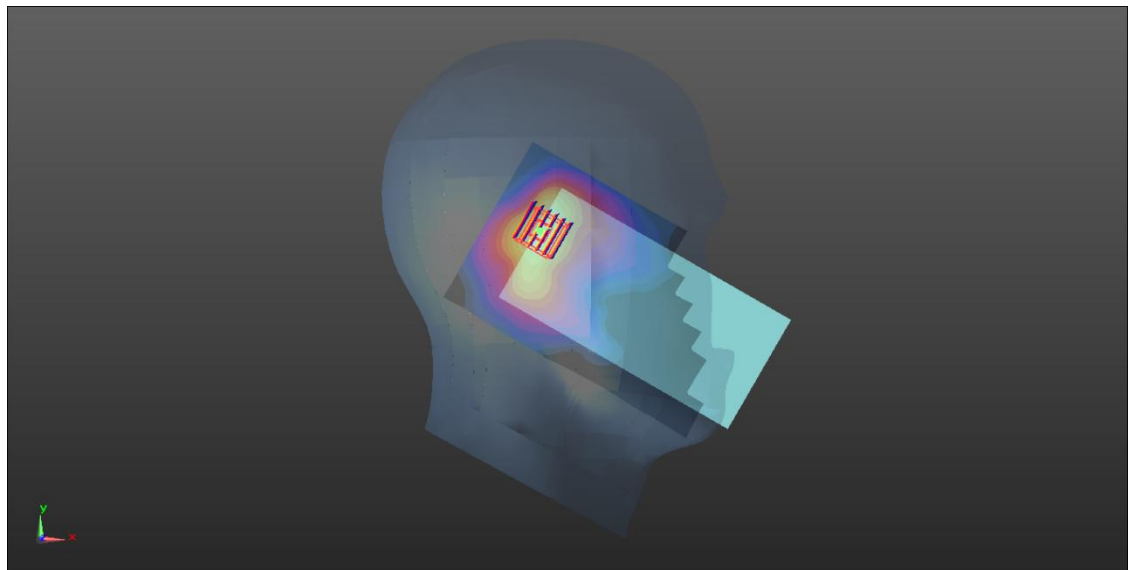

0 dB = 0.937 W/kg

Ti-CC26040293-ATD

Meas.105 Body Plane with Back Side 5 mm on 640000 Channel in NR Band48 mode with Antenna 3

Date: 2025.06.18

Communication System Band: N48; Frequency: 3600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3600$ MHz; $\sigma = 2.996$ S/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch640000/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

Ch640000/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 5.131 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.826 W/kg; SAR(10 g) = 0.297 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 0.953 W/kg

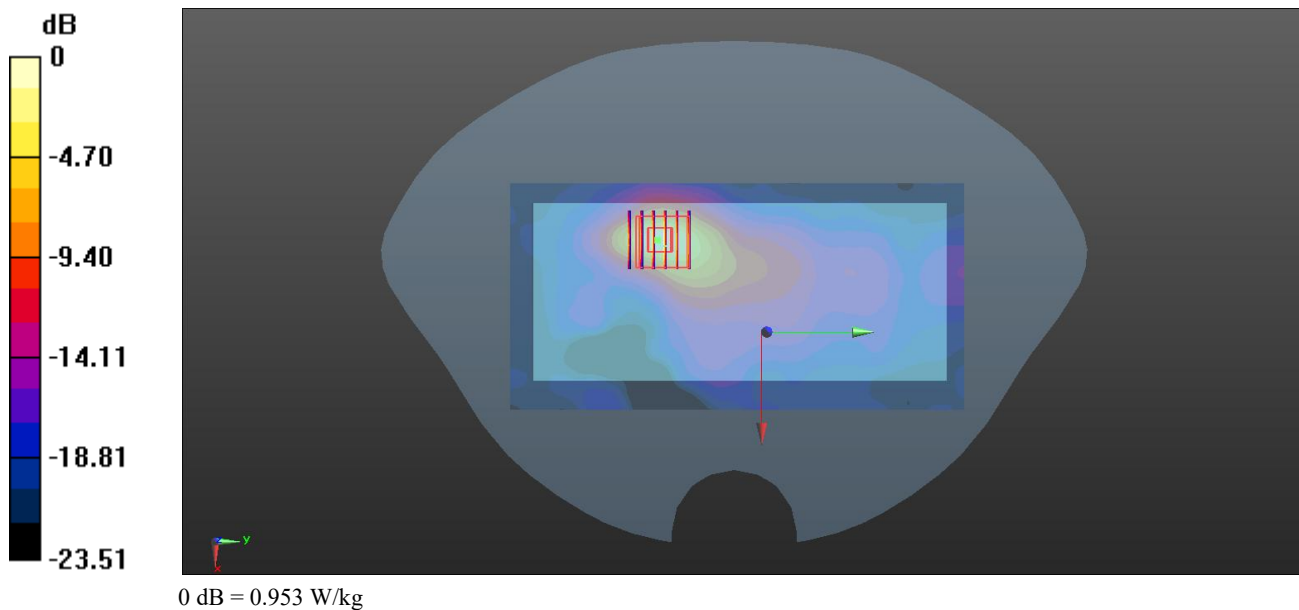

Ti-CC26040293-ATD

Meas.106 Body Plane with Back Side 10 mm on 640000 Channel in NR Band48 mode with Antenna 5

Date: 2025.06.18

Communication System Band: N48; Frequency: 3600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3600$ MHz; $\sigma = 2.996$ S/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch640000/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.545 W/kg

Ch640000/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 3.275 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.974 W/kg

SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.200 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 0.492 W/kg

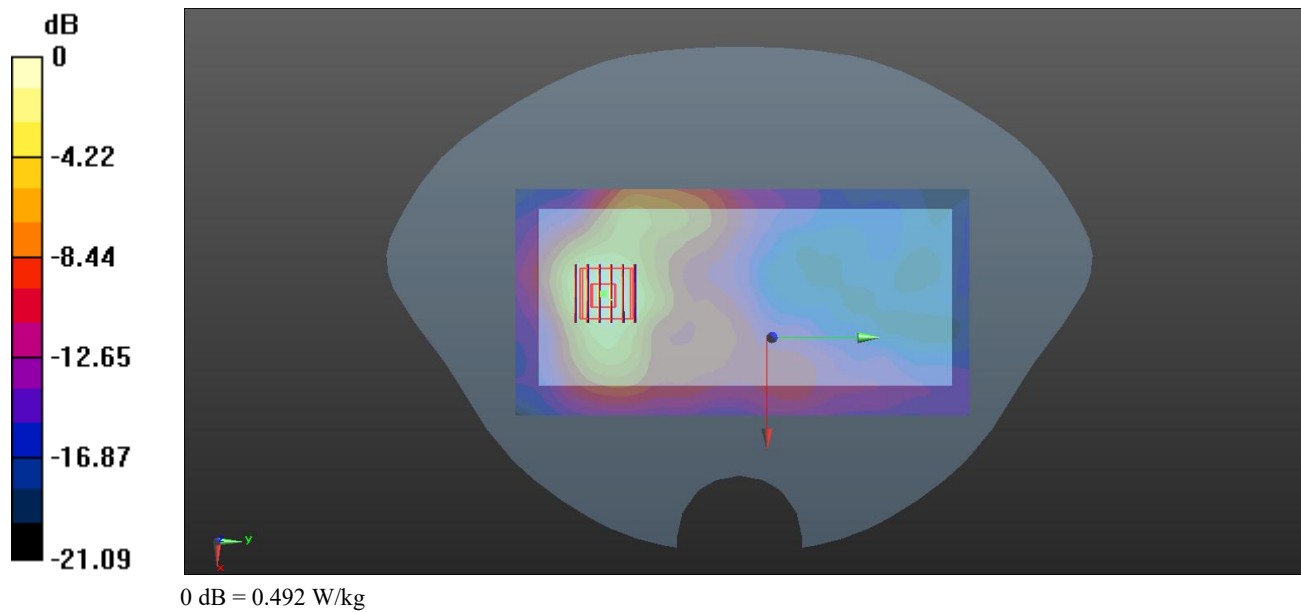

Ti-CC26040293-ATD

Meas.107 Left Head with Tilt on 633334 Channel in NR Band77 mode with Antenna 5

Date: 2026.05.07

Communication System Band: N77; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 3.011$ S/m; $\epsilon_r = 38.012$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.56, 6.93, 6.67) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch633334/Area Scan (101x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.629 W/kg

Ch633334/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 13.85 V/m; Power Drift = 0.09 dB



Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 44.1%

Maximum value of SAR (measured) = 0.926 W/kg

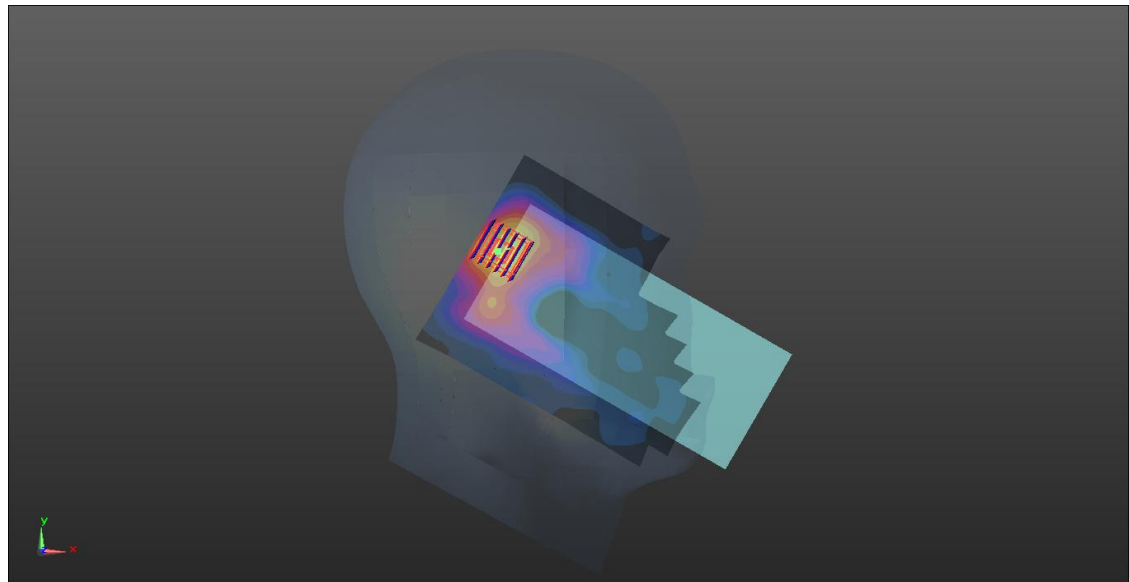

0 dB = 0.926 W/kg

Ti-CC26040293-ATD

Meas.108 Body Plane with Back Side 5mm on 633334 Channel in NR Band77 mode with Antenna 5

Date: 2026.05.07

Communication System Band: N77; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 3.011$ S/m; $\epsilon_r = 38.012$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.56, 6.93, 6.67) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch633334/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.721 W/kg

Ch633334/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 2.826 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.352 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 0.921 W/kg

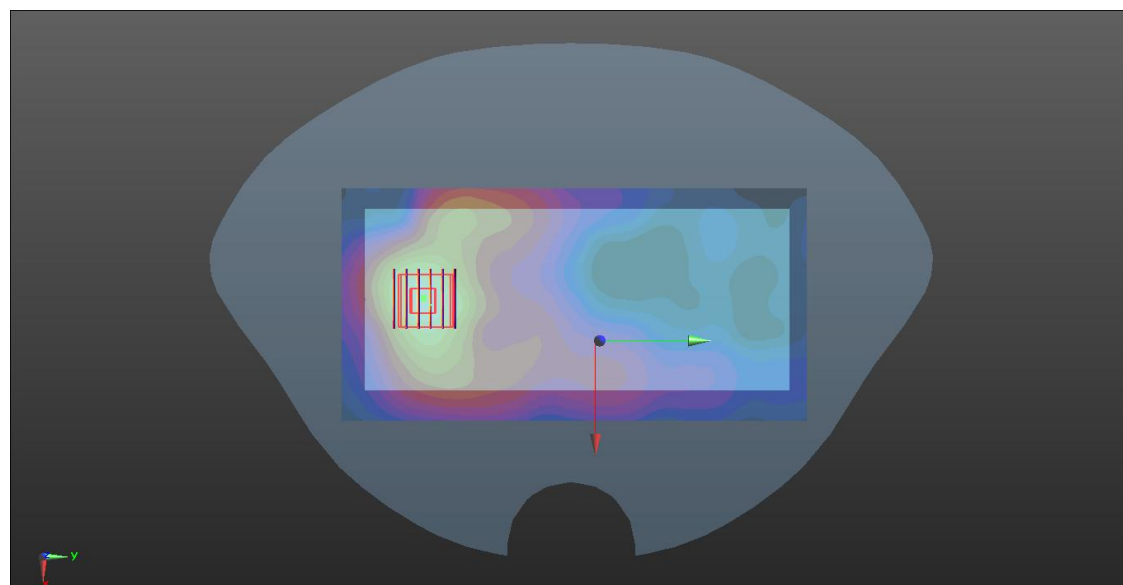

0 dB = 0.921 W/kg

Ti-CC26040293-ATD

Meas.109 Body Plane with Back Side 10mm on 633334 Channel in NR Band77 mode with Antenna 5

Date: 2026.05.07

Communication System Band: N77; Frequency: 3350.01 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3350.01$ MHz; $\sigma = 3.011$ S/m; $\epsilon_r = 38.012$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.56, 6.93, 6.67) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch633334/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.712 W/kg

Ch633334/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 3.646 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 0.686 W/kg

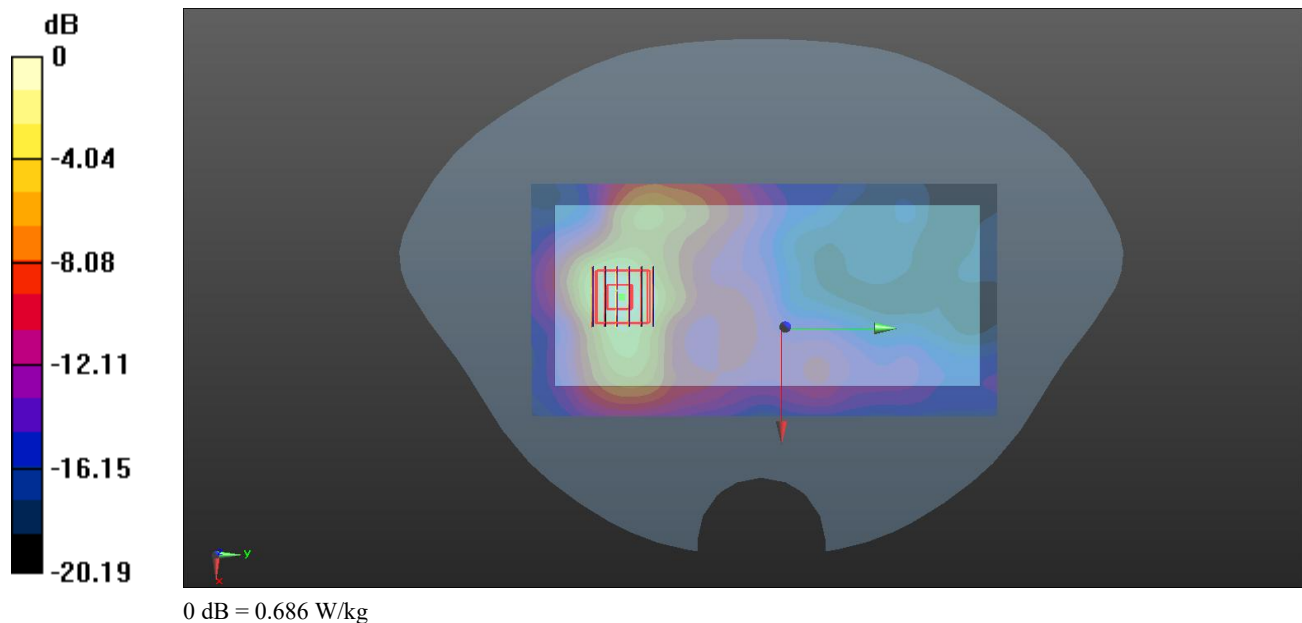

Ti-CC26040293-ATD

Meas.110 Left Head with Cheek on 650000 Channel in NR Band77 mode with Antenna 5

Date: 2025.06.21

Communication System Band: N77; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.13$ S/m; $\epsilon_r = 37.447$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch650000/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.890 W/kg

Ch650000/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 15.01 V/m; Power Drift = -0.09 dB



Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.316 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 45.5%

Maximum value of SAR (measured) = 0.919 W/kg

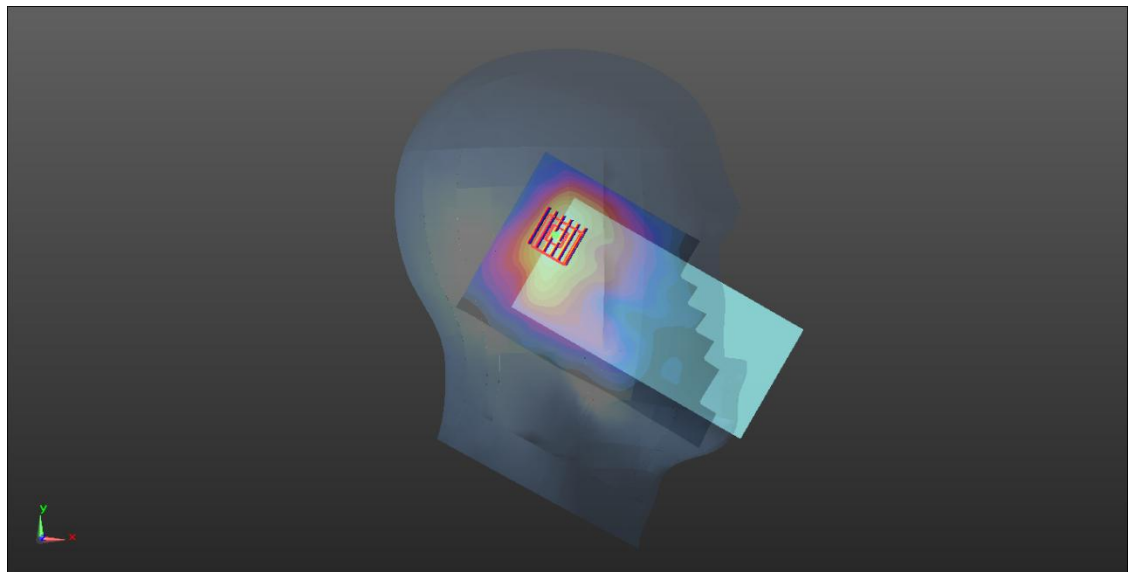

0 dB = 0.919 W/kg

Ti-CC26040293-ATD

Meas.111 Body Plane with Back Side 5 mm on 656000 Channel in NR Band77 mode with Antenna 7

Date: 2025.06.24

Communication System Band: N77; Frequency: 3840 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3840$ MHz; $\sigma = 3.152$ S/m; $\epsilon_r = 37.908$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.98, 5.98, 5.98); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch656000/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Ch656000/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 3.444 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 0.903 W/kg; SAR(10 g) = 0.319 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 1.08 W/kg

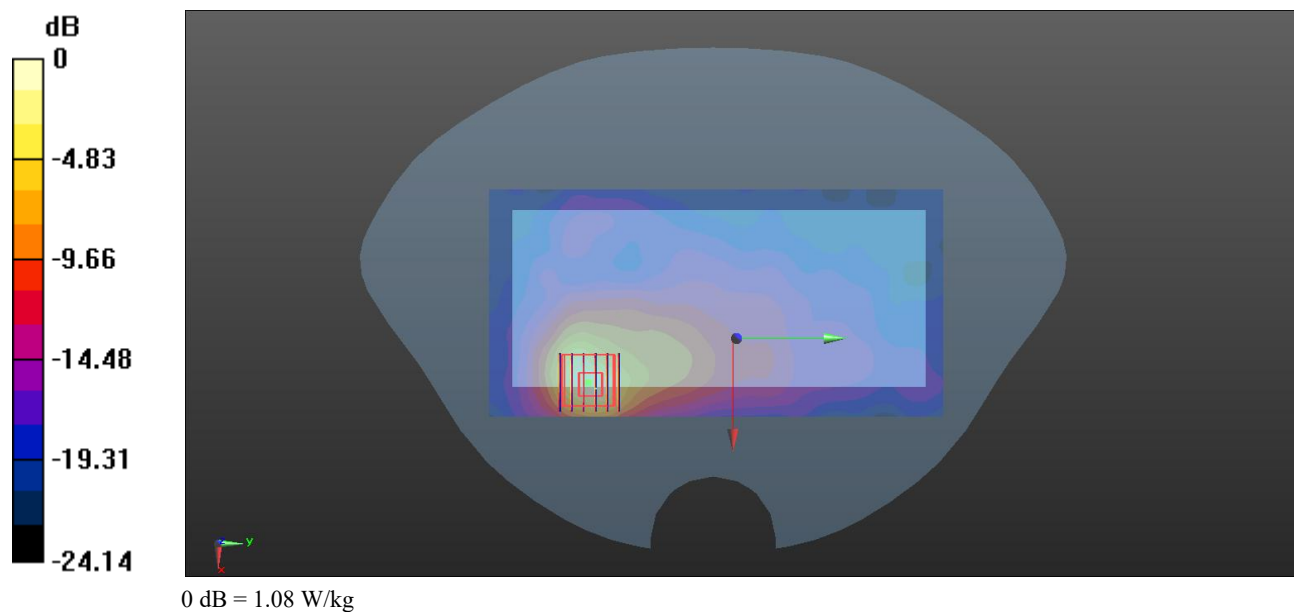

Ti-CC26040293-ATD

Meas.112 Body Plane with Back Side 10 mm on 662000 Channel in NR Band77 mode with Antenna 5

Date: 2026.05.13

Communication System Band: N77; Frequency: 3930 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3930$ MHz; $\sigma = 3.414$ S/m; $\epsilon_r = 36.775$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.41, 6.77, 6.52) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch662000/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.711 W/kg

Ch662000/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 3.637 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.681 W/kg

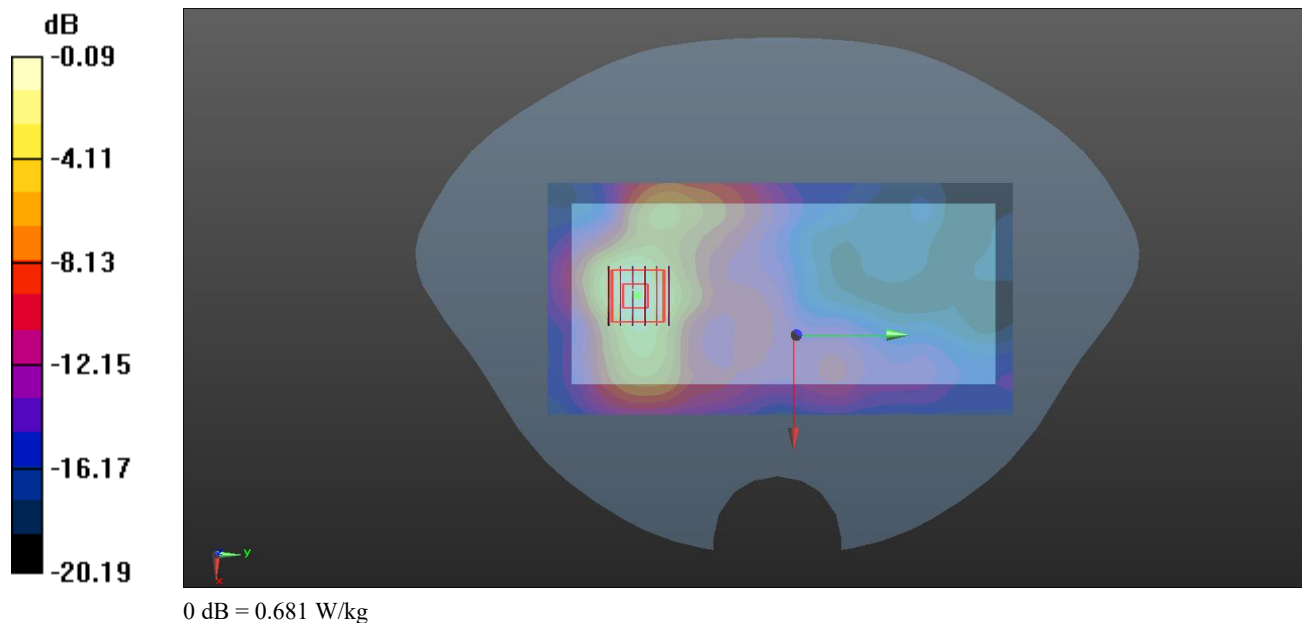

Ti-CC26040293-ATD

Meas.113 Left Head with Tilt on 633334 Channel in NR Band78 mode with Antenna 5

Date: 2025.06.13

Communication System Band: N78; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.97$ S/m; $\epsilon_r = 37.145$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch633334/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.873 W/kg

Ch633334/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 16.08 V/m; Power Drift = -0.12 dB



Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 0.855 W/kg

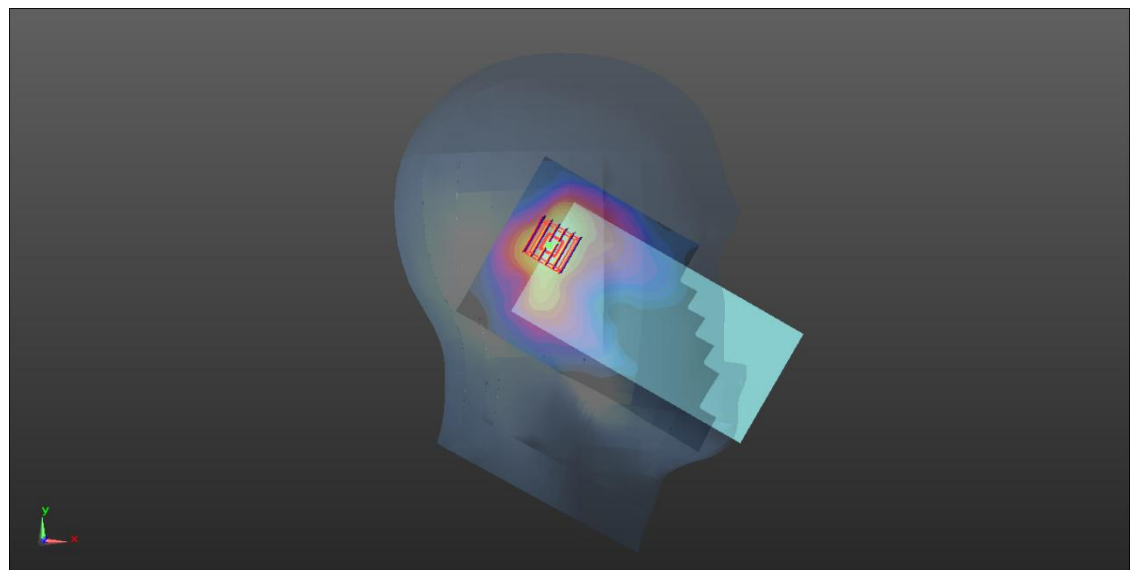

0 dB = 0.855 W/kg

Ti-CC26040293-ATD

Meas.114 Body Plane with Back Side 5mm on 633334 Channel in NR Band78 mode with Antenna 2

Date: 2026.05.07

Communication System Band: N78; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 3.011$ S/m; $\epsilon_r = 38.012$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.56, 6.93, 6.67) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch633334/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.810 W/kg

Ch633334/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 3.183 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.774 W/kg

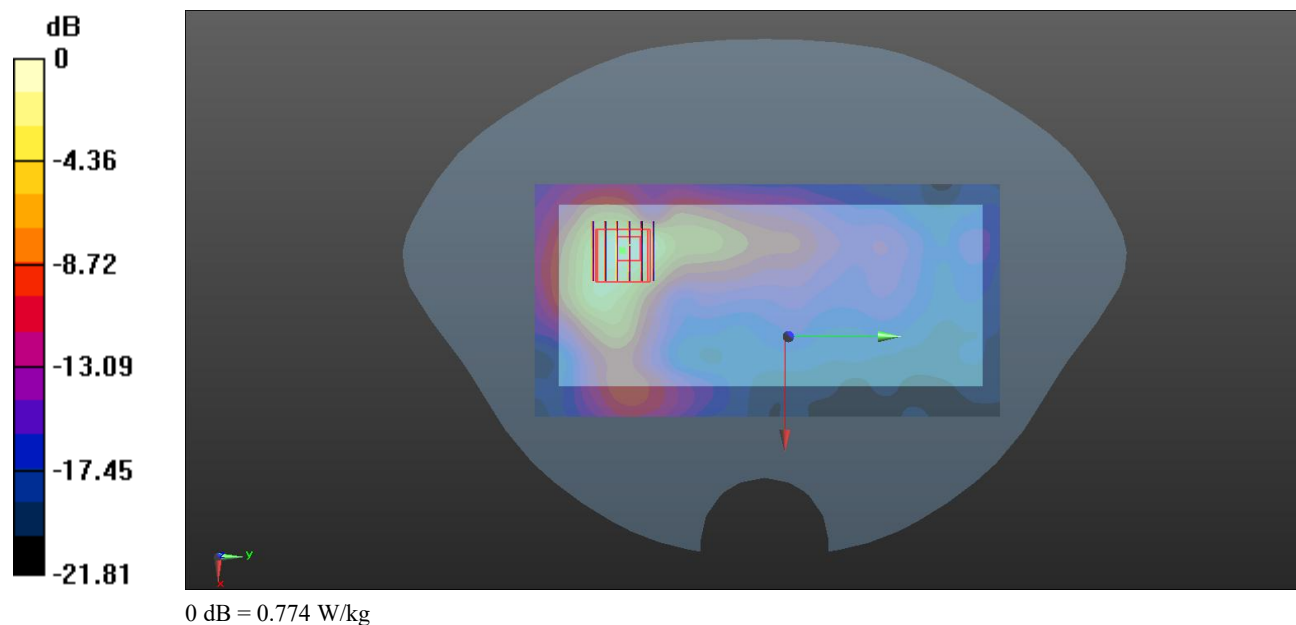

Ti-CC26040293-ATD

Meas.115 Body Plane with Left Edge 10 mm on 633334 Channel in NR Band77 mode with Antenna 3

Date: 2026.05.07

Communication System Band: N77; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 3.011$ S/m; $\epsilon_r = 38.012$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.56, 6.93, 6.67) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch633334/Area Scan (51x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.611 W/kg

Ch633334/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 5.921 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.176 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.581 W/kg

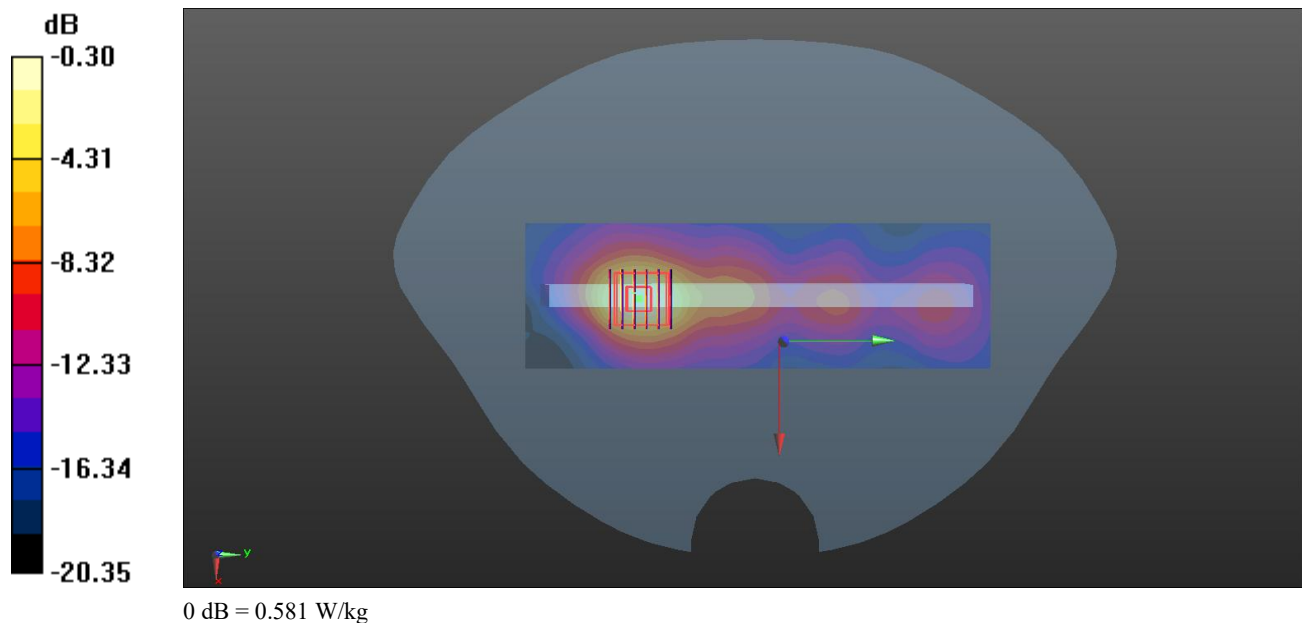

Ti-CC26040293-ATD

Meas.116 Left Head with Cheek on 650000 Channel in NR Band78 mode with Antenna 7

Date: 2025.06.23

Communication System Band: N78; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 37.647$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch650000/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Ch650000/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 6.814 V/m; Power Drift = 0.13 dB



Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.770 W/kg; SAR(10 g) = 0.325 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.881 W/kg

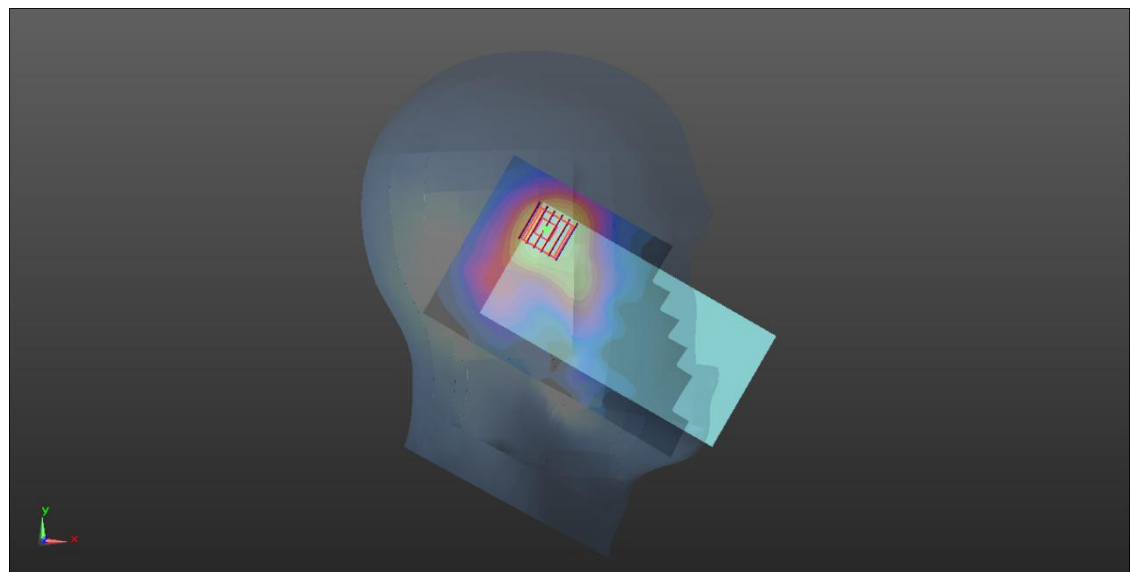

0 dB = 0.881 W/kg

Ti-CC26040293-ATD

Meas.117 Body Plane with Back Side 5 mm on 650000 Channel in NR Band78 mode with Antenna 2

Date: 2026.05.13

Communication System Band: N78; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3750$ MHz; $\sigma = 3.084$ S/m; $\epsilon_r = 38.34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.5, 6.86, 6.6) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch650000/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.810 W/kg

Ch650000/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 3.183 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.315 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.811 W/kg

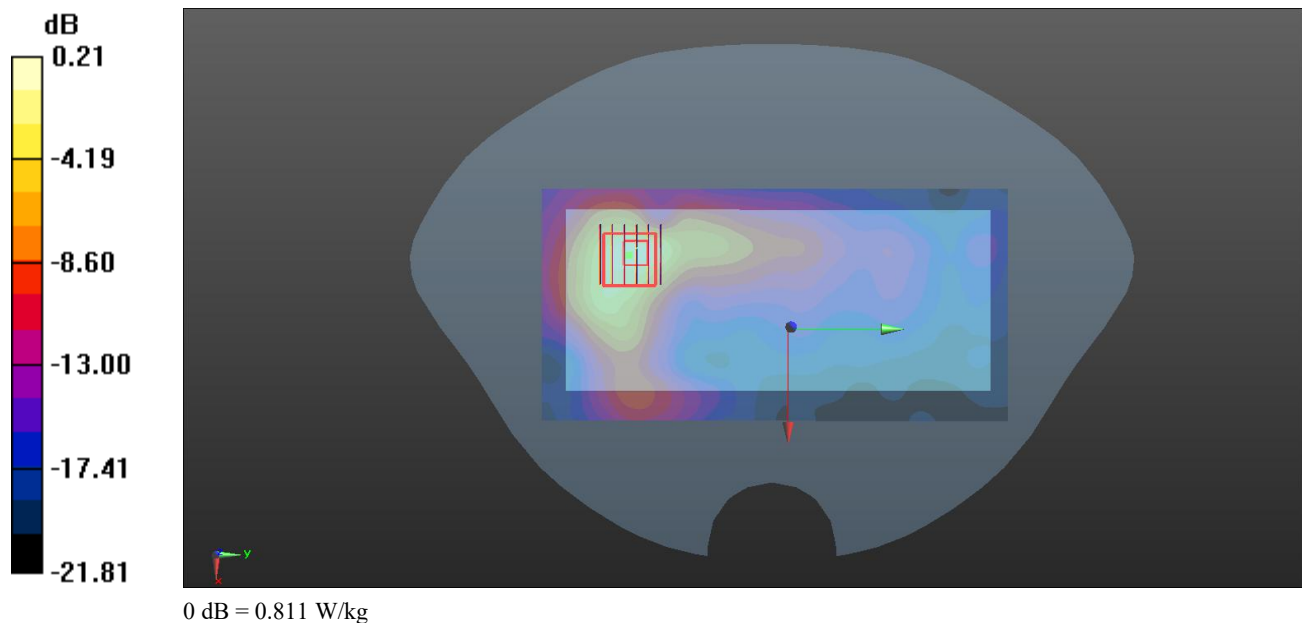

Ti-CC26040293-ATD

Meas.118 Body Plane with Back Side 10 mm on 650000 Channel in NR Band78 mode with Antenna 2

Date: 2026.05.13

Communication System Band: N78; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3750$ MHz; $\sigma = 3.084$ S/m; $\epsilon_r = 38.34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.5, 6.86, 6.6) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch650000/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.521 W/kg

Ch650000/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 1.966 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.962 W/kg

SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.431 W/kg

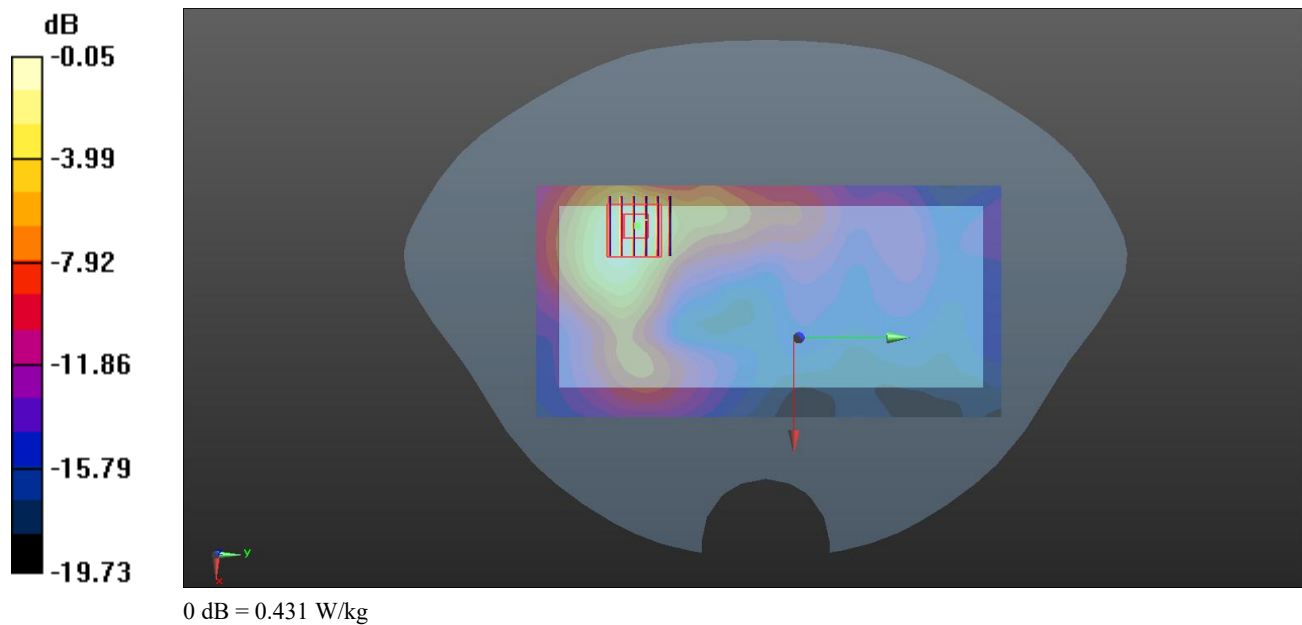

Ti-CC26040293-ATD

Meas.119 Left Head with Cheek on 1 Channel in IEEE802.11b mode with Antenna 6

Date: 2025.06.06

Communication System Band: 2.4G; Frequency: 2412 MHz; Duty Cycle: 1:1.005

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.724$ S/m; $\epsilon_r = 40.383$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.387 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.955 V/m; Power Drift = -0.07 dB



Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 0.333 W/kg

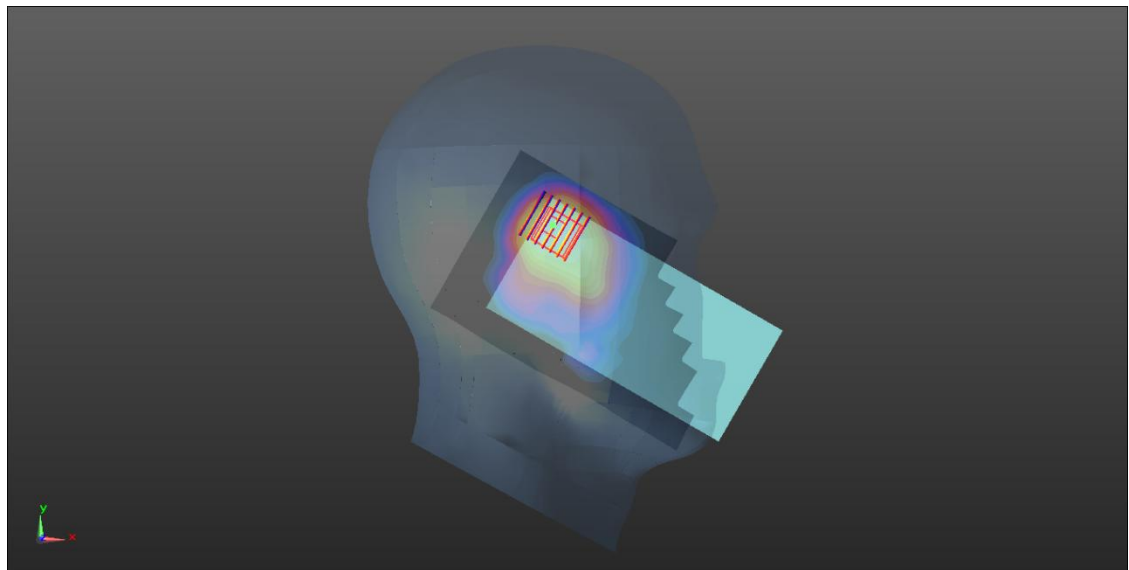

0 dB = 0.333 W/kg

Ti-CC26040293-ATD

Meas.120 Body Plane with Back Side 5mm on 11 Channel in IEEE802.11b mode with Antenna 6

Date: 2026.05.06

Communication System Band: 2.4G; Frequency: 2462 MHz; Duty Cycle: 1:1.005

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 38.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch11/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.464 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.412 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 0.411 W/kg

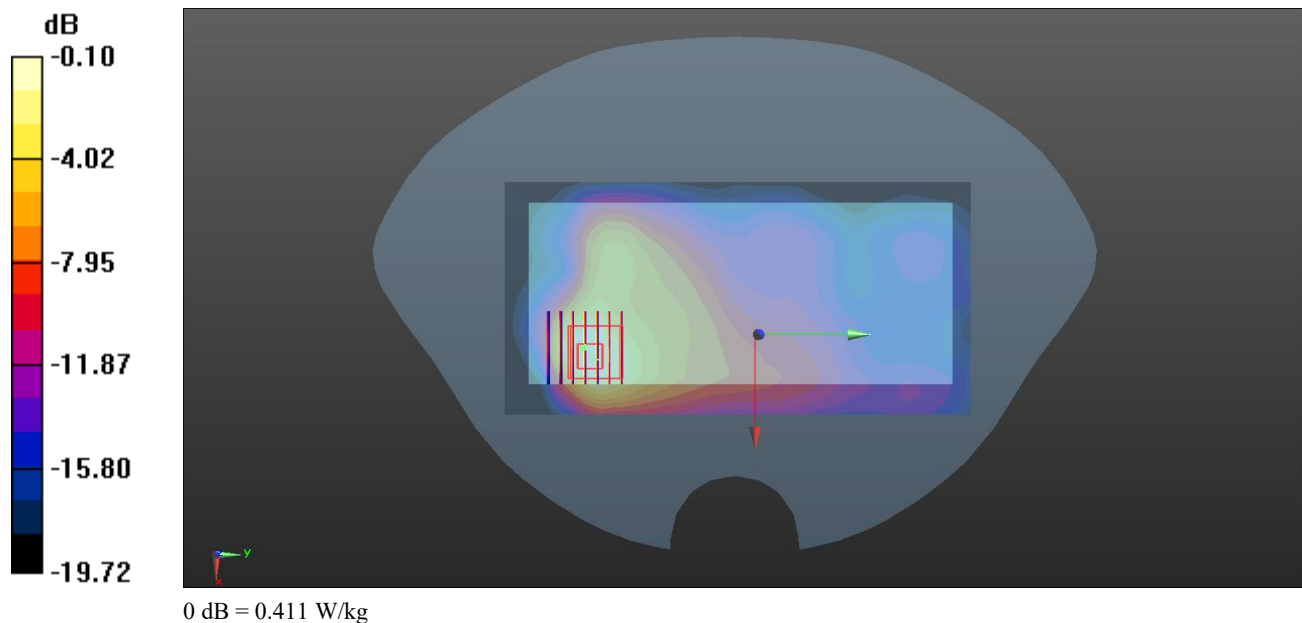

Ti-CC26040293-ATD

Meas.121 Body Plane with Back Side 10mm on 11 Channel in IEEE802.11b mode with Antenna 6

Date: 2026.05.06

Communication System Band: 2.4G; Frequency: 2462 MHz; Duty Cycle: 1:1.005

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 38.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch11/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.158 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.351 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.075 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.149 W/kg

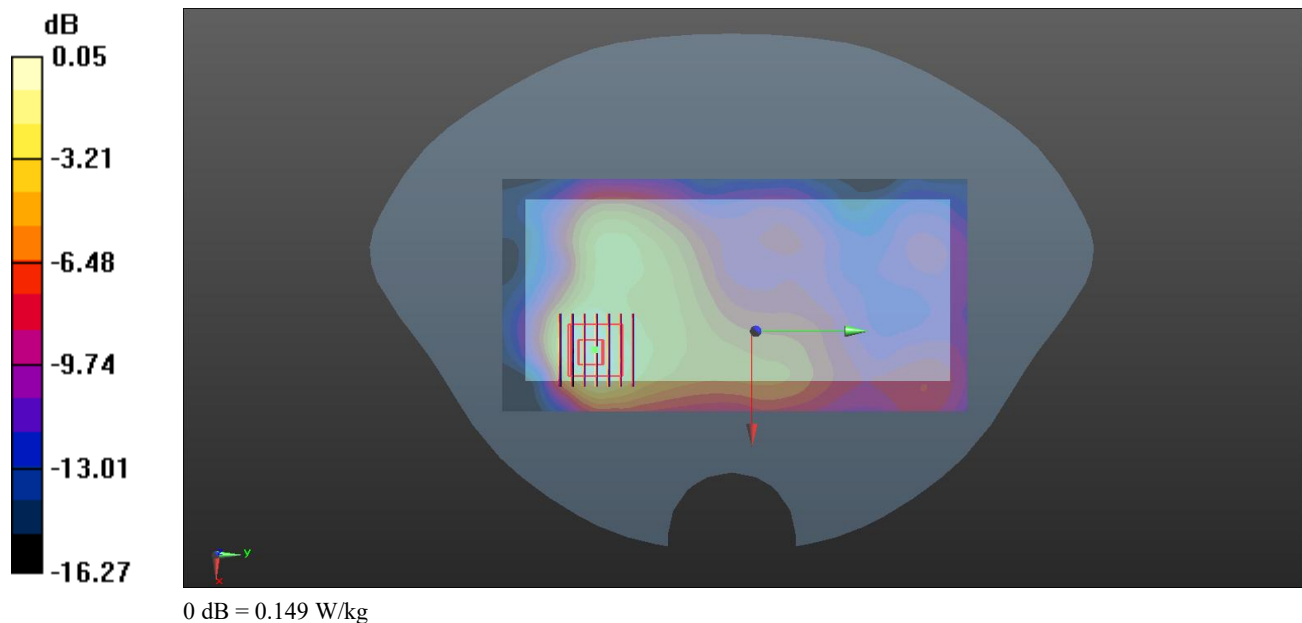

Ti-CC26040293-ATD

Meas.122 Body Plane with Top Edge 0mm on 11 Channel in IEEE802.11b mode with Antenna 6

Date: 2026.05.06

Communication System Band: 2.4G; Frequency: 2462 MHz; Duty Cycle: 1:1.005

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 38.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3685; ConvF(6.63, 6.63, 6.63) @ 2437 MHz; Calibrated: 2019-03-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 2021-05-17
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7474)

Ch11/Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.48 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.05 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.389 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 44.6%

Maximum value of SAR (measured) = 1.38 W/kg

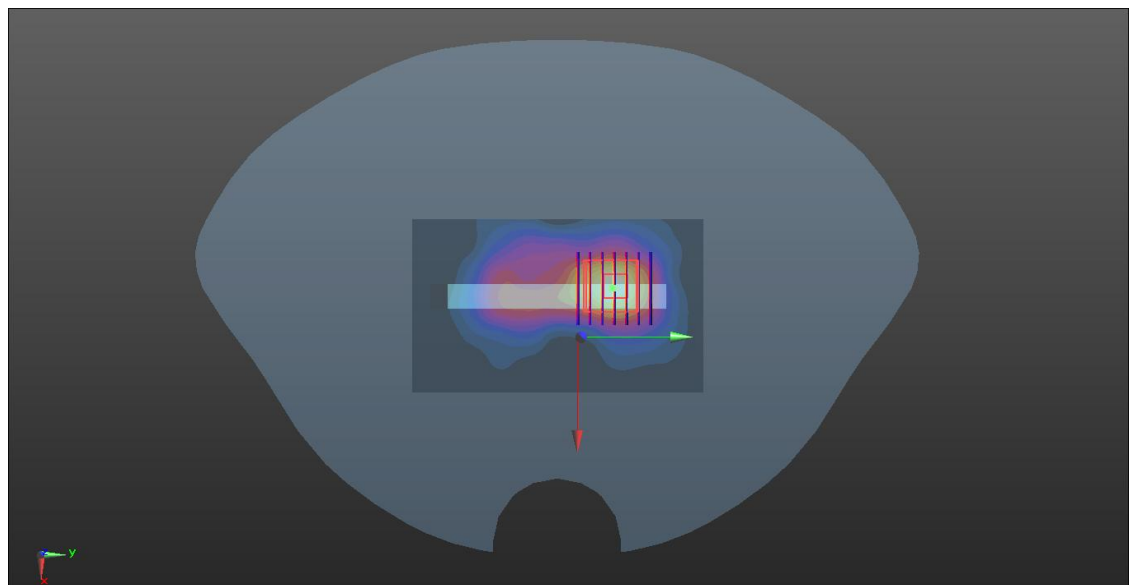

0 dB = 1.38 W/kg

Ti-CC26040293-ATD

Meas.123 Left Head with Tilt on 54 Channel in IEEE802.11n40 mode with Antenna 6

Date: 2025.06.25

Communication System Band: 5.3G; Frequency: 5270 MHz; Duty Cycle: 1:1.055

Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 4.697$ S/m; $\epsilon_r = 34.934$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch54/Area Scan (111x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.365 W/kg

Ch54/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.446 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 0.710 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.356 W/kg

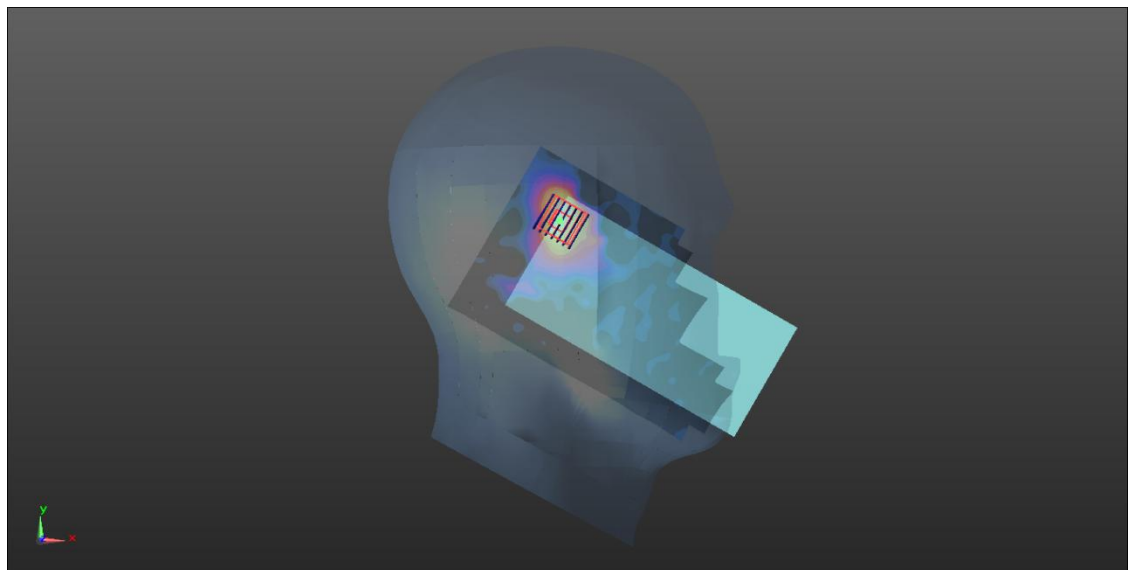

0 dB = 0.356 W/kg

Ti-CC26040293-ATD

Meas.124 Left Head with Tilt on 118 Channel in IEEE802.11n40 mode with Antenna 6

Date: 2025.06.26

Communication System Band: 5.6G; Frequency: 5590 MHz; Duty Cycle: 1:1.055

Medium parameters used (interpolated): $f = 5590$ MHz; $\sigma = 5.041$ S/m; $\epsilon_r = 36.106$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.05, 5.05, 5.05); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch118/Area Scan (111x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.387 W/kg

Ch118/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.071 V/m; Power Drift = 0.09 dB



Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 0.433 W/kg

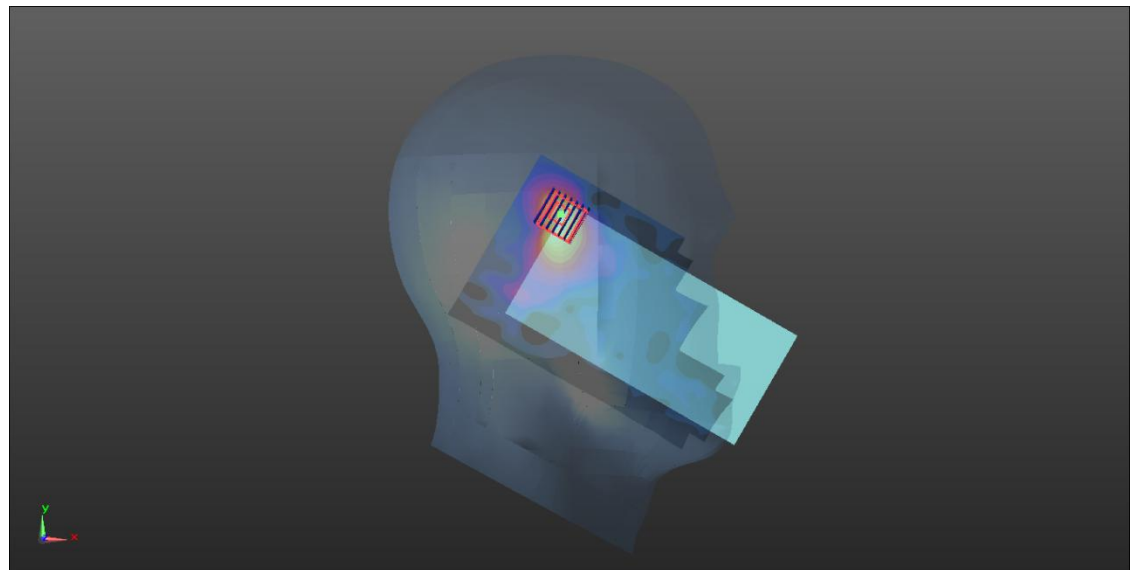

0 dB = 0.433 W/kg

Ti-CC26040293-ATD

Meas.125 Left Head with Tilt on 159 Channel in IEEE802.11n40 mode with Antenna 6

Date: 2025.06.27

Communication System Band: 5.8G; Frequency: 5795 MHz; Duty Cycle: 1:1.055

Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 5.343$ S/m; $\epsilon_r = 34.943$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch159/Area Scan (111x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.340 W/kg

Ch159/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.973 V/m; Power Drift = 0.14 dB



Peak SAR (extrapolated) = 0.924 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.014 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.403 W/kg

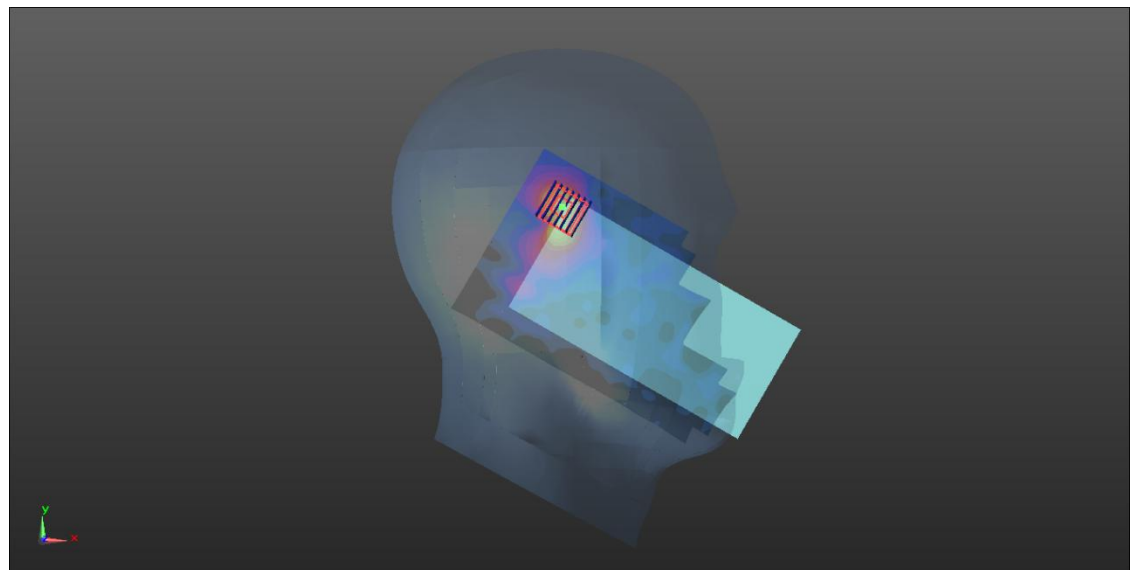

0 dB = 0.403 W/kg

Ti-CC26040293-ATD

Meas.126 Body Plane with Back Side 5mm on 58 Channel in IEEE802.11ac80 mode with Antenna 6

Date: 2025.06.25

Communication System Band: 5.3G; Frequency: 5290 MHz; Duty Cycle: 1:1.142

Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.794$ S/m; $\epsilon_r = 34.859$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch58/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.307 W/kg

Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.851 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 64.6%

Maximum value of SAR (measured) = 0.277 W/kg

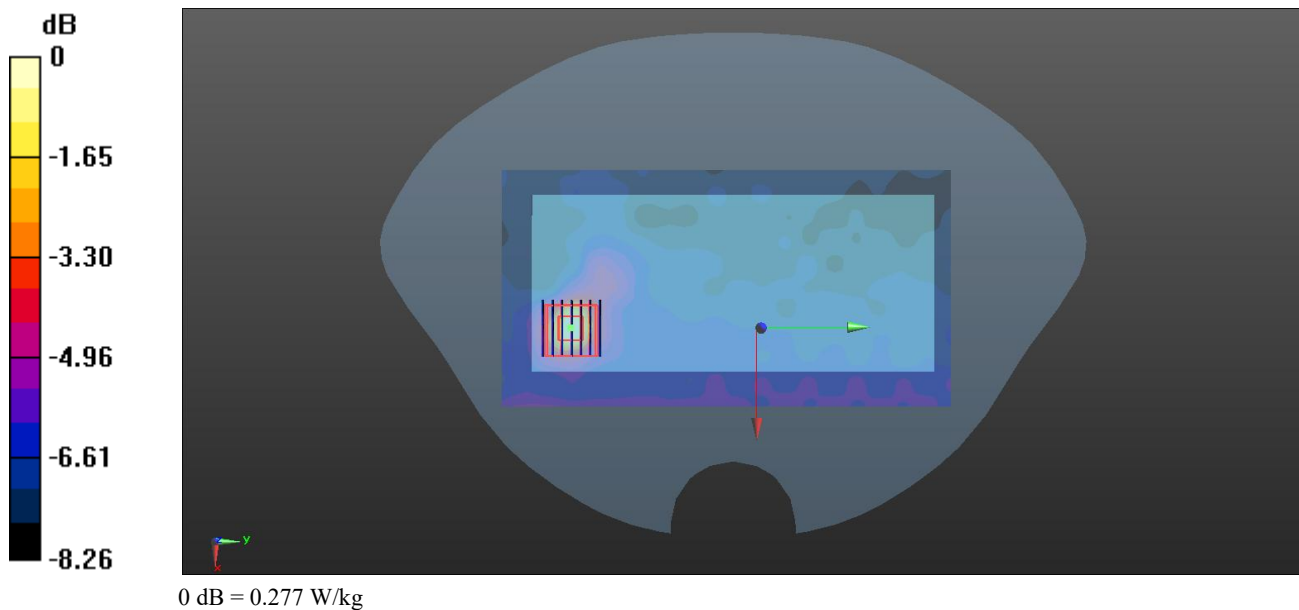

Ti-CC26040293-ATD

Meas.127 Body Plane with Back Side 5mm on 106 Channel in IEEE802.11ac80 mode with Antenna 6

Date: 2025.06.26

Communication System Band: 5.6G; Frequency: 5530 MHz; Duty Cycle: 1:1.142

Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 5.007$ S/m; $\epsilon_r = 36.193$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.16, 5.16, 5.16); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch106/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.368 W/kg

Ch106/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.400 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 0.368 W/kg

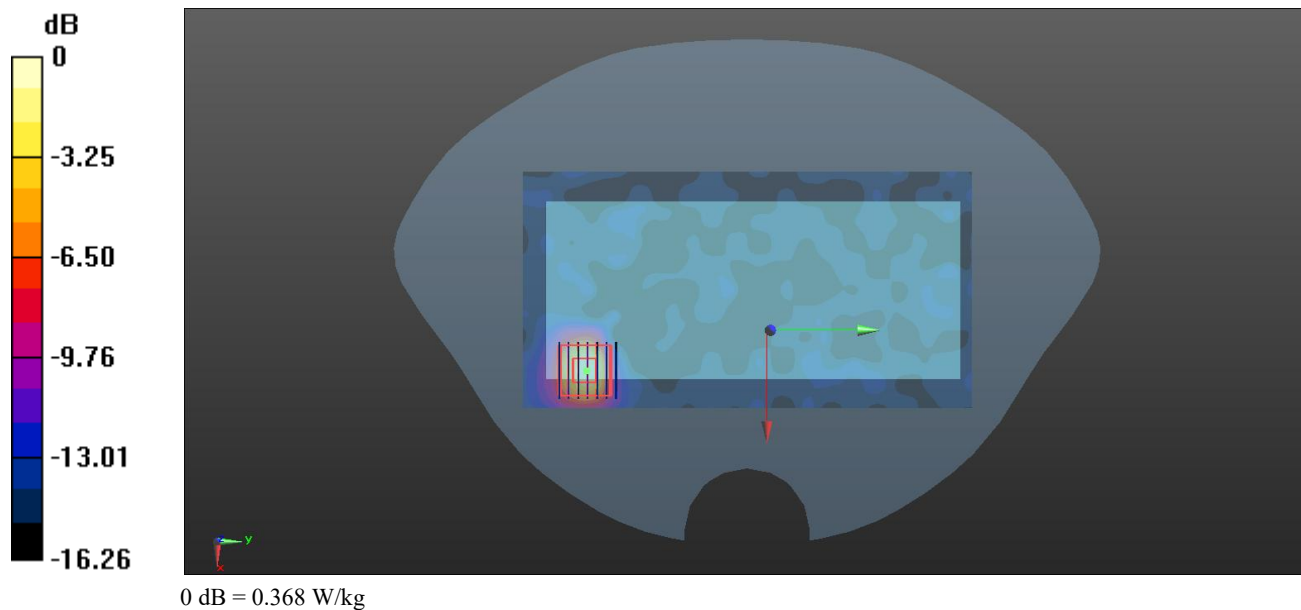

Ti-CC26040293-ATD

Meas.128 Body Plane with Back Side 5mm on 155 Channel in IEEE802.11ac80 mode with Antenna 6

Date: 2025.06.27

Communication System Band: 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:1.142

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.276$ S/m; $\epsilon_r = 35.503$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch155/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.253 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.484 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.264 W/kg

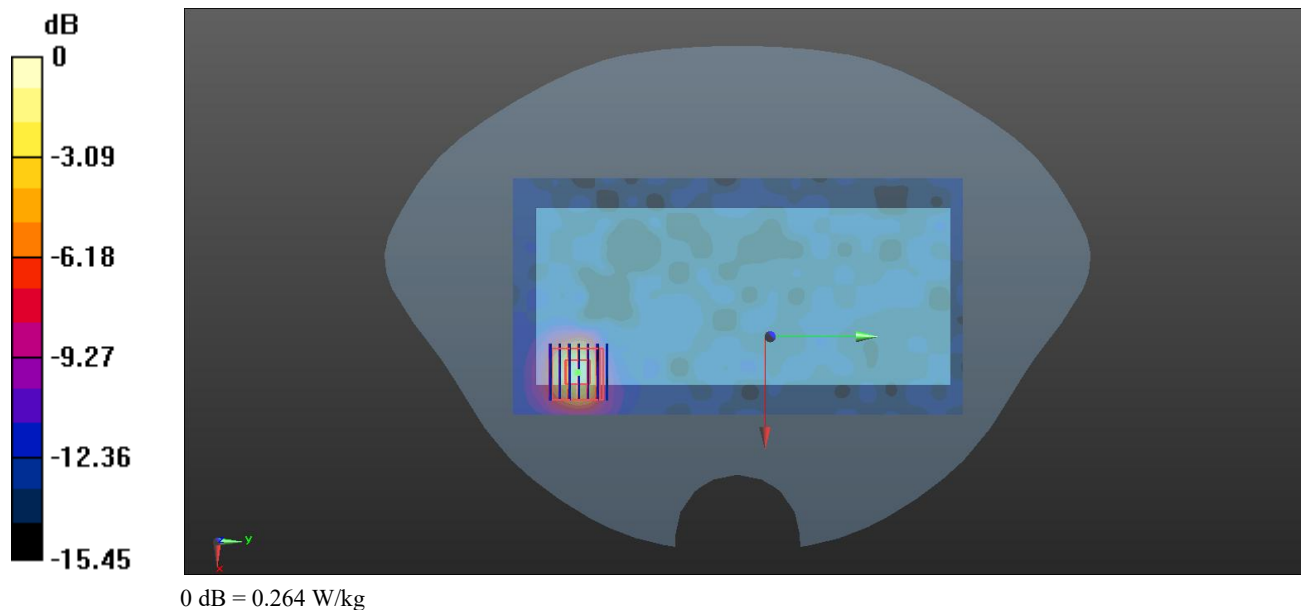

Ti-CC26040293-ATD

Meas.129 Body Plane with Back Side 10mm on 42 Channel in IEEE802.11ac80 mode with Antenna 6

Date: 2025.06.25

Communication System Band: 5.2G; Frequency: 5210 MHz; Duty Cycle: 1:1.142

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 35.494$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.76, 5.76, 5.76); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch42/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0486 W/kg

Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm


Reference Value = 1.397 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.017 W/kg

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 0.0463 W/kg

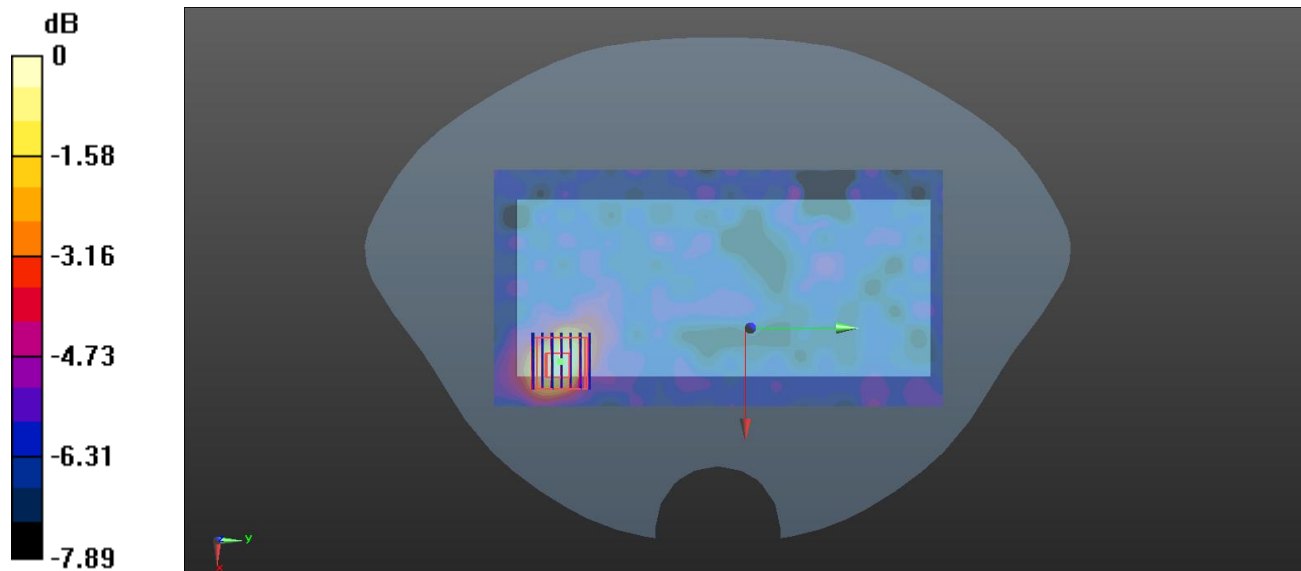

0 dB = 0.0463 W/kg

Ti-CC26040293-ATD

Meas.130 Body Plane with Back Side 10mm on 155 Channel in IEEE802.11ac80 mode with Antenna 6

Date: 2025.06.27

Communication System Band: 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:1.142

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.276$ S/m; $\epsilon_r = 35.503$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch155/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.114 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.398 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.029 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 0.109 W/kg

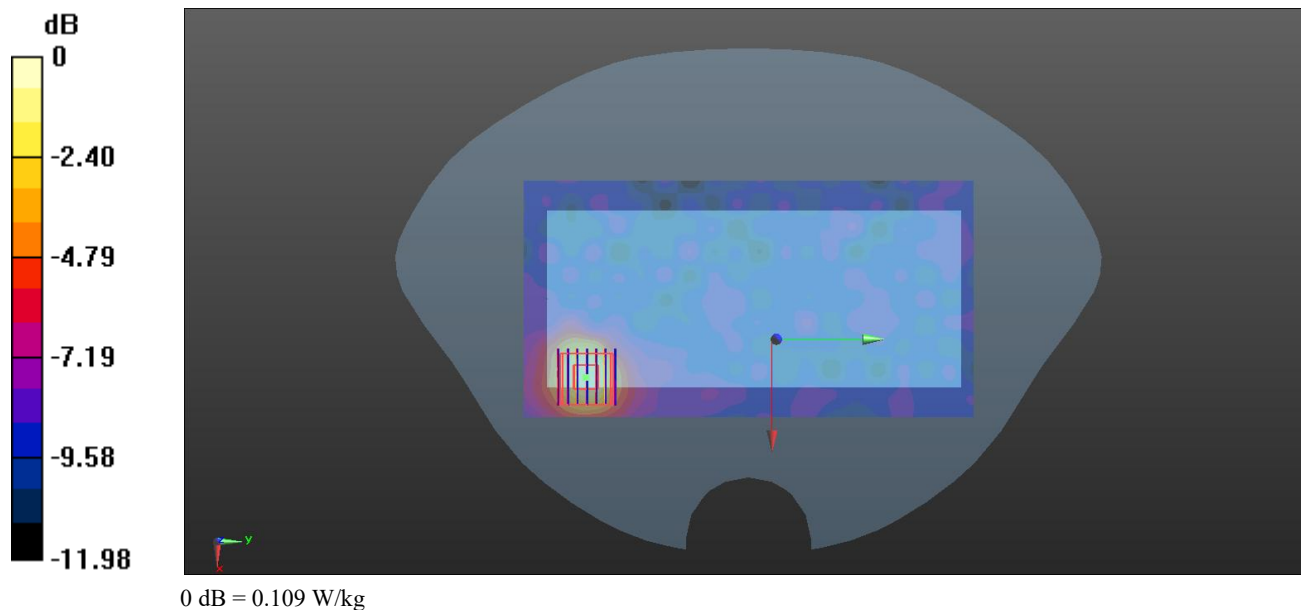

Ti-CC26040293-ATD

Meas.131 Body Plane with Top Edge 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna 6

Date: 2025.06.25

Communication System Band: 5.3G; Frequency: 5290 MHz; Duty Cycle: 1:1.142

Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.794$ S/m; $\epsilon_r = 34.859$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch58/Area Scan (81x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.543 W/kg

Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.480 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 0.674 W/kg

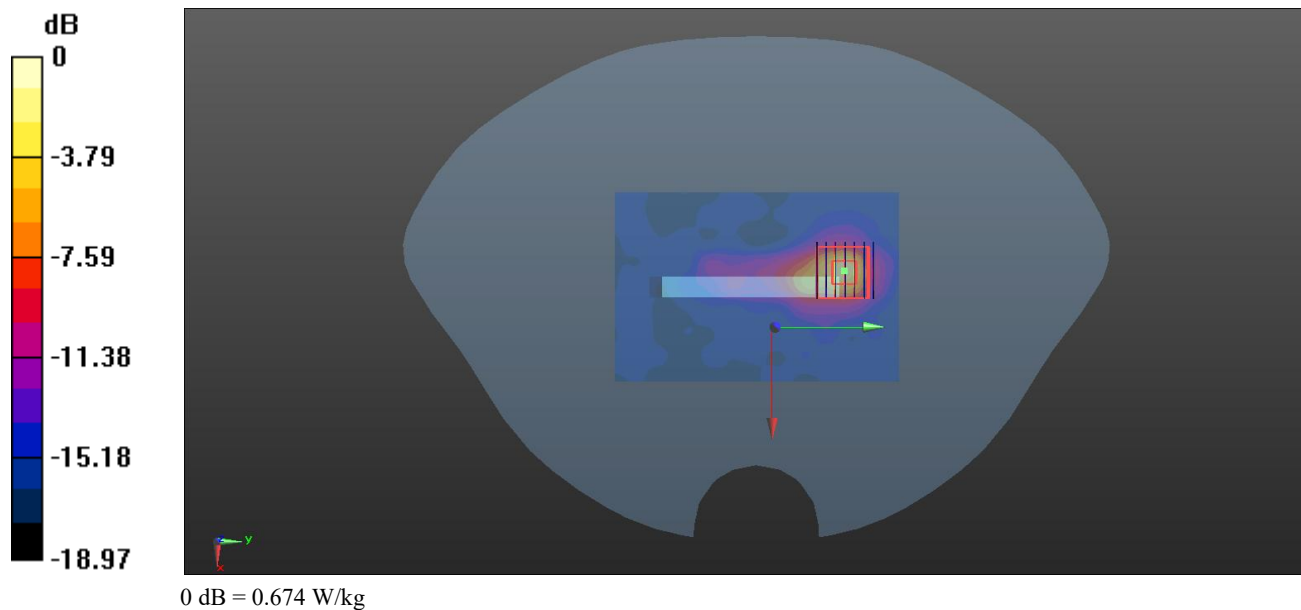

Ti-CC26040293-ATD

Meas.132 Body Plane with Top Edge 0mm on 106 Channel in IEEE802.11ac80 mode with Antenna 6

Date: 2025.06.26

Communication System Band: 5.6G; Frequency: 5530 MHz; Duty Cycle: 1:1.142

Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 5.007$ S/m; $\epsilon_r = 36.193$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.16, 5.16, 5.16); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch106/Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.717 W/kg

Ch106/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.108 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 0.870 W/kg

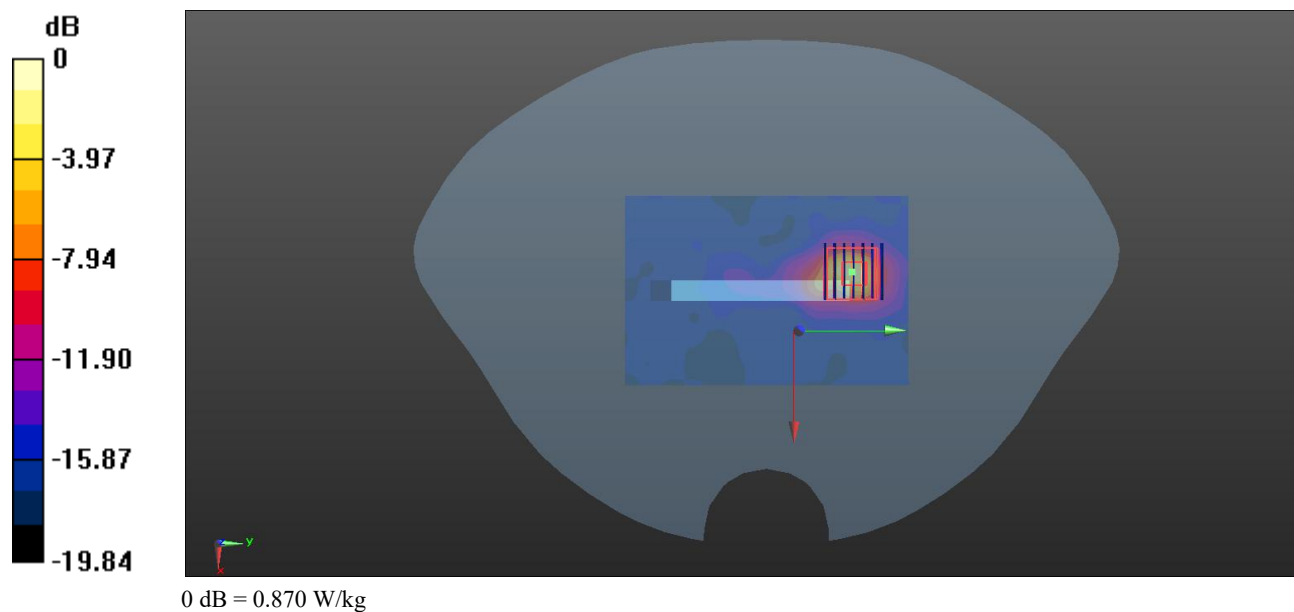

Ti-CC26040293-ATD

Meas.133 Body Plane with Top Edge 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna 6

Date: 2025.06.27

Communication System Band: 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:1.142

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.276$ S/m; $\epsilon_r = 35.503$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025.06.05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025.06.05
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch155/Area Scan (81x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.545 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.851 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.065 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 0.637 W/kg

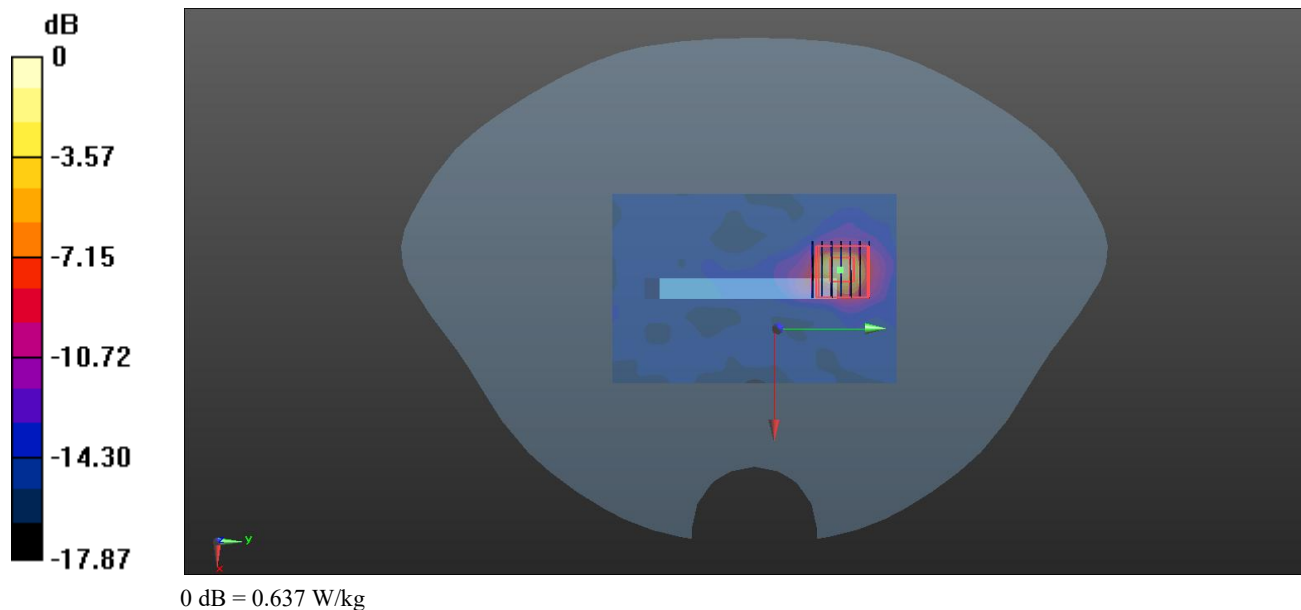

Ti-CC26040293-ATD

Meas.134 Left Head with Cheek on 39 Channel in Bluetooth mode with Antenna 6

Date: 2025.06.06

Communication System Band: 39; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.791$ S/m; $\epsilon_r = 40.162$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.234 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.630 V/m; Power Drift = -0.11 dB



Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.091 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.194 W/kg

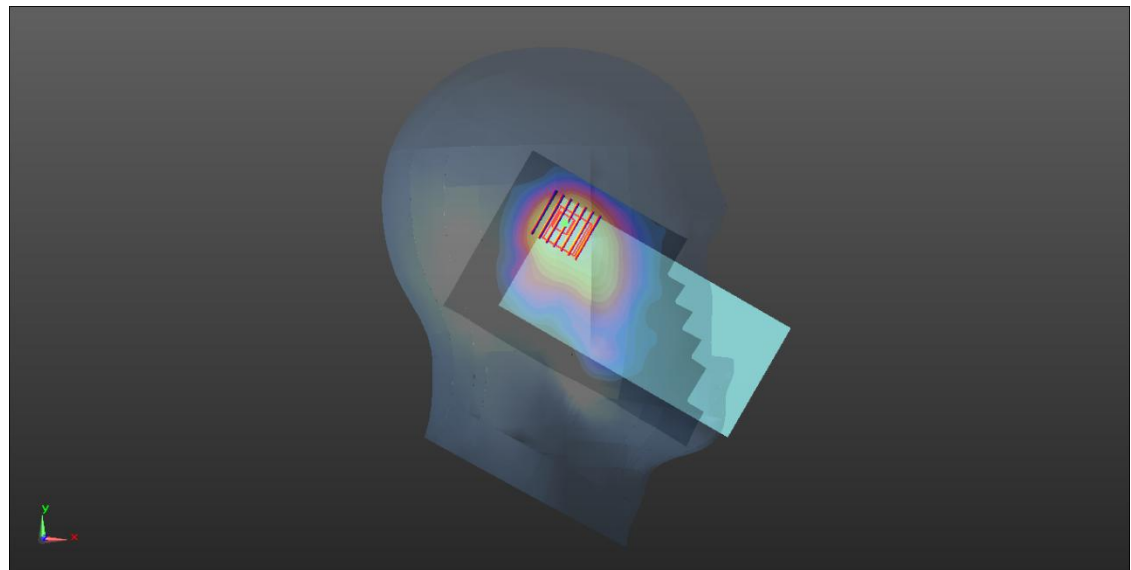

0 dB = 0.194 W/kg

Ti-CC26040293-ATD

Meas.135 Body Plane with Back Side 5mm on 39 Channel in Bluetooth mode with Antenna 6

Date: 2025.06.06

Communication System Band: 39; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.791$ S/m; $\epsilon_r = 40.162$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.248 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.987 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.076 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.216 W/kg

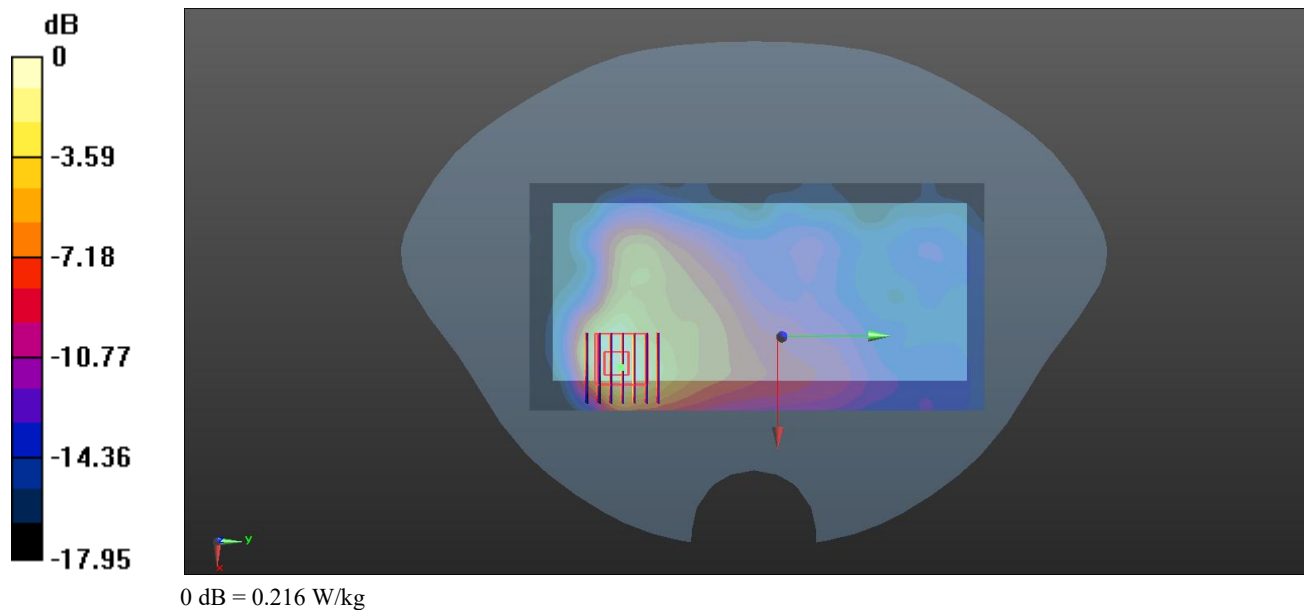

Ti-CC26040293-ATD

Meas.136 Body Plane with Back Side 10mm on 39 Channel in Bluetooth mode with Antenna 6

Date: 2025.06.06

Communication System Band: 39; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.791$ S/m; $\epsilon_r = 40.162$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0904 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 2.588 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.039 W/kg

Ratio of SAR at M2 to SAR at M1 = 59.7%

Maximum value of SAR (measured) = 0.0787 W/kg

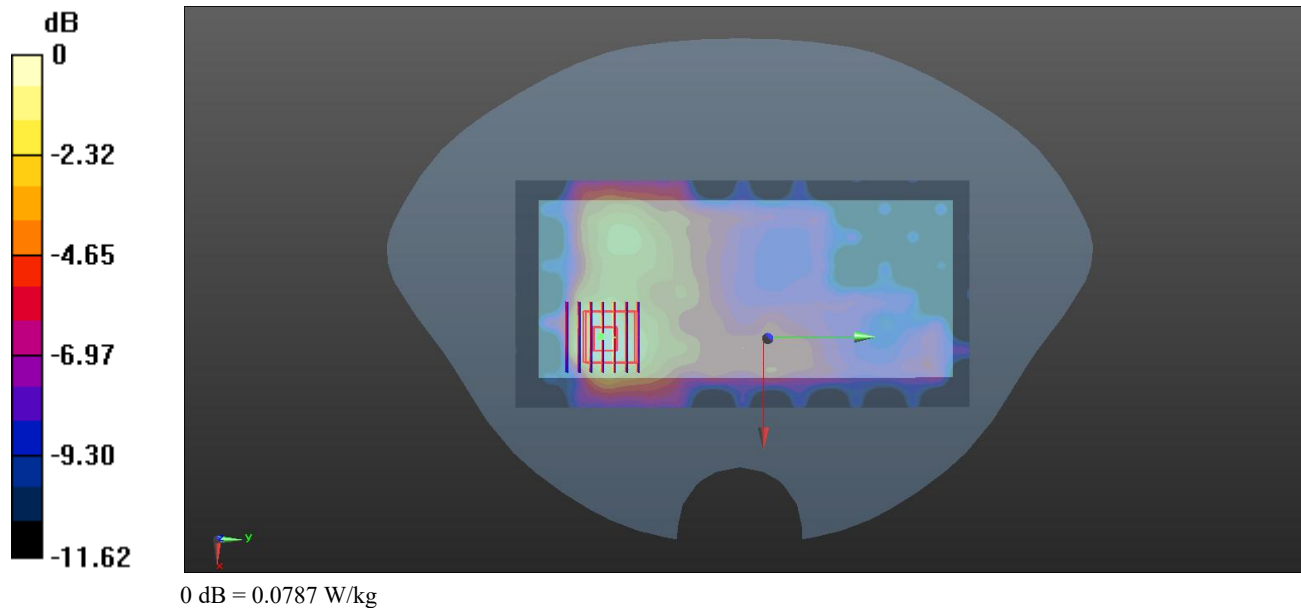

Ti-CC26040293-ATD

Meas.137 Body Plane with Top Edge 0 mm on 39 Channel in Bluetooth mode with Antenna 6

Date: 2025.06.06

Communication System Band: 39; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.791$ S/m; $\epsilon_r = 40.162$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025.04.24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025.04.21
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39/Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.664 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.686 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 42.8%

Maximum value of SAR (measured) = 0.667 W/kg

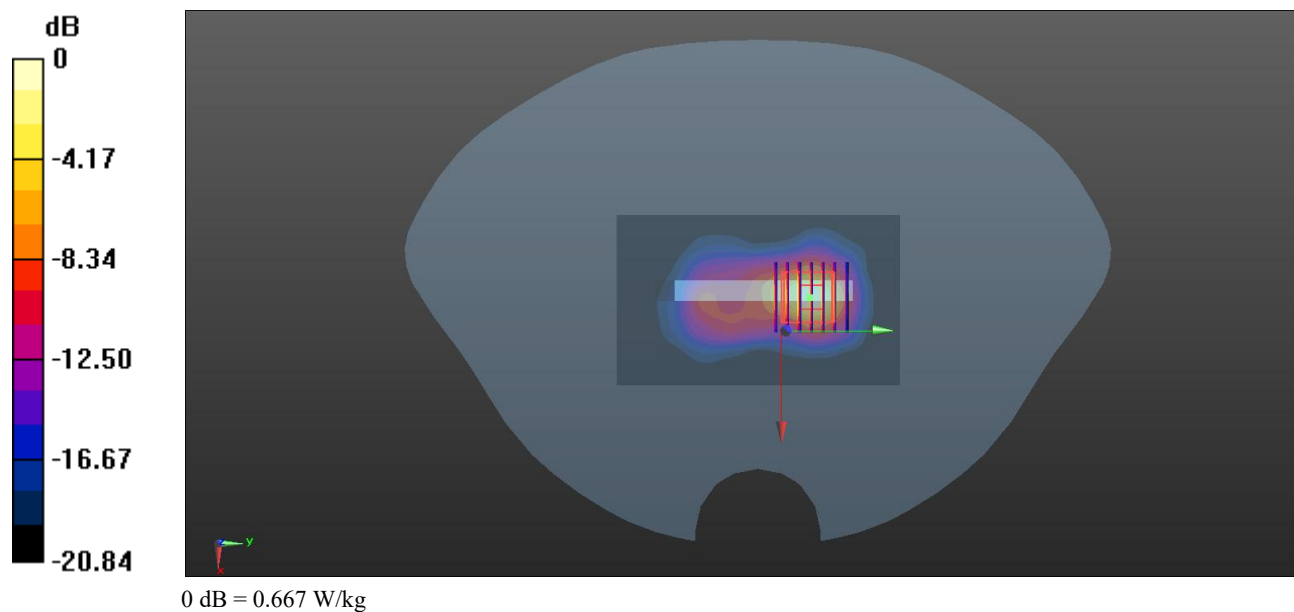

Ti-CC26040293-ATD
Meas.138 Body Plane with Bottom Edge 10mm on Middle Channel in GPRS1900 3Slots mode with Antenna 1


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 10.00	PCS 1900	GSM, 10027-DAC	1880.0, 661	7.34	1.39	40.7	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.674	0.714
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.362	0.397
Graded Grid	Yes	Yes	Power Drift [dB]	0.01	-0.06
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		60.4
			Dist 3dB Peak [mm]		11.2

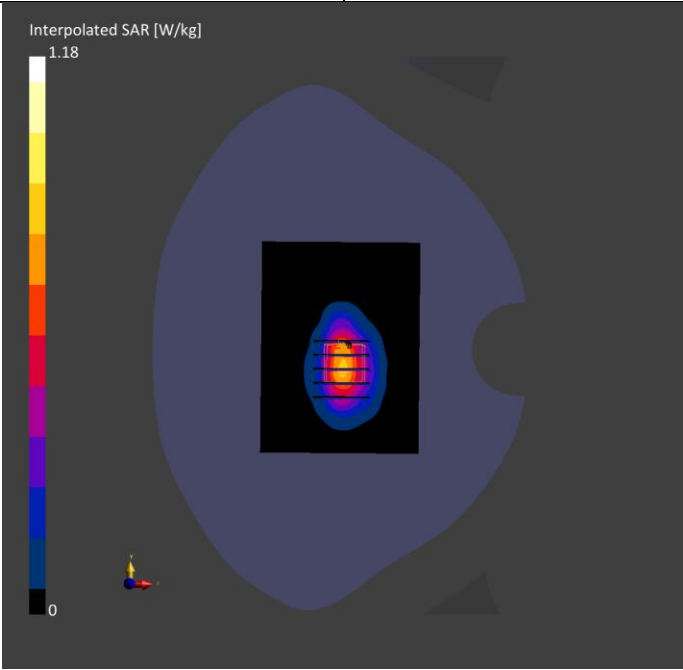

Ti-CC26040293-ATD
 Meas.139 Body Plane with Bottom Edge 10mm on Middle Channel in GPRS1900 3Slots mode with Antenna 1


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 10.00	PCS 1900	GSM, 10027-DAC	1880.0, 661	7.34	1.39	40.7	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.624	0.660
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.336	0.368
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	-0.09
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		61.4
			Dist 3dB Peak [mm]		11.2

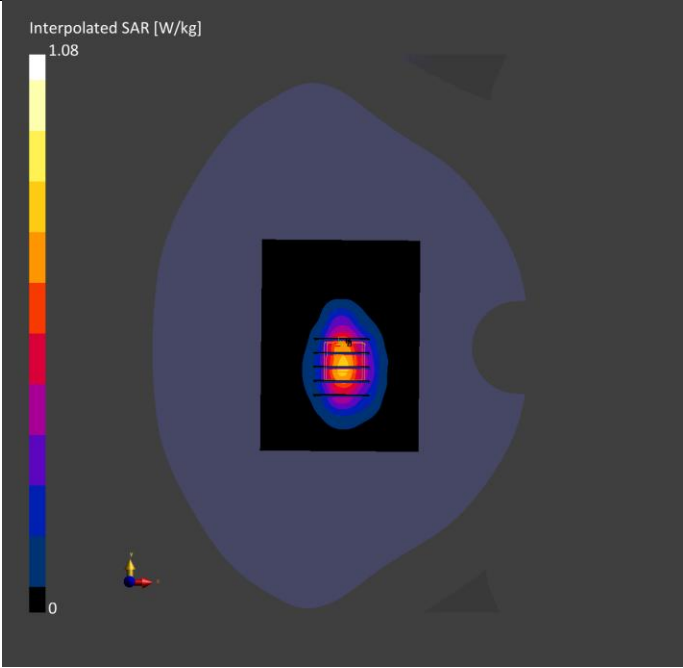


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 10.00	PCS 1900	GSM, 10027-DAC	1880.0, 661	7.34	1.39	40.7	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.601	0.638
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.325	0.358
Graded Grid	Yes	Yes	Power Drift [dB]	0.00	-0.07
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		61.8
			Dist 3dB Peak [mm]		11.2

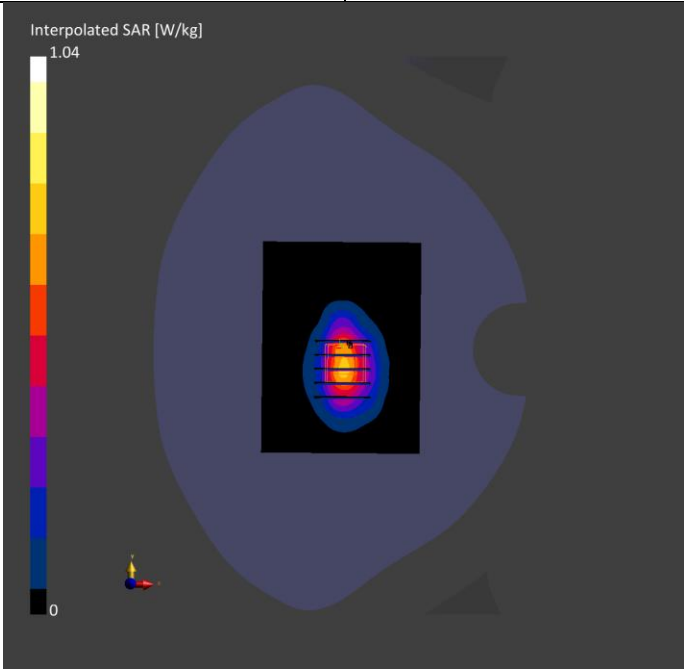

Ti-CC26040293-ATD
 Meas.141 Right Head with Cheek on Middle Channel in LTE Band5 mode with Antenna 4


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 5	LTE-FDD, 10175-CAH	836.5, 20525	9.99	0.920	42.1	22.6	21.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-16	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-16	2025-06-16
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.622	0.642
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.406	0.411
Graded Grid	Yes	Yes	Power Drift [dB]	-0.02	-0.06
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		57.3
			Dist 3dB Peak [mm]		11.5

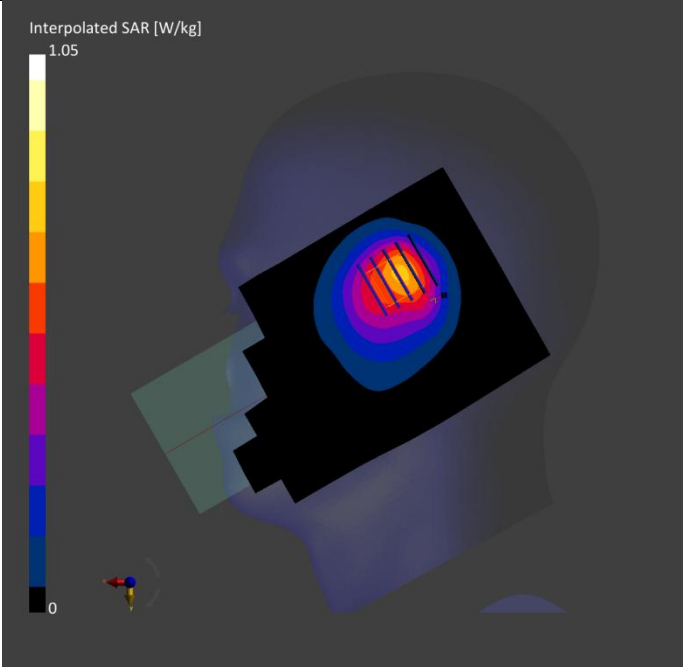

Ti-CC26040293-ATD
 Meas.142 Right Head with Cheek on Middle Channel in LTE Band5 mode with Antenna 4

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 5	LTE-FDD, 10175-CAH	836.5, 20525	9.99	0.920	42.1	22.6	21.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2090	HBBL-600-10000 2025-06-16	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1710, 2025-01-20

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2025-06-16	2025-06-16
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.636	0.662
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.417	0.425
Graded Grid	Yes	Yes	Power Drift [dB]	0.01	-0.07
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		57.0
			Dist 3dB Peak [mm]		11.5

