

TEST REPORT

of

FCC Part 15 Subpart C AND CANADA RSS-247

☒ New Application; ☐ Class I PC; ☐ Class II PC

Product : Wireless M2M Router
Brand: IDY
Model: iR700B-WW
Model Difference: N/A
FCC ID: 2AG2HIR700B-WW
IC: 21068-IR700BWW
FCC Rule Part: §15.247, Cat: DTS
IC Rule Part: RSS-247 issue 1: May 28, 2015
RSS-Gen issue 4: 2014
Applicant: IDY Corporation
Address: Kanda Business Cube 5F, 5-1, Kandatomiya-
ma-cho, Chiyoda-ku, Tokyo 101-0043 JAPAN

Test Performed by:
International Standards Laboratory

<Lung-Tan LAB>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-3;

*Address:

No. 120, Lane 180, Hsin Ho Rd.

Lung-Tan Dist., Tao Yuan City 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: ISL-15LR358FCW

Issue Date : 2016/03/04

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

VERIFICATION OF COMPLIANCE

Applicant: IDY Corporation
Product Description: Wireless M2M Router
Brand Name: IDY
Model No.: iR700B-WW
Model Difference: N/A
FCC ID: 2AG2HIR700B-WW
IC: 21068-IR700BWW
Date of test: 2015/12/23 ~ 2016/01/15
Date of EUT Received: 2015/12/23

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:

Dion Chen

Date:

2016/03/04

Dion Chang / Engineer

Prepared By:

Gigi yeh

Date:

2016/03/04

Gigi Yeh / Specialis

Approved By:

Vincent Su

Date:

2016/03/04

Vincent Su / Technical Manager

Version

Version No.	Date	Description
00	2016/03/04	Initial creation of document

Table of Contents

1	GENERAL INFORMATION	6
1.1	Related Submittal(s) / Grant (s)	8
1.2	Test Methodology	8
1.3	Test Facility	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
2	SYSTEM TEST CONFIGURATION	9
2.1	EUT Configuration	9
2.2	EUT Exercise	9
2.3	Test Procedure	9
2.4	Configuration of Tested System	10
3	SUMMARY OF TEST RESULTS	11
4	DESCRIPTION OF TEST MODES	11
5	CONDUCTED EMISSION TEST	12
5.1	Standard Applicable:	12
5.2	Measurement Equipment Used:	12
5.3	EUT Setup:	12
5.4	Measurement Procedure:	13
5.5	Measurement Result:	13
6	PEAK OUTPUT POWER MEASUREMENT	16
6.1	Standard Applicable:	16
6.2	Measurement Equipment Used:	17
6.3	Test Set-up:	17
6.4	Measurement Procedure:	17
6.5	Measurement Result:	18
7	6dB Bandwidth & 99% Bandwidth	19
7.1	Standard Applicable:	19
7.2	Measurement Equipment Used:	19
7.3	Test Set-up:	19
7.4	Measurement Procedure:	19
7.5	Measurement Result:	20
8	100KHz BANDWIDTH OF BAND EDGES MEASUREMENT	27
8.1	Standard Applicable:	27
8.2	Measurement Equipment Used:	28
8.3	Test SET-UP:	29
8.4	Measurement Procedure:	30
8.5	Field Strength Calculation:	30
8.6	Measurement Result:	30
9	SPURIOUS RADIATED EMISSION TEST	39
9.1	Standard Applicable	39
9.2	Measurement Equipment Used:	39
9.3	Test SET-UP:	39
9.4	Measurement Procedure:	40
9.5	Field Strength Calculation	40
9.6	Measurement Result:	40

10	Peak Power Spectral Density	47
10.1	Standard Applicable:	47
10.2	Measurement Equipment Used:	47
10.3	Test Set-up:	47
10.4	Measurement Procedure:	47
10.5	Measurement Result:	48
11	ANTENNA REQUIREMENT	57
11.1	Standard Applicable:	57
11.2	Antenna Connected Construction:	57

1 GENERAL INFORMATION

General:

Product Name:	Wireless M2M Router	
Brand Name:	IDY	
Model Name:	iR700B-WW	
Model Difference:	N/A	
USB port	One provided for data link	
SD slot	One provided	
WAN Port:	One provided	
LAN Port:	Four provided	
Power Supply:	5Vdc by AC Adapter	
	Adapter:	Model No.: SWI18-5-N

WWAN Modular:

GSM/WCDMA/LTE sin- gle modular:	FCC/IC approved modular FCC ID: RI7LN930 IC:5131A-LN930
	P/N: W50-S-V3-I Antenna gain: 2dBi (Max) See the photos

IC RSS-Gen:

Product SW/HW version	iR700B-V1 / iR700B-V1
Radio SW/HW version	WLAN_1T1R-WWAN_LN930-V1 / WLAN_1T1R-WWAN_LN930-V1
PMN (Product Marketing Name)	Wireless M2M Router
HVIN (Hardware Version Identification Number)	iR700B-WW
FVIN (Firmware Version Identification Number)	FV01
Test SoftWare Version	MT7620 V1.0.6.0 AP
RF power setting in TEST SoftWare	802.11b Low : 0D Mid : 0D High : 0F 802.11g Low : 00 Mid : 0D High : 07 802.11n20 Low : 00 Mid : 0D High : 04 802.11n40 Low : 00 Mid : 0D High : 02

WLAN: 1TX/1RX

Wi-Fi	Frequency Range (MHz)	Channels	Average Rated Power	Modulation Technology
802.11b	2412 – 2462(DTS)	11	Channel 1-11 17.5 dBm	DSSS
802.11g	2412 – 2462(DTS)	11	Channel 1-11 16.15 dBm	DSSS, OFDM
802.11n	HT20 2412 – 2462(DTS)	11	Channel 1-11 16.15 dBm	OFDM
	HT40 2422 – 2452(DTS)	7	Channel 3-9 16.15 dBm	
Power Tolerance:	+/- 1 dBm			
Modulation type:	CCK, DQPSK, DBPSK for DSSS 256QAM.64QAM. 16QAM, QPSK, BPSK for OFDM			
Type of Emission:	802.11b/g: 16M5G1D 802.11n HT20: 17M5D1D 802.11n HT40: 36M1D1D			
Antenna Designation:	DIPOLE ANTENNA Reversed SMA Antenna : 2.4dBi (Max) According to KDB662911 D01 SM-MIMO signals could be considered uncorrelated for purposes of directional gain computation. Directional gain = GANT			

The EUT is compliance with IEEE 802.11 b/g/n Standard.

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AG2HIR700B-WW** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and **IC: 21068-IR700BWW** filing to comply with Industry Canada RSS-247 issue 1: 2015.

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2014, ANSI C63.10: 2013 and RSS-Gen issue 4: 2014. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document: 558074 D01 DTS Meas Guidance v03r02

1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of International Standards Laboratory <Lung-Tan LAB> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2014. FCC Registration Number is: 872200; Designation Number is: TW1036, Canada Registration Number: 4067B-3.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 5 and 7 of ANSI C63.4: 2014 and RSS-Gen issue 4: 2014. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m/1.5m(Frequency above 1GHz) above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 6 and 11 of ANSI C63.10: 2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration

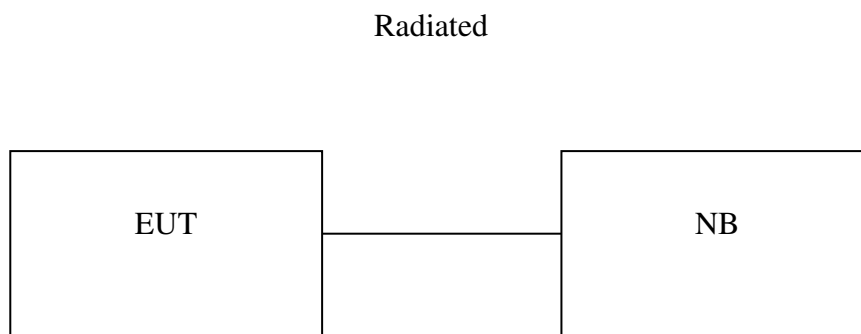


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	NB	Lenovo	X220i	N/A	N/A	No- Shielding

3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
-----------	---------------------	--------

5 CONDUCTED EMISSION TEST

5.1 Standard Applicable:

According to §15.207 and RSS-Gen §7.2.4, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		
1.The lower limit shall apply at the transition frequencies		
2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

5.2 Measurement Equipment Used:

AC Power Line Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Conduction 04-3 Cable	WOKEN	CFD 300-NL	Conduction 04 -3	07/28/2015	07/27/2016
EMI Receiver 17	Rohde & Schwarz	ESCI 7	100887	09/08/2015	09/07/2016
LISN 18	ROHDE & SCHWARZ	ENV216	101424	02/11/2015	02/10/2016
LISN 19	ROHDE & SCHWARZ	ENV216	101425	03/12/2015	03/11/2016
Test Software	Farad	EZEMC Ver:ISL-03A2	N/A	N/A	N/A

5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4: 2014.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation Mode	Test Date:	2016/01/13
Test By:	Lake		

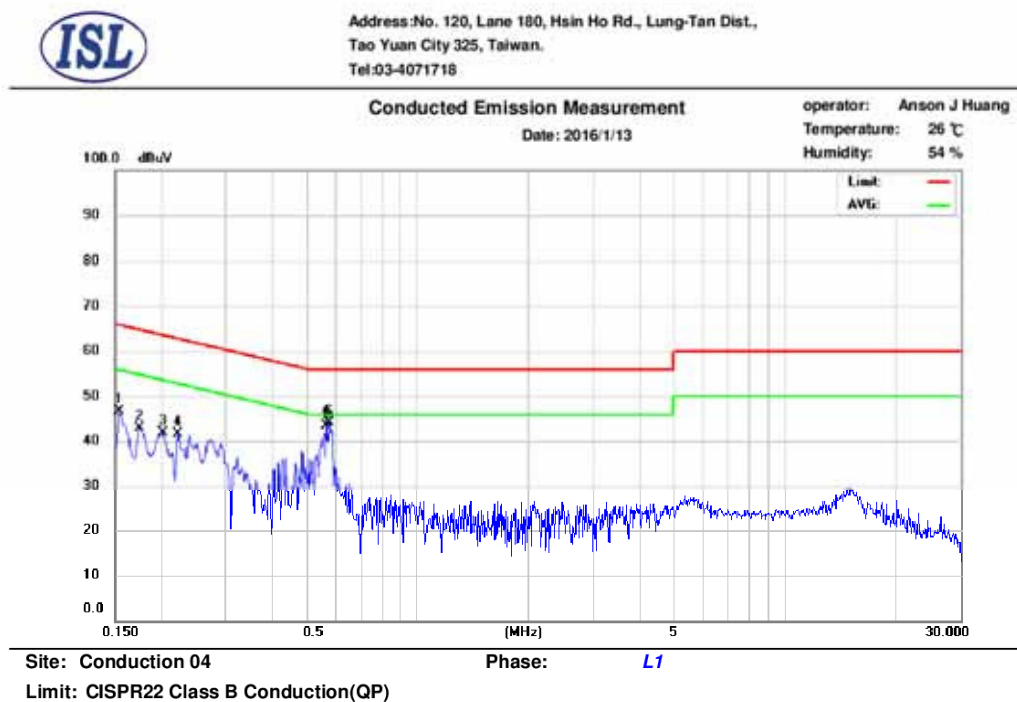

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.154	38.26	25.43	9.64	47.90	65.78	-17.88	35.07	55.78	-20.71
2	0.174	34.89	22.25	9.62	44.51	64.77	-20.26	31.87	54.77	-22.90
3	0.202	32.68	22.15	9.60	42.28	63.53	-21.25	31.75	53.53	-21.78
4	0.222	30.84	22.09	9.60	40.44	62.74	-22.30	31.69	52.74	-21.05
5	0.566	31.89	24.42	9.62	41.51	56.00	-14.49	34.04	46.00	-11.96
6	0.574	33.08	26.16	9.62	42.70	56.00	-13.30	35.78	46.00	-10.22



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718

Conducted Emission Measurement

Date: 2016/1/13

operator: Anson J Huang

Temperature: 26 °C

Humidity: 54 %



Site: Conduction 04

Phase: N

Limit: CISPR22 Class B Conduction(QP)

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.154	39.92	26.80	9.62	49.54	65.78	-16.24	36.42	55.78	-19.36
2	0.230	32.30	24.48	9.62	41.92	62.45	-20.53	34.10	52.45	-18.35
3	0.242	31.74	22.99	9.62	41.36	62.03	-20.67	32.61	52.03	-19.42
4	0.274	31.88	25.86	9.62	41.50	61.00	-19.50	35.48	51.00	-15.52
5	0.502	29.50	22.23	9.63	39.13	56.00	-16.87	31.86	46.00	-14.14
6	0.578	35.26	28.10	9.63	44.89	56.00	-11.11	37.73	46.00	-8.27

6 PEAK OUTPUT POWER/ERIP MEASUREMENT


6.1 Standard Applicable:

According to

6.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter 05	Anritsu	ML2495A	1116010	07/29/2015	07/28/2016
Power Sensor 05	Anritsu	MA2411B	34NKF50	07/29/2015	07/28/2016
Power Sensor 06	DARE	RPR3006W	13I00030SN O33	11/03/2015	11/02/2016
Power Sensor 07	DARE	RPR3006W	13I00030SN O34	11/03/2015	11/02/2016
Temperature Chamber	KSON	THS-B4H100	2287	06/05/2015	06/04/2016
DC Power supply	ABM	8185D	N/A	09/05/2015	09/04/2016
AC Power supply	EXTECH	CFC105W	NA	12/26/2015	12/25/2016
Attenuator	Woken	Watt-65m3502	11051601	NA	NA
Splitter	MCLI	PS4-199	12465	12/26/2015	12/25/2017
Spectrum analyzer	Agilent	N9030A	MY51360021	10/02/2015	10/01/2016
Test Software	DARE	Radimation Ver:2013.1.23	NA	NA	NA

6.3 Test Set-up:

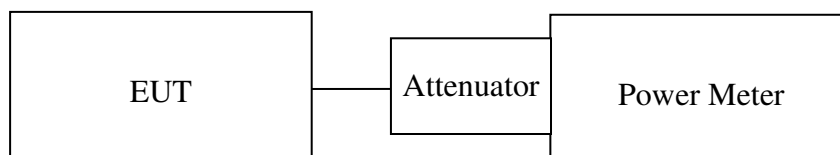

6.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

6.5 Measurement Result:

802.11b

Cable loss = 0	Output Power	Limit
CH	Detector	(dBm)
	PK AV	

7 6dB Bandwidth & 99% Bandwidth

7.1 Standard Applicable:

According to

7.5 Measurement Result:

802.11b

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Bandwidth (KHz)	Result
Low	10.07	12.258	> 500	PASS
Mid	10.07	12.238	> 500	PASS
High	10.07	12.249	> 500	PASS

802.11g

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Bandwidth (KHz)	Result
Low	16.59	16.506	> 500	PASS
Mid	16.58	16.499	> 500	PASS
High	16.36	16.476	> 500	PASS

802.11n_20M

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Bandwidth (KHz)	Result
Low	17.29	17.559	> 500	PASS
Mid	17.31	17.581	> 500	PASS
High	17.7	17.597	> 500	PASS

802.11n_40M

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Bandwidth (KHz)	Result
Low	36.51	36.173	> 500	PASS
Mid	36.5	36.199	> 500	PASS
High	36.51	36.183	> 500	PASS

Note: Refer to next page for plots.

802.11b

6dB Band Width & 99% Band Width Test Data CH-Low



6dB Band Width & 99% Band Width Test Data CH-Mid




6dB Band Width & 99% Band Width Test Data CH-High




802.11g


6dB Band Width & 99% Band Width Test Data CH-Low

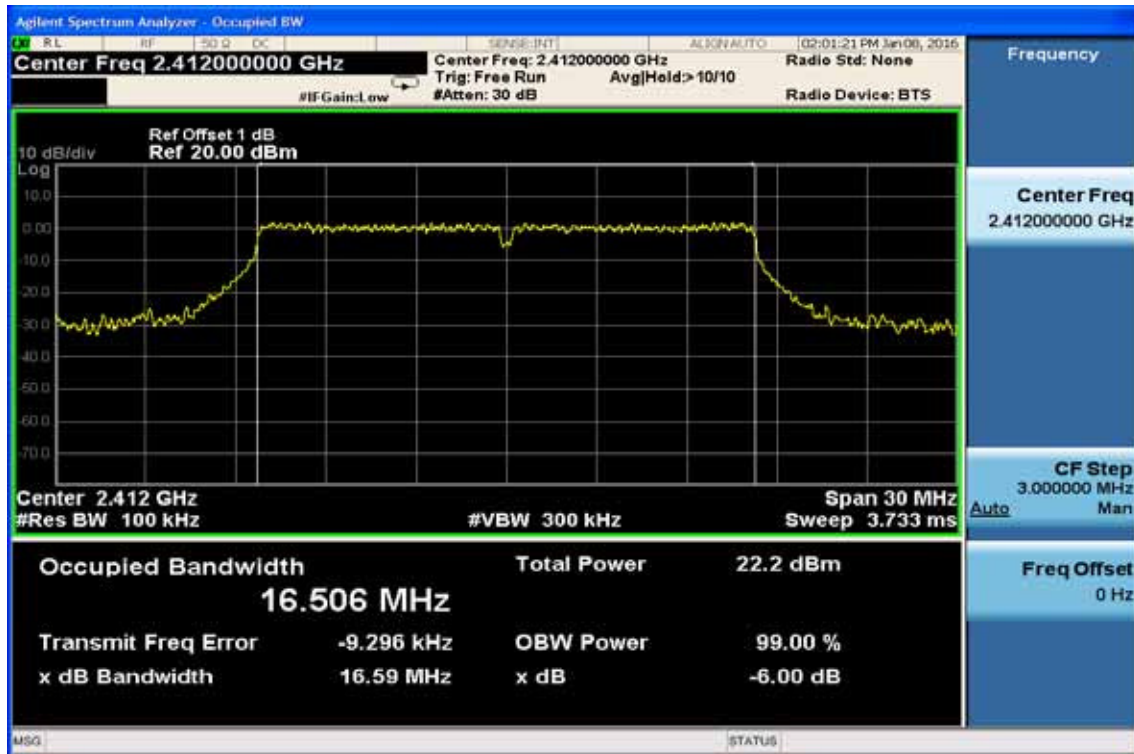

6dB Band Width & 99% Band Width Test Data CH-Mid

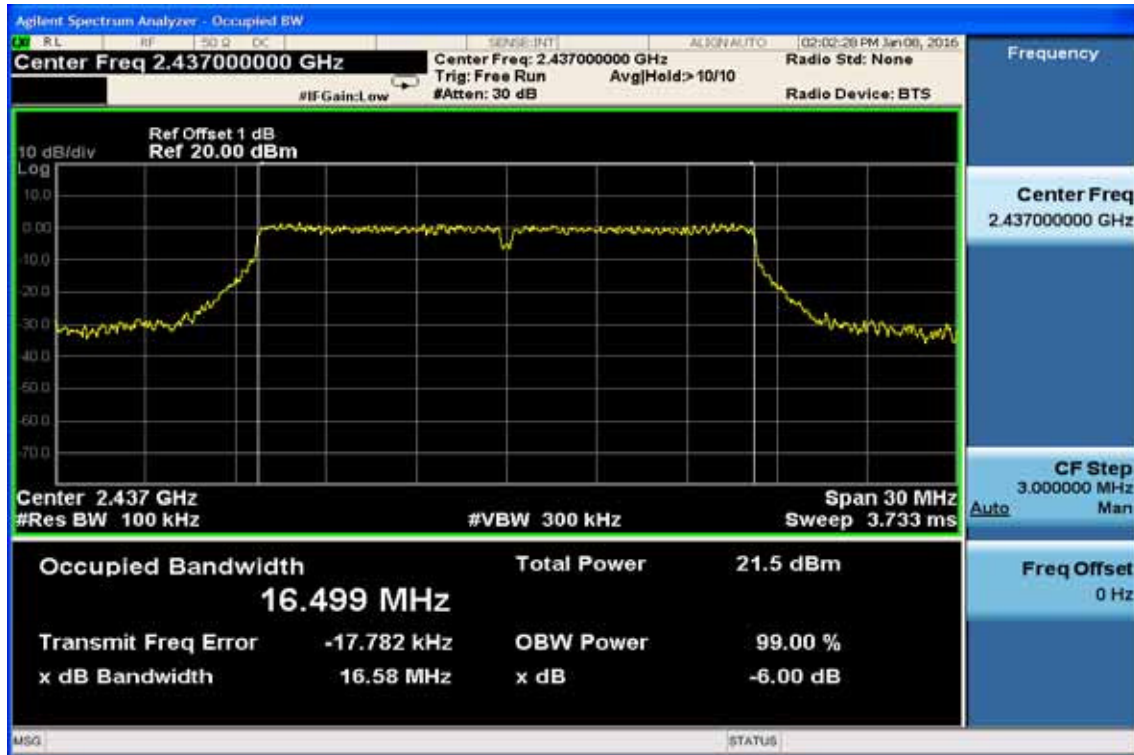


6dB Band Width & 99% Band Width Test Data CH-High

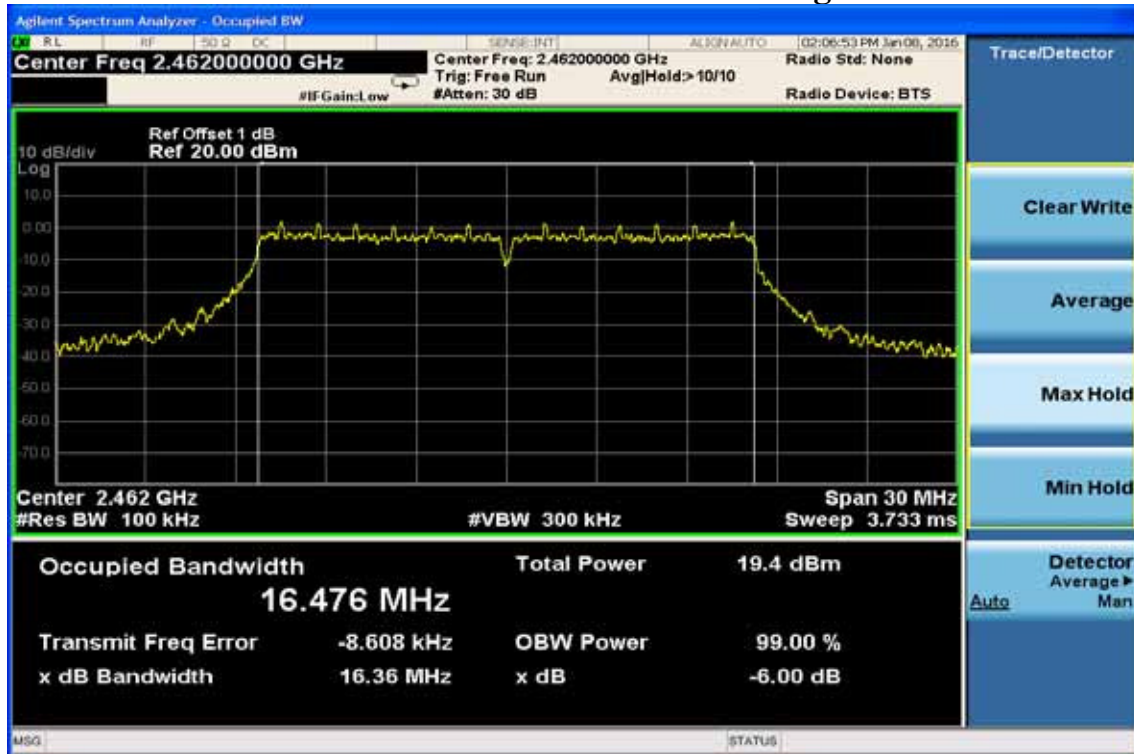


802.11n_20M


6dB Band Width & 99% Band Width Test Data CH-Low

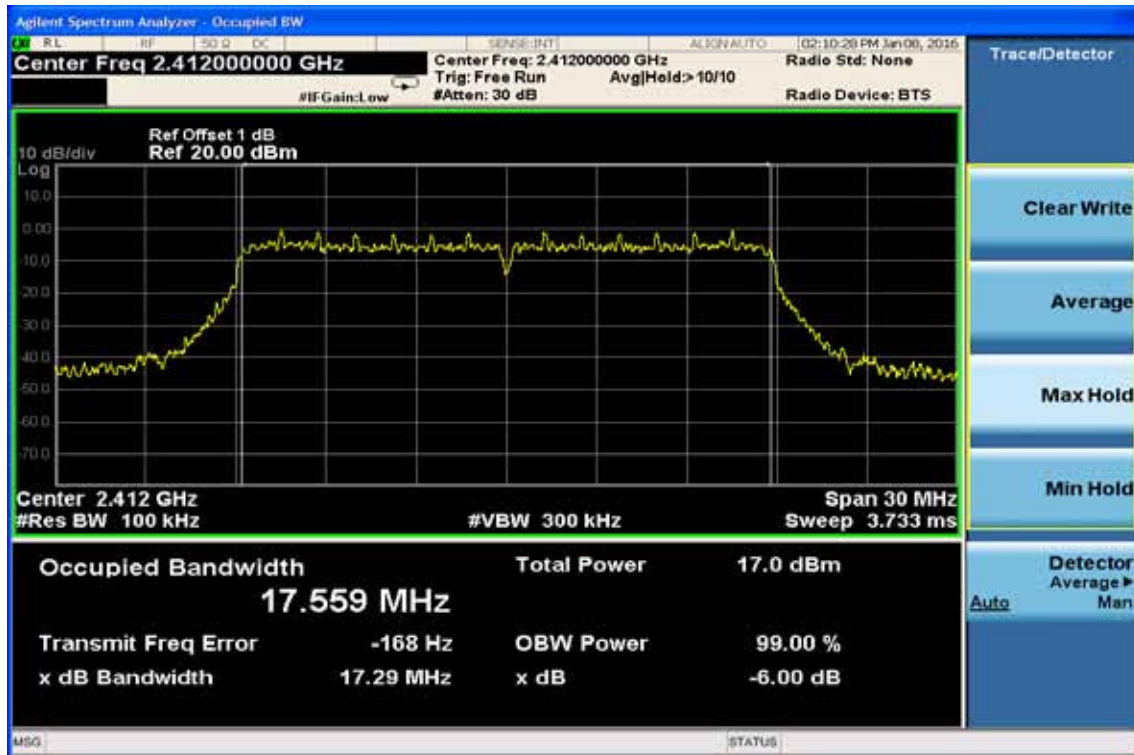

6dB Band Width & 99% Band Width Test Data CH-Mid

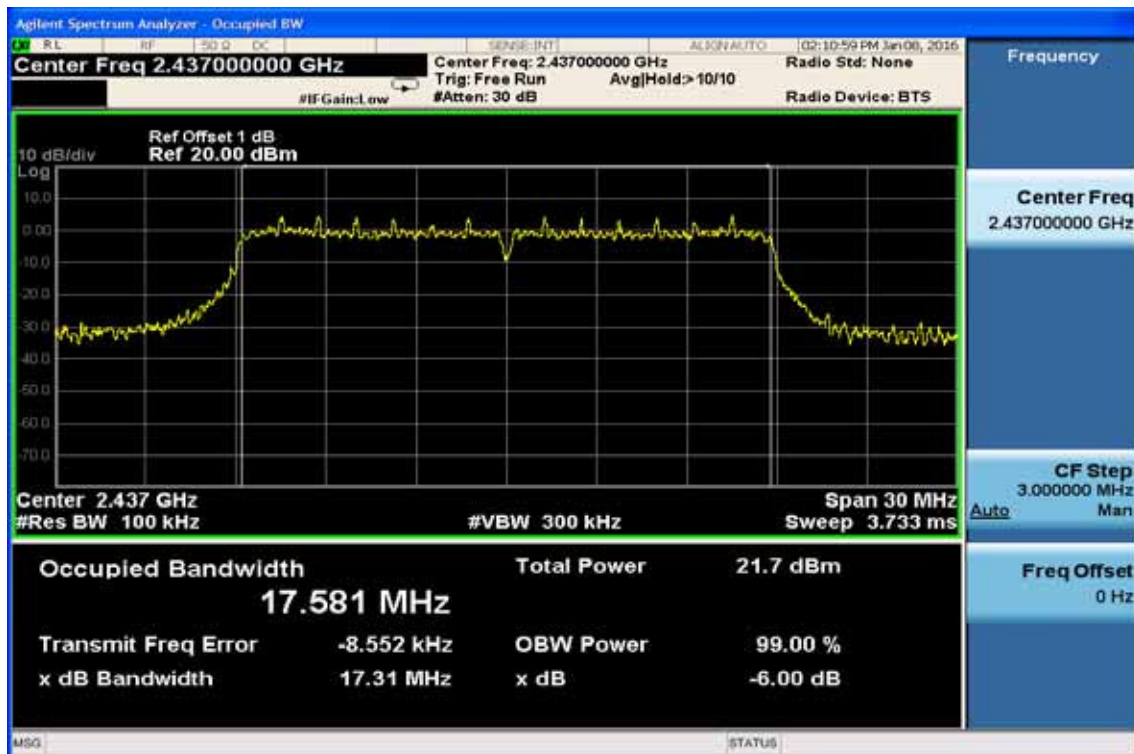


6dB Band Width & 99% Band Width Test Data CH-High

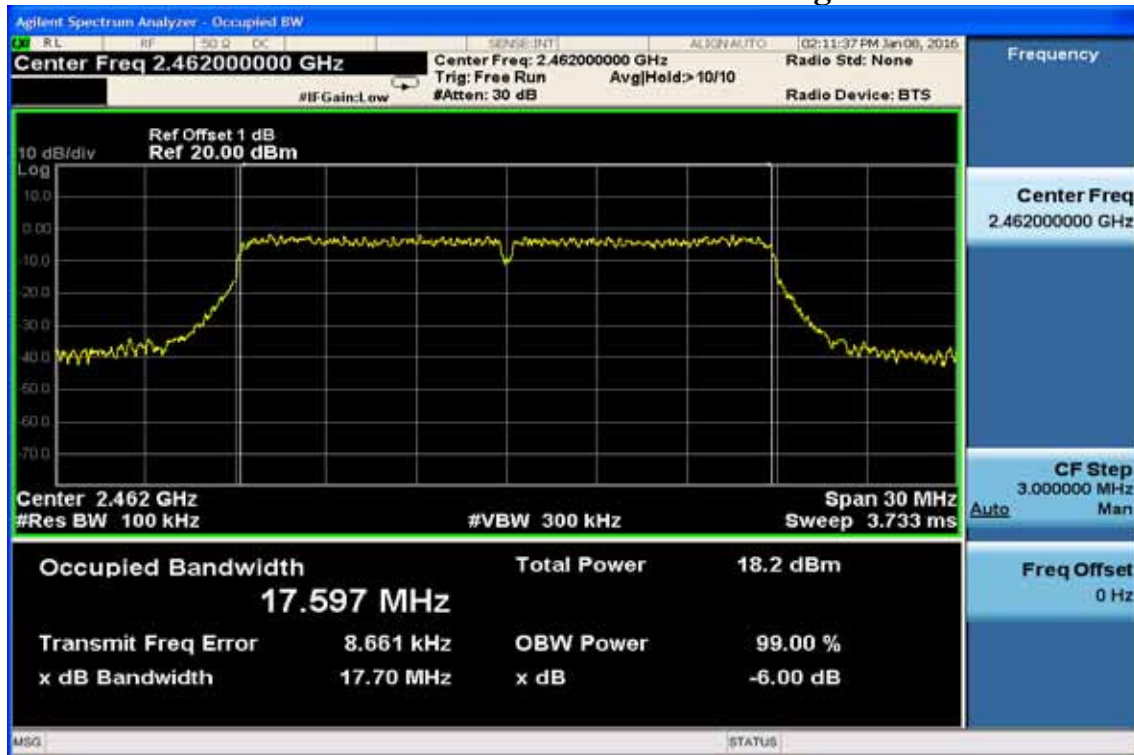


802.11n_40M


6dB Band Width & 99% Band Width Test Data CH-Low

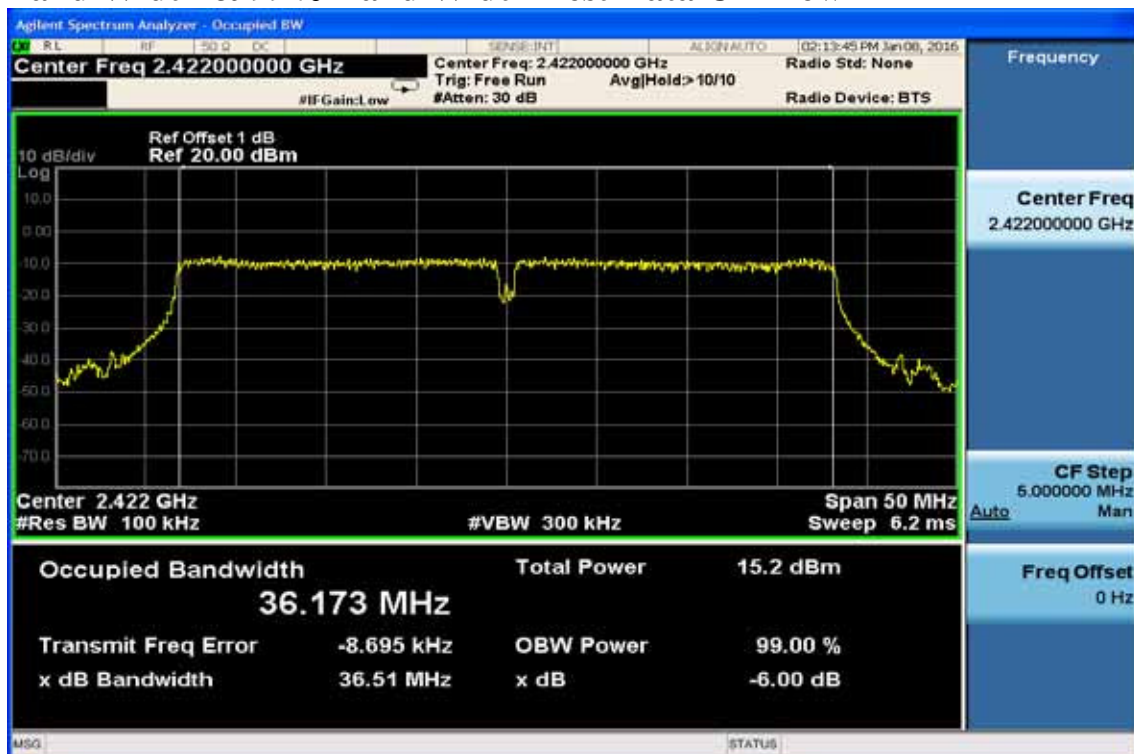

6dB Band Width & 99% Band Width Test Data CH-Mid

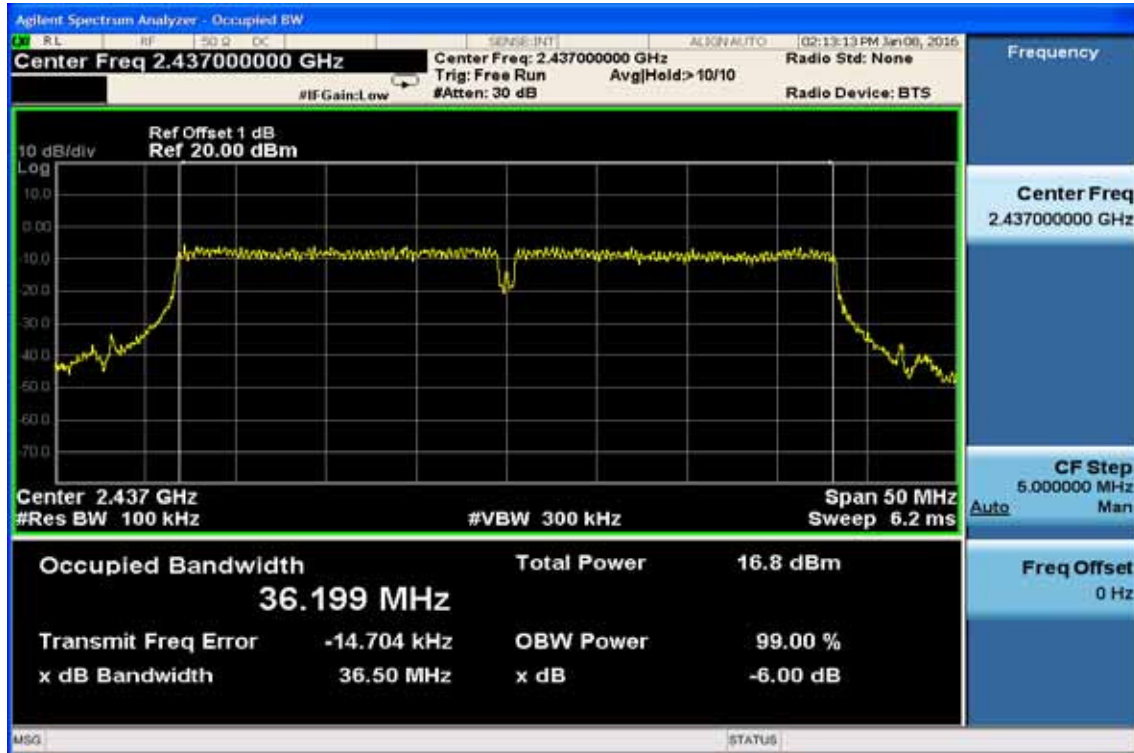

6dB Band Width & 99% Band Width Test Data CH-High

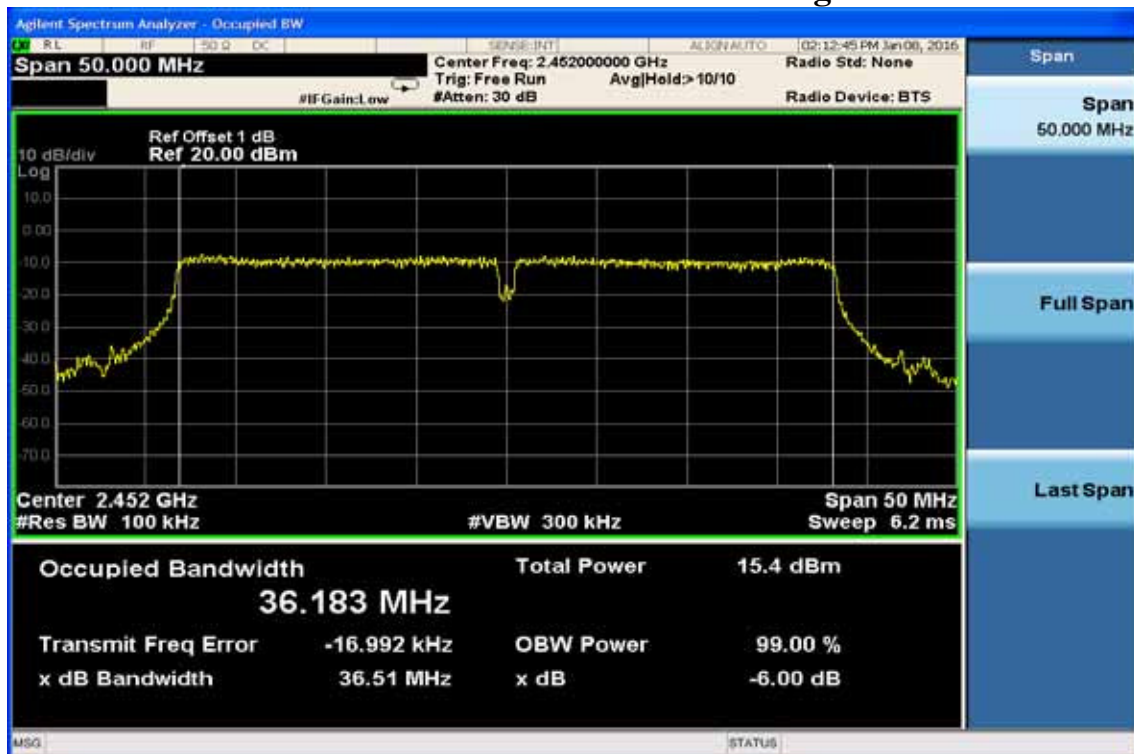

8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable:

According to

8.2 Measurement Equipment Used:

8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2 Radiated emission:

Chamber 14(966)					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer 21(26.5GHz)	Agilent	N9010A	MY49060537	07/29/2015	07/28/2016
Spectrum Analyzer 20(6.5GHz)	Agilent	E4443A	MY48250315	05/21/2015	05/20/2016
Spectrum Analyzer 22(43GHz)	R&S	FSU43	100143	05/07/2015	05/06/2016
Loop Antenna9K-30M	A.H.SYSTEM	SAS-564	294	06/17/2015	06/16/2017
Bilog Antenna30-1G	Schaffner	CBL 6112D	37873	06/16/2015	06/15/2016
Horn antenna1-18G	ETS	3117	00066665	11/30/2015	11/29/2016
Horn antenna26-40G(05)	Com-power	AH-640	100A	01/21/2015	01/20/2017
Horn antenna18-26G(04)	Com-power	AH-826	081001	07/24/2015	07/23/2017
Preamplifier9-1000M	HP	8447D	NA	03/12/2015	03/11/2016
Preamplifier1-18G	MITEQ	AFS44-001018 00-25-10P-44	1329256	07/28/2015	07/27/2016
Preamplifier1-26G	EM	EM01M26G	NA	03/11/2015	03/10/2016
Preamplifier26-40G	MITEQ	JS-26004000-2 7-5A	818471	07/23/2015	07/22/2017
Cable1-18G	HUBER SUHNER	Sucoflex 106	NA	11/25/2015	11/24/2016
Cable UP to 1G	HUBER SUHNER	RG 214/U	NA	10/02/2015	10/01/2016
SUCOFLEX 1GHz~40GHz cable	HUBER SUHNER	Sucoflex 102	27963/2&3742 1/2	11/03/2015	11/02/2017
2.4G Filter	Micro-Tronics	Brm50702	76	12/26/2015	12/25/2016
Test Software	Audix	E3 Ver:6.12023	N/A	N/A	N/A


8.3 Test SET-UP:

8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

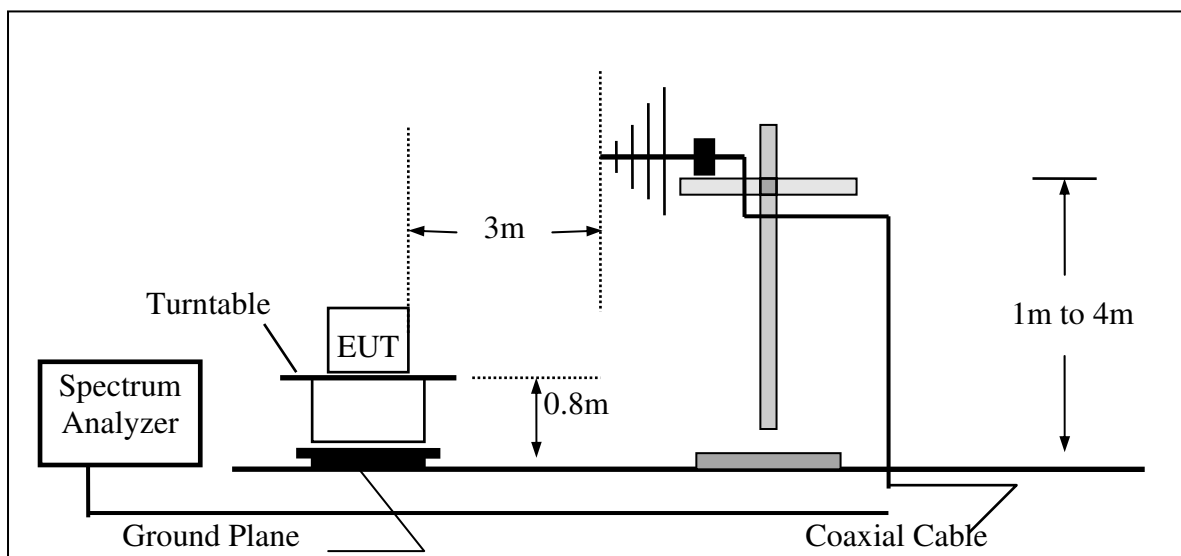

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

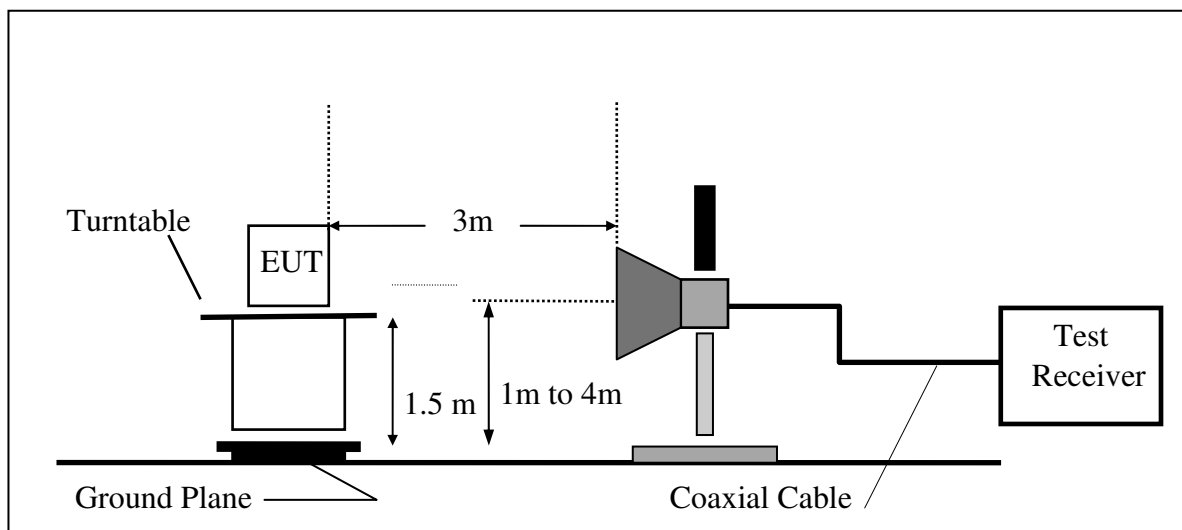

8.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Emission: 802.11 b mode

Operation Mode	TX CH Low
Fundamental Frequency	2412 MHz
Temperature	25

Test Date	2016/01/12
Test By	Lake

Operation Mode	TX CH High
Fundamental Frequency	2462 MHz
Temperature	25

Test Date	2016/01/12
Test By	Lake

Radiated Emission: 802.11 g mode

Operation Mode	TX CH Low
Fundamental Frequency	2412 MHz
Temperature	25

Test Date	2016/01/12
Test By	Lake

Operation Mode	TX CH High
Fundamental Frequency	2462 MHz
Temperature	25

Test Date	2016/01/12
Test By	Lake

Radiated Emission: 802.11 n_20M mode

Operation Mode	TX CH Low
Fundamental Frequency	2412 MHz
Temperature	25

Test Date	2016/01/12
Test By	Lake

Operation Mode	TX CH High
Fundamental Frequency	2462 MHz
Temperature	25

Test Date	2016/01/12
Test By	Lake

Radiated Emission: 802.11 n_40M mode

Operation Mode	TX CH Low
Fundamental Frequency	2422 MHz
Temperature	25

Test Date	2016/01/12
Test By	Lake

Operation Mode	TX CH High
Fundamental Frequency	2452 MHz
Temperature	25

Test Date	2016/01/12
Test By	Lake

9 SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to

9.4 Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Spurious Emission Measurement Result (below 1GHz) (The Worst Case)

Operation Mode	802.11 n_40M TX CH Low	Test Date	2016/01/12
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25		

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_40M TX CH Mid	Test Date	2016/01/12
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25		

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_40M TX CH High	Test Date	2016/01/12
Fundamental Frequency	2452MHz	Test By	Lake
Temperature	25		

Radiated Spurious Emission Measurement Result (above 1GHz) (The Worst Case)

Operation Mode	802.11n_40M TX CH Low	Test Date	2016/01/12
Fundamental Frequency	2422MHz	Test By	Lake
Temperature	25		

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode 802.11n_40M TX CH Mid
Fundamental Frequency 2437MHz
Temperature 25

Test Date 2016/01/12
Test By Lake

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode 802.11n_40M TX CH High
Fundamental Frequency 2452MHz
Temperature 25

Test Date 2016/01/12
Test By Lake

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to

10.5 Measurement Result:

802.11b Mode

CH	Power Density Level dBm/3KHz	Maximum Limit (dBm)
Low	-16.417	8
Mid	-11.307	8
High	-12.652	8

802.11b

Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)



Power Spectral Density Test Plot (CH-High)



802.11g

Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)



Power Spectral Density Test Plot (CH-High)




802.11n_20M

Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)

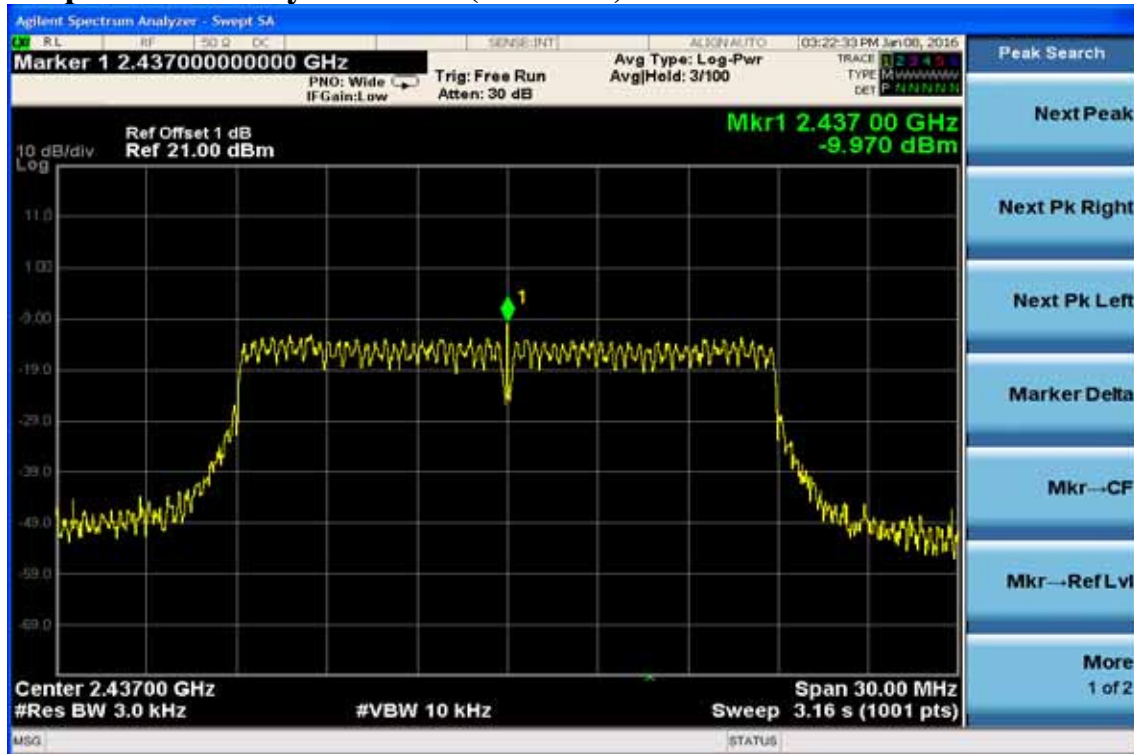

Power Spectral Density Test Plot (CH-High)




802.11n_40M

Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)

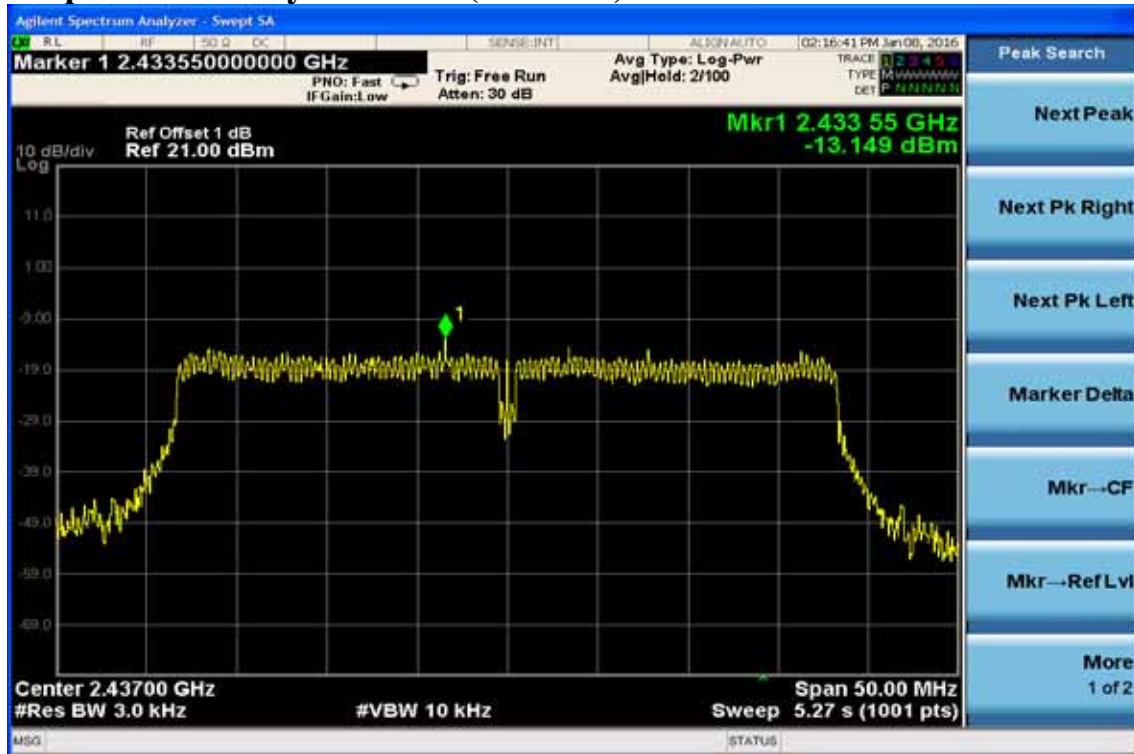

Power Spectral Density Test Plot (CH-High)



11 ANTENNA REQUIREMENT

11.1 Standard Applicable:

According to