



LTE Router BaiCE_BQ_1.2.x

5G User Manual

Document version: 01

About This Document

This document introduces the GUI and configuration operation of Atom CPE version BaiCE_BQ_1.2.x.

Copyright Notice

Baicells Technologies, Inc., copyrights the information in this document. No part of this document may be reproduced in any form or means without the prior written consent of Baicells Technologies, Inc. The Baicells logo is a proprietary trademark of Baicells Technologies, Inc. Other trademarks mentioned in this document belong to their owners.

Disclaimer

The information in this document is subject to change at any time without notice. For more information, please consult with a Baicells technical engineer or the support team.

Revision Record

Date	Version	Description
December 30, 2022	01	Initial Released.

Contact Us

	Baicells Technologies Co., Ltd.	Baicells Technologies North America, Inc.
	China	North America
Address	9-10F,1stBldg.,No.81BeiqingRoad, Haidian District,Beijing,China	555 Republic Dr., #200, Plano, TX 75074, USA
Phone	400-108-0167	+1-888-502-5585
Email	contact@Baicells.com or support@Baicells.com	sales_na@Baicells.com or support_na@Baicells.com
Website	www.Baicells.com	https://na.Baicells.com

Contents

1.	GUI Introduction	1
1.1	Computer Requirements	1
1.2	CPE Software	1
1.3	Applicable CPE Model	1
1.4	Log In	1
2.	Configuration	3
2.1	Status Menu.....	3
2.1.1	Overview.....	3
2.1.2	Routes.....	9
2.2	Network Menu.....	10
2.2.1	LAN Settings.....	10
2.2.2	WAN Settings.....	11
2.2.3	Static Routes.....	14
2.2.4	DMZ	15
2.3	Cellular Menu	16
2.3.1	Scan Mode	16
2.3.2	APN Management.....	19
2.3.3	PIN Management.....	20
2.4	Security Menu.....	21
2.4.1	Firewall Settings.....	21
2.4.2	MAC Filter	22
2.4.3	IP Filter	23
2.4.4	URL Filter	24
2.4.5	Port Forwarding.....	25
2.4.6	Port Triggering.....	26
2.4.7	ALG.....	27
2.4.8	UPnP	28

2.4.9	Attack Protection	29
2.5	VPN Menu	30
2.5.1	IPSec.....	30
2.5.2	OpenVPN	32
2.6	System Menu	34
2.6.1	NTP.....	34
2.6.2	Account.....	35
2.6.3	Dynamic DNS	36
2.6.4	WEB Setting	39
2.6.5	FTP Auto Upgrade.....	40
2.6.6	TR-069.....	41
2.6.7	SNMP	43
2.6.8	Restore/Update	44
2.6.9	Ping Watchdog.....	46
2.6.10	SAS	46
2.6.11	SAS Certificates.....	50
2.6.12	System Messages.....	51
2.6.13	Diagnosis.....	51
2.6.14	Reboot	55
2.7	Logout.....	56
Appendix: Regulatory Compliance		57

Figures

Figure 1-1 Login	2
Figure 2-1 Overview	4
Figure 2-2 Routes	10
Figure 2-3 LAN host settings	10
Figure 2-4 DHCP settings	11
Figure 2-5 Bundled Address List	11
Figure 2-6 WAN Settings	12
Figure 2-7 Tunnel Mode	13
Figure 2-8 Bridge Mode	14
Figure 2-9 Static Routes	14
Figure 2-10 DMZ Examples	15
Figure 2-11 DMZ	16
Figure 2-12 Scan Mode	16
Figure 2-13 Full Band	17
Figure 2-14 Cell Lock	18
Figure 2-15 Band Lock	19
Figure 2-16 APN Management	20
Figure 2-17 PIN Management	21
Figure 2-18 Firewall	22
Figure 2-19 MAC Filter	22
Figure 2-20 IP Filter	23
Figure 2-21 URL Filter	25
Figure 2-22 Port Forwarding	26
Figure 2-23 Port Triggering	27
Figure 2-24 ALG	28
Figure 2-25 UPnP	29
Figure 2-26 Attack Protection	29
Figure 2-27 VPN Menu	30

Figure 2-28 IPSec.....	30
Figure 2-29 IPSec.....	31
Figure 2-30 OpenVPN	33
Figure 2-31 Server.....	33
Figure 2-32 Client	34
Figure 2-33 NTP	35
Figure 2-34 Account	36
Figure 2-35 Dynamic DNS Overview	36
Figure 2-36 Dynamic DNS Global Settings.....	37
Figure 2-37 IPv4 DDNS configuration	38
Figure 2-38 IPv6 DDNS configuration	39
Figure 2-39 WEB Setting.....	40
Figure 2-40 FTP Auto Upgrade	41
Figure 2-41 TR-069	42
Figure 2-42 SNMP	43
Figure 2-43 Restore/Update.....	45
Figure 2-44 Ping Watchdog.....	46
Figure 2-45 SAS Menu	47
Figure 2-46 Automatic SAS	48
Figure 2-47 SAS Settings.....	48
Figure 2-48 Antenna Parameters	49
Figure 2-49 CPI Settings	50
Figure 2-50 SAS Certificates	51
Figure 2-51 System Messages.....	51
Figure 2-52 Diagnosis	52
Figure 2-53 Ping Diagnosis Settings.....	53
Figure 2-54 Trace Diagnosis Settings	54
Figure 2-55 Iperf Diagnosis Settings.....	55
Figure 2-56 Reboot.....	56
Figure 2-57 Logout	56

Tables

Table 1-1 Computer Requirements	1
Table 1-2 CPE Model List.....	1
Table 2-1 Status.....	7
Table 2-2 IP Filter.....	24
Table 2-3 Port Forwarding	26
Table 2-4 IPSec	31
Table 2-5 WEB Setting	40
Table 2-6 TR-069	42
Table 2-7 SNMP	44
Table 2-8 SAS Info field description	47
Table 2-9 SAS Settings.....	49
Table 2-10 Antenna Parameters.....	49
Table 2-11 Ping Diagnosis parameters	53
Table 2-12 Trace Diagnosis parameters	54
Table 2-13 Iperf Diagnosis parameters	55

1. GUI Introduction

Baicells provides a GUI to configure CPE devices.

1.1 Computer Requirements

The computer you use to connect with the CPE GUI must meet the requirements shown in Table 1-1.

Table 1-1 Computer Requirements

Item	Description
CPU	Pentium 500 MHz or higher
Memory	128 MB RAM or higher
Hard Disk	50MB available space
Operating System	- Microsoft: Windows XP, Windows 7 or higher - Mac: MacOSX 10.6 or higher
Screen Resolution	1024 x 768 pixels or higher
Browser	- Google Chrome 22 or later - Internet Explorer 8.0 or later - Mozilla Firefox 18.0 or later - Safari 5.1 or later

1.2 CPE Software

The firmware of the CPE should be BaiCE_BQ_1.2.x or above, if the CPE is not running this version, please contact Baicells support to get the corresponding software version.

1.3 Applicable CPE Model

The GUI is matched with the software version of CPE products and is applicable to all models of CPE products with the same software version.

The CPE product model of software version BaiCE_BQ_1.2.x is shown in Table 1-2.

Table 1-2 CPE Model List

Outdoor or Indoor	Product Model
Outdoor	EG8561A-NR11

1.4 Log In

The CPE comes preloaded with a GUI to configure the device. With the CPE turned on

and connected to the router, access the GUI login page by opening a Web browser and entering <http://192.168.150.1>.

The user name and password for the initial login are **admin admin**.

Figure 1-1 Login

The image shows a web browser window displaying the Baicells User Login page. The page has an orange header with the Baicells logo. Below the header, there is a white box containing the login form. The form has a title "User Login" and two input fields: "Username" and "Password". Below the input fields is a red "Login" button.

Baicells

User Login

Username

Password

Login


2. Configuration

2.1 Status Menu

2.1.1 Overview

After logging in, the GUI opens to the Status > Overview page (Figure 2-1). This page is a dashboard of key information regarding the CPE.

Figure 2-1 Overview

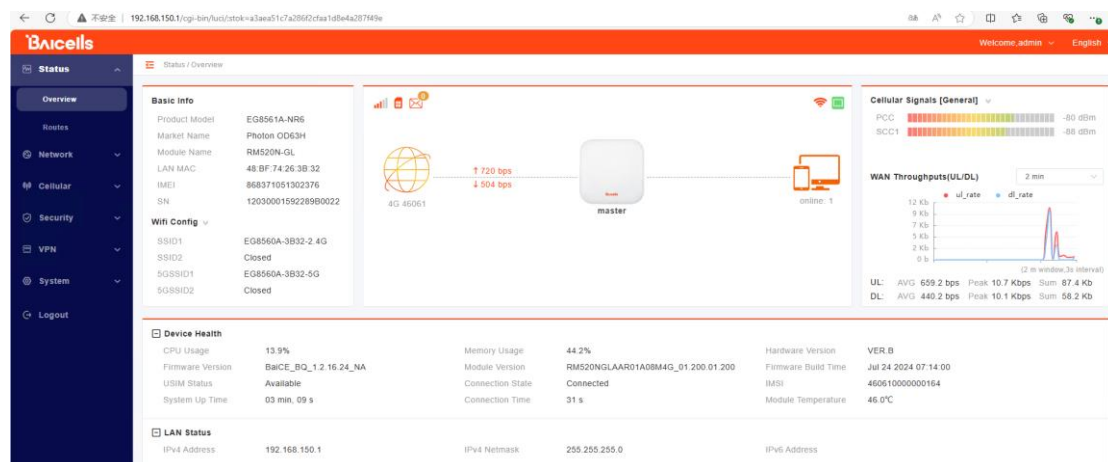


- The equipment connection status pane displays the connection status of CPE equipment with LTE network and WAN network. The icons are described as follows:


	LTE signal
	For SIM card, it is gray when checking SIM / disconnect, orange when SIM card is recognized, and red after network access.
	Wired interface, gray when there is no link, orange when negotiating 100M, and blue when negotiating 1000M.
	LTE network bearer. It is gold in case of bearing and gray in case of no bearing. The number next to the icon is WAN uplink and downlink data rate.
	User Number under LAN
	CPE equipment icon, click to modify the equipment name.

- The *Basic Info* pane displays the product model, module name, LAN MAC, IMEI, serial number, etc.
- The *Cellular Signals* pane shows the signal quality of primary cell. Click icon to

view LTE details, such as the CPE's SIM card status and its IMSI and IMEI numbers, wireless frequency being used, eNB connection status, and current signal strength and quality.

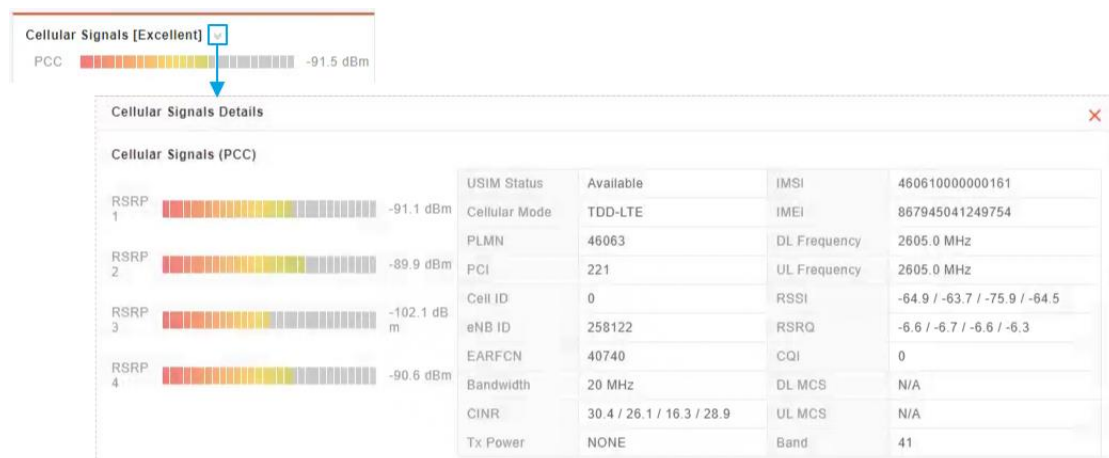

- Under *WAN Throughput* you will see downlink (DL) and uplink (UL) data rates for current throughput (kbps), average rates, peak rates, and total throughput. The flow statistics can be carried out at different times, including 2 min, 1 hour, 1 day and 7 days.

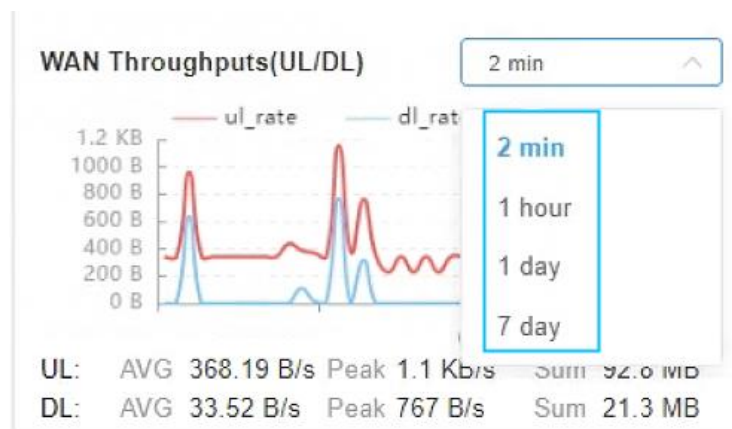

- The *Device Health* pane shows device health data, such as CPU Usage, Memory Usage, USIM Status, Connection Time, System Up Time, etc.

Device Health			
CPU Usage	11.2%	Memory Usage	44.5%
Firmware Version	BaiCE_BQ_1.2.16.24_NA	Module Version	RM520NGLAAR01A08M4G_01.200.01.200
USIM Status	Available	Connection State	Connected
System Up Time	05 min, 14 s	Connection Time	02 min, 36 s
		Hardware Version	VER.B
		Firmware Build Time	Jul 24 2024 07:14:00
		IMSI	460610000000164
		Module Temperature	48.0°C

- The *LAN Status* pane shows LAN settings information, such as IP Address, IPv4 Netmask, IPv6 Prefix, etc.

LAN Status					
IPv4 Address	192.168.150.1	IPv4 Netmask	255.255.255.0	IPv6 Address	fd2e:ea70:8d20::1
IPv6 Prefix	fd2e:ea70:8d20::	IPv6 Prefix Len	60		

- The *Diagnosis* pane shows Ping diagnosis results, Traceroute diagnosis results, Ping Watchdog configuration data. Click the displayed data to quickly enter the configuration page.

Diagnosis

Ping N/A Traceroute N/A Ping Watchdog Disabled

Network / Diagnosis

Method

Method of Diagnostics

☒ Ping ☐ TraceRoute ☐ Iperf

Ping

Target IP:

Interface:

Package Size: bytes(1-9000)

Timeout: seconds(1-10)

Count: times(1-10)

System / Ping Watchdog

Settings

Ping Watchdog

☐ Enable

- The *WAN Connections* pane displays configured APN, IP address of gateway and DNS.

WAN Connections					
Connections					
	Profile Name	IPv4 Address	IPv4 DNS	IPv6 Address	IPv6 DNS
1	APN1	10.30.10.209	114.114.114.114, 8.8.8.8	--	--

Total 1 Go to

- The *LAN Connections* pane will show details about all smart devices currently connected through the CPE.

LAN Connections					
Connections					
	Device Name	MAC Address	IP Address	Lease Time	Type
1	-	dc:41:a9:13:b0:96	192.168.150.88	-	LAN.Static
2	-	b0:7b:25:38:e4:24	192.168.150.120	-	LAN.Static

Total 2 Go to

Refer to Table 2-1 for a description of the *Status* fields.

Table 2-1 Status

Field Name	Description
Basic Info	
Product Model	CPE model number
Market Name	Market name of CPE products
Module Name	Type of module in the CPE
LAN MAC	The MAC address of the LAN port. The same as the MAC on the label.
IMEI	International Mobile Equipment Identity is like a serial number for the SIM card
SN	Serial Number
Cellular Signals	
USIM Status	The Universal Subscriber Identity Module, or SIM, card status is either available or not ready in the CPE
IMSI	The unique International Mobile Subscriber Identity (IMSI) number associated with the SIM card in the subscriber's CPE. The IMSI must be identifiable by the operator's LTE network in order to access it.
IMEI	International Mobile Equipment Identity is like a serial number for the SIM card
PLMN	The Public Land Mobile Number (PLMN), or operator network ID, to which the CPE is connected
Band	The range of frequencies within the band the CPE may use for wireless communications with an eNB, expressed in MHz
Cell ID	The operator's cell site ID to which the CPE is connected. A cell site may comprise more than one eNB. Each eNB is given a PCI to identify it.
RSRQ	Reference Signal Receiving Quality indicates the quality of the wireless signal
eNB ID	The operator's cell site ID to which the CPE is connected. A cell site may comprise more than one eNB. Each eNB is given a PCI to identify it.
EARFCN	The E-UTRA Absolute Radio Frequency Channel Number (band and frequency) within which the CPE operates
PCI	The Physical Cell Identifier (PCI) unique to each eNB. PCI indicates to which eNB the CPE is connected. An operator can have multiple eNBs serving the same cell.
DL Frequency	The frequency, in MHz, being used in the downlink (eNB to CPE). In LTE, the carrier frequency in the uplink and downlink is designated by the EARFCN, which identifies the LTE band and carrier frequency.

Field Name	Description
UL Frequency	The frequency, in MHz, that the CPE is using in the uplink (CPE to eNB). In LTE, the carrier frequency in the uplink and downlink is designated by the EARFCN, which identifies the LTE band and carrier frequency.
CINR	The Channel Signal-to-Interference-plus-Noise Ratio reflects the signal strength of the signal received from the two antennas in the eNB, expressed in decibels (dB) NOTE: Additional SINR values are reported when a transmitting device is using more than two antennas.
RSRP1 ~ RSRP4	The Signal-to-Interference-plus-Noise Ratio reflects the signal strength of the signal received from the two antennas in the eNB, expressed in decibels (dB) NOTE: Additional SINR values are reported when a transmitting device is using more than two antennas.
WAN Throughputs	
DL	The current downlink data throughput rate, in Kbps
UL	The current uplink data throughput rate, in Kbps
Average	The average DL and UL data throughput rates, in Kbps, for this CPE in the last 2 minutes
Peak	The peak DL and UL data throughput rates, in Kbps, for this CPE in the last 2 minutes
Sum	The total (sum) DL and UL data throughput rates, in Mb
Device Health	
CPU Usage	CPU real-time usage rate, updated every 3s
Memory Usage	The memory usage rate of CPE, updated every 3s
USIM Status	The Universal Subscriber Identity Module, or SIM, card status is either available or not ready in the CPE
Connection State	Connection status between the CPE and the network –Checking SIM, Scanning, Registering, Acquiring IP, Connected, Disconnected.
IMSI	The unique International Mobile Subscriber Identity (IMSI) number associated with the SIM card in the subscriber's CPE. The IMSI must be identifiable by the operator's LTE network in order to access it.
System Up Time	CPE start time
Connection Time	Network access success time
Firmware Version	Version number of the module
Firmware Build Time	Software version compilation time
Hardware Version	CPE hardware version
Module Version	CPE LTE module firmware version
LAN Status	

Field Name	Description
IPv4 Address	The IPv4 address of the LAN device
IPv4 Netmask	The subnet mask of the LAN device
IPv6 Address	The IPv6 address of the LAN device
IPv6 Prefix	IPv6 address prefix of LAN device
IPv6 Prefix Len	Length of IPv6 address prefix of LAN device
Diagnosis	
Ping	Ping diagnosis results
Traceroute	Traceroute diagnosis results
Ping Watchdog	Ping Watchdog configuration result
WAN Connections	
Profile Name	APN Number
IPv4 Address/ IPv6 Address	IPv4or IPv6 address of the APN gateway
IPv4 DNS/ IPv6 DNS	IPv4 or IPv6 DNS
LAN Connections	
Device Name	The name of each smart device connected through the CPE
MAC Address	The MAC address of each smart device connected through the CPE
IP Address	The IP address of each device connected through the CPE
Lease Time	Amount of time a smart device's IP address has been leased
Type	Type of smart device connection

2.1.2 Routes

The Overview > Routes table lists all of the configured routing rules, including Allocation and Retention Policy (ARP) tables and active IPv4/IPv6 routes (Figure 2-2). For each item in the list, the IP address, MAC address, and interface type are displayed.

Figure 2-2 Routes

ARP		
IPv4-Address	MAC-Address	Interface
114.114.114.114	ba:5e:76:8f:dab4	usb0.1121
192.168.150.109	00:2b:67:d9:d4:f1	br-lan
103.212.12.56	ba:5e:76:8f:dab4	usb0.1121
172.16.15.14	ba:5e:76:8f:dab4	usb0.1121
5.79.108.34	ba:5e:76:8f:dab4	usb0.1121
104.41.150.194	ba:5e:76:8f:dab4	usb0.1121
119.6.97.29	ba:5e:76:8f:dab4	usb0.1121

Active IPv4-Routes				
Network	Target	IPv4-Gateway	Metric	Table
wan1	0.0.0.0/0		0	DataPdn
wan5	169.254.1.0/24		0	DataPdn
lan	192.168.150.0/24		0	DataPdn
wan1	0.0.0.0/0		0	ApnData1
wan5	169.254.1.0/24		0	ApnData1
lan	192.168.150.0/24		0	ApnData1
wan1	0.0.0.0/0		0	main
wan5	169.254.1.0/24		0	main
wan1	172.16.15.0/24		0	main
lan	192.168.150.0/24		0	main

2.2 Network Menu

2.2.1 LAN Settings

Enter the Network > LAN Settings, it shows host IP address, subnet mask, and the Maximum Transmission Unit (MTU) size, in bytes (Figure 2-3). The range is 1000-1500 bytes. The default is 1500 bytes.

Figure 2-3 LAN host settings

☒ LAN Host Settings

IP Address

192.168.150.1

Subnet Mask

255.255.255.0

MTU

1500

range 1000-1500

You can enable or disable the DHCP server (Figure 2-4). If enabled, enter the start and end IP addresses, and the lease time for IP address use - from 10 minutes to 720 hours. Optionally, you can enter one or two DNS server IP addresses, and one to three option 138 connection IP addresses for connecting to a Control and Provisioning of Wireless Access Points (CAPWAP) server. When using option 138, the device will connect with the server's LAN port and get an Access Controller (AC) IP address.

Figure 2-4 DHCP settings

DHCP Settings

DHCP Server

☒ Enable

Start IP Address

192.168.150.100

End IP Address

192.168.150.250

Lease Time

12h

Range: 10m~720h

DNS1

114.114.114.114

(Optional)

DNS2

8.8.8.8

(Optional)

Option43

Hex

Option138

ip address

Option138

ip address

Option138

ip address

The *DHCP Reservations* may be used to bind an IP address to a specific MAC address (Figure 2-5). In the bottom half of the pane, enter the IP address and the MAC address, and click on *ADD*. The IP address must be within the range of DHCP addresses. Any configured bindings will appear at the top of the window.

Figure 2-5 Bundled Address List

Bundled Address List

Add List

Settings

IP Address

MAC Address

Format xx:xx:xx:xx:xx:xx

Add

Cancel

2.2.2 WAN Settings

2.2.2.1 NAT Mode

The CPE will be worked at NAT mode, and only 1 APN can be configured by Default Data bear types.

Figure 2-6 WAN Settings

 Network / WAN Settings

Operation Mode

Operation Mode

NAT Mode

Profile Setting

APN Number

#1

Bear Type

Data

APN List

APN Number	APN Name	Enable	Bear Type
#1		Enable	Data

DNS Mode

Manually DNS

☐

Primary DNS

Secondary DNS

(Optional)

Save & Apply

DNS Mode set how to get DNS server IP:

- Automatic: automatically obtain the DNS server IP assigned by EPC. If Manually DNS is not selected, it is automatic mode.
- Manually: manually configure the primary and standby DNS server IP.

2.2.2.2 Tunnel Mode

This CPE can support L2TP, GRE, PPTP, and VxLAN VPN type.

Figure 2-7 Tunnel Mode

Operation Mode

Operation Mode

Tunnel Mode

Tunnel Mode

VPN Type

GRE

GRE Type

Layer 3

NAT Support

Disable

Profile Setting

APN Number

#1

Bear Type

Data

Tunnel IP Address

Tunnel Subnet Mask

Destination IP

APN List

APN Number	APN Name	Enable	Bear Type
#1		Enable	Data

DNS Mode

Manually DNS

☐

Primary DNS

Secondary DNS

(Optional)

2.2.2.3 Bridge Mode

When the CPE worked at Bridge mode, the WAN ports address will bridge to LAN port, and the LAN port will work at trunk mode.

Figure 2-8 Bridge Mode

Operation Mode

Operation Mode

Bridge Mode

Profile Setting

APN Number

#1

Bear Type

Data

Vlan ID

0

range 0,10-4094 eg:100*

Bind MAC Address

Format: XXXXXXXXXXXX

APN List

APN Number	APN Name	Enable	Bear Type
#1		Enable	Data

DNS Mode

Manually DNS

☐

Primary DNS

Secondary DNS

(Optional)

2.2.3 Static Routes

Select **Network > Static Routes**, and set the Static Routes.

To add a route, click on the **ADD** button to open a dialogue window where you can input the target IP address, netmask, interface (APN, LAN, or WAN), and gateway address.

Figure 2-9 Static Routes

Routes

Routes specify over which interface and gateway a certain host or network can be reached.

Static IPv4 Routes

Target Host-IP or Network	IPv4-Netmask if target is a network	Interface	IPv4-Gateway	Metric	
	255.255.255.255	lan		0	Delete Add

Static IPv6 Routes

Target IPv6-Address or Network (CIDR)	Interface	IPv6-Gateway	Metric	
This section contains no values yet				


Add

Save & Apply

2.2.4 DMZ


In technology, the DMZ refers to a firewall between incoming WAN traffic and the LAN to which the CPE is connected. Two basic DMZ methods are (a) using a single firewall, also known as the three-legged model, and (b) using dual firewalls (Figure 2-10). These architectures can be expanded to create complex architectures depending on the network requirements.

Figure 2-10 DMZ Examples

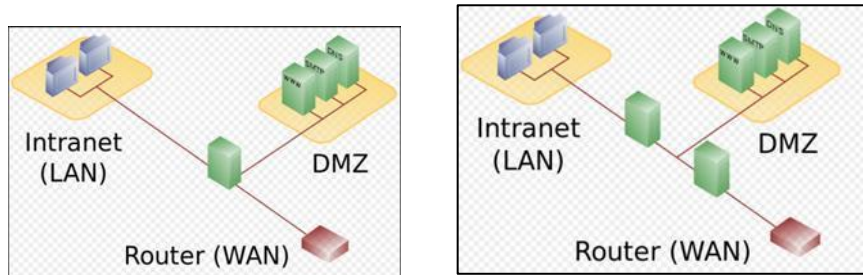

When the LAN has a DMZ/firewall server, you can enable DMZ on the CPE so that packets from the WAN are forwarded to the firewall (Figure 2-11). Alternatively, you can enable Internet Control Message Protocol (ICMP) redirect error messages to support Layer 2 multicast features.

Figure 2-11 DMZ

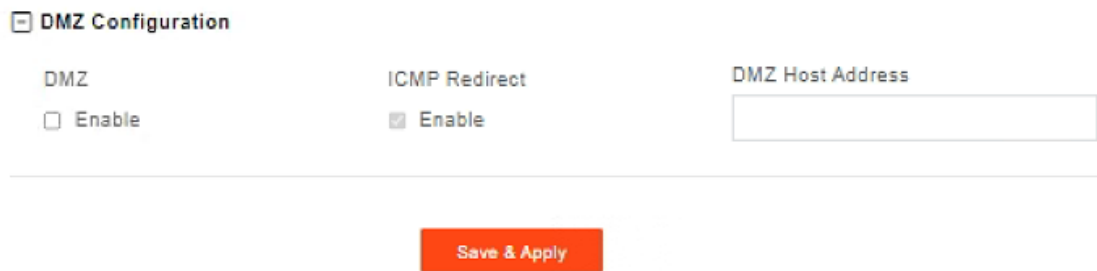

DMZ Configuration

DMZ	ICMP Redirect	DMZ Host Address
☐ Enable	☒ Enable	

Save & Apply


2.3 Cellular Menu

2.3.1 Scan Mode

The Scan Mode determines which frequencies the CPE's routine scan of available frequencies will cover. Scanning is a process of tuning to a specific frequency and measuring the simplest signal quality [e.g., Received Signal Strength Indication (RSSI)].

As part of the cell selection and reselection process, the CPE performs the scan first and then selects a small number of candidate cells to go through the next step of measuring and evaluating signals to select the best eNB that can serve it. The CPE frequently (milliseconds) performs the scan to ensure it has the best possible connection to the network. Refer to Figure 2-12.

Figure 2-12 Scan Mode

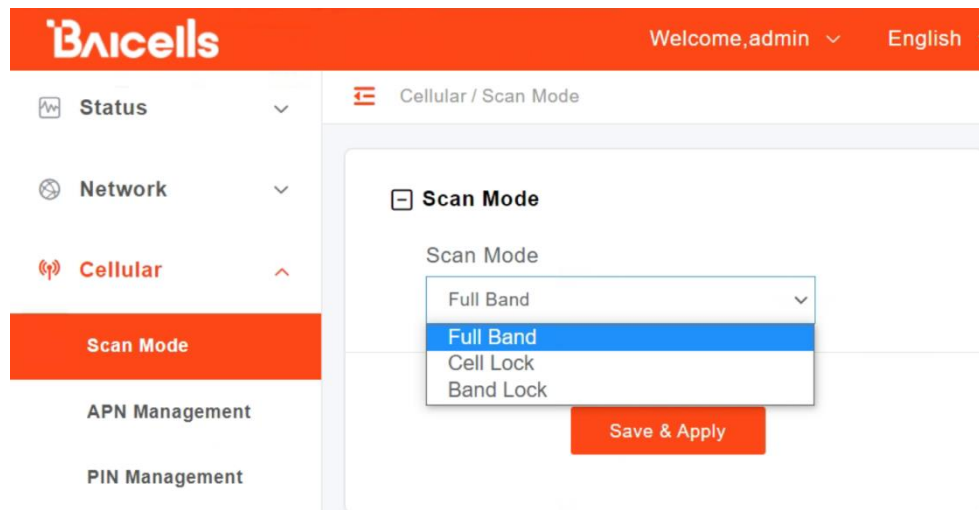

Baicells Welcome,admin English

Cellular / Scan Mode

Scan Mode

Scan Mode


- Full Band
- Full Band**
- Cell Lock
- Band Lock

Save & Apply

Select one of the following options:

- **Full Band** (default) – All channels in the band. (Figure 2-13)
 - The CPE will routinely scan all channels in the band, increasing the time it takes to connect compared to the other modes. The band is dependent on the CPE model.

Figure 2-13 Full Band

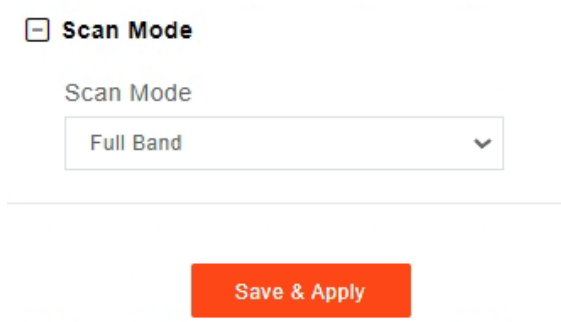

Scan Mode

Scan Mode

Full Band

Save & Apply

- **Cell Lock** –Specific cell only. (Figure 2-14)
 - The CPE will scan the list of eNBs with the specified cells when accessing the network. Using this mode can accelerate network access time. 5G CPE supports access to LTE and NR networks, and the locked frequency can be specified according to the accessed network.

Figure 2-14 Cell Lock

Scan Mode

Scan Mode

Cell Lock

Cell Lock

Add List

Cell Lock Setting

Rat

LTE

LTE

NR

Band

1

PCI

0-599

0-503

Add

Cancel

Save & Apply

- **Band Lock**– Specific band only.
 - Scan the specified band when accessing the network. 5G CPE supports access to LTE, SA and NSA networks, and the locked frequency can be specified according to the accessed network. (Figure 2-15)

Figure 2-15 Band Lock

Scan Mode

Band Lock

Band Lock

Add List

Band Lock Setting

Rat

LTE

LTE

SA

NSA

Band

1

Add

Cancel

Save & Apply

After selecting an option, enter the required information.

2.3.2 APN Management

An Access Point Name (APN) is the name of a gateway between a mobile network and another computer network, frequently the public Internet. Generally, multiple APNs are used for different business flows such as TR-069 management, voice, data, etc., and may support different services and QoS levels for different subscribers.

The CPE supports 4 APN configurations. At least one APN (TR-069) must be configured when the CPE/eNB connect to the Baicells CloudCore. In the window (Figure 2-16) you will select the APN number (1-4), enable it, enter an APN Name, select Authentication Type, select the type of IP addressing (IPv4), and set the MTU value for the APN.

Figure 2-16 APN Management

APN Management

APN Number: #1

Enable: ☒

APN Name:

Authentication Type:
 NONE
 NONE
 AUTO
 PAP
 CHAP

Internet Protocol: IPv4

1500 (1280-1500)

Save & Apply


APN List

APN Name	Internet Protocol	Enable
	IPv4	enable

2.3.3 PIN Management

Use the PIN Management feature if you want to require users to enter a PIN code before they can use the CPE to access the network (Figure 2-17). Once the PIN is enabled, you will need to remember it if you want to later modify the number. You are limited to 3 tries to enter the correct PIN code before getting locked out. If this happens, contact your service provider (end-users) or Baicells support (service providers).

Figure 2-17 PIN Management

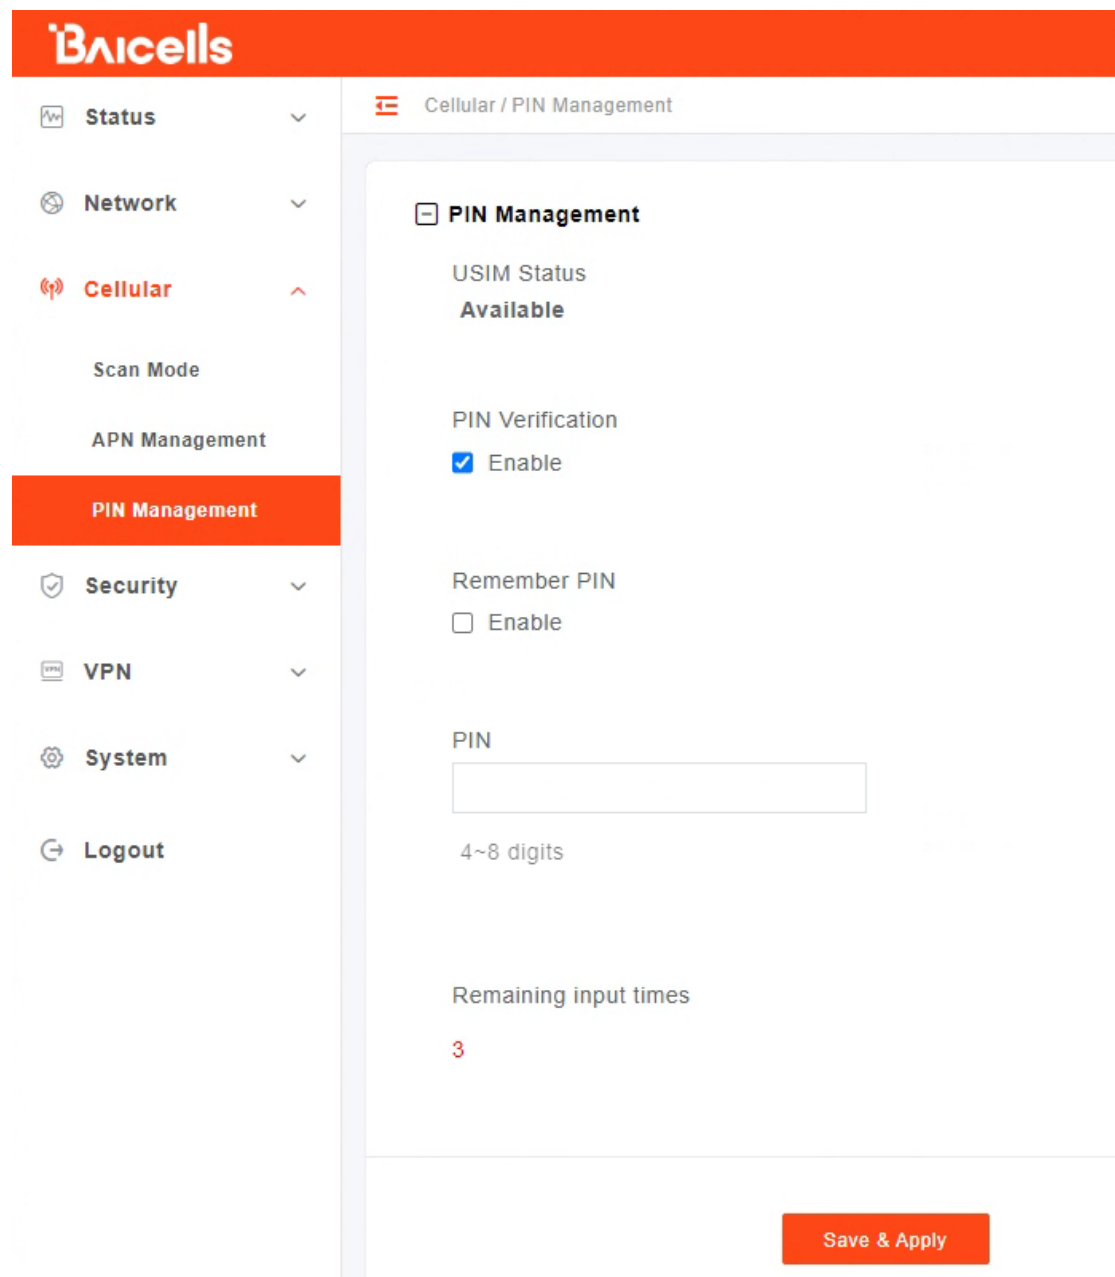

Baicells

Cellular / PIN Management

PIN Management

USIM Status
Available

PIN Verification
☒ Enable

Remember PIN
☐ Enable

PIN

4~8 digits

Remaining input times
3


Save & Apply

2.4 Security Menu

2.4.1 Firewall Settings

When using a firewall server in the local network, invoke this setting to enable or disable the firewall for this CPE (Figure 2-18).


Figure 2-18 Firewall

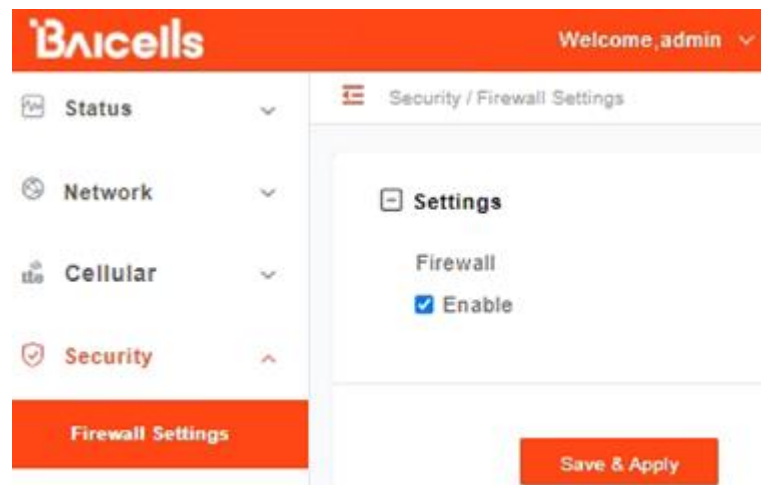

2.4.2 MAC Filter

Media Access Control (MAC) Filtering allows you to identify a list of devices either allowed to access or forbidden from accessing the network through the CPE (Figure 2-19). Select *Enable* to enable MAC filtering, and then determine whether you will allow or forbid the defined MAC addresses to access the network.

Figure 2-19 MAC Filter

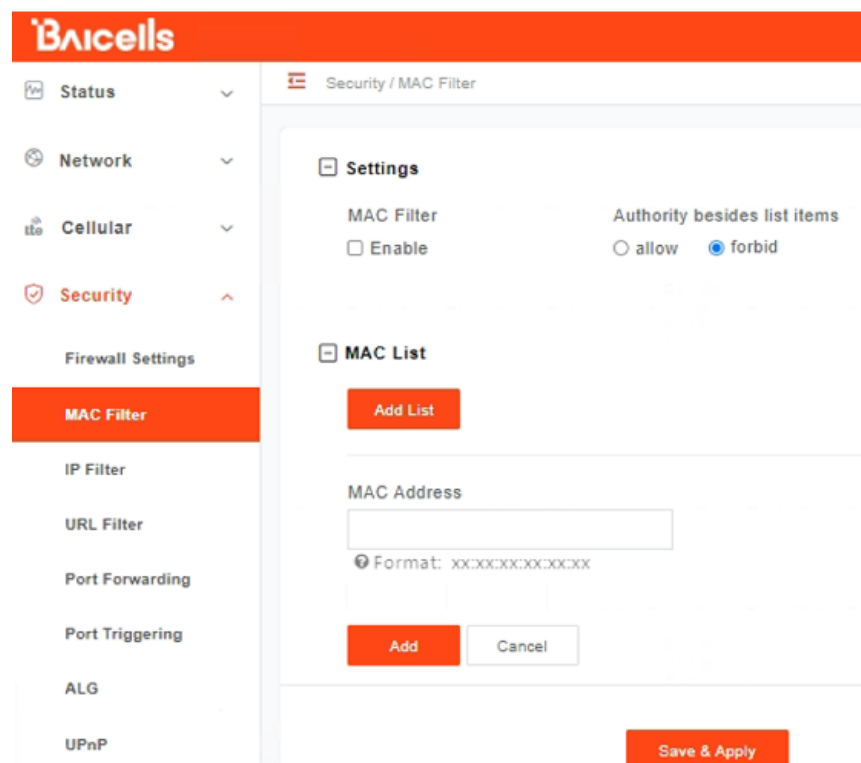


2.4.3 IP Filter

Internet Protocol (IP) Filtering allows you to filter services based on the IP address of the source device that is using the CPE to access the network (Figure 2-20). You can define a list of devices either allowed or forbidden from accessing the destination address range or port number range you enter.

To use this feature, select the *Enable* check box and then click on ADD LIST to open the settings window. Enter the source devices' IP addresses. Refer to Table 2-2 for a description of each field.

Figure 2-20 IP Filter

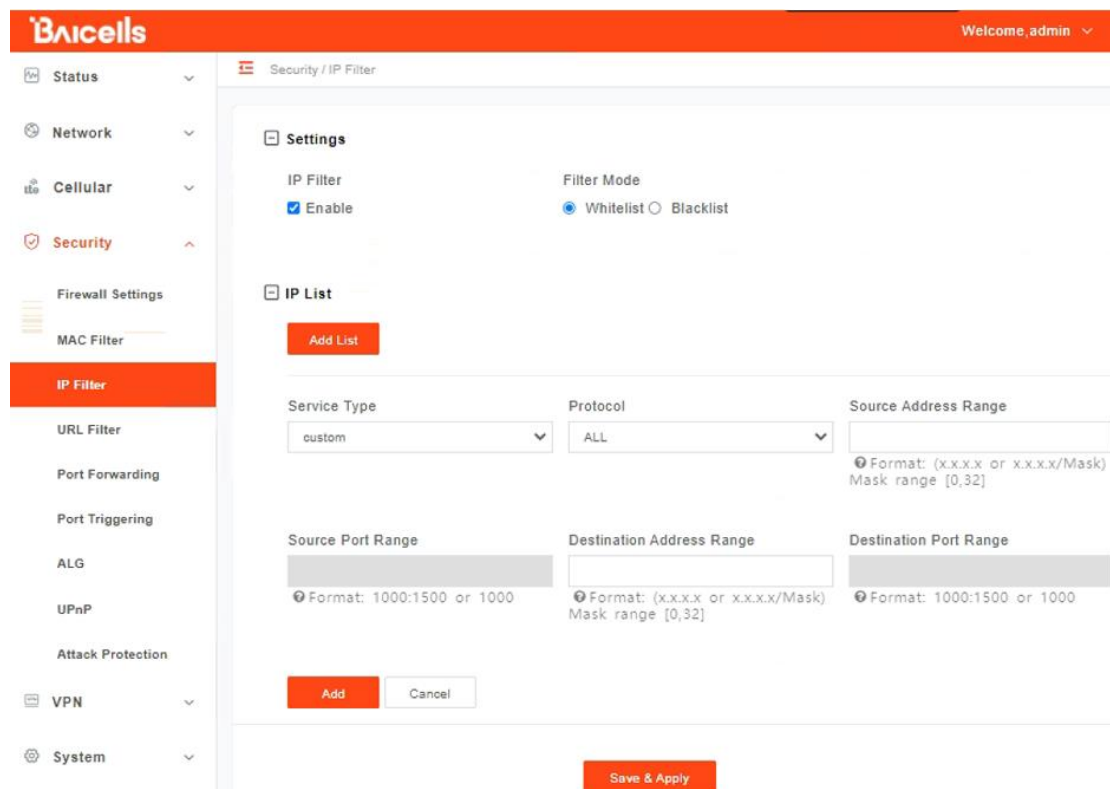

Baicells Welcome, admin

Security / IP Filter

Settings

IP Filter ☒ Enable

Filter Mode ☒ Whitelist ☐ Blacklist

IP List

Add List

Service Type: custom Protocol: ALL Source Address Range:
Format: (x.x.x.x or x.x.x.x/Mask) Mask range [0,32]

Source Port Range:
Format: 1000:1500 or 1000

Destination Address Range:
Format: (x.x.x.x or x.x.x.x/Mask) Mask range [0,32]

Destination Port Range:
Format: 1000:1500 or 1000

Add Cancel

Save & Apply


Table 2-2 IP Filter

Field Name	Description
Service Type	Select the type of service, either custom, FTP, SSH, TELNET, SMTP, HTTP, POP3, HTTPS, or HTTP Proxy, the CPE will be allowed or forbidden to use
Protocol	Select the type of data protocol, either ALL, TCP, UDP, TCP&UDP, or ICMP the CPE will be allowed or forbidden to use
Source Address Range	Enter the IP address range for the source device(s) in the format of x.x.x.x or x.x.x.x/mask. The mask value may be 0 or 32.
Source Port Range	Enter the port number range for the source device(s) in the format of 1000 to 1500, or 1000.
Destination Address Range	Enter the IP address range for the destination device(s) to be filtered, in the format of x.x.x.x or x.x.x.x/mask. The mask value may be 0 or 32.
Destination Port Range	Enter the port number range for the destination device(s) to be filtered, in the format of 1000 to 1500, or 1000.

2.4.4 URL Filter

The Uniform Resource Location Filter (*URL Filter*) allows you to define a list of URL addresses users are forbidden from accessing. When you enable the filter, a *Settings* window appears. Enter the specific URL address users cannot access, as shown in Figure 2-21. To add more URL addresses, click on *ADD*. After entering the addresses and saving, the URL(s) you enter will appear in the URL List.

Figure 2-21 URL Filter

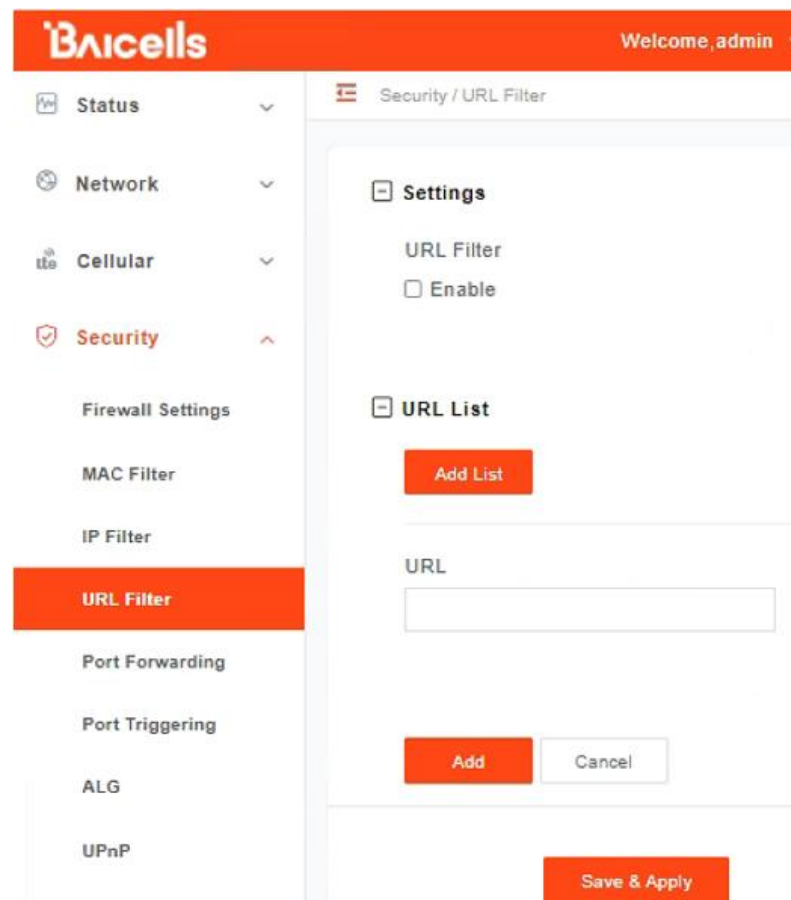

2.4.5 Port Forwarding

When NAT mode is enabled as the WAN interface type ([section 2.2.2](#)), you can redirect a communication request from one address and port number combination to another. Only the IP address on the WAN side is open to the Internet. If a computer on the LAN is enabled to provide services for the Internet (for example, work as an FTP server), port forwarding is required so that all access requests to the external server port from the Internet are redirected to the server on the LAN.

To add a port forwarding rule, select the *Enable* check box and click on *ADD LIST* (Figure 2-22). Enter the parameters per the field descriptions in Table 2-3.

Figure 2-22 Port Forwarding

Table 2-3 Port Forwarding


Field Name	Description
Service Type	Select the type of service, either Custom, DNS, FTP, IPSec, POP3, SMTP, PPTP, Realplay, SSH, HTTPs, SNMP, SNMP Trap, Telnet, TFTP, or HTTP
Protocol	Select the type of data protocol, either TCP, UDP, or TCP&UDP
Remote Port Range	Enter the port number range for the remote device in the format of 1000 to 1500. Value range is 0~65535.
Local Host	Enter the local host IP address. The address must be different from the IP address that is set for the LAN Host Settings parameter, but they must be on the same network segment.
Local Port	Enter the local port number. Range is 1 to 65,535.

2.4.6 Port Triggering

Port Triggering is a configuration option on a router - in this case, the CPE - if it is operating in NAT mode as the WAN interface type ([section 2.2.2](#)). When an application uses a trigger port to build a connection, the CPE will forward the data to the forward port.

To configure the feature, click on the check box next to *Enable* and then click on *ADD LIST* to enter the service type, protocol, trigger port, and forward port (Figure 2-23).

Figure 2-23 Port Triggering

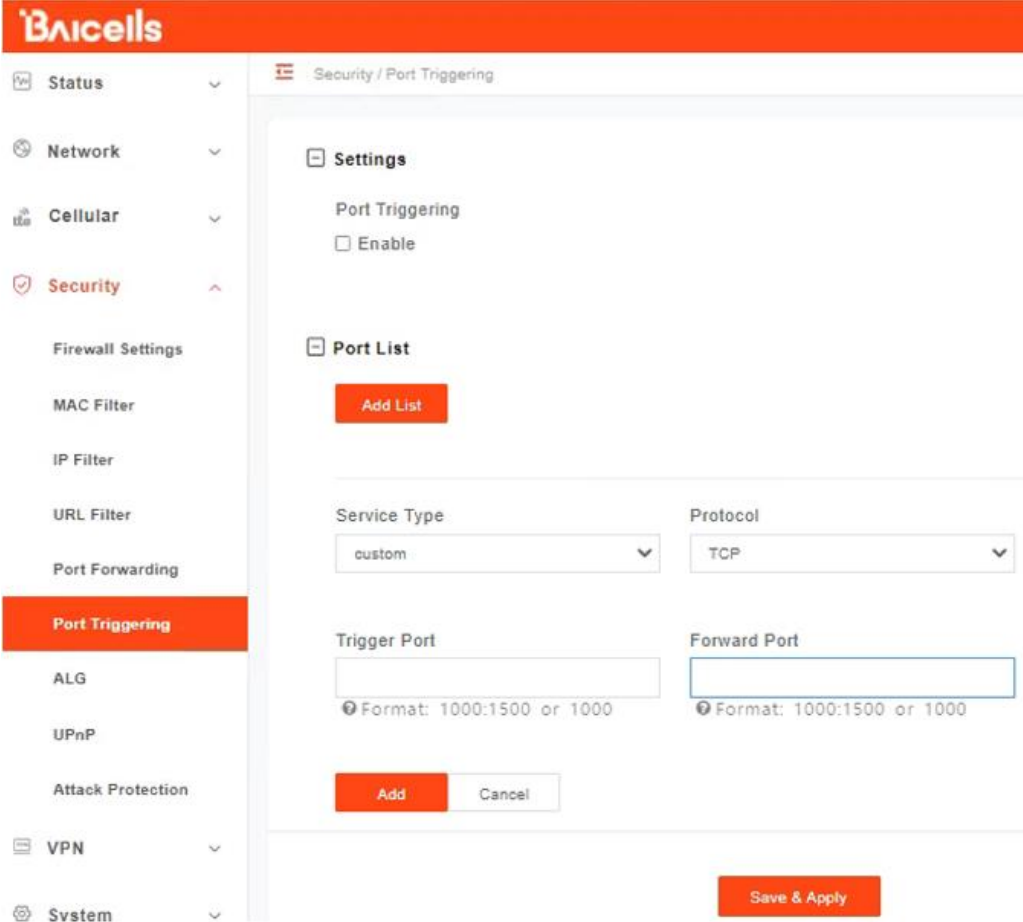

Baicells

Status

Network

Cellular

Security

Firewall Settings

MAC Filter

IP Filter

URL Filter

Port Forwarding

Port Triggering

ALG

UPnP

Attack Protection

VPN

System

Security / Port Triggering

Settings

Port Triggering

☐ Enable

Port List

Add List

Service Type

custom

Protocol

TCP

Trigger Port

Format: 1000:1500 or 1000

Forward Port

Format: 1000:1500 or 1000


Add Cancel

Save & Apply

2.4.7 ALG

The Application Layer Gateway (ALG) function provides a security component that augments a firewall or the NAT used by the CPE (if WAN Network Mode = NAT). It allows customized NAT traversal filters to be plugged into the gateway to support address and port translation for certain application layer control/data protocols such as FTP, H.323 ALG, SIP, and PPTP. You can enable the different types of application protocols by clicking on the check box next to the protocol name (Figure 2-24).

Figure 2-24 ALG

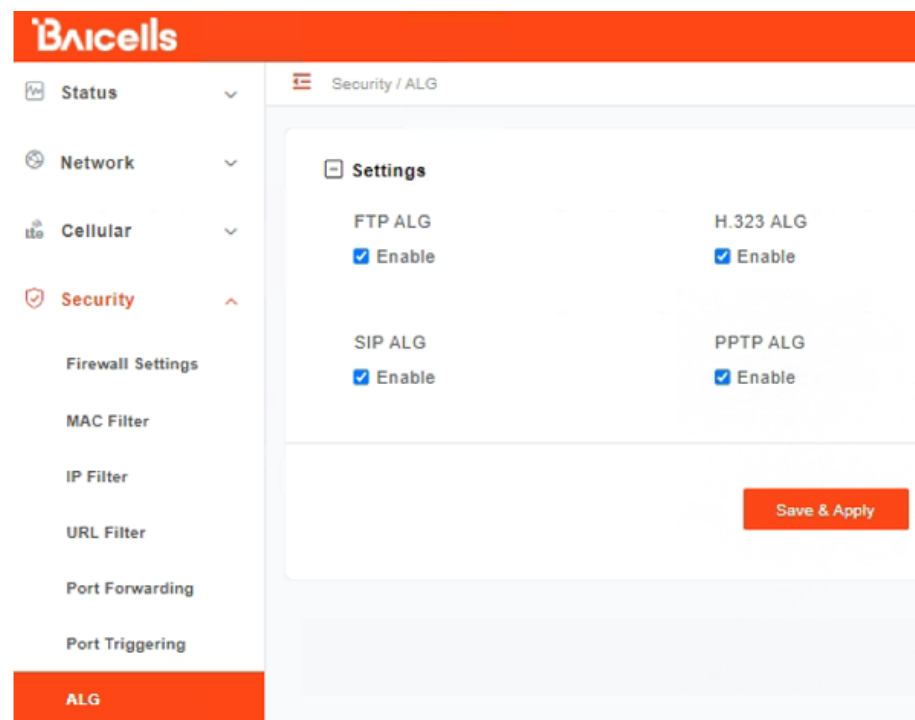


2.4.8 UPnP

The *Universal Plug & Play* (UPnP) function provides a set of networking protocols that allows device-to-device networking on a local network. When UPnP is enabled, devices seamlessly and dynamically discover each other's presence on the network and attach to one another and to network services. Often, UPnP is used for streaming media between devices on the network.

Go to Security > UPnP to enable the CPE to be searched by other devices (Figure 2-25). Once enabled, any redirects of traffic will display in the *Active UPnP Redirects* section of the window.

Figure 2-25 UPnP

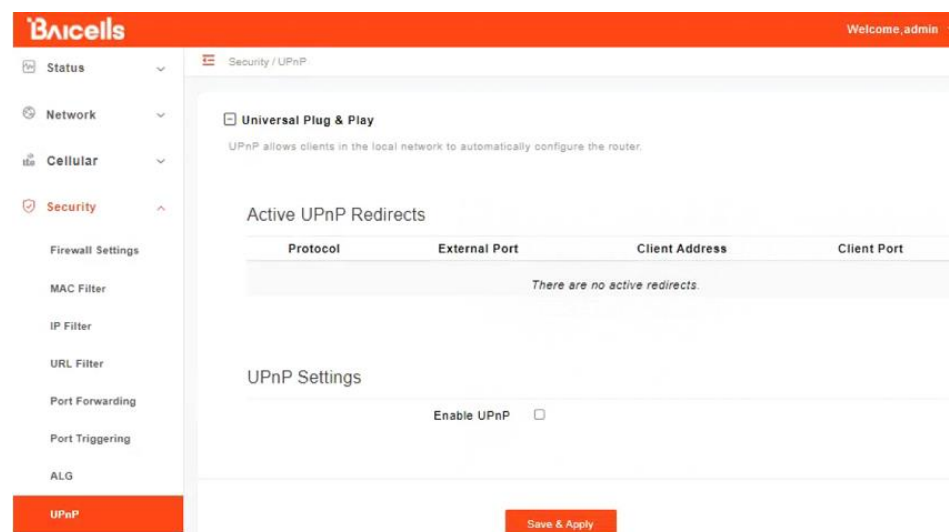


2.4.9 Attack Protection

The *Attack Protection* settings provide an additional security measure that helps prevent computer hacker attacks such as TCP SYN FLOOD, UDP FLOOD, and ICMP FLOOD for devices connected to the network through the CPE.

In the Security > Attack Protection window (Figure 2-26), select the check box next to the flood protection options you want to enable. When you click the check box, the field on the right becomes editable. Accept the default timer value, in seconds, or enter a value for each type of attack protection.

Figure 2-26 Attack Protection

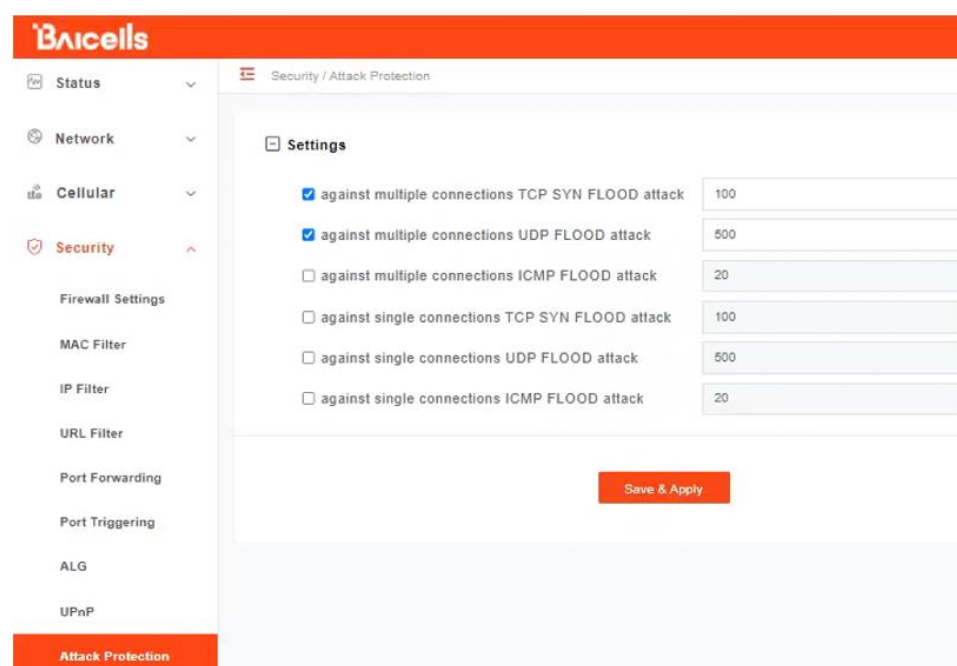

2.5 VPN Menu

The Virtual Private Network (VPN) menu (Figure 2-27) enables you to configure a connection between the CPE and a VPN, e.g., to access a corporate network when telecommuting for work. You can enable a Layer 2 Tunneling Protocol (L2TP) gateway or a Layer 2 network connection to the VPN.

Figure 2-27 VPN Menu



2.5.1 IPSec

The IP security (IPSec) network protocol suite is used between 2 communication points across the IP network. The protocols provide data authentication, integrity, and confidentiality protection services. They are needed for secure key exchange and key management between the two network entities.

The top of the IPSec window is where you can add one or more security policies (Figure 2-28). The status of each policy you create will display in the lower half of the window.

Figure 2-28 IPSec



To configure an IPSec policy for this CPE, select the *ADD POLICY* button (Figure 2-29). Enter the policy name, remote gateway, local and remote subnets, and pre-shared key for the VPN connection. The *Advance Settings* offer additional parameters such as key exchange version, IKE encryption method, etc. Refer to Table 2-4.

Figure 2-29 IPSec

IP Sec Policy List

Add Policy

Settings

Enable

☐ Enable

Policy Name

1 to 32 characters

Remote Gateway

Ip address

Local Subnet

(Optional)Format: 192.168.1.0/24

Remote Subnet

(Optional)Format: 192.168.1.0/24

Pre-Shared Key

1 to 128 characters

Advance Settings

Key Exchange Version

ikev2

Negotiation Mode

Initiator mode

IKE Encryption

3des

IKE DH Group

modp2048

IKE Authentication

md5

ESP Encryption

3des

ESP DH Group

none

ESP Authentication

md5

Left Identifier

1 to 28 characters

Right Identifier

1 to 28 characters

KeyLife

86400

Seconds(120-604800)

IKELifeTime

86400

Seconds(120-604800)

RekeyMargin

300

Seconds(60-604800)

Dpdaction

restart

Dpddelay

30

Seconds(1-300)

Keyingtries

0

0 means forever

Save

Cancel

Table 2-4 IPSec

Field Name	Description
Enable	Click on the check box to enable IPSec
Policy Name	Enter a policy name using up to 32 characters
Remote Gateway	IP address of the remote gateway
Local Subnet	Optional: IP address of the local subnet
Remote Subnet	Optional: IP address of the remote subnet
Pre-Shared Key	Up to 128 characters
Key Exchange Version	Internet Key Exchange (IKE) encryption method version 2 or version 1. IKE is a protocol used to ensure security for virtual private network (VPN) negotiation and remote host or network access.
Negotiation Mode	Initiator mode or Responder mode
IKE Encryption	des, 3des, aes128, aes192, or aes256

IKE DH Group	modp768, modp1024, modp1536, modp2048, or modp4096
IKE Authentication	md5, sha1, sha256, sha384, or sha512
ESP Encryption	des, 3des, aes128, aes192, or aes256
ESP DH Group	none, modp768, modp1024, modp1536, modp2048, or modp4096
ESP Authentication	md5, sha1, sha256, sha384, or sha512
Left Identifier	1-28 characters
Right Identifier	1-28 characters
KeyLife	120-604800 seconds
IKELifeTime	120-604800 seconds
RekeyMargin	120-604800 seconds
Dpdaction	none, clear, hold, or restart
Dpddelay	1-300 seconds
Keyingtries	0 means forever

2.5.2 OpenVPN

OpenVPN is an open-source, Virtual Private Network (VPN) encryption protocol. As well as being extremely secure, OpenVPN is highly customizable and can be implemented in a number of different ways. For that reason, using this VPN method requires significant networking experience to implement. The range of options includes remote access, site-to-site VPNs, Wi-Fi security, and enterprise-scale remote access solutions. The remote access solutions support robust capabilities such as load balancing, failover, and more granular access controls, e.g., articles, examples, security overview, and non-English languages.

OpenVPN implements OSI Layer 2 or 3 secure network extension using the industry standard SSL/TLS protocol. It supports flexible client authentication methods based on certificates, smart cards, and/or two-factor authentication, and allows user or group-specific access control policies using firewall rules applied to the VPN interface. Setting up OpenVPN involves configuring server and client settings. Refer to Figure 2-30, Figure 2-31 (server), and Figure 2-32 (client) configuration fields.

Figure 2-30 OpenVPN

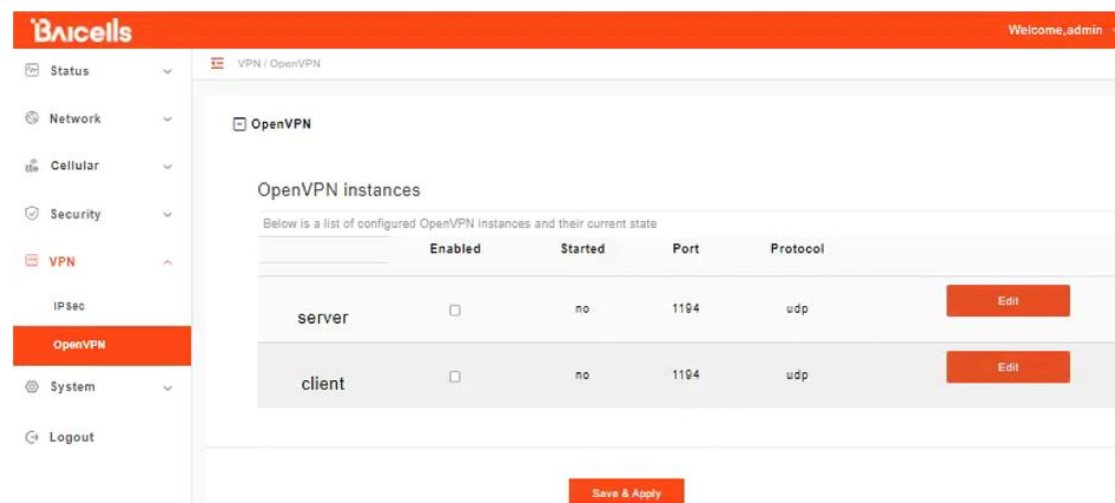


Figure 2-31 Server

Overview » Instance "server"


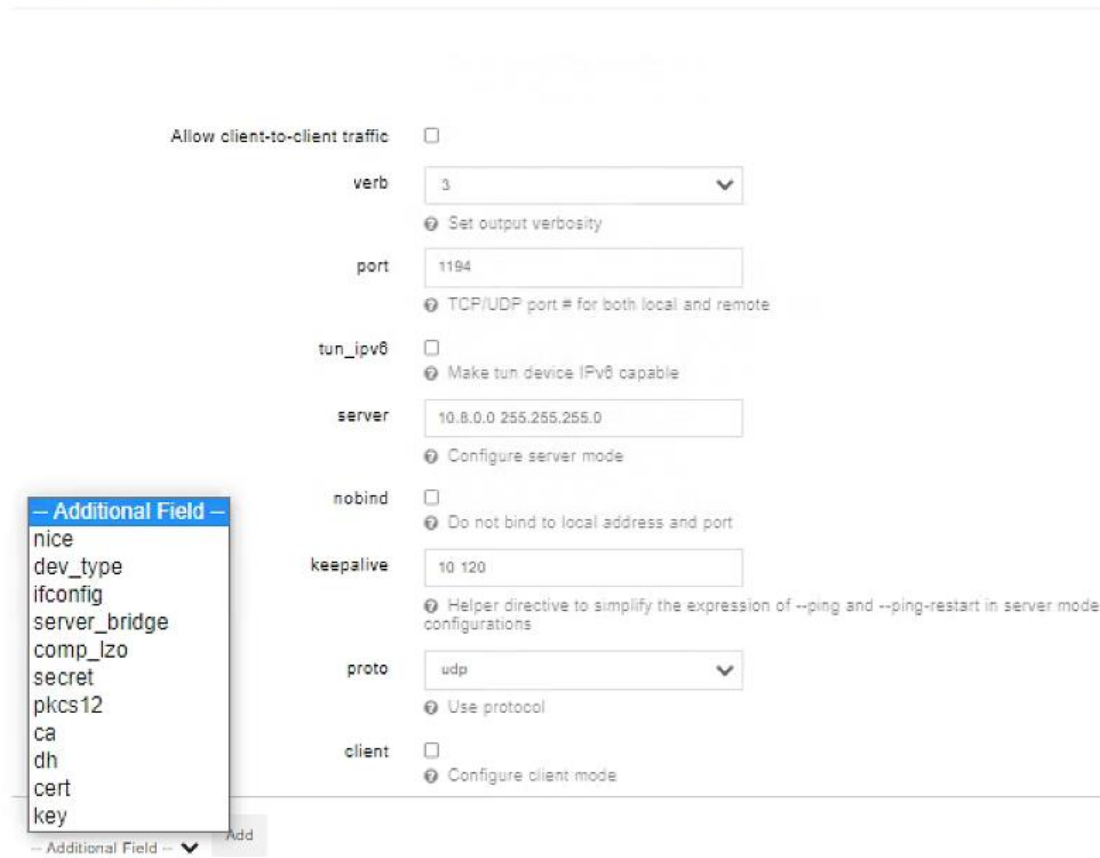


Figure 2-32 Client

Overview » Instance "client"

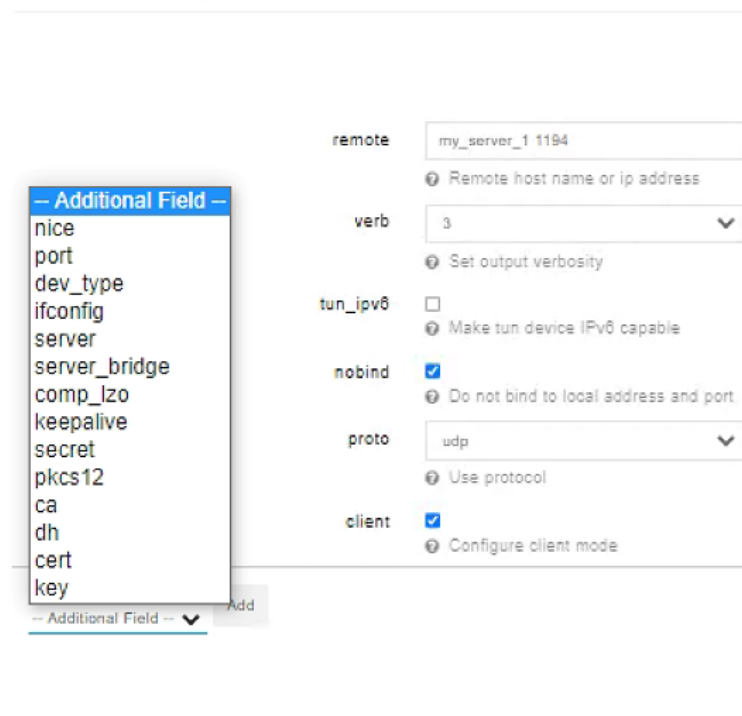

remote
 Remote host name or ip address

verb
 Set output verbosity

tun_ipv6 ☐
 Make tun device IPv6 capable

nobind ☒
 Do not bind to local address and port

proto
 Use protocol

client ☒
 Configure client mode

Additional Field --
 nice
 port
 dev_type
 ifconfig
 server
 server_bridge
 comp_lzo
 keepalive
 secret
 pkcs12
 ca
 dh
 cert
 key
 Add

Save & Apply

2.6 System Menu

2.6.1 NTP

The operator's network may use up to 4 Network Time Protocol (NTP) servers to provide correct time-of-day to network devices. In the CPE GUI you can refresh the local time display using the *SYNC WITH BROWSER* button; select the time zone that the CPE is in; and enable NTP client to use the default or specified NTP servers for synchronization (Figure 2-33).

Figure 2-33 NTP

Baicells

System / NTP

NTP

Time Zone Configuration

Local Time: Mon Aug 15 07:14:29 2022 [Sync with browser](#)

Timezone: UTC

Time Synchronization

Enable NTP client: ☒

NTP server candidates:

0.openwrt.pool.ntp.org	X
1.openwrt.pool.ntp.org	X
2.openwrt.pool.ntp.org	X
3.openwrt.pool.ntp.org	+

[Save & Apply](#)

2.6.2 Account

This menu is used to change the login password for the CPE (Figure 2-34). The password must be 5 to 12 characters. Baicells recommends using a combination of upper- and lower-case letters and numbers.

Figure 2-34 Account

2.6.3 Dynamic DNS

The dynamic DNS function is to map the user's dynamic IP address to a fixed domain name resolution service. Each time the user connects to the network, the client program will transmit the dynamic IP address of the host to the server program located on the host of the service provider through information transmission. The server program is responsible for providing DNS service and realizing dynamic domain name resolution.

Figure 2-35 Dynamic DNS Overview

Configuration	Lookup Hostname Registered IP	Enabled	Last Update Next Update	Process ID Start / Stop	
myddns_ipv4	yourhost.example.com No data	☐	Never Disabled	-----	Edit Delete
myddns_ipv6	yourhost.example.com No data	☐	Never Disabled	-----	Edit Delete

Figure 2-36 Dynamic DNS Global Settings

Global Settings

Configure here the details for all Dynamic DNS system including this LuCI application.
It is NOT recommended for casual users to change settings on this page.
[For detailed information about parameter settings look here.](#)

Allow non-public IP's	☐ Non-public and by default blocked IP's: IPv4: 0/8, 10/8, 100.64/10, 127/8, 169.254/16, 172.16/12, 192.168/16 IPv6: ::32, f000::/4
Date format	%F %R For supported codes look here Current setting: 2022-08-15 07:19
Status directory	/var/run/ddns Directory contains PID and other status information for each running section
Log directory	/var/log/ddns Directory contains Log files for each running section
Log length	250 Number of last lines stored in log files

[Back to Overview](#)

[Save & Apply](#)

Figure 2-37 IPv4 DDNS configuration

Details for: myddns_ipv4

[Configure here the details for selected Dynamic DNS service.](#)
[For detailed information about parameter settings look here.](#)

Basic Settings	Advanced Settings	Timer Settings	Log File Viewer
Enabled ☐ ⓘ If this service section is disabled it could not be started. Neither from LuCI interface nor from console			
Lookup Hostname yourhost.example.com ⓘ Hostname/FQDN to validate, if IP update happen or necessary			
IP address version ☒ IPv4-Address ☐ IPv6-Address ⓘ Defines which IP address 'IPv4/IPv6' is send to the DDNS provider			
DDNS Service provider [IPv4] -- custom --			
Custom update-URL ⓘ Update URL to be used for updating your DDNS Provider. Follow instructions you will find on their WEB page.			
Custom update-script ⓘ Custom update script to be used for updating your DDNS Provider.			
Hostname/Domain yourhost.example.com ⓘ Replaces [DOMAIN] in Update-URL			
Username your_username ⓘ Replaces [USERNAME] in Update-URL			
Password *****  ⓘ Replaces [PASSWORD] in Update-URL			
Use HTTP Secure ☐ ⓘ Enable secure communication with DDNS provider			

[Back to Overview](#)

[Save & Apply](#)

Figure 2-38 IPv6 DDNS configuration

Details for: myddns_ipv6

Configure here the details for selected Dynamic DNS service.
For detailed information about parameter settings look here.

Basic Settings	Advanced Settings	Timer Settings	Log File Viewer
Enabled ☐ ❓ If this service section is disabled it could not be started. Neither from LuCI interface nor from console			
Lookup Hostname yourhost.example.com ❓ Hostname/FQDN to validate, if IP update happen or necessary			
IP address version ☐ IPv4-Address ☒ IPv6-Address ❓ Defines which IP address 'IPv4/IPv6' is send to the DDNS provider			
DDNS Service provider [IPv6] -- custom --			
Custom update-URL http://[USERNAME]:[PASSWORD]@your. ❓ Update URL to be used for updating your DDNS Provider. Follow instructions you will find on their WEB page.			
Custom update-script ❓ Custom update script to be used for updating your DDNS Provider.			
Hostname/Domain yourhost.example.com ❓ Replaces [DOMAIN] in Update-URL			
Username your_username ❓ Replaces [USERNAME] in Update-URL			
Password  ❓ Replaces [PASSWORD] in Update-URL			
Use HTTP Secure ☐ ❓ Enable secure communication with DDNS provider			

2.6.4 WEB Setting

WEB Setting provides the ability to configure and manage the CPE remotely (Figure 2-39). This is especially helpful when a user calls in for technical assistance. In “1.4 Log In”, you used this Web application with the default URL of <http://192.168.150.1>. Refer to Table 2-5 for a description of each field.

Figure 2-39 WEB Setting

Table 2-5 WEB Setting

Field Name	Description
HTTP	Select the check box next to Enable to log in to an HTTP Web address
HTTPPort	Enter the HTTP port number to be used. Range is 80 to 65,535. Default is port 80. Note: Port cannot be set to 8080. Because 8080 is already occupied by the module port number.
HTTPS	Select the check box next to Enable to log in to an HTTPS Web address
Redirect HTTPS	Select the check box to allow HTTP addresses to be redirected to more secure HTTPS addresses
Allow HTTPS Login From WAN	Select the check box next to enable log in to an HTTPS Web address from the WAN
HTTPSPort	Enter the HTTPS port number to be used. Range is 80 to 65,535. Default is port 80. Note: Port cannot be set to 8081. Because 8081 is already occupied by the module port number.


2.6.5 FTP Auto Upgrade

The FTP Auto Upgrade feature is used for over-the-air (OTA) upgrades. The CPE will

detect a new version of firmware on the dedicated FTP server, if available, and will automatically upgrade to the new version.

If you are using a dedicated FTP server for this purpose, select the *Enable* check boxes next to *FTP Auto Upgrade* and *Check New FW after setup* (Figure 2-40). Enter the FTP server IP address and the *Path And File* text suffix. If login permissions are required to access the server, enter the username and password. To configure a set interval for the CPE to check the server for new firmware, select the check box next to *Use custom Interval* and enter the interval time, in hours. The range is 1-2400 hours.

Figure 2-40 FTP Auto Upgrade

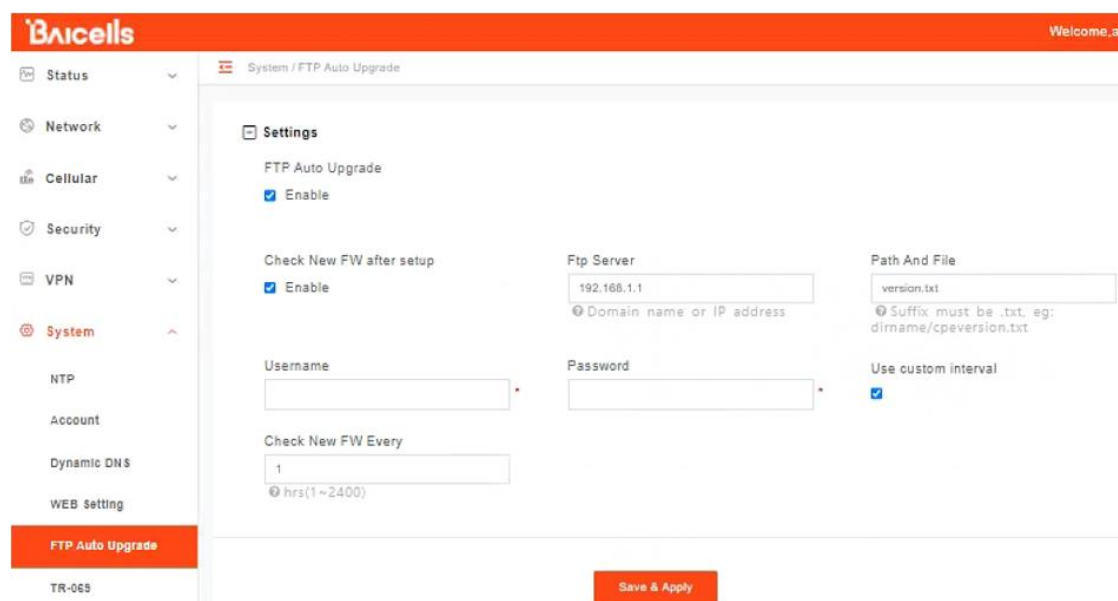

The screenshot shows the Baicells web interface for configuring FTP Auto Upgrade. The left sidebar contains a menu with options: Status, Network, Cellular, Security, VPN, System (selected), NTP, Account, Dynamic DNS, and WEB Setting. The main content area is titled 'System / FTP Auto Upgrade' and contains a 'Settings' section. The settings include:

- FTP Auto Upgrade:** A checkbox labeled 'Enable' which is checked.
- Check New FW after setup:** A checkbox labeled 'Enable' which is checked.
- Ftp Server:** A text input field containing '192.168.1.1' with a hint 'Domain name or IP address'.
- Path And File:** A text input field containing 'version.txt' with a hint 'Suffix must be .txt, eg: dirname/cpeversion.txt'.
- Username:** An empty text input field.
- Password:** An empty text input field.
- Use custom interval:** A checkbox labeled 'Use custom interval' which is checked.
- Check New FW Every:** A text input field containing '1' with a hint 'hrs(1~2400)'.

At the bottom of the page, there is a 'Save & Apply' button. The footer of the page shows 'FTP Auto Upgrade' and 'TR-069'.

2.6.6 TR-069

If your network operates using a TR-069 auto-configuration server (ACS), the ACS will automatically provide the CPE configuration settings. Once you set up both the ACS and the CPE, you do not need to enter any other parameters through the CPE GUI. Use the *TR069* sub-menu to enable the TR-069 function for the CPE (Figure 2-41). Refer to Table 2-6 for a description of each field.

Figure 2-41 TR-069

The screenshot shows the Baicells System / TR-069 settings page. The left sidebar contains navigation links: Status, Network, Cellular, Security, VPN, System (selected), NTP, Account, Dynamic DNS, WEB Setting, FTP Auto Upgrade, TR-069 (highlighted), SNMP, Restore/Update, Ping Watchdog, SAS, SAS Certificates, System Messages, Diagnose, and Reboot. The main content area is titled 'System / TR-069' and contains the following settings:

- Settings**
 - TR069: ☒ Enable
 - ACS Type: (dropdown)
 - ACS Address: (with a help icon and text: "http://xxx")
 - User Name:
 - Password: (with a help icon and text: "characters A-Z,a-z,0-9,-,_, start with a letter,length 0-48")
 - CPE periodic reporting: ☒ Enable
 - Periodic: (with a help icon and text: "Seconds(20-86400)")
 - CloudKey: (with a help icon and text: "characters A-Z,a-z,0-9,-,_, start with a letter,length 0-48")
 - NickName: (with a help icon and text: "characters A-Z,a-z,0-9,-,_, start with a letter,length 0-48")
 - STUN: ☒ Enable
 - Stun Server:
 - Stun Server Port:
 - Keep-Alive Interval: (with a help icon and text: "Seconds(5-180)")

A red 'Save & Apply' button is located at the bottom right of the settings area.

Table 2-6 TR-069

Field Name	Description
TR069	Select the check box next to Enable if using a TR-069 auto-configuration server (ACS) to configure the CPE
ACS Type	Select URL or DHCP to identify the source of the ACS server. When you select URL, the next field (ACS Address) appears.
ACS Address	Enter the server Web address
User Name	Enter the user name to access the ACS server
Password	Enter the password to access the ACS server
CPE periodic reporting	Select the check box next to Enable to enable the CPE to periodically check with the ACS server for new software
Periodic	If you enabled CPE periodic reporting, input how often the CPE should check the ACS server for new information. The range is 20 to 86,400 seconds.
CloudKey	If using the Baicells CloudCore, enter the operator's unique CloudKey. When the device powers up the first time it will automatically be added to the operator's OMC account.
NickName	Optional – enter a nickname to identify the server


Field Name	Description
STUN	TR069 supports NAT penetration, and OMC can send TR069 request to CPE
Stun Server	Nat penetration server address
Stun Server Port	Nat penetration server port
Keep-Alive Interval	Interaction cycle between CPE and NAT server

2.6.7 SNMP

The Simple Network Management Protocol (SNMP) is used for connecting a device with a Network Management System (NMS) server. An operator's NMS can monitor and control the connected CPEs that have SNMP enabled. The NMS is able to collect event logs, alarm logs, and other data from those CPEs.

To enable SNMP, select the *Enable* check box (Figure 2-42). Complete the settings per the field descriptions in Table 2-7.

Figure 2-42 SNMP

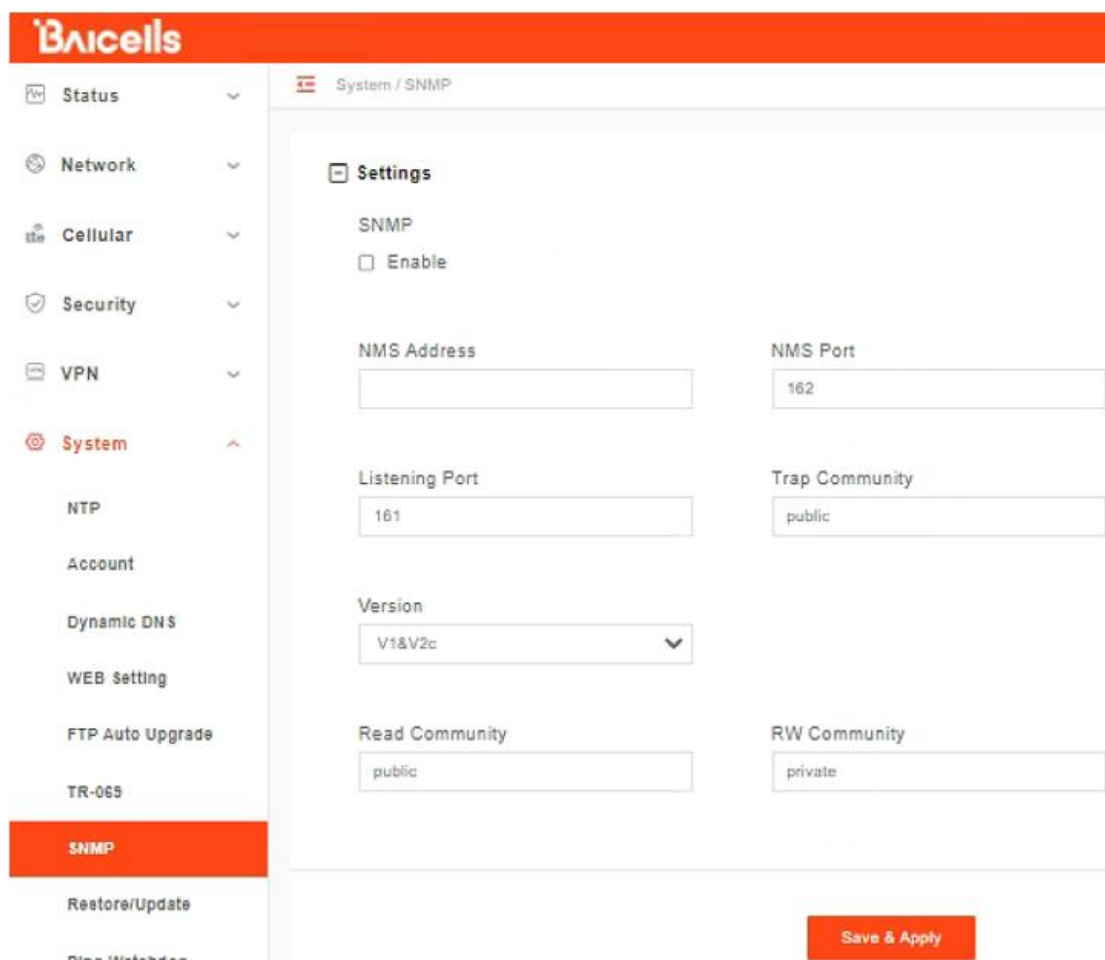

The screenshot shows the Baicells web interface for configuring SNMP. The left sidebar contains a menu with options: Status, Network, Cellular, Security, VPN, System (selected), NTP, Account, Dynamic DNS, WEB Setting, FTP Auto Upgrade, TR-069, and SNMP (highlighted in orange). Below the menu are links for 'Restore/Update' and 'Diagnostics'. The main content area is titled 'System / SNMP' and contains a 'Settings' section. In the 'Settings' section, the 'SNMP' checkbox is checked. Below this, there are four input fields: 'NMS Address' (empty), 'NMS Port' (162), 'Listening Port' (161), and 'Trap Community' (public). There is also a 'Version' dropdown menu set to 'V1&V2c'. At the bottom, there are two more input fields: 'Read Community' (public) and 'RW Community' (private). A 'Save & Apply' button is located at the bottom right of the settings area.

Table 2-7 SNMP

Field Name	Description
SNMP	Enable the Simple Network Management Protocol by clicking the check box.
NMS Address	NMS server IP address
NMS Port	NMS server port number
Listening Port	CPE port number
Trap Community	Public or private - identifier to distinguish read/write permissions for data
Version	Select the SNMP version you are implementing - V1&V2c (for SNMPv1+SNMPv2c) or V3 (for SNMPv3)
Read Community	Public or private read-only community name
RW Community	Public or private read/write community name


2.6.8 Restore/Update

Use the System > Restore/Update menu to reset the CPE to its factory default settings, to manually update the firmware, or to manually update a module within the firmware - meaning to apply a patch to the current firmware (Figure 2-43).



Caution: Performing a restore or update action will disrupt service.

Figure 2-43 Restore/Update

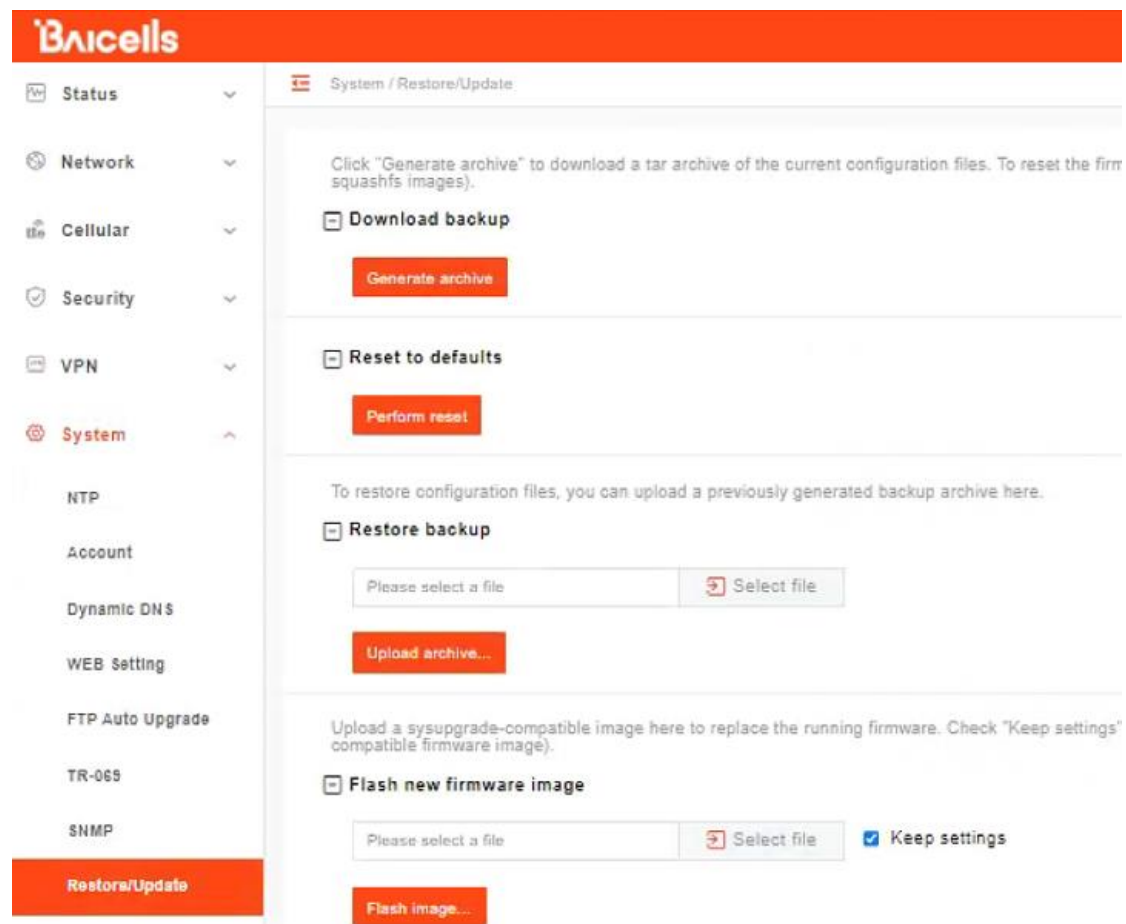

2.6.8.1 Restore

To initiate a restore action, click on the **PERFORM RESET** button. The CPE will automatically reset its configuration to the factory default values.

To back up current settings, click the **GENERATE ARCHIVE** button.

To restore configuration files, select backed up file on your computer, and then click the **UPLOAD ARCHIVE** button.

2.6.8.2 Update Firmware



Caution: Do not power off the CPE or disconnect it from the computer during an upgrade.

To update (upgrade) the CPE to a different firmware version (Figure 2-43):

1. Download the image file from the Baicells support website (Baicells > Support > Downloads), and save it to your computer.

2. Under *Flash new firmware image*, determine if you want to keep the current configuration settings on the CPE. If you do, select the check box next to **Keep settings**.
3. Click on **Choose File** to navigate to the new image file on your computer, and then click on **FLASH IMAGE** to initiate the upgrade.

After the upgrade, the CPE will restart automatically running the newer version of code.


2.6.9 Ping Watchdog

Ping Watchdog is a feature used for detecting the Internet connection state of the CPE. If the CPE cannot connect to the Internet, if this feature is enabled it will reset the LTE module in the CPE firmware or reboot the CPE in an attempt to recover the connection.

To enable the watchdog function (Figure 2-44):

1. Select the check box next to Enable and enter an IP address accessible by Internet for the CPE to try to ping.
2. Set the period of time, in seconds, for the ping to timeout. The range is 1-65535 seconds.
3. Enter the number of times to try to ping the address, in the range of 1-65535 times.
4. Enter the maximum number of times the CPE can try the ping but fail before the CPE initiates a reboot. The range is 1-65535 times.

Figure 2-44 Ping Watchdog

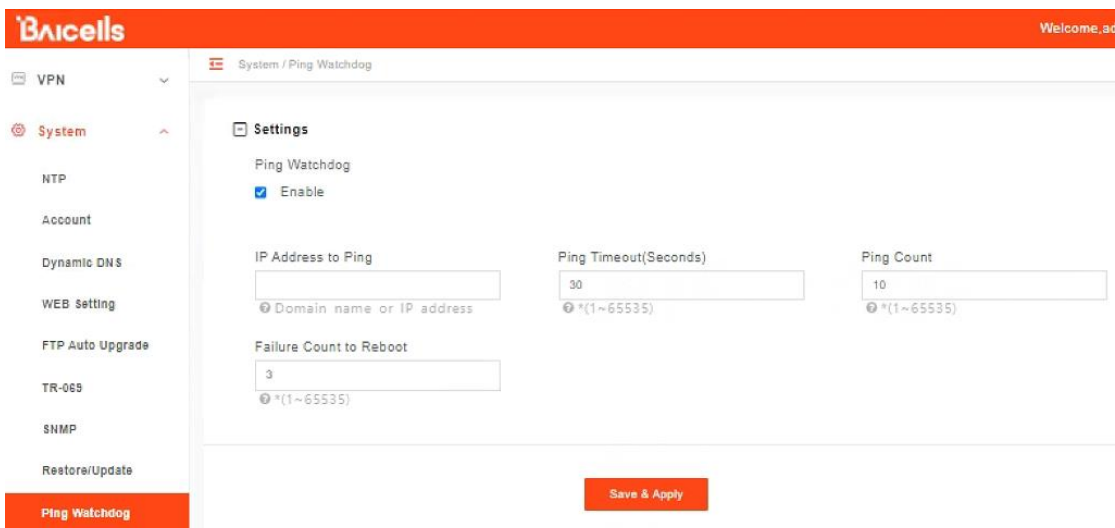

2.6.10 SAS

CPE realizes equipment registration, authentication and spectrum access license acquisition through SAS.

SAS menu provides SAS info and SAS settings, as shown in Figure 2-45.

Figure 2-45 SAS Menu

Table 2-8 SAS Info field description

Field Name	Description
SN	Serial number of the product
FCC ID	FCCID of the product
Category	Product category (A or B)
Radio Technology	Antenna technology
Antenna Height Type	Antenna type
Group Type	SAS CPE Device Group Category
Antenna Gain	Antenna gain
Cell High Frequency	The highest frequency of the current LTE access band
Cell Low Frequency	The lowest frequency of the current LTE access band
Bandwidth	LTE current bandwidth
Granted EIRP(10MHz)	SAS server authorized power
SAS Status	SAS current status
Radio Status	Current RF status of LTE

2.6.10.1 SAS Settings

1. Select the enabling mode of SAS function.


- Automatic (B48) select On, automatically turn on SAS (when the device is connected to band48, SAS will be turned on automatically; when the device is connected to non band48, SAS will be turned off automatically).

Figure 2-46 Automatic SAS



- Automatic (B48) select Off, turn on SAS manually (If enable is selected for SAS, it means the SAS function is turned on; if not selected, it means the SAS function is turned off).

Figure 2-47 SAS Settings

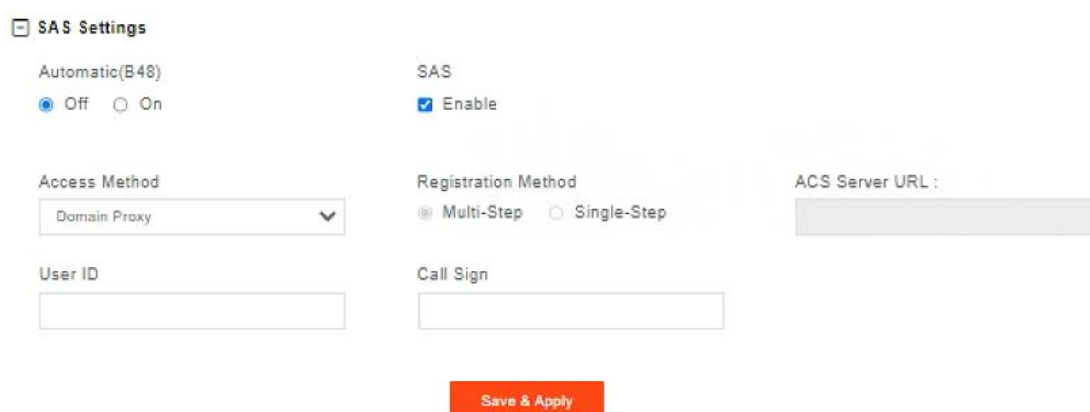

2. Select SAS access mode.

- Select Domain Proxy: SAS proxy. Implement SAS access through OMC.
- Select Direct SAS: SAS direct connection. CPE is directly connected to SAS server.

3. In Direct SAS mode, you need to select SAS registration mode.

- Select Multi-Step: multi step registration. This registration mode is used when the installation information of the device already exists on the SAS server.
- Select Single-Step: single step registration. This registration mode is used when there is no installation information of the device on the SAS server.


4. Configure SAS parameters.

Table 2-9 SAS Settings

Field Name	Description
ACS Server URL	Web address of the auto-configuration server (ACS). When the access method is Domain Proxy , the default DP server is the ACS URL configured on the TR069 page and cannot be edited manually.
SAS Server URL	The address of the SAS server in direct mode. When the access method is Direct SAS , you can manually change the URL.
User ID	Enter the user name to access the ACS server
Call Sign	Device identifier

5. When Single-Step registration mode is selected, antenna parameters need to be configured.

Figure 2-48 Antenna Parameters

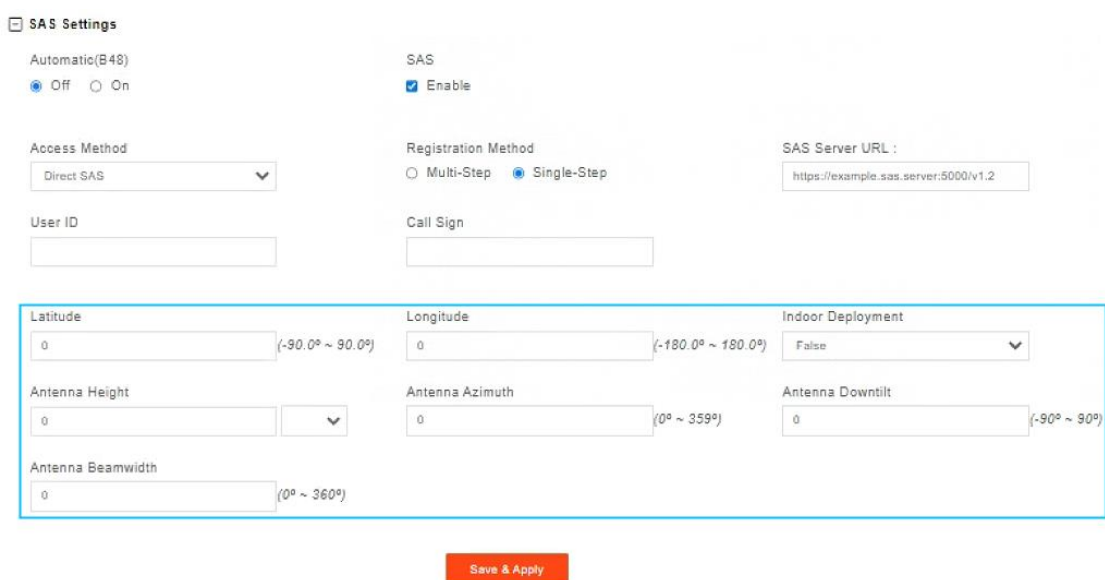

SAS Settings

Automatic(B48)
☒ Off ☐ On

SAS
☒ Enable

Access Method
 Direct SAS

Registration Method
☐ Multi-Step ☒ Single-Step

SAS Server URL :
 https://example.sas.server:5000/v1.2

User ID

Call Sign

Latitude
 (-90.0° ~ 90.0°)

Longitude
 (-180.0° ~ 180.0°)

Indoor Deployment
 False

Antenna Height

Antenna Azimuth
 (0° ~ 359°)

Antenna Downtilt
 (-90° ~ 90°)

Antenna Beamwidth
 (0° ~ 360°)

Save & Apply

Table 2-10 Antenna Parameters


Field Name	Description
Latitude	Latitude of the CPE antenna location in degrees
Longitude	Longitude of the CPE antenna location in degrees
Indoor Deployment	Whether the CPE antenna is indoor or not
Antenna Height	The CPE antenna height
Antenna Azimuth	Boresight direction of the horizontal plane of the antenna in degrees with respect to true north.

Field Name	Description
Antenna Downtitle	Antenna down tilt in degrees and is an integer
Antenna Beamwidth	The CPE antenna beamwidth

2.6.10.2 CPI Settings

When Single-Step is selected for the registration method in SAS settings, the CPI settings area appears, as shown in Figure 2-49.

Figure 2-49 CPI Settings

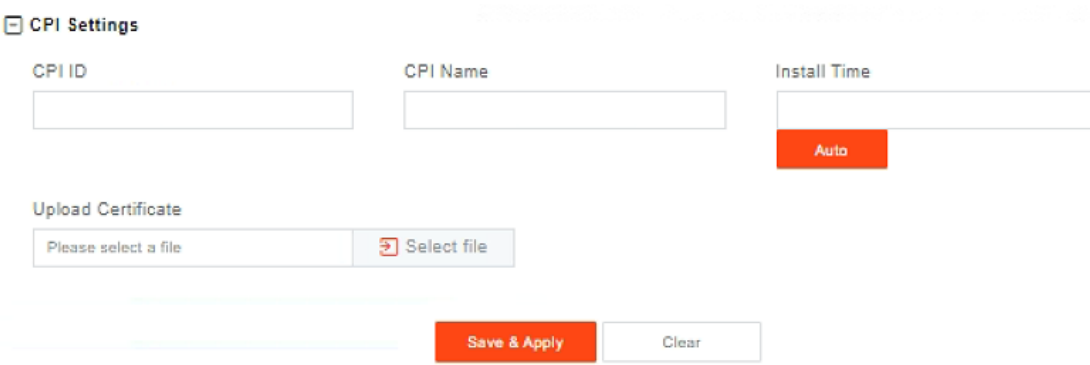

CPI (Certified Professional Installer) Settings is used to verify the information of the installer.

1. Enter CPI ID or CPI name.
2. Enter the Install Time or click the **Auto** button.
3. Click **Choose file** to select CPI certificate file from this computer.
4. Click **SAVE & APPLY** to make the configuration effective.


2.6.11 SAS Certificates

Upload the certificate required for CPE to connect with SAS server.

Three types of certificates can be uploaded: SAS Client Cert, SAS Client Key and SAS Server CA.

After the certificate is uploaded successfully, the certificate file name can be displayed in the Certificate List. If you need to replace the certificate, you can click the **Remove** button on the right side of the certificate to delete the certificate, and then upload the new certificate again.


Figure 2-50 SAS Certificates

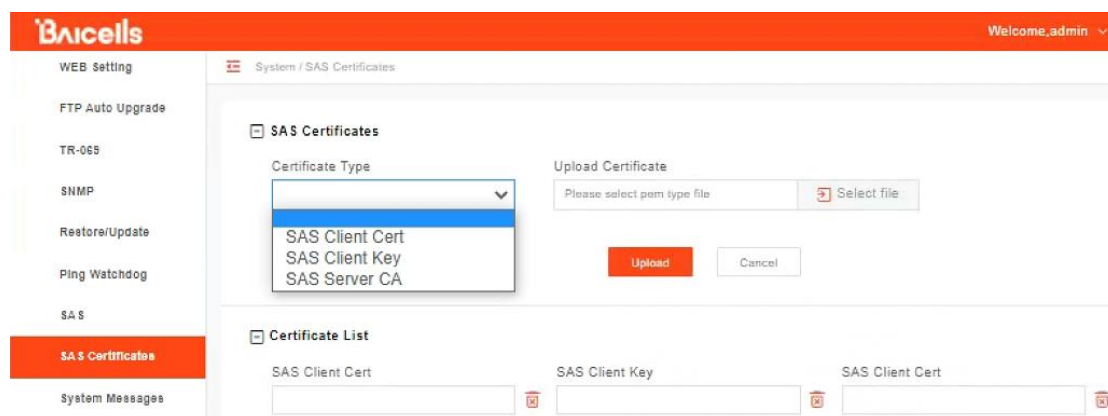

2.6.12 System Messages

Use this Web-GUI, you can Export System Message, collect real-time system information and transfer system message to PC.

Figure 2-51 System Messages

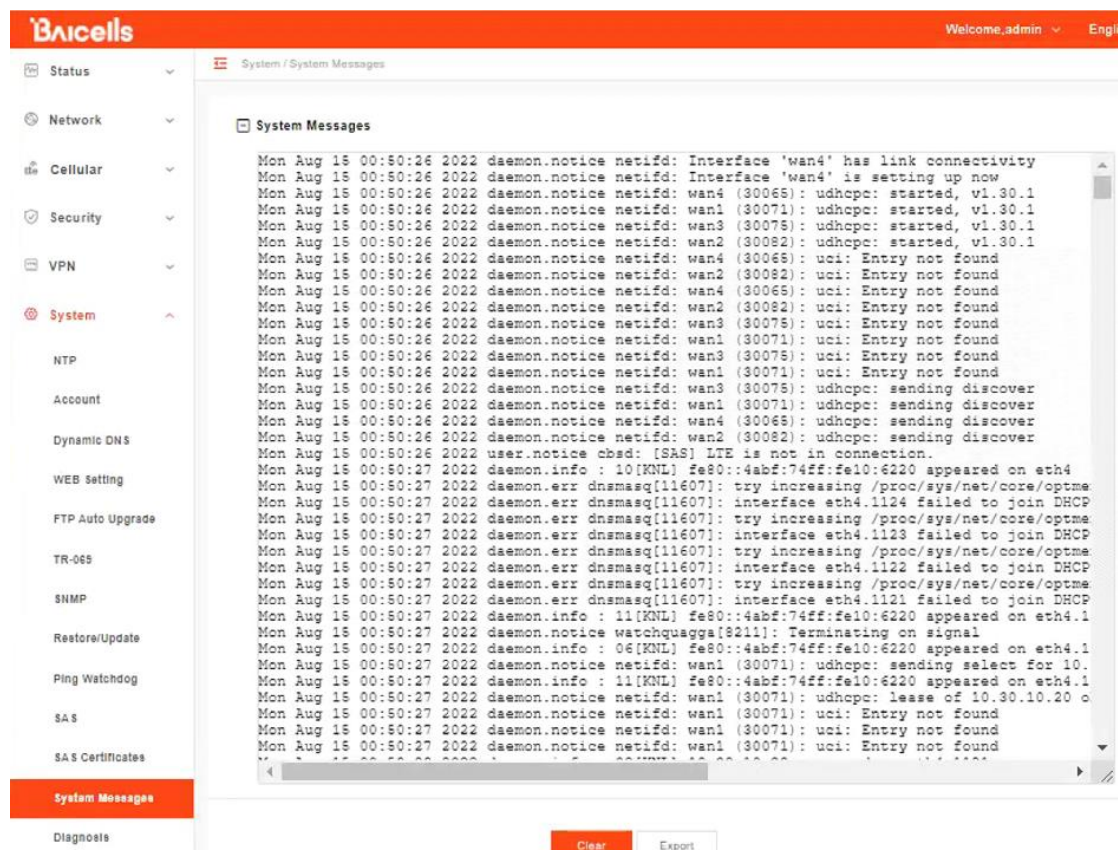


2.6.13 Diagnosis

The System > Diagnosis menu provides 3 types of diagnostic tests that may be used for

troubleshooting connection issues: Ping and Traceroute (Figure 2-52).

Figure 2-52 Diagnosis

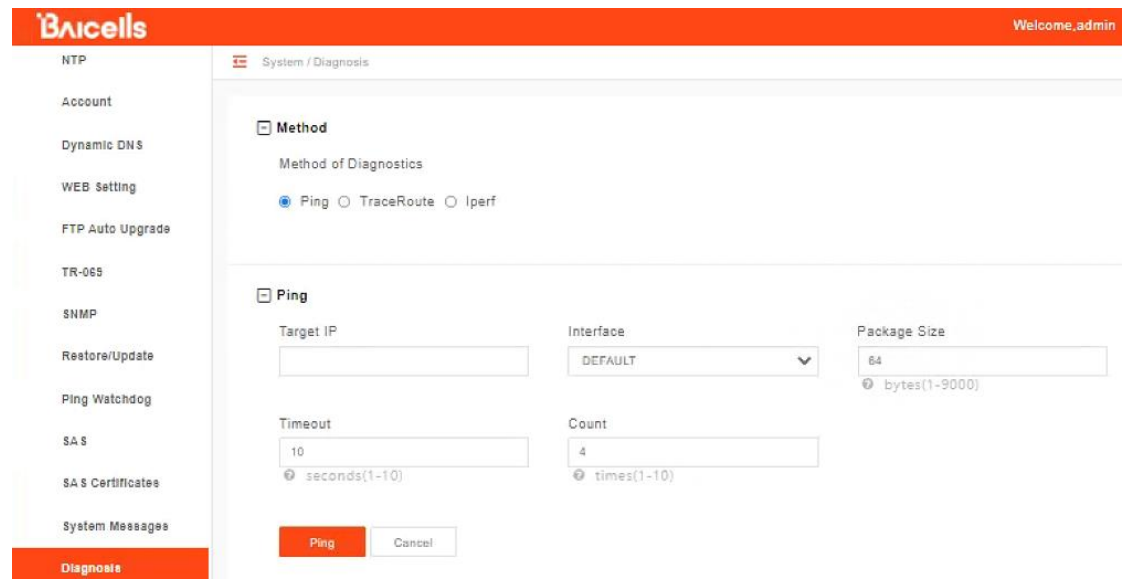

The screenshot shows the BaiCells web interface for system diagnosis. The left sidebar contains a menu with the following items: NTP, Account, Dynamic DNS, WEB Setting, FTP Auto Upgrade, TR-069, SNMP, Restore/Update, Ping Watchdog, SA S, SA S Certificates, System Messages, and a highlighted **Diagnosis** item. The main content area is titled "System / Diagnosis" and contains two sections: "Method" and "Ping".

Method Section:

- Method of Diagnostics: ☒ Ping ☐ TraceRoute ☐ Iperf

Ping Section:


- Target IP:
- Interface:
- Package Size: (bytes(1-9000))
- Timeout: (seconds(1-10))
- Count: (times(1-10))

At the bottom of the Ping section are two buttons: **Ping** (in red) and **Cancel** (in grey).

2.6.13.1 Ping

Ping is used to manually initiate a ping test to check connection status. Running a ping test will send data packets of a specified size from the CPE over the network to a target IP address. The results of ping determine if there is a connection and if there is any packet loss.

Figure 2-53 Ping Diagnosis Settings

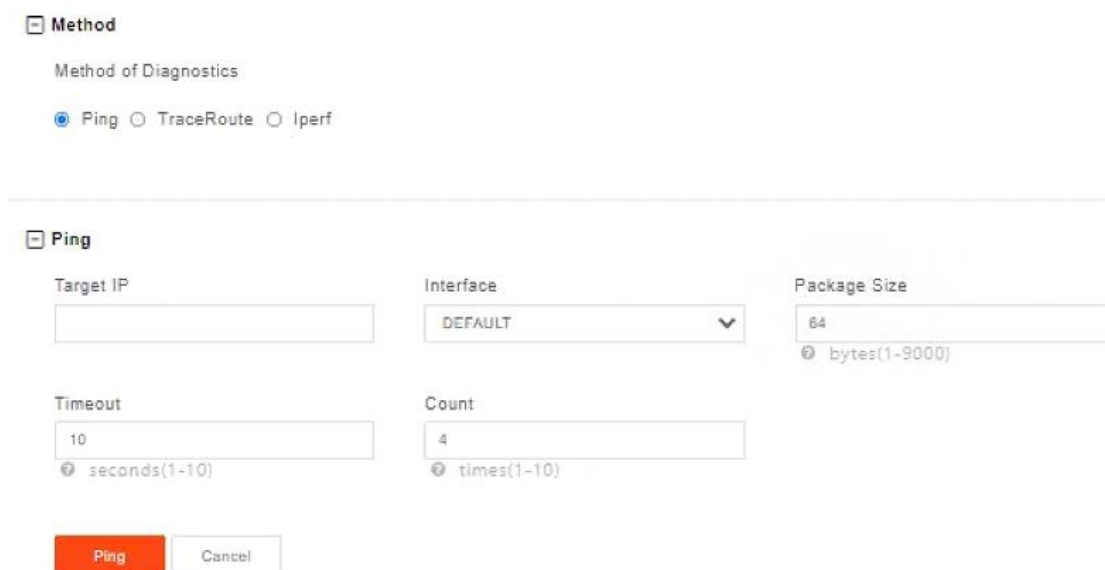

☒ Method

Method of Diagnostics

☒ Ping ☐ TraceRoute ☐ Iperf

☒ Ping

Target IP:

Interface:

Package Size: bytes(1-9000)

Timeout: seconds(1-10)

Count: times(1-10)

Table 2-11 Ping Diagnosis parameters

Field Name	Description
Target IP	A target IP address for the CPE to ping
Interface	The interface the CPE should use, either DEFAULT (APN1) or APN 2, 3, or 4.
Package Size	The data packet size to be sent to the target IP address, in bytes. The range is 1-9000 bytes.
Timeout	A timeout period, in seconds. The range is 1-10 seconds.
Count	The number of times (Count) for the ping test to execute. The range is 1-10.

2.6.13.2 Trace Route

Running a traceroute test will display the route a packet takes from the CPE to a target IP address. The test provides an indication of where there may be delays in the transmission of packets across the IP network.

Figure 2-54 Trace Diagnosis Settings

Method

Method of Diagnostics

☐ Ping
 ☒ TraceRoute
 ☐ Iperf

TraceRoute

type

ICMP

▼

Target IP

Maximum Hops

10

ⓘ (1-30)

Timeout

3

ⓘ seconds(1-60)

TraceRoute

Cancel

Table 2-12 Trace Diagnosis parameters

Field Name	Description
Type	The protocol type is ICMP or UDP.
Target IP	A target IP address for the CPE to send packets to.
Maximum Hops	The maximum number of hops between network nodes you want the packets to take. If the traceroute hits that number, the test will end.
Timeout	A timeout period, in seconds. The range is 1-60 seconds.

Results of the traceroute will appear at the bottom of the window, showing the target IP address, the maximum number of hops that it took from CPE to the destination, the packet size, and the time between hops.

2.6.13.3 Iperf

Iperf diagnostic debugging is used to test throughput.

Figure 2-55 Iperf Diagnosis Settings

☒ **Method**

Method of Diagnostics

☐ Ping
 ☐ TraceRoute
 ☒ Iperf

☒ **Iperf**

Customize CMD

☐

Version

Protocol

Target IP

Port

Time

ⓘ time in seconds to transmit for(1-999999)

Data length

Bandwidth

ⓘ bandwidth to send at in kbits/sec

Command

Table 2-13 Iperf Diagnosis parameters


Field Name	Description
Version	The version of iperf supports iperf2 and iperf3.
Protocol	TCP or UDP
Target IP	Specifies the destination IP for iperf diagnostics
Port	Specifies the port number for iperf diagnostics
Time	Iperf diagnostic time
Data length	Specify the data length of UDP protocol
Bandwidth	Specify the bandwidth of UDP protocol

2.6.14 Reboot

Use the Reboot menu to perform a reboot of the CPE, as shown in Figure 2-56. It can take several minutes for the reboot to complete. After it reboots, the CPE GUI will display the login screen.

Caution: The reboot action will disrupt service.


Figure 2-56 Reboot

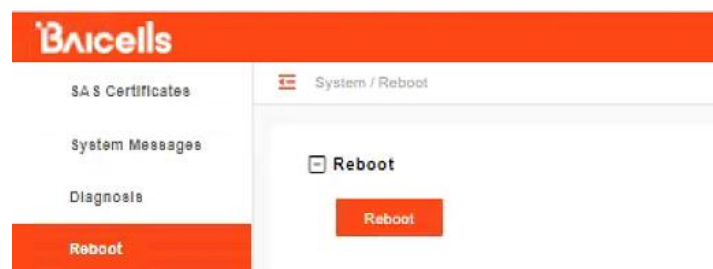

2.7 Logout

When you click on the Logout menu, you are automatically logged out of the CPE and returned to the login screen (Figure 2-57).

Figure 2-57 Logout

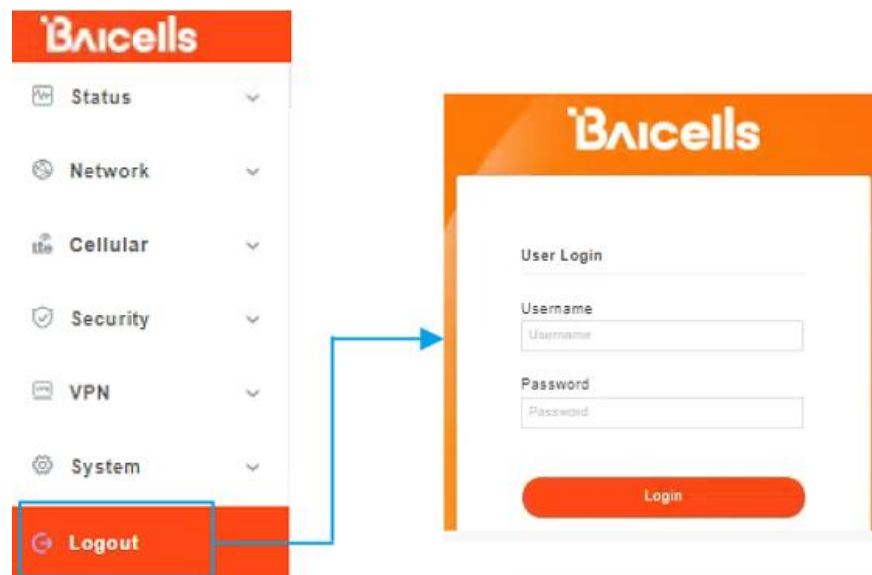

Appendix: Regulatory Compliance

FCC Compliance

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 30cm between the radiator & your body.