

TEST REPORT

Applicant	SYMA MODEL AIRCRAFT INDUSTRIAL CO.,LTD
Address	NO.2 West Xingye Road Laimei Industrial Area Chenghai Shantou Guangdong China

Manufacturer or Supplier	SYMA MODEL AIRCRAFT INDUSTRIAL CO.,LTD
Address	NO.2 West Xingye Road Laimei Industrial Area Chenghai Shantou Guangdong China
Product	wifi-camera-1
Brand Name	N/A
Model	001
Additional Model & Model Difference	N/A
Date of tests	Feb. 24, 2016 ~ Mar. 10, 2016

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Blue Zheng Project Engineer / EMC Department	Approved by Chris Chen Assistant Manager / EMC Department
	
	Date: Mar. 10, 2016

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT.....	6
3.2 DESCRIPTION OF TEST MODES.....	7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	11
3.4 DESCRIPTION OF SUPPORT UNITS.....	11
4 TEST TYPES AND RESULTS.....	12
4.1 RADIATED EMISSION MEASUREMENT	12
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	12
4.1.2 TEST INSTRUMENTS.....	13
4.1.3 TEST PROCEDURES	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	15
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 6DB BANDWIDTH MEASUREMENT.....	30
4.2.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	30
4.2.2 TEST INSTRUMENTS.....	30
4.2.3 TEST PROCEDURE.....	30
4.2.4 DEVIATION FROM TEST STANDARD	31
4.2.5 TEST SETUP	31
4.2.6 EUT OPERATING CONDITIONS	31
4.2.7 TEST RESULTS	32
4.3 CONDUCTED OUTPUT POWER	36
4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	36
4.3.2 TEST SETUP.....	36
4.3.3 TEST INSTRUMENTS.....	36
4.3.4 TEST PROCEDURES	37
4.3.5 DEVIATION FROM TEST STANDARD	37
4.3.6 EUT OPERATING CONDITIONS	37
4.3.7 TEST RESULTS	38



4.3.7.1	MAXIMUM PEAK OUTPUT POWER	38
4.3.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	39
4.4	POWER SPECTRAL DENSITY MEASUREMENT	40
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	40
4.4.2	TEST SETUP	40
4.4.3	TEST INSTRUMENTS.....	40
4.4.4	TEST PROCEDURE.....	40
4.4.5	DEVIATION FROM TEST STANDARD	40
4.4.6	EUT OPERATING CONDITION	41
4.4.7	TEST RESULTS	41
4.5	OUT OF BAND EMISSION MEASUREMENT	45
4.5.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	45
4.5.2	TEST SETUP	45
4.5.3	TEST INSTRUMENTS.....	45
4.5.4	TEST PROCEDURE.....	45
4.5.5	DEVIATION FROM TEST STANDARD	46
4.5.6	EUT OPERATING CONDITION	46
4.5.7	TEST RESULTS	47
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	53
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	54



Test Report No.: RF151124N057

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF151124N057	Original release	Mar. 10, 2016

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	DC Powered by Host Unit
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6Db bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247€	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Unique antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.90Db
	30MHz ~ 1GMHz	3.67Db
	1GHz ~ 18GHz	4.84Db
	18GHz ~ 40GHz	4.84Db

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	wifi-camera-1
MODEL NO.	001
ADDITIONAL MODEL	N/A
FCC ID	2AG3M-ABCDEFGABCDEA
NOMINAL VOLTAGE	DC 3.5V from Host Unit
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n (HT40)
PEAK POWER	WLAN: 26.11dBm (Maximum peak Power)
ANTENNA TYPE	Wire Antenna, 0dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (20MHz)	1TX/1RX
802.11n (40MHz)	1TX/1RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Please refer to the EUT photo document (Reference No.: 151124N057) for detailed product photo.

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	DC 3.5V with WiFi link

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by Host Unit(DC source during testing).

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11b	1 to 11	1	OFDM	BPSK	6.0	X

RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0	X
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	X
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5	X
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5	X

BANDEDGE MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	25deg. C, 55%RH	DC 3.5V	Sen He
RE≥1G	25deg. C, 55%RH	DC 3.5V	Sen He
PLC	N/A	N/A	N/A
APCM	20deg. C, 55%RH	DC 3.5V	Blue Zheng

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

558074 D01 DTS Meas Guidance v03r04

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B(VoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	N/A	A1350	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 27,15	Apr. 26,16
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Apr. 23,15	Apr. 22,16
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 16, 15	Jul. 15, 16
Horn Antenna	ETS-Lindgren	3117	00062558	May 30,14	May 29,16
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 14	Aug. 07, 16
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Apr. 19,14	Apr. 18,16
Test Software	ADT	ADT_Radiated_v7.6.15.9.2	N/A	N/A	N/A
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Jan. 21,14	Jan. 20,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Apr. 25,15	Apr. 24,16
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,15	Apr. 24,16
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,16

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 494399.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

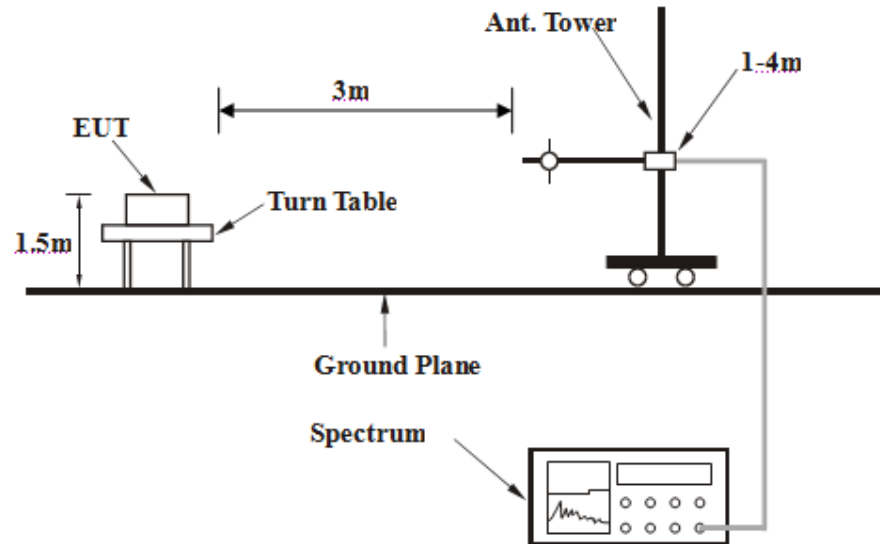

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


802.11b

CHANNEL	Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.05	33.70	40.00	-6.30	100	0	49.30	-15.60
2	157.01	13.70	43.50	-29.80	100	0	32.40	-18.70
3	188.96	14.50	43.50	-29.00	100	0	34.80	-20.30
4	359.97	19.00	46.00	-27.00	100	0	31.60	-12.60
5	545.54	24.10	46.00	-21.90	100	0	29.90	-5.80
6	670.93	26.60	46.00	-19.40	100	0	31.00	-4.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

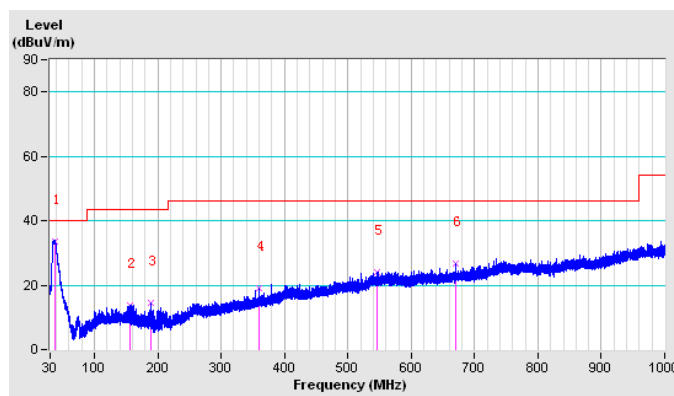


CHANNEL	Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.63	33.10	40.00	-6.90	100	0	48.50	-15.40
2	109.22	10.90	43.50	-32.60	100	0	29.90	-19.00
3	269.40	13.60	46.00	-32.40	100	0	28.90	-15.30
4	359.97	18.20	46.00	-27.80	100	0	30.80	-12.60
5	558.47	23.00	46.00	-23.00	100	0	28.50	-5.50
6	777.25	26.50	46.00	-19.50	100	0	28.50	-2.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

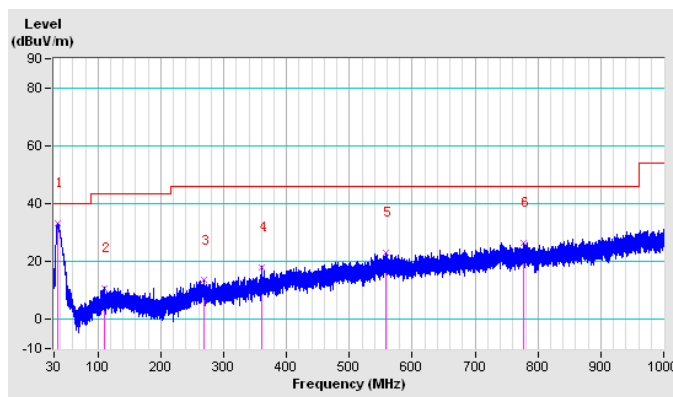

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.8 PK	74.0	-26.2	1.89 H	219	44.10	3.70
2	2390.00	36.6 AV	54.0	-17.4	1.89 H	219	32.90	3.70
3	*2412.00	101.6 PK			1.89 H	219	97.90	3.70
4	*2412.00	98.7 AV			1.89 H	219	95.00	3.70
5	4824.00	56.9 PK	74.0	-17.1	1.06 H	51	48.50	8.40
6	4824.00	52.7 AV	54.0	-1.3	1.06 H	51	44.30	8.40
7	#7236.00	50.4 PK	81.6	-31.2	1.02 H	101	38.70	11.70
8	#7236.00	35.2 AV	78.7	-43.5	1.02 H	101	23.50	11.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.2 PK	74.0	-26.8	1.05 V	175	43.50	3.70
2	2390.00	33.4 AV	54.0	-20.6	1.05 V	175	29.70	3.70
3	*2412.00	96.9 PK			1.05 V	175	93.20	3.70
4	*2412.00	91.8 AV			1.05 V	175	88.10	3.70
5	4824.00	51.9 PK	74.0	-22.1	1.12 V	84	43.50	8.40
6	4824.00	44.5 AV	54.0	-9.5	1.12 V	84	36.10	8.40
7	#7236.00	50.9 PK	76.9	-26.0	1.01 V	182	39.20	11.70
8	#7236.00	35.9 AV	71.8	-35.9	1.01 V	182	24.20	11.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



**BUREAU
VERITAS**

Test Report No.: RF151124N057

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.6 PK			1.74 H	201	98.80	3.80
2	*2437.00	98.9 AV			1.74 H	201	95.10	3.80
3	4874.00	57.7 PK	74.0	-16.3	1.02 H	252	49.20	8.50
4	4874.00	53.4 AV	54.0	-0.6	1.02 H	252	44.90	8.50
5	7311.00	50.3 PK	74.0	-23.7	1.01 H	22	38.70	11.60
6	7311.00	36.1 AV	54.0	-17.9	1.01 H	22	24.50	11.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.2 PK			1.24 V	319	93.40	3.80
2	*2437.00	93.4 AV			1.24 V	319	89.60	3.80
3	4874.00	53.3 PK	74.0	-20.7	1.01 V	128	44.80	8.50
4	4874.00	46.9 AV	54.0	-7.1	1.01 V	128	38.40	8.50
5	7311.00	51.2 PK	74.0	-22.8	1.00 V	167	39.60	11.60
6	7311.00	36.4 AV	54.0	-17.6	1.00 V	167	24.80	11.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.6 PK			1.16 H	276	96.60	4.00
2	*2462.00	94.8 AV			1.16 H	276	90.80	4.00
3	2483.50	47.9 PK	74.0	-26.1	1.16 H	276	43.80	4.10
4	2483.50	34.5 AV	54.0	-19.5	1.16 H	276	30.40	4.10
5	4924.00	54.7 PK	74.0	-19.3	1.07 H	144	46.20	8.50
6	4924.00	49.1 AV	54.0	-4.9	1.07 H	144	40.60	8.50
7	7386.00	50.6 PK	74.0	-23.4	1.04 H	31	39.00	11.60
8	7386.00	35.2 AV	54.0	-18.8	1.04 H	31	23.60	11.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.6 PK			1.21 V	125	92.60	4.00
2	*2462.00	91.8 AV			1.21 V	125	87.80	4.00
3	2483.50	46.5 PK	74.0	-27.5	1.21 V	125	42.40	4.10
4	2483.50	37.2 AV	54.0	-16.8	1.21 V	125	33.10	4.10
5	4924.00	50.2 PK	74.0	-23.8	1.00 V	17	41.70	8.50
6	4924.00	41.6 AV	54.0	-12.4	1.00 V	17	33.10	8.50
7	7386.00	50.2 PK	74.0	-23.8	1.01 V	44	38.60	11.60
8	7386.00	35.8 AV	54.0	-18.2	1.01 V	44	24.20	11.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.5 PK	74.0	-0.5	1.74 H	268	69.80	3.70
2	2390.00	50.1 AV	54.0	-3.9	1.74 H	268	46.40	3.70
3	*2412.00	105.3 PK			1.74 H	268	101.60	3.70
4	*2412.00	95.8 AV			1.74 H	268	92.10	3.70
5	4824.00	56.9 PK	74.0	-17.1	1.05 H	56	48.50	8.40
6	4824.00	42.8 AV	54.0	-11.2	1.05 H	56	34.40	8.40
7	#7236.00	51.2 PK	85.3	-34.1	1.00 H	122	39.50	11.70
8	#7236.00	36.1 AV	75.8	-39.7	1.00 H	122	24.40	11.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.5 PK	74.0	-5.5	1.62 V	217	64.80	3.70
2	2390.00	47.9 AV	54.0	-6.1	1.62 V	217	44.20	3.70
3	*2412.00	99.6 PK			1.62 V	217	95.90	3.70
4	*2412.00	93.8 AV			1.62 V	217	90.10	3.70
5	4824.00	51.6 PK	74.0	-22.4	1.01 V	24	43.20	8.40
6	4824.00	41.8 AV	54.0	-12.2	1.01 V	24	33.40	8.40
7	#7236.00	50.1 PK	79.6	-29.5	1.00 V	147	38.40	11.70
8	#7236.00	35.8 AV	73.8	-38.0	1.00 V	147	24.10	11.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.2 PK			1.88 H	64	100.40	3.80
2	*2437.00	92.7 AV			1.88 H	64	88.90	3.80
3	4874.00	54.6 PK	74.0	-19.4	1.02 H	124	46.10	8.50
4	4874.00	39.6 AV	54.0	-14.4	1.02 H	124	31.10	8.50
5	7311.00	50.8 PK	74.0	-23.2	1.02 H	50	39.20	11.60
6	7311.00	36.5 AV	54.0	-17.5	1.02 H	50	24.90	11.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.3 PK			1.42 V	228	95.50	3.80
2	*2437.00	91.2 AV			1.42 V	228	87.40	3.80
3	4874.00	51.2 PK	74.0	-22.8	1.10 V	325	42.70	8.50
4	4874.00	40.9 AV	54.0	-13.1	1.10 V	325	32.40	8.50
5	7311.00	50.1 PK	74.0	-23.9	1.01 V	185	38.50	11.60
6	7311.00	35.4 AV	54.0	-18.6	1.01 V	185	23.80	11.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.1 PK			1.38 H	265	100.10	4.00
2	*2462.00	90.8 AV			1.38 H	265	86.80	4.00
3	2483.50	70.9 PK	74.0	-3.1	1.38 H	265	66.80	4.10
4	2483.50	46.5 AV	54.0	-7.5	1.38 H	265	42.40	4.10
5	4924.00	51.5 PK	74.0	-22.5	1.02 H	84	43.00	8.50
6	4924.00	35.8 AV	54.0	-18.2	1.02 H	84	27.30	8.50
7	7386.00	51.2 PK	74.0	-22.8	1.00 H	51	39.60	11.60
8	7386.00	36.6 AV	54.0	-17.4	1.00 H	51	25.00	11.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.9 PK			1.52 V	153	93.90	4.00
2	*2462.00	87.8 AV			1.52 V	153	83.80	4.00
3	2483.50	66.6 PK	74.0	-7.4	1.52 V	153	62.50	4.10
4	2483.50	42.2 AV	54.0	-11.8	1.52 V	153	38.10	4.10
5	4924.00	51.9 PK	74.0	-22.1	1.02 V	162	43.40	8.50
6	4924.00	35.2 AV	54.0	-18.8	1.02 V	162	26.70	8.50
7	7386.00	50.8 PK	74.0	-23.2	1.00 V	136	39.20	11.60
8	7386.00	35.1 AV	54.0	-18.9	1.00 V	136	23.50	11.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.02 H	68	62.70	3.70
2	2390.00	43.5 AV	54.0	-10.5	1.02 H	68	39.80	3.70
3	*2412.00	102.6 PK			1.02 H	68	98.90	3.70
4	*2412.00	87.6 AV			1.02 H	68	83.90	3.70
5	4824.00	54.6 PK	74.0	-19.4	1.00 H	163	46.20	8.40
6	4824.00	38.7 AV	54.0	-15.3	1.00 H	163	30.30	8.40
7	#7236.00	50.2 PK	82.6	-32.4	1.01 H	8	38.50	11.70
8	#7236.00	35.4 AV	67.6	-32.2	1.01 H	8	23.70	11.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.18 V	221	53.20	3.70
2	2390.00	37.7 AV	54.0	-16.3	1.18 V	221	34.00	3.70
3	*2412.00	97.5 PK			1.18 V	221	93.80	3.70
4	*2412.00	84.9 AV			1.18 V	221	81.20	3.70
5	4824.00	50.1 PK	74.0	-23.9	1.02 V	284	41.70	8.40
6	4824.00	34.9 AV	54.0	-19.1	1.02 V	284	26.50	8.40
7	#7236.00	50.7 PK	77.5	-26.8	1.03 V	107	39.00	11.70
8	#7236.00	35.1 AV	64.9	-29.8	1.03 V	107	23.40	11.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.8 PK			1.28 H	94	101.00	3.80
2	*2437.00	94.9 AV			1.28 H	94	91.10	3.80
3	4874.00	54.2 PK	74.0	-19.8	1.01 H	112	45.70	8.50
4	4874.00	39.2 AV	54.0	-14.8	1.01 H	112	30.70	8.50
5	7311.00	50.7 PK	74.0	-23.3	1.00 H	55	39.10	11.60
6	7311.00	35.3 AV	54.0	-18.7	1.00 H	55	23.70	11.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.6 PK			1.74 V	36	93.80	3.80
2	*2437.00	84.2 AV			1.74 V	36	80.40	3.80
3	4874.00	51.1 PK	74.0	-22.9	1.01 V	112	42.60	8.50
4	4874.00	39.0 AV	54.0	-15.0	1.01 V	112	30.50	8.50
5	7311.00	50.3 PK	74.0	-23.7	1.02 V	213	38.70	11.60
6	7311.00	34.2 AV	54.0	-19.8	1.02 V	213	22.60	11.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.8 PK			1.86 H	222	97.80	4.00
2	*2462.00	92.8 AV			1.86 H	222	88.80	4.00
3	2483.50	72.8 PK	74.0	-1.2	1.86 H	222	68.70	4.10
4	2483.50	50.1 AV	54.0	-3.9	1.86 H	222	46.00	4.10
5	4924.00	53.4 PK	74.0	-20.6	1.00 H	4	44.90	8.50
6	4924.00	38.1 AV	54.0	-15.9	1.00 H	4	29.60	8.50
7	7386.00	50.8 PK	74.0	-23.2	1.01 H	122	39.20	11.60
8	7386.00	35.9 AV	54.0	-18.1	1.01 H	122	24.30	11.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.4 PK			1.42 V	230	92.40	4.00
2	*2462.00	83.1 AV			1.42 V	230	79.10	4.00
3	2483.50	65.7 PK	74.0	-8.3	1.42 V	230	61.60	4.10
4	2483.50	42.7 AV	54.0	-11.3	1.42 V	230	38.60	4.10
5	4924.00	51.2 PK	74.0	-22.8	1.02 V	85	42.70	8.50
6	4924.00	34.6 AV	54.0	-19.4	1.02 V	85	26.10	8.50
7	7386.00	50.6 PK	74.0	-23.4	1.00 V	139	39.00	11.60
8	7386.00	34.2 AV	54.0	-19.8	1.00 V	139	22.60	11.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	1.72 H	285	65.50	3.70
2	2390.00	53.0 AV	54.0	-1.0	1.72 H	285	49.30	3.70
3	*2422.00	102.0 PK			1.72 H	285	98.20	3.80
4	*2422.00	92.6 AV			1.72 H	285	88.80	3.80
5	4844.00	54.6 PK	74.0	-19.4	1.02 H	216	46.10	8.50
6	4844.00	36.8 AV	54.0	-17.2	1.02 H	216	28.30	8.50
7	7266.00	51.6 PK	74.0	-22.4	1.02 H	33	39.90	11.70
8	7266.00	35.8 AV	54.0	-18.2	1.02 H	33	24.10	11.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	1.25 V	332	57.80	3.70
2	2390.00	47.8 AV	54.0	-6.2	1.25 V	332	44.10	3.70
3	*2422.00	96.1 PK			1.25 V	332	92.30	3.80
4	*2422.00	84.1 AV			1.25 V	332	80.30	3.80
5	4844.00	50.6 PK	74.0	-23.4	1.00 V	12	42.10	8.50
6	4844.00	34.3 AV	54.0	-19.7	1.00 V	12	25.80	8.50
7	7266.00	50.2 PK	74.0	-23.8	1.02 V	217	38.50	11.70
8	7266.00	35.8 AV	54.0	-18.2	1.02 V	217	24.10	11.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.6 PK			1.08 H	76	99.80	3.80
2	*2437.00	91.7 AV			1.08 H	76	87.90	3.80
3	4874.00	53.5 PK	74.0	-20.5	1.02 H	211	45.00	8.50
4	4874.00	36.2 AV	54.0	-17.8	1.02 H	211	27.70	8.50
5	7311.00	51.2 PK	74.0	-22.8	1.00 H	102	39.60	11.60
6	7311.00	36.6 AV	54.0	-17.4	1.00 H	102	25.00	11.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.8 PK			1.42 V	216	94.00	3.80
2	*2437.00	86.9 AV			1.42 V	216	83.10	3.80
3	4874.00	50.1 PK	74.0	-23.9	1.02 V	214	41.60	8.50
4	4874.00	33.9 AV	54.0	-20.1	1.02 V	214	25.40	8.50
5	7311.00	50.6 PK	74.0	-23.4	1.00 V	12	39.00	11.60
6	7311.00	34.9 AV	54.0	-19.1	1.00 V	12	23.30	11.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	102.6 PK			1.95 H	301	98.60	4.00
2	*2452.00	90.7 AV			1.95 H	301	86.70	4.00
3	2483.50	69.6 PK	74.0	-4.4	1.95 H	301	65.50	4.10
4	2483.50	50.6 AV	54.0	-3.4	1.95 H	301	46.50	4.10
5	4904.00	53.4 PK	74.0	-20.6	1.02 H	14	44.80	8.60
6	4904.00	35.6 AV	54.0	-18.4	1.02 H	14	27.00	8.60
7	7356.00	50.2 PK	74.0	-23.8	1.01 H	9	38.60	11.60
8	7356.00	35.6 AV	54.0	-18.4	1.01 H	9	24.00	11.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	96.6 PK			1.61 V	269	92.60	4.00
2	*2452.00	87.2 AV			1.61 V	269	83.20	4.00
3	2483.50	64.2 PK	74.0	-9.8	1.61 V	269	60.10	4.10
4	2483.50	47.9 AV	54.0	-6.1	1.61 V	269	43.80	4.10
5	4904.00	49.2 PK	74.0	-24.8	1.03 V	66	40.60	8.60
6	4904.00	33.2 AV	54.0	-20.8	1.03 V	66	24.60	8.60
7	7356.00	50.8 PK	74.0	-23.2	1.01 V	44	39.20	11.60
8	7356.00	35.8 AV	54.0	-18.2	1.01 V	44	24.20	11.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.2 6dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Feb. 18,16	Feb. 17,17
Power Sensor	Keysight	U2021XA	MY55060018	Feb. 18,16	Feb. 17,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 27,15	Oct. 26,16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Oct. 17, 15	Oct. 16, 16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 05,15	Nov. 04,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 05,15	Nov. 04,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 15	Apr. 21, 16
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 01,15	Aug. 31,16

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.


4.2.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

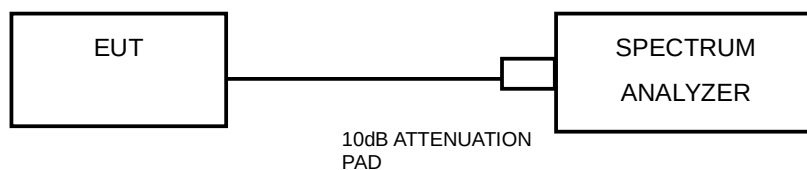

4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




**BUREAU
VERITAS**

Test Report No.: RF151124N057

4.2.7 TEST RESULTS

802.11b


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.12	0.5	PASS
6	2437	10.13	0.5	PASS
11	2462	10.13	0.5	PASS

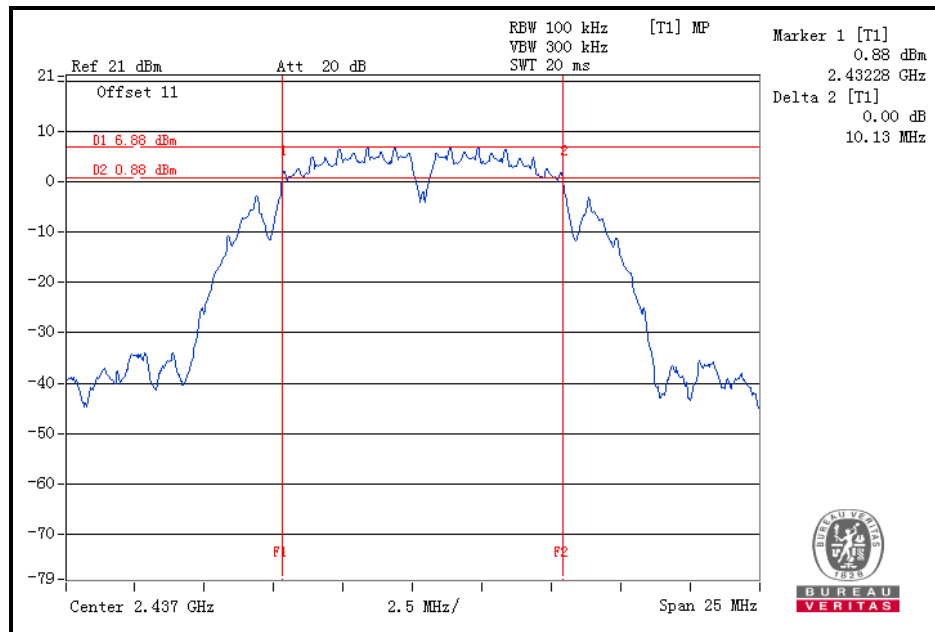



802.11g


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.68	0.5	PASS
6	2437	17.68	0.5	PASS
11	2462	17.69	0.5	PASS

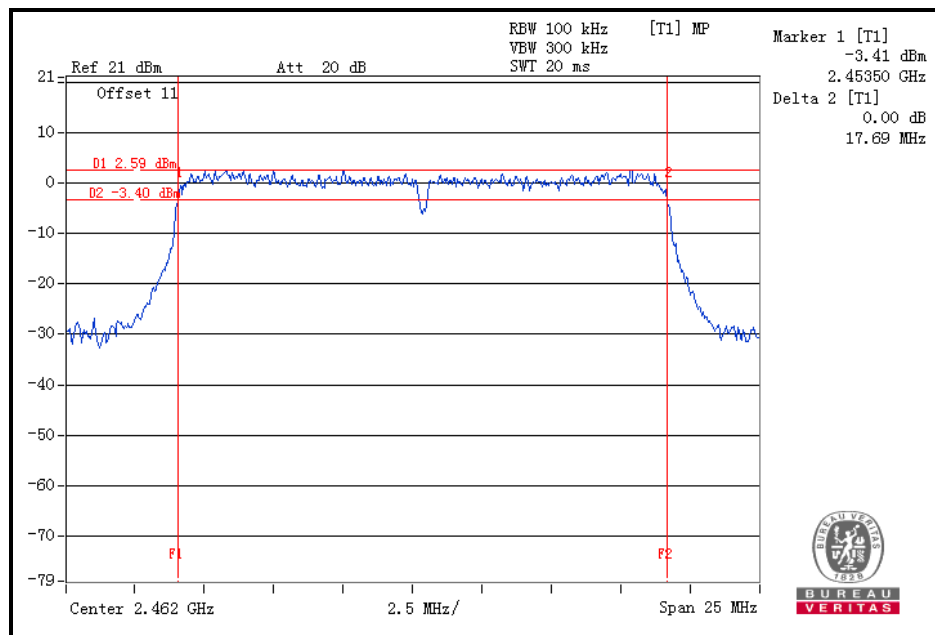



802.11n (20MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.69	0.5	PASS
6	2437	17.68	0.5	PASS
11	2462	17.68	0.5	PASS

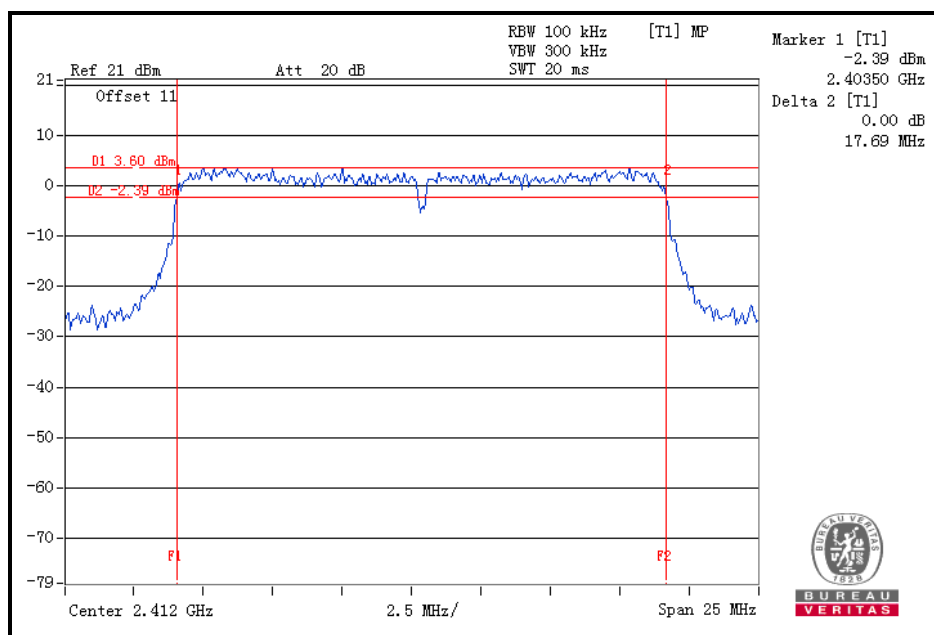



802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.52	0.5	PASS
6	2437	36.44	0.5	PASS
9	2452	36.45	0.5	PASS

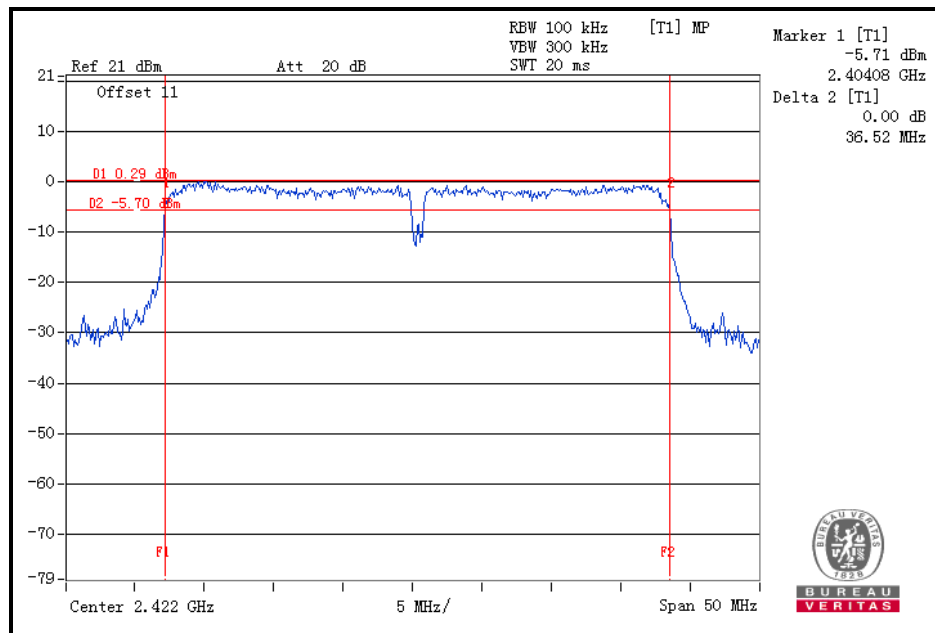


4.3 CONDUCTED OUTPUT POWER

4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

4.3.2 TEST SETUP

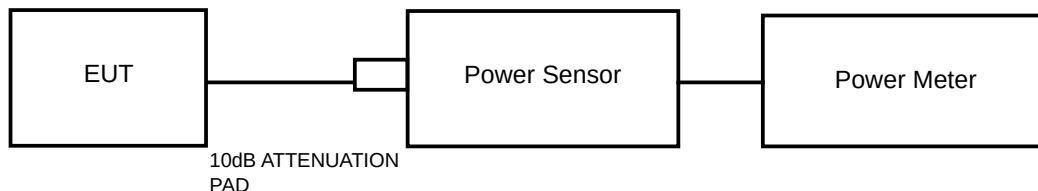

4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Feb. 18,16	Feb. 17,17
Power Sensor	Keysight	U2021XA	MY55060018	Feb. 18,16	Feb. 17,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 27,15	Oct. 26,16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Oct. 17, 15	Oct. 16, 16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 05,15	Nov. 04,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 05,15	Nov. 04,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 15	Apr. 21, 16
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 01,15	Aug. 31,16

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



Test Report No.: RF151124N057

4.3.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

4.3.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	19.01	79.616	1	PASS
6	2437	20.91	123.310	1	PASS
11	2462	20.43	110.408	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	26.06	403.645	1	PASS
6	2437	25.65	367.282	1	PASS
11	2462	25.35	342.768	1	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	26.11	408.319	1	PASS
6	2437	25.85	384.592	1	PASS
11	2462	25.15	327.341	1	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
3	2422	25.71	372.392	1	PASS
6	2437	25.41	347.536	1	PASS
9	2452	25.27	336.512	1	PASS

4.3.7.2 Average Output Power (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
1	2412	16.03
6	2437	17.91
11	2462	17.58

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
1	2412	18.11
6	2437	18.04
11	2462	17.40

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
1	2412	18.46
6	2437	17.85
11	2462	17.42

802.11n (20MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
3	2422	17.66
6	2437	17.72
9	2452	17.32

4.4 POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.4.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: 3 kHz
- d) Set VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.


4.4.6 EUT OPERATING CONDITION

Same as item 4.3.6

4.4.7 TEST RESULTS


802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-11.16	8	PASS
6	2437	-11.52	8	PASS
11	2462	-12.00	8	PASS

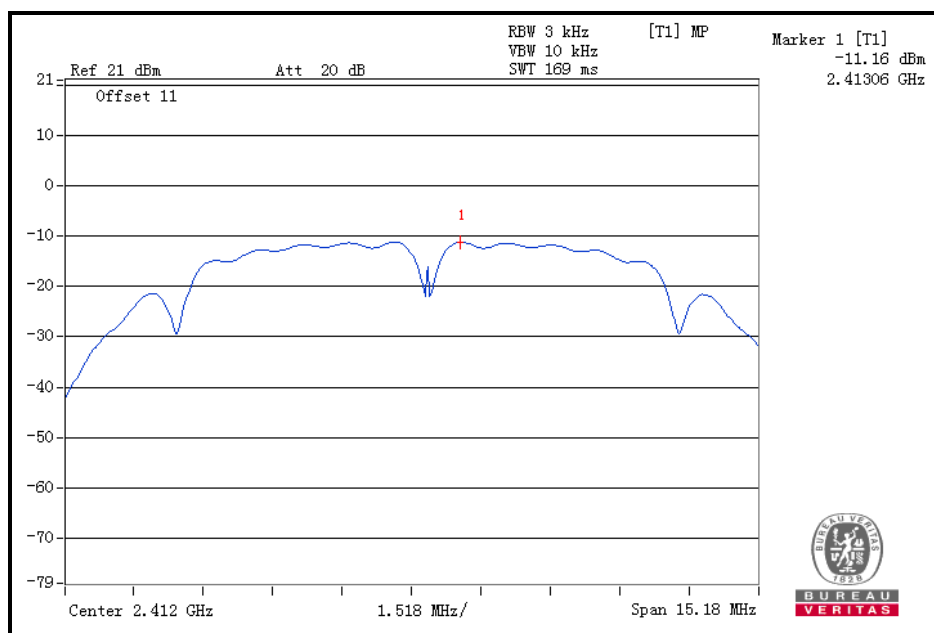


802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-9.86	8	PASS
6	2437	-10.87	8	PASS
11	2462	-11.67	8	PASS

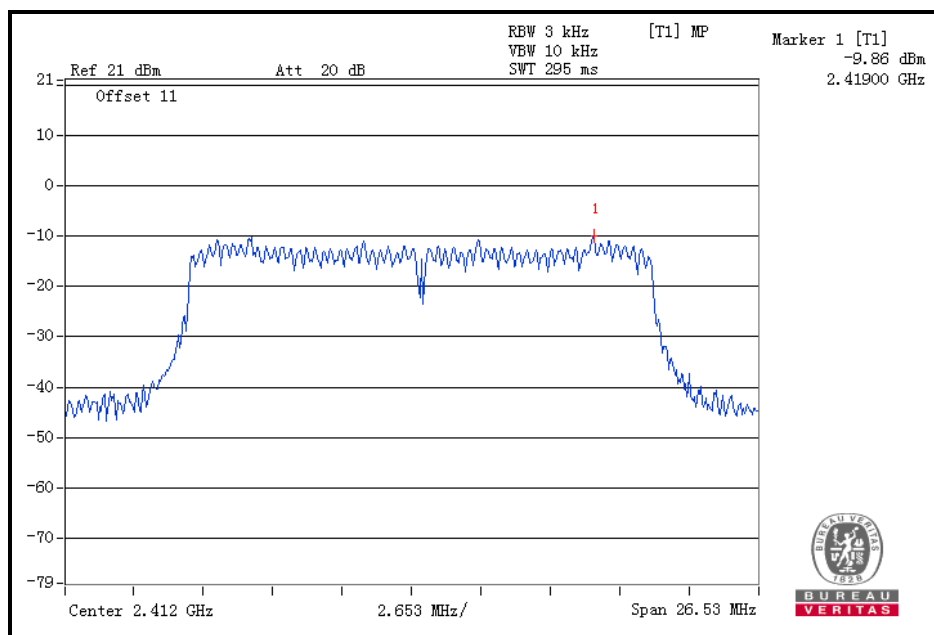


802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-9.31	8	PASS
6	2437	-10.02	8	PASS
11	2462	-11.13	8	PASS

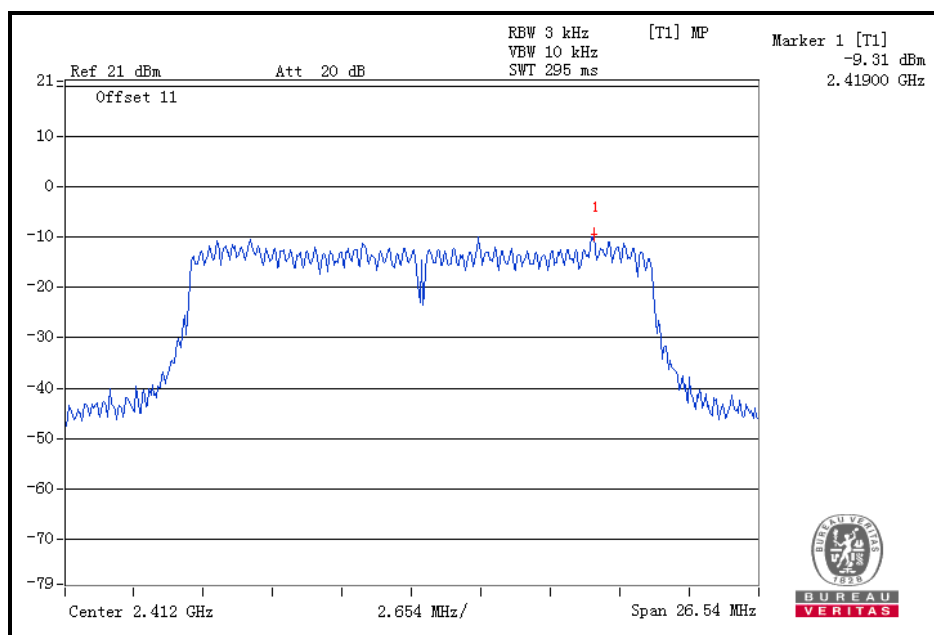

802.11n (40MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-12.39	8	PASS
6	2437	-12.23	8	PASS
9	2452	-13.58	8	PASS

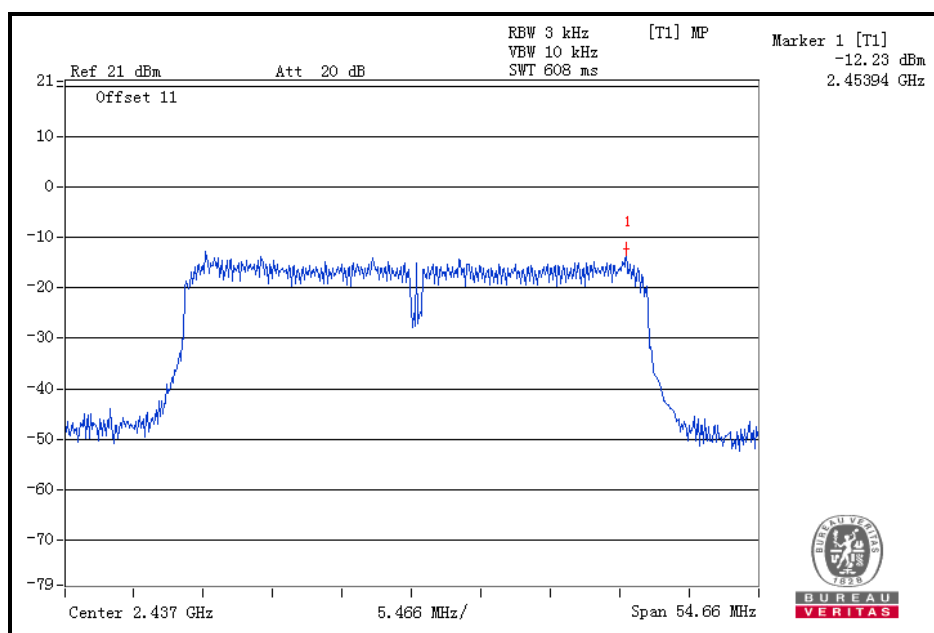




4.5 OUT OF BAND EMISSION MEASUREMENT

4.5.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 TEST SETUP

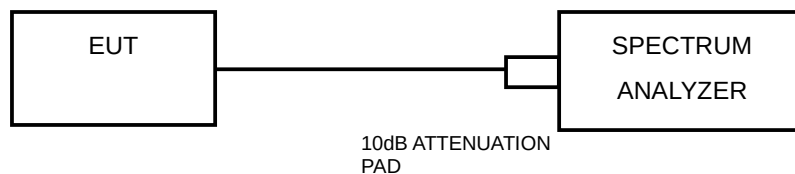

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



Test Report No.: RF151124N057

Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as item 4.2.6




BUREAU
VERITAS

Test Report No.: RF151124N057

4.5.7 TEST RESULTS

802.11b

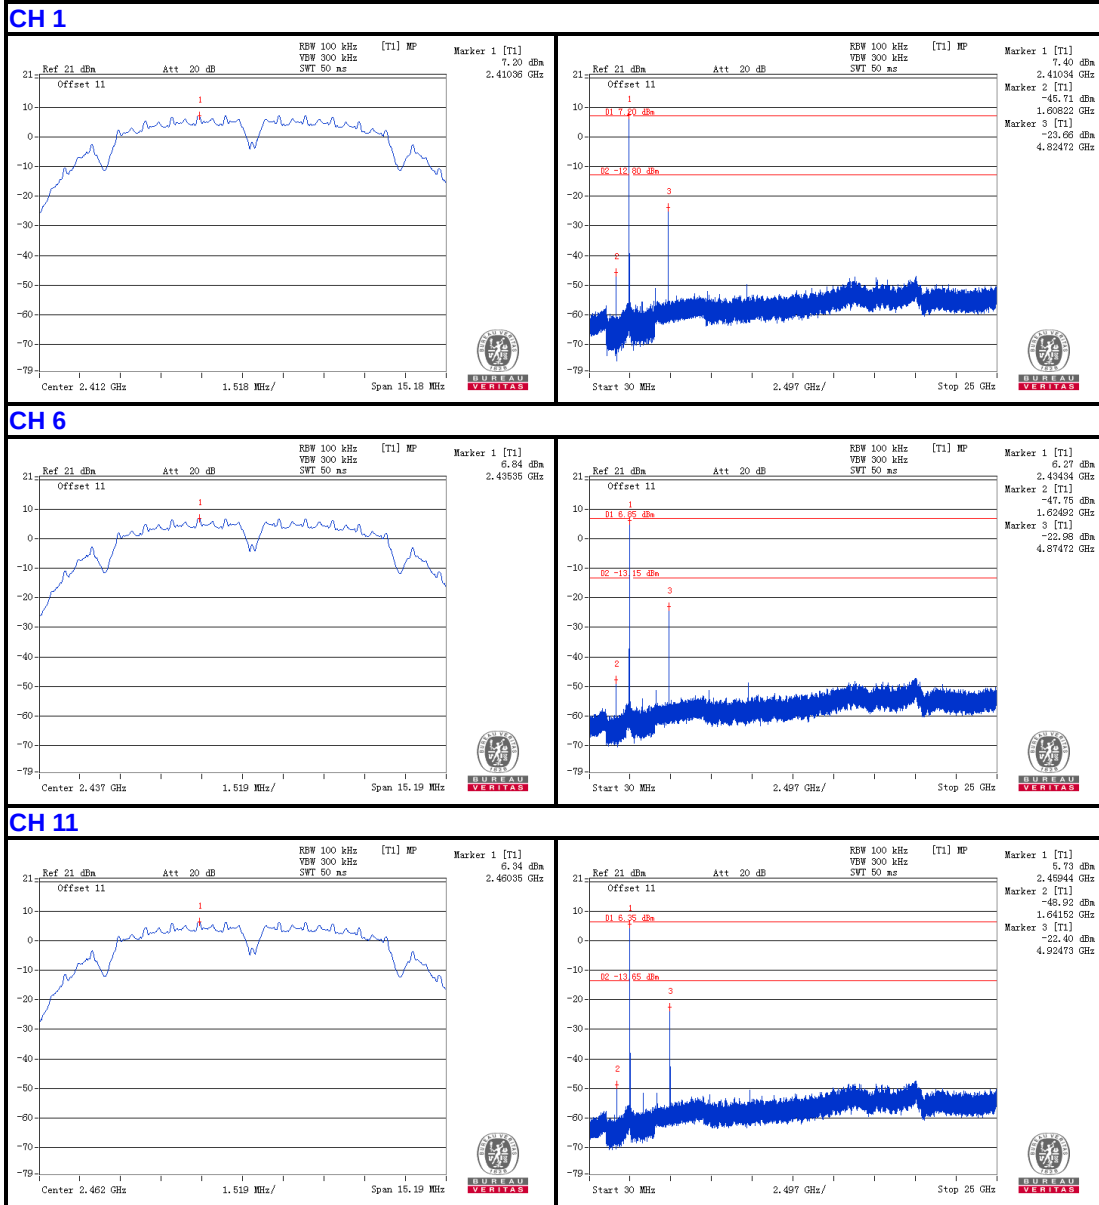




BUREAU
VERITAS


Test Report No.: RF151124N057

802.11g


CH 1

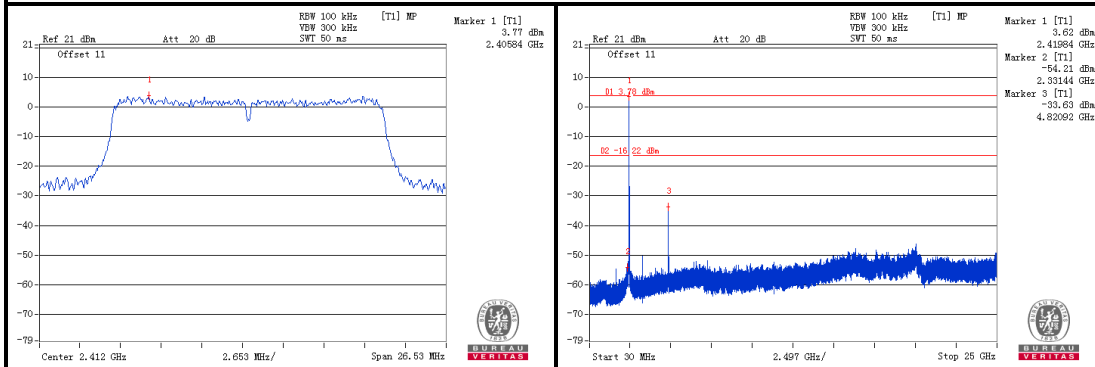

CH 6

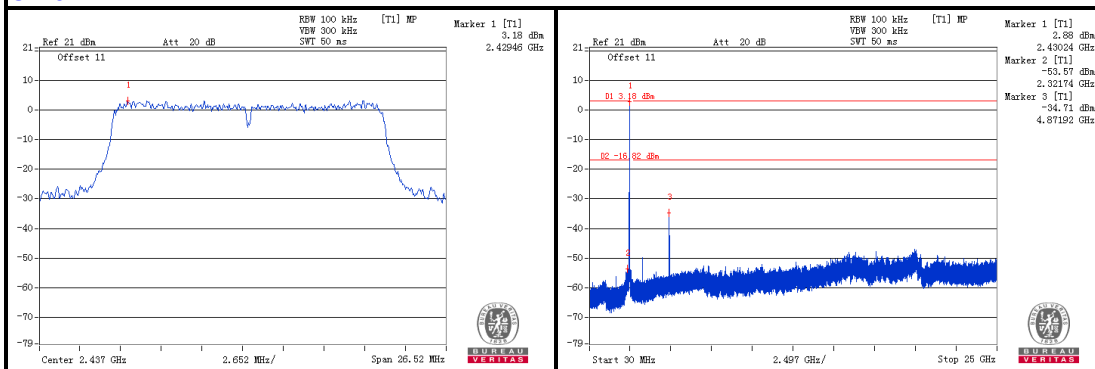

CH 11

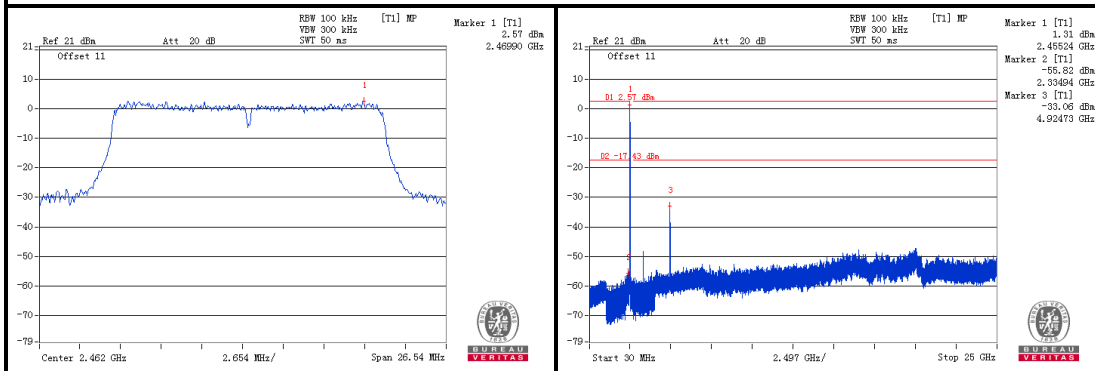



Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China



Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com

802.11n (20MHz)



CH 1

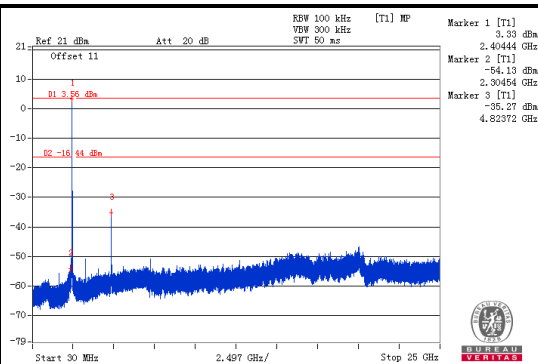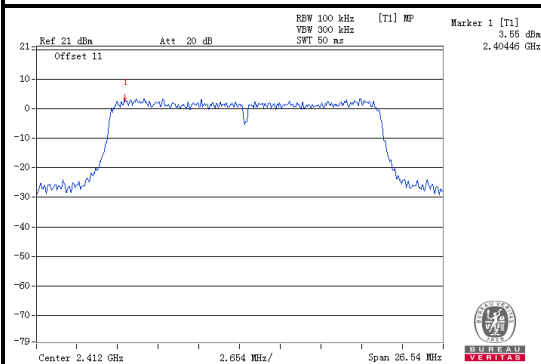

CH 6

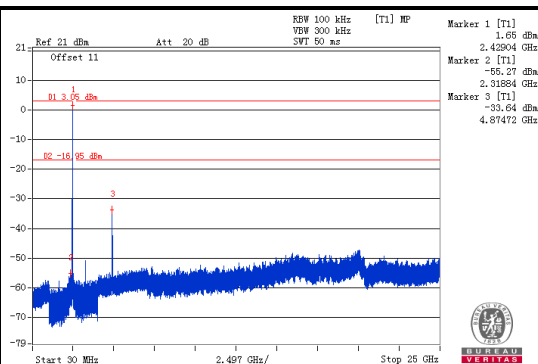
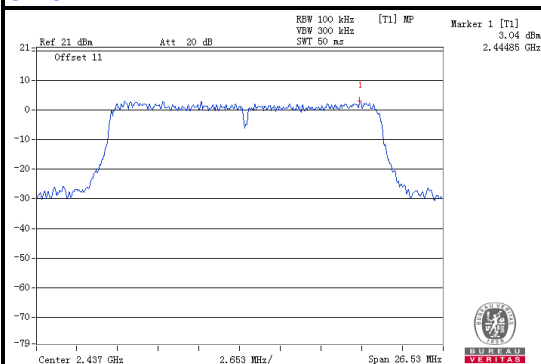


CH 11

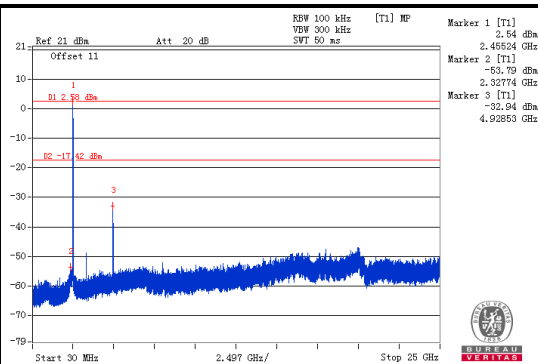
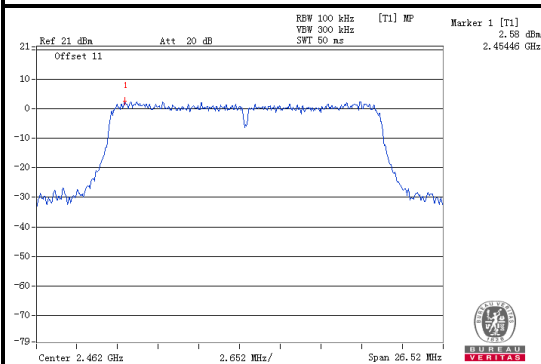


802.11n (40MHz)



CH 3

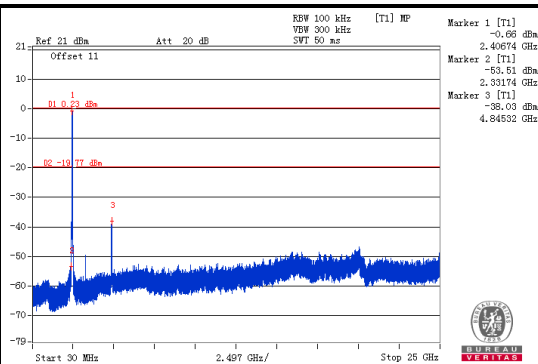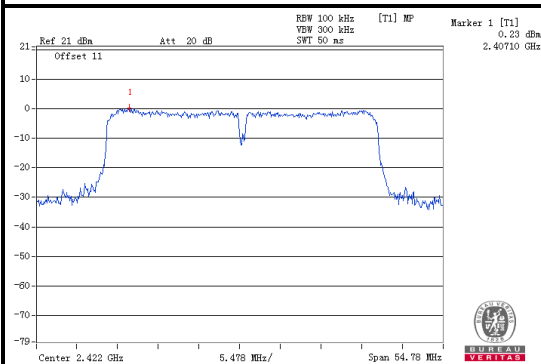

CH 6

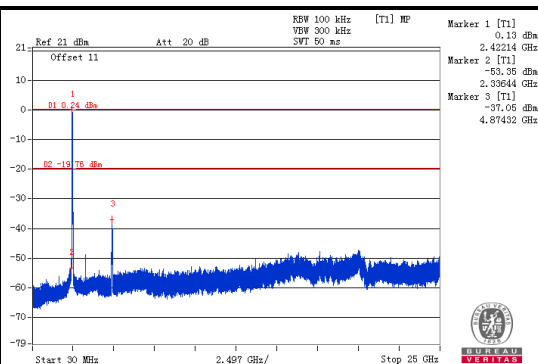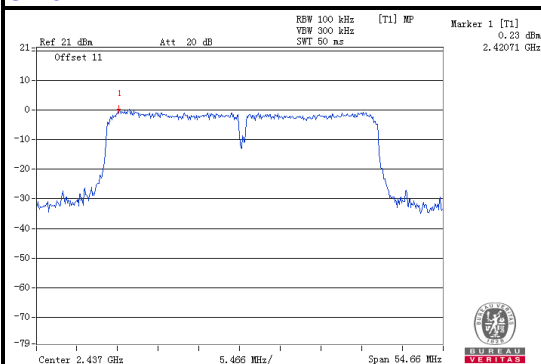


CH 9

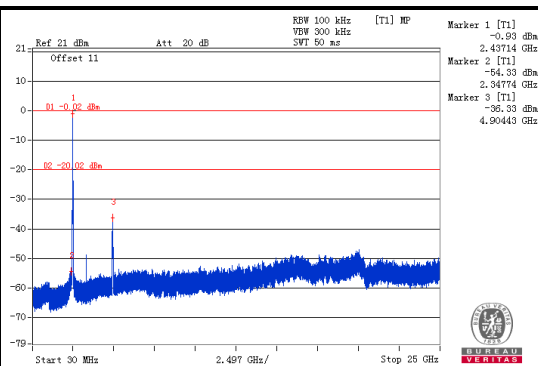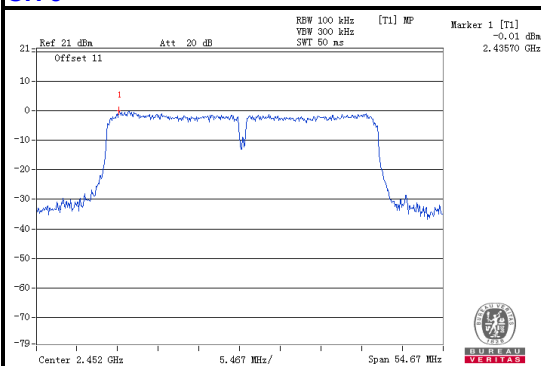


802.11b

CH 1 Band edge

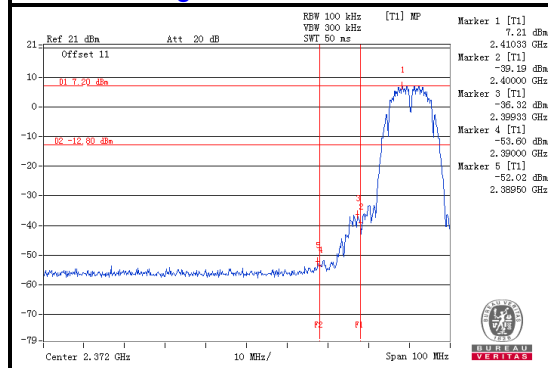


CH 11 Band edge

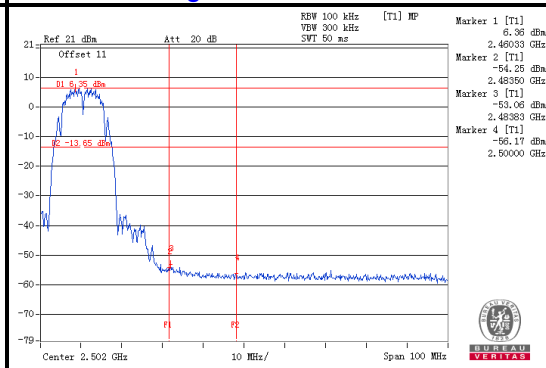


802.11g

CH 1 Band edge

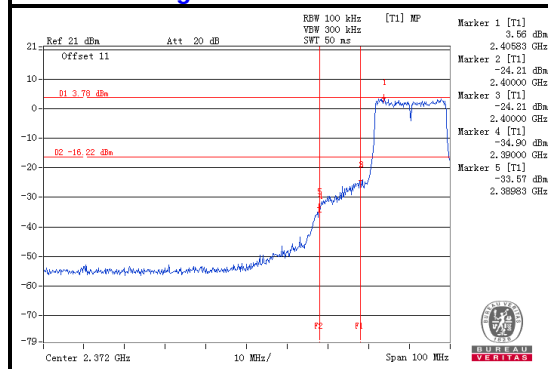

CH 11 Band edge

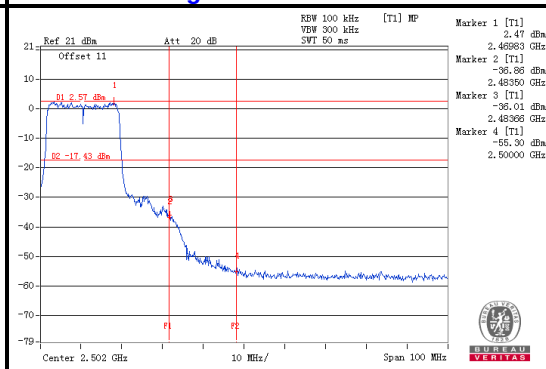




BUREAU
VERITAS


Test Report No.: RF151124N057

802.11n (20MHz)

CH 1 Band edge

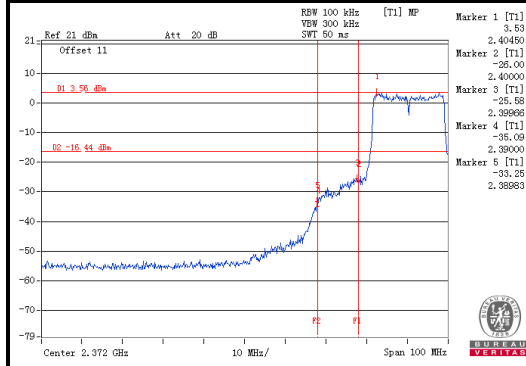


CH 11 Band edge

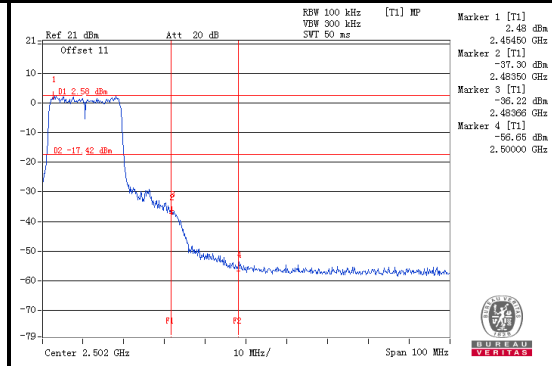


802.11n (40MHz)

CH 3 Band edge

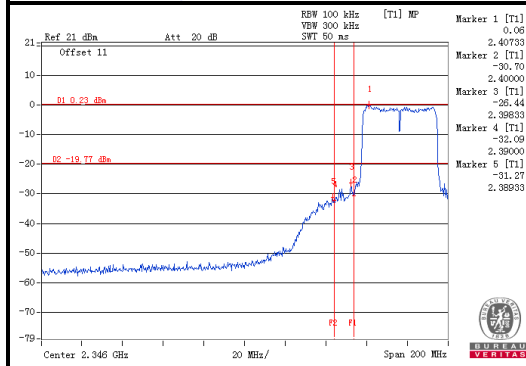

CH 9 Band edge

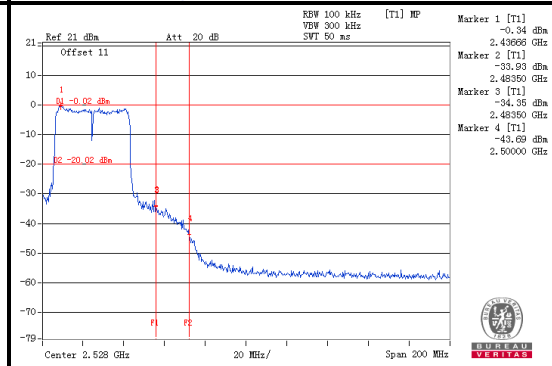



Test Report No.: RF151124N057

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF151124N057

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---