
版权专有,未经允许,不得擅自使用.

REV.(版本)	Changed Description(变更说明)	Changed By(变更人)	Approved By(审核人)	Date(日期)

正面

反面

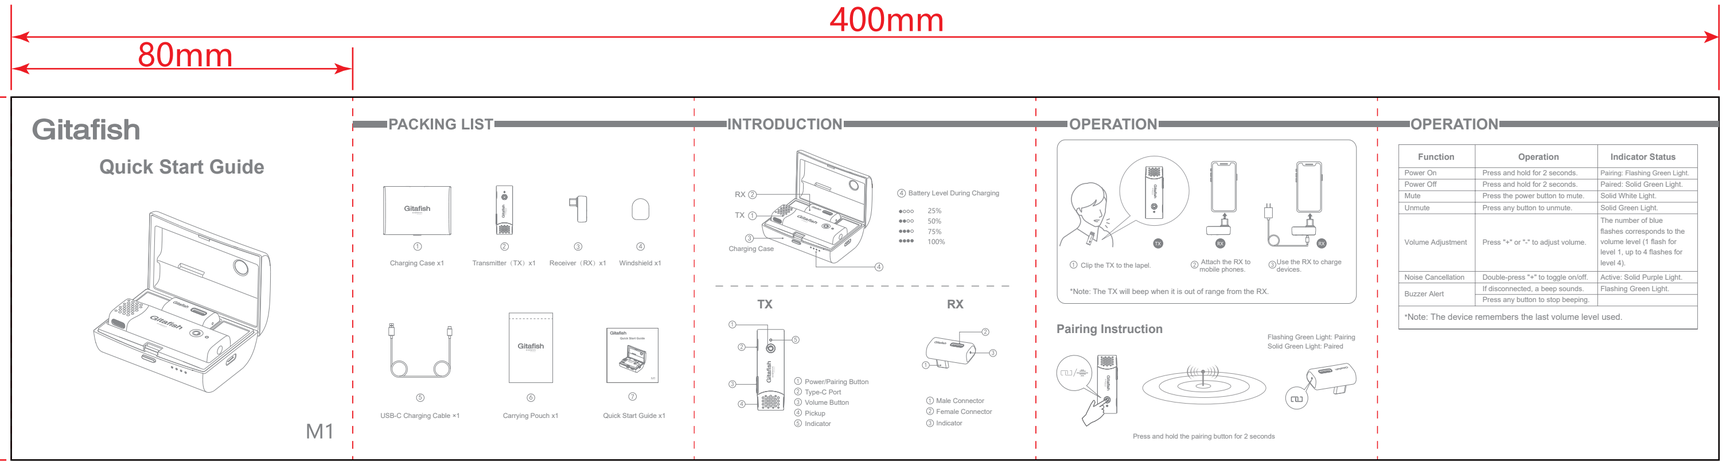

Gitafish

Quick Start Guide

M1

PACKING LIST

INTRODUCTION

OPERATION

*Note: The TX will beep when it is out of range from the RX.

Pairing Instruction

OPERATION

Function	Operation	Indicator Status
Power On	Press and hold for 2 seconds.	Pairing: Flashing Green Light.
Power Off	Press and hold for 2 seconds.	Paired: Solid Green Light.
Mute	Press the power button to mute.	Solid White Light.
Unmute	Press any button to unmute.	Solid Green Light.
Volume Adjustment	Press "+" or "-" to adjust volume.	The number of blue flashes corresponds to the volume level (1 flash for level 1, up to 4 flashes for level 4).
Noise Cancellation	Double-press "+" to toggle on/off.	Active: Solid Purple Light.
Buzzer Alert	If disconnected, a beep sounds.	Flashing Green Light.
	Press any button to stop beeping.	

*Note: The device remembers the last volume level used.

PARAMETER TABLE

Wireless Transmission	2.4GHz Adaptive Frequency Modulation
Transmission Range	100m(328ft.) (line of sight)
Polar Pattern	Omnidirectional
Frequency Response	20Hz-20kHz
Maximum SPL	129dB
Input Dynamic Range	93 ± 3dB
Battery Capacity	TX: 145mAh Charging Case: 600mAh
Operating Time	TX: 6 hours Charging Case: 4 full charges for 1 TX
Charging Time	TX: 1.5 hours Charging Case: 2 hours
Power Supply	5V⎓1A
Dimensions	TX: 67.1 x 22.39 x 10.15mm RX: 30.07 x 16.27 x 10.3mm Charging Case: 74.49 x 53.26 x 30.98mm
Weight	TX: 18g RX: 5g. Charging Case: 60g

APP APPLICATION

Gitafish

Enhance your audio experience with the Gitafish App, offering user-friendly settings and an intuitive interface for effortless sound customization. Tailor your sound profiles and control advanced features easily. Download now for a seamless audio tuning journey.

OS Requirements

Android

Android 8.0 or Later

iPhone | iPad

IOS 12.0 or Later

Gitafish App

SERVICE AND SAFETY

WARRANTY: Shenzhen Skylark Audio offers a 1-year warranty from the date of purchase.

FREE MAINTENANCE: During the warranty period, maintenance is provided at no cost if product failure occurs under normal use.

SAFETY WARNING: Avoid exposing the product to heat sources, such as microwaves, stoves, or high-pressure containers to prevent damage or battery explosion.

Visit www.gitafish.net to find out more about our products and support.

Manufacturer: Shenzhen Skylark Audio Industry Co., Ltd.
Office Address: 101-4, Building 4, Xiangyuer Industrial Park, No. 8 Longsheng Road, Longgang Street, Longgang District, Shenzhen, Guangdong Province, China.
Production Address: 3F, Building 10, No.1 Jingdong Road, Fenggang Town, Dongguan City, Guangdong Province, China.

This content is subject to change without prior notice.
Gitafish is a trademark of Skylark Audio.
Copyright © 2023 Skylark Audio All Rights Reserved.

SERVICE AND SAFETY

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

裁切线

压痕线

Notes:
1. 尺寸：80*85mm
2. 材质：128 gsm
3. 颜色：1C，60%K
4. 工艺：风琴折
5. This part must comply with ROHS/Reach/CA65/Prop65.

REV.(版本)	DESCRIPTION(说明)	Drawn By(设计人)	Date(日期)
0.1	第一次发行	黄泽博	2023.12.19

Changed history(变更履历表)

Drawn By(设计人)	黄泽博	Date(日期)	2023.12.19
Checked By(确认人)	黄志炫	Date(日期)	2023.12.19
Approved By(审核人)	郭 锐	Date(日期)	2023.12.19

深圳市云雀之声实业有限公司

Title(名称)	EM111联合方案英文版说明书		
Model(机型)	Part No.(零件料号)	Doc No.(文件编号)	REV.(版本)
EM111			0.1

Material(材料)		Unit(单位)	mm	未标注公差
Scale(比例)	1:1	Mass(g)重量(g)	TBD	
Projection Type(投影视角)		SHEET(页码)	1/1	

SELECT					●
TOL / DIM.	USR	EPE	BAG	CTN	LABEL
0~6	±1.0				±0.2
7~30	±1.0	±0.5	±3.0		±0.2
31~120	±1.0	±0.5	±3.0	+3.0/-0	±0.2
121~300	±1.0	±1.0	±3.0	+3.0/-0	±0.5
301~600	±1.0	±1.0	±5.0	+3.0/-0	±0.5