



FCC PART 15.225
RSS-210 ISSUE 11, JUNE 2024
RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT2

TEST REPORT

For

FCC: Fujian LANDI Commercial Equipment Co.,Ltd.

Building 17, Section A, Software Park, No. 89 Software Road, Gulou District, Fuzhou Municipality,
Fujian Province, China

IC: Fujian LANDI Commercial Equipment Co., Ltd.

5th &6th Floor, Building 3A, Area A, Software Park, No. 89, Software Avenue, Gulou District
Fuzhou Fujian 350003 China

FCC ID: 2AG6N-C2001A1
IC: 23725-C2001A1


Report Type: Class II Permissive Change Report	Product Name: POS Terminal
Report Number:	2407Z105199E-RF-A1-01
Report Date:	2025-09-18
Reviewed By:	Ash Lin 
Approved By:	Miles Chen 
Prepared By:	Bay Area Compliance Laboratories Corp. (Xiamen) Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen Tel: +86-592-3200111 www.baclcorp.com.cn

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
Product Description for Equipment under Test (EUT).....	5
Test Methodology	6
Test Facility.....	6
Measurement Uncertainty	6
SYSTEM TEST CONFIGURATION.....	7
Test Mode and Voltage	7
Justification	7
EUT Exercise Software	7
Equipment Modifications.....	7
Support Equipment List and Details	7
External Cable.....	8
Block Diagram of Test Setup	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.203 & RSS-GEN ISSUE 5 CLAUSE 6.8- ANTENNA REQUIREMENT.....	12
Applicable Standard	12
Antenna Connected Construction.....	12
FCC §15.207 (a) & RSS-GEN ISSUE 5 CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS	13
Applicable Standard	13
EUT Setup.....	13
EMI Test Receiver Setup	13
Test Procedure.....	13
Result &Margin Calculation	14
Test Data	14
FCC§15.225, §15.205 & §15.209 & RSS-210 ISSUE 11 CLAUSE ANNEX B B.6- RADIATED EMISSIONS TEST.....	23
Applicable Standard	23
Test System Setup	24
EMI Test Receiver Setup	25
Result & Margin Calculation	25
Test Data	26
FCC§15.225(e) & RSS-210 ISSUE 11 CLAUSE ANNEX B B.6 - FREQUENCY STABILITY.....	70
Applicable Standard	70
Test Procedure.....	70
EUT Setup.....	71
Test Data	71
FCC§15.215(c) - 20dB EMISSION BANDWIDTH TESTING.....	76
Requirement	76
Test Procedure.....	76
Test Setup.....	76
Test Data	77
ISED RSS-GEN ISSUE 5 CLAUSE 6.7 – OCCUPIED BANDWIDTH.....	81
Applicable Standard	81
Test Procedure.....	81
Test Setup.....	82
Test Data	83

EUT PHOTOGRAPHS87

TEST SETUP PHOTOGRAPHS88

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	2407Z105199E-RF-01	R1V1	2025-06-10	Initial Release
1	2407Z105199E-RF-A1-01	R1V2	2025-09-18	Class II Permissive Change

Note: This is Class II Permissive change application based on the original device, model: C20Pro. FCC ID: 2AG6N-C2001A1, IC: 23725-C2001A1, HVIN: C2001-S297. Differences between the previous and current one are stated and guaranteed by the manufacturer, as following:

1. Add a HVIN(HVIN: C2001-S797A2)
2. The board connected to the secondary screen changed, the connection method of the secondary screen switched from the fixed FFC cable to the detachable POGO PIN mode.
3. NFC antenna circuit remains unchanged, only the connection method changed with corresponding changes in the circuit.

Based on the changes above, all item were re-tested.

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	FCC: Fujian LANDI Commercial Equipment Co.,Ltd. IC: Fujian LANDI Commercial Equipment Co., Ltd.						
Product Name:	POS Terminal						
Tested Model:	C20Pro						
HVIN:	C2001-S797A2						
Power Supply:	DC 19.0V, 3.42A from adapter						
Adapter #1 Information	Model:	PA-1650-57					
	Input:	AC 100-240V, 50/60Hz, 1.6A					
	Output:	DC 19.0V, 3.42A					
Adapter #2 Information	Model:	PA-1650-90					
	Input:	AC 100-240V, 50/60Hz, 1.6A					
	Output:	DC 19.0V, 3.42A					
RF Function:	NFC						
Operating Band/Frequency:	13.56 MHz						
Antenna Type:	COIL Antenna						
<i>Note:</i> 1. The Operating Frequency is provided by the applicant. 2. The configuration of EUT show as below:							
	Model name	HVIN	Certified RF Module	Description	NFC	WWAN/ GNSS	Printer
	C20Pro	C2001-S797A2	SNM927 (FCC ID:2AG6N-SNM927WF4MG IC:23725-SNM927WF4MG)	Wifi only - 10.1" CFD- unattachedB [#]	√	x	√
<i>All measurement and test data in this report was gathered from production sample serial number: 38G2-4 (Configuration 4) (Assigned by the BACL (Xiamen). The EUT supplied by the applicant was received on 2025-08-12)</i>							

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the ISED RSS-210, Issue 11, June 2024, applicable standard: License-Exempt Radio Apparatus: Category I Equipment & RSS-GEN, Issue 5, February 2021 Amendment 2: General Requirements for Compliance of Radio Apparatus & ANSI C63.10-2020 + Cor.1-2023[▲] American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Xiamen) to collect test data is located on the Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone Xiamen.

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN1384.

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the IC accredited lab under the KDB 974614 D01, the IC Designation No. : CN0176.

Measurement Uncertainty

Item		U _{lab}
Radiated Disturbance	9kHz~150kHz	2.82 dB
	150kHz~30MHz	2.74 dB
	30MHz~200MHz	3.47 dB
	200MHz~1GHz	4.86 dB
Occupied Bandwidth		2%
Frequency Error(RF Frequency)		0.085×10^6
Voltage (AC, <10kHz)		1%
Temperature		1°C
Humidity		5%

SYSTEM TEST CONFIGURATION

Test Mode and Voltage

The system was configured for testing in a typical mode (as normally used by a typical user).	
Test mode:	Test Mode 1: Transmitting
Test voltage:	AC 120V/60Hz
Remark:	During all emission tests, the EUT was configured to measure its highest possible emission level and the worst case's test data was presented in this test report.

Justification

The system was configured in testing mode which was provided by manufacturer.

Channel List:

Channel	Frequency (MHz)
1	13.56

EUT Exercise Software

The EUT is tested in the engineering mode.

Equipment Modifications

No modification on the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T480	PF1P5K4F
Kingston	U disk*3	DTSE9G3	Unknown
Unknown	RJ232 Load*2	Unknown	Unknown
PHILIPS	Keyboard	SPK6234	K234210510745
PHILIPS	Mouse	SPK7214	M214BQ210411119
Unknown	Earphone	Unknown	Unknown

External Cable


Cable Description	Length (m)	From Port	To
Type-C Cable	1	EUT	Laptop
Network Cable	1	EUT	Laptop
Keyboard cable	1.5	Keyboard	EUT
Mouse cable	1.5	Mouse	EUT
Earphone cable	1.5	Earphone	EUT

Block Diagram of Test Setup

Conducted Emission:

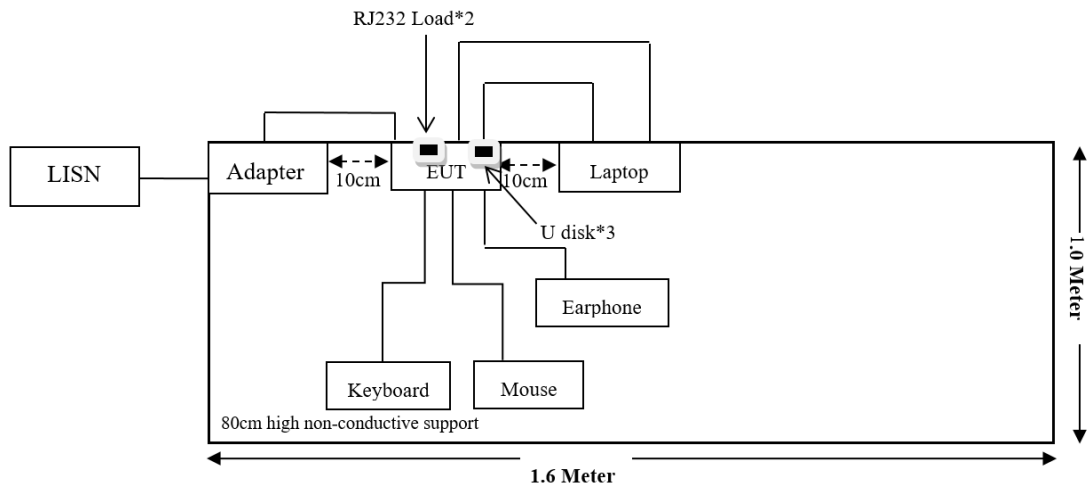

Radiated Emission:

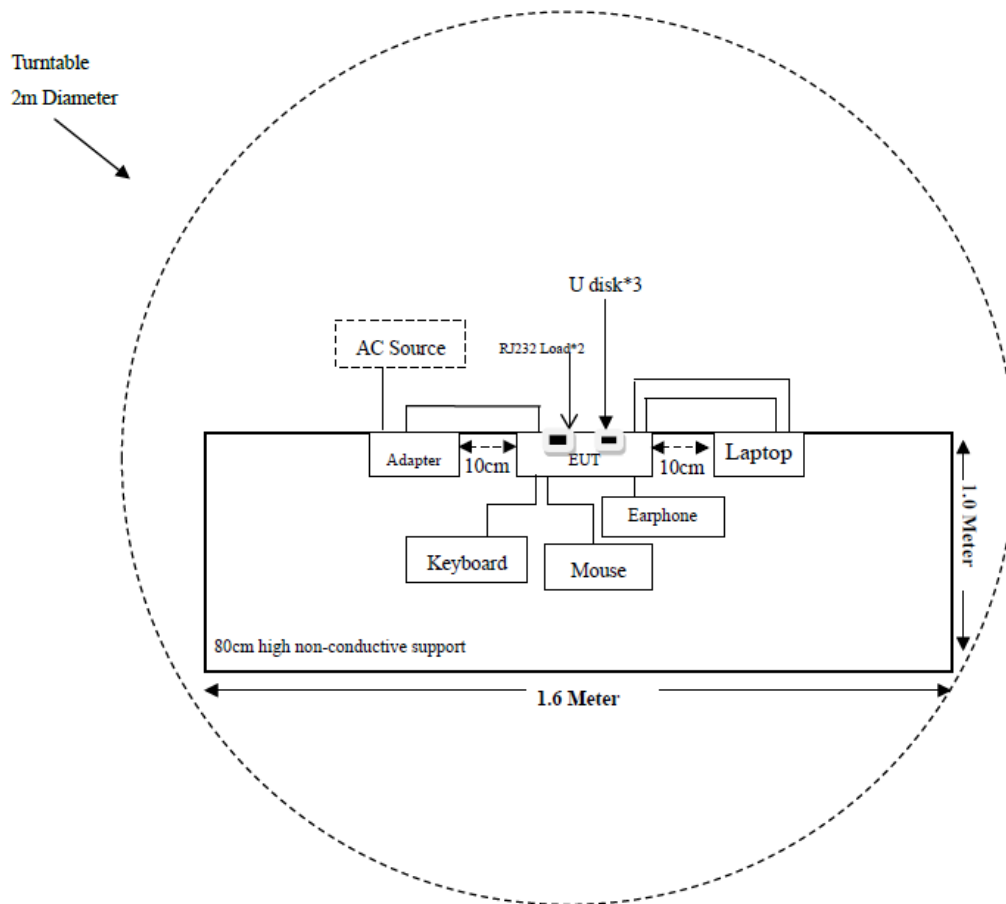

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.203 RSS-GEN Issue 5 Clause 6.8	Antenna Requirement	Compliant
FCC §15.207 (a) RSS-GEN Issue 5 Clause 8.8	AC Line Conducted Emissions	Compliant
FCC§15.225 §15.209 §15.205 RSS-210 Issue 11 Clause Annex B B.6	Radiated Emission Test	Compliant
FCC§15.225(e) RSS-210 Issue 11 Clause Annex B B.6	Frequency Stability	Compliant
FCC §15.215(c)	20dB Emission Bandwidth	Compliant
RSS-GEN Issue 5 Clause 6.7	Occupied Bandwidth	Compliant

TEST EQUIPMENT LIST

Test Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions					
EMI Test Receiver	Rohde & Schwarz	ESR	103105	2025/02/20	2026/02/19
LISN	Rohde & Schwarz	ENV216	100129	2025/02/20	2026/02/19
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC001	2025/02/20	2026/02/19
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESR	103103	2025/02/20	2026/02/19
Loop Antenna	Rohde & Schwarz	HFH2-Z2	830749/001	2023/07/27	2026/07/26
Antenna	Sunol Sciences	JB6	A122022-5	2023/07/27	2026/07/26
Amplifier	Sonoma	310B	120903	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC002	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-2M	CC006	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-12M	CC007	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	HFH2-CC	335.3609	2025/02/20	2026/02/19
Test Software	Audix	E3	18621a	N/A	N/A
Frequency Stability					
EMI Test Receiver	Rohde & Schwarz	ESR3	103103	2025/02/20	2026/02/19
Loop Antenna	Rohde & Schwarz	HFH2-Z2	830749/001	2023/07/27	2026/07/26
Coaxial Cable	XINHANGWEIBO	HFH2-CC	335.3609	2025/02/20	2026/02/19
constant temperature and humidity testing machine	BACL	BTH-150	30211	2025/02/20	2026/02/19
AC power source	WACP	ES-CPF-SD45-600	EO20230629001	2025/02/20	2026/02/19

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Xiamen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 & RSS-GEN ISSUE 5 CLAUSE 6.8- ANTENNA REQUIREMENT

Applicable Standard

FCC§15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

RSS-GEN Clause 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connected Construction

The EUT has an COIL antenna for 13.56 MHz which the antenna gain is 0dBi, the antenna was permanently attached, fulfill the requirement of this section, please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) & RSS-GEN ISSUE 5 CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207, RSS-Gen Clause 8.8

EUT Setup

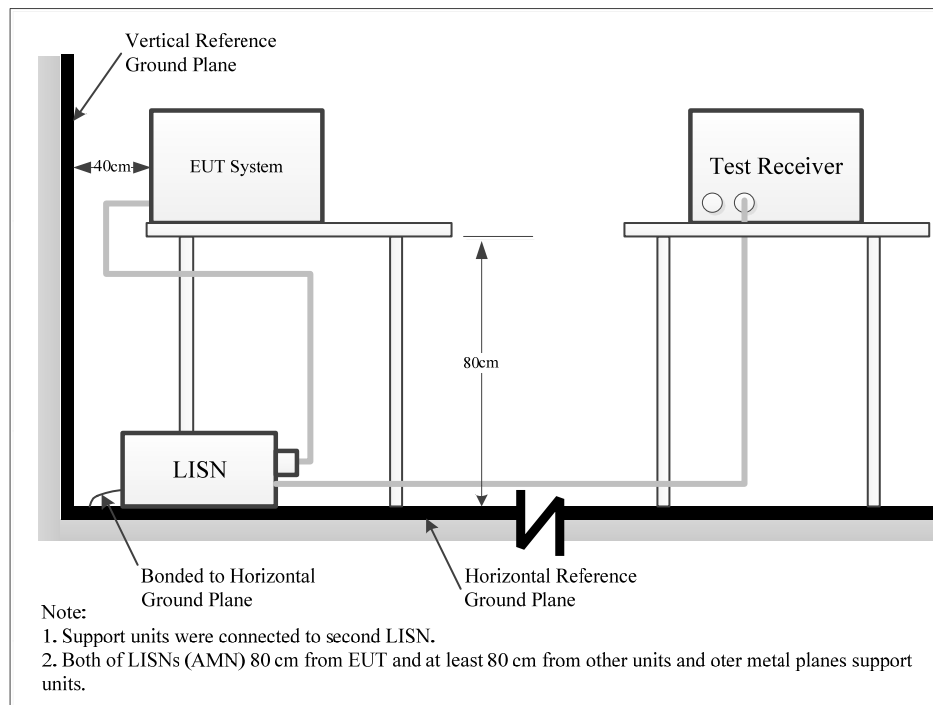

The setup of EUT is according with per ANSI C63.10-2020 + Cor.1-2023[▲] measurement procedure. The specification used was with the FCC Part 15.207, RSS-Gen limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Result & Margin Calculation

The result is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Result (dB}\mu\text{V)} &= \text{Reading (dB}\mu\text{V)} + \text{Factor (dB)}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Result (dB}\mu\text{V)}$$


Test Data

Temperature:	22.7°C
Relative Humidity:	56 %
ATM Pressure:	100.1 kPa
Test Date:	2025-08-29
Test Engineer:	Wlif Wu

Adapter #1(swiping card)

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro

Temp/Humi/ATM: 22.7°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

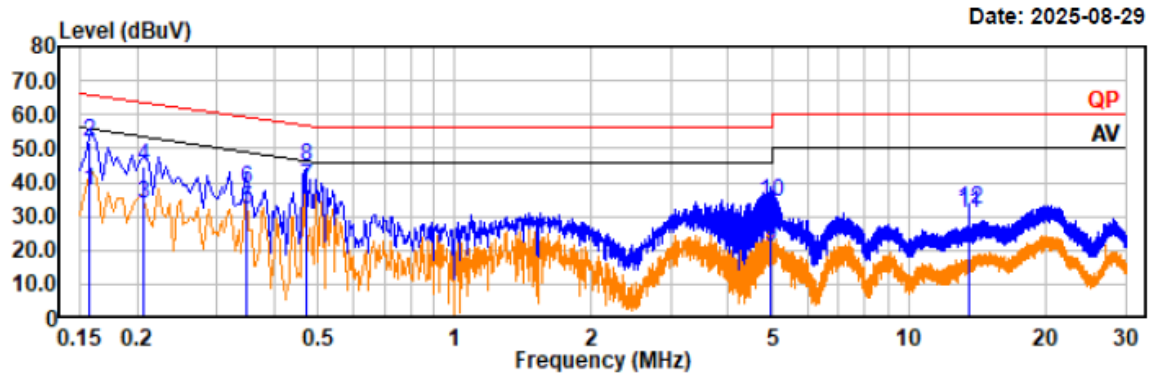


Trace: 1

Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.158	16.66	21.09	37.75	55.59	17.84	Line	Average
0.158	30.96	21.09	52.05	65.59	13.54	Line	QP
0.207	12.67	20.92	33.59	53.31	19.72	Line	Average
0.207	23.82	20.92	44.74	63.31	18.57	Line	QP
0.348	11.59	20.50	32.09	49.00	16.91	Line	Average
0.348	17.77	20.50	38.27	59.00	20.73	Line	QP
0.473	18.63	20.23	38.86	46.46	7.60	Line	Average
0.473	24.68	20.23	44.91	56.46	11.55	Line	QP
4.969	0.48	20.70	21.18	46.00	24.82	Line	Average
4.969	13.68	20.70	34.38	56.00	21.62	Line	QP
13.561	10.06	20.76	30.82	50.00	19.18	Line	Average
13.561	11.51	20.76	32.27	60.00	27.73	Line	QP

Project No.: 2407Z105199E-RF-A1
 Test Mode: NFC transmitting
 EUT Model: C20Pro

Temp/Humi/ATM: 22.7°C/56%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

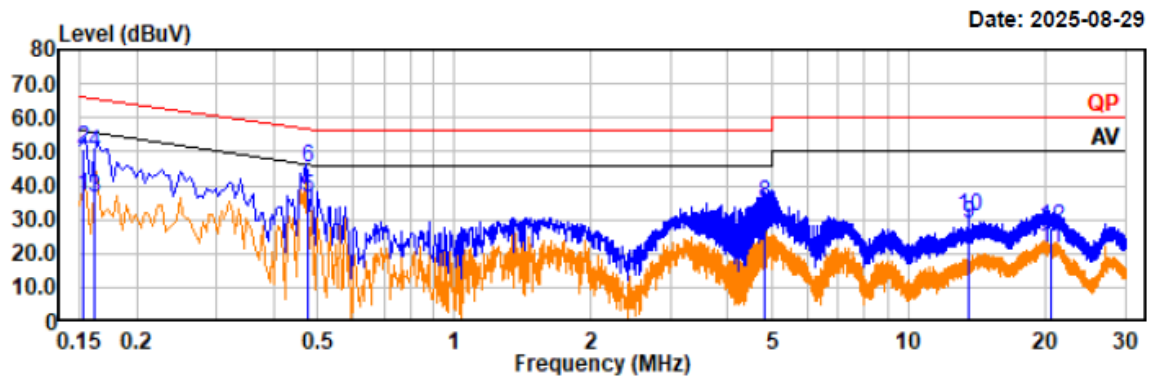

Trace: 1


Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.153	15.89	21.19	37.08	55.82	18.74	Neutral	Average
0.153	29.81	21.19	51.00	65.82	14.82	Neutral	QP
0.162	15.16	21.14	36.30	55.35	19.05	Neutral	Average
0.162	28.31	21.14	49.45	65.35	15.90	Neutral	QP
0.476	16.16	20.42	36.58	46.40	9.82	Neutral	Average
0.476	24.66	20.42	45.08	56.40	11.32	Neutral	QP
4.830	1.37	20.73	22.10	46.00	23.90	Neutral	Average
4.830	14.08	20.73	34.81	56.00	21.19	Neutral	QP
13.559	7.80	20.84	28.64	50.00	21.36	Neutral	Average
13.559	9.85	20.84	30.69	60.00	29.31	Neutral	QP
20.568	0.77	20.53	21.30	50.00	28.70	Neutral	Average
20.568	6.92	20.53	27.45	60.00	32.55	Neutral	QP

Adapter #1(no card swiping)

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro

Temp/Humi/ATM: 22.7°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

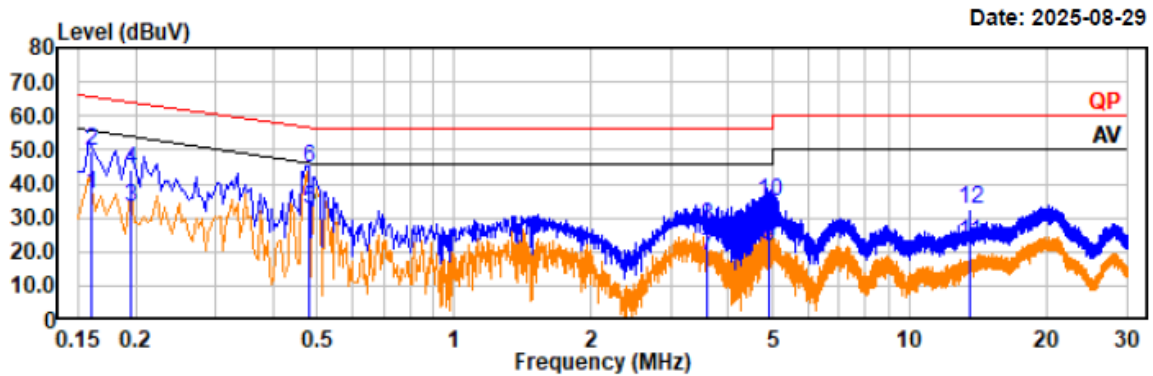


Trace: 1

Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.160	16.08	21.07	37.15	55.45	18.30	Line	Average
0.160	28.78	21.07	49.85	65.45	15.60	Line	QP
0.195	12.08	20.97	33.05	53.84	20.79	Line	Average
0.195	23.43	20.97	44.40	63.84	19.44	Line	QP
0.481	12.28	20.21	32.49	46.31	13.82	Line	Average
0.481	24.34	20.21	44.55	56.31	11.76	Line	QP
3.596	-2.21	20.95	18.74	46.00	27.26	Line	Average
3.596	6.43	20.95	27.38	56.00	28.62	Line	QP
4.909	0.75	20.71	21.46	46.00	24.54	Line	Average
4.909	14.01	20.71	34.72	56.00	21.28	Line	QP
13.559	1.60	20.76	22.36	50.00	27.64	Line	Average
13.559	11.66	20.76	32.42	60.00	27.58	Line	QP

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro

Temp/Humi/ATM: 22.7°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

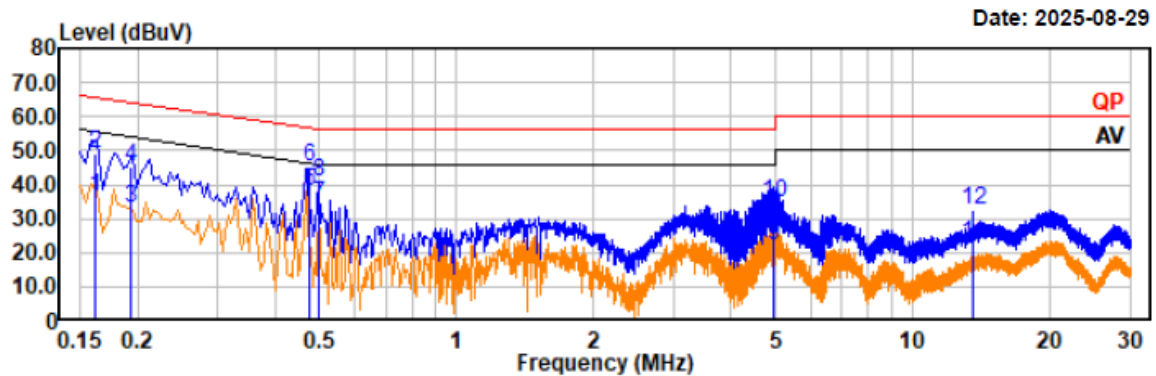

Trace: 1


Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.162	15.18	21.14	36.32	55.35	19.03	Neutral	Average
0.162	28.01	21.14	49.15	65.35	16.20	Neutral	QP
0.193	12.39	20.97	33.36	53.89	20.53	Neutral	Average
0.193	24.46	20.97	45.43	63.89	18.46	Neutral	QP
0.478	17.88	20.41	38.29	46.38	8.09	Neutral	Average
0.478	24.69	20.41	45.10	56.38	11.28	Neutral	QP
0.498	13.73	20.38	34.11	46.03	11.92	Neutral	Average
0.498	20.21	20.38	40.59	56.03	15.44	Neutral	QP
4.960	1.52	20.70	22.22	46.00	23.78	Neutral	Average
4.960	14.10	20.70	34.80	56.00	21.20	Neutral	QP
13.560	1.98	20.84	22.82	50.00	27.18	Neutral	Average
13.560	11.90	20.84	32.74	60.00	27.26	Neutral	QP

Adapter #2(swiping card)

Project No.: 2407Z105199E-RF-A1
 Test Mode: NFC transmitting
 EUT Model: C20pro

Temp/Humi/ATM: 22.7°C/56%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

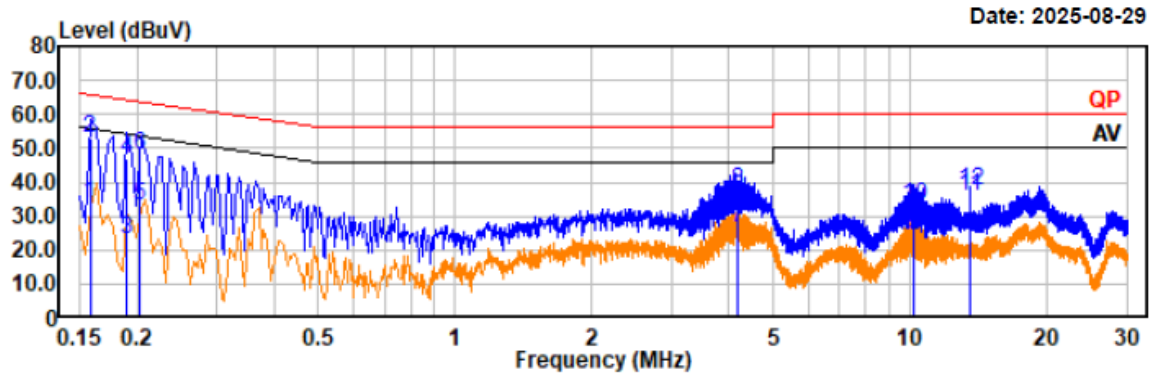


Trace: 1

Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.158	12.31	21.08	33.39	55.58	22.19	Line	Average
0.158	31.97	21.08	53.05	65.58	12.53	Line	QP
0.190	2.32	20.98	23.30	54.03	30.73	Line	Average
0.190	25.97	20.98	46.95	64.03	17.08	Line	QP
0.202	12.35	20.94	33.29	53.52	20.23	Line	Average
0.202	26.81	20.94	47.75	63.52	15.77	Line	QP
4.176	5.75	20.89	26.64	46.00	19.36	Line	Average
4.176	16.40	20.89	37.29	56.00	18.71	Line	QP
10.208	4.06	20.15	24.21	50.00	25.79	Line	Average
10.208	12.92	20.15	33.07	60.00	26.93	Line	QP
13.560	15.11	20.76	35.87	50.00	14.13	Line	Average
13.560	16.53	20.76	37.29	60.00	22.71	Line	QP

Project No.: 2407Z105199E-RF-A1
 Test Mode: NFC transmitting
 EUT Model: C20pro

Temp/Humi/ATM: 22.7°C/56%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

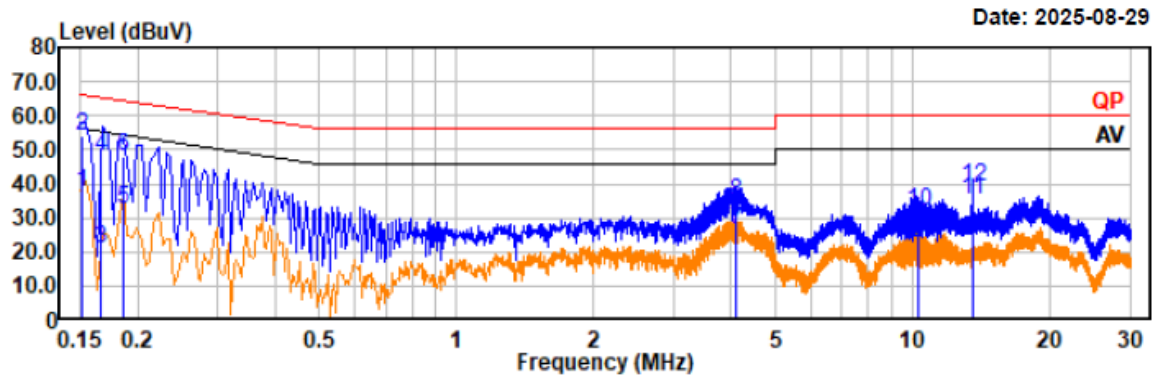

Trace: 1


Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.151	16.55	21.20	37.75	55.93	18.18	Neutral	Average
0.151	32.88	21.20	54.08	65.93	11.85	Neutral	QP
0.167	-0.39	21.11	20.72	55.11	34.39	Neutral	Average
0.167	27.08	21.11	48.19	65.11	16.92	Neutral	QP
0.187	11.69	21.01	32.70	54.17	21.47	Neutral	Average
0.187	27.24	21.01	48.25	64.17	15.92	Neutral	QP
4.084	5.73	20.92	26.65	46.00	19.35	Neutral	Average
4.084	14.07	20.92	34.99	56.00	21.01	Neutral	QP
10.255	2.34	20.44	22.78	50.00	27.22	Neutral	Average
10.255	11.62	20.44	32.06	60.00	27.94	Neutral	QP
13.560	14.46	20.84	35.30	50.00	14.70	Neutral	Average
13.560	18.45	20.84	39.29	60.00	20.71	Neutral	QP

Adapter #2(no card swiping)

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20pro

Temp/Humi/ATM: 22.7°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

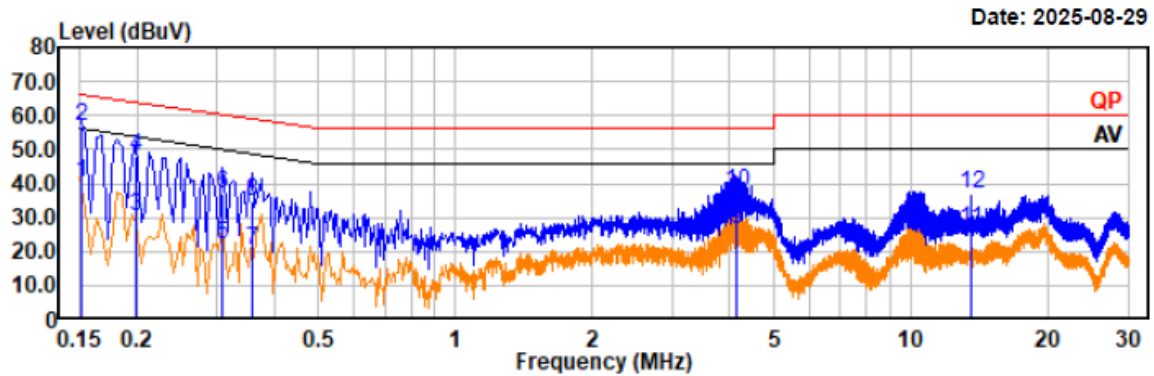


Trace: 1

Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.151	19.22	21.11	40.33	55.95	15.62	Line	Average
0.151	35.63	21.11	56.74	65.95	9.21	Line	QP
0.199	9.27	20.95	30.22	53.64	23.42	Line	Average
0.199	27.26	20.95	48.21	63.64	15.43	Line	QP
0.307	1.31	20.60	21.91	50.05	28.14	Line	Average
0.307	16.54	20.60	37.14	60.05	22.91	Line	QP
0.357	-0.26	20.47	20.21	48.79	28.58	Line	Average
0.357	14.29	20.47	34.76	58.79	24.03	Line	QP
4.137	5.37	20.90	26.27	46.00	19.73	Line	Average
4.137	16.51	20.90	37.41	56.00	18.59	Line	QP
13.560	5.80	20.76	26.56	50.00	23.44	Line	Average
13.560	16.44	20.76	37.20	60.00	22.80	Line	QP

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20pro

Temp/Humi/ATM: 22.7°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

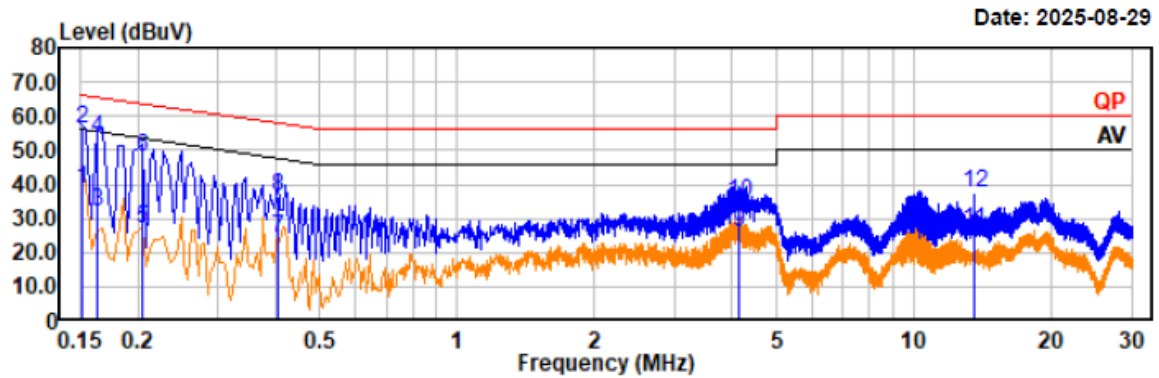

Trace: 1

Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBUV	Factor dB	Result dBUV	Limit dBUV	Margin dB	Phase	Remark
0.151	17.18	21.20	38.38	55.92	17.54	Neutral	Average
0.151	35.29	21.20	56.49	65.92	9.43	Neutral	QP
0.163	11.12	21.14	32.26	55.33	23.07	Neutral	Average
0.163	32.61	21.14	53.75	65.33	11.58	Neutral	QP
0.205	5.86	20.94	26.80	53.42	26.62	Neutral	Average
0.205	27.01	20.94	47.95	63.42	15.47	Neutral	QP
0.407	3.62	20.51	24.13	47.70	23.57	Neutral	Average
0.407	15.99	20.51	36.50	57.70	21.20	Neutral	QP
4.138	5.10	20.90	26.00	46.00	20.00	Neutral	Average
4.138	13.75	20.90	34.65	56.00	21.35	Neutral	QP
13.560	5.64	20.84	26.48	50.00	23.52	Neutral	Average
13.560	16.45	20.84	37.29	60.00	22.71	Neutral	QP

FCC§15.225, §15.205 & §15.209 & RSS-210 ISSUE 11 CLAUSE ANNEX B B.6- RADIATED EMISSIONS TEST

Applicable Standard

As per FCC Part 15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

As per RSS-210 ISSUE 11 Clause Annex B B.6 13.110-14.010 MHz

Devices in this band shall comply with the following requirements (the more strict limit applies at transition frequencies):

the field strength of any emission shall not exceed the following limits:

- i. 15.848 mV/m (84 dBμV/m) at 30 m, within the band 13.553-13.567 MHz
- ii. 334 μV/m (50.47 dBμV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz
- iii. 106 μV/m (40.51 dBμV/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz
- iv. RSS-Gen general field strength limits for frequencies outside the band 13.110 14.010 MHz

If both the single point and the limit distance are equal to or closer to the EUT than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (4):

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$


where

FS_{limit}	is the calculation of field strength at the limit distance, expressed in dBμV/m
FS_{max}	is the measured field strength, expressed in dBμV/m
$d_{\text{near field}}$	is the $\lambda/2\pi$ distance
d_{measure}	is the distance of the measurement point from the EUT
d_{limit}	is the reference distance or the distance of the $\lambda/2\pi$ point


Note: dBμV/m=20 log(μV/m)

Test System Setup

9 kHz-30MHz:

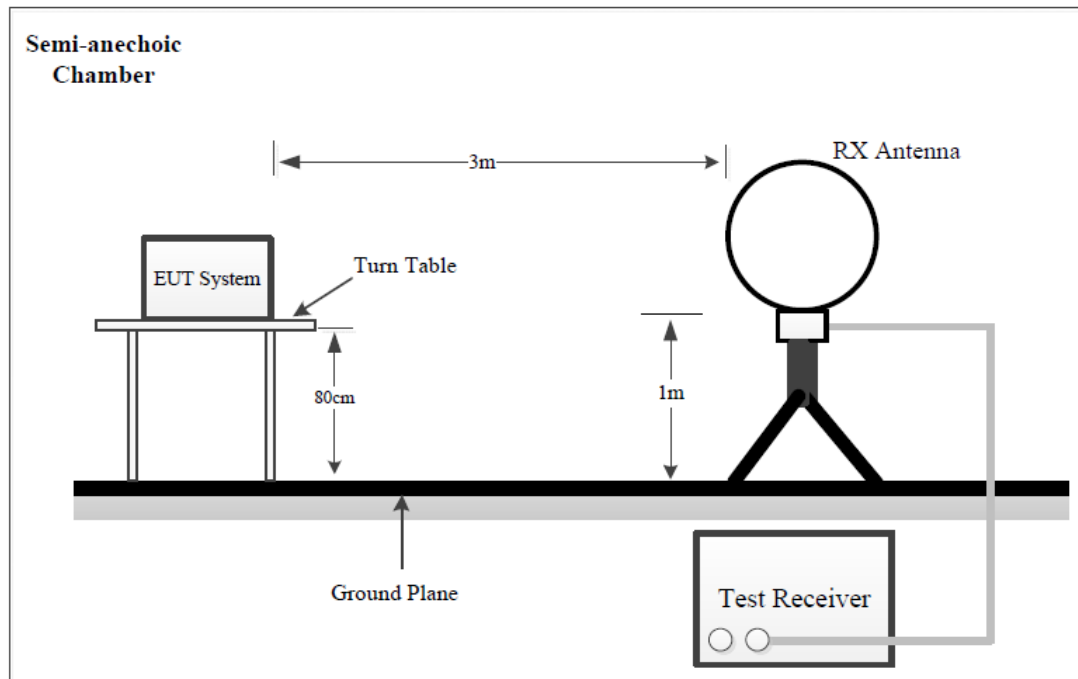

30MHz-1GHz:

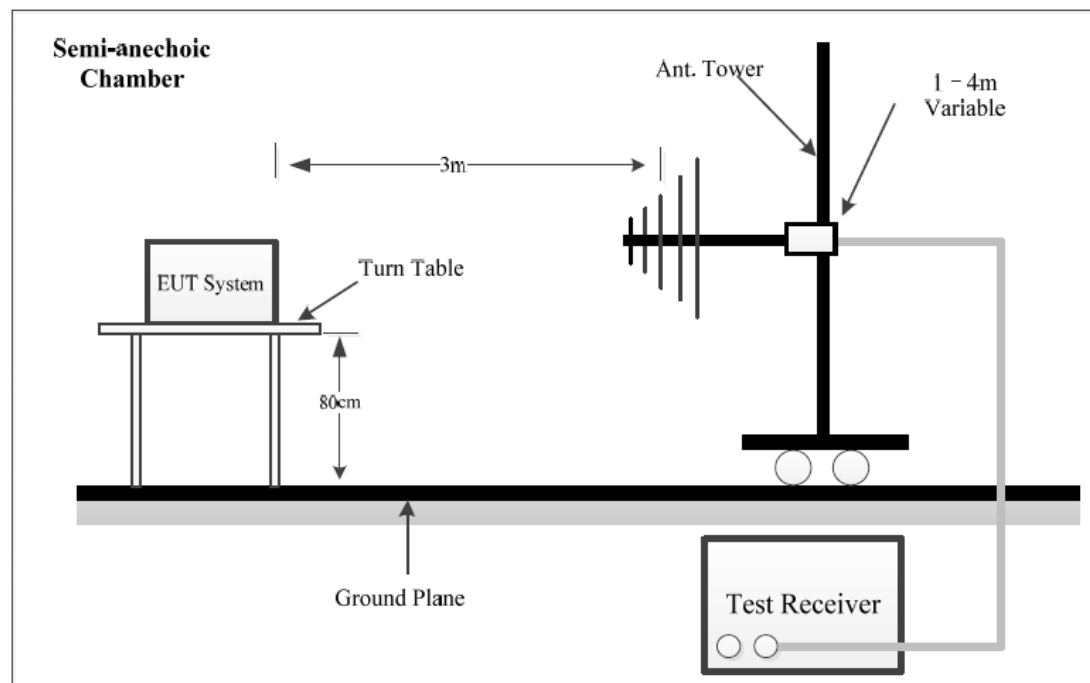

The radiated emission tests using the setup accordance with the ANSI C63.10-2020 + Cor.1-2023[▲]. The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	VBW	Measurement
9 kHz – 150 kHz	300Hz	1 kHz	PK
	200Hz	/	QP
150 kHz – 30 MHz	10 kHz	30 kHz	PK
	9kHz	/	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	PK
	120kHz	/	QP

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

Result & Margin Calculation

The Result is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Result (dBμV/m) = Meter Reading (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) – Result (dBμV/m)

The spurious emission from 9 kHz-30MHz of IC RSS-Gen standard, the unit of final result on the test plots are dBμV/m, so the limit should be added by 51.5dB from dBμA/m to dBμV/m.


Test Data

Frequency Range:	9kHz~30MHz	30MHz~1GHz
Temperature:	23.1 °C	23.5 °C
Relative Humidity:	57 %	59 %
ATM Pressure:	100.1 kPa	100.1 kPa
Test Date:	2025-08-31	2025-08-30
Test Engineer:	Wlif Wu	Wlif Wu

1) 9 kHz~150 kHz:**Adapter #1(swiping card)****Parallel:**

Project No.: 2407Z105199E-RF-A1
 Test Mode: NFC transmitting
 EUT Model: C20Pro
 Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

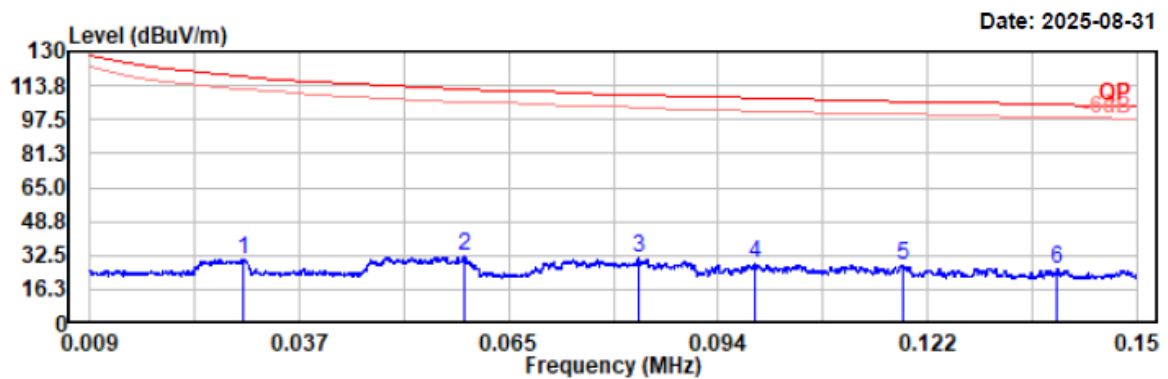


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.030	10.98	19.91	30.89	118.14	87.25	Peak
0.059	12.14	19.91	32.05	112.13	80.08	Peak
0.083	11.37	19.74	31.11	109.24	78.13	Peak
0.099	9.16	19.74	28.90	107.73	78.83	Peak
0.118	8.40	19.73	28.13	106.13	78.00	Peak
0.139	6.36	19.73	26.09	104.73	78.64	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

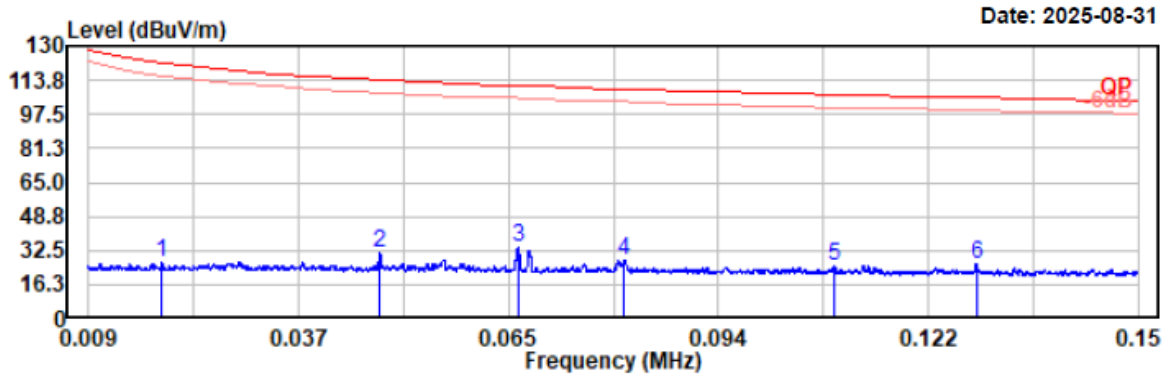


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.019	6.77	19.78	26.55	122.09	95.54	Peak
0.048	11.25	19.91	31.16	113.96	82.80	Peak
0.067	14.02	19.84	33.86	111.13	77.27	Peak
0.081	8.12	19.72	27.84	109.44	81.60	Peak
0.109	5.33	19.73	25.06	106.84	81.78	Peak
0.128	5.97	19.73	25.70	105.45	79.75	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

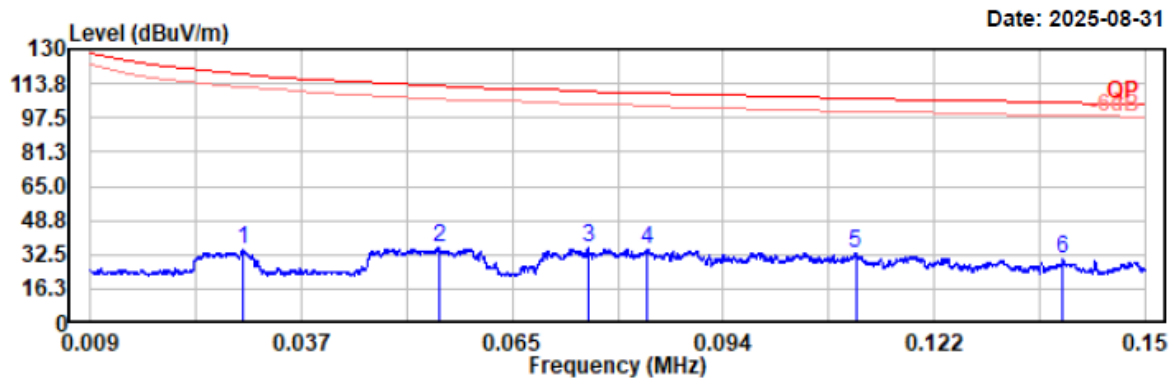


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.029	14.62	19.90	34.52	118.23	83.71	Peak
0.056	15.69	19.91	35.60	112.70	77.10	Peak
0.075	15.73	19.76	35.49	110.05	74.56	Peak
0.084	15.53	19.75	35.28	109.17	73.89	Peak
0.111	13.36	19.73	33.09	106.68	73.59	Peak
0.139	10.34	19.73	30.07	104.75	74.68	Peak

Adapter #1(no card swiping)**Parallel:**

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

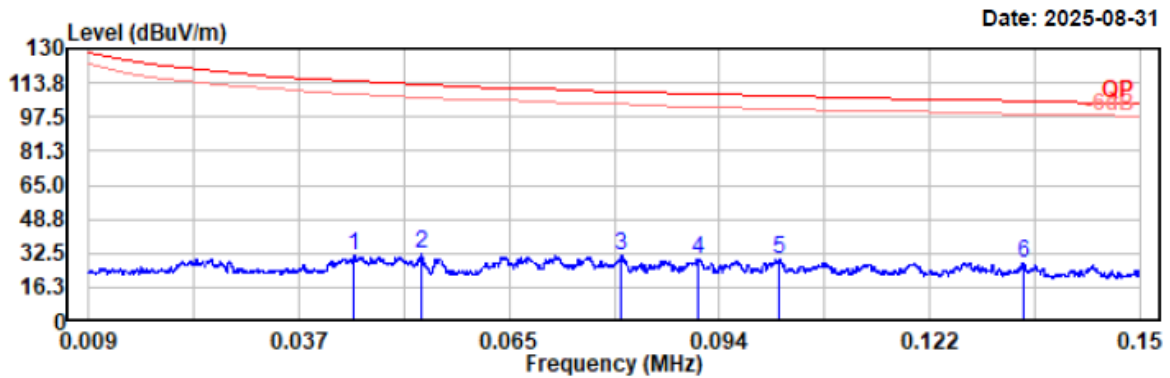


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.045	11.11	19.91	31.02	114.61	83.59	Peak
0.054	11.93	19.91	31.84	113.02	81.18	Peak
0.081	11.55	19.72	31.27	109.49	78.22	Peak
0.091	10.19	19.80	29.99	108.46	78.47	Peak
0.102	9.92	19.73	29.65	107.46	77.81	Peak
0.134	8.29	19.73	28.02	105.04	77.02	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

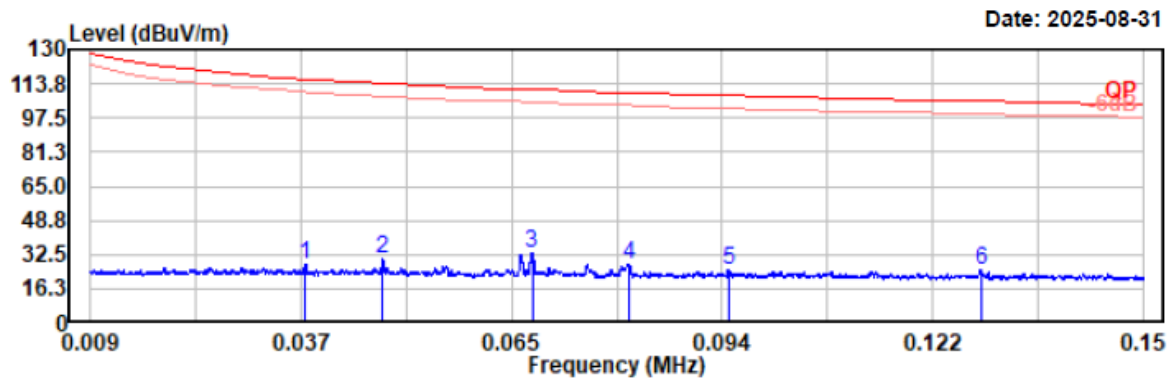


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.038	7.77	19.91	27.68	116.06	88.38	Peak
0.048	10.34	19.91	30.25	113.96	83.71	Peak
0.068	13.43	19.83	33.26	110.94	77.68	Peak
0.081	8.48	19.72	28.20	109.42	81.22	Peak
0.094	5.23	19.78	25.01	108.10	83.09	Peak
0.128	5.53	19.73	25.26	105.45	80.19	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

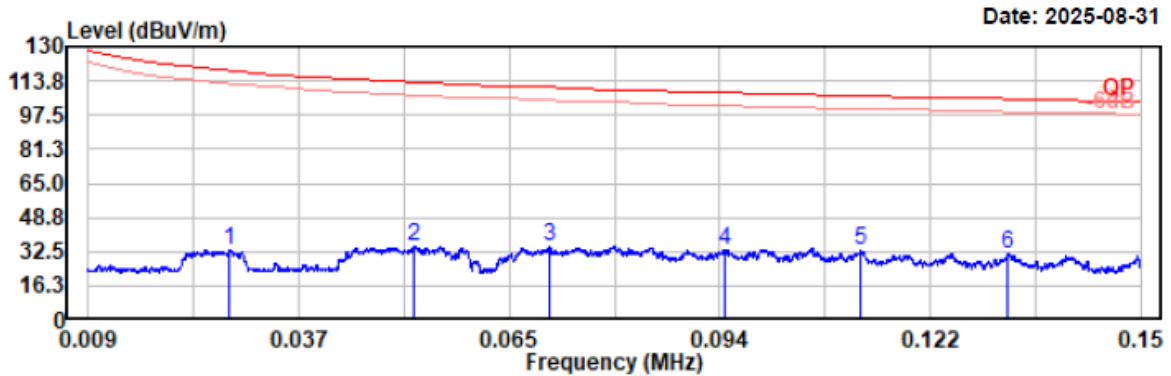

Condition: PK RBW:300Hz VBW:1kHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.028	13.37	19.89	33.26	118.68	85.42	Peak
0.053	15.28	19.91	35.19	113.18	77.99	Peak
0.071	14.81	19.80	34.61	110.60	75.99	Peak
0.094	13.81	19.78	33.59	108.13	74.54	Peak
0.113	13.00	19.73	32.73	106.58	73.85	Peak
0.132	11.57	19.73	31.30	105.18	73.88	Peak

Adapter #2(swiping card)

Parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

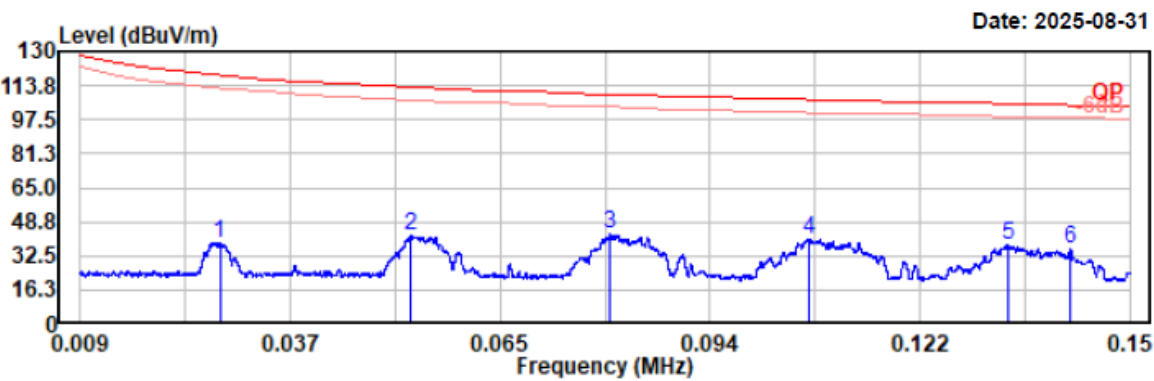


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.028	18.75	19.89	38.64	118.76	80.12	Peak
0.053	22.04	19.91	41.95	113.05	71.10	Peak
0.080	22.96	19.71	42.67	109.53	66.86	Peak
0.107	20.97	19.73	40.70	107.04	66.34	Peak
0.134	17.72	19.73	37.45	105.09	67.64	Peak
0.142	15.98	19.73	35.71	104.56	68.85	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

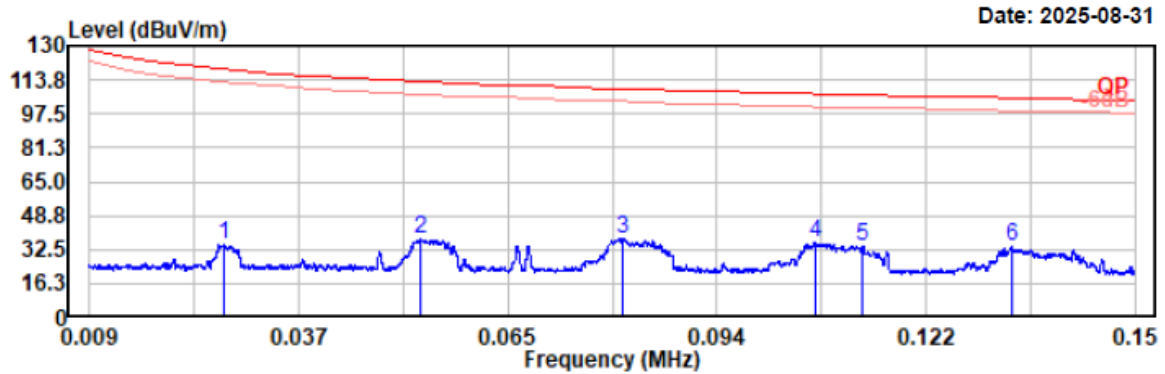


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.027	14.88	19.88	34.76	119.00	84.24	Peak
0.054	17.44	19.91	37.35	113.01	75.66	Peak
0.081	17.77	19.72	37.49	109.44	71.95	Peak
0.107	15.80	19.73	35.53	107.04	71.51	Peak
0.113	14.55	19.73	34.28	106.52	72.24	Peak
0.133	13.96	19.73	33.69	105.11	71.42	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

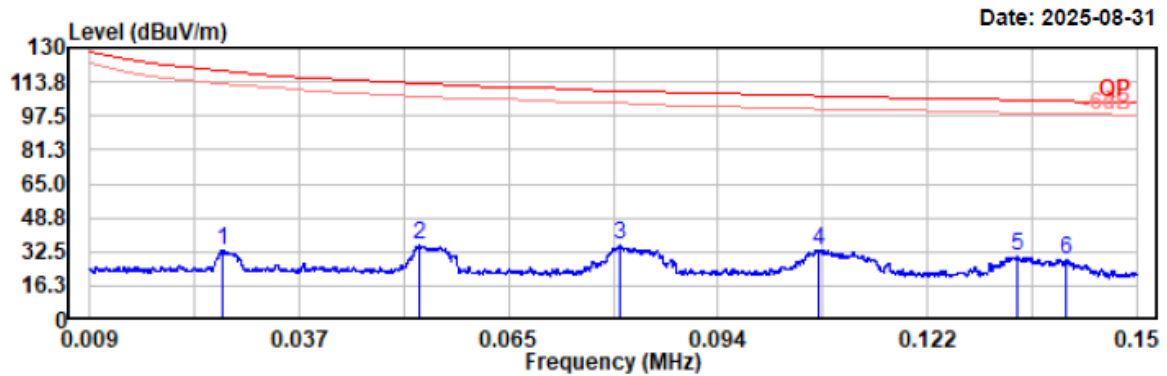

Condition: PK RBW:300Hz VBW:1kHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.027	13.17	19.88	33.05	119.09	86.04	Peak
0.053	15.72	19.91	35.63	113.06	77.43	Peak
0.080	15.71	19.71	35.42	109.51	74.09	Peak
0.107	13.55	19.73	33.28	107.00	73.72	Peak
0.134	10.43	19.73	30.16	105.07	74.91	Peak
0.140	9.13	19.73	28.86	104.65	75.79	Peak

Adapter #2(no card swiping)

Parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

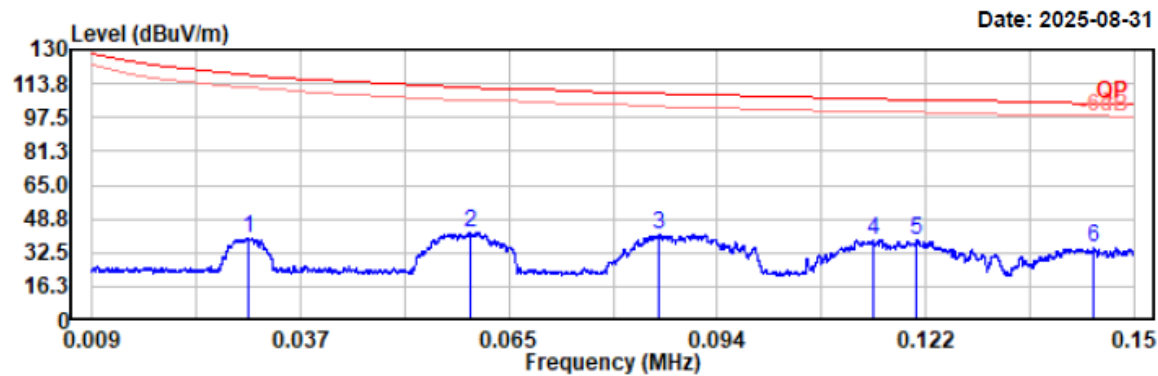


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.030	19.63	19.91	39.54	118.07	78.53	Peak
0.060	22.24	19.91	42.15	112.03	69.88	Peak
0.086	21.32	19.77	41.09	108.94	67.85	Peak
0.115	19.00	19.73	38.73	106.42	67.69	Peak
0.121	18.67	19.73	38.40	105.98	67.58	Peak
0.145	14.88	19.73	34.61	104.41	69.80	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

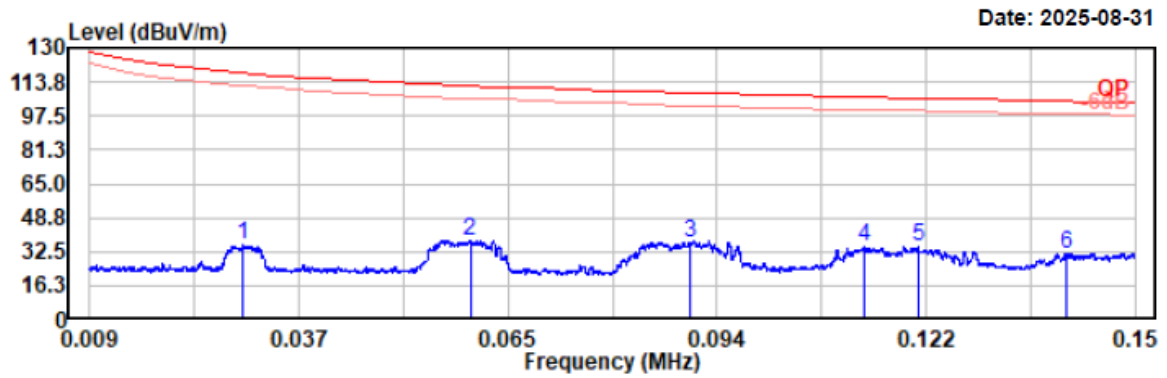


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.030	15.71	19.91	35.62	118.17	82.55	Peak
0.060	18.01	19.91	37.92	112.00	74.08	Peak
0.090	17.17	19.81	36.98	108.53	71.55	Peak
0.113	14.91	19.73	34.64	106.52	71.88	Peak
0.121	14.96	19.73	34.69	105.97	71.28	Peak
0.141	11.94	19.73	31.67	104.63	72.96	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

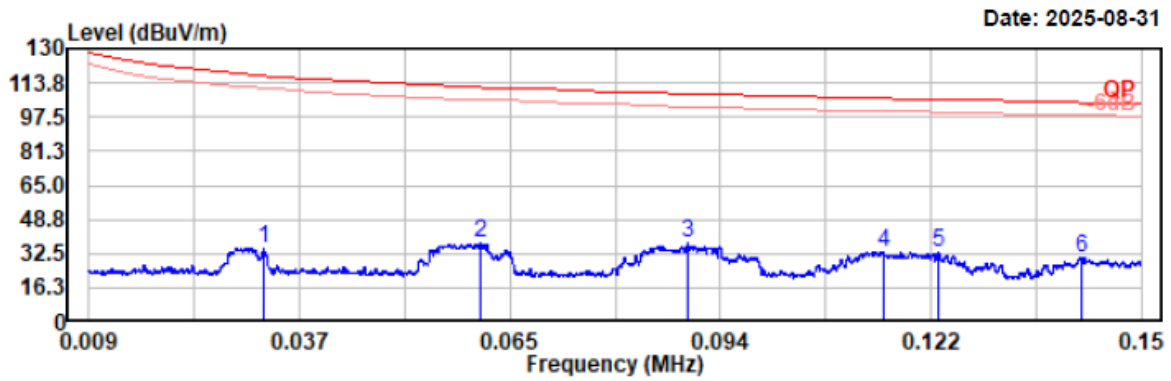

Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.032	15.14	19.91	35.05	117.41	82.36	Peak
0.061	17.41	19.90	37.31	111.85	74.54	Peak
0.089	17.42	19.80	37.22	108.60	71.38	Peak
0.115	13.62	19.73	33.35	106.36	73.01	Peak
0.123	13.24	19.73	32.97	105.82	72.85	Peak
0.142	10.55	19.73	30.28	104.57	74.29	Peak


2) 150 kHz ~30MHz:

Adapter #1(swiping card)

Parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

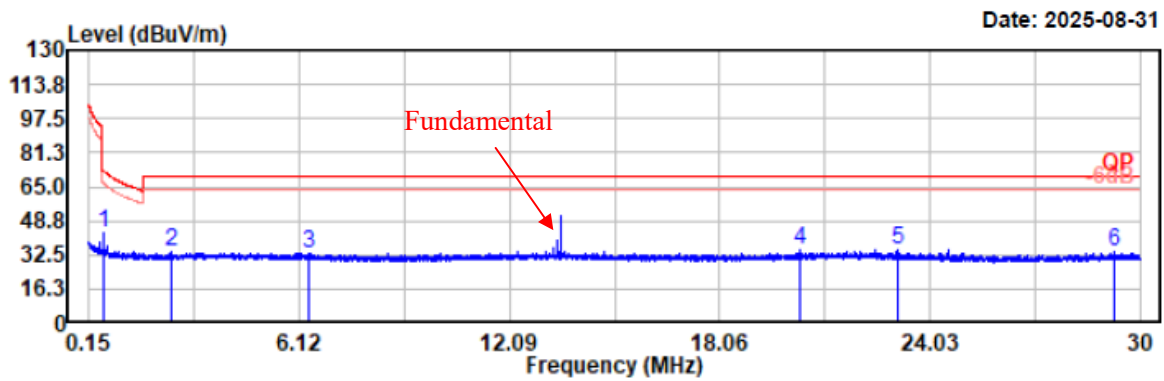


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.556	23.05	19.80	42.85	72.70	29.85	Peak
2.478	14.22	19.71	33.93	69.54	35.61	Peak
6.407	13.47	19.76	33.23	69.54	36.31	Peak
20.320	14.70	20.10	34.80	69.54	34.74	Peak
23.132	14.94	20.17	35.11	69.54	34.43	Peak
29.239	14.03	20.00	34.03	69.54	35.51	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

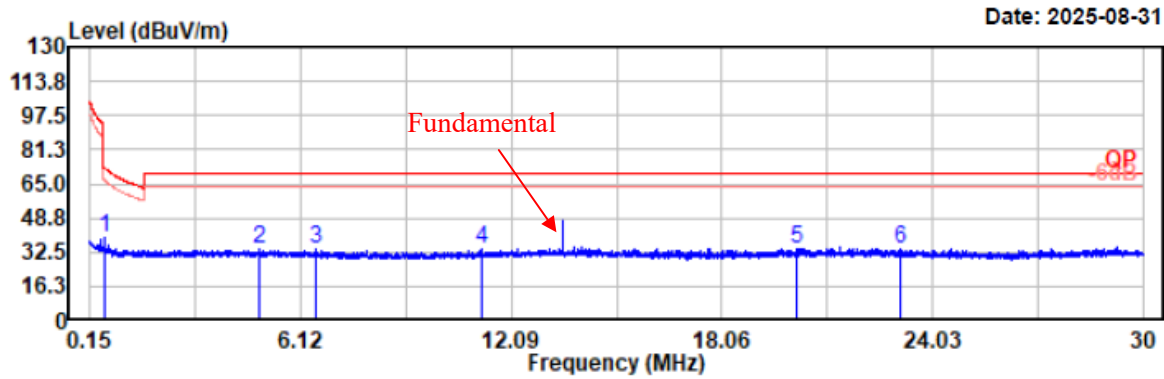


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.559	19.71	19.80	39.51	72.66	33.15	Peak
4.944	14.51	19.68	34.19	69.54	35.35	Peak
6.559	14.64	19.73	34.37	69.54	35.17	Peak
11.269	13.91	19.72	33.63	69.54	35.91	Peak
20.200	14.37	20.09	34.46	69.54	35.08	Peak
23.126	14.34	20.17	34.51	69.54	35.03	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

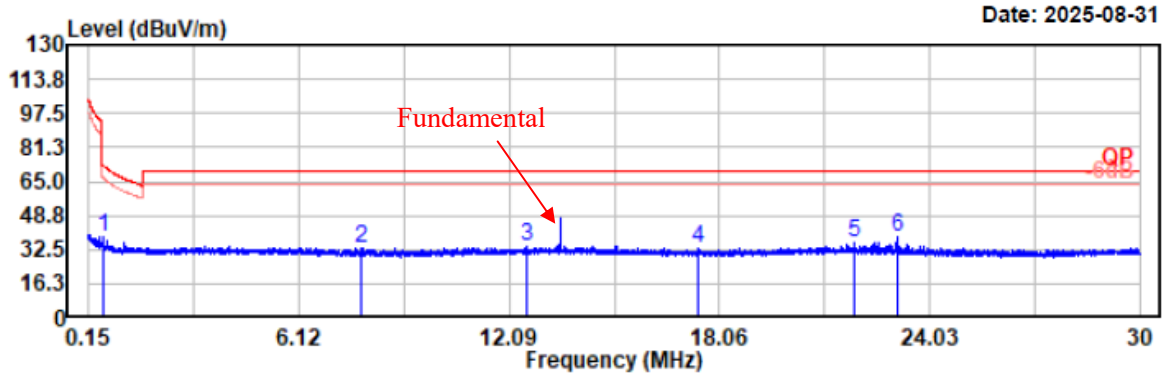


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.559	18.85	19.80	38.65	72.66	34.01	Peak
7.899	13.60	19.68	33.28	69.54	36.26	Peak
12.603	14.41	19.73	34.14	69.54	35.40	Peak
17.469	13.15	19.92	33.07	69.54	36.47	Peak
21.908	15.77	20.14	35.91	69.54	33.63	Peak
23.129	18.22	20.17	38.39	69.54	31.15	Peak

Adapter #1(no card swiping)**Parallel:**

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

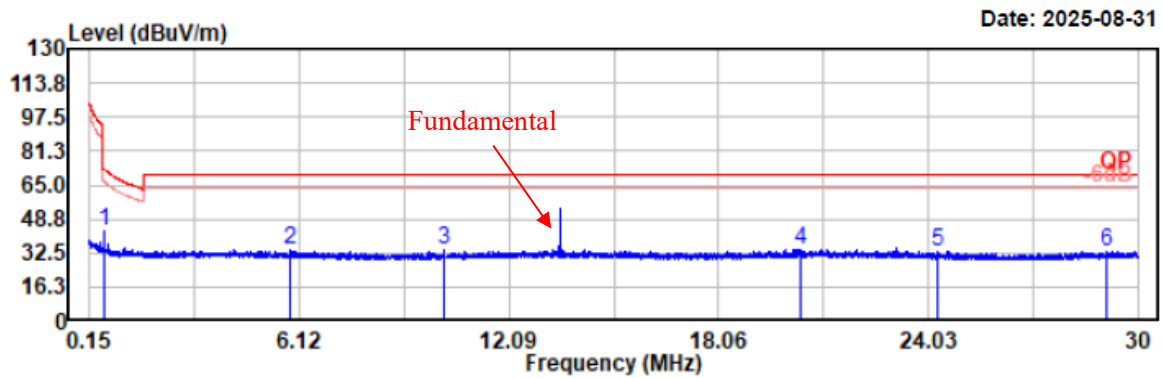


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.559	22.80	19.80	42.60	72.66	30.06	Peak
5.881	14.26	19.80	34.06	69.54	35.48	Peak
10.230	14.20	19.70	33.90	69.54	35.64	Peak
20.379	14.00	20.10	34.10	69.54	35.44	Peak
24.290	13.12	20.21	33.33	69.54	36.21	Peak
29.116	13.23	20.01	33.24	69.54	36.30	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

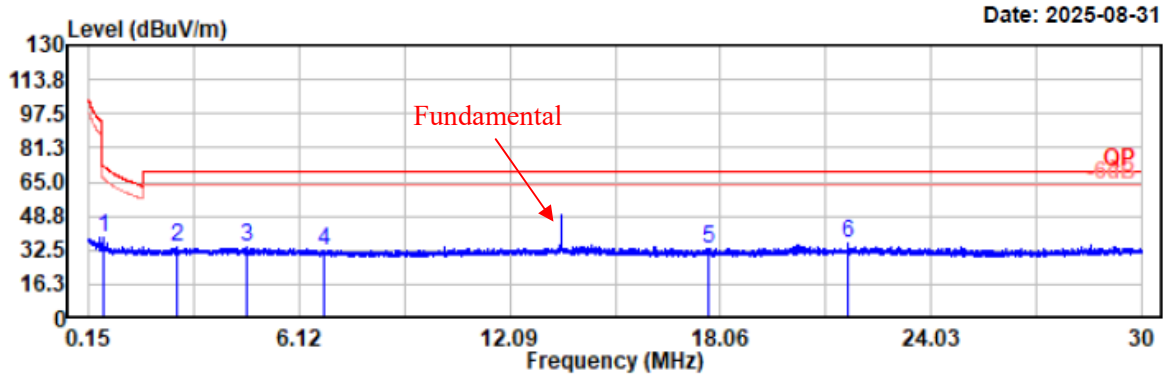


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.556	19.01	19.80	38.81	72.70	33.89	Peak
2.631	14.21	19.74	33.95	69.54	35.59	Peak
4.642	14.07	19.71	33.78	69.54	35.76	Peak
6.830	12.61	19.71	32.32	69.54	37.22	Peak
17.696	13.53	19.94	33.47	69.54	36.07	Peak
21.663	15.67	20.13	35.80	69.54	33.74	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

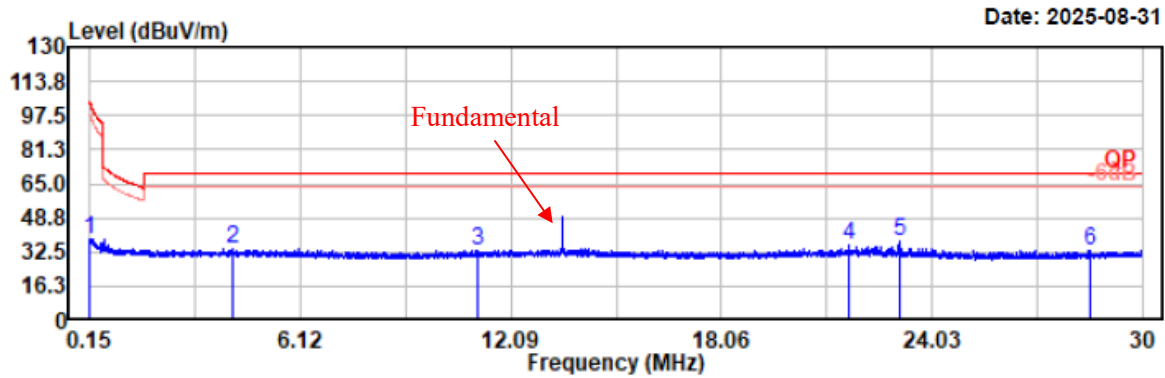


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.150	19.24	19.72	38.96	104.08	65.12	Peak
4.180	14.37	19.74	34.11	69.54	35.43	Peak
11.141	13.41	19.71	33.12	69.54	36.42	Peak
21.663	15.82	20.13	35.95	69.54	33.59	Peak
23.129	17.85	20.17	38.02	69.54	31.52	Peak
28.490	13.11	20.04	33.15	69.54	36.39	Peak

Adapter #2(swiping card)**Parallel:**

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

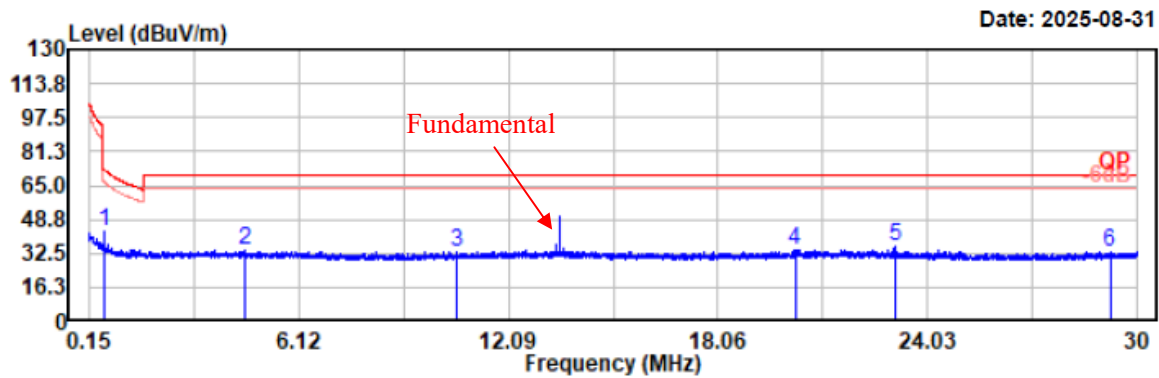


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.559	23.01	19.80	42.81	72.66	29.85	Peak
4.577	14.12	19.71	33.83	69.54	35.71	Peak
10.612	13.82	19.71	33.53	69.54	36.01	Peak
20.260	14.06	20.10	34.16	69.54	35.38	Peak
23.129	15.70	20.17	35.87	69.54	33.67	Peak
29.236	13.18	20.00	33.18	69.54	36.36	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

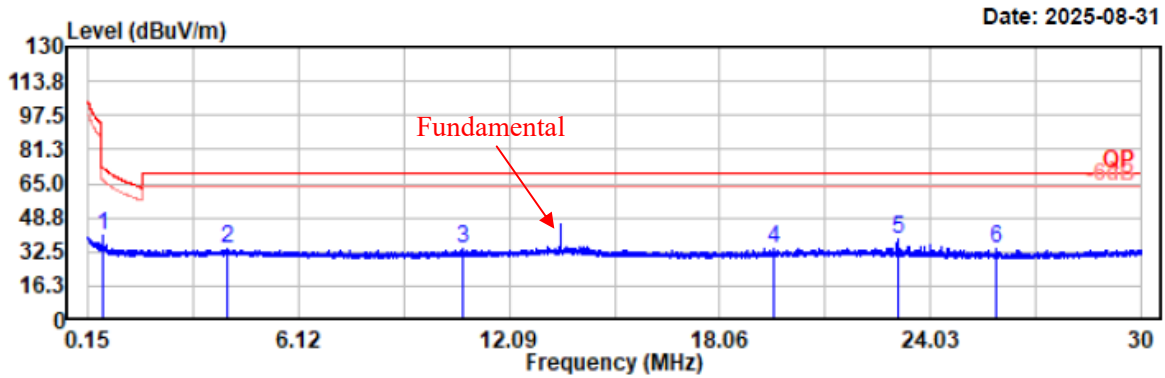


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.556	20.17	19.80	39.97	72.70	32.73	Peak
4.117	14.13	19.75	33.88	69.54	35.66	Peak
10.789	13.93	19.71	33.64	69.54	35.90	Peak
19.588	14.17	20.07	34.24	69.54	35.30	Peak
23.129	17.96	20.17	38.13	69.54	31.41	Peak
25.878	13.53	20.17	33.70	69.54	35.84	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

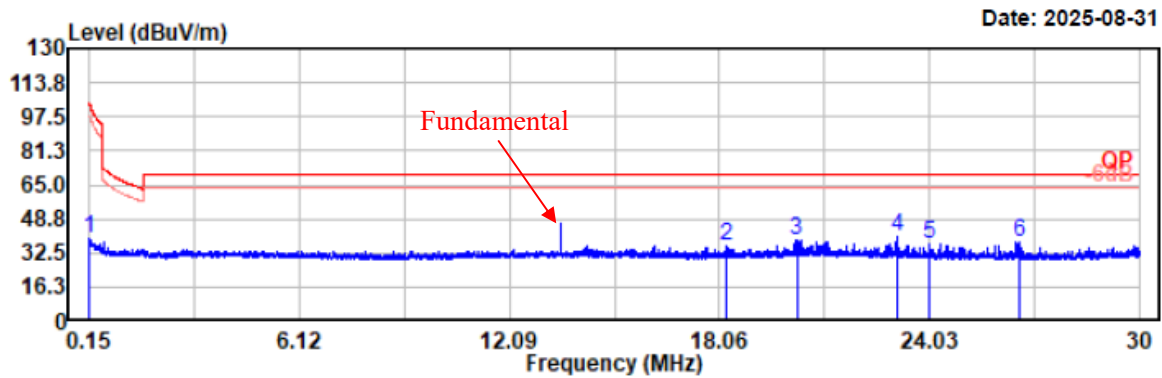


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.165	19.31	19.72	39.03	103.26	64.23	Peak
18.242	16.13	19.97	36.10	69.54	33.44	Peak
20.260	18.73	20.10	38.83	69.54	30.71	Peak
23.129	20.24	20.17	40.41	69.54	29.13	Peak
24.045	16.84	20.19	37.03	69.54	32.51	Peak
26.612	17.63	20.14	37.77	69.54	31.77	Peak

Adapter #2(no card swiping)**Parallel:**

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

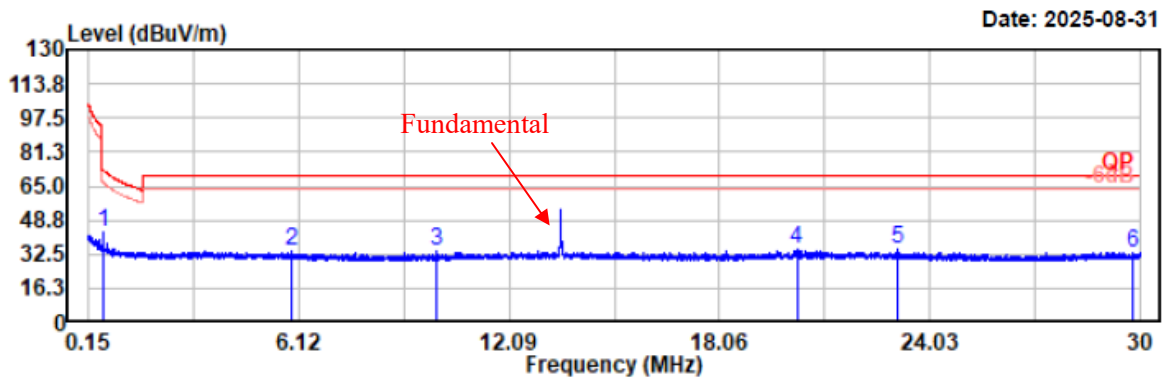


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.556	23.53	19.80	43.33	72.70	29.37	Peak
5.905	14.10	19.80	33.90	69.54	35.64	Peak
10.015	14.11	19.70	33.81	69.54	35.73	Peak
20.260	14.89	20.10	34.99	69.54	34.55	Peak
23.132	14.67	20.17	34.84	69.54	34.70	Peak
29.785	13.54	19.97	33.51	69.54	36.03	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

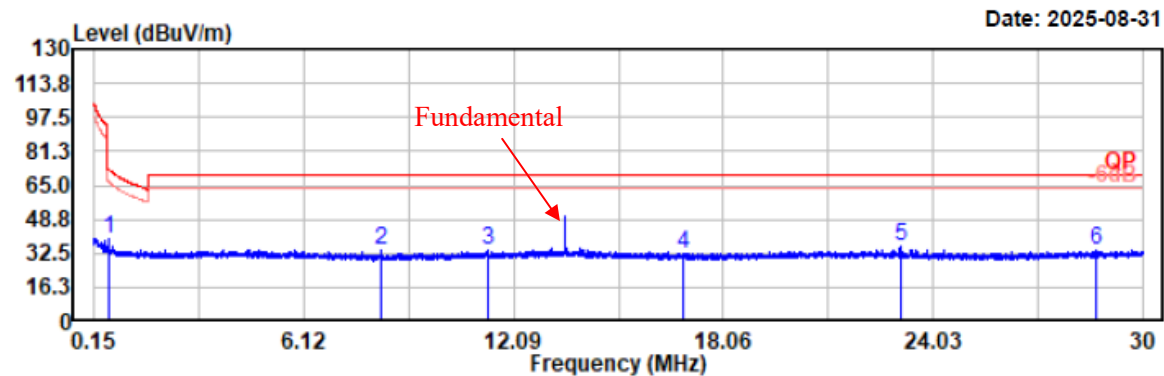


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.559	19.75	19.80	39.55	72.66	33.11	Peak
8.296	14.21	19.69	33.90	69.54	35.64	Peak
11.338	14.05	19.72	33.77	69.54	35.77	Peak
16.920	12.81	19.89	32.70	69.54	36.84	Peak
23.129	16.14	20.17	36.31	69.54	33.23	Peak
28.690	14.01	20.02	34.03	69.54	35.51	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

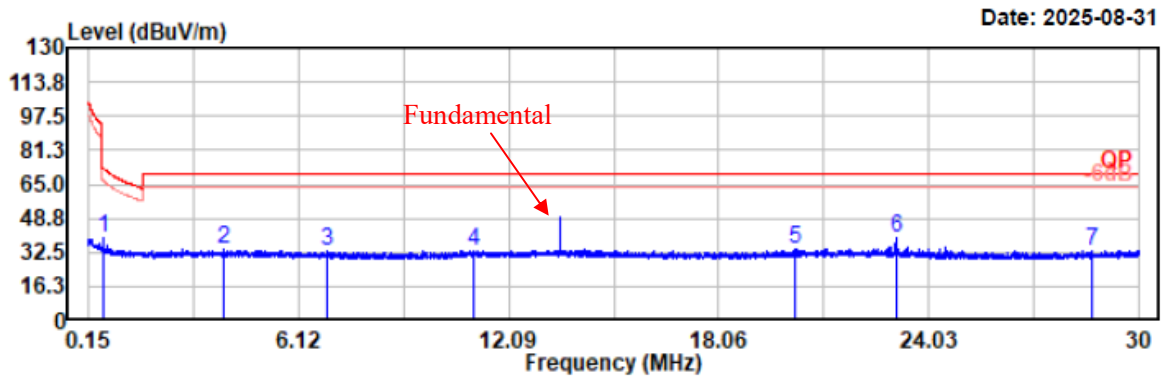

Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.559	19.74	19.80	39.54	72.66	33.12	Peak
3.974	14.58	19.76	34.34	69.54	35.20	Peak
6.953	13.18	19.68	32.86	69.54	36.68	Peak
11.096	13.79	19.71	33.50	69.54	36.04	Peak
20.257	14.05	20.10	34.15	69.54	35.39	Peak
23.132	19.12	20.17	39.29	69.54	30.25	Peak
28.684	13.37	20.03	33.40	69.54	36.14	Peak


3) 13.11M-14.01M:

Adapter #1(swiping card)

Parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

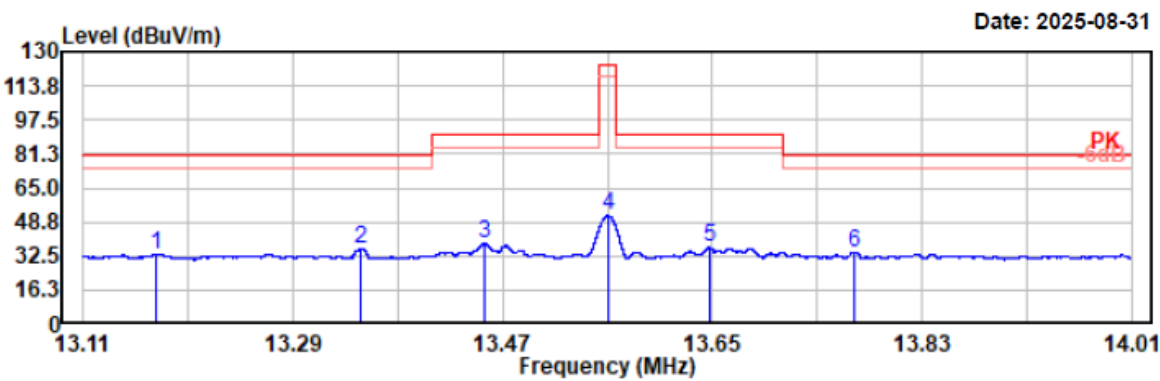


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.172	13.70	19.74	33.44	80.51	47.07	Peak
13.349	16.28	19.74	36.02	80.51	44.49	Peak
13.454	18.59	19.74	38.33	90.47	52.14	Peak
13.560	31.96	19.74	51.70	124.00	72.30	Peak
13.647	16.67	19.74	36.41	90.47	54.06	Peak
13.772	14.67	19.75	34.42	80.51	46.09	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

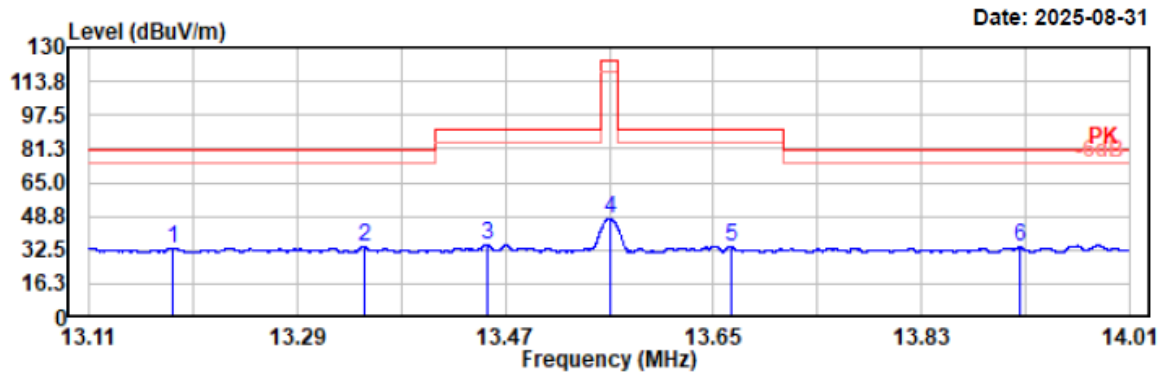


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.183	13.70	19.74	33.44	80.51	47.07	Peak
13.348	14.27	19.74	34.01	80.51	46.50	Peak
13.454	15.66	19.74	35.40	90.47	55.07	Peak
13.560	28.10	19.74	47.84	124.00	76.16	Peak
13.665	14.66	19.74	34.40	90.47	56.07	Peak
13.915	13.99	19.75	33.74	80.51	46.77	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

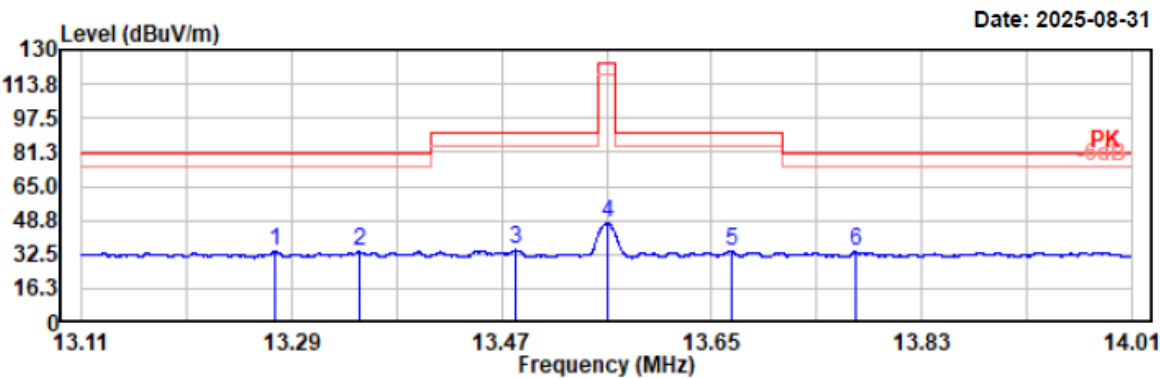


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.276	14.06	19.74	33.80	80.51	46.71	Peak
13.348	13.89	19.74	33.63	80.51	46.88	Peak
13.482	14.78	19.74	34.52	90.47	55.95	Peak
13.560	27.60	19.74	47.34	124.00	76.66	Peak
13.667	14.37	19.74	34.11	90.47	56.36	Peak
13.773	13.98	19.75	33.73	80.51	46.78	Peak

Adapter #1(no card swiping)**Parallel:**

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

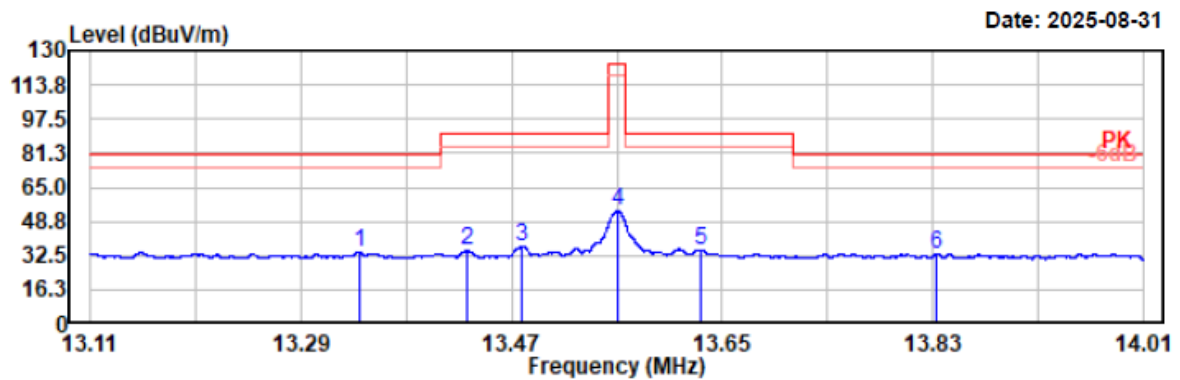


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.339	14.10	19.74	33.84	80.51	46.67	Peak
13.432	14.88	19.74	34.62	90.47	55.85	Peak
13.479	16.99	19.74	36.73	90.47	53.74	Peak
13.560	33.82	19.74	53.56	124.00	70.44	Peak
13.631	15.44	19.74	35.18	90.47	55.29	Peak
13.834	13.79	19.75	33.54	80.51	46.97	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

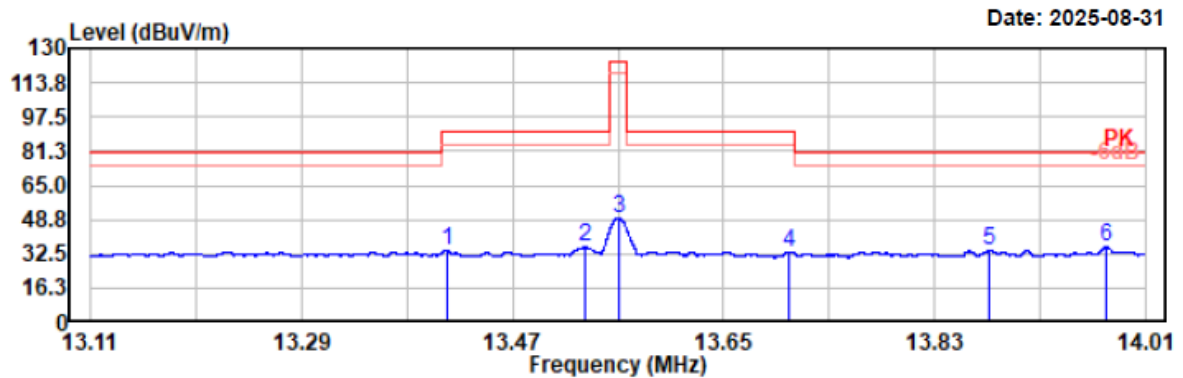


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.413	14.06	19.74	33.80	90.47	56.67	Peak
13.532	15.82	19.74	35.56	90.47	54.91	Peak
13.560	29.87	19.74	49.61	124.00	74.39	Peak
13.707	13.76	19.74	33.50	90.47	56.97	Peak
13.877	14.38	19.75	34.13	80.51	46.38	Peak
13.977	15.76	19.75	35.51	80.51	45.00	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

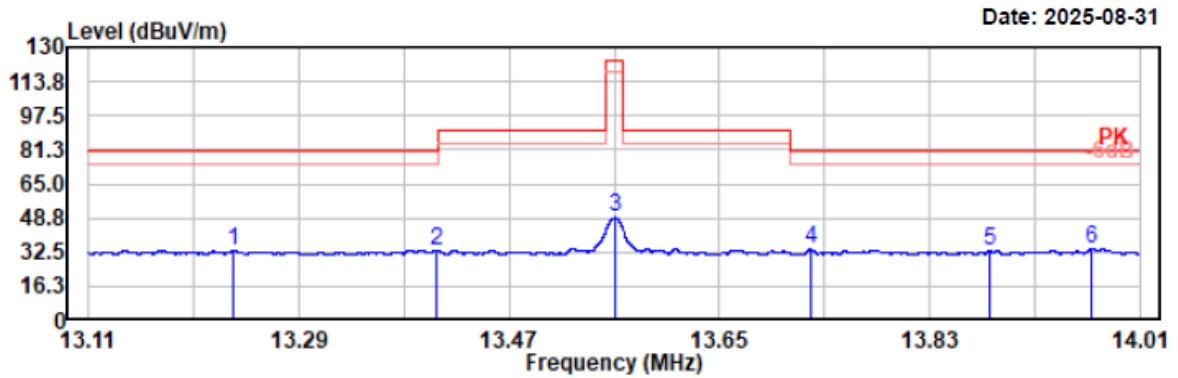


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.234	13.50	19.74	33.24	80.51	47.27	Peak
13.408	13.52	19.74	33.26	80.51	47.25	Peak
13.561	29.15	19.74	48.89	124.00	75.11	Peak
13.728	13.91	19.74	33.65	80.51	46.86	Peak
13.882	13.21	19.75	32.96	80.51	47.55	Peak
13.969	14.21	19.75	33.96	80.51	46.55	Peak

Adapter #2(swiping card)**Parallel:**

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

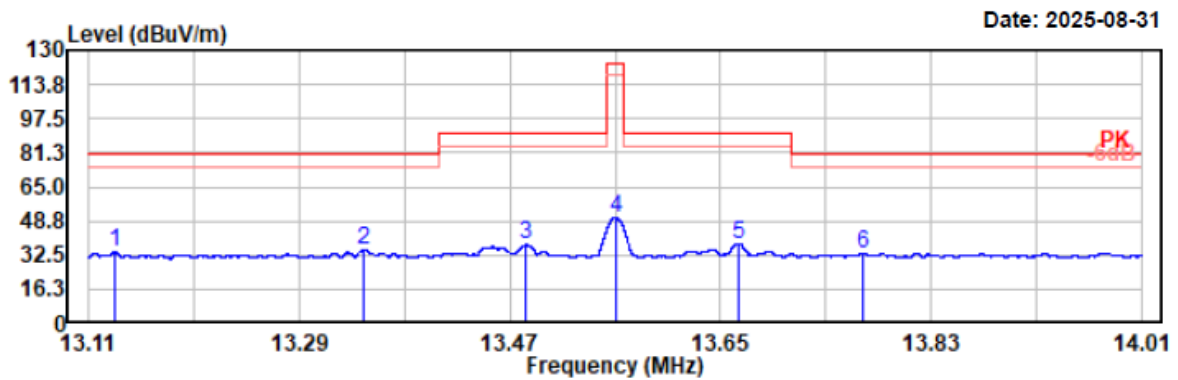


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.132	14.06	19.74	33.80	80.51	46.71	Peak
13.345	15.31	19.74	35.05	80.51	45.46	Peak
13.484	17.57	19.74	37.31	90.47	53.16	Peak
13.560	30.70	19.74	50.44	124.00	73.56	Peak
13.665	18.35	19.74	38.09	90.47	52.38	Peak
13.771	13.76	19.75	33.51	80.51	47.00	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

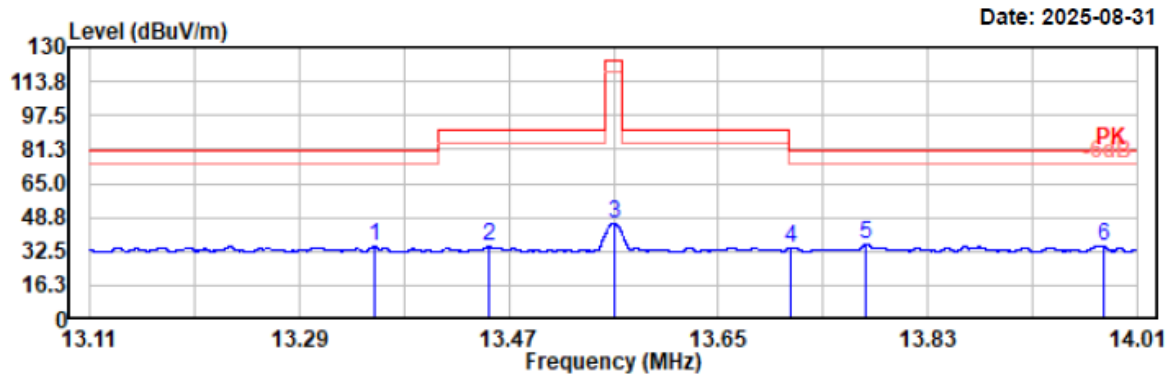


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.355	14.91	19.74	34.65	80.51	45.86	Peak
13.453	15.00	19.74	34.74	90.47	55.73	Peak
13.560	26.32	19.74	46.06	124.00	77.94	Peak
13.712	14.46	19.74	34.20	80.51	46.31	Peak
13.777	15.95	19.75	35.70	80.51	44.81	Peak
13.981	15.26	19.75	35.01	80.51	45.50	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

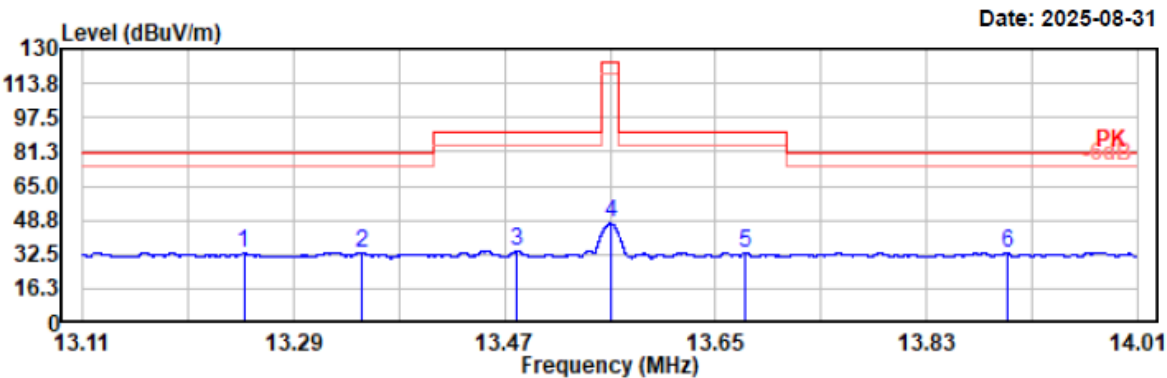

Condition: PK RBW:10kHz VBW:30kHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.248	13.23	19.74	32.97	80.51	47.54	Peak
13.348	13.82	19.74	33.56	80.51	46.95	Peak
13.481	14.45	19.74	34.19	90.47	56.28	Peak
13.560	27.36	19.74	47.10	124.00	76.90	Peak
13.675	13.61	19.74	33.35	90.47	57.12	Peak
13.899	13.48	19.75	33.23	80.51	47.28	Peak

Adapter #2(no card swiping)

Parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

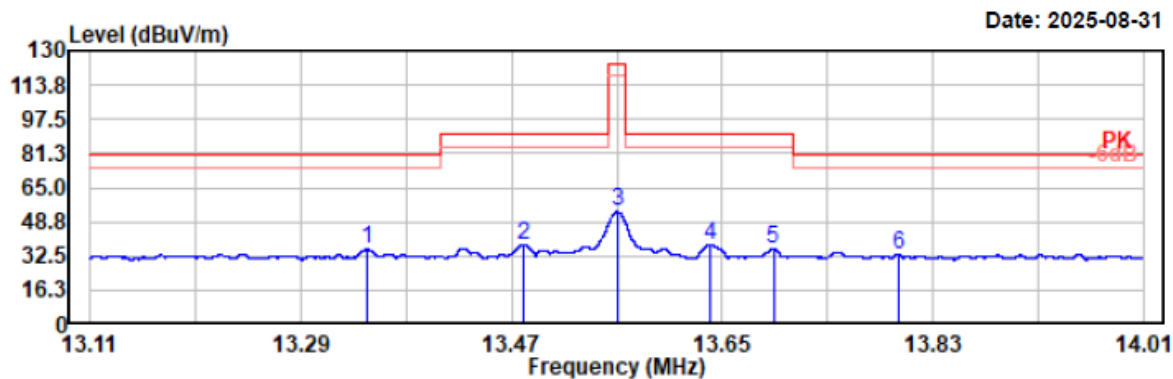


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.347	15.74	19.74	35.48	80.51	45.03	Peak
13.481	18.04	19.74	37.78	90.47	52.69	Peak
13.560	33.79	19.74	53.53	124.00	70.47	Peak
13.640	17.83	19.74	37.57	90.47	52.90	Peak
13.694	16.37	19.74	36.11	90.47	54.36	Peak
13.800	13.64	19.75	33.39	80.51	47.12	Peak

Perpendicular:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

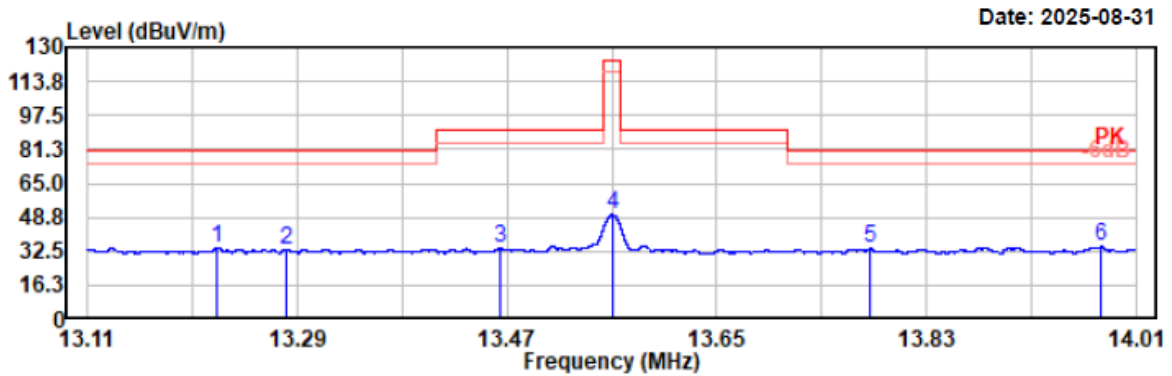


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.221	14.32	19.74	34.06	80.51	46.45	Peak
13.281	13.81	19.74	33.55	80.51	46.96	Peak
13.464	14.01	19.74	33.75	90.47	56.72	Peak
13.560	30.08	19.74	49.82	124.00	74.18	Peak
13.782	13.95	19.75	33.70	80.51	46.81	Peak
13.980	14.80	19.75	34.55	80.51	45.96	Peak

Ground-parallel:

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

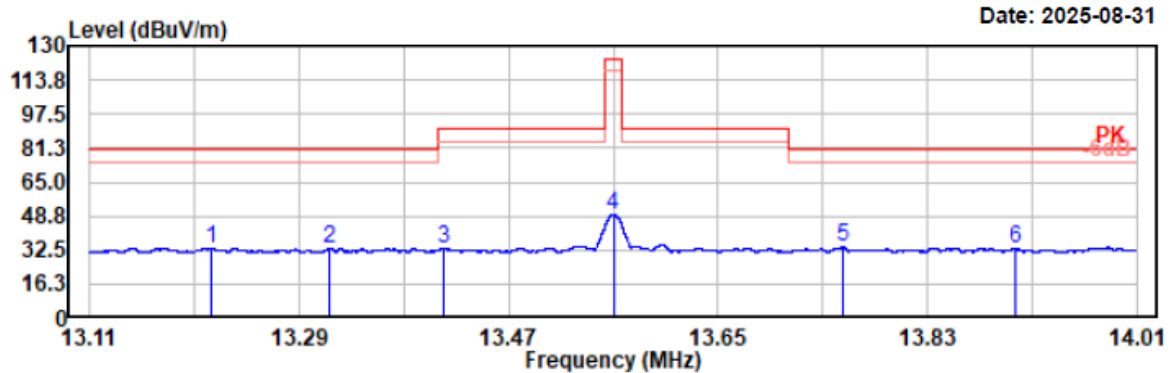


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
13.214	13.71	19.74	33.45	80.51	47.06	Peak
13.316	13.28	19.74	33.02	80.51	47.49	Peak
13.414	13.52	19.74	33.26	90.47	57.21	Peak
13.560	29.98	19.74	49.72	124.00	74.28	Peak
13.757	14.18	19.75	33.93	80.51	46.58	Peak
13.905	13.30	19.75	33.05	80.51	47.46	Peak

4) 30MHz-1000MHz:**Adapter #1(swiping card)**

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.5°C/59%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

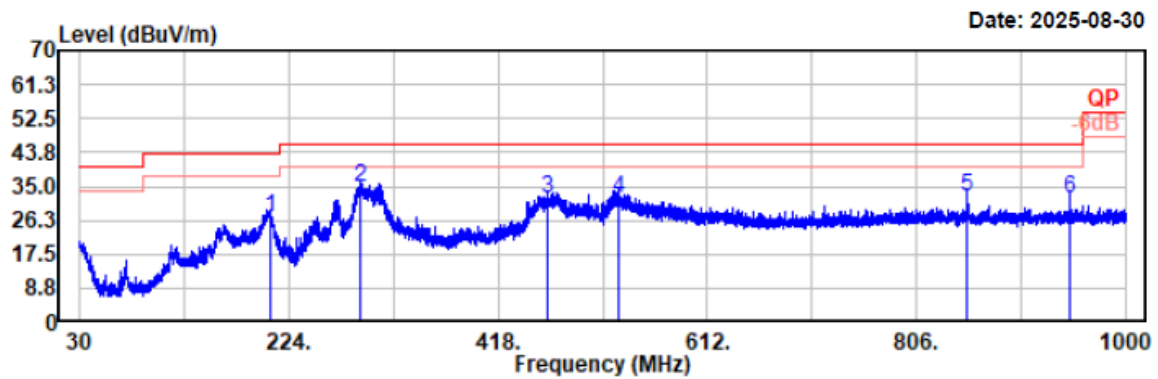


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
207.41	39.14	-12.34	26.80	43.50	16.70	Horizontal	Peak
290.25	43.83	-9.25	34.58	46.00	11.42	Horizontal	Peak
464.37	36.21	-4.37	31.84	46.00	14.16	Horizontal	Peak
529.07	35.24	-3.27	31.97	46.00	14.03	Horizontal	Peak
853.05	30.53	1.95	32.48	46.00	13.52	Horizontal	Peak
948.11	28.68	3.13	31.81	46.00	14.19	Horizontal	Peak

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.5°C/59%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

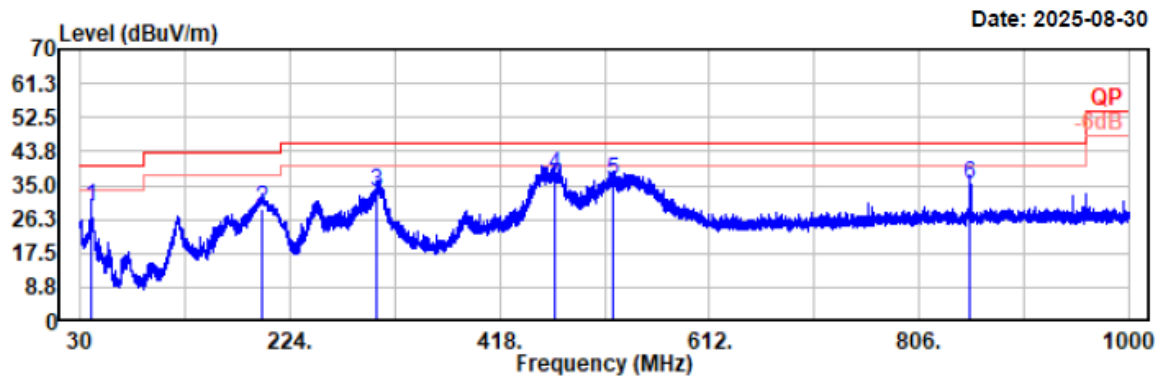


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
40.67	41.48	-12.12	29.36	40.00	10.64	Vertical	Peak
197.42	40.49	-11.74	28.75	43.50	14.75	Vertical	Peak
304.51	42.26	-9.15	33.11	46.00	12.89	Vertical	Peak
468.83	41.69	-4.23	37.46	46.00	8.54	Vertical	QP
522.86	39.82	-3.39	36.43	46.00	9.57	Vertical	Peak
853.53	33.48	1.95	35.43	46.00	10.57	Vertical	Peak

Adapter #1(no card swiping)

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.5°C/59%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

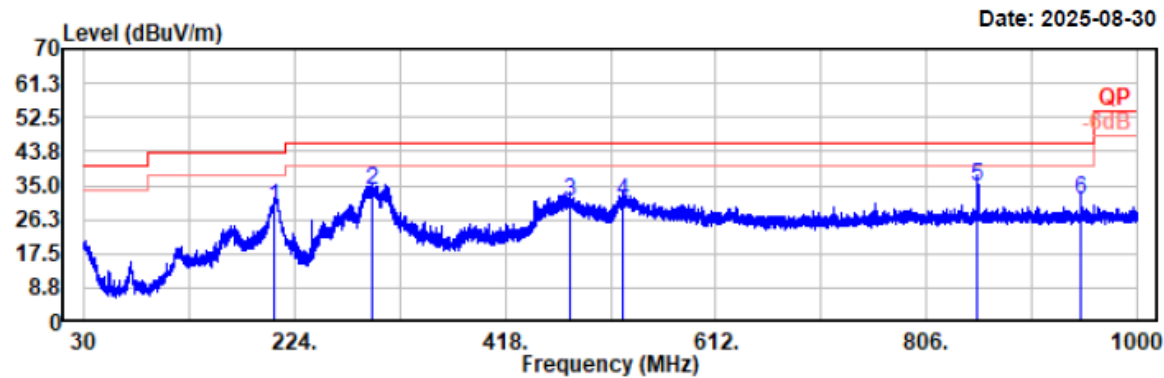


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
205.09	41.75	-12.08	29.67	43.50	13.83	Horizontal	Peak
295.30	42.92	-9.29	33.63	46.00	12.37	Horizontal	Peak
477.85	35.01	-3.93	31.08	46.00	14.92	Horizontal	Peak
526.45	34.02	-3.33	30.69	46.00	15.31	Horizontal	Peak
853.53	32.86	1.95	34.81	46.00	11.19	Horizontal	Peak
948.11	28.31	3.13	31.44	46.00	14.56	Horizontal	Peak

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.5°C/59%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

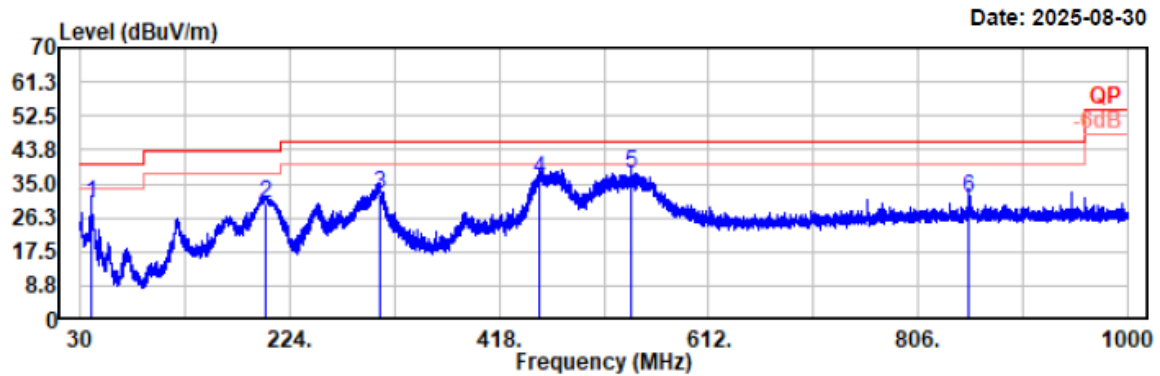


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
40.67	41.92	-12.12	29.80	40.00	10.20	Vertical	Peak
201.59	41.91	-11.83	30.08	43.50	13.42	Vertical	Peak
307.71	41.30	-9.08	32.22	46.00	13.78	Vertical	Peak
455.44	40.94	-4.70	36.24	46.00	9.76	Vertical	Peak
539.74	40.51	-3.01	37.50	46.00	8.50	Vertical	Peak
853.53	29.65	1.95	31.60	46.00	14.40	Vertical	Peak

Adapter #2(swiping card)

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.5°C/59%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

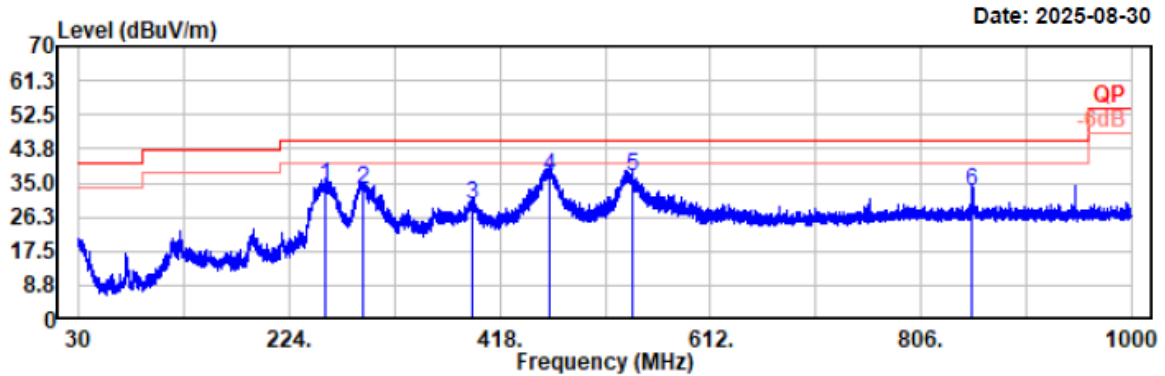


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
257.56	45.43	-11.21	34.22	46.00	11.78	Horizontal	Peak
291.90	42.54	-9.27	33.27	46.00	12.73	Horizontal	Peak
392.49	36.20	-6.64	29.56	46.00	16.44	Horizontal	Peak
464.17	41.29	-4.38	36.91	46.00	9.09	Horizontal	Peak
540.22	39.55	-3.00	36.55	46.00	9.45	Horizontal	Peak
853.43	31.02	1.95	32.97	46.00	13.03	Horizontal	Peak

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.5°C/59%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

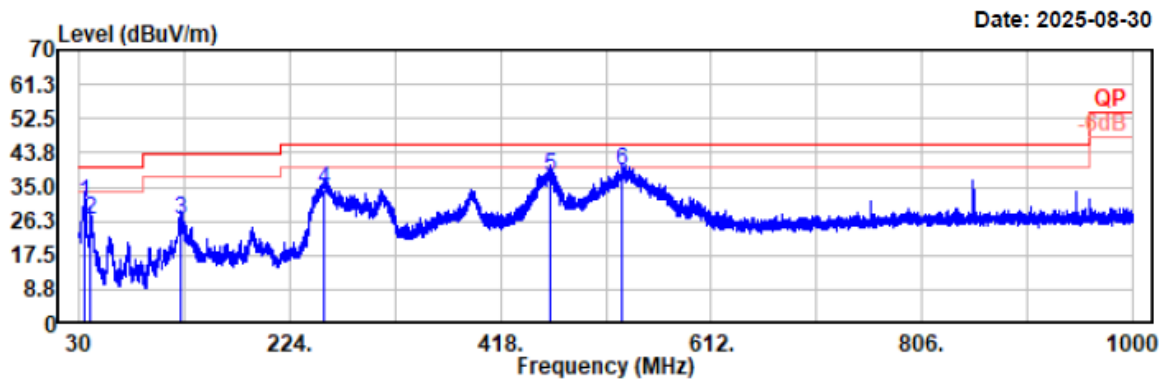


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
34.56	38.48	-7.81	30.67	40.00	9.33	Vertical	QP
40.67	38.86	-12.12	26.74	40.00	13.26	Vertical	Peak
123.22	36.69	-9.95	26.74	43.50	16.76	Vertical	Peak
256.11	45.57	-11.29	34.28	46.00	11.72	Vertical	Peak
463.11	41.91	-4.45	37.46	46.00	8.54	Vertical	QP
530.52	42.17	-3.23	38.94	46.00	7.06	Vertical	QP

Adapter #2(no card swiping)

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.5°C/59%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

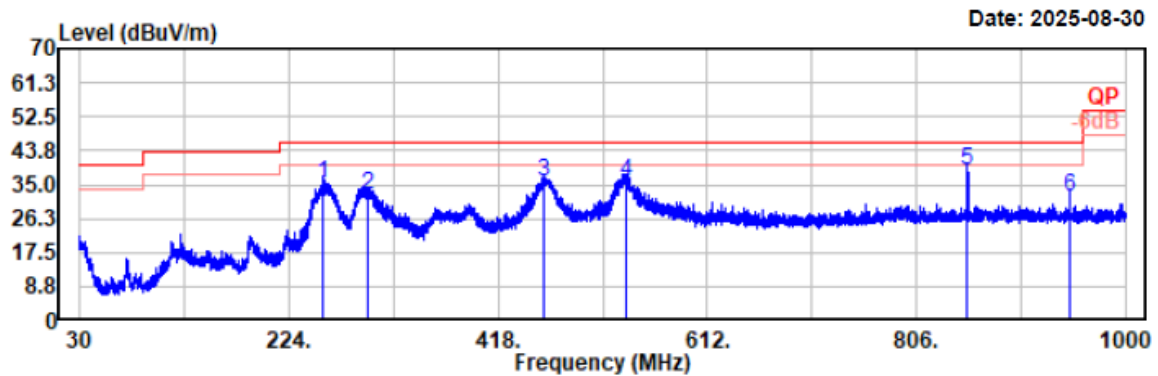


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
255.04	46.48	-11.37	35.11	46.00	10.89	Horizontal	Peak
297.82	41.64	-9.22	32.42	46.00	13.58	Horizontal	Peak
460.20	40.54	-4.65	35.89	46.00	10.11	Horizontal	Peak
536.53	38.91	-3.08	35.83	46.00	10.17	Horizontal	Peak
853.53	36.78	1.95	38.73	46.00	7.27	Horizontal	QP
948.49	28.77	3.13	31.90	46.00	14.10	Horizontal	Peak

Project No.: 2407Z105199E-RF-A1
Test Mode: NFC transmitting
EUT Model: C20Pro
Test distance: 3m

Temp/Humi/ATM: 23.5°C/59%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

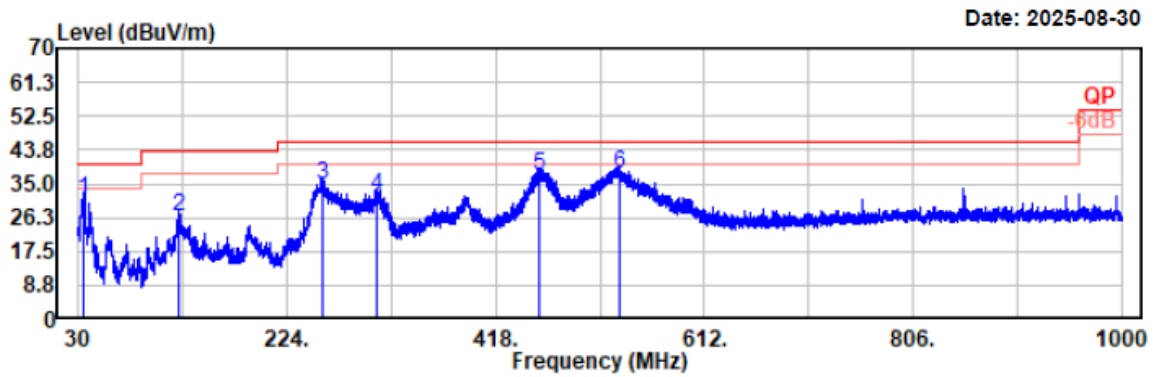

Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
35.24	39.11	-8.21	30.90	40.00	9.10	Vertical	QP
123.51	36.65	-9.95	26.70	43.50	16.80	Vertical	Peak
257.37	46.15	-11.22	34.93	46.00	11.07	Vertical	Peak
306.94	40.81	-9.09	31.72	46.00	14.28	Vertical	Peak
458.55	41.67	-4.67	37.00	46.00	9.00	Vertical	QP
532.95	40.62	-3.17	37.45	46.00	8.55	Vertical	QP

FCC§15.225(e) & RSS-210 ISSUE 11 CLAUSE ANNEX B B.6 - FREQUENCY STABILITY

Applicable Standard

FCC§15.225(e)


The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

RSS-210 ISSUE 11 Clause Annex B B.6

the carrier frequency stability shall not exceed ± 100 ppm

Test Procedure

- a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.
- b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary. NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.
- c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- g) Measure the frequency at each of frequencies specified in 5.6.
- h) Switch OFF the EUT but do not switch OFF the oscillator heater.
- i) Lower the chamber temperature by not more than 10°C , and allow the temperature inside the chamber to stabilize.
- j) Repeat step f) through step i) down to the lowest specified temperature.

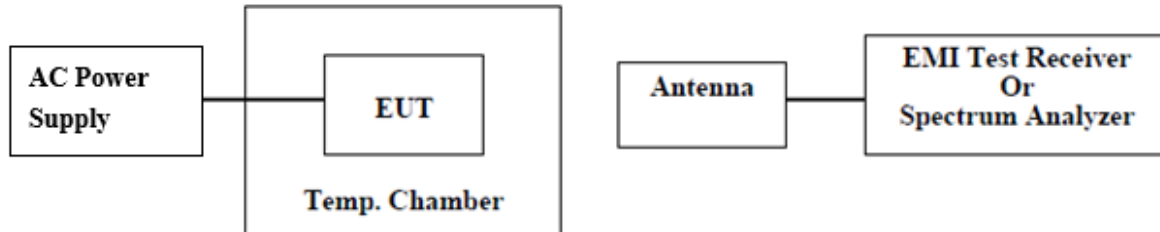EUT Setup**Test Data**


Test Mode:	Transmitting	Test Engineer:	Wlif Wu
Test Date:	2025-08-31	Environment:	Temp.: 23.5°C Humi.: 54% Atm: 100.1kPa

Test Result: Compliant

Adapter #1(swiping card)

$F_0=13.56\text{MHz}$						
Power Supply(V_{AC})	Temperature ($^{\circ}\text{C}$)	Measured Frequency (MHz)	Frequency Error (ppm)	RSS-210 Limit (ppm)	Frequency Error (%)	Part 15.225 Limit
120	-20	13.559494	-37.315634	100	-0.003732	$\pm 0.01\%$
	-10	13.559591	-30.162242	100	-0.003016	$\pm 0.01\%$
	0	13.559850	-11.061947	100	-0.001106	$\pm 0.01\%$
	10	13.560198	14.601770	100	0.001460	$\pm 0.01\%$
	20	13.560217	16.002950	100	0.001600	$\pm 0.01\%$
	30	13.560499	36.799410	100	0.003680	$\pm 0.01\%$
	40	13.560350	25.811209	100	0.002581	$\pm 0.01\%$
	50	13.560647	47.713864	100	0.004771	$\pm 0.01\%$
108	20	13.559767	-17.182891	100	-0.001718	$\pm 0.01\%$
132	20	13.560307	22.640118	100	0.002264	$\pm 0.01\%$


OFR

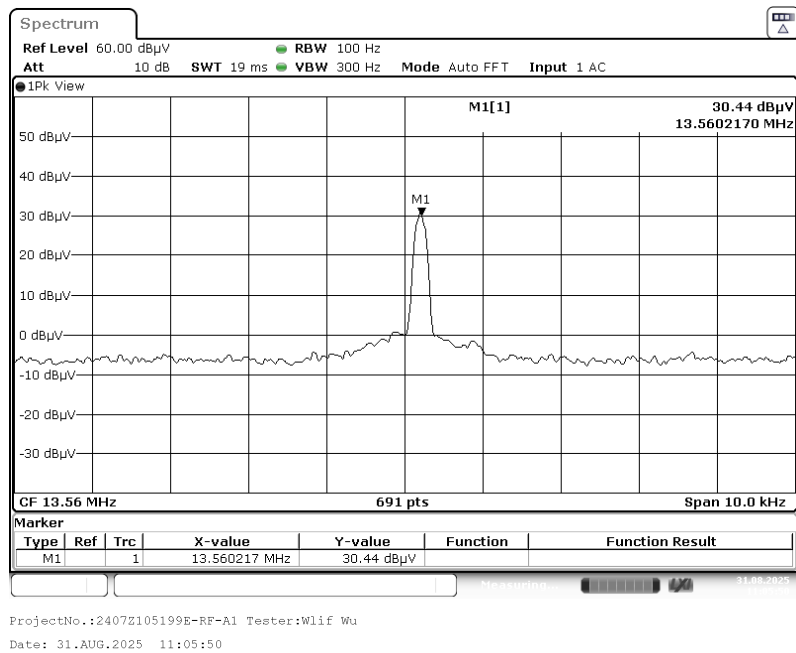

Adapter #1(no card swiping)

F ₀ =13.56MHz						
Power Supply(V _{AC})	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (ppm)	RSS-210 Limit (ppm)	Frequency Error (%)	Part 15.225 Limit
120	-20	13.559826	-12.831858	100	-0.001283	±0.01%
	-10	13.559851	-10.988201	100	-0.001099	±0.01%
	0	13.559903	-7.153392	100	-0.000715	±0.01%
	10	13.560198	14.601770	100	0.001460	±0.01%
	20	13.560217	16.002950	100	0.001600	±0.01%
	30	13.560326	24.041298	100	0.002404	±0.01%
	40	13.560693	51.106195	100	0.005111	±0.01%
	50	13.560737	54.351032	100	0.005435	±0.01%
108	20	13.559873	-9.365782	100	-0.000937	±0.01%
132	20	13.560219	16.150442	100	0.001615	±0.01%


OFR

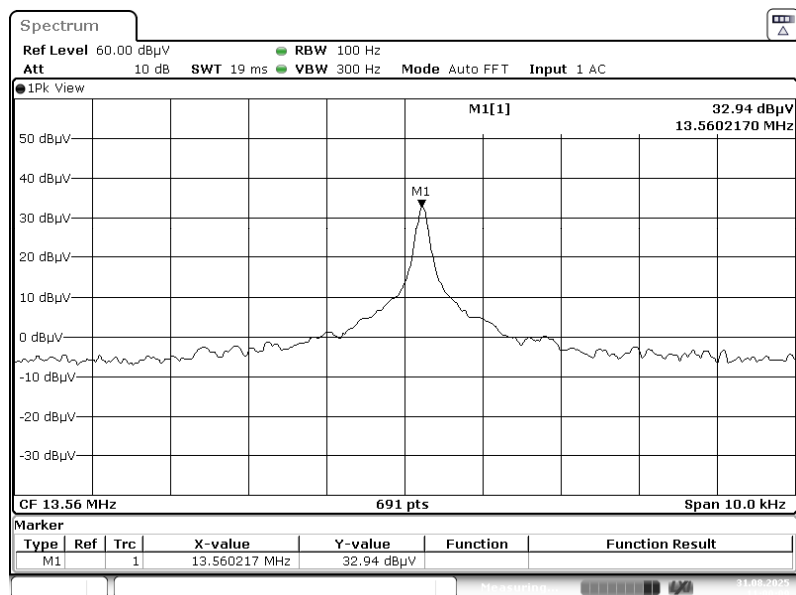

ProjectNo.:2407Z105199E-RF-A1 Tester:Wlif Wu
Date: 31.AUG.2025 11:00:09

Adapter #2(swiping card)


F₀=13.56MHz						
Power Supply(V_{AC})	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (ppm)	RSS-210 Limit (ppm)	Frequency Error (%)	Part 15.225 Limit
120	-20	13.559682	-23.451327	100	-0.002345	±0.01%
	-10	13.559680	-23.598820	100	-0.002360	±0.01%
	0	13.559871	-9.513274	100	-0.000951	±0.01%
	10	13.559976	-1.769912	100	-0.000177	±0.01%
	20	13.560203	14.970501	100	0.001497	±0.01%
	30	13.560291	21.460177	100	0.002146	±0.01%
	40	13.560434	32.005900	100	0.003201	±0.01%
	50	13.560358	26.401180	100	0.002640	±0.01%
108	20	13.560149	10.988201	100	0.001099	±0.01%
132	20	13.560653	48.156342	100	0.004816	±0.01%

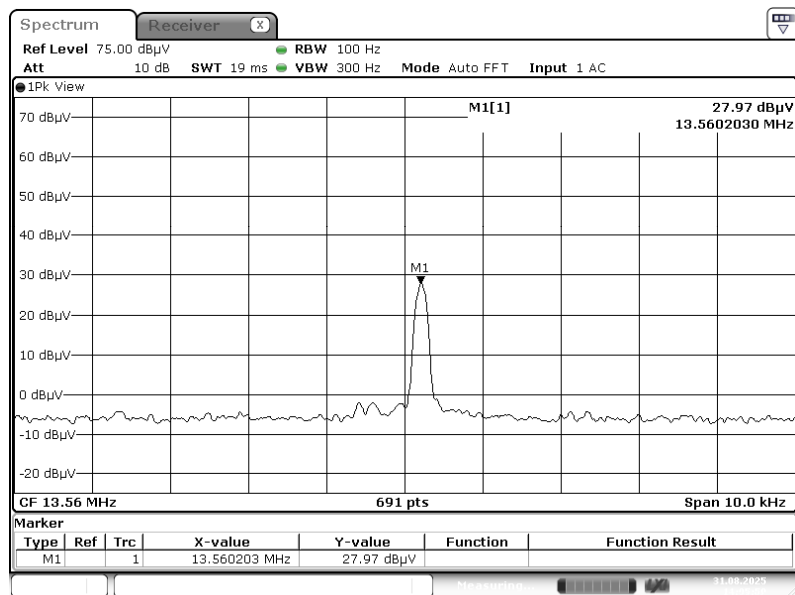OFR

ProjectNo.:2407Z105199E-RF-A1 Tester:Wlif Wu
Date: 31.AUG.2025 14:39:07

Adapter #2(no card swiping)

F₀=13.56MHz						
Power Supply(V_{AC})	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (ppm)	RSS-210 Limit (ppm)	Frequency Error (%)	Part 15.225 Limit
120	-20	13.559785	-15.855457	100	-0.001586	±0.01%
	-10	13.559806	-14.306785	100	-0.001431	±0.01%
	0	13.559739	-19.247788	100	-0.001925	±0.01%
	10	13.560113	8.333333	100	0.000833	±0.01%
	20	13.560232	17.109145	100	0.001711	±0.01%
	30	13.560674	49.705015	100	0.004971	±0.01%
	40	13.560578	42.625369	100	0.004263	±0.01%
	50	13.560715	52.728614	100	0.005273	±0.01%
108	20	13.559761	-17.625369	100	-0.001763	±0.01%
132	20	13.560651	48.008850	100	0.004801	±0.01%

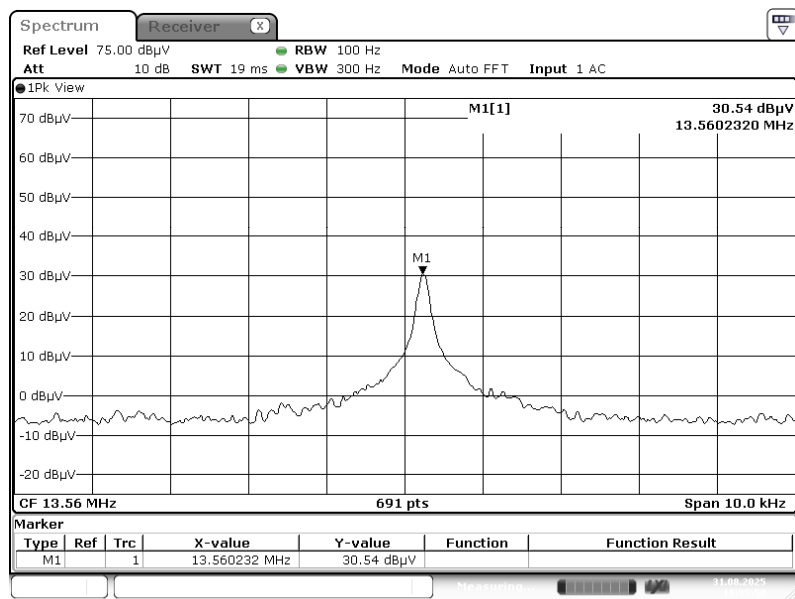
OFR

FCC§15.215(c) - 20dB EMISSION BANDWIDTH TESTING**Requirement**

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

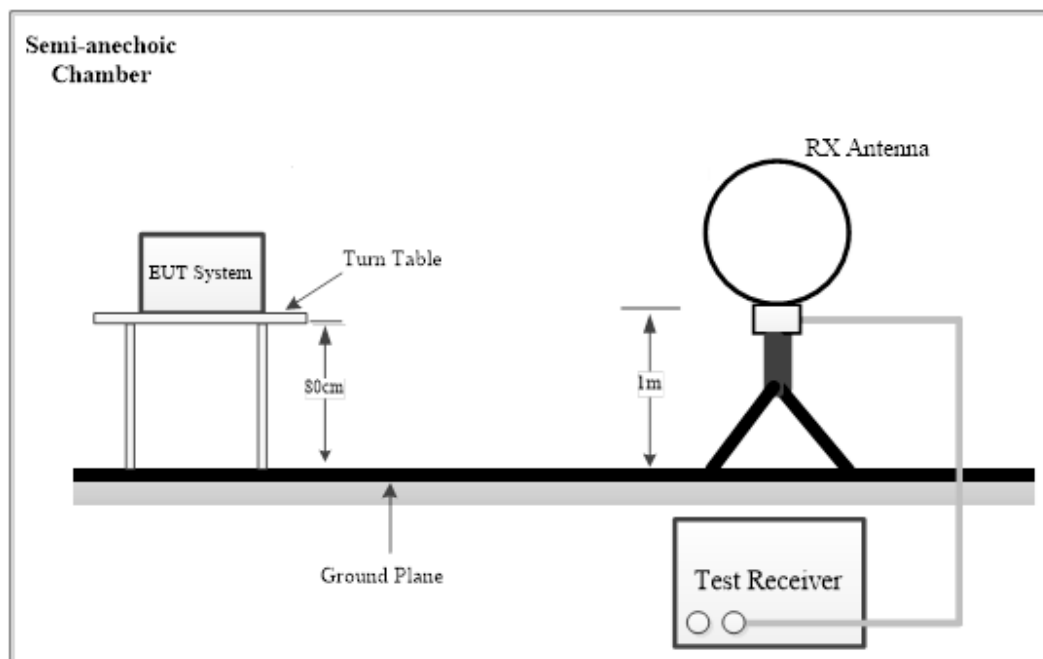Test Setup

Test Data


Test Mode:	Transmitting	Test Engineer:	Wlif Wu
Test Date:	2025-08-31	Environment:	Temp.: 23.5°C Humi.: 54% Atm: 100.1kPa

Test Result: Compliant

Adapter #1(swiping card)

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	0.256


20 dB Emission Bandwidth-13.56MHz

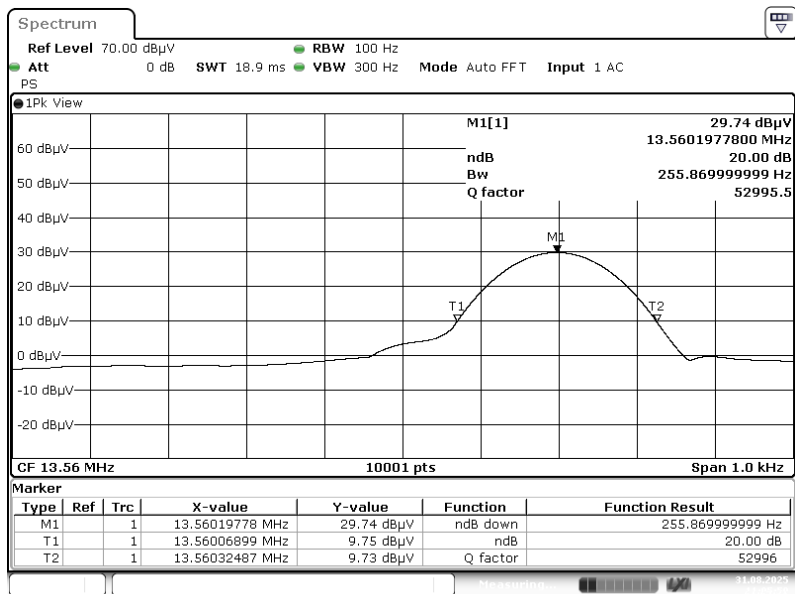

ProjectNo.:2407Z105199E-RF-A1 Tester:Wlif Wu
Date: 31.AUG.2025 21:24:31

Adapter #1(no card swiping)

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	0.464

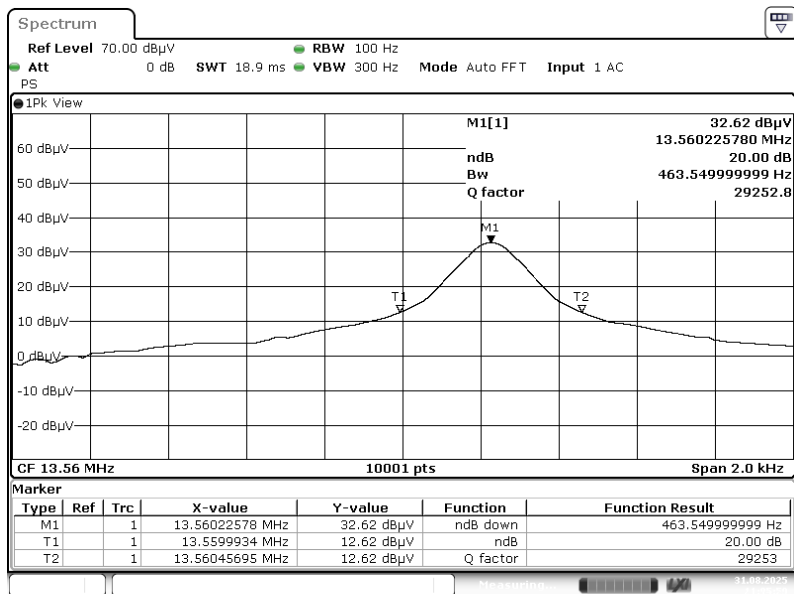
20 dB Emission Bandwidth-13.56MHz

ProjectNo.:2407Z105199E-RF-A1 Tester:Wlif Wu

Date: 31.AUG.2025 21:14:23

Adapter #2(swiping card)

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	0.254

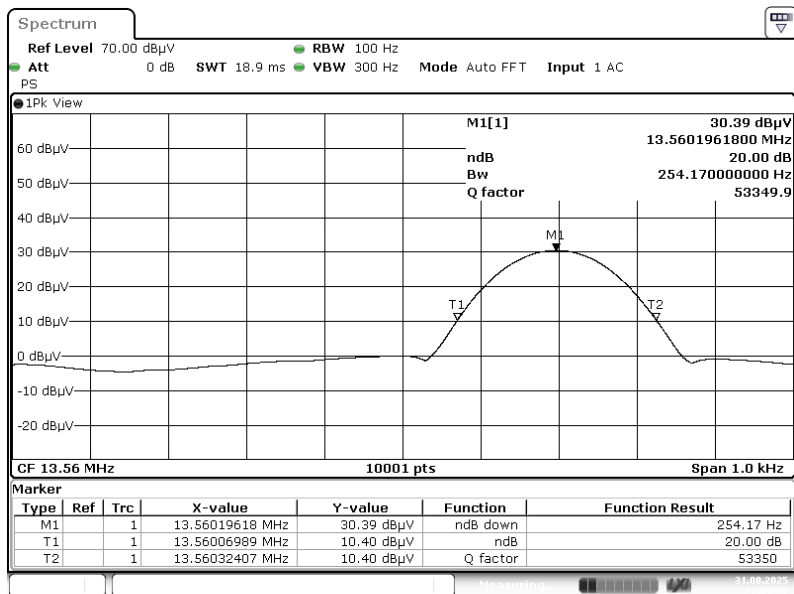
20 dB Emission Bandwidth-13.56MHz

ProjectNo.:2407Z105199E-RF-A1 Tester:Wlif Wu

Date: 31.AUG.2025 21:04:52

Adapter #2(no card swiping)

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	0.521

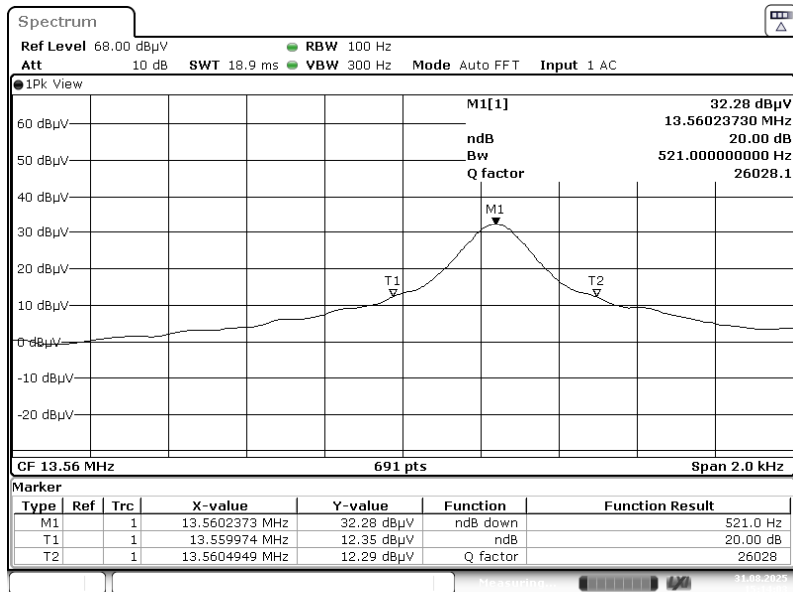20 dB Emission Bandwidth-13.56MHz

ProjectNo.:2407Z105199E-RF-A1 Tester:Wlif Wu

Date: 31.AUG.2025 15:14:03

ISED RSS-GEN ISSUE 5 CLAUSE 6.7 – OCCUPIED BANDWIDTH

Applicable Standard

ISED RSS-GEN Issue 5 Clause 6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

Test Procedure


The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Setup

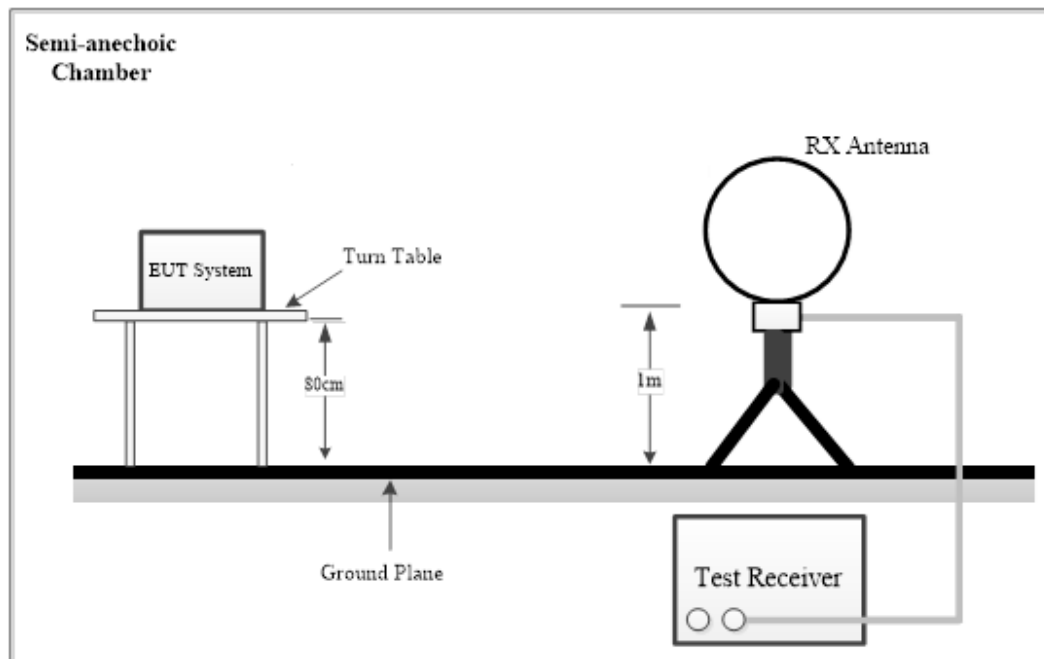


Test Data

Test Mode:	Transmitting	Test Engineer:	Wlif Wu
Test Date:	2025-08-31	Environment:	Temp.: 23.5°C Humi.: 54% Atm: 100.1kPa

Test Result: Compliant.**Adapter #1(swiping card)**


Frequency (MHz)	99% Occupied Bandwidth (kHz)
13.56	0.275

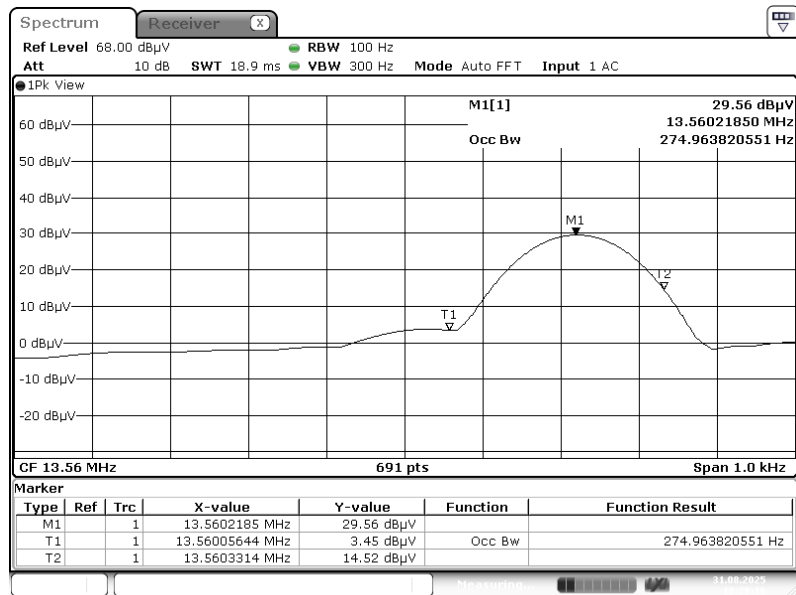99% Occupied Bandwidth -13.56MHz

ProjectNo.:2407Z105199E-RF-A1 Tester:Wlif Wu
Date: 31.AUG.2025 18:28:17

Adapter #1(no card swiping)

Frequency (MHz)	99% Occupied Bandwidth (kHz)
13.56	1.823

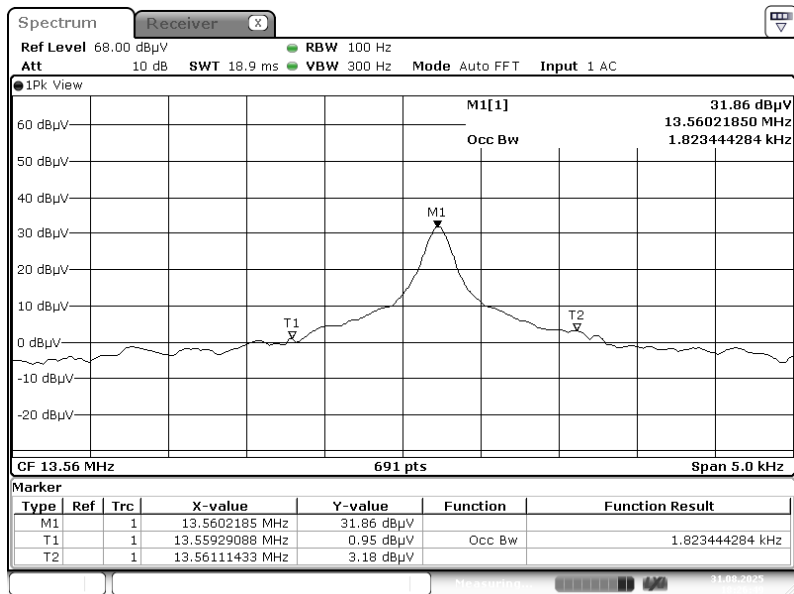99% Occupied Bandwidth -13.56MHz


ProjectNo.:2407Z105199E-RF-A1 Tester:Wlif Wu

Date: 31.AUG.2025 18:26:50

Adapter #2(swiping card)

Frequency (MHz)	99% Occupied Bandwidth (kHz)
13.56	0.259

99% Occupied Bandwidth -13.56MHz

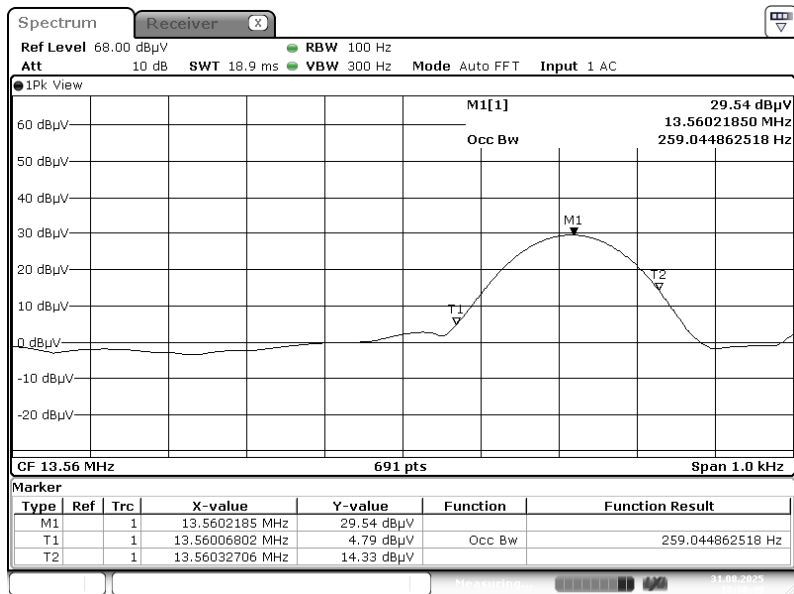


ProjectNo.:2407Z105199E-RF-A1 Tester:Wlif Wu
Date: 31.AUG.2025 18:30:49

Adapter #2(no card swiping)

Frequency (MHz)	99% Occupied Bandwidth (kHz)
13.56	2.207

99% Occupied Bandwidth -13.56MHz

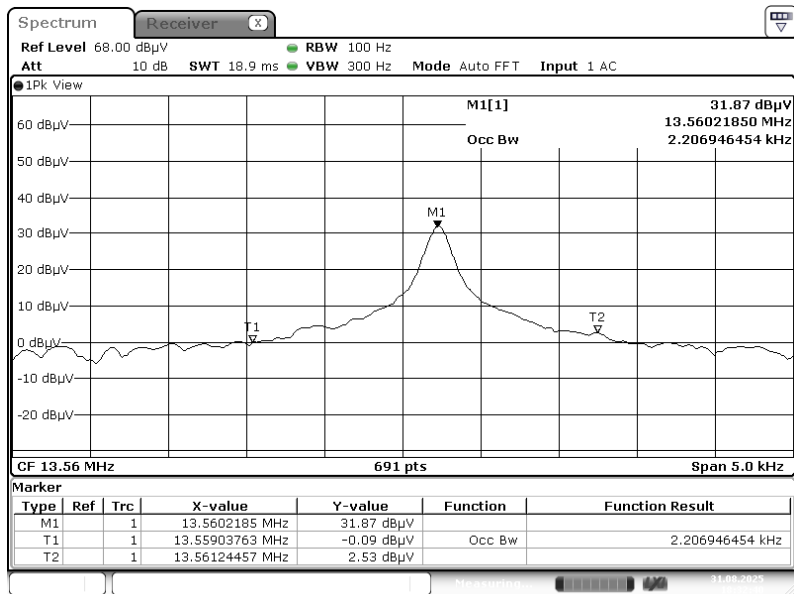

ProjectNo.:2407Z105199E-RF-A1 Tester:Wlif Wu
Date: 31.AUG.2025 18:32:40

EUT PHOTOGRAPHS

Please refer to the attachment 2407Z105199E-RF-A1-EXP EUT EXTERNAL PHOTOGRAPHS and 2407Z105199E-RF-A1-INP EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2407Z105199E-RF-A1-TSP TEST SETUP PHOTOGRAPHS.

Declarations

1. Bay Area Compliance Laboratories Corp. (Xiamen) is not responsible for authenticity of any information provided by the applicant. Information from the applicant that may affect test results are marked with an asterisk “★”.
2. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested.
3. Unless required by the rule provided by the applicant or product regulations, then decision rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of Bay Area Compliance Laboratories Corp. (Xiamen).
6. This report is valid only with a valid digital signature. The digital signature may be available only under the adobe software above version 7.0.
7. This report may contain data that are not covered by the accreditation scope and shall be marked with ▲.

*******END OF REPORT*******