

TEST REPORT

Applicant: FUJIAN LANDI COMMERCIAL EQUIPMENT CO., LTD.
Address: Building 17, Area A, Software Park, No. 89, Software Avenue, Gulou District, Fuzhou, Fujian, China. 350003
Equipment Type: Portable Data Terminal
Model Name: P30
Brand Name: LANDI
Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014
Sample Arrival Date: Apr. 17, 2026
Test Date: Apr. 17, 2026
Date of Issue: Apr. 23, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Li JunFeng**Checked by:** Zong Liyao**Approved by:** Tolan Tu
(Testing Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Apr. 23, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test Laboratory	3
1.2	Test Location	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information	4
2.2	Manufacturer Information.....	4
2.3	General Description for Equipment under Test (EUT).....	4
2.4	Ancillary Equipment.....	5
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards	7
3.2	Verdict.....	7
3.3	Test Uncertainty	7
4	GENERAL TEST CONFIGURATIONS	8
4.1	Test Enclosure List.....	8
4.2	Test Configurations	8
4.3	Test Setups	9
5	TEST ITEMS	11
5.1	Emission Tests	11
ANNEX A	TEST RESULTS.....	16
A.1	Radiated Emission.....	16
A.2	Conducted Emission, AC Ports.....	22
ANNEX B	TEST SETUP PHOTOS	25
ANNEX C	EUT EXTERNAL PHOTOS.....	25
ANNEX D	EUT INTERNAL PHOTOS.....	25

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	601, Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub district, Bao'an District, Shenzhen
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☒ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ Building 2, Intelligent Connected Vehicle Industrial Park, No. 55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The certification body is American Association for Laboratory Accreditation (A2LA).

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	FUJIAN LANDI COMMERCIAL EQUIPMENT CO., LTD.
Address	Building 17, Area A, Software Park, No. 89, Software Avenue, Gulou District, Fuzhou,

2.2 Manufacturer Information

Manufacturer	FUJIAN LANDI COMMERCIAL EQUIPMENT CO., LTD.
Address	Building 17, Area A, Software Park, No. 89, Software Avenue, Gulou District, Fuzhou,

2.3 General Description for Equipment under Test (EUT)

EUT Name	Portable Data Terminal
Model Name Under Test	P30
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	FCC_V1.0.0
Software Version	FCC_V1.0.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery1	
	Model No.	LD18650M
	Capacity	2600 mAh
	Rated Voltage	7.2V
	Limit Charge Voltage	8.4V
Ancillary Equipment 2	Battery2	
	Model No.	LD18650M
	Capacity	3350 mAh
	Rated Voltage	7.2V
	Limit Charge Voltage	8.4V
Ancillary Equipment 3	Adapter	
	Model No.	TPA-418G050200UU01
	Rated input	100-240 V~,0.3 A, 50160 HZ
	Rated Output	5V= 2A
Ancillary Equipment 4	SWITCHING POWER SUPPLY	
	Model No.	P24C050400 US
	Rated input	100-240 V~,0.6 A, 50160 HZ
	Rated Output	5 V= 4A20W
Ancillary Equipment 5	USB Cable	
	Model No.	N/A
	Length (Approx.)	1.2m
Note 1. All adapters are tested, only the worst data of adapter (TPA-418G050200UU01) shown in this report. Note 2: All Lithium -ion battery are tested, only the worst data of Lithium-ion battery 1 shown in this report.		

2.5 Technical Information

Network and Wireless connectivity	2G Network GPRS/EDGE 850/1900 3G Network WCDMA Band 2/4/5 4G Network LTE FDD Band 2/4/5/7 TDD Band 38 BT(BR/EDR+BLE) 2.4G WIFI, 5G WIFI NFC, GNSS
Classification of equipment	Class B
The highest internal frequency of EUT	5850 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	Pass	--

Note:

Compared with the EUT of test report BL-SZ25A0385-401, the changes of the EUT of this report as below:

1. have an additional secondary screen

Other hardware circuit and software are the same as EUT referred in test report BL-SZ2420150-401.

Therefore, just the worst test mode of Radiated Emission and Conducted Emission, others test data please refer to report BL-SZ25A0385-401, which was issued by Shenzhen BALUN Technology Co., Ltd. on Feb. 10, 2026.

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions (9 kHz-150 KHz)-AMN	3.36 dB
Conducted emissions (150 kHz-30 MHz)-AMN	2.92 dB
Radiated emissions (30 MHz-1 GHz)	4.24 dB
Radiated emissions (1 GHz-6 GHz)	5.10 dB
Radiated emissions (6 GHz-18 GHz)	5.30 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
TF Card	N/A	N/A	N/A	N/A	N/A	☒

4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Front Camera Test Mode</u> Adapter + USB Cable + Battery+ TF Card
Mode 2	<u>The Rear Camera Test Mode</u> Adapter + USB Cable + Battery+ TF Card
Mode 3	<u>The Video Play Test Mod</u> Adapter + USB Cable + Battery+ TF Card
Mode 4	<u>The Card Reading Test Mode</u> Adapter + USB Cable + Battery+ TF Card

Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 4	1
Conducted Emission, AC Ports	Mode 1~Mode 4	1


Note: All operation modes were tested, but only test data of the worst mode was presented in this report.

4.3 Test Setups


Test Setup 1

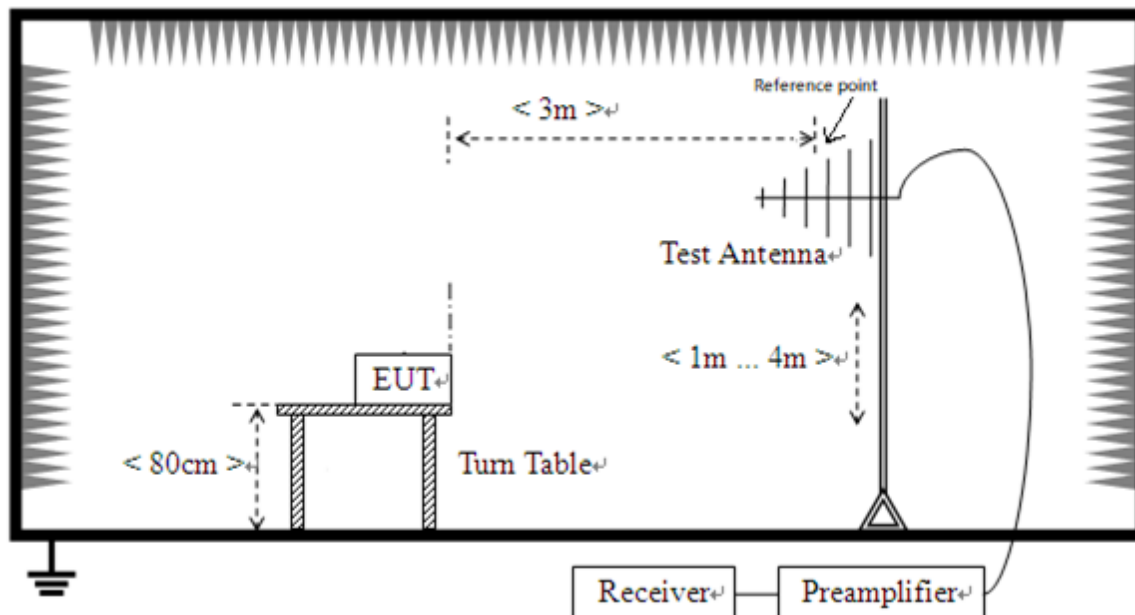

Radiated Emission (30 MHz-1 GHz)

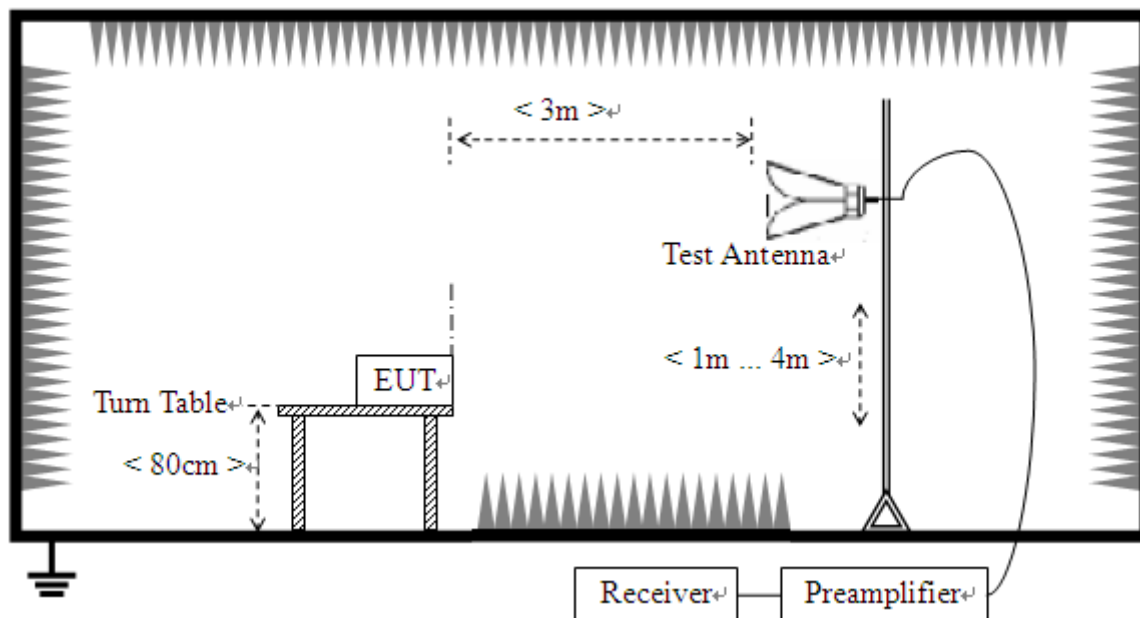

Radiated Emission (above 1 GHz)

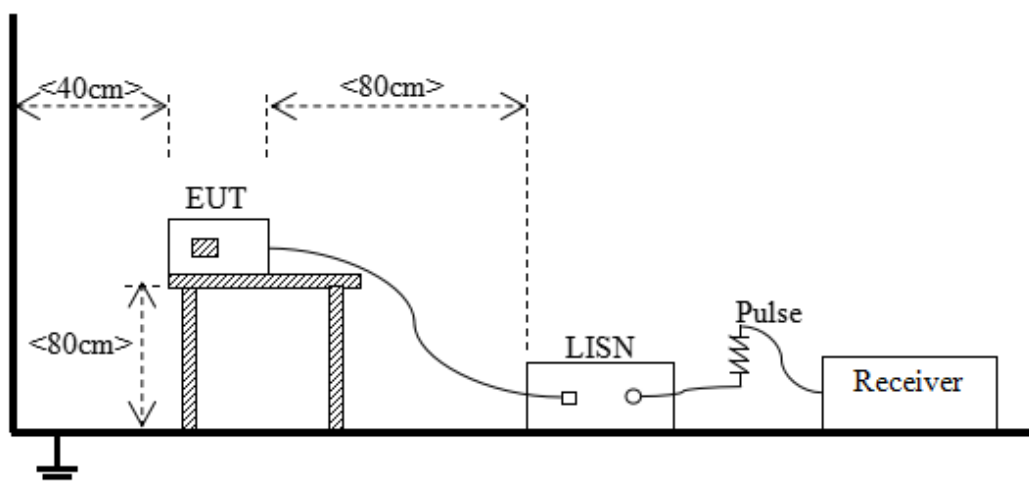Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$
Where:
 L_{3m} is Average Class A limit at 3m;
 L_{10m} is Average Class A limit at 10m;
 d_{10m} is Measurement distance in 10m;
 d_{3m} is Measurement distance in 3m.
For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit - Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dBμV) = Reading (dBμV) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit - Results

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of “--” in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 4: The Radiated Emission is required to be investigated to the upper frequency of 5th harmonic of the highest internal frequency of EUT or 40 GHz, whichever is lower. The test results above 18GHz are only noise and are not recorded in the report.

Sample No.	S01	Temperature	22.8℃
Humidity	44%RH	Pressure	101kPa
Test Engineer	Guo siyu	Test Date	2026.04.17


Test Mode 1

1) Test Antenna Vertical, 30 MHz – 1 GHz

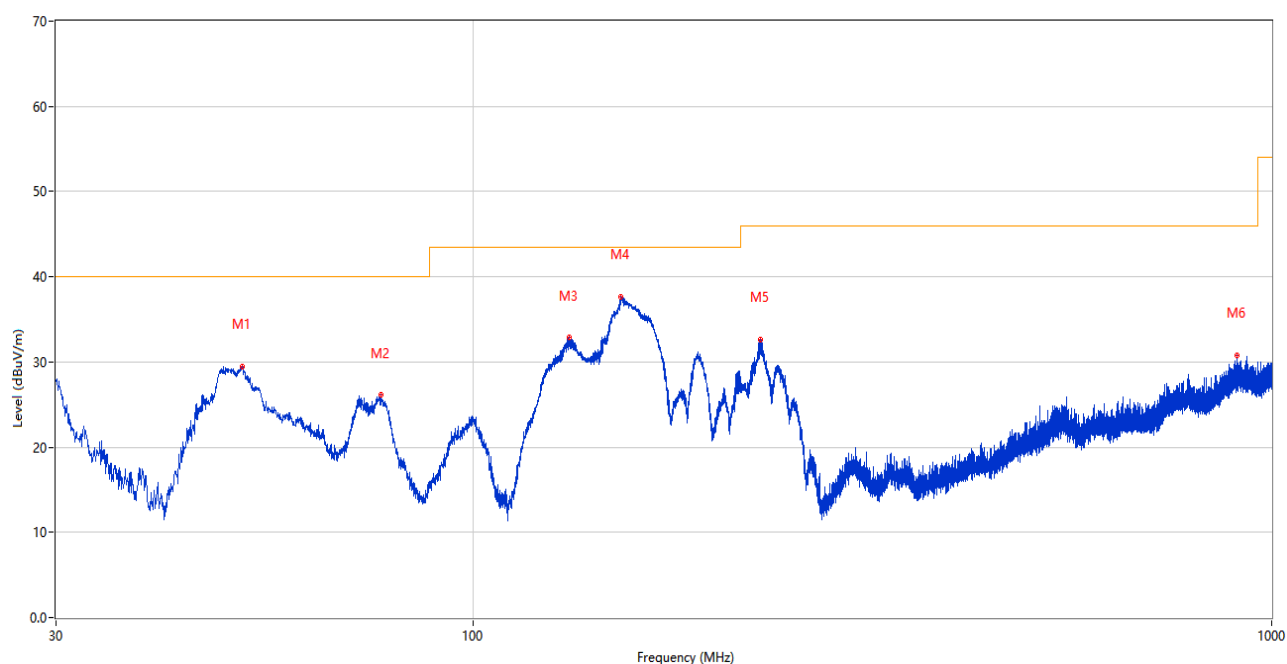

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	51.340	29.46	-24.19	40.0	10.54	Peak	163.00	100	Vertical	Pass
2	76.511	26.10	-31.11	40.0	13.90	Peak	360.00	100	Vertical	Pass
3	131.656	32.82	-29.69	43.5	10.68	Peak	249.00	100	Vertical	Pass
4	152.996	37.63	-29.64	43.5	5.87	Peak	245.00	100	Vertical	Pass
5	228.704	32.59	-25.21	46.0	13.41	Peak	219.00	100	Vertical	Pass
6	905.813	30.83	-8.72	46.0	15.17	Peak	339.00	100	Vertical	Pass


2) Test Antenna Horizontal, 30 MHz – 1 GHz

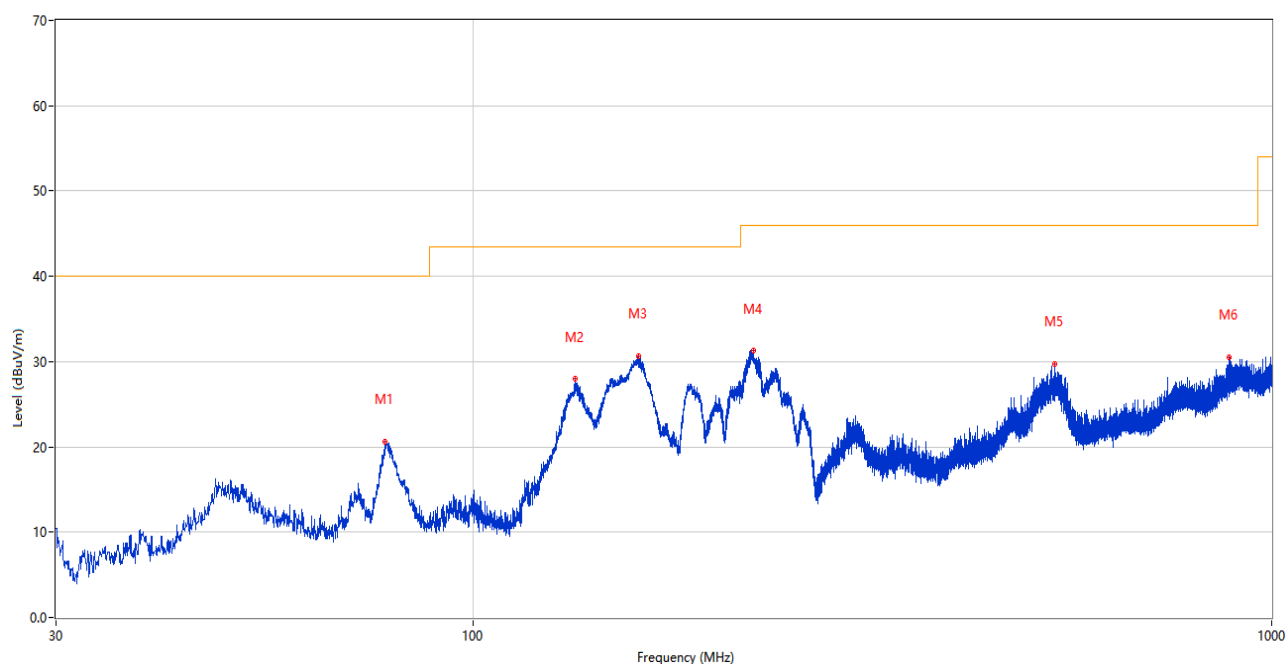

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	77.530	20.60	-31.36	40.0	19.40	Peak	139.00	200	Horizontal	Pass
2	134.275	27.95	-29.70	43.5	15.55	Peak	350.00	200	Horizontal	Pass
3	161.096	30.68	-28.99	43.5	12.82	Peak	360.00	200	Horizontal	Pass
4	224.194	31.25	-25.61	46.0	14.75	Peak	360.00	100	Horizontal	Pass
5	534.157	29.77	-17.59	46.0	16.23	Peak	265.00	200	Horizontal	Pass
6	885.588	30.51	-9.34	46.0	15.49	Peak	338.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330121	2025.12.26	2026.12.25	☒
Test Antenna-Bi-Log	SCHWARZB ECK	VULB 9163	01414	2023.11.03	2026.11.02	☒
Anechoic Chamber	EMC Electronic Co., Ltd	C8-966	107	2024.05.12	2027.05.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒

3) Test Antenna Vertical, 1 GHz – 18 GHz

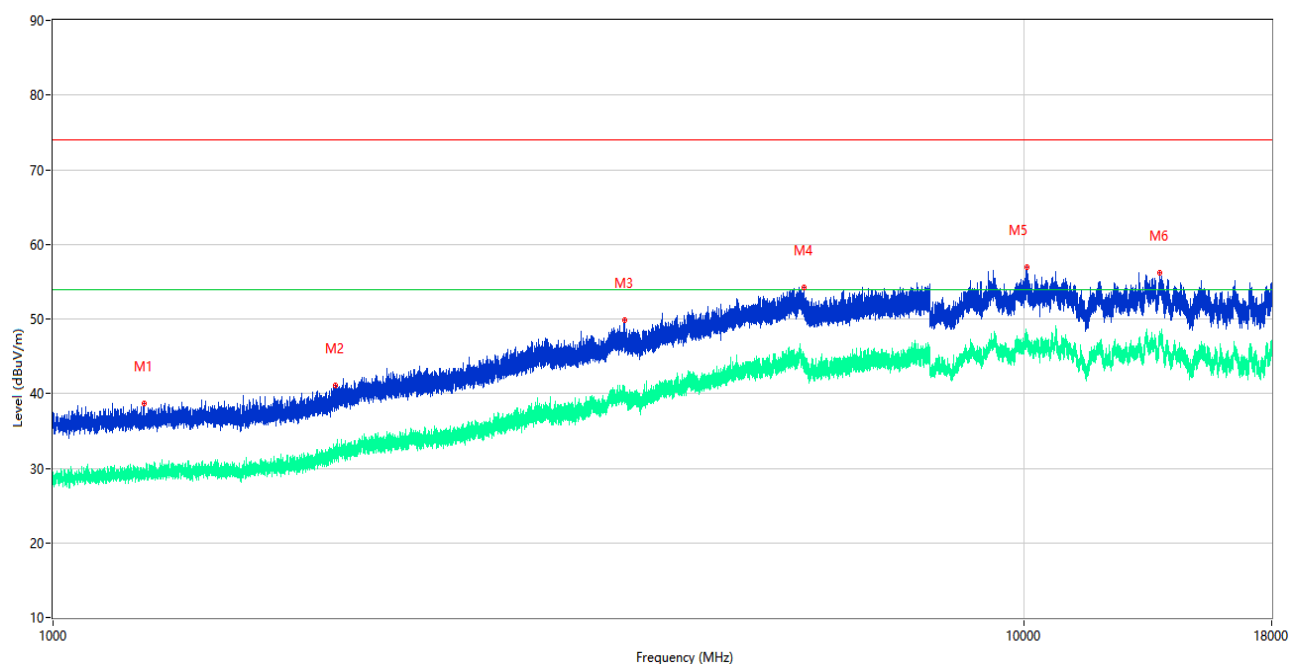

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1240.760	38.71	-16.50	74.0	35.29	Peak	76.00	100	Vertical	Pass
1**	1240.760	29.86	-16.50	54.0	24.14	AV	76.00	100	Vertical	Pass
2	1954.200	41.07	-13.75	74.0	32.93	Peak	0.00	100	Vertical	Pass
2**	1954.200	31.35	-13.75	54.0	22.65	AV	0.00	100	Vertical	Pass
3	3876.540	49.85	-1.70	74.0	24.15	Peak	355.00	100	Vertical	Pass
3**	3876.540	39.75	-1.70	54.0	14.25	AV	355.00	100	Vertical	Pass
4	5930.460	54.24	1.65	74.0	19.76	Peak	192.00	100	Vertical	Pass
4**	5930.460	44.37	1.65	54.0	9.63	AV	192.00	100	Vertical	Pass
5	10073.500	56.90	4.73	74.0	17.10	Peak	96.00	100	Vertical	Pass
5**	10073.500	47.00	4.73	54.0	7.00	AV	96.00	100	Vertical	Pass
6	13798.500	56.18	5.69	74.0	17.82	Peak	294.00	100	Vertical	Pass
6**	13798.500	47.54	5.69	54.0	6.46	AV	294.00	100	Vertical	Pass

4) Test Antenna Horizontal, 1 GHz – 18 GHz

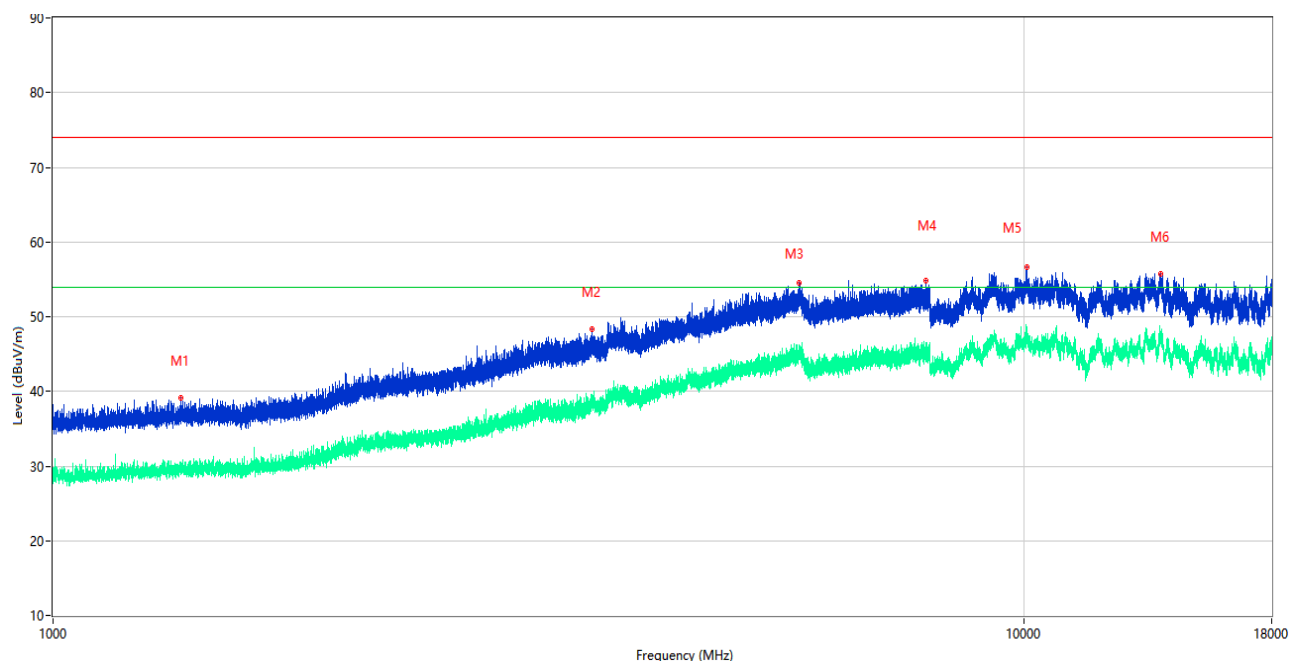

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1353.730	39.11	-16.11	74.0	34.89	Peak	338.00	100	Horizontal	Pass
1**	1353.730	29.59	-16.11	54.0	24.41	AV	338.00	100	Horizontal	Pass
2	3590.770	48.35	-4.65	74.0	25.65	Peak	55.00	100	Horizontal	Pass
2**	3590.770	39.19	-4.65	54.0	14.81	AV	55.00	100	Horizontal	Pass
3	5864.020	54.54	2.77	74.0	19.46	Peak	197.00	100	Horizontal	Pass
3**	5864.020	44.71	2.77	54.0	9.29	AV	197.00	100	Horizontal	Pass
4	7918.380	54.84	2.02	74.0	19.16	Peak	65.00	100	Horizontal	Pass
4**	7918.380	45.01	2.02	54.0	8.99	AV	65.00	100	Horizontal	Pass
5	10063.500	56.61	5.01	74.0	17.39	Peak	80.00	100	Horizontal	Pass
5**	10063.500	48.16	5.01	54.0	5.84	AV	80.00	100	Horizontal	Pass
6	13831.999	55.77	5.46	74.0	18.23	Peak	360.00	100	Horizontal	Pass
6**	13831.999	47.02	5.46	54.0	6.98	AV	360.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330121	2025.12.26	2026.12.25	☒
Test Antenna-Horn	SCHWARZB ECK	BBHA 9120D	02459	2023.10.26	2026.10.25	☒
Anechoic Chamber	EMC Electronic Co., Ltd	C8-966	107	2024.05.12	2027.05.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒


A.2 Conducted Emission, AC Ports

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Sample No.	S01	Temperature	22.0°C
Humidity	48%RH	Pressure	101kPa
Test Engineer	Ye Guangqi	Test Date	2026.04.17


Test Mode 1

1) AC Ports - L Phase

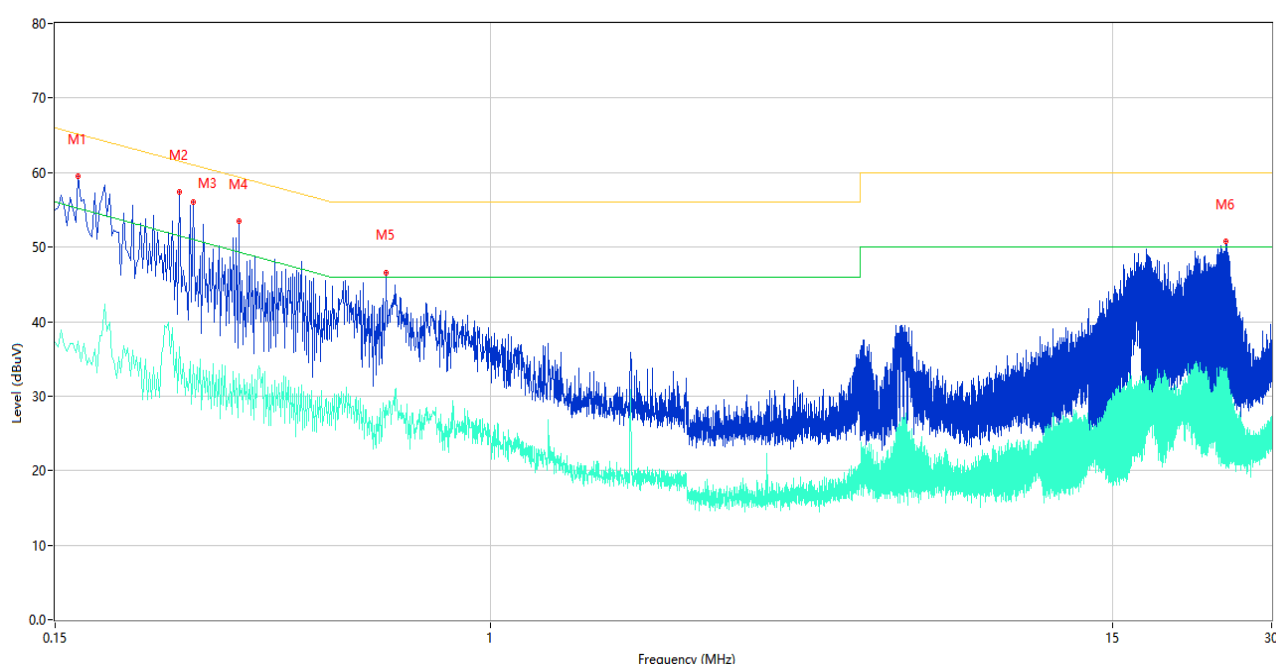

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.166	59.45	10.26	65.16	5.71	Peak	L	Pass
1**	0.166	37.32	10.26	55.16	17.84	AV	L	Pass
2	0.258	57.42	10.24	61.50	4.08	Peak	L	Pass
2**	0.258	36.68	10.24	51.50	14.82	AV	L	Pass
3	0.274	55.97	10.24	61.00	5.03	Peak	L	Pass
3**	0.274	34.23	10.24	51.00	16.77	AV	L	Pass
4	0.334	53.46	10.24	59.35	5.89	Peak	L	Pass
4**	0.334	32.94	10.24	49.35	16.41	AV	L	Pass
5	0.634	46.63	10.26	56.00	9.37	Peak	L	Pass
5**	0.634	28.81	10.26	46.00	17.19	AV	L	Pass
6	24.542	50.77	15.22	60.00	9.23	Peak	L	Pass
6**	24.542	32.70	15.22	50.00	17.30	AV	L	Pass

2) AC Ports - N Phase

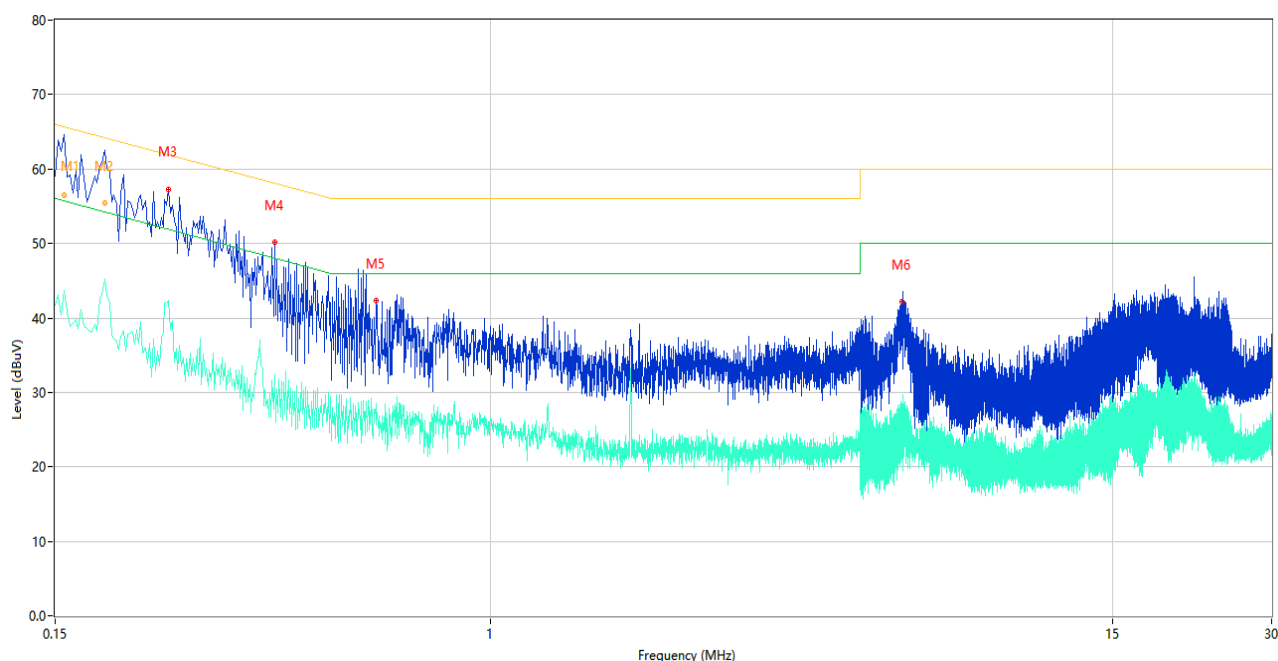

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.156	66.22	10.18	65.67	-0.55	Peak	N	N/A
1*	0.156	56.47	10.18	65.67	9.20	QP	N	Pass
1**	0.156	43.71	10.18	55.67	11.96	AV	N	Pass
2	0.186	61.20	10.17	64.21	3.01	Peak	N	N/A
2*	0.186	55.45	10.17	64.21	8.76	QP	N	Pass
2**	0.186	45.13	10.17	54.21	9.08	AV	N	Pass
3	0.246	57.32	10.16	61.89	4.57	Peak	N	Pass
3**	0.246	42.31	10.16	51.89	9.58	AV	N	Pass
4	0.390	50.18	10.16	58.06	7.88	Peak	N	Pass
4**	0.390	32.46	10.16	48.06	15.60	AV	N	Pass
5	0.606	42.38	10.17	56.00	13.62	Peak	N	Pass
5**	0.606	28.42	10.17	46.00	17.58	AV	N	Pass
6	5.984	42.22	10.86	60.00	17.78	Peak	N	Pass
6**	5.984	21.87	10.86	50.00	28.13	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038B	MY61380132	2025.12.26	2026.12.25	☒
LISN	SCHWARZBECK	NSLK 8127	01009	2025.07.15	2026.07.14	☒
Shielded Room	YiHeng Electronic Co., Ltd	/	235	2024.11.05	2027.11.04	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-EE26040385-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-EE26040385-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-EE26040385-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--