



FCC PART 15.247
RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT2
RSS-247 ISSUE 3, AUGUST 2023
TEST REPORT

For

FCC: Fujian LANDI Commercial Equipment Co.,Ltd.

Building 17, Section A, Software Park No. 89 Software Road, Gulou District, Fuzhou Municipality, Fujian
Province, China

IC: Fujian LANDI Commercial Equipment Co., Ltd.

5th & 6th Floor, Building 3A, Area A, Software Park, No. 89, Software Avenue, Gulou District
Fuzhou Fujian 350003 China

FCC ID: 2AG6N-SNM927WF4MG
IC: 23725-SNM927WF4MG


Report Type: Class II Permissive Change Report	Product Name: Smart Module
Report Number:	2507W73938E-RF-01
Report Date:	2025-09-09
Reviewed By:	Ash Lin 
Approved By:	Miles Chen 
Prepared By:	Bay Area Compliance Laboratories Corp. (Xiamen) Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen Tel: +86-592-3200111 www.baclcorp.com.cn

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
TEST FACILITY	5
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION.....	6
TEST MODE AND VOLTAGE.....	6
DESCRIPTION OF TEST CONFIGURATION	6
★EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.203 & RSS-Gen Clause 6.8 – ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) & RSS-Gen Clause 8.8 – AC LINE CONDUCTED EMISSIONS.....	13
APPLICABLE STANDARD	13
TEST SYSTEM SETUP.....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
RESULT & MARGIN CALCULATION.....	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) & RSS-247 Clause 5.5, RSS-GEN ISSUE5 Clause 8.10 – RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
TEST SYSTEM SETUP.....	17
TEST PROCEDURE	19
RESULT & MARGIN CALCULATION.....	19
TEST DATA	20
FCC §15.247(b) (1) & RSS-247 ISSUE 3 Clause 5.4 b) - SPOT CHECK PEAK OUTPUT POWER MEASUREMENT	75
APPLICABLE STANDARD	75
EUT SETUP	75
TEST PROCEDURE	75
TEST DATA	76
EUT PHOTOGRAPHS.....	77
TEST SETUP PHOTOGRAPHS	78

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	2507W73938E-RF-01	R1V1	2025-09-09	Class II Permissive Change Report

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	FCC: Fujian LANDI Commercial Equipment Co.,Ltd. IC: Fujian LANDI Commercial Equipment Co., Ltd.
Product Name:	Smart Module
Tested Model:	SNM927
HVIN:	SNM927
Multiple Model(s):	N/A
Trade Mark:	N/A
★Power Supply:	DC 3.8V
★Maximum Peak Output Power (Conducted):	14.10 dBm
RF Function:	Classic BT
Operating Band/Frequency:	2402-2480 MHz
Channel Number:	79
Channel Separation:	1 MHz
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type:	FPC Antenna
★Maximum Antenna Gain:	4.55dBi
EUT Received Status:	Good
<i>Note:</i> 1. The Maximum Antenna Gain was declared by manufacturer. 2. All measurement and test data in this report was gathered from production sample serial number: 39GR-1 (Assigned by the BACL(Xiamen). The EUT supplied by the applicant was received on 2025-08-14)	

Objective

This test report is prepared for *Fujian LANDI Commercial Equipment Co.,Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions's rules and RSS-247 Issue 3, August 2023 and RSS-Gen, Issue 5, February 2021 Amendment 2 of the Innovation, Science and Economic Development Canada.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020 + Cor.1-2023, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 15.247 Meas Guidance v05r02.

All tests and measurements indicated in this document were performed in accordance with RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada & RSS-Gen, Issue 5, February 2021 Amendment 2: General Requirements for Compliance of Radio Apparatus & ANSI C63.10-2020 + Cor.1-2023: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Xiamen) to collect test data is located on the Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN1384.

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the IC accredited lab under the KDB 974614 D01, the IC Designation No. : CN0176.

Measurement Uncertainty

Item		U_{lab}
Conducted Emission	150kHz-30MHz	2.45 dB
Radiated Emission	9kHz-150kHz	2.82dB
	150kHz-30MHz	2.74dB
	30MHz~200MHz	3.47dB
	200MHz~1GHz	4.86dB
	1GHz~6GHz	4.88dB
	6GHz~18GHz	4.95dB
	18GHz~26.5GHz	4.45dB
Transmitter Conducted Power(Conducted RF power)		1.49 dB
Temperature		1 °C
Humidity		5 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Test Mode and Voltage

The system was configured for testing in a typical mode (as normally used by a typical user).	
Test mode:	Test mode 1: Transmitting
Test voltage:	Test mode 1: AC 120V/60Hz
Remark:	During all emission tests, the EUT was configured to measure its highest possible emission level and the worst case's test data was presented in this test report.

Description of Test Configuration

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

★EUT Exercise Software

RF Test Tool: QRCT4

Test Modes	Power Level Setting		
	Lowest Channel	Middle Channel	Highest Channel
GFSK	default	default	default
$\pi/4$ -DQPSK	default	default	default
8DPSK	default	default	default

Note: The power level was declared by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
LITEON	Adapter	PA-1650-57	Unknown
LANDI	Test Jig	Unknown	Unknown
Lenovo	Laptop	T480	PF1P5K4F

External I/O Cable

Cable Description	Length (m)	From Port	To
Power Cable	1.2	Test Jig	Adapter
USB cable	10	Test Jig	Laptop
USB cable	1.0	Test Jig	Laptop


Block Diagram of Test Setup

Conducted Emission:

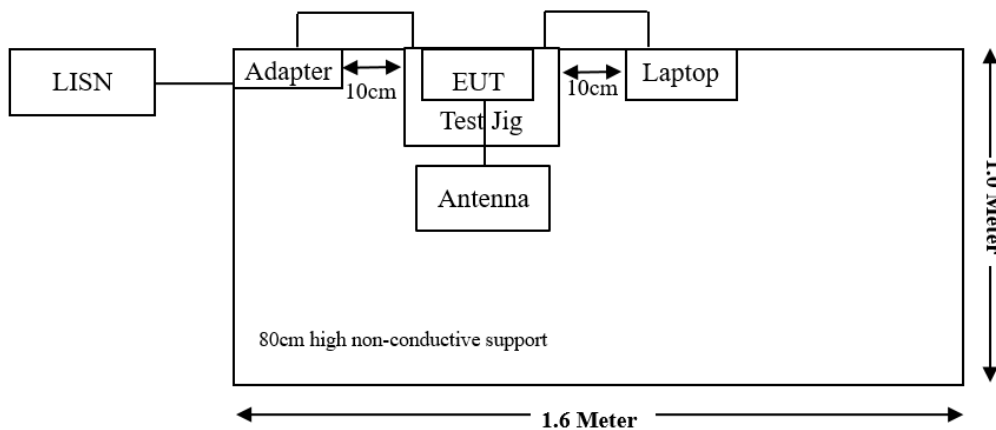


Radiated Emission:


Below 1GHz:

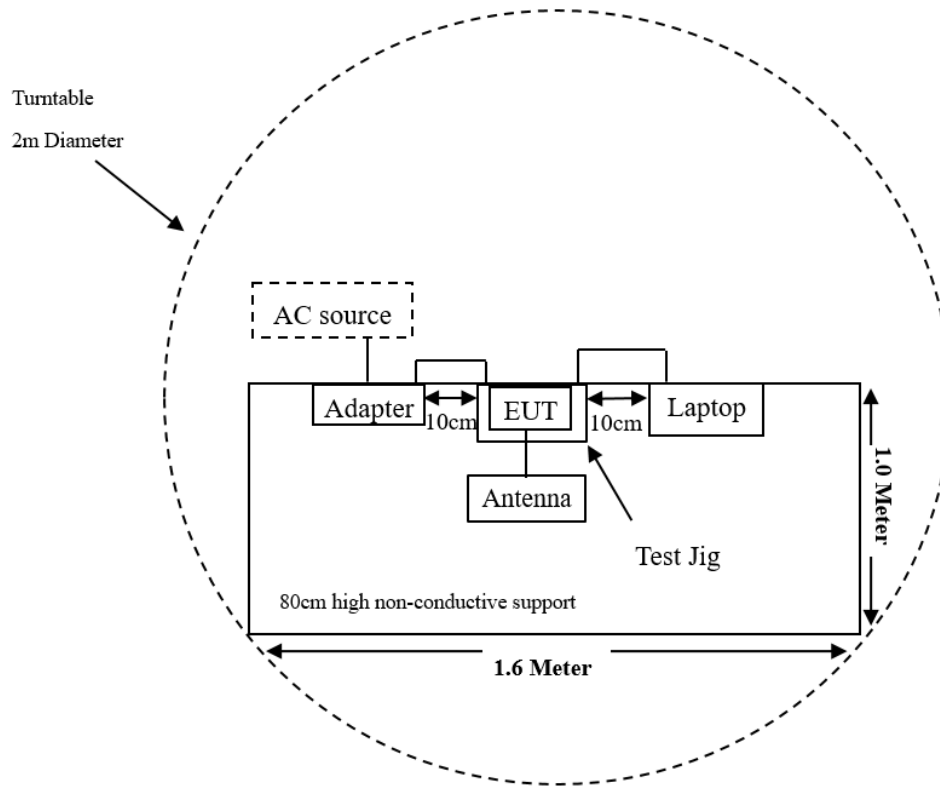

Above 1GHz:

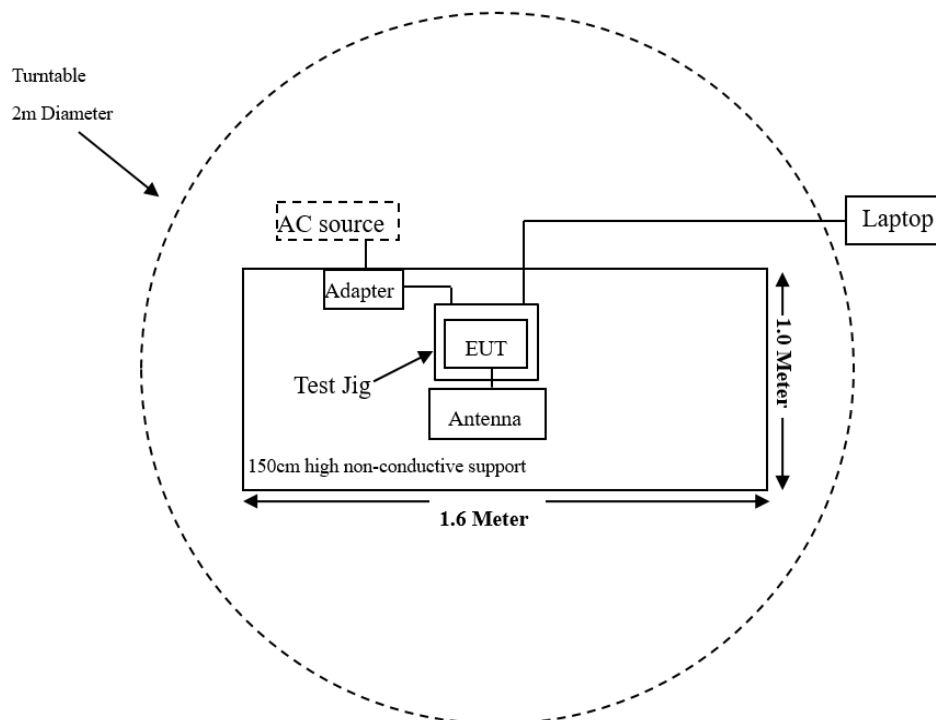

RF Conduction:



Note: The cable assembly insertion loss of 0.5dB was entered as an offset in the power sensor. (Actual cable loss was unavailable at the time of testing, therefore loss of 0.5dB was assumed as worst case.) This was later verified to be true by laboratory.

SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result	Remark
FCC§15.203 RSS-Gen Clause 6.8	Antenna Requirement	Compliant	-
FCC§15.207(a) RSS-Gen Clause 8.8	AC Line Conducted Emissions	Compliant	-
FCC§15.205, §15.209 & §15.247(d) RSS-Gen Clause 8.10	Radiated Emissions & Restricted Bands Emissions	Compliant	-
FCC§15.247(a)(1) RSS-247 Clause 5.1 b)	20 dB Emission Bandwidth	-	See Note 2.1
RSS-Gen Clause 6.7	99% Occupied Bandwidth	-	See Note 2.2
FCC§15.247(a)(1) RSS-247 Clause 5.1 b)	Channel Separation Test	-	See Note 2.3
FCC§15.247(a)(1)(iii) RSS-247 Clause 5.1 d)	Time of Occupancy (Dwell Time)	-	See Note 2.4
FCC§15.247(a)(1)(iii) RSS-247 Clause 5.1 d)	Quantity of hopping channel Test	-	See Note 2.5
FCC§15.247(b)(1) RSS-247 Clause 5.4 b)	Peak Output Power Measurement	Reporting	-
FCC§15.247(d) RSS-247 Clause 5.5	Band edges	-	See Note 2.6

Note 1:

This is Class II permissive change application based on the Change ID device, model: SNM927, FCC ID: 2AG6N-SNM927WF4MG, IC: 23725-SNM927WF4MG. The Change ID device based on the original device, model: SNM927, FCC ID: 2APJ4-SNM927, IC: 23860-SNM927, which was tested by Sporton International Inc. (Kunshan). The change between the original equipment and the current equipment is stated and guaranteed by the applicant, as following:

1. Change the antenna.

Per Spot check with RF output power, the RF parameters are identical with the original device. Therefore, AC line conducted emissions and Radiated Spurious Emissions was tested based on the change.

Note 2:

2.1: Please refer to IC Report No: CR462035ATX* Page 61 and FCC Report No: FR462035A* Page 61
 2.2: Please refer to IC Report No: CR462035ATX* Page 61 and FCC Report No: FR462035A* Page 61
 2.3: Please refer to IC Report No: CR462035ATX* Page 61 and FCC Report No: FR462035A* Page 61
 2.4: Please refer to IC Report No: CR462035ATX* Page 61 and FCC Report No: FR462035A* Page 61
 2.5: Please refer to IC Report No: CR462035ATX* Page 61 and FCC Report No: FR462035A* Page 61
 2.6: Please refer to IC Report No: CR462035ATX* Page 35-40 and FCC Report No: FR462035A* Page 35-40

The Bay Area Compliance Laboratories Corp. (Xiamen) is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report.

TEST EQUIPMENT LIST

Test Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions					
EMI Test Receiver	Rohde & Schwarz	ESR	103105	2025/2/20	2026/2/19
LISN	Rohde & Schwarz	ENV216	100129	2025/2/20	2026/2/19
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54	2025/2/20	2026/2/19
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC001	2025/2/20	2026/2/19
EMI Test software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESR	103103	2025/2/20	2026/2/19
Loop Antenna	Rohde & Schwarz	HFH2-Z2	830749/001	2023/7/27	2026/7/26
Antenna	Sunol Sciences	JB6	A122022-5	2023/7/27	2026/7/26
Amplifier	Sonoma	310B	120903	2025/2/20	2026/2/19
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC002	2025/2/20	2026/2/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-2M	CC006	2025/2/20	2026/2/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-12M	CC007	2025/2/20	2026/2/19
Coaxial Cable	XINHANGWEIBO	HFH2-CC	335.3609	2025/2/20	2026/2/19
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Above 1 GHz					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2025/2/20	2026/2/19
Filter Switch Unit	Decentest	DT7220FSU	DS79904	2025/2/21	2026/2/20
Multiplex Switch Test Control Set	Decentest	DT7220SCU	DS79901	2025/2/21	2026/2/20
Horn Antenna	EMCO	3115	9002-3355	2024/11/19	2027/11/18
Preamplifier	GLOBAL	1313-A100M18G	4121301	2025/1/16	2026/1/15
Coaxial Cable	XINHANGWEIBO	XH800A-N-6M	CC003	2025/2/20	2026/2/19
Coaxial Cable	XINHANGWEIBO	XH800A-N-1M	CC005	2025/2/20	2026/2/19
Horn Antenna	EMCO	3116	9407-2232	2023/7/31	2026/7/30
Preamplifier	A.H.Systems	PAM-1840	200	2025/2/20	2026/2/19
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-3M	CC008	2025/2/20	2026/2/19
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-1M	CC009	2025/2/20	2026/2/19
Test Software	Audix	E3	18621a	N/A	N/A
RF Conducted Test					
USB Wideband Power Sensor	Boonton	55318	8934	2024/9/19	2025/9/18
Coaxial Cable	Lianxun	RF113	N/A	Each time	N/A

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Xiamen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 & RSS-Gen Clause 6.8 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-Gen Clause 6.8 The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISSED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one FPC antenna for Bluetooth, the antenna gain is 4.55 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance

FCC §15.207 (a) & RSS-Gen Clause 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), RSS-Gen Clause 8.8

Test System Setup

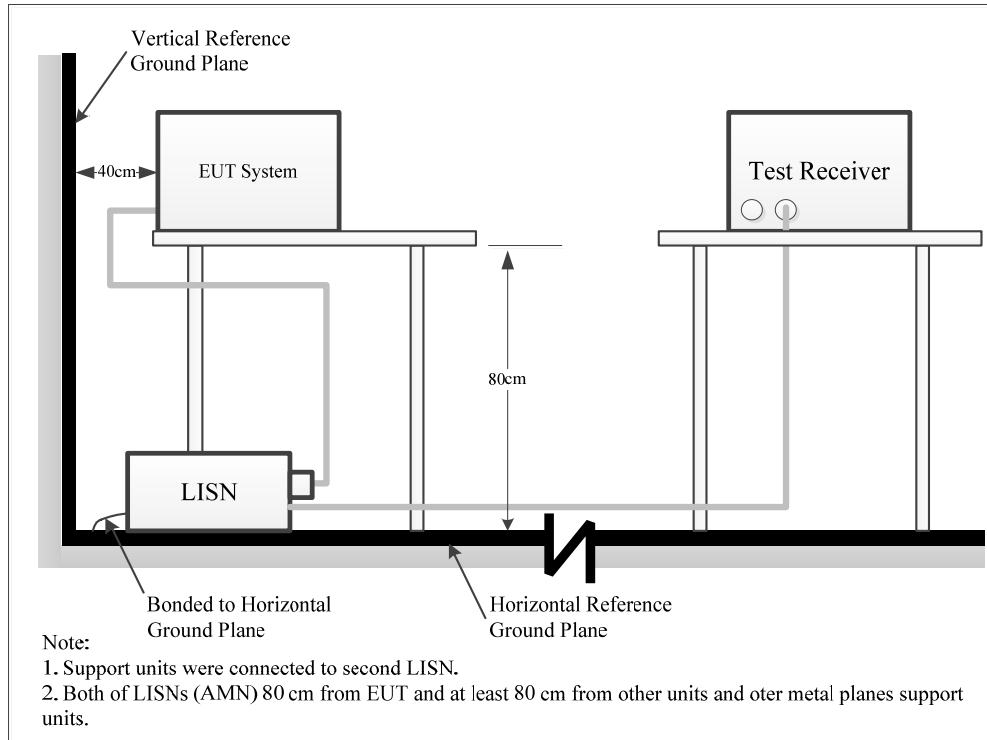

The measurement procedure of EUT setup is according with ANSI C63.10-2020 + Cor.1-2023. The related limit was specified in FCC Part 15.207, RSS-Gen limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Result & Margin Calculation

The Result is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Result (dB}\mu\text{V)} &= \text{Reading (dB}\mu\text{V)} + \text{Factor (dB)}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Result (dB}\mu\text{V)}$$


Test Data

Temperature:	22.7 °C
Relative Humidity:	56 %
ATM Pressure:	100.1 kPa
Test Date:	2025-08-29
Test Engineer:	Wlif Wu

Note: The maximum output power mode: EDR ($\pi/4$ -DQPSK) high channel was tested.

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927

Temp/Humi/ATM: 22.7°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

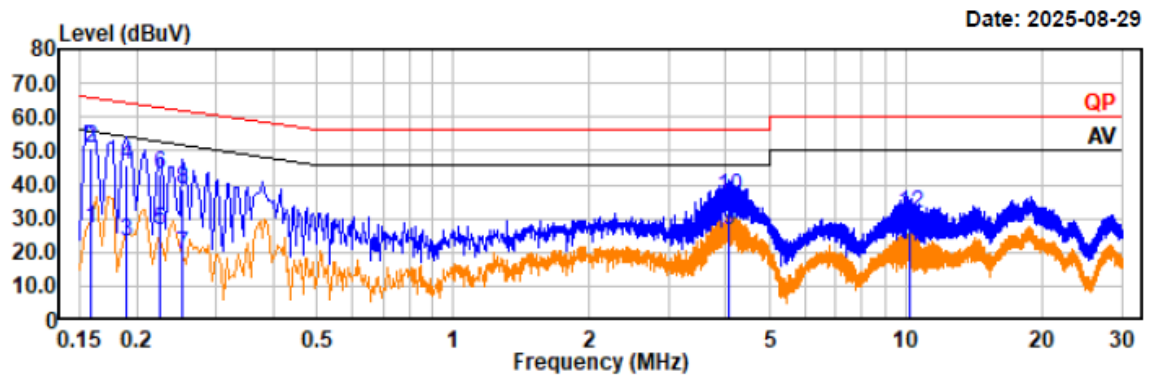


Trace: 1

Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.159	6.21	21.08	27.29	55.51	28.22	Line	Average
0.159	29.49	21.08	50.57	65.51	14.94	Line	QP
0.191	2.25	20.97	23.22	54.01	30.79	Line	Average
0.191	24.93	20.97	45.90	64.01	18.11	Line	QP
0.224	5.54	20.85	26.39	52.66	26.27	Line	Average
0.224	22.06	20.85	42.91	62.66	19.75	Line	QP
0.251	-1.25	20.77	19.52	51.71	32.19	Line	Average
0.251	18.08	20.77	38.85	61.71	22.86	Line	QP
4.070	5.66	20.92	26.58	46.00	19.42	Line	Average
4.070	15.70	20.92	36.62	56.00	19.38	Line	QP
10.177	2.18	20.14	22.32	50.00	27.68	Line	Average
10.177	11.19	20.14	31.33	60.00	28.67	Line	QP

Project No.: 2507W73938E-RF
 Test Mode: EDR 2DH5 2480MHz
 EUT Model: SNM927

Temp/Humi/ATM: 22.7°C/56%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

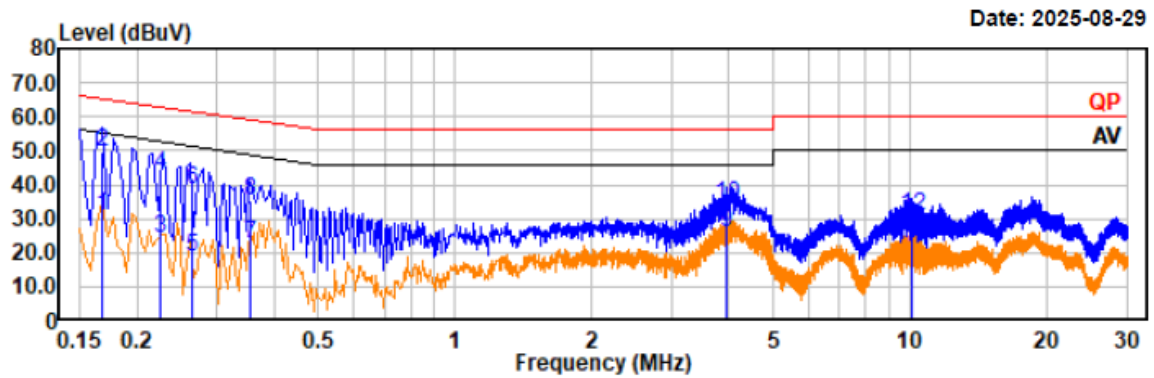

Trace: 1

Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.167	9.73	21.11	30.84	55.09	24.25	Neutral	Average
0.167	28.35	21.11	49.46	65.09	15.63	Neutral	QP
0.225	3.58	20.87	24.45	52.62	28.17	Neutral	Average
0.225	21.98	20.87	42.85	62.62	19.77	Neutral	QP
0.264	-1.97	20.78	18.81	51.29	32.48	Neutral	Average
0.264	17.65	20.78	38.43	61.29	22.86	Neutral	QP
0.355	2.00	20.60	22.60	48.85	26.25	Neutral	Average
0.355	14.98	20.60	35.58	58.85	23.27	Neutral	QP
3.945	5.14	20.94	26.08	46.00	19.92	Neutral	Average
3.945	13.22	20.94	34.16	56.00	21.84	Neutral	QP
10.138	1.33	20.43	21.76	50.00	28.24	Neutral	Average
10.138	10.41	20.43	30.84	60.00	29.16	Neutral	QP


FCC §15.205, §15.209 & §15.247(d) & RSS-247 Clause 5.5, RSS-GEN ISSUE5 Clause 8.10 – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d); RSS-247 Clause 5.5; RSS-GEN ISSUE5 Clause 8.10


Test System Setup

9 kHz-30MHz

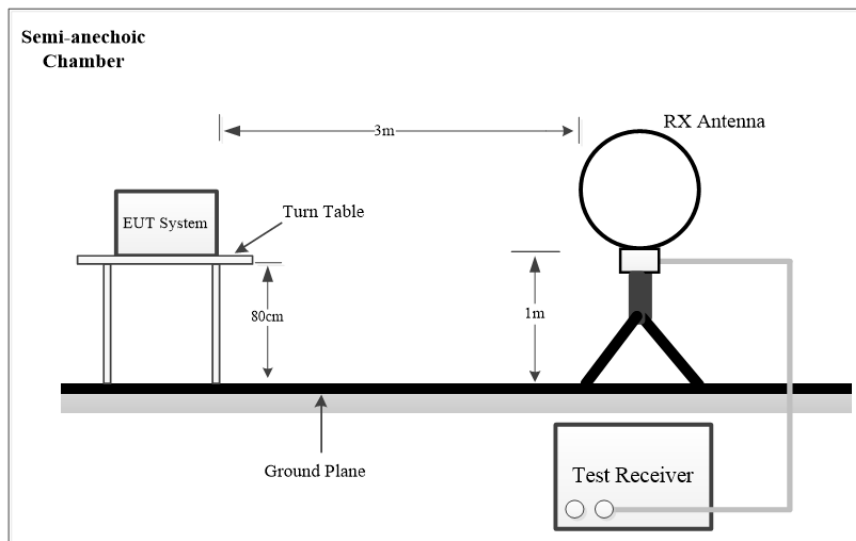

Below 1 GHz:

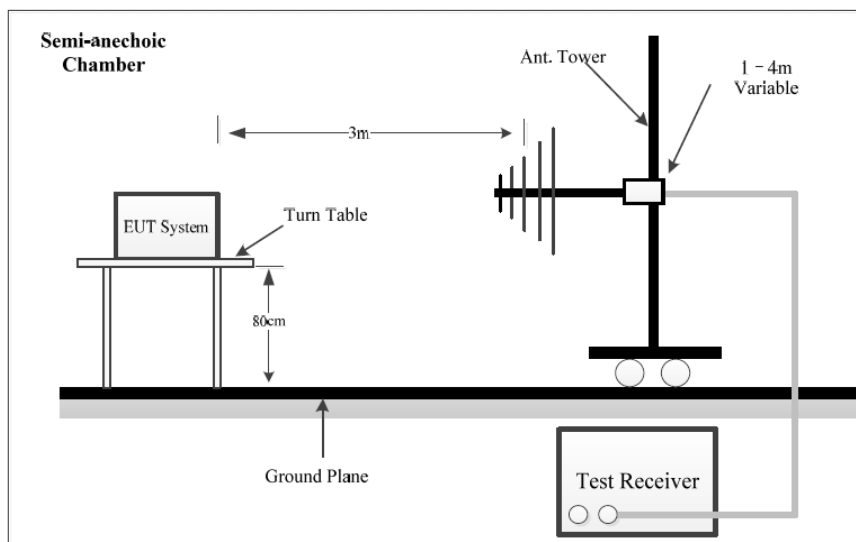

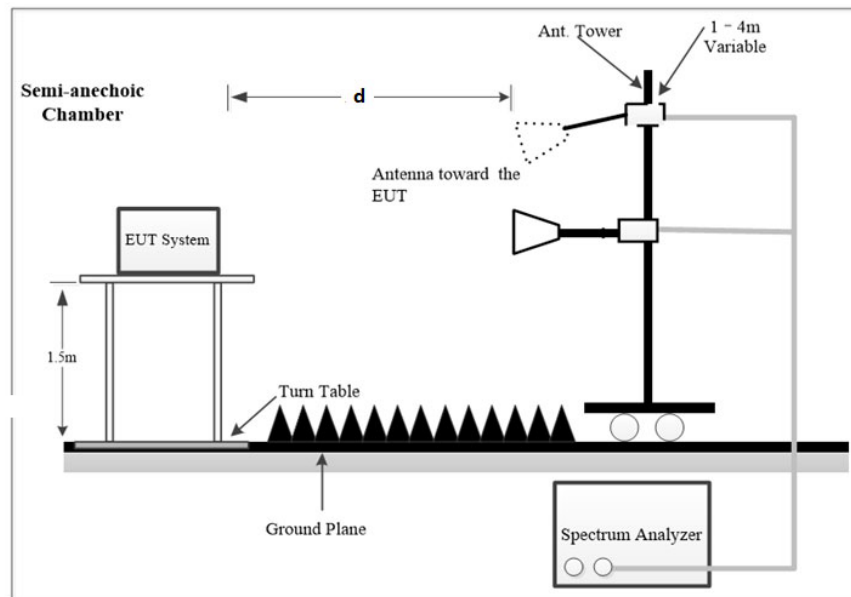Above 1GHz:

The radiated emission tests using the setup accordance with the ANSI C63.10-2020 + Cor.1-2023. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

NOTE: d is testing distance;

For Radiated Emission test (1GHz-18GHz) and Bandedge Emission test, which was performed at 3 m distance.

For Radiated Emission test (18GHz-25GHz), which was performed at 1.5 m distance, according to ANSI C63.10-2020 + Cor.1-2023, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m.

Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB = 6 dB

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI Test Receiver & Spectrum Analyzer Setup was set with the following configurations:

Frequency Range	RBW	VBW	Measurement
9 kHz – 150 kHz	300Hz	1 kHz	PK
	200Hz	/	QP
150 kHz – 30 MHz	10 kHz	30 kHz	PK
	9kHz	/	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	PK
	120kHz	/	QP

1GHz~25GHz:

Pre-scan:

Measurement	RBW	Video B/W	Detector
PK	1MHz	3MHz	PK
Ave	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Measurement	RBW	Video B/W	Detector
PK	1MHz	3MHz	PK
Ave	1MHz	10Hz	PK

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. The report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground parallel) unless the margin is greater than 20 dB, then the following statement shall be made: "all emissions were greater than 20 dB below the limit."

Below 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

Above 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is below the AV emission limit, there's no need to record the measured AV level of the emissions in the report.

Result & Margin Calculation

The Result is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

For 9 kHz to 18GHz Radiated emission test and Bandedge emissions test

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

For 18GHz to 25GHz Radiated emission test

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB) - Extrapolation factor (dB)

Extrapolation factor = 6 dB (distance = 1.5m)

Result (dBμV/m) = Reading (dBμV) + Factor (dB/m)

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) - Result (dBμV/m)

The spurious emission from 9 kHz-30MHz of IC RSS-Gen standard, the unit of final result on the test plots are dB μ V/m, so the limit should be added by 51.5dB from dB μ A/m to dB μ V/m.

Test Data

Please refer to the below table and plots.

Frequency Range:	Below 1 GHz	Above 1 GHz
Temperature:	22.1°C~23.1°C	22.1°C
Relative Humidity:	57%~58%	58%
ATM Pressure:	100.1kPa	100.1kPa
Test Date:	2025-08-19~2025-08-31	2025-08-19
Test Engineer:	Wlif Wu	Wlif Wu

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded.


1) 9 kHz ~30 MHz

Pre-scan in parallel, ground-parallel and perpendicular of orientation of loop antenna, parallel is worst case.

Note: The maximum output power mode: EDR ($\pi/4$ -DQPSK) high channel was tested.

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

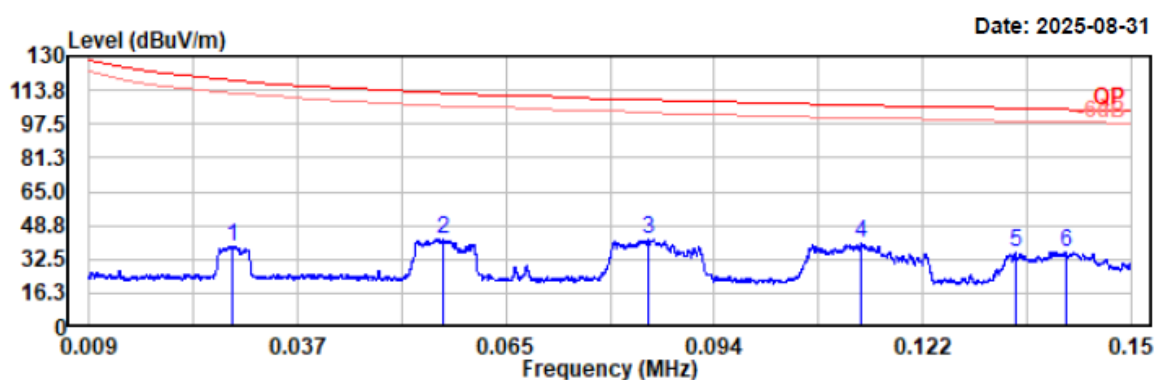


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.028	18.92	19.89	38.81	118.54	79.73	Peak
0.057	22.15	19.91	42.06	112.51	70.45	Peak
0.085	22.15	19.76	41.91	109.05	67.14	Peak
0.113	20.27	19.73	40.00	106.51	66.51	Peak
0.134	15.83	19.73	35.56	105.04	69.48	Peak
0.141	16.37	19.73	36.10	104.61	68.51	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

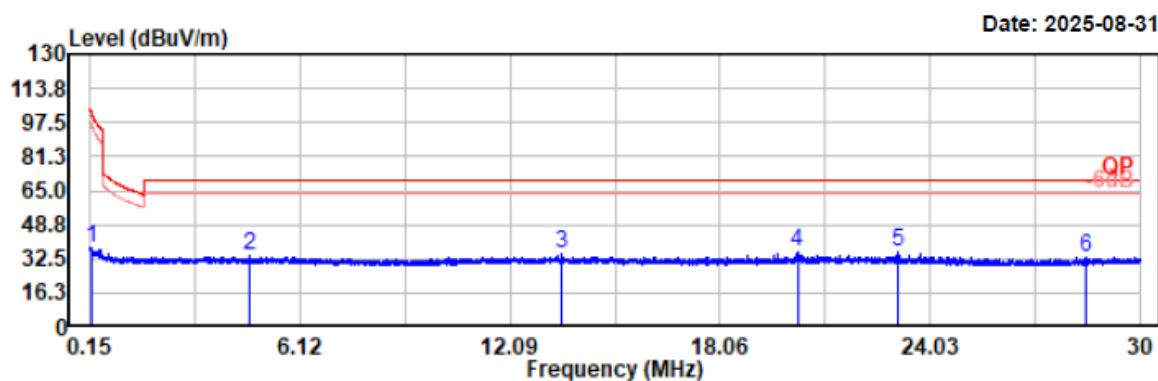

Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.189	18.27	19.72	37.99	102.08	64.09	Peak
4.681	14.11	19.70	33.81	69.54	35.73	Peak
13.562	14.92	19.74	34.66	69.54	34.88	Peak
20.260	15.58	20.10	35.68	69.54	33.86	Peak
23.129	15.83	20.17	36.00	69.54	33.54	Peak
28.439	13.20	20.04	33.24	69.54	36.30	Peak


Note: $\text{dBuV/m} = \text{dBuA/m} + 51.5\text{dB}$

2) 30MHz-1GHz

Note: The maximum output power mode: EDR ($\pi/4$ -DQPSK) high channel was tested.

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

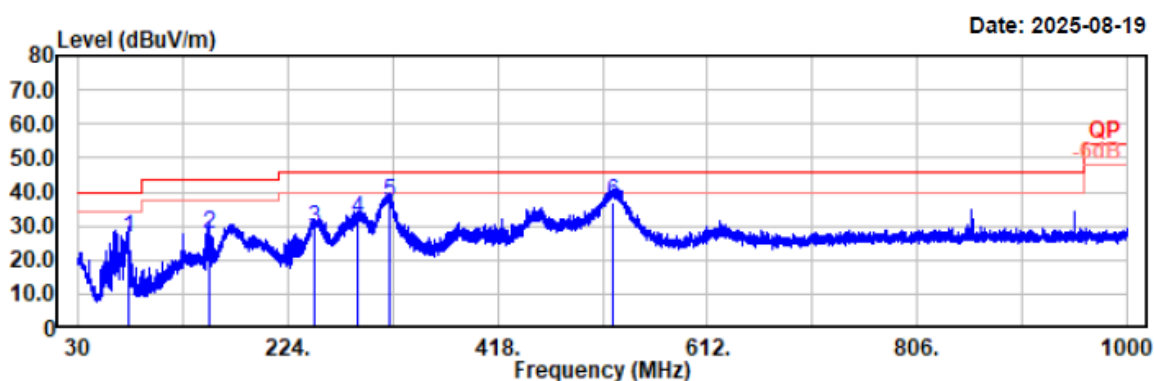


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
75.88	43.85	-17.16	26.69	40.00	13.31	Horizontal	Peak
150.57	38.85	-11.17	27.68	43.50	15.82	Horizontal	Peak
249.03	40.55	-11.42	29.13	46.00	16.87	Horizontal	Peak
289.09	41.46	-9.24	32.22	46.00	13.78	Horizontal	Peak
317.22	45.59	-8.84	36.75	46.00	9.25	Horizontal	QP
524.89	40.34	-3.38	36.96	46.00	9.04	Horizontal	QP

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

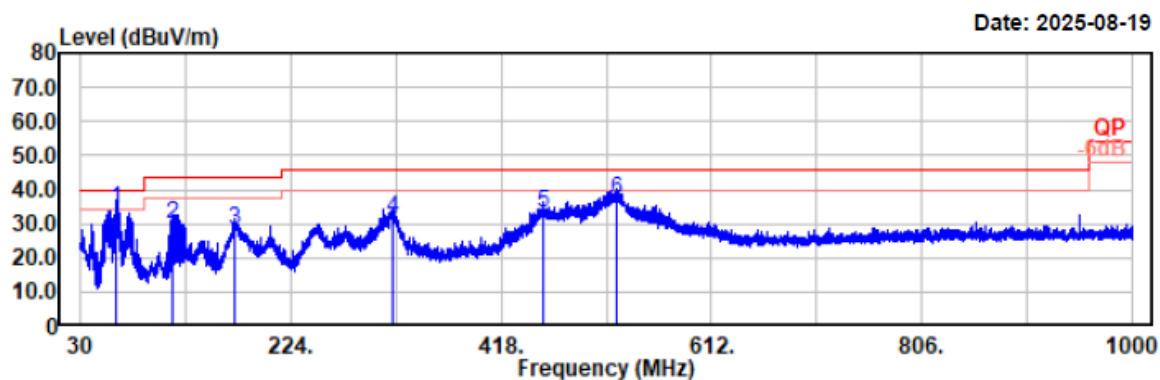


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
63.08	51.42	-17.36	34.06	40.00	5.94	Vertical	QP
115.07	40.45	-10.89	29.56	43.50	13.94	Vertical	Peak
172.69	40.15	-11.94	28.21	43.50	15.29	Vertical	Peak
317.22	40.53	-8.84	31.69	46.00	14.31	Vertical	Peak
457.29	37.83	-4.69	33.14	46.00	12.86	Vertical	Peak
525.09	40.41	-3.37	37.04	46.00	8.96	Vertical	QP

3) 1 GHz-3 GHz

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

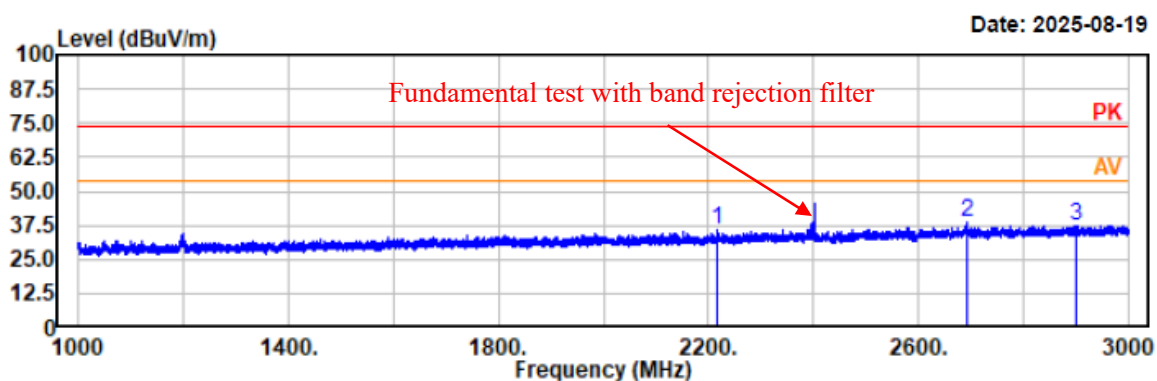


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2217.80	47.42	-11.89	35.53	74.00	38.47	horizontal	Peak
2692.40	48.51	-10.03	38.48	74.00	35.52	horizontal	Peak
2901.40	47.06	-9.54	37.52	74.00	36.48	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

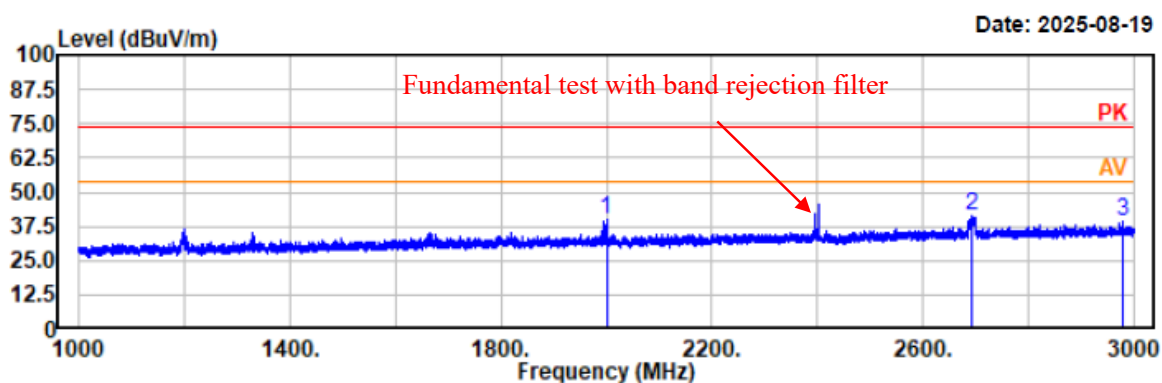


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2000.00	52.81	-12.55	40.26	74.00	33.74	vertical	Peak
2692.00	51.10	-10.03	41.07	74.00	32.93	vertical	Peak
2979.80	48.21	-9.05	39.16	74.00	34.84	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

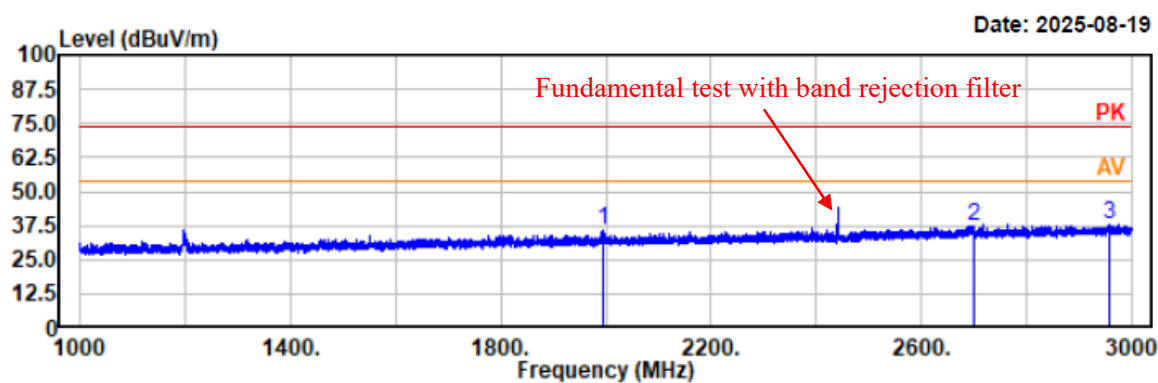


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1995.00	48.48	-12.57	35.91	74.00	38.09	horizontal	Peak
2700.40	47.33	-10.00	37.33	74.00	36.67	horizontal	Peak
2958.80	47.22	-9.16	38.06	74.00	35.94	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

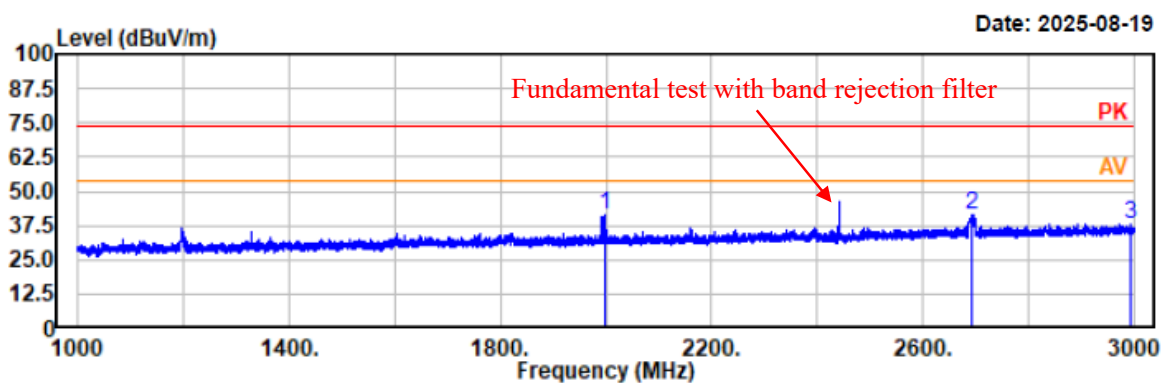


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1998.40	53.74	-12.56	41.18	74.00	32.82	vertical	Peak
2691.60	51.69	-10.03	41.66	74.00	32.34	vertical	Peak
2992.20	47.13	-8.99	38.14	74.00	35.86	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

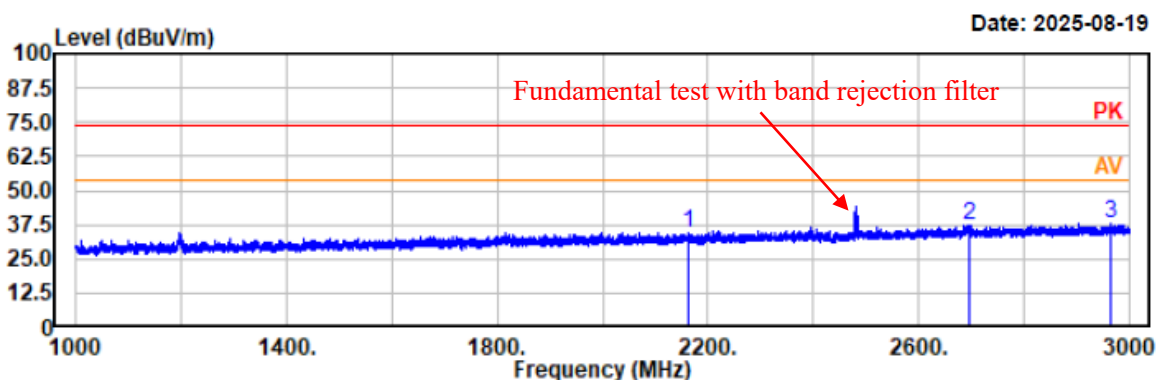


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2164.40	46.86	-12.08	34.78	74.00	39.22	horizontal	Peak
2696.60	47.51	-10.01	37.50	74.00	36.50	horizontal	Peak
2963.40	47.17	-9.14	38.03	74.00	35.97	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

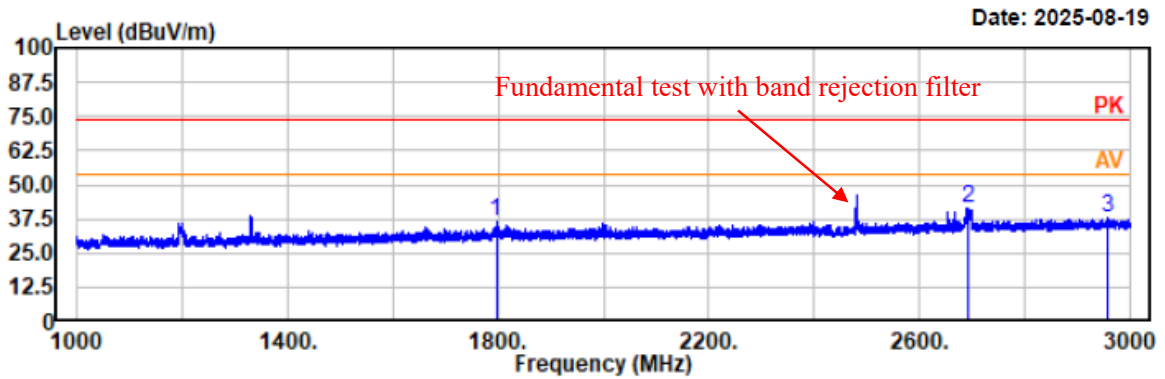


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1796.00	49.84	-13.24	36.60	74.00	37.40	vertical	Peak
2691.40	51.57	-10.03	41.54	74.00	32.46	vertical	Peak
2957.80	46.84	-9.17	37.67	74.00	36.33	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

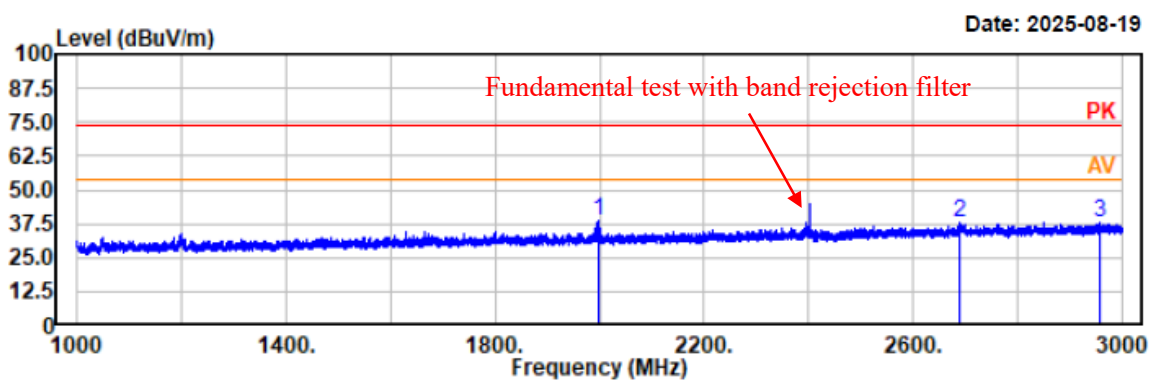


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1997.00	50.94	-12.56	38.38	74.00	35.62	horizontal	Peak
2690.20	47.81	-10.04	37.77	74.00	36.23	horizontal	Peak
2956.60	47.26	-9.17	38.09	74.00	35.91	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

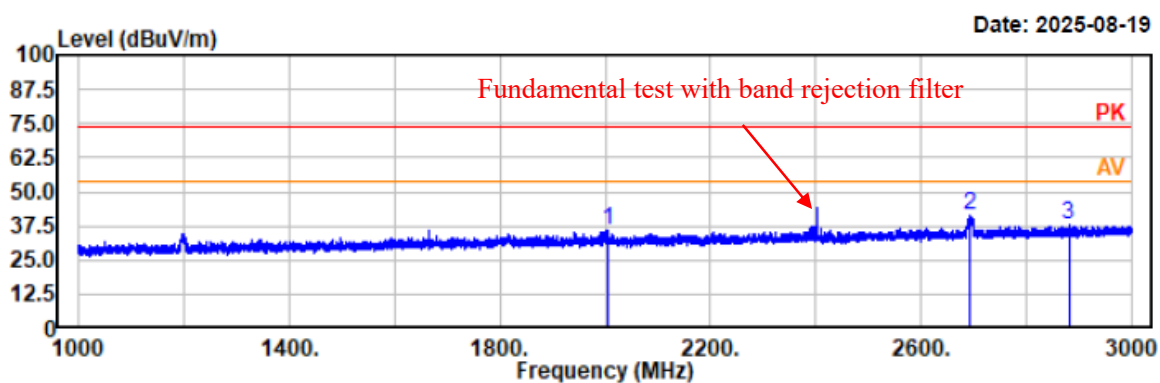


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2003.80	48.39	-12.54	35.85	74.00	38.15	vertical	Peak
2692.20	51.36	-10.03	41.33	74.00	32.67	vertical	Peak
2880.80	47.36	-9.58	37.78	74.00	36.22	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

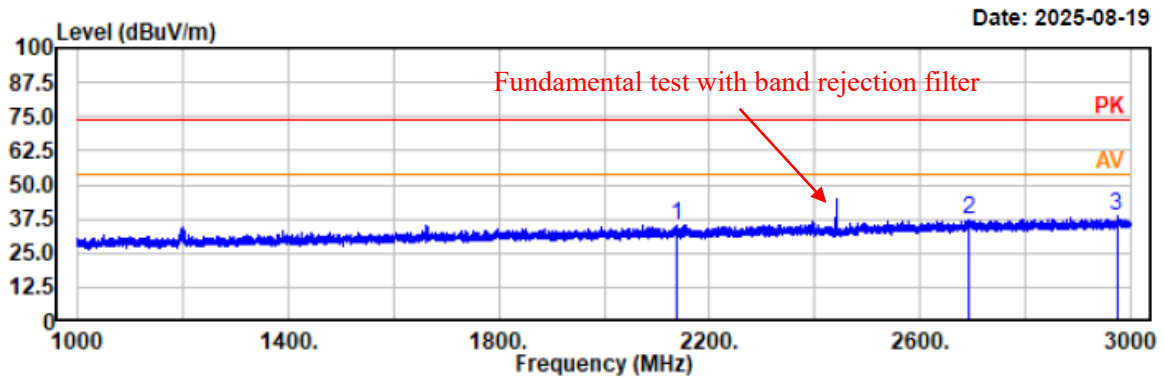


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2139.40	47.56	-12.15	35.41	74.00	38.59	horizontal	Peak
2693.60	47.16	-10.03	37.13	74.00	36.87	horizontal	Peak
2973.80	47.79	-9.07	38.72	74.00	35.28	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

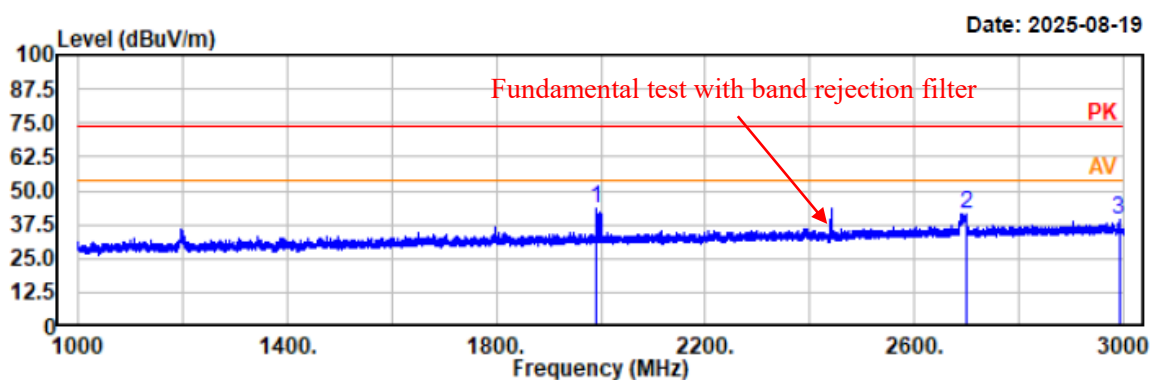


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1991.20	55.84	-12.60	43.24	74.00	30.76	vertical	Peak
2700.00	51.47	-10.00	41.47	74.00	32.53	vertical	Peak
2991.80	48.02	-8.99	39.03	74.00	34.97	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

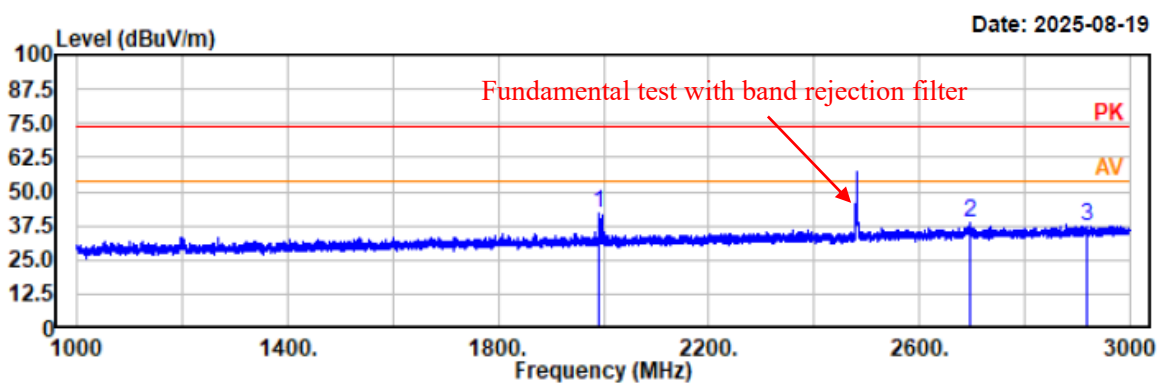


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1991.20	54.46	-12.60	41.86	74.00	32.14	horizontal	Peak
2696.60	48.57	-10.01	38.56	74.00	35.44	horizontal	Peak
2917.60	46.98	-9.42	37.56	74.00	36.44	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

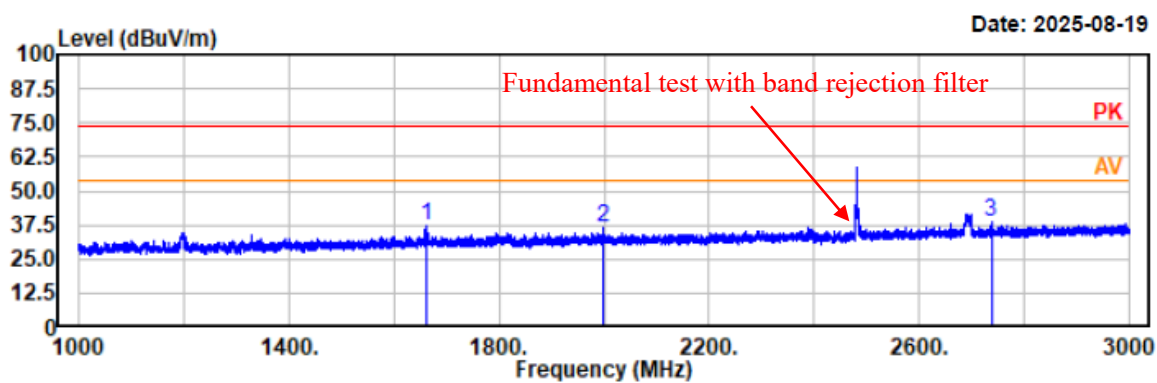


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1663.20	50.66	-13.75	36.91	74.00	37.09	vertical	Peak
1997.00	48.87	-12.56	36.31	74.00	37.69	vertical	Peak
2737.60	48.90	-9.96	38.94	74.00	35.06	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

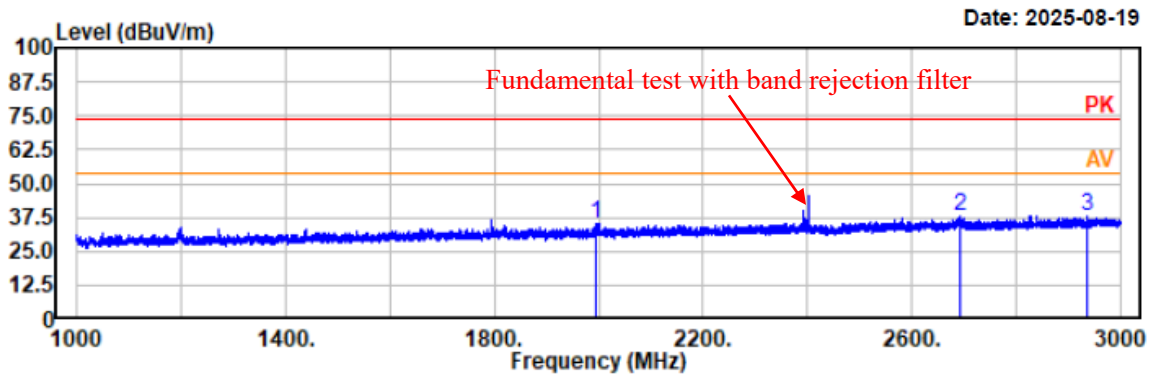


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1993.20	47.61	-12.58	35.03	74.00	38.97	horizontal	Peak
2694.00	47.88	-10.02	37.86	74.00	36.14	horizontal	Peak
2936.40	47.23	-9.30	37.93	74.00	36.07	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

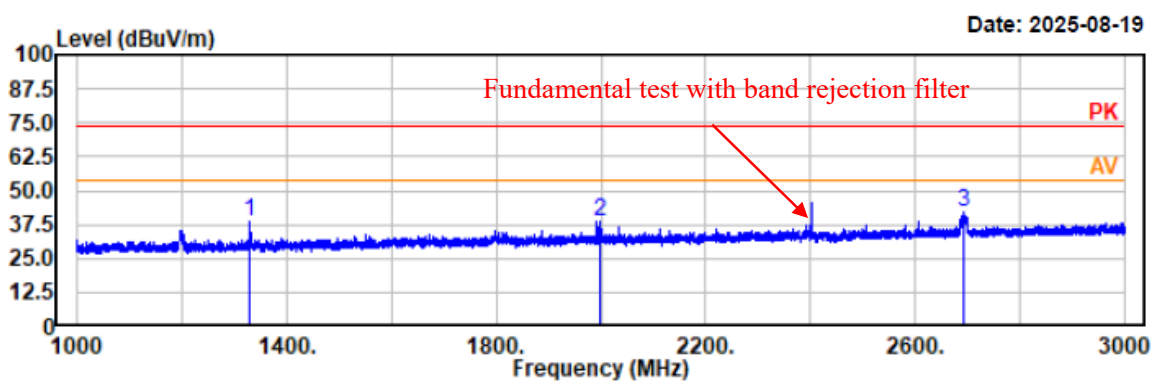


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1329.40	53.56	-14.95	38.61	74.00	35.39	vertical	Peak
1999.20	51.32	-12.55	38.77	74.00	35.23	vertical	Peak
2692.20	52.21	-10.03	42.18	74.00	31.82	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

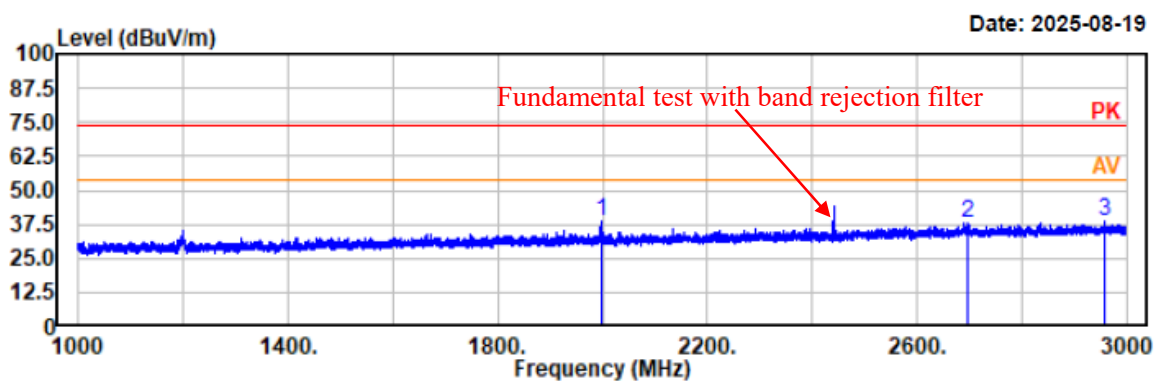


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1999.20	51.01	-12.55	38.46	74.00	35.54	horizontal	Peak
2696.80	48.17	-10.01	38.16	74.00	35.84	horizontal	Peak
2956.20	47.56	-9.18	38.38	74.00	35.62	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

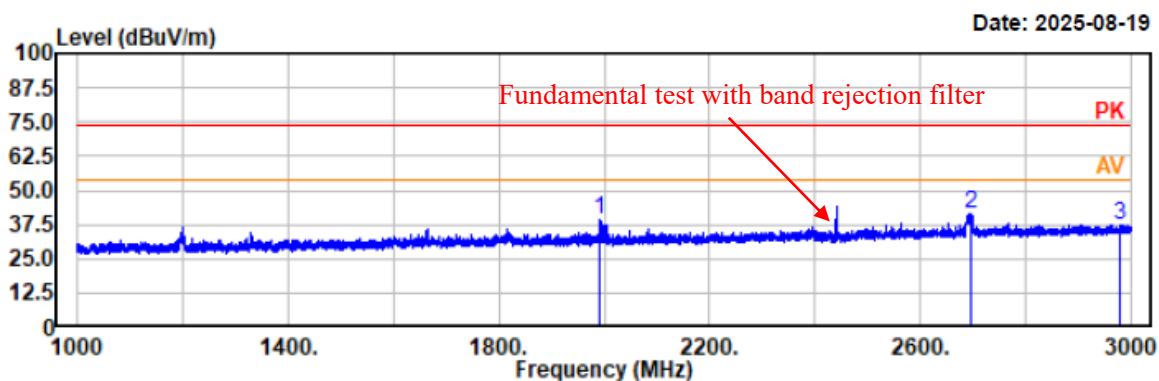


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1992.20	51.89	-12.58	39.31	74.00	34.69	vertical	Peak
2696.00	51.54	-10.02	41.52	74.00	32.48	vertical	Peak
2978.60	46.53	-9.06	37.47	74.00	36.53	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

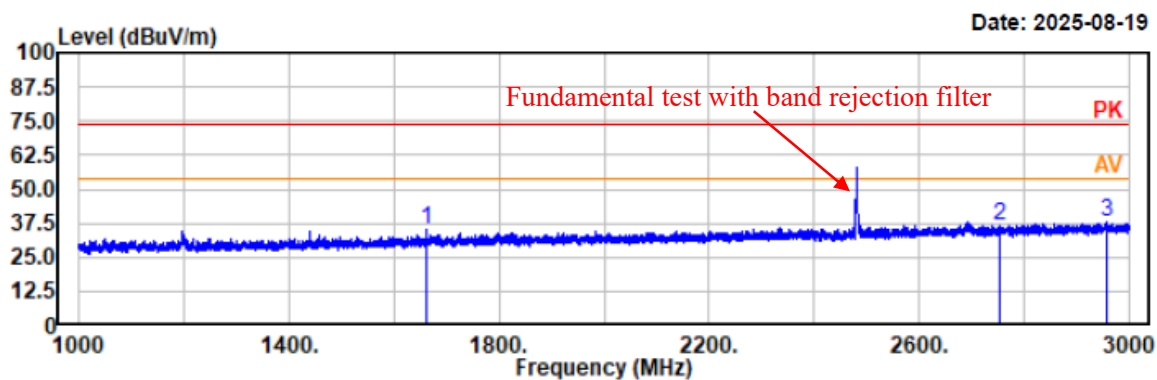


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1660.60	48.97	-13.76	35.21	74.00	38.79	horizontal	Peak
2754.20	46.68	-9.92	36.76	74.00	37.24	horizontal	Peak
2958.40	46.80	-9.17	37.63	74.00	36.37	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

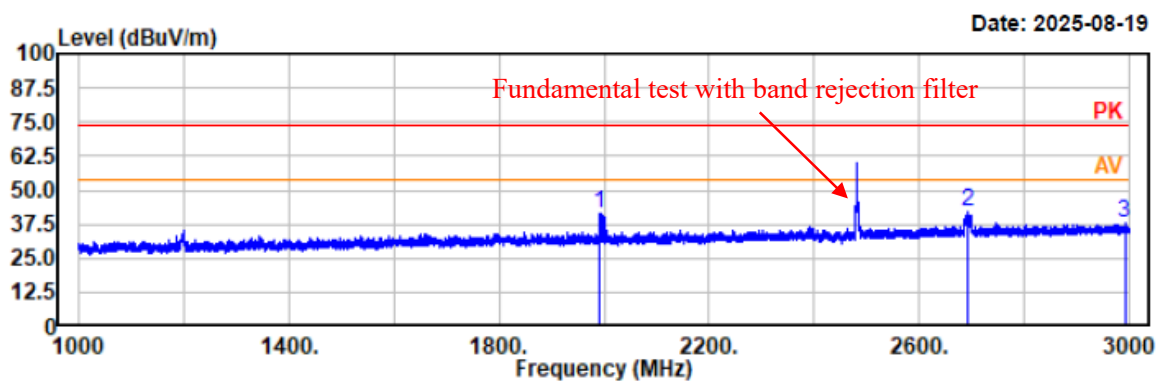


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1992.80	54.28	-12.58	41.70	74.00	32.30	vertical	Peak
2691.40	51.89	-10.03	41.86	74.00	32.14	vertical	Peak
2991.80	46.88	-8.99	37.89	74.00	36.11	vertical	Peak

4) 3 GHz - 18 GHz

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

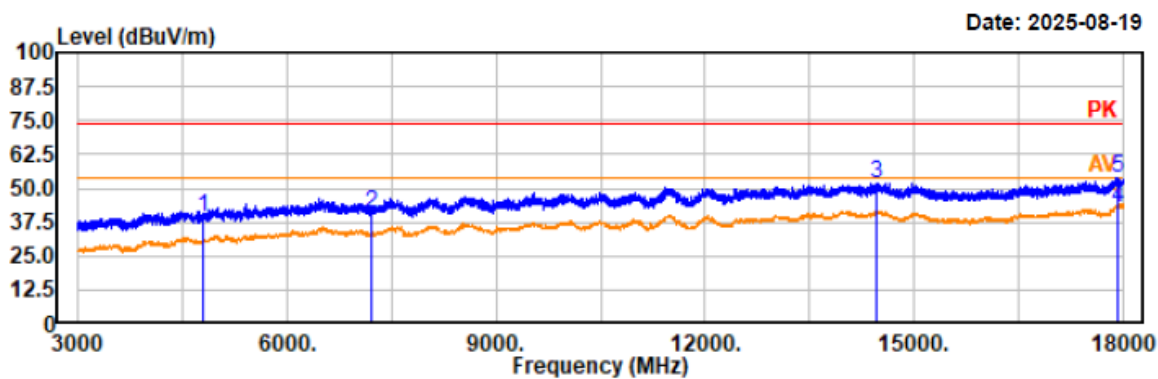


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	44.36	-5.24	39.12	74.00	34.88	horizontal	Peak
7206.00	43.07	-2.55	40.52	74.00	33.48	horizontal	Peak
14463.00	46.85	5.13	51.98	74.00	22.02	horizontal	Peak
17916.00	36.07	6.82	42.89	54.00	11.11	horizontal	Average
17916.00	46.87	6.82	53.69	74.00	20.31	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

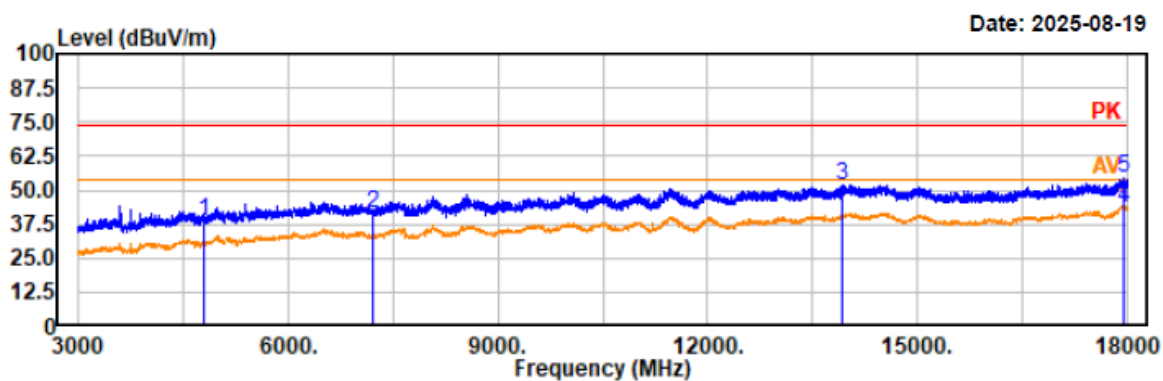

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	44.13	-5.24	38.89	74.00	35.11	vertical	Peak
7206.00	44.08	-2.55	41.53	74.00	32.47	vertical	Peak
13917.00	46.71	5.17	51.88	74.00	22.12	vertical	Peak
17962.50	36.62	6.86	43.48	54.00	10.52	vertical	Average
17962.50	47.70	6.86	54.56	74.00	19.44	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

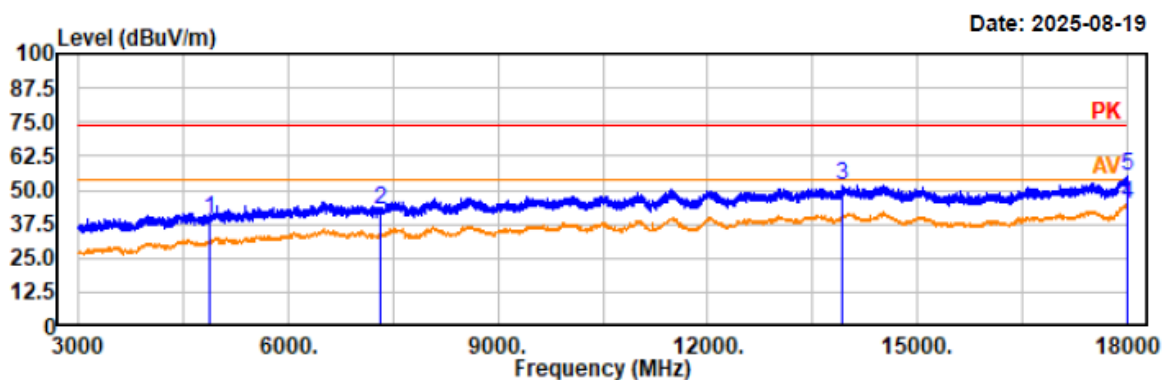

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.00	44.58	-5.31	39.27	74.00	34.73	horizontal	Peak
7323.00	45.09	-2.24	42.85	74.00	31.15	horizontal	Peak
13930.50	46.69	5.18	51.87	74.00	22.13	horizontal	Peak
17992.50	37.78	6.90	44.68	54.00	9.32	horizontal	Average
17992.50	48.25	6.90	55.15	74.00	18.85	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

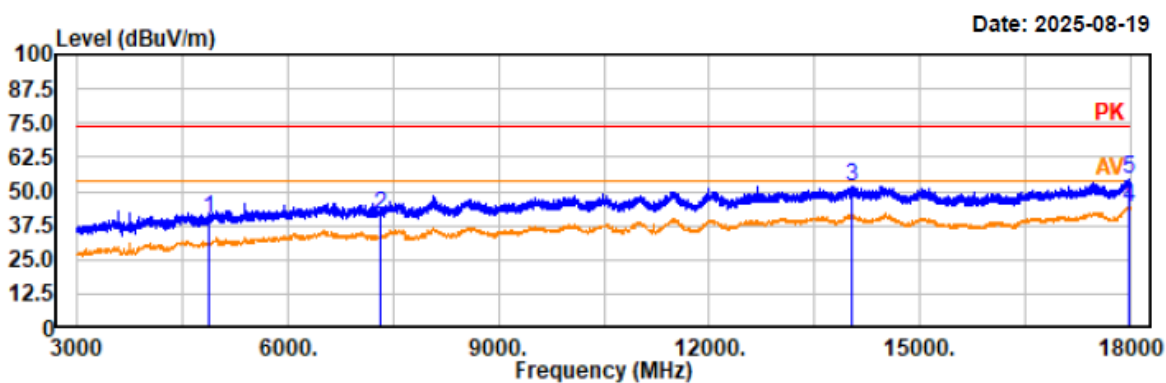

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.00	45.22	-5.31	39.91	74.00	34.09	vertical	Peak
7323.00	43.94	-2.24	41.70	74.00	32.30	vertical	Peak
14019.00	46.66	5.23	51.89	74.00	22.11	vertical	Peak
17988.00	37.41	6.89	44.30	54.00	9.70	vertical	Average
17988.00	47.49	6.89	54.38	74.00	19.62	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

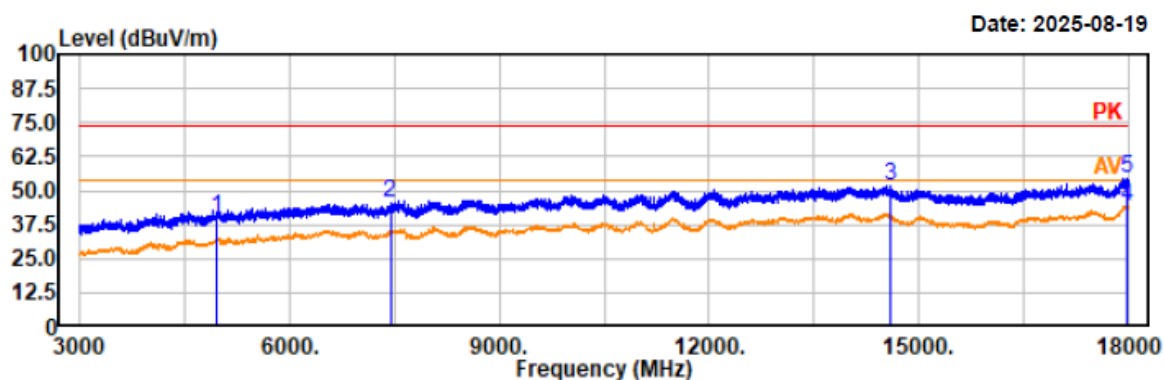

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	45.33	-5.11	40.22	74.00	33.78	horizontal	Peak
7440.00	47.77	-2.03	45.74	74.00	28.26	horizontal	Peak
14604.00	46.72	5.01	51.73	74.00	22.27	horizontal	Peak
17983.50	37.06	6.89	43.95	54.00	10.05	horizontal	Average
17983.50	47.60	6.89	54.49	74.00	19.51	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

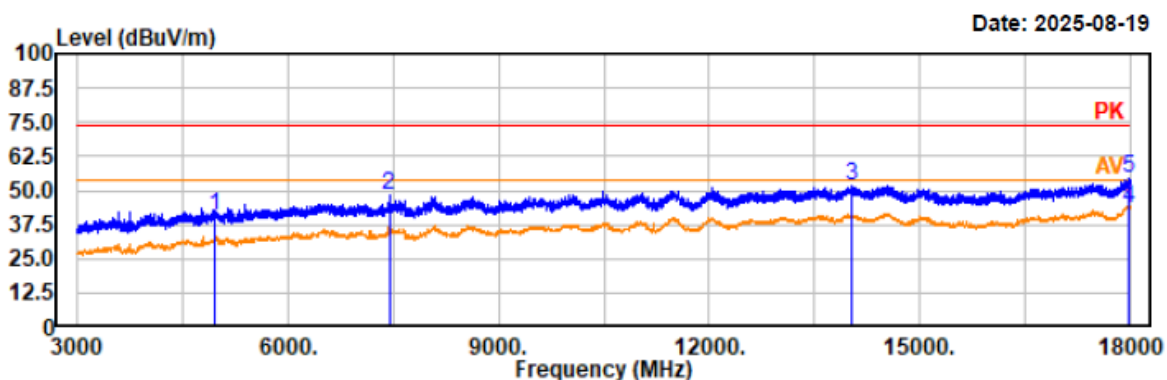


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	46.03	-5.11	40.92	74.00	33.08	vertical	Peak
7440.00	50.03	-2.03	48.00	74.00	26.00	vertical	Peak
14037.00	46.73	5.25	51.98	74.00	22.02	vertical	Peak
17968.50	36.71	6.88	43.59	54.00	10.41	vertical	Average
17968.50	47.39	6.88	54.27	74.00	19.73	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

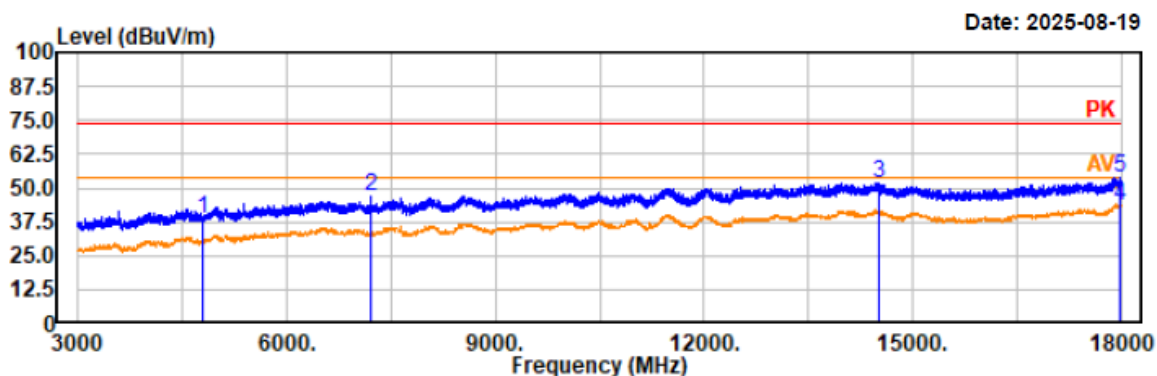

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	43.54	-5.24	38.30	74.00	35.70	horizontal	Peak
7206.00	49.32	-2.55	46.77	74.00	27.23	horizontal	Peak
14521.50	46.84	5.06	51.90	74.00	22.10	horizontal	Peak
17976.00	36.39	6.89	43.28	54.00	10.72	horizontal	Average
17976.00	46.64	6.89	53.53	74.00	20.47	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

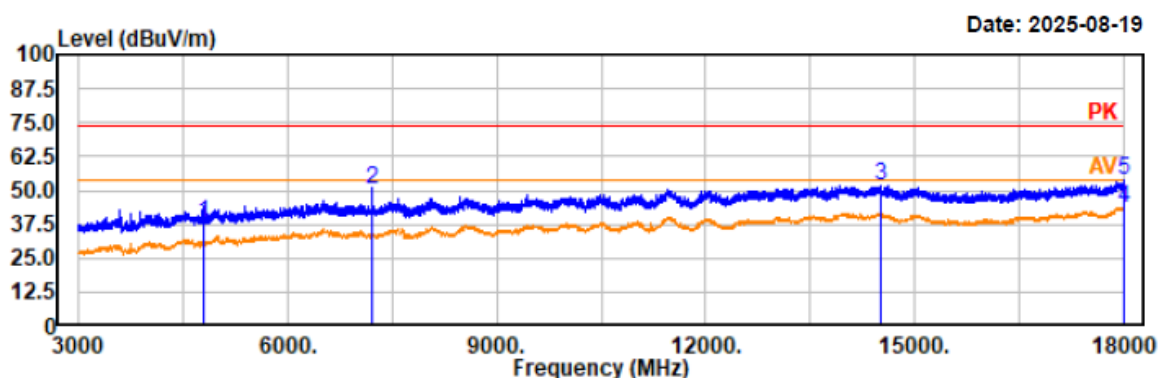

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	43.37	-5.24	38.13	74.00	35.87	vertical	Peak
7206.00	52.58	-2.55	50.03	74.00	23.97	vertical	Peak
14509.50	46.95	5.06	52.01	74.00	21.99	vertical	Peak
17995.50	36.61	6.91	43.52	54.00	10.48	vertical	Average
17995.50	46.70	6.91	53.61	74.00	20.39	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

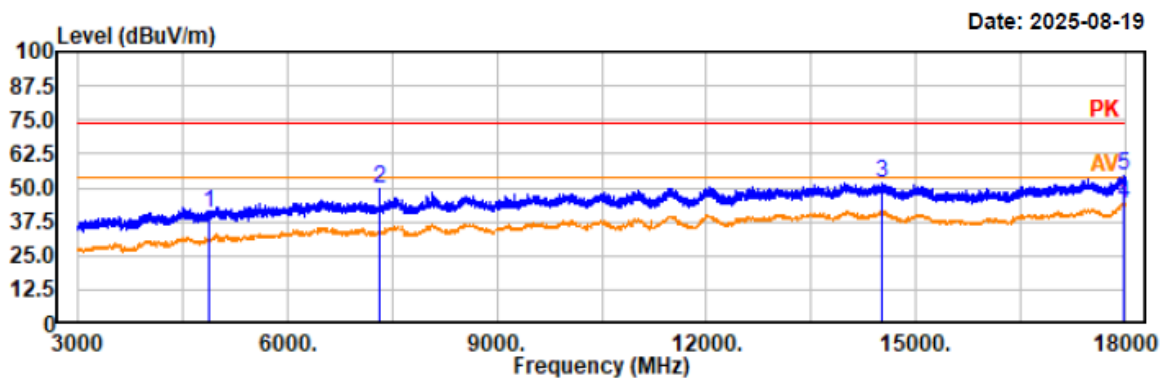

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.00	45.81	-5.31	40.50	74.00	33.50	horizontal	Peak
7323.00	51.95	-2.24	49.71	74.00	24.29	horizontal	Peak
14518.50	46.79	5.06	51.85	74.00	22.15	horizontal	Peak
17986.50	37.01	6.89	43.90	54.00	10.10	horizontal	Average
17986.50	47.74	6.89	54.63	74.00	19.37	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

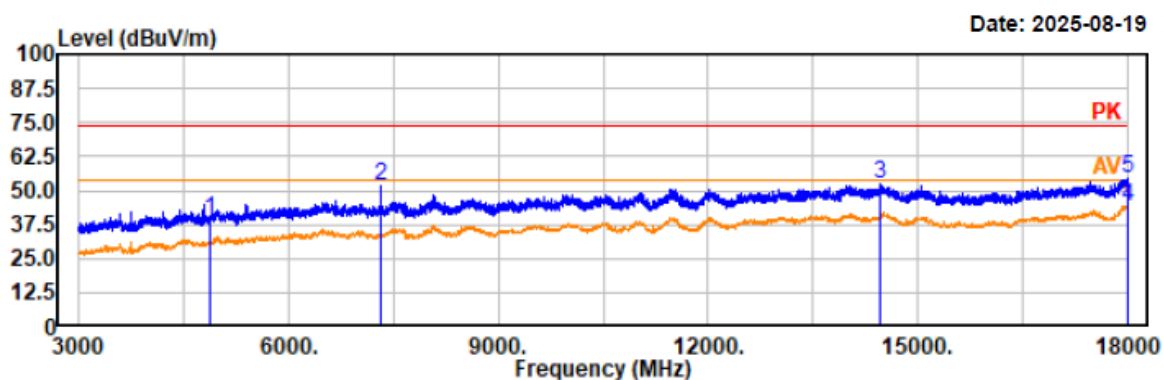

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.00	44.29	-5.31	38.98	74.00	35.02	vertical	Peak
7324.50	54.30	-2.23	52.07	74.00	21.93	vertical	Peak
14461.50	47.01	5.14	52.15	74.00	21.85	vertical	Peak
17992.50	37.08	6.90	43.98	54.00	10.02	vertical	Average
17992.50	47.27	6.90	54.17	74.00	19.83	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

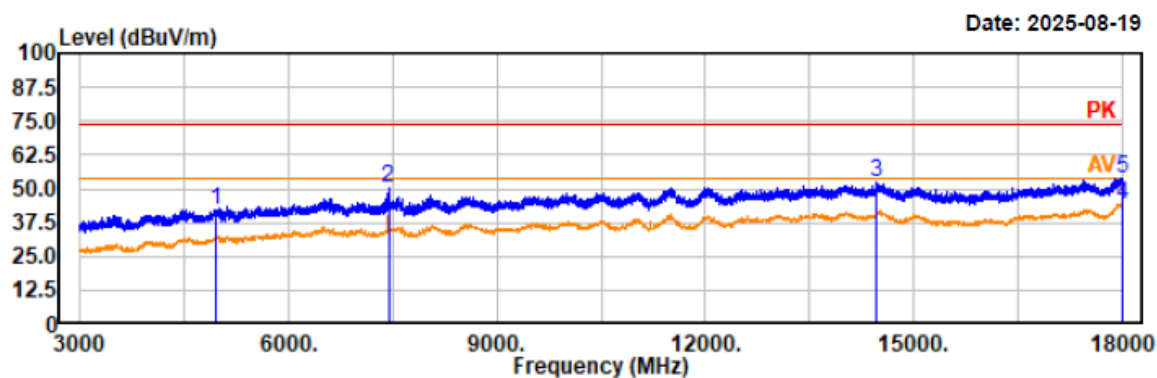

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	47.45	-5.11	42.34	74.00	31.66	horizontal	Peak
7440.00	52.62	-2.03	50.59	74.00	23.41	horizontal	Peak
14467.50	47.05	5.12	52.17	74.00	21.83	horizontal	Peak
17994.00	37.52	6.90	44.42	54.00	9.58	horizontal	Average
17994.00	47.21	6.90	54.11	74.00	19.89	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

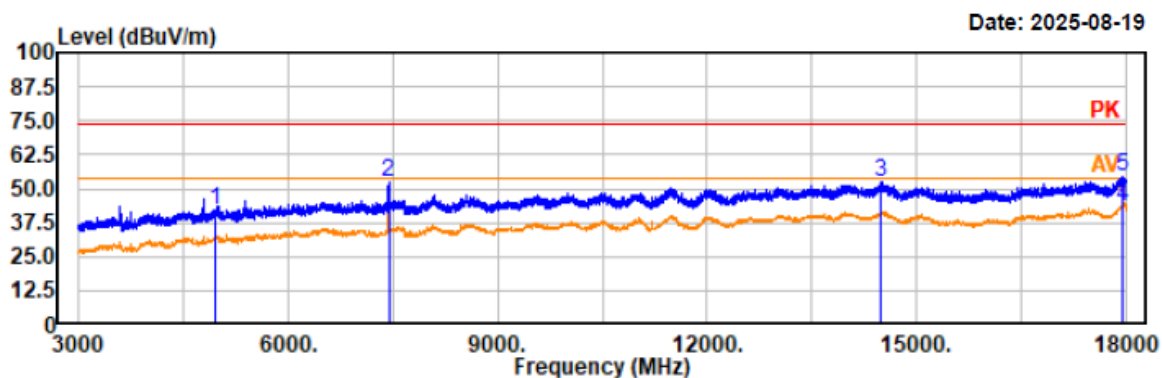

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	47.05	-5.11	41.94	74.00	32.06	vertical	Peak
7440.00	54.65	-2.03	52.62	74.00	21.38	vertical	Peak
14479.50	47.47	5.11	52.58	74.00	21.42	vertical	Peak
17943.00	36.51	6.84	43.35	54.00	10.65	vertical	Average
17943.00	47.80	6.84	54.64	74.00	19.36	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

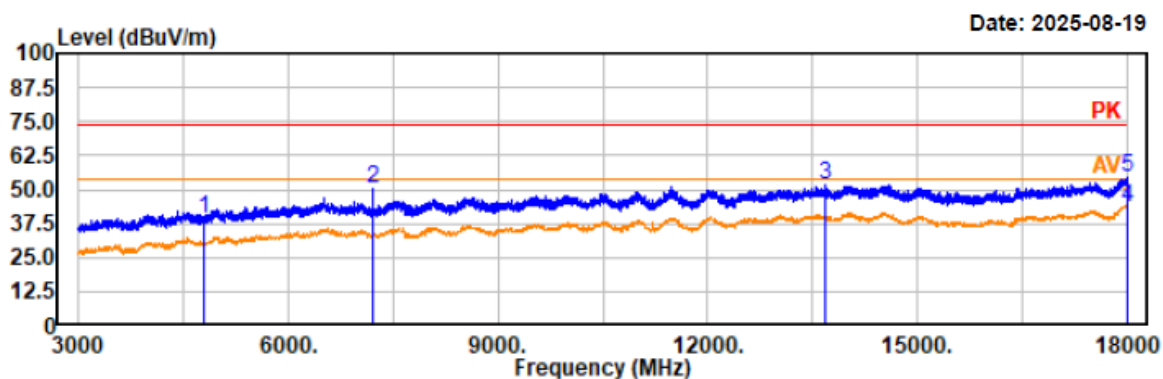

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	44.33	-5.24	39.09	74.00	34.91	horizontal	Peak
7206.00	52.56	-2.55	50.01	74.00	23.99	horizontal	Peak
13684.50	46.78	4.88	51.66	74.00	22.34	horizontal	Peak
17994.00	36.79	6.90	43.69	54.00	10.31	horizontal	Average
17994.00	47.55	6.90	54.45	74.00	19.55	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

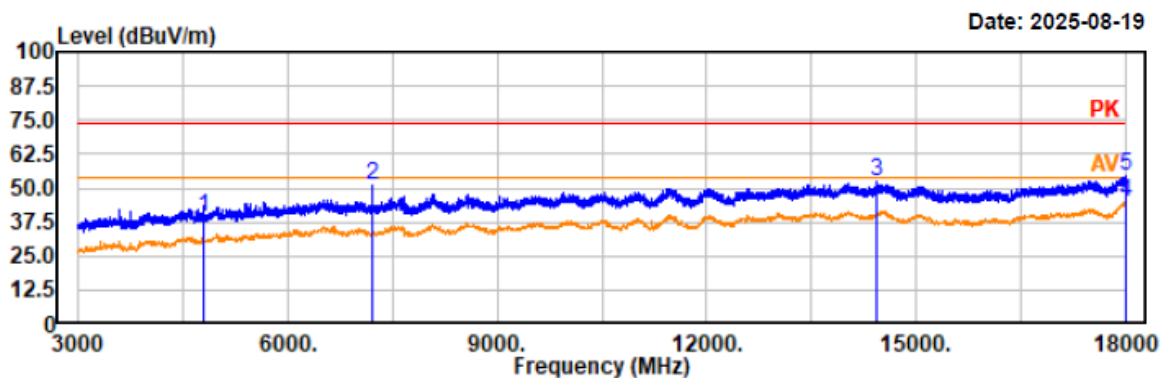

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	44.53	-5.24	39.29	74.00	34.71	vertical	Peak
7206.00	53.78	-2.55	51.23	74.00	22.77	vertical	Peak
14442.00	46.96	5.17	52.13	74.00	21.87	vertical	Peak
17992.50	37.69	6.90	44.59	54.00	9.41	vertical	Average
17992.50	47.42	6.90	54.32	74.00	19.68	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

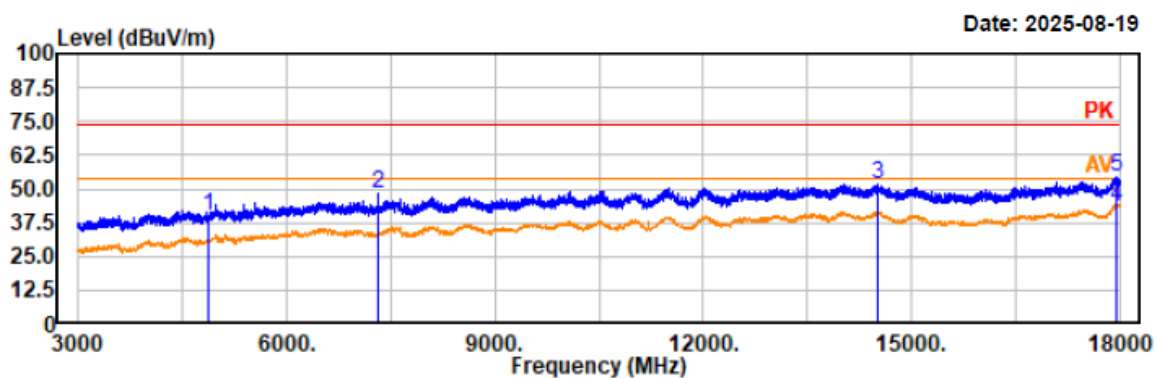


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.00	45.04	-5.31	39.73	74.00	34.27	horizontal	Peak
7323.00	50.23	-2.24	47.99	74.00	26.01	horizontal	Peak
14511.00	46.40	5.06	51.46	74.00	22.54	horizontal	Peak
17955.00	36.44	6.87	43.31	54.00	10.69	horizontal	Average
17955.00	47.30	6.87	54.17	74.00	19.83	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2441MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

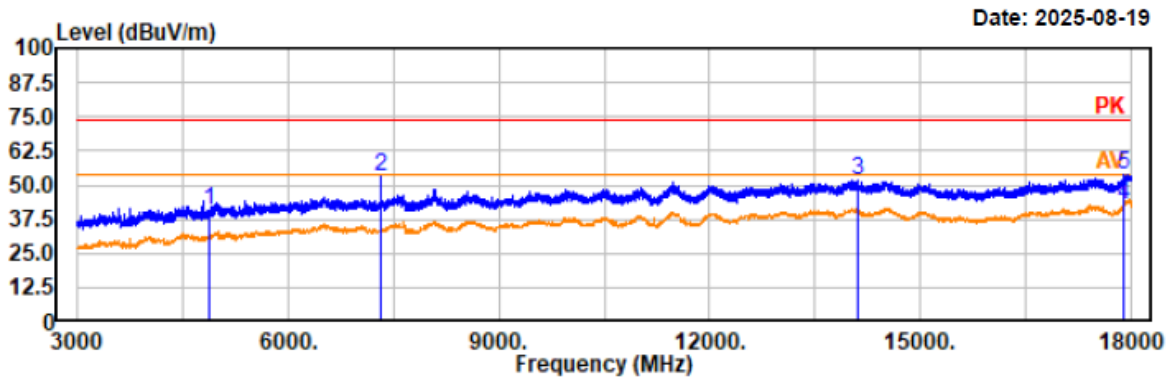


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4882.00	45.83	-5.31	40.52	74.00	33.48	vertical	Peak
7323.00	55.26	-2.24	53.02	74.00	20.98	vertical	Peak
14103.00	46.38	5.33	51.71	74.00	22.29	vertical	Peak
17890.50	35.71	6.77	42.48	54.00	11.52	vertical	Average
17890.50	47.10	6.77	53.87	74.00	20.13	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

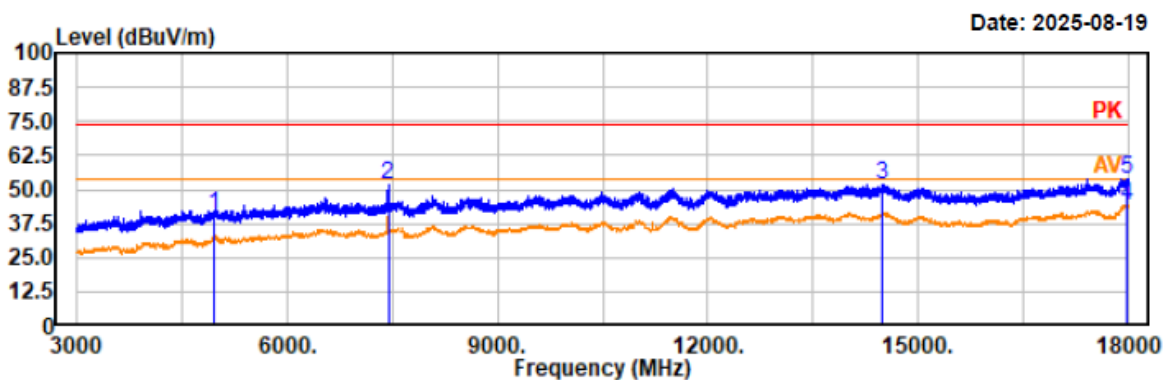

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	45.69	-5.11	40.58	74.00	33.42	horizontal	Peak
7440.00	53.94	-2.03	51.91	74.00	22.09	horizontal	Peak
14496.00	46.84	5.07	51.91	74.00	22.09	horizontal	Peak
17980.50	37.01	6.89	43.90	54.00	10.10	horizontal	Average
17980.50	47.00	6.89	53.89	74.00	20.11	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

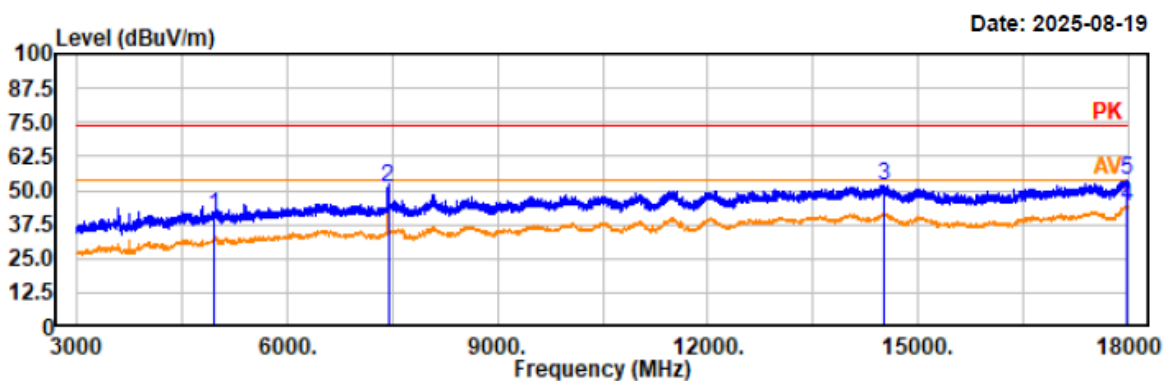

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	45.50	-5.11	40.39	74.00	33.61	vertical	Peak
7440.00	53.27	-2.03	51.24	74.00	22.76	vertical	Peak
14518.50	46.87	5.06	51.93	74.00	22.07	vertical	Peak
17980.50	37.09	6.89	43.98	54.00	10.02	vertical	Average
17980.50	47.09	6.89	53.98	74.00	20.02	vertical	Peak

5) 18GHz-25GHz

Note: The maximum output power mode: EDR ($\pi/4$ -DQPSK) high channel was tested.

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 1.5m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

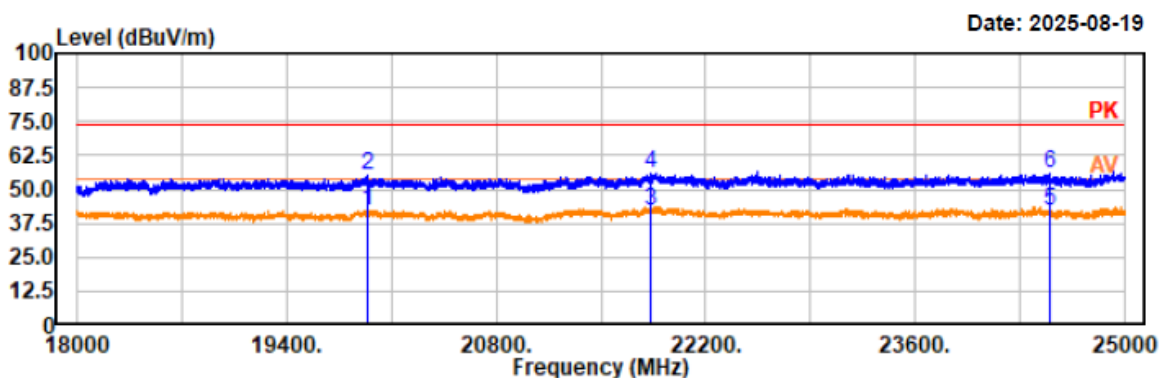

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
19934.60	38.62	3.49	42.11	54.00	11.89	horizontal	Average
19934.60	51.81	3.49	55.30	74.00	18.70	horizontal	Peak
21836.05	36.81	5.01	41.82	54.00	12.18	horizontal	Average
21836.05	51.06	5.01	56.07	74.00	17.93	horizontal	Peak
24498.25	35.66	6.22	41.88	54.00	12.12	horizontal	Average
24498.25	49.53	6.22	55.75	74.00	18.25	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 1.5m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

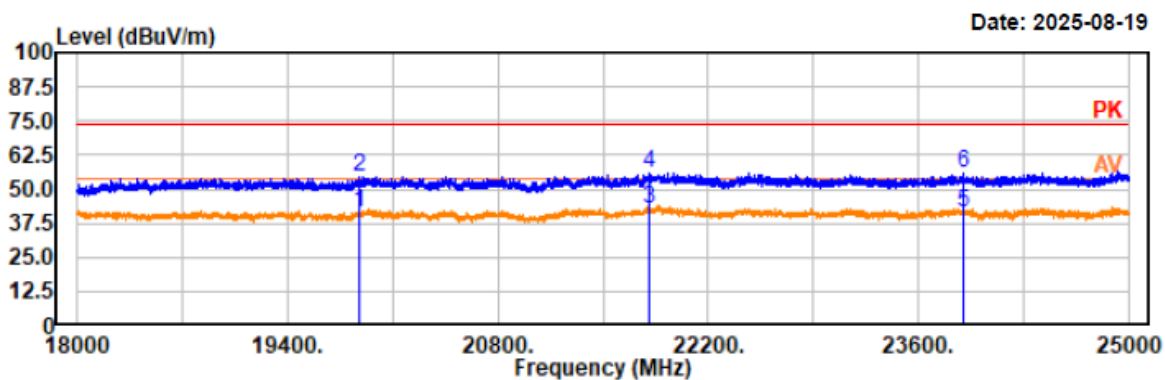

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
19873.40	37.67	3.45	41.12	54.00	12.88	vertical	Average
19873.40	51.18	3.45	54.63	74.00	19.37	vertical	Peak
21808.00	37.72	5.02	42.74	54.00	11.26	vertical	Average
21808.00	50.83	5.02	55.85	74.00	18.15	vertical	Peak
23903.25	36.17	5.37	41.54	54.00	12.46	vertical	Average
23903.25	50.22	5.37	55.59	74.00	18.41	vertical	Peak

Restricted Bands Emissions:

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

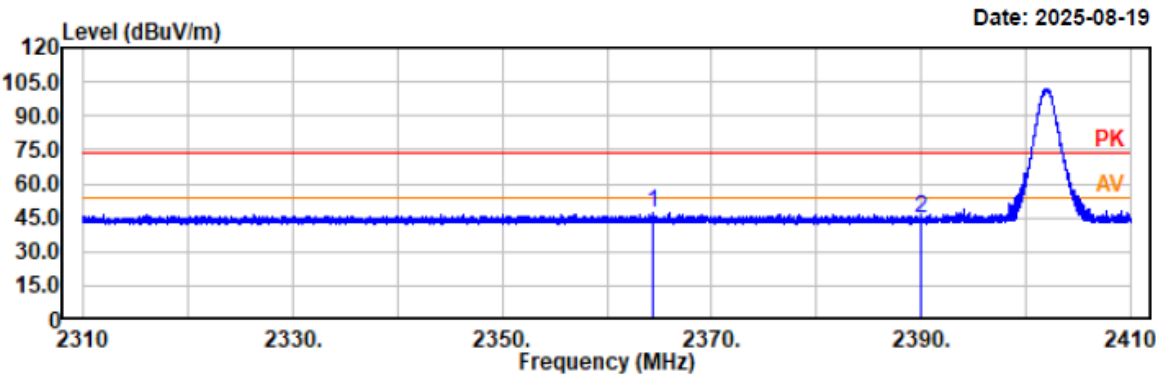


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2364.39	48.15	-1.26	46.89	74.00	27.11	horizontal	Peak
2390.00	45.43	-1.15	44.28	74.00	29.72	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

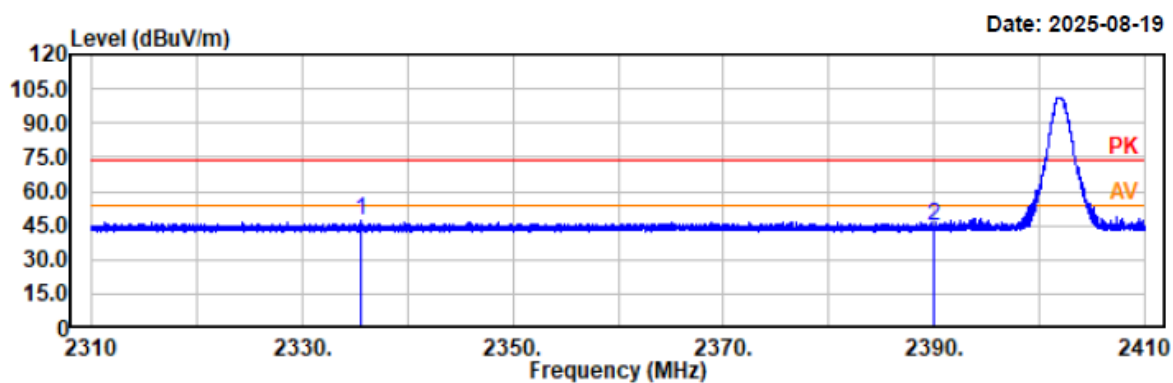


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2335.50	48.65	-1.35	47.30	74.00	26.70	vertical	Peak
2390.00	45.82	-1.15	44.67	74.00	29.33	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

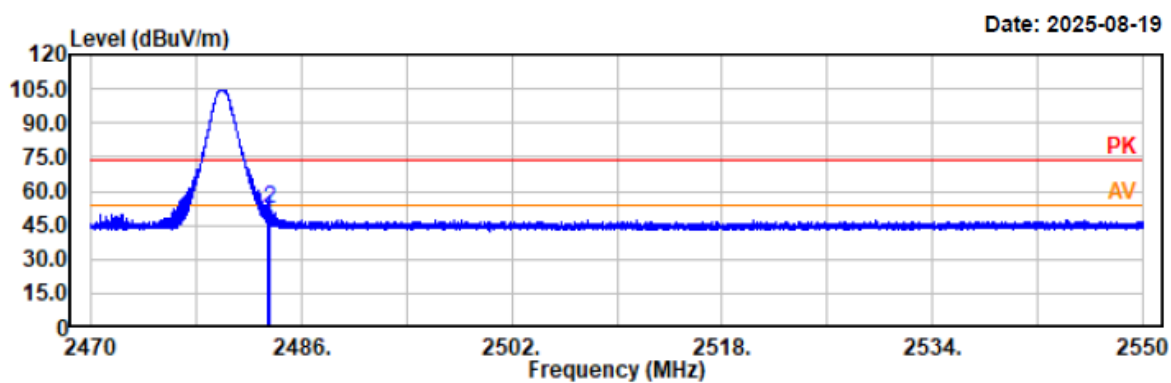


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	48.69	-0.77	47.92	74.00	26.08	horizontal	Peak
2483.61	53.04	-0.77	52.27	74.00	21.73	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: BDR DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

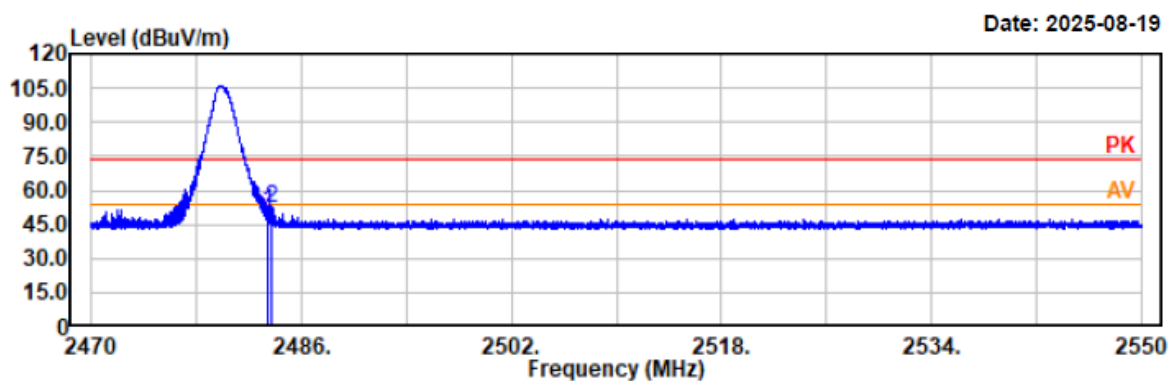


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	50.96	-0.77	50.19	74.00	23.81	vertical	Peak
2483.78	52.80	-0.76	52.04	74.00	21.96	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

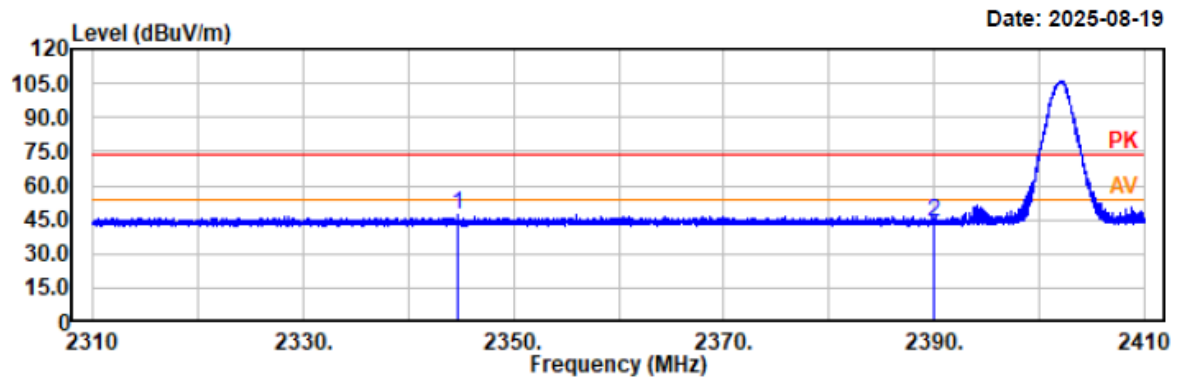


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2344.69	48.55	-1.33	47.22	74.00	26.78	horizontal	Peak
2390.00	44.83	-1.15	43.68	74.00	30.32	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

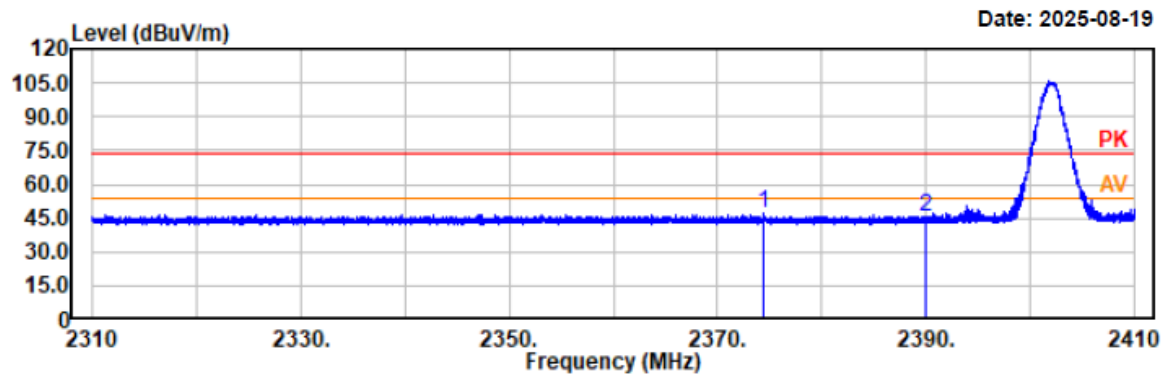


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2374.48	48.33	-1.22	47.11	74.00	26.89	vertical	Peak
2390.00	46.64	-1.15	45.49	74.00	28.51	vertical	Peak

Project No.: 2507W73938E-RF
 Test Mode: EDR 2DH5 2480MHz
 EUT Model: SNM927
 Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

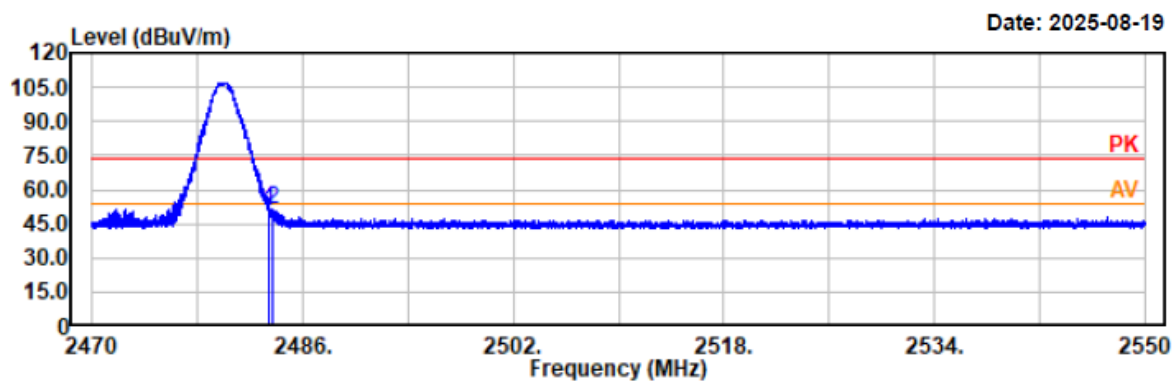


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	51.41	-0.77	50.64	74.00	23.36	horizontal	Peak
2483.74	52.40	-0.77	51.63	74.00	22.37	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 2DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

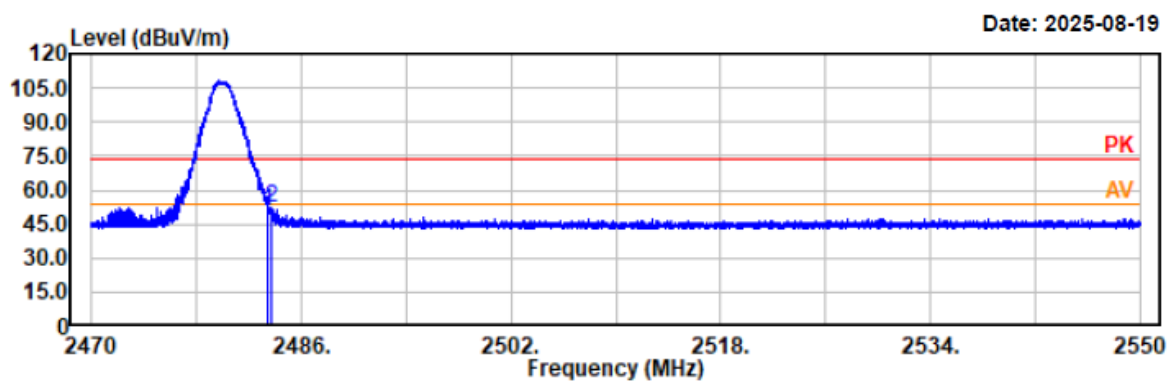


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	51.49	-0.77	50.72	74.00	23.28	vertical	Peak
2483.74	53.01	-0.77	52.24	74.00	21.76	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

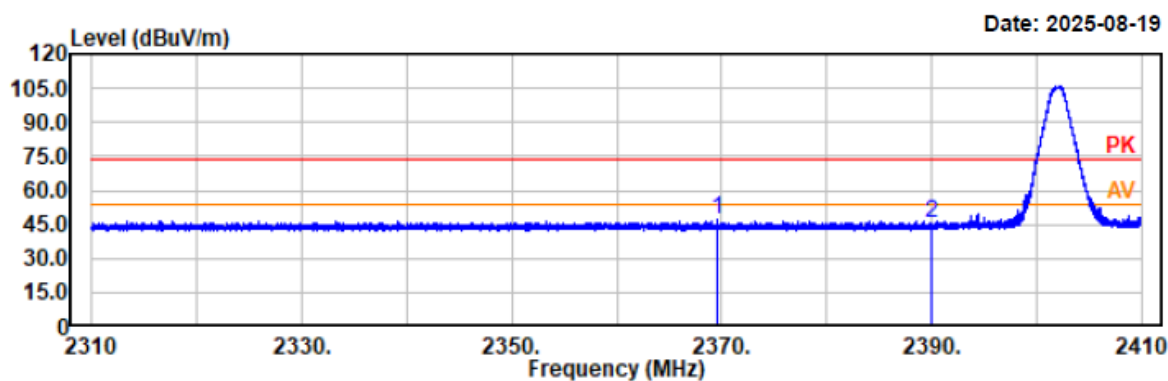


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBUV	Factor dB/m	Result dBUV/m	Limit dBUV/m	Margin dB	Polarity	Remark
2369.53	48.05	-1.23	46.82	74.00	27.18	horizontal	Peak
2390.00	46.54	-1.15	45.39	74.00	28.61	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2402MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

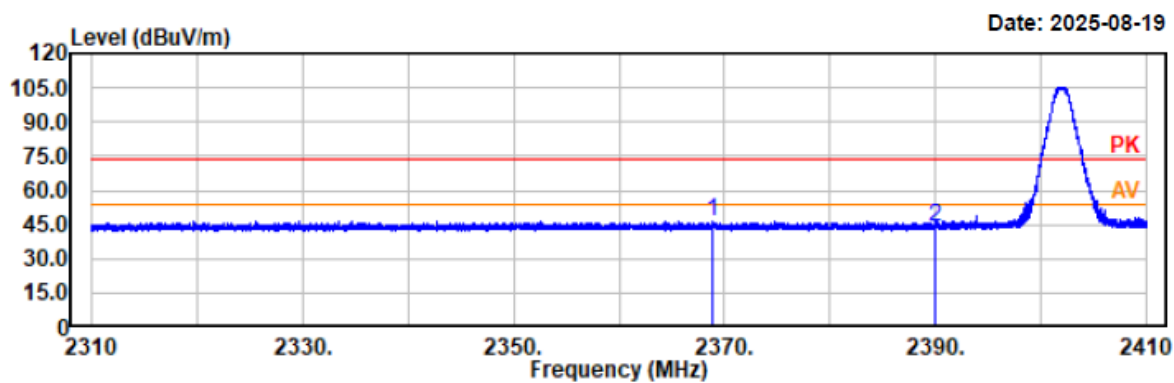


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2368.81	47.94	-1.23	46.71	74.00	27.29	vertical	Peak
2390.00	44.88	-1.15	43.73	74.00	30.27	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

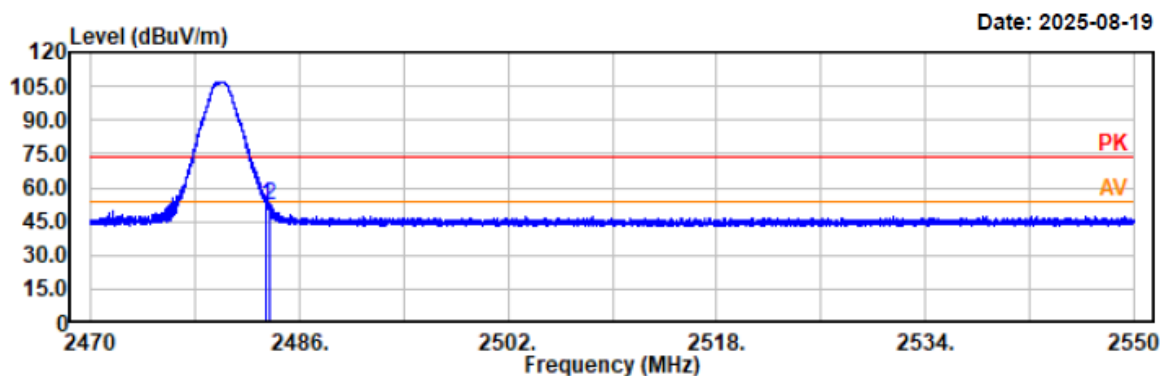


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	53.06	-0.77	52.29	74.00	21.71	horizontal	Peak
2483.79	52.98	-0.76	52.22	74.00	21.78	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: EDR 3DH5 2480MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 22.1°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

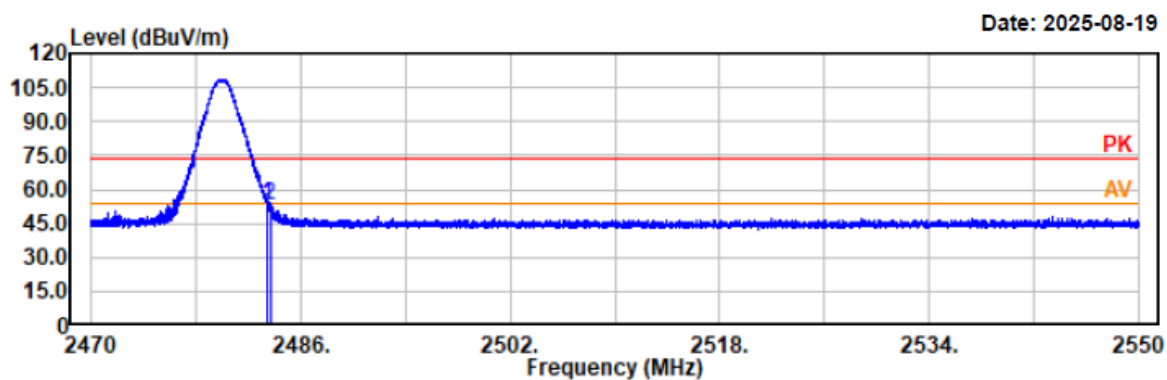

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	53.71	-0.77	52.94	74.00	21.06	vertical	Peak
2483.66	53.73	-0.77	52.96	74.00	21.04	vertical	Peak

FCC §15.247(b) (1) & RSS-247 ISSUE 3 Clause 5.4 b) - SPOT CHECK PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

FCC§15.247(b) (1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

According to RSS-247 ISSUE 3 Clause 5.4 b)

For FHSs operating in the band 2400–2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

EUT Setup



Test Procedure

According to ANSI C63.10-2020 + Cor.1-2023 Section 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. Frequency hopping shall be disabled for this test. Use the following spectrum analyzer setting:

- a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- b) RBW > 20 dB bandwidth of the emission being measured.
- c) VBW ≥ RBW.
- d) Sweep: No faster than coupled (auto) time.
- e) Detector function: Peak.
- f) Trace: Max-hold.
- g) Allow trace to stabilize.
- h) Use the marker-to-peak function to set the marker to the peak of the emission.
- i) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- j) A plot of the test results and setup description shall be included in the test report.

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

Test Data

Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-08-18	Environment:	Temp.: 25.1°C Humi.: 61% Atm :100.1kPa
Mode	Frequency (MHz)	Peak Conducted Output Power (dBm)	Limit (dBm)
EDR ($\pi/4$ -DQPSK)	2402	12.93	21
	2441	12.08	21
	2480	13.35	21
Antenna Gain(dBi):	4.55	Max.EIRP(dBm):	17.9
EIRP Limit for RSS-247: 36 dBm			

EUT PHOTOGRAPHS

Please refer to the attachment 2507W73938E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2507W73938E-RF-INP EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2507W73938E-RF-TSP_TEST SETUP PHOTOGRAPHS.

Declarations

1. Bay Area Compliance Laboratories Corp. (Xiamen) is not responsible for authenticity of any information provided by the applicant. Information from the applicant that may affect test results are marked with an asterisk “★”.
2. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested.
3. Unless required by the rule provided by the applicant or product regulations, then decision rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of Bay Area Compliance Laboratories Corp. (Xiamen).
6. This report is valid only with a valid digital signature. The digital signature may be available only under the adobe software above version 7.0.

******* END OF REPORT *******