Project No.: 2507W73938E-RF
Test Mode: 802.11a 5220MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

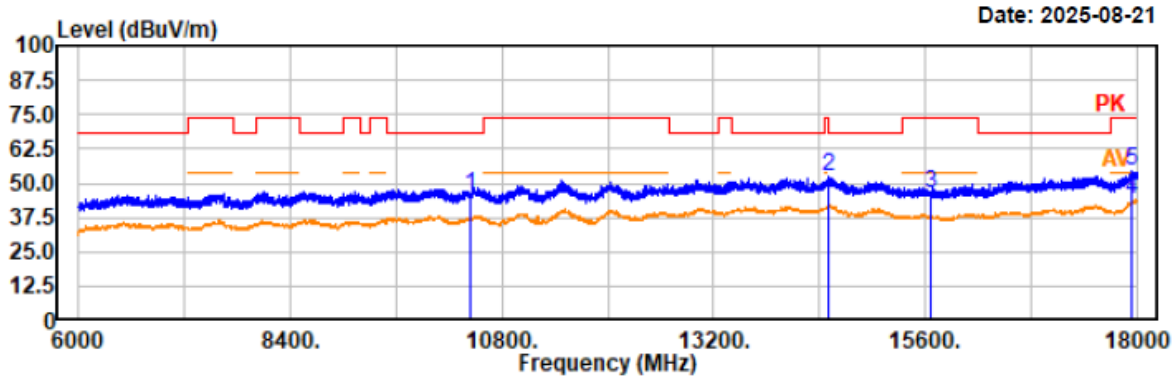

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10440.00	43.62	1.67	45.29	68.20	22.91	vertical	Peak
14508.00	47.67	5.06	52.73	68.20	15.47	vertical	Peak
15660.00	43.77	2.26	46.03	74.00	27.97	vertical	Peak
17942.40	37.20	6.84	44.04	54.00	9.96	vertical	Average
17942.40	47.33	6.84	54.17	74.00	19.83	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5240MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

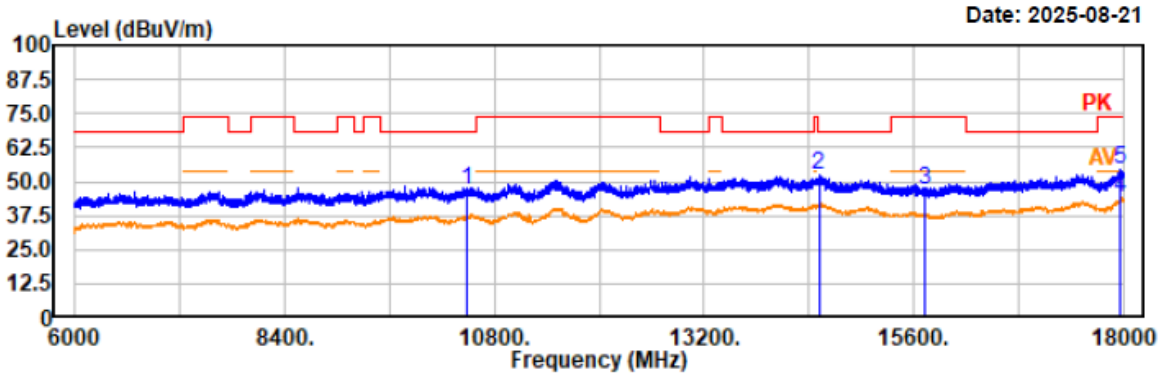

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	45.13	1.67	46.80	68.20	21.40	horizontal	Peak
14514.00	47.19	5.07	52.26	68.20	15.94	horizontal	Peak
15720.00	44.48	2.19	46.67	74.00	27.33	horizontal	Peak
17968.80	36.92	6.88	43.80	54.00	10.20	horizontal	Average
17968.80	47.29	6.88	54.17	74.00	19.83	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5240MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

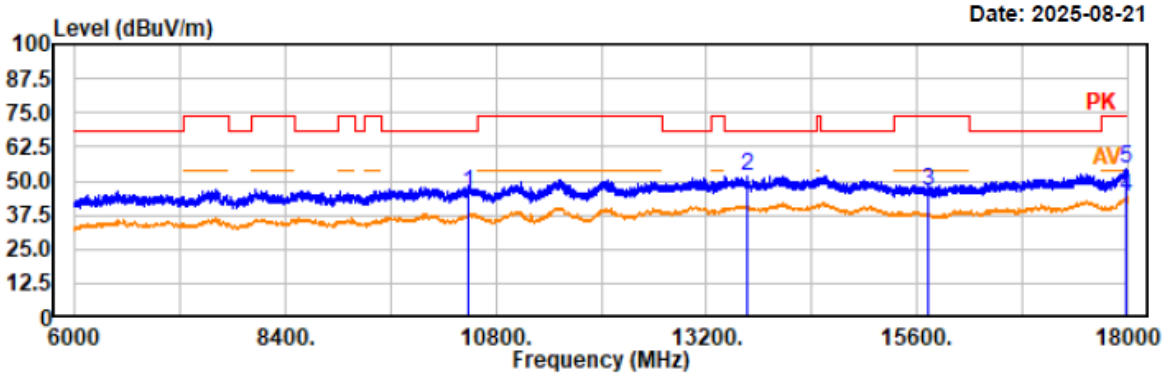

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	43.69	1.67	45.36	68.20	22.84	vertical	Peak
13675.20	46.96	4.86	51.82	68.20	16.38	vertical	Peak
15720.00	43.74	2.19	45.93	74.00	28.07	vertical	Peak
17974.80	37.02	6.88	43.90	54.00	10.10	vertical	Average
17974.80	47.40	6.88	54.28	74.00	19.72	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5180MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

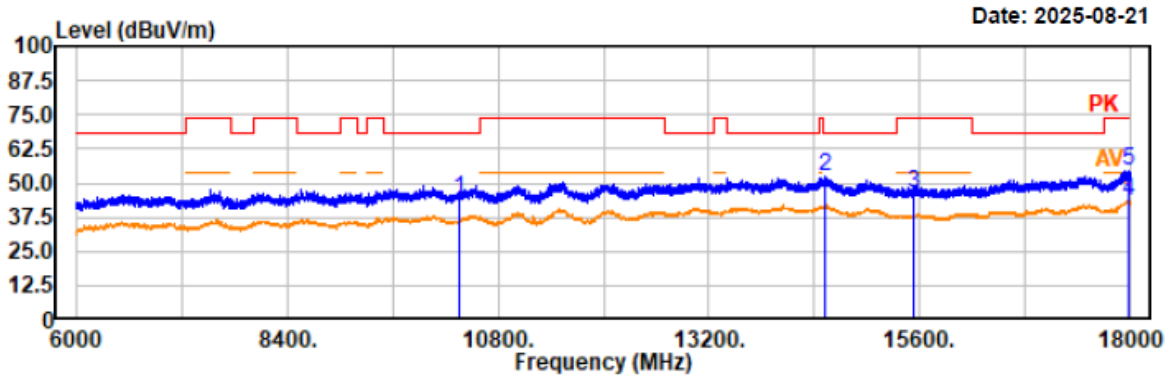

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	42.73	1.62	44.35	68.20	23.85	horizontal	Peak
14516.40	47.06	5.06	52.12	68.20	16.08	horizontal	Peak
15540.00	43.58	2.50	46.08	74.00	27.92	horizontal	Peak
17989.20	36.33	6.90	43.23	54.00	10.77	horizontal	Average
17989.20	47.87	6.90	54.77	74.00	19.23	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5180MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

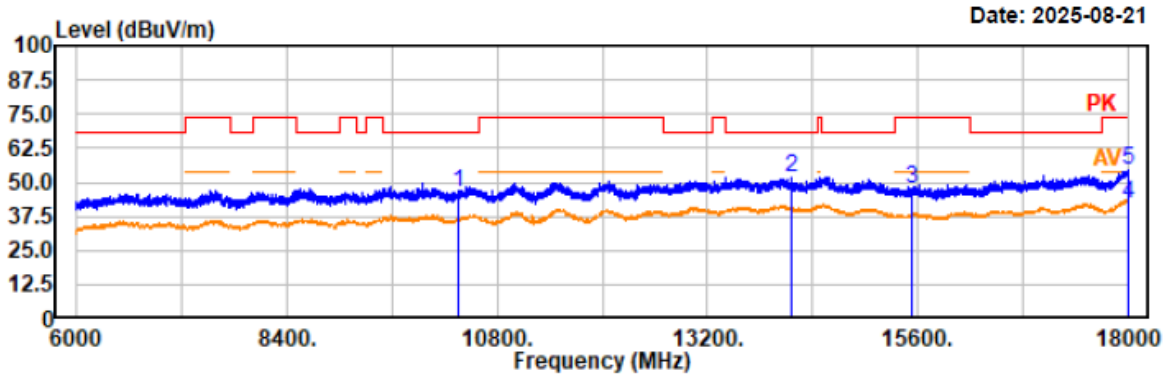

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	44.40	1.62	46.02	68.20	22.18	vertical	Peak
14160.00	46.59	5.36	51.95	68.20	16.25	vertical	Peak
15540.00	45.06	2.50	47.56	74.00	26.44	vertical	Peak
17996.40	35.21	6.91	42.12	54.00	11.88	vertical	Average
17996.40	47.29	6.91	54.20	74.00	19.80	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5220MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

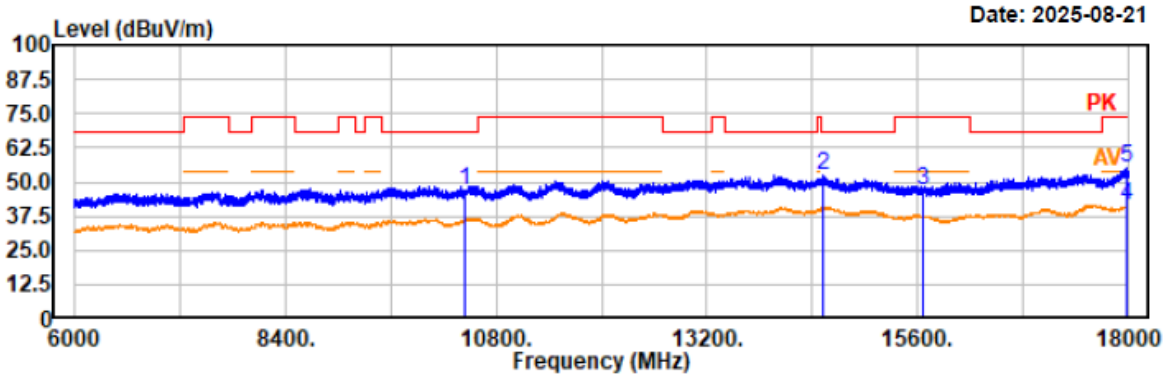

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10440.00	45.16	1.67	46.83	68.20	21.37	horizontal	Peak
14520.00	47.35	5.06	52.41	68.20	15.79	horizontal	Peak
15660.00	44.52	2.26	46.78	74.00	27.22	horizontal	Peak
17984.40	34.72	6.89	41.61	54.00	12.39	horizontal	Average
17984.40	48.28	6.89	55.17	74.00	18.83	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5220MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

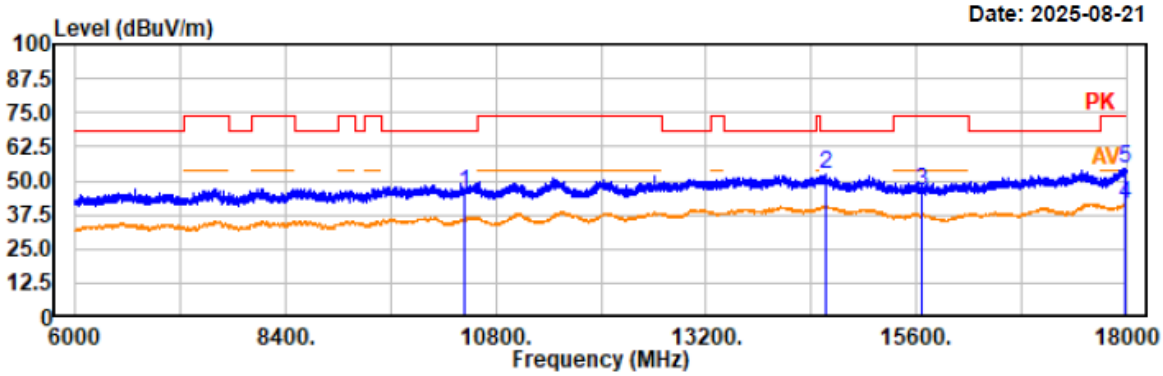

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10440.00	44.13	1.67	45.80	68.20	22.40	vertical	Peak
14563.20	47.60	5.04	52.64	68.20	15.56	vertical	Peak
15660.00	44.00	2.26	46.26	74.00	27.74	vertical	Peak
17984.40	34.77	6.89	41.66	54.00	12.34	vertical	Average
17984.40	47.43	6.89	54.32	74.00	19.68	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5240MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

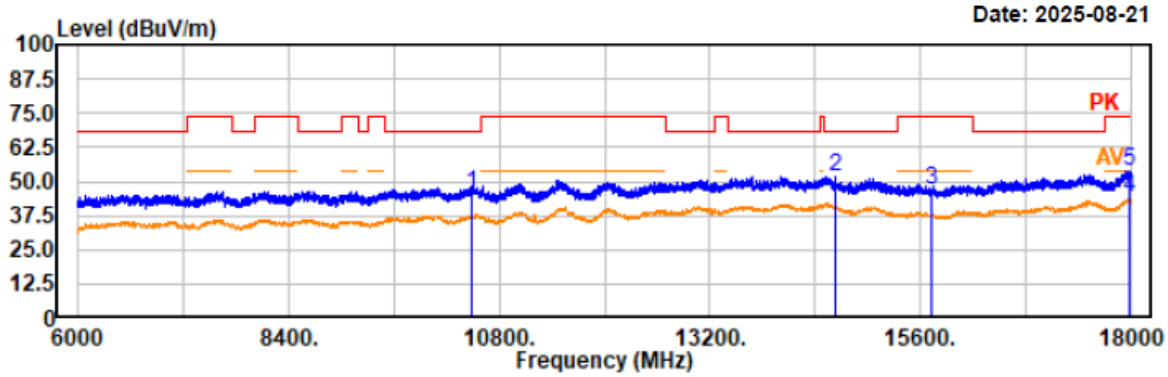

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10480.00	44.10	1.67	45.77	68.20	22.43	horizontal	Peak
14634.00	46.91	4.99	51.90	68.20	16.30	horizontal	Peak
15720.00	44.67	2.19	46.86	74.00	27.14	horizontal	Peak
17982.00	36.92	6.89	43.81	54.00	10.19	horizontal	Average
17982.00	47.17	6.89	54.06	74.00	19.94	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5240MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

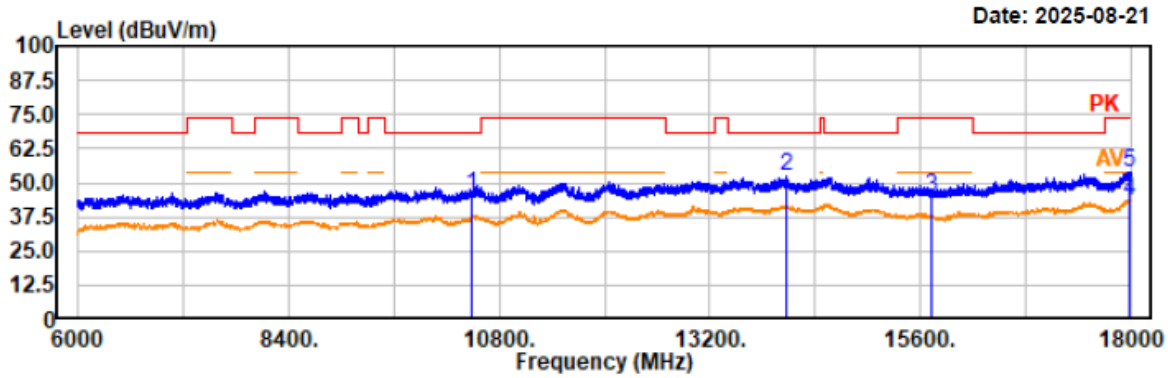

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	43.91	1.67	45.58	68.20	22.62	vertical	Peak
14077.20	47.11	5.30	52.41	68.20	15.79	vertical	Peak
15720.00	42.37	2.19	44.56	74.00	29.44	vertical	Peak
17980.80	36.78	6.89	43.67	54.00	10.33	vertical	Average
17980.80	47.06	6.89	53.95	74.00	20.05	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5190MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

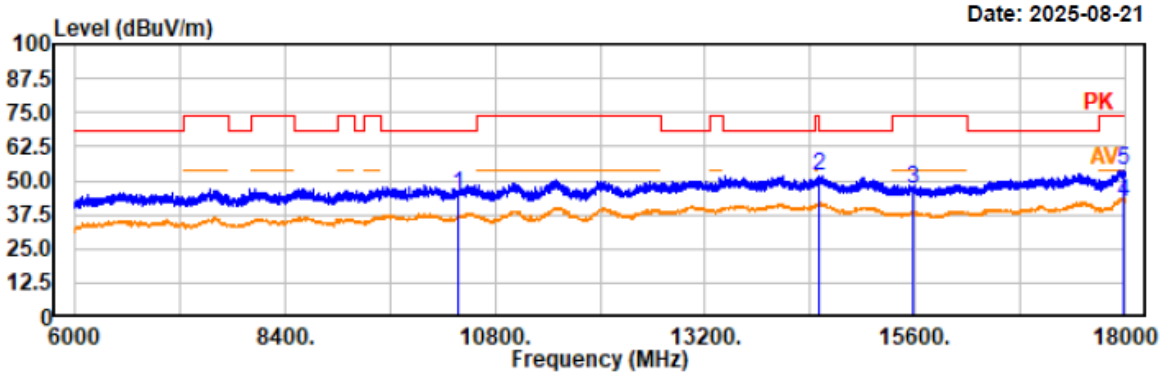

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10380.00	43.34	1.64	44.98	68.20	23.22	horizontal	Peak
14509.20	46.98	5.06	52.04	68.20	16.16	horizontal	Peak
15570.00	44.26	2.43	46.69	74.00	27.31	horizontal	Peak
17976.00	34.88	6.89	41.77	54.00	12.23	horizontal	Average
17976.00	46.97	6.89	53.86	74.00	20.14	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5190MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

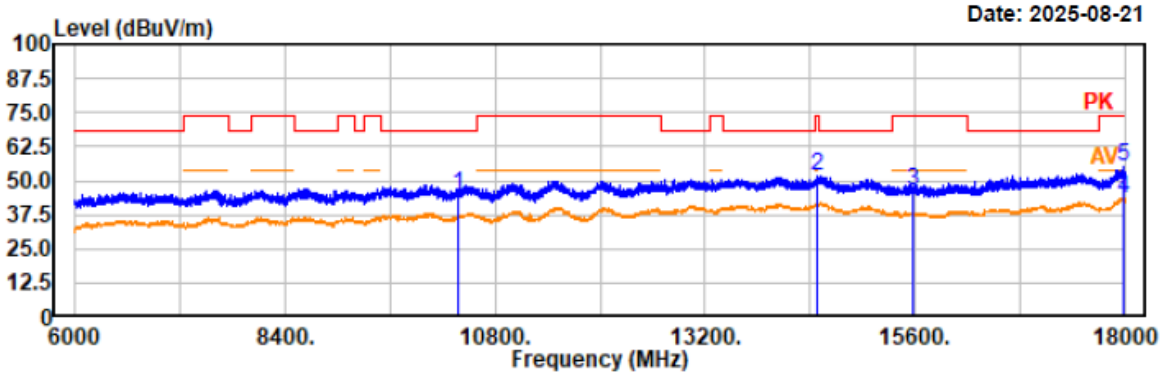

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10380.00	43.25	1.64	44.89	68.20	23.31	vertical	Peak
14491.20	46.80	5.08	51.88	74.00	22.12	vertical	Peak
15570.00	43.75	2.43	46.18	74.00	27.82	vertical	Peak
17979.60	36.61	6.89	43.50	54.00	10.50	vertical	Average
17979.60	48.18	6.89	55.07	74.00	18.93	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5230MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

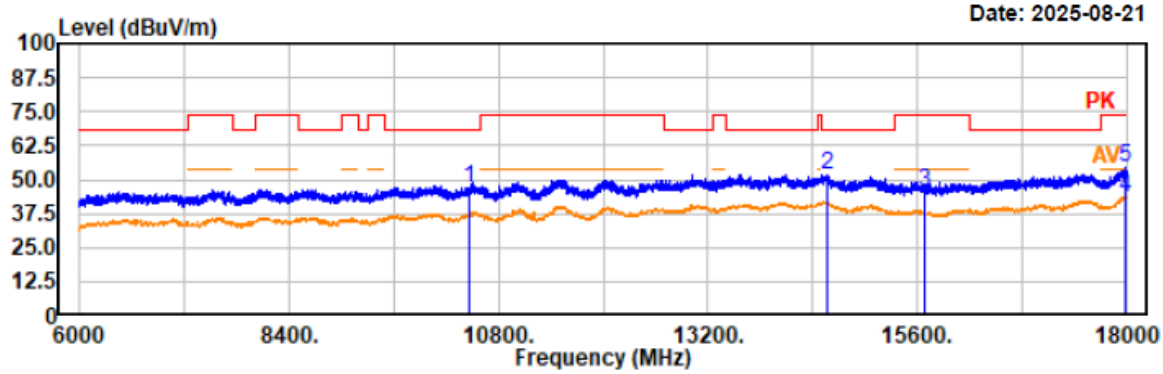

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10460.00	45.02	1.67	46.69	68.20	21.51	horizontal	Peak
14574.00	46.96	5.03	51.99	68.20	16.21	horizontal	Peak
15690.00	43.12	2.21	45.33	74.00	28.67	horizontal	Peak
17989.20	36.82	6.90	43.72	54.00	10.28	horizontal	Average
17989.20	47.61	6.90	54.51	74.00	19.49	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5230MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

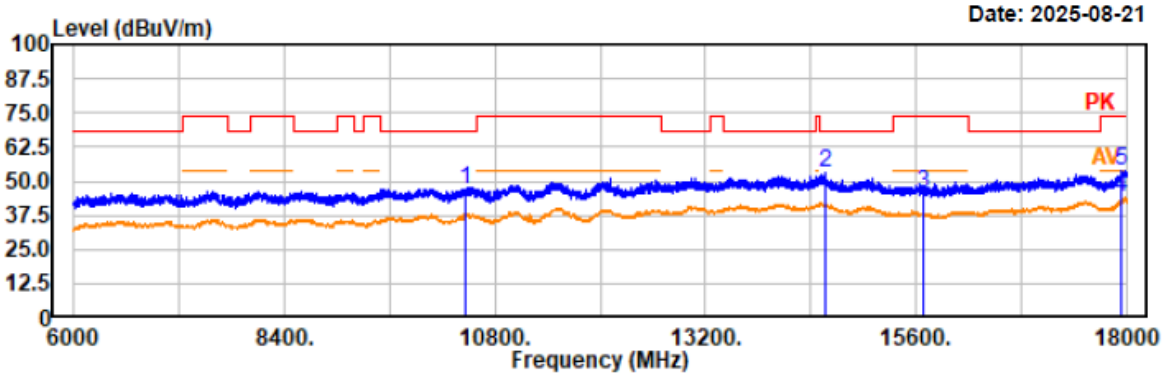

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10460.00	45.03	1.67	46.70	68.20	21.50	vertical	Peak
14562.00	47.75	5.04	52.79	68.20	15.41	vertical	Peak
15690.00	43.65	2.21	45.86	74.00	28.14	vertical	Peak
17949.60	37.06	6.86	43.92	54.00	10.08	vertical	Average
17949.60	46.90	6.86	53.76	74.00	20.24	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac80 5210MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

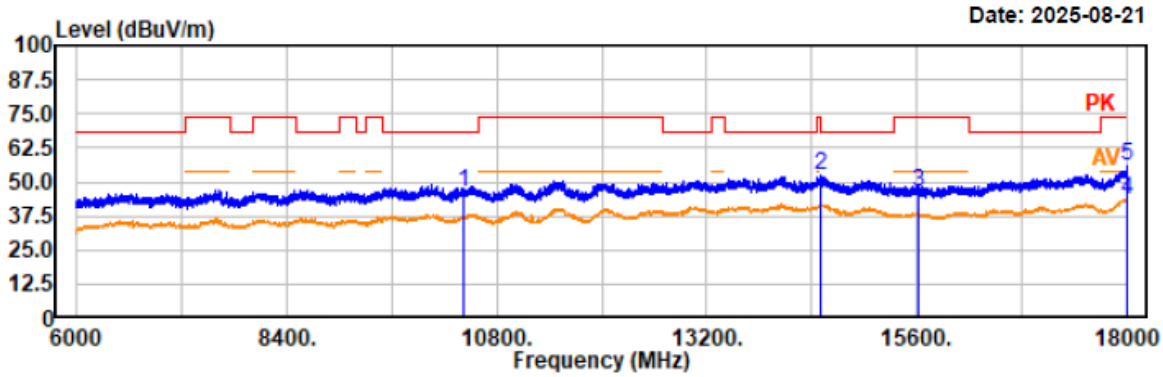

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10419.60	44.68	1.66	46.34	68.20	21.86	horizontal	Peak
14512.80	47.35	5.07	52.42	68.20	15.78	horizontal	Peak
15630.00	43.63	2.33	45.96	74.00	28.04	horizontal	Peak
17996.40	36.76	6.91	43.67	54.00	10.33	horizontal	Average
17996.40	48.66	6.91	55.57	74.00	18.43	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac80 5210MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

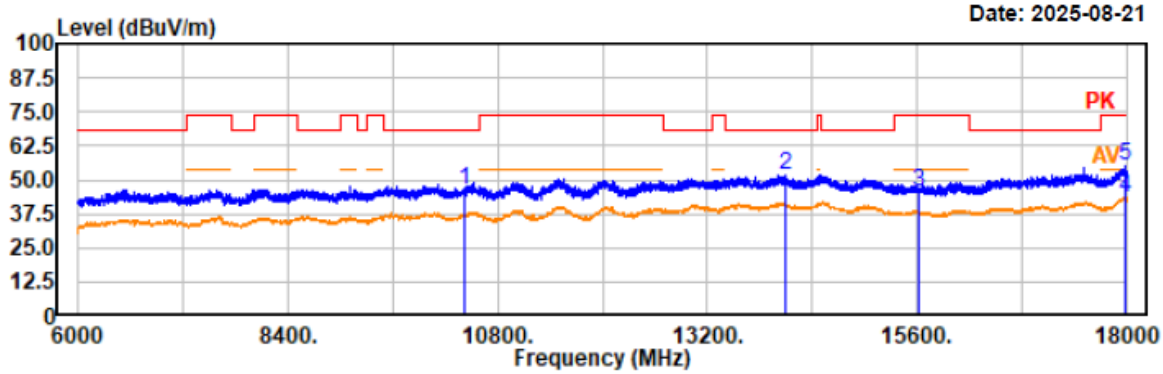

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10420.00	44.32	1.66	45.98	68.20	22.22	vertical	Peak
14086.80	46.45	5.32	51.77	68.20	16.43	vertical	Peak
15630.00	43.29	2.33	45.62	74.00	28.38	vertical	Peak
17977.20	36.79	6.89	43.68	54.00	10.32	vertical	Average
17977.20	48.24	6.89	55.13	74.00	18.87	vertical	Peak

Band 2:

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5260MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

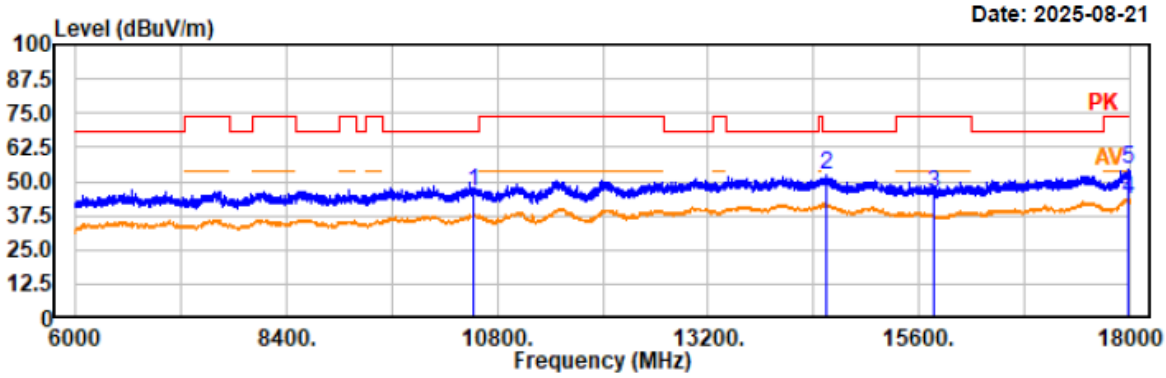

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	44.33	1.69	46.02	68.20	22.18	horizontal	Peak
14550.00	47.67	5.04	52.71	68.20	15.49	horizontal	Peak
15780.00	43.29	2.20	45.49	74.00	28.51	horizontal	Peak
17985.60	36.70	6.90	43.60	54.00	10.40	horizontal	Average
17985.60	47.65	6.90	54.55	74.00	19.45	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5260MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

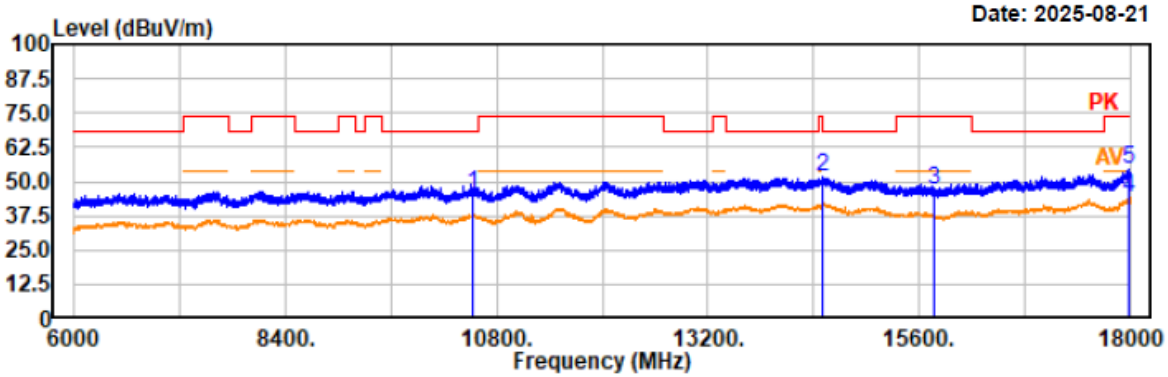

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10520.00	43.70	1.69	45.39	68.20	22.81	vertical	Peak
14494.80	46.88	5.08	51.96	74.00	22.04	vertical	Peak
15780.00	44.47	2.20	46.67	74.00	27.33	vertical	Peak
17986.80	37.28	6.89	44.17	54.00	9.83	vertical	Average
17986.80	47.77	6.89	54.66	74.00	19.34	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5300MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

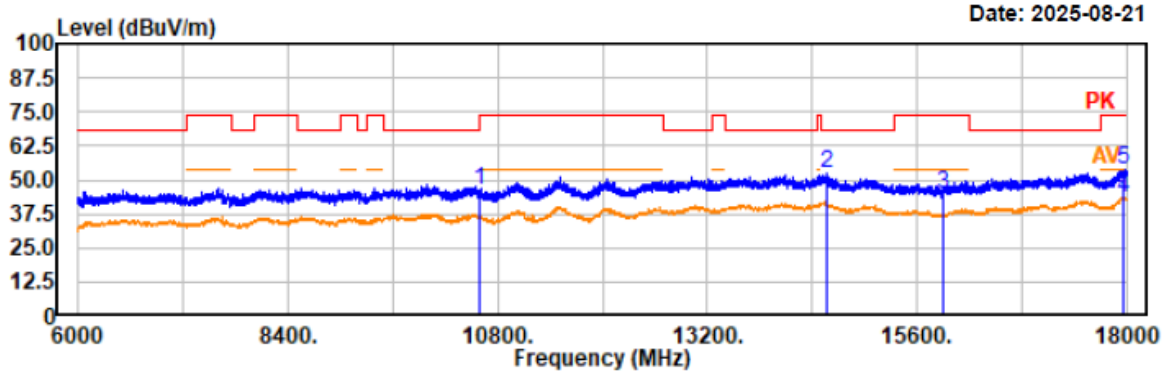

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10600.00	44.68	1.75	46.43	68.20	21.77	horizontal	Peak
14563.20	47.07	5.04	52.11	68.20	16.09	horizontal	Peak
15900.00	42.87	2.11	44.98	74.00	29.02	horizontal	Peak
17965.20	36.81	6.87	43.68	54.00	10.32	horizontal	Average
17965.20	46.85	6.87	53.72	74.00	20.28	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5300MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

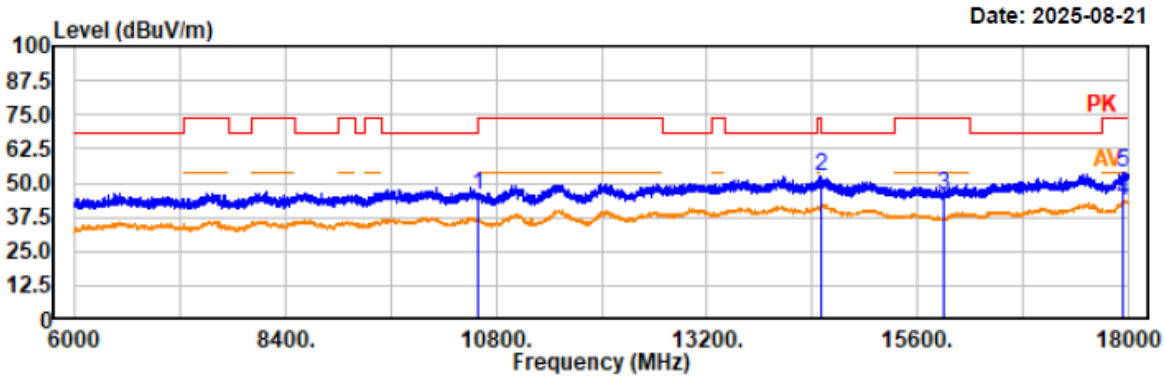

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10600.00	43.88	1.75	45.63	68.20	22.57	vertical	Peak
14511.60	47.34	5.07	52.41	68.20	15.79	vertical	Peak
15900.00	43.36	2.11	45.47	74.00	28.53	vertical	Peak
17949.60	36.80	6.86	43.66	54.00	10.34	vertical	Average
17949.60	46.60	6.86	53.46	74.00	20.54	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5320MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

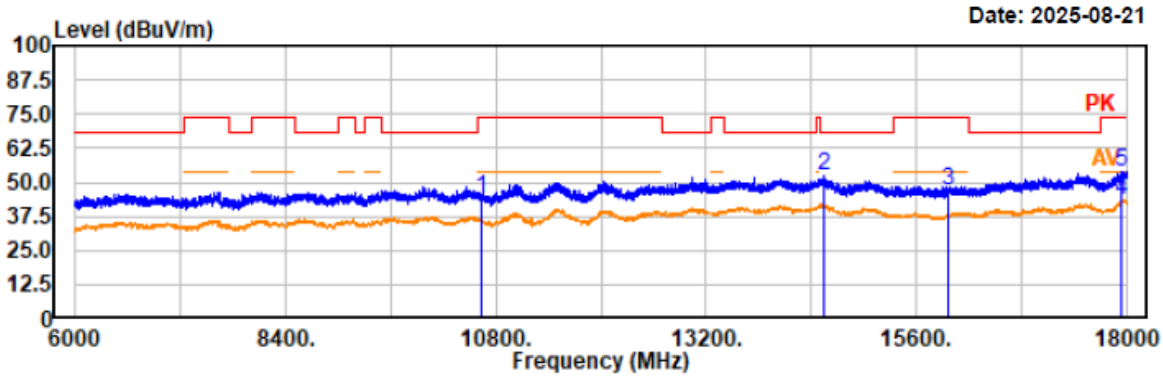

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10640.00	42.34	1.78	44.12	74.00	29.88	horizontal	Peak
14550.00	47.45	5.04	52.49	68.20	15.71	horizontal	Peak
15960.00	44.98	2.17	47.15	74.00	26.85	horizontal	Peak
17931.60	36.90	6.83	43.73	54.00	10.27	horizontal	Average
17931.60	46.98	6.83	53.81	74.00	20.19	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5320MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

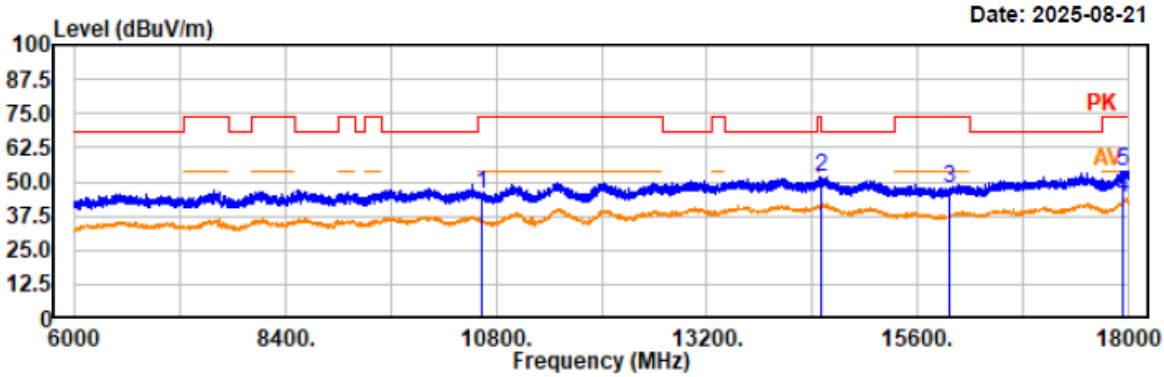

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10640.00	43.56	1.78	45.34	74.00	28.66	vertical	Peak
14506.80	46.68	5.06	51.74	68.20	16.46	vertical	Peak
15960.00	45.34	2.17	47.51	74.00	26.49	vertical	Peak
17930.40	37.04	6.84	43.88	54.00	10.12	vertical	Average
17930.40	47.19	6.84	54.03	74.00	19.97	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5260MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

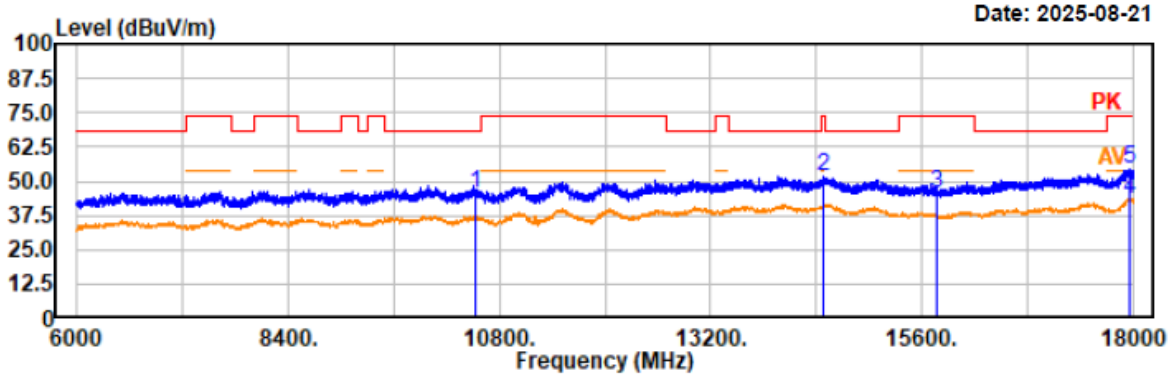

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10520.00	43.49	1.69	45.18	68.20	23.02	horizontal	Peak
14484.00	46.72	5.10	51.82	74.00	22.18	horizontal	Peak
15780.00	43.34	2.20	45.54	74.00	28.46	horizontal	Peak
17964.00	36.84	6.86	43.70	54.00	10.30	horizontal	Average
17964.00	47.63	6.86	54.49	74.00	19.51	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11n20 5260MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

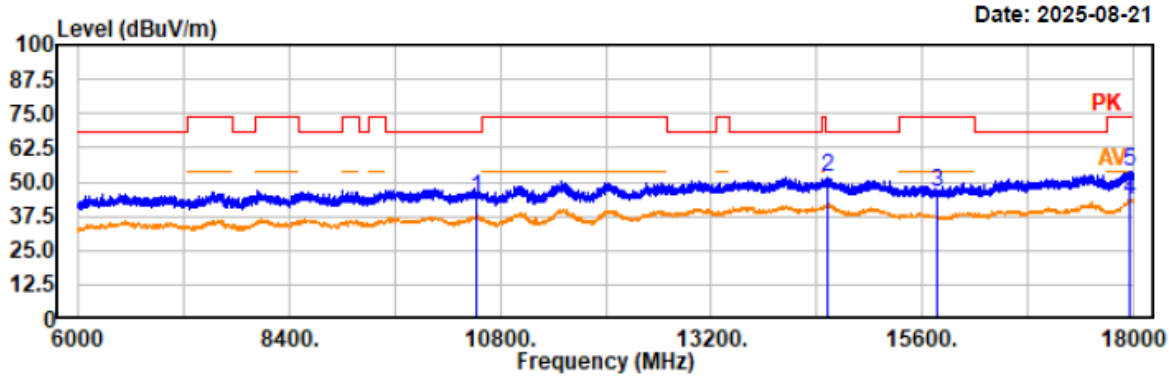

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10520.00	42.66	1.69	44.35	68.20	23.85	vertical	Peak
14520.00	46.42	5.06	51.48	68.20	16.72	vertical	Peak
15780.00	43.69	2.20	45.89	74.00	28.11	vertical	Peak
17952.00	36.76	6.86	43.62	54.00	10.38	vertical	Average
17952.00	47.15	6.86	54.01	74.00	19.99	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5300MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

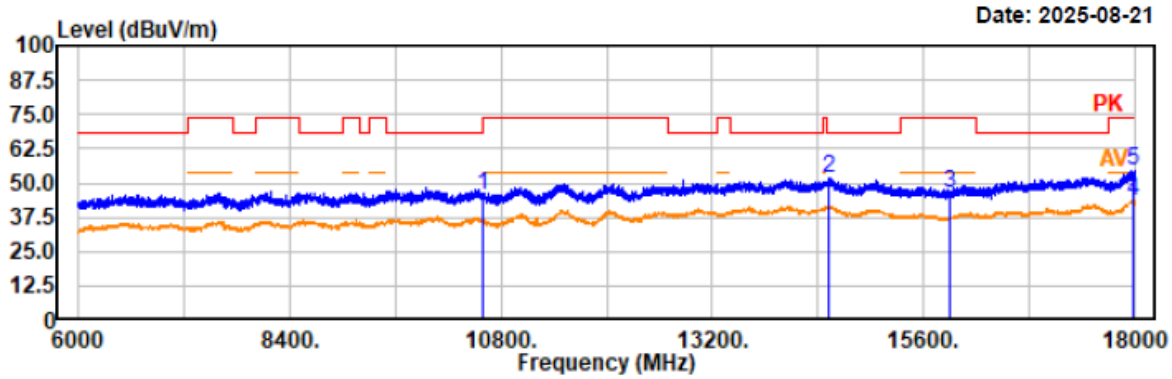

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10600.00	43.83	1.75	45.58	68.20	22.62	horizontal	Peak
14517.60	46.50	5.06	51.56	68.20	16.64	horizontal	Peak
15900.00	44.32	2.11	46.43	74.00	27.57	horizontal	Peak
17980.80	36.55	6.89	43.44	54.00	10.56	horizontal	Average
17980.80	47.37	6.89	54.26	74.00	19.74	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5300MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

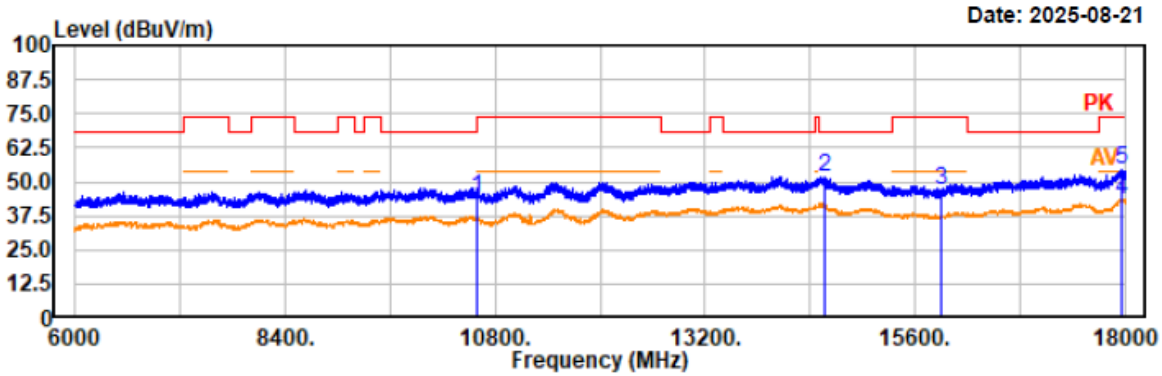

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10600.00	42.59	1.75	44.34	68.20	23.86	vertical	Peak
14571.60	46.57	5.03	51.60	68.20	16.60	vertical	Peak
15900.00	44.55	2.11	46.66	74.00	27.34	vertical	Peak
17970.00	36.91	6.88	43.79	54.00	10.21	vertical	Average
17970.00	47.69	6.88	54.57	74.00	19.43	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5320MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

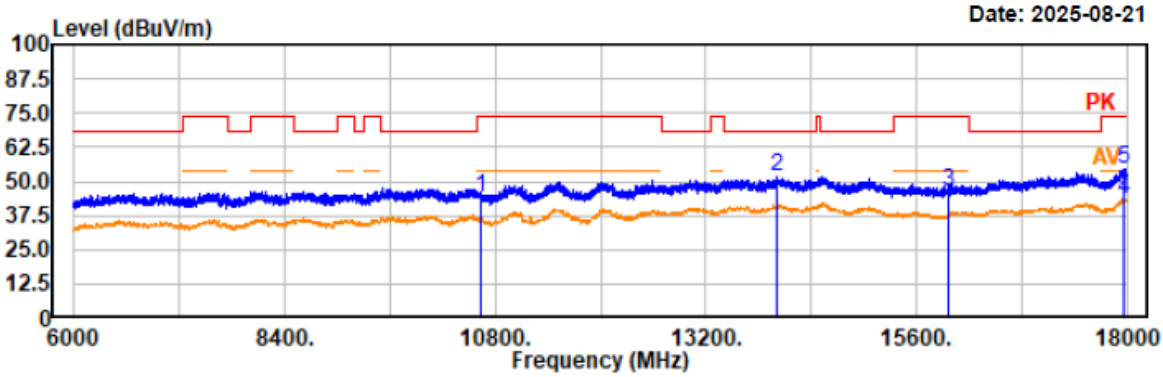

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10640.00	42.60	1.78	44.38	74.00	29.62	horizontal	Peak
14008.80	46.63	5.22	51.85	68.20	16.35	horizontal	Peak
15960.00	43.70	2.17	45.87	74.00	28.13	horizontal	Peak
17971.20	36.90	6.88	43.78	54.00	10.22	horizontal	Average
17971.20	47.49	6.88	54.37	74.00	19.63	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5320MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

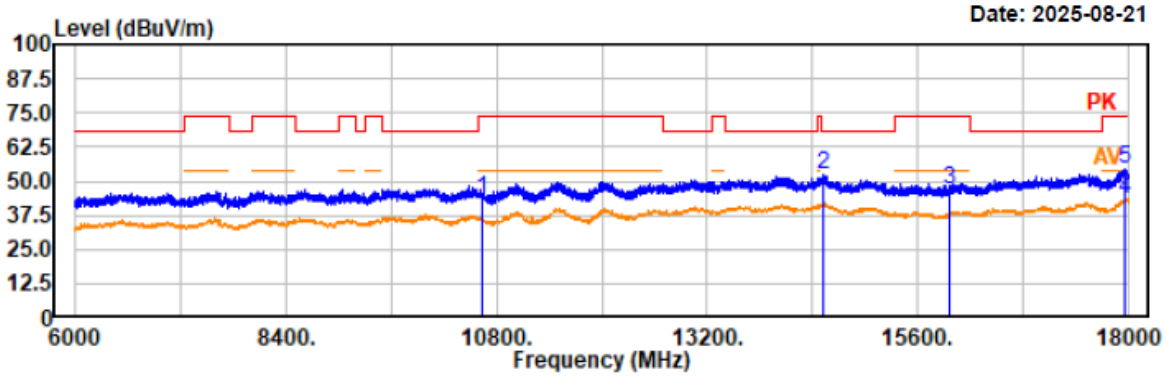

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10640.00	41.98	1.78	43.76	74.00	30.24	vertical	Peak
14517.60	47.33	5.06	52.39	68.20	15.81	vertical	Peak
15960.00	44.96	2.17	47.13	74.00	26.87	vertical	Peak
17971.20	36.72	6.88	43.60	54.00	10.40	vertical	Average
17971.20	47.76	6.88	54.64	74.00	19.36	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5270MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

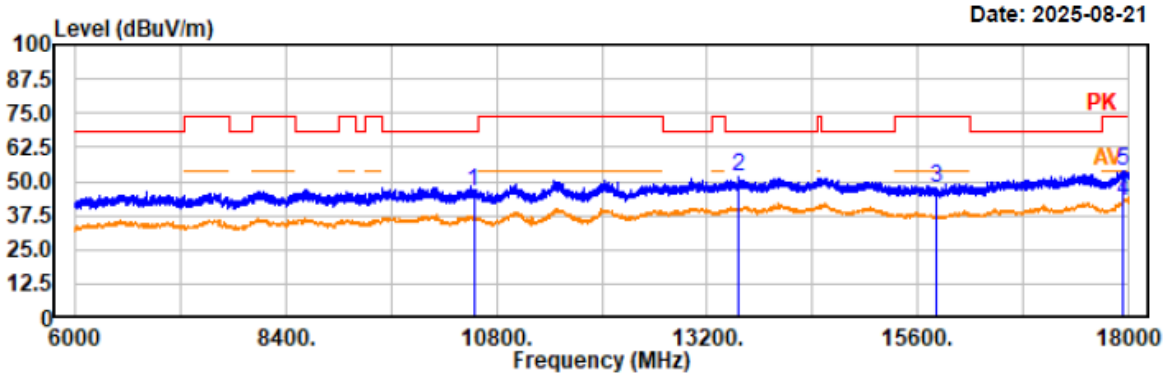

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10540.00	44.78	1.70	46.48	68.20	21.72	horizontal	Peak
13550.40	47.34	4.67	52.01	68.20	16.19	horizontal	Peak
15810.00	45.07	2.19	47.26	74.00	26.74	horizontal	Peak
17935.20	36.18	6.84	43.02	54.00	10.98	horizontal	Average
17935.20	47.27	6.84	54.11	74.00	19.89	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5270MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

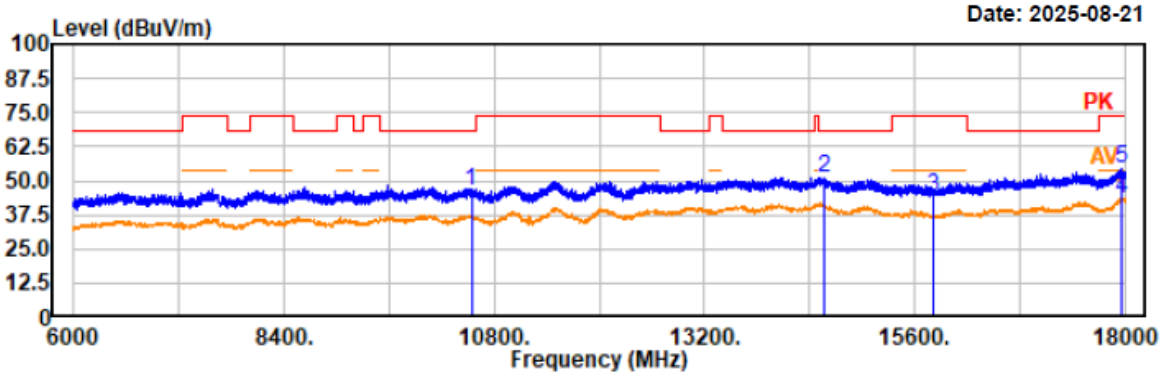

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10540.00	44.65	1.70	46.35	68.20	21.85	vertical	Peak
14558.40	46.27	5.04	51.31	68.20	16.89	vertical	Peak
15810.00	42.26	2.19	44.45	74.00	29.55	vertical	Peak
17968.80	36.66	6.88	43.54	54.00	10.46	vertical	Average
17968.80	47.39	6.88	54.27	74.00	19.73	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5310MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

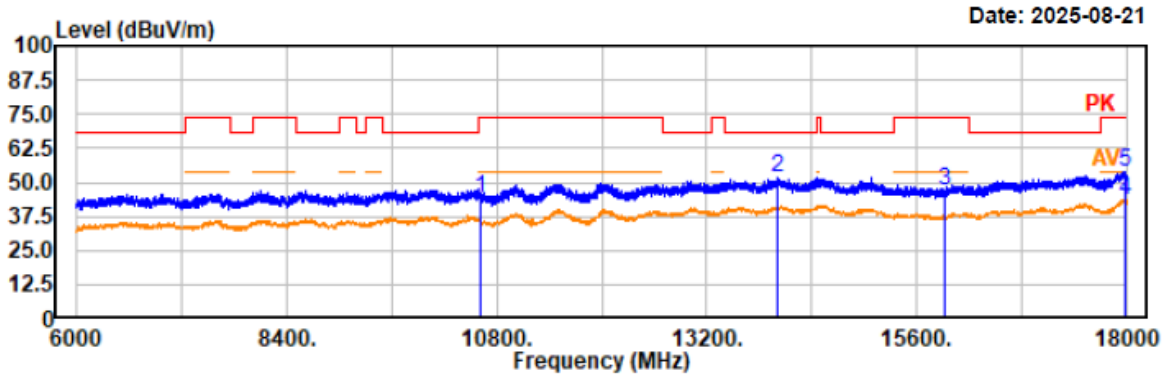

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10620.00	42.49	1.77	44.26	74.00	29.74	horizontal	Peak
14008.80	46.63	5.22	51.85	68.20	16.35	horizontal	Peak
15930.00	44.82	2.15	46.97	74.00	27.03	horizontal	Peak
17984.40	36.79	6.89	43.68	54.00	10.32	horizontal	Average
17984.40	47.21	6.89	54.10	74.00	19.90	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5310MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

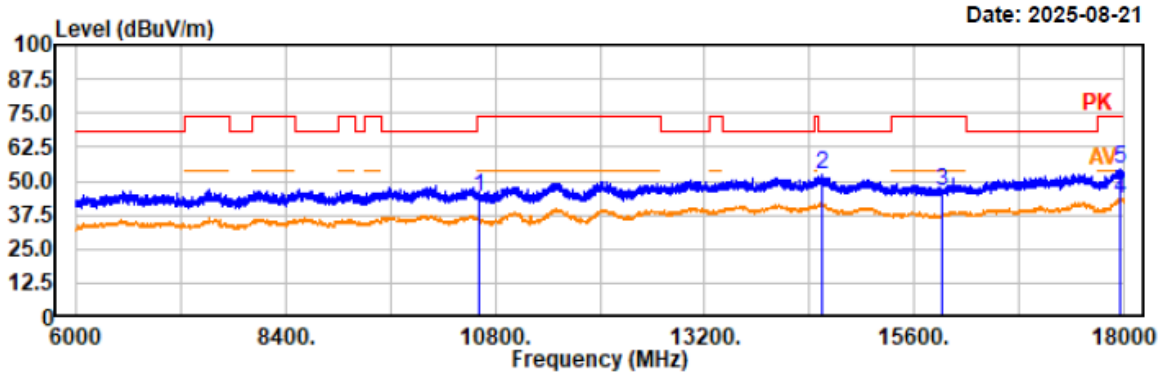

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	42.27	1.77	44.04	74.00	29.96	vertical	Peak
14556.00	47.09	5.03	52.12	68.20	16.08	vertical	Peak
15930.00	44.30	2.15	46.45	74.00	27.55	vertical	Peak
17967.60	36.52	6.88	43.40	54.00	10.60	vertical	Average
17967.60	47.31	6.88	54.19	74.00	19.81	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac80 5290MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

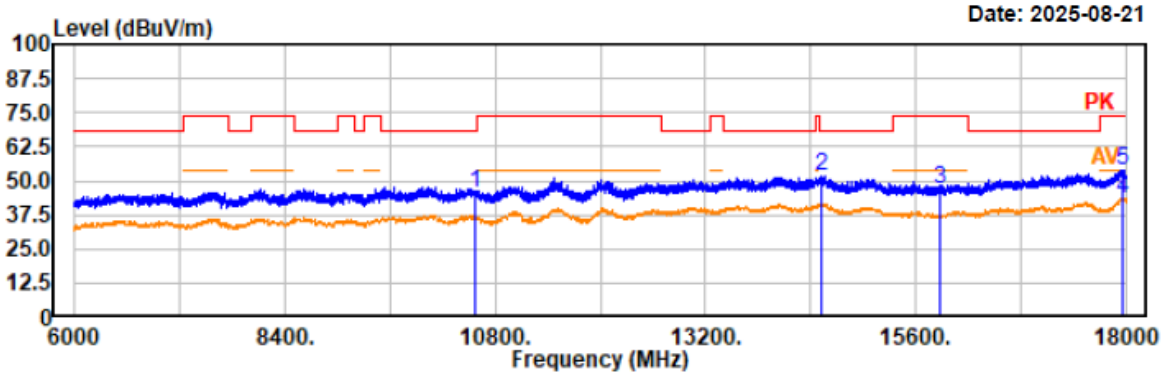

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.00	43.99	1.73	45.72	68.20	22.48	horizontal	Peak
14516.40	46.70	5.06	51.76	68.20	16.44	horizontal	Peak
15870.00	45.05	2.13	47.18	74.00	26.82	horizontal	Peak
17964.00	36.93	6.86	43.79	54.00	10.21	horizontal	Average
17964.00	46.90	6.86	53.76	74.00	20.24	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac80 5290MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

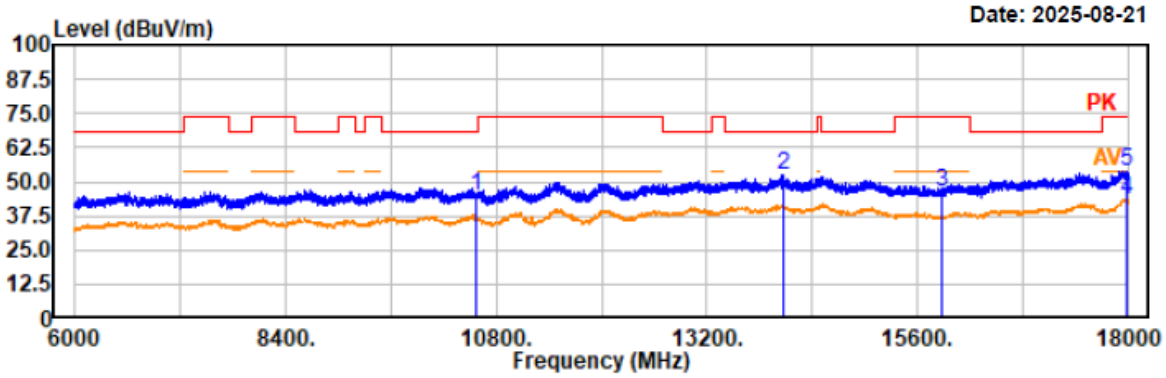

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
10580.00	43.40	1.73	45.13	68.20	23.07	vertical	Peak
14070.00	46.98	5.29	52.27	68.20	15.93	vertical	Peak
15870.00	43.78	2.13	45.91	74.00	28.09	vertical	Peak
17976.00	36.87	6.89	43.76	54.00	10.24	vertical	Average
17976.00	46.83	6.89	53.72	74.00	20.28	vertical	Peak

Band 3:

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5500MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

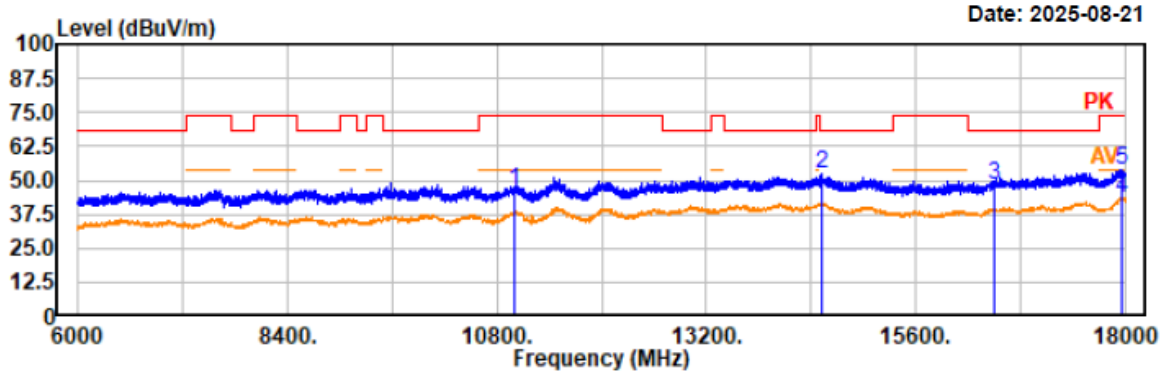

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	44.12	2.16	46.28	74.00	27.72	horizontal	Peak
14533.20	47.13	5.05	52.18	68.20	16.02	horizontal	Peak
16500.00	45.11	3.51	48.62	68.20	19.58	horizontal	Peak
17970.00	36.74	6.88	43.62	54.00	10.38	horizontal	Average
17970.00	46.94	6.88	53.82	74.00	20.18	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5500MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

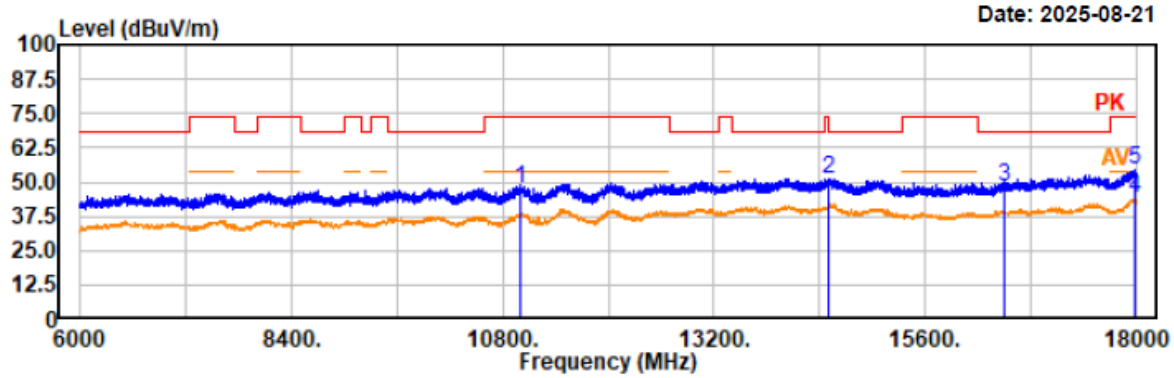

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11000.00	45.40	2.16	47.56	74.00	26.44	vertical	Peak
14510.40	46.12	5.06	51.18	68.20	17.02	vertical	Peak
16500.00	44.97	3.51	48.48	68.20	19.72	vertical	Peak
17984.40	37.02	6.89	43.91	54.00	10.09	vertical	Average
17984.40	47.36	6.89	54.25	74.00	19.75	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5580MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

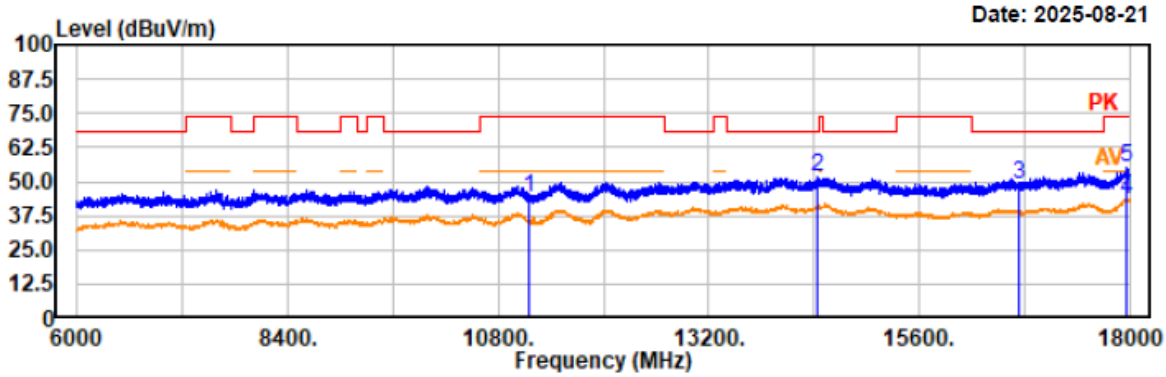

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11160.00	41.47	2.48	43.95	74.00	30.05	horizontal	Peak
14434.80	46.43	5.19	51.62	68.20	16.58	horizontal	Peak
16740.00	45.01	3.99	49.00	68.20	19.20	horizontal	Peak
17971.20	36.81	6.88	43.69	54.00	10.31	horizontal	Average
17971.20	48.03	6.88	54.91	74.00	19.09	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5580MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

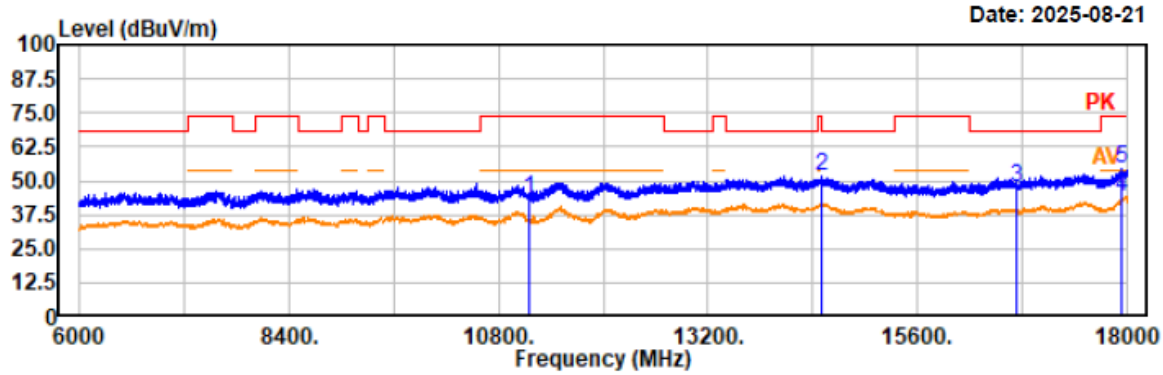

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	40.76	2.48	43.24	74.00	30.76	vertical	Peak
14510.40	46.77	5.06	51.83	68.20	16.37	vertical	Peak
16740.00	43.88	3.99	47.87	68.20	20.33	vertical	Peak
17946.00	37.11	6.86	43.97	54.00	10.03	vertical	Average
17946.00	47.37	6.86	54.23	74.00	19.77	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5700MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

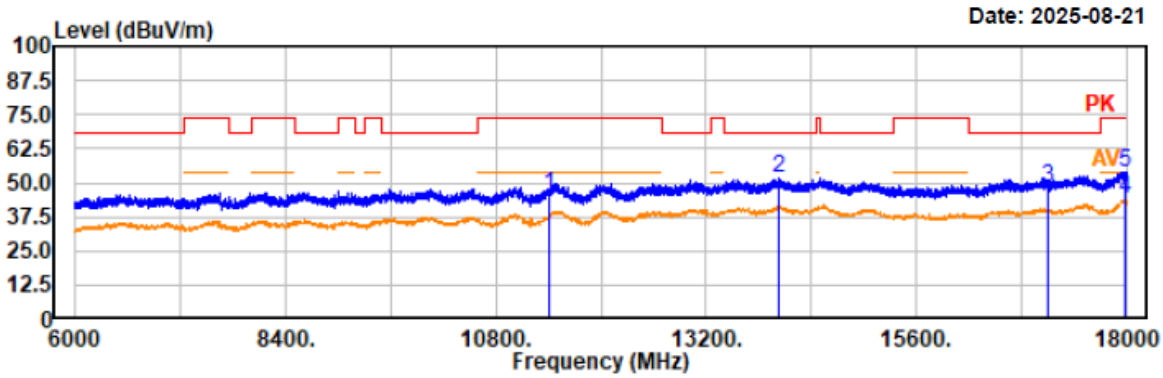

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	42.81	2.95	45.76	74.00	28.24	horizontal	Peak
14026.80	46.60	5.23	51.83	68.20	16.37	horizontal	Peak
17100.00	43.83	4.78	48.61	68.20	19.59	horizontal	Peak
17977.20	37.18	6.89	44.07	54.00	9.93	horizontal	Average
17977.20	46.96	6.89	53.85	74.00	20.15	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5700MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

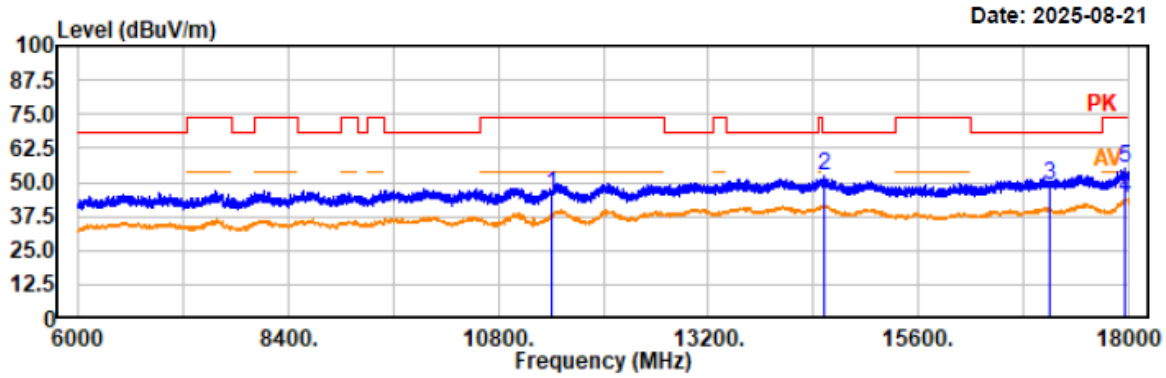

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	42.48	2.95	45.43	74.00	28.57	vertical	Peak
14518.80	47.33	5.06	52.39	68.20	15.81	vertical	Peak
17100.00	43.88	4.78	48.66	68.20	19.54	vertical	Peak
17970.00	36.94	6.88	43.82	54.00	10.18	vertical	Average
17970.00	48.36	6.88	55.24	74.00	18.76	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5500MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

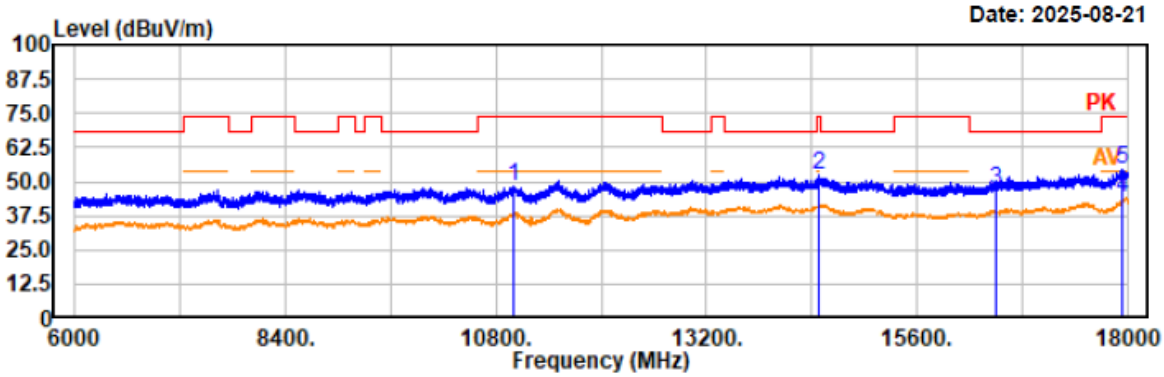

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11000.00	46.33	2.16	48.49	74.00	25.51	horizontal	Peak
14487.60	47.15	5.08	52.23	74.00	21.77	horizontal	Peak
16500.00	43.72	3.51	47.23	68.20	20.97	horizontal	Peak
17941.20	37.28	6.84	44.12	54.00	9.88	horizontal	Average
17941.20	47.37	6.84	54.21	74.00	19.79	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5500MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

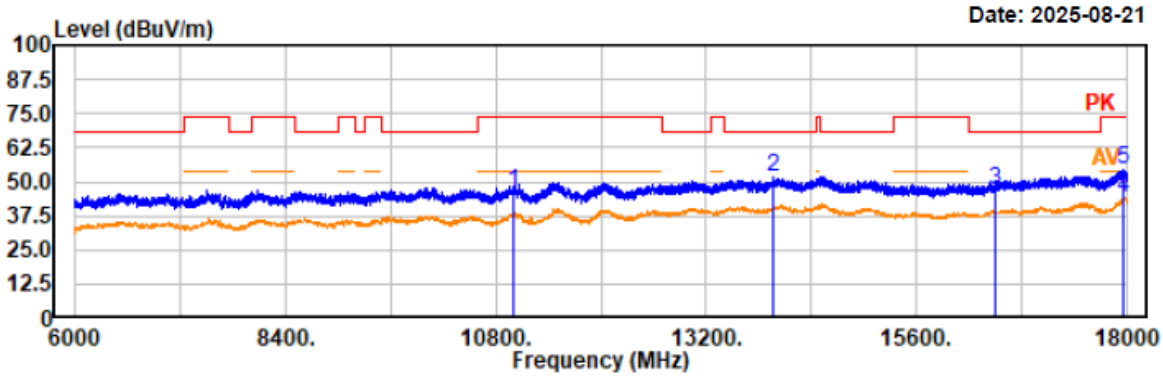

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	43.98	2.16	46.14	74.00	27.86	vertical	Peak
13965.60	46.87	5.19	52.06	68.20	16.14	vertical	Peak
16500.00	43.65	3.51	47.16	68.20	21.04	vertical	Peak
17966.40	37.05	6.88	43.93	54.00	10.07	vertical	Average
17966.40	47.71	6.88	54.59	74.00	19.41	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5580MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

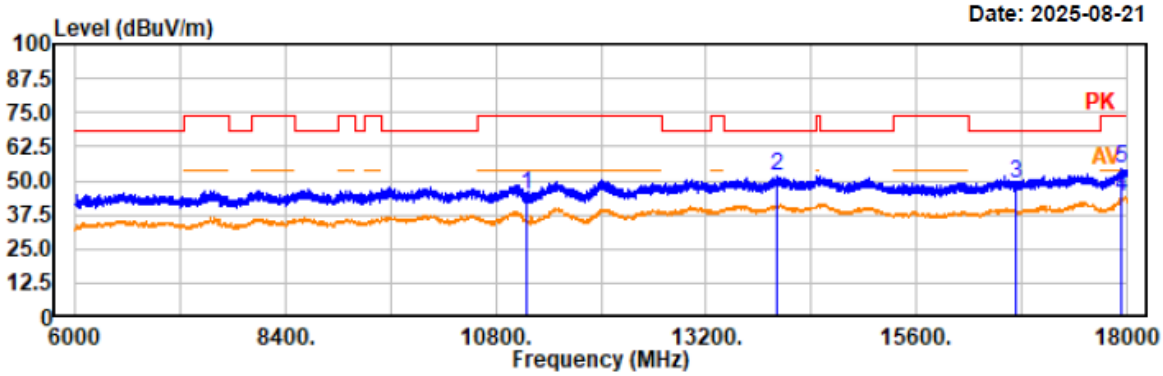

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11160.00	42.01	2.48	44.49	74.00	29.51	horizontal	Peak
14008.80	46.66	5.22	51.88	68.20	16.32	horizontal	Peak
16740.00	44.67	3.99	48.66	68.20	19.54	horizontal	Peak
17947.20	37.14	6.86	44.00	54.00	10.00	horizontal	Average
17947.20	47.49	6.86	54.35	74.00	19.65	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5580MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

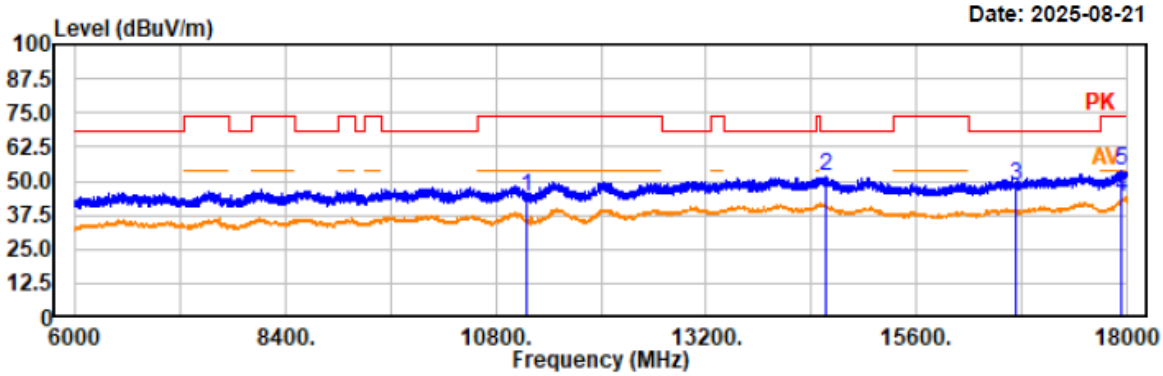

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	41.74	2.48	44.22	74.00	29.78	vertical	Peak
14562.00	46.42	5.04	51.46	68.20	16.74	vertical	Peak
16740.00	44.51	3.99	48.50	68.20	19.70	vertical	Peak
17943.60	37.02	6.85	43.87	54.00	10.13	vertical	Average
17943.60	46.95	6.85	53.80	74.00	20.20	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5700MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

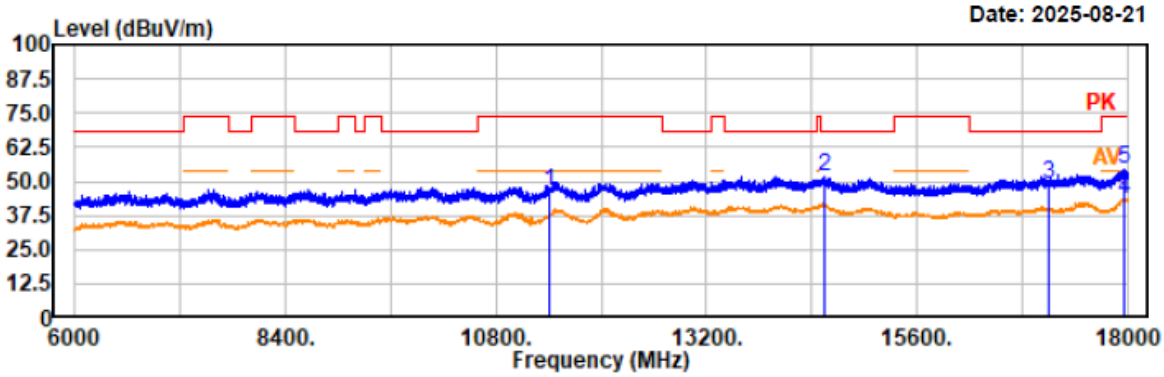

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	42.94	2.95	45.89	74.00	28.11	horizontal	Peak
14539.20	46.92	5.05	51.97	68.20	16.23	horizontal	Peak
17100.00	44.17	4.78	48.95	68.20	19.25	horizontal	Peak
17954.40	36.83	6.86	43.69	54.00	10.31	horizontal	Average
17954.40	47.37	6.86	54.23	74.00	19.77	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5700MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

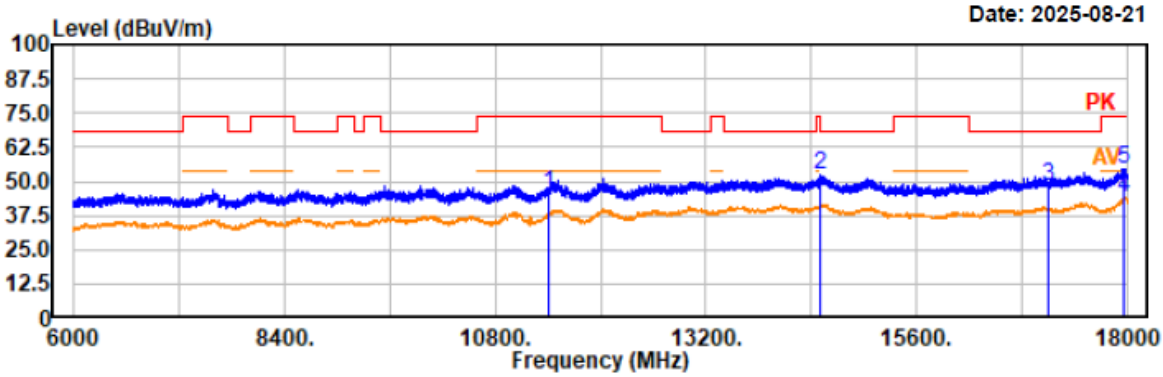

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	42.67	2.95	45.62	74.00	28.38	vertical	Peak
14510.40	47.33	5.06	52.39	68.20	15.81	vertical	Peak
17100.00	43.44	4.78	48.22	68.20	19.98	vertical	Peak
17961.60	36.96	6.86	43.82	54.00	10.18	vertical	Average
17961.60	47.83	6.86	54.69	74.00	19.31	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5510MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

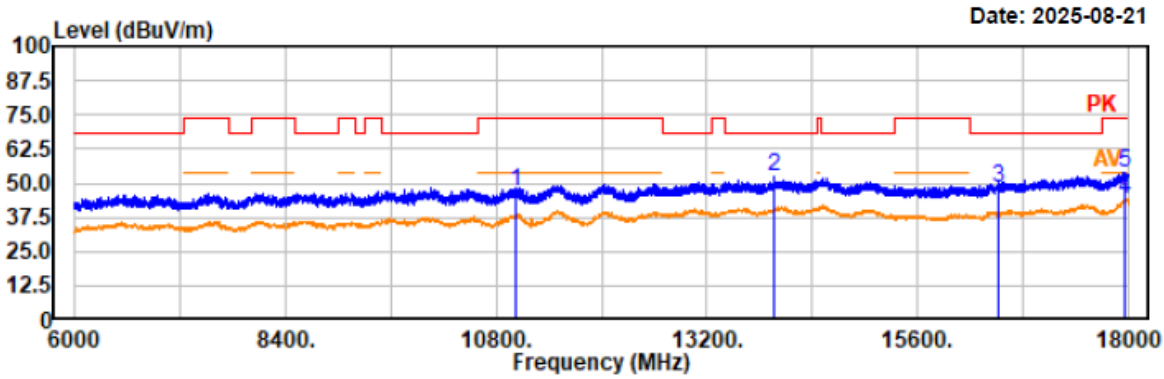

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11020.00	44.48	2.19	46.67	74.00	27.33	horizontal	Peak
13974.00	47.02	5.19	52.21	68.20	15.99	horizontal	Peak
16530.00	44.41	3.57	47.98	68.20	20.22	horizontal	Peak
17965.20	36.99	6.87	43.86	54.00	10.14	horizontal	Average
17965.20	47.02	6.87	53.89	74.00	20.11	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5510MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

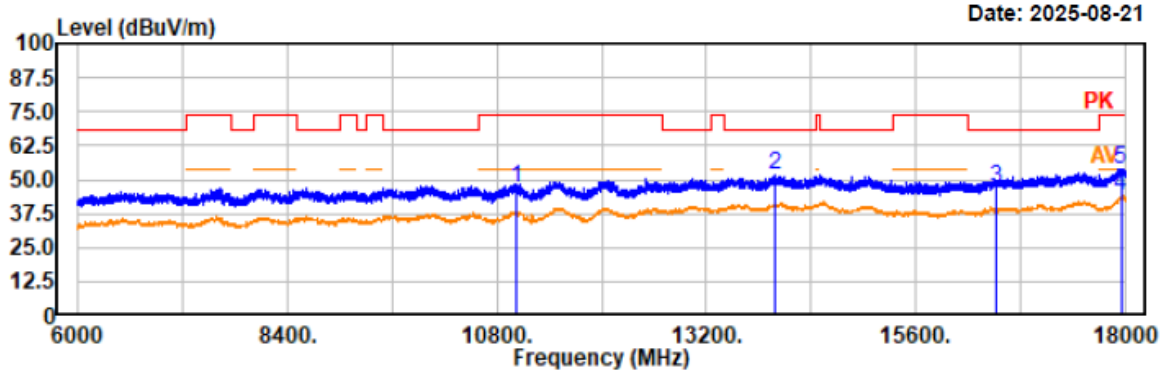

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11020.00	44.94	2.19	47.13	74.00	26.87	vertical	Peak
13982.40	46.49	5.20	51.69	68.20	16.51	vertical	Peak
16530.00	43.60	3.57	47.17	68.20	21.03	vertical	Peak
17950.80	37.04	6.86	43.90	54.00	10.10	vertical	Average
17950.80	47.02	6.86	53.88	74.00	20.12	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5550MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

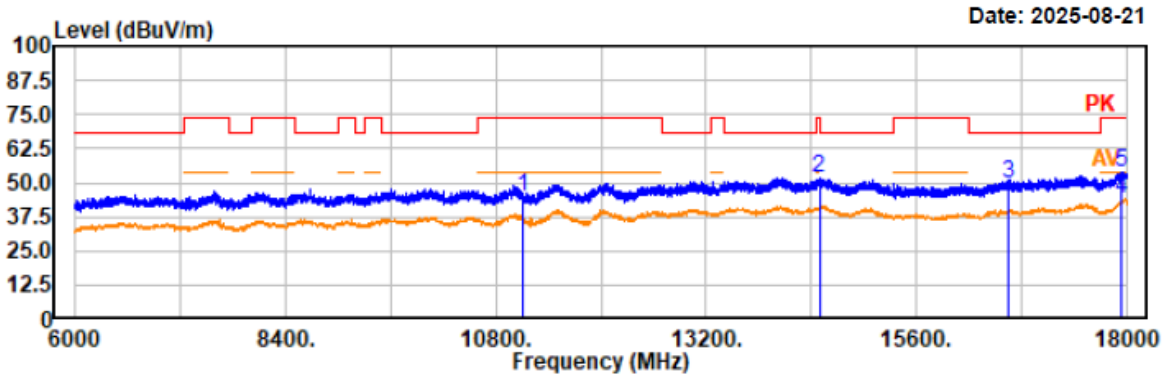

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	42.75	2.35	45.10	74.00	28.90	horizontal	Peak
14492.40	46.90	5.08	51.98	74.00	22.02	horizontal	Peak
16650.00	45.71	3.81	49.52	68.20	18.68	horizontal	Peak
17946.00	37.22	6.86	44.08	54.00	9.92	horizontal	Average
17946.00	47.08	6.86	53.94	74.00	20.06	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5550MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

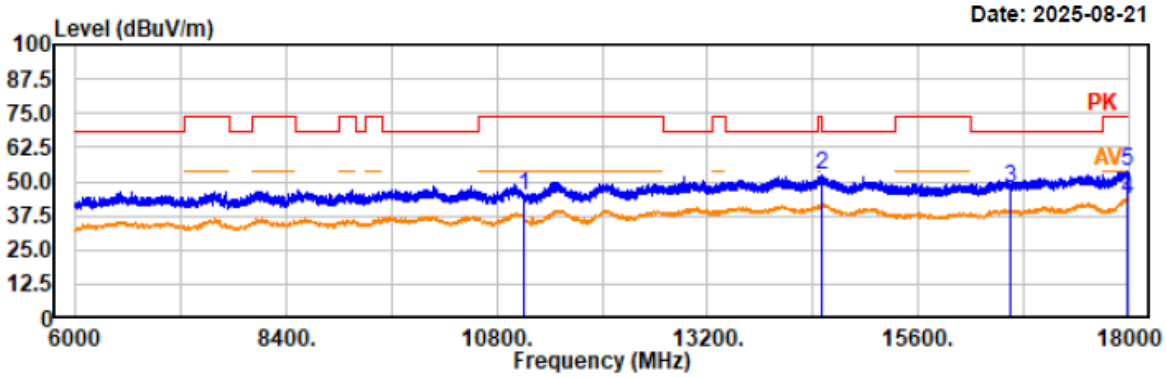

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	42.19	2.35	44.54	74.00	29.46	vertical	Peak
14509.20	47.11	5.06	52.17	68.20	16.03	vertical	Peak
16650.00	44.10	3.81	47.91	68.20	20.29	vertical	Peak
17982.00	36.71	6.89	43.60	54.00	10.40	vertical	Average
17982.00	46.71	6.89	53.60	74.00	20.40	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5670MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

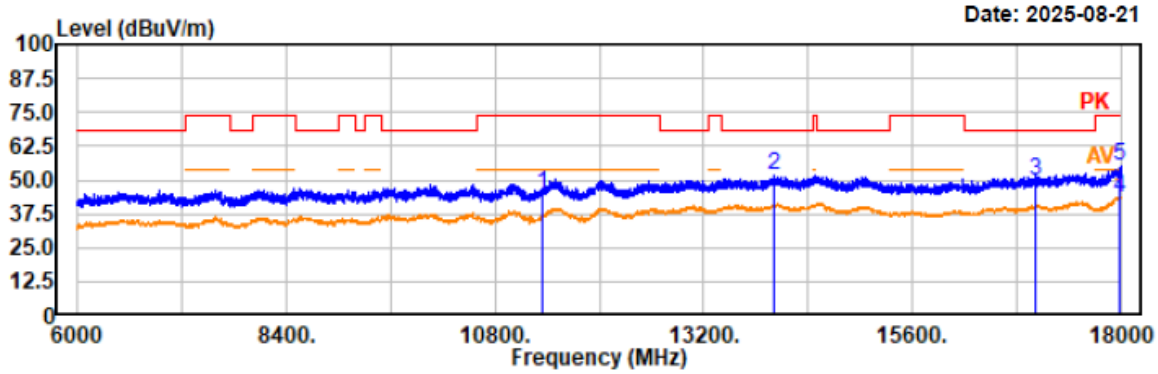

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11340.00	41.91	2.82	44.73	74.00	29.27	horizontal	Peak
14008.80	46.84	5.22	52.06	68.20	16.14	horizontal	Peak
17010.00	45.16	4.63	49.79	68.20	18.41	horizontal	Peak
17974.80	36.84	6.88	43.72	54.00	10.28	horizontal	Average
17974.80	48.04	6.88	54.92	74.00	19.08	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5670MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

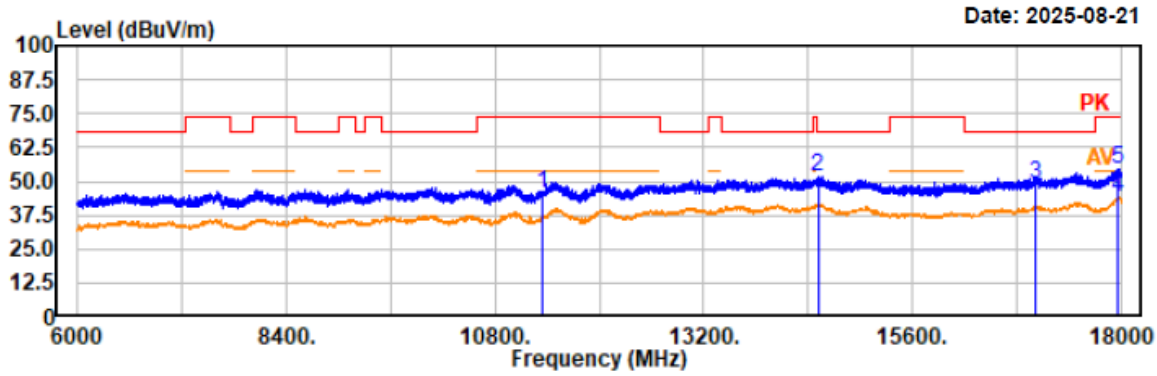

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	42.68	2.82	45.50	74.00	28.50	vertical	Peak
14514.00	46.76	5.07	51.83	68.20	16.37	vertical	Peak
17010.00	44.68	4.63	49.31	68.20	18.89	vertical	Peak
17967.60	36.96	6.88	43.84	54.00	10.16	vertical	Average
17967.60	47.86	6.88	54.74	74.00	19.26	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac80 5530MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

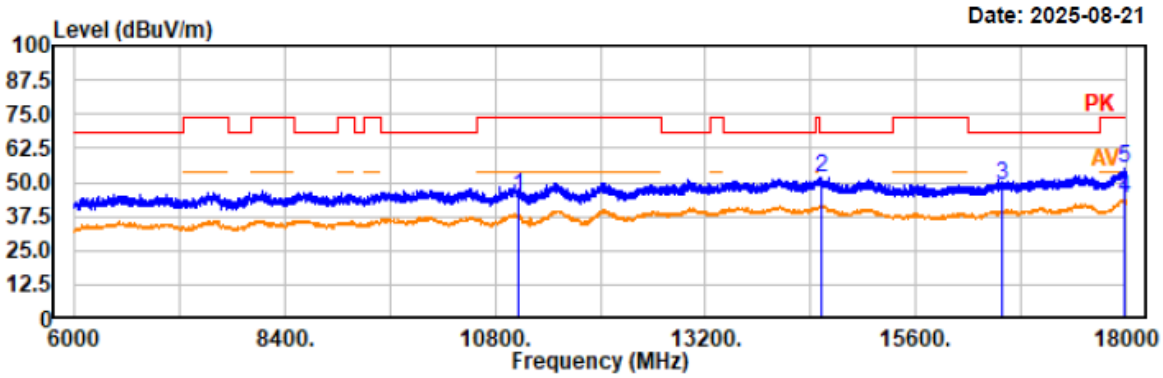

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.00	42.63	2.27	44.90	74.00	29.10	horizontal	Peak
14516.40	46.85	5.06	51.91	68.20	16.29	horizontal	Peak
16590.00	45.34	3.69	49.03	68.20	19.17	horizontal	Peak
17974.80	37.16	6.88	44.04	54.00	9.96	horizontal	Average
17974.80	48.02	6.88	54.90	74.00	19.10	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac80 5530MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

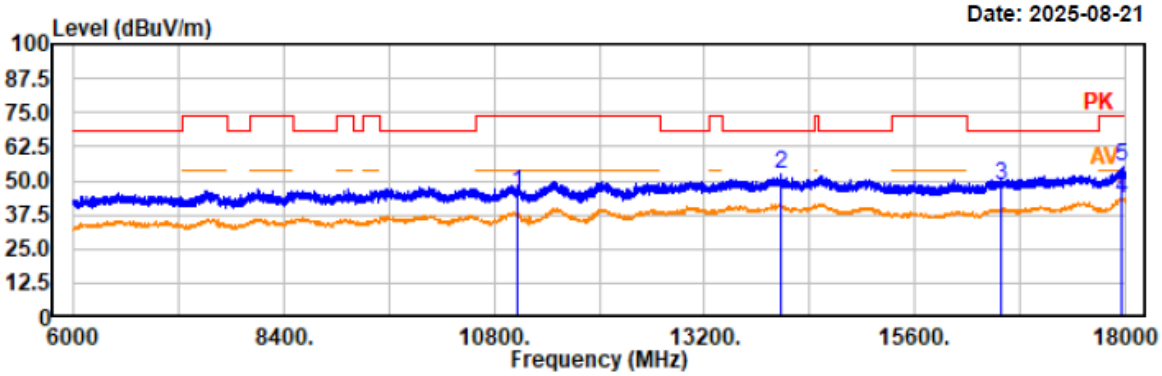

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11060.00	42.91	2.27	45.18	74.00	28.82	vertical	Peak
14067.60	47.14	5.29	52.43	68.20	15.77	vertical	Peak
16590.00	44.89	3.69	48.58	68.20	19.62	vertical	Peak
17968.80	36.78	6.88	43.66	54.00	10.34	vertical	Average
17968.80	47.99	6.88	54.87	74.00	19.13	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac80 5610MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

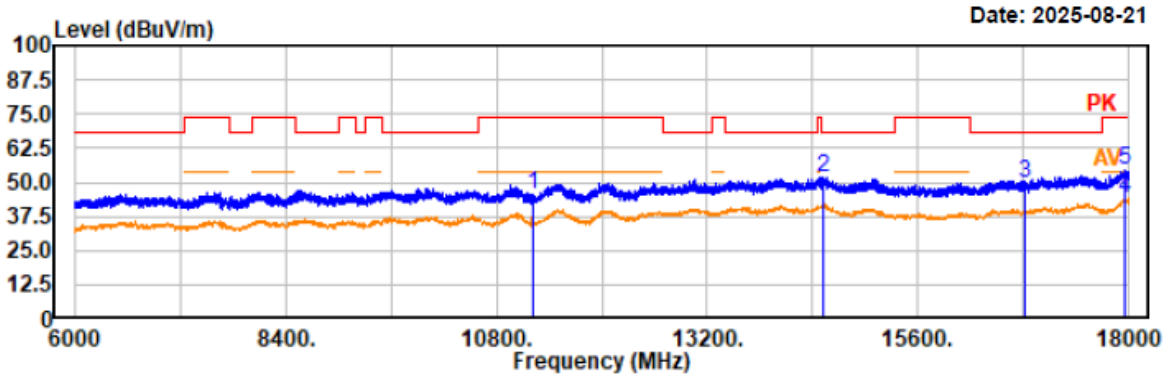

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11220.00	42.75	2.59	45.34	74.00	28.66	horizontal	Peak
14520.00	46.85	5.06	51.91	68.20	16.29	horizontal	Peak
16830.00	45.47	4.20	49.67	68.20	18.53	horizontal	Peak
17952.00	36.96	6.86	43.82	54.00	10.18	horizontal	Average
17952.00	47.34	6.86	54.20	74.00	19.80	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac80 5610MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

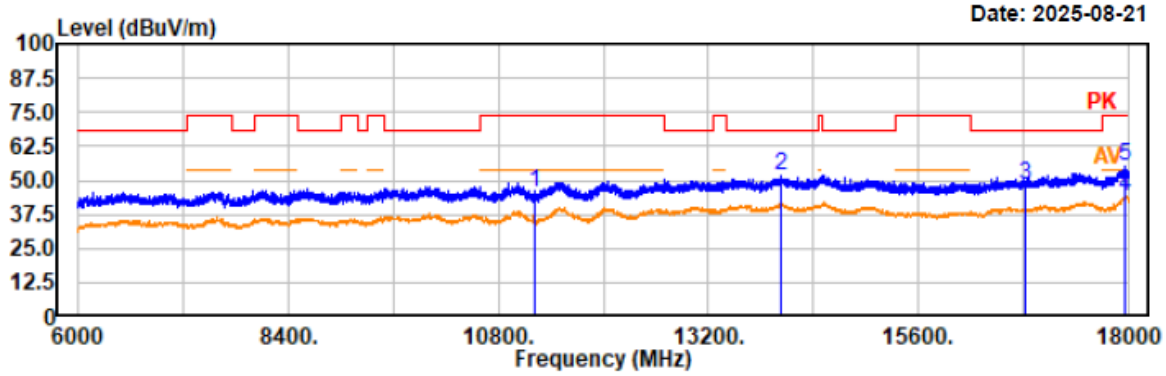

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11220.00	43.18	2.59	45.77	74.00	28.23	vertical	Peak
14030.40	46.55	5.24	51.79	68.20	16.41	vertical	Peak
16830.00	44.38	4.20	48.58	68.20	19.62	vertical	Peak
17954.40	37.29	6.86	44.15	54.00	9.85	vertical	Average
17954.40	48.16	6.86	55.02	74.00	18.98	vertical	Peak

Band 4:

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5745MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

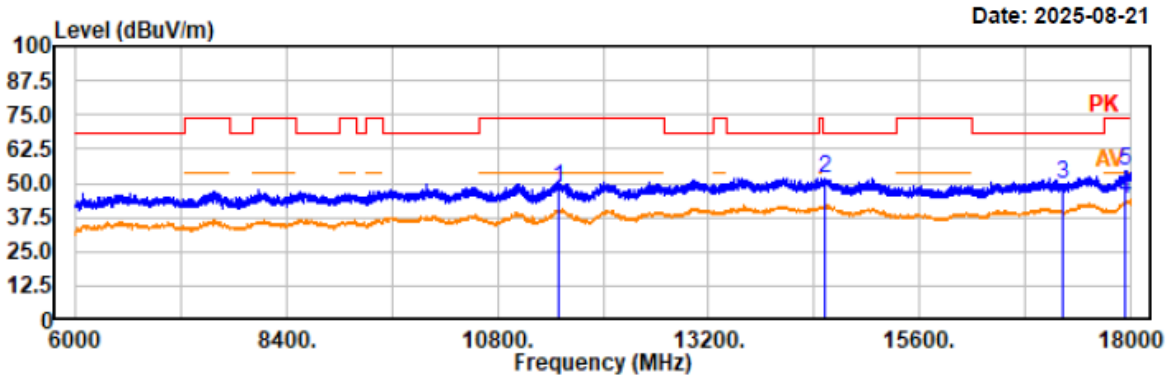

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	45.06	3.12	48.18	74.00	25.82	horizontal	Peak
14524.80	46.92	5.06	51.98	68.20	16.22	horizontal	Peak
17235.00	44.22	5.12	49.34	68.20	18.86	horizontal	Peak
17935.20	37.11	6.84	43.95	54.00	10.05	horizontal	Average
17935.20	47.61	6.84	54.45	74.00	19.55	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5745MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

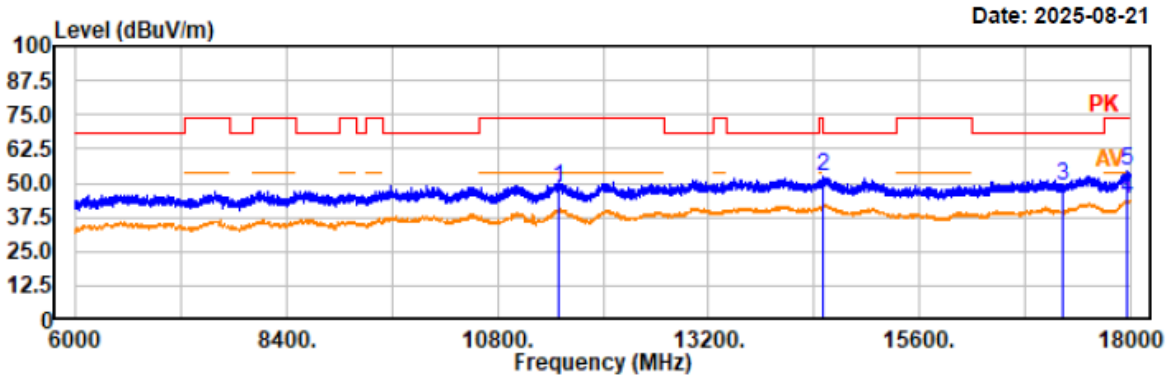

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11490.00	45.08	3.12	48.20	74.00	25.80	vertical	Peak
14509.20	47.30	5.06	52.36	68.20	15.84	vertical	Peak
17234.40	43.99	5.11	49.10	68.20	19.10	vertical	Peak
17971.20	37.32	6.88	44.20	54.00	9.80	vertical	Average
17971.20	47.54	6.88	54.42	74.00	19.58	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5785MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

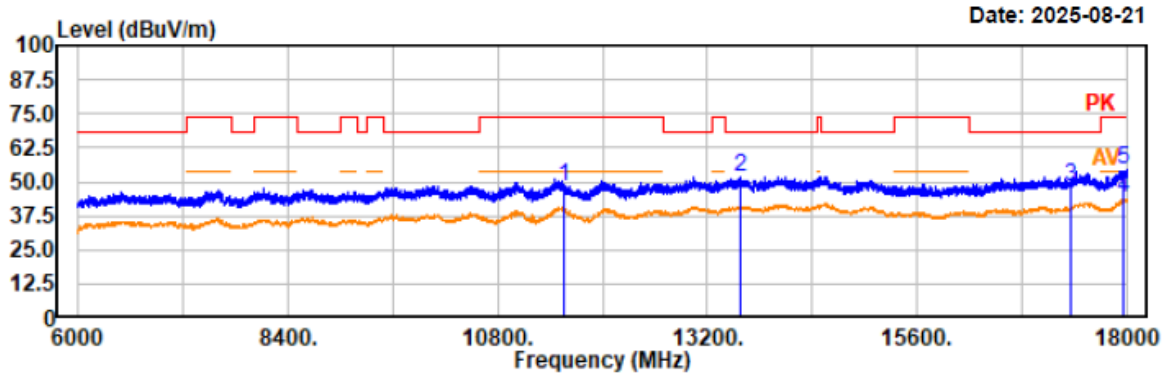

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11570.00	44.77	3.20	47.97	74.00	26.03	horizontal	Peak
13578.00	47.19	4.69	51.88	68.20	16.32	horizontal	Peak
17355.00	42.94	5.37	48.31	68.20	19.89	horizontal	Peak
17966.40	36.95	6.88	43.83	54.00	10.17	horizontal	Average
17966.40	47.29	6.88	54.17	74.00	19.83	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5785MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

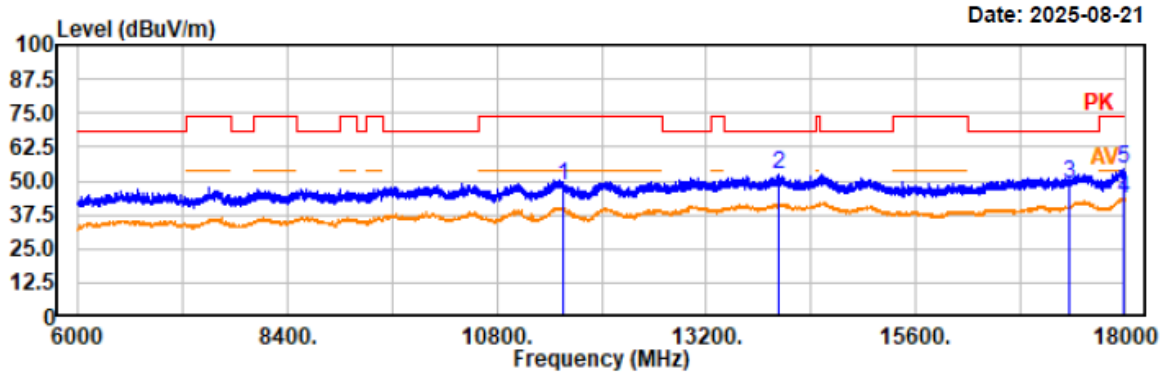

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11570.00	45.22	3.20	48.42	74.00	25.58	vertical	Peak
14029.20	47.28	5.24	52.52	68.20	15.68	vertical	Peak
17354.40	43.76	5.37	49.13	68.20	19.07	vertical	Peak
17991.60	36.82	6.90	43.72	54.00	10.28	vertical	Average
17991.60	47.64	6.90	54.54	74.00	19.46	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5825MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

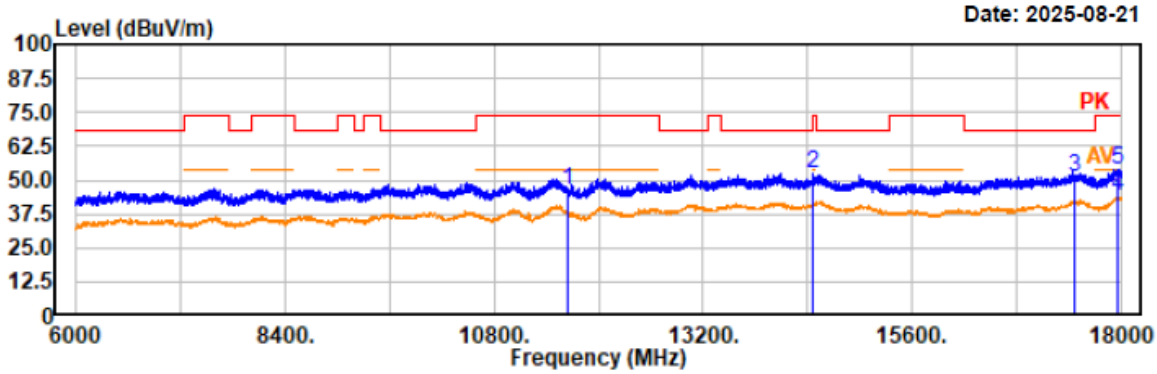

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11650.00	42.70	3.23	45.93	74.00	28.07	horizontal	Peak
14462.40	47.27	5.14	52.41	68.20	15.79	horizontal	Peak
17475.00	45.38	5.63	51.01	68.20	17.19	horizontal	Peak
17959.20	37.22	6.86	44.08	54.00	9.92	horizontal	Average
17959.20	47.03	6.86	53.89	74.00	20.11	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5825MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

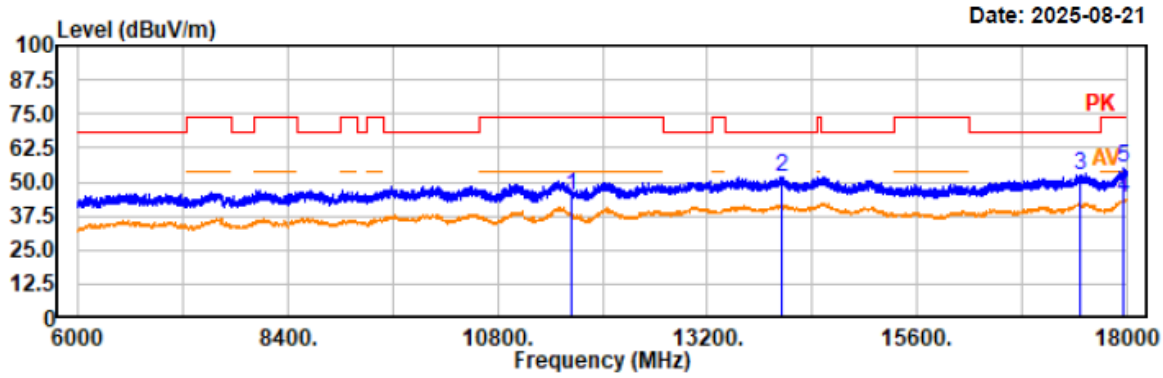

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	41.79	3.23	45.02	74.00	28.98	vertical	Peak
14061.60	46.78	5.28	52.06	68.20	16.14	vertical	Peak
17474.40	46.57	5.62	52.19	68.20	16.01	vertical	Peak
17958.00	37.04	6.87	43.91	54.00	10.09	vertical	Average
17958.00	48.35	6.87	55.22	74.00	18.78	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5745MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

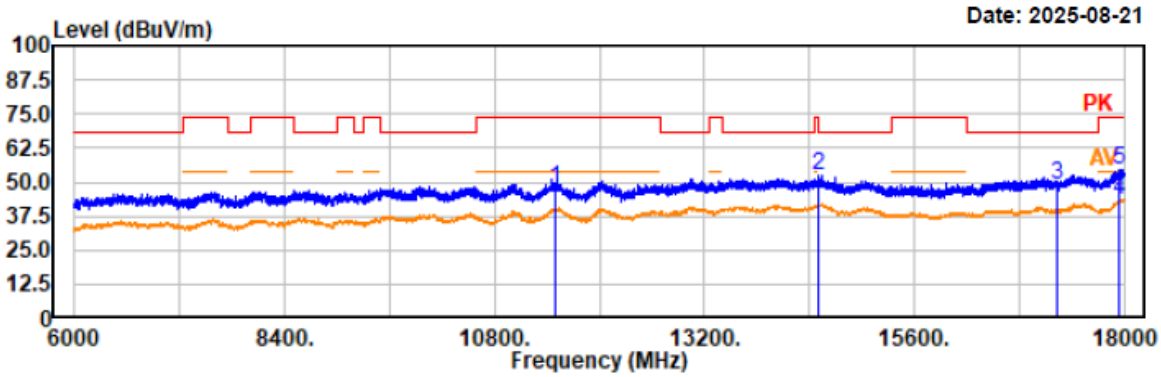

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11490.00	44.63	3.12	47.75	74.00	26.25	horizontal	Peak
14494.80	47.58	5.08	52.66	74.00	21.34	horizontal	Peak
17235.00	43.96	5.12	49.08	68.20	19.12	horizontal	Peak
17937.60	36.91	6.84	43.75	54.00	10.25	horizontal	Average
17937.60	47.77	6.84	54.61	74.00	19.39	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5745MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

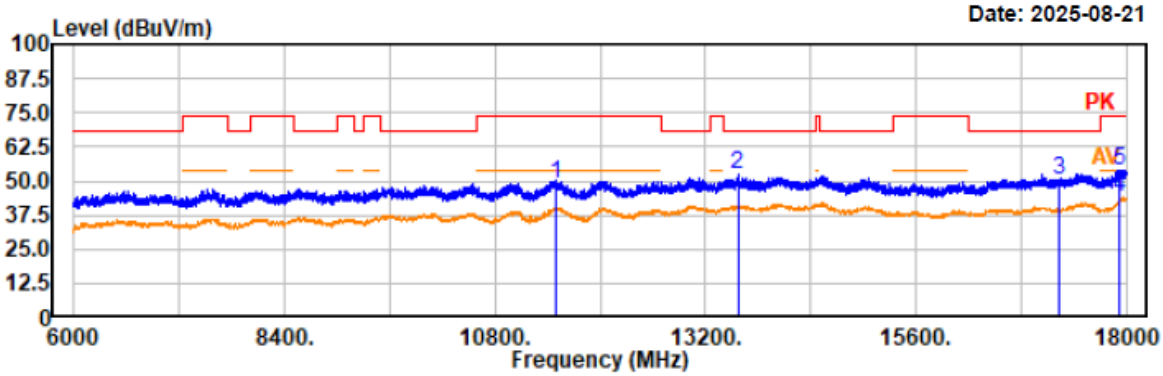

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	45.72	3.12	48.84	74.00	25.16	vertical	Peak
13568.40	47.51	4.68	52.19	68.20	16.01	vertical	Peak
17234.40	44.96	5.11	50.07	68.20	18.13	vertical	Peak
17928.00	37.19	6.84	44.03	54.00	9.97	vertical	Average
17928.00	47.25	6.84	54.09	74.00	19.91	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5785MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

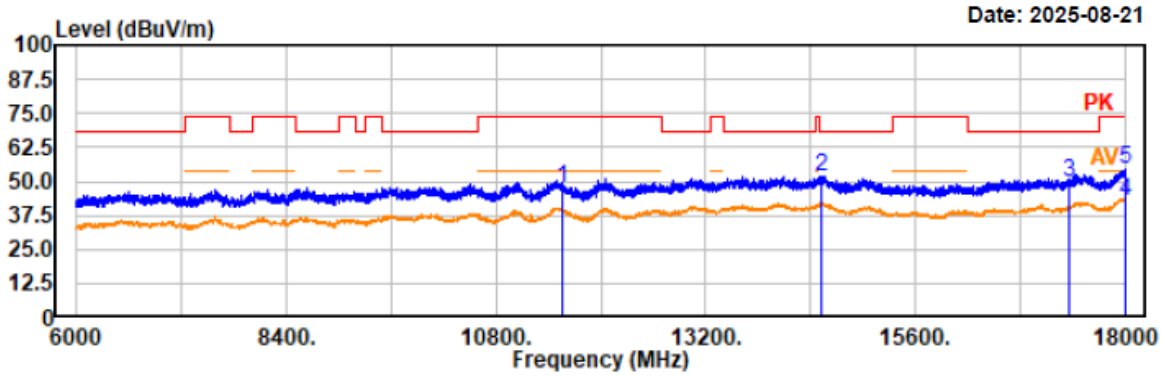

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11570.00	44.29	3.20	47.49	74.00	26.51	horizontal	Peak
14520.00	46.58	5.06	51.64	68.20	16.56	horizontal	Peak
17355.00	44.11	5.37	49.48	68.20	18.72	horizontal	Peak
17996.40	35.80	6.91	42.71	54.00	11.29	horizontal	Average
17996.40	47.51	6.91	54.42	74.00	19.58	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5785MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

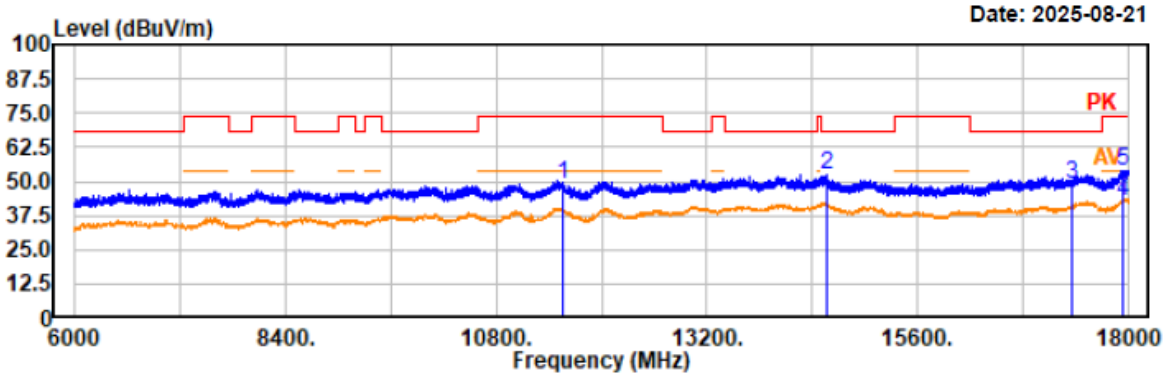

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11570.00	45.68	3.20	48.88	74.00	25.12	vertical	Peak
14563.20	47.49	5.04	52.53	68.20	15.67	vertical	Peak
17355.00	43.66	5.37	49.03	68.20	19.17	vertical	Peak
17937.60	35.76	6.84	42.60	54.00	11.40	vertical	Average
17937.60	46.99	6.84	53.83	74.00	20.17	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5825MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

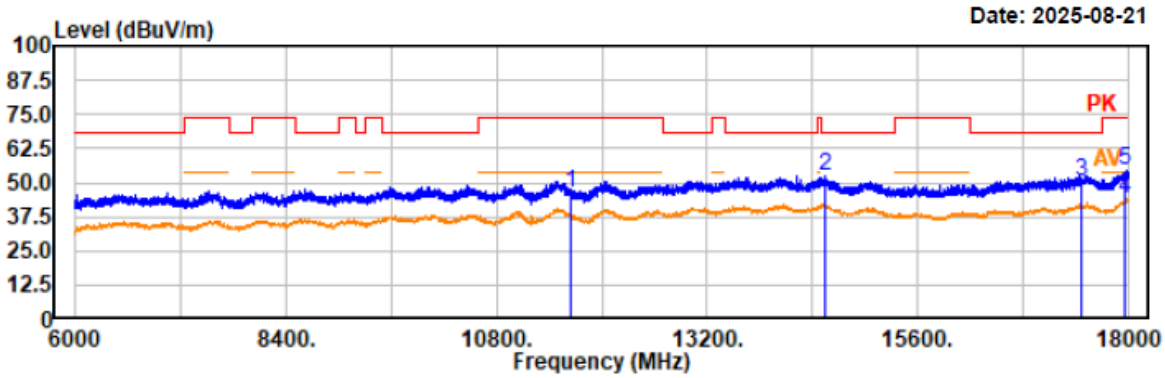

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
11650.00	42.76	3.23	45.99	74.00	28.01	horizontal	Peak
14547.60	47.53	5.04	52.57	68.20	15.63	horizontal	Peak
17475.00	44.78	5.63	50.41	68.20	17.79	horizontal	Peak
17967.60	36.94	6.88	43.82	54.00	10.18	horizontal	Average
17967.60	47.52	6.88	54.40	74.00	19.60	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5825MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.4℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

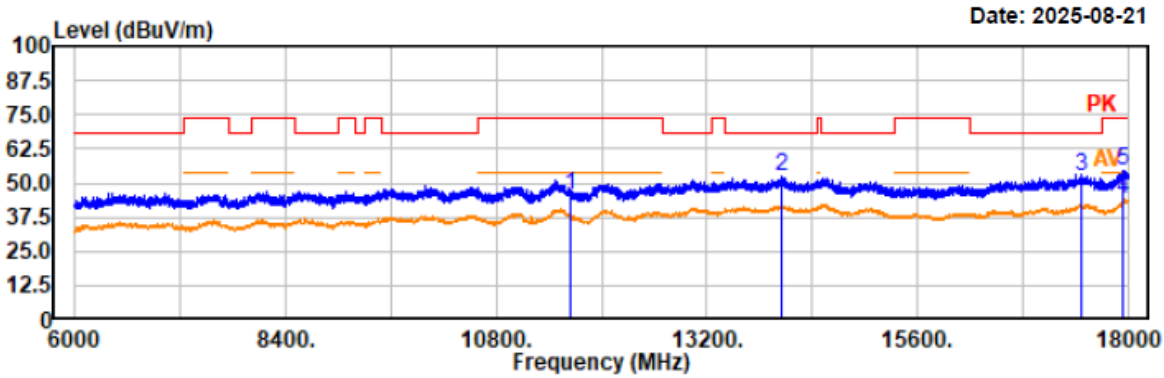

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	42.20	3.23	45.43	74.00	28.57	vertical	Peak
14054.40	47.40	5.28	52.68	68.20	15.52	vertical	Peak
17474.40	46.62	5.62	52.24	68.20	15.96	vertical	Peak
17932.80	36.97	6.83	43.80	54.00	10.20	vertical	Average
17932.80	47.55	6.83	54.38	74.00	19.62	vertical	Peak

5) 18GHz~40GHz:

Note: The maximum output power mode: Wi-Fi 802.11a 5785MHz was tested.

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5785MHz
EUT Model: SNM927
Test distance: 1.5m

Temp/Humi/ATM: 22.1℃/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

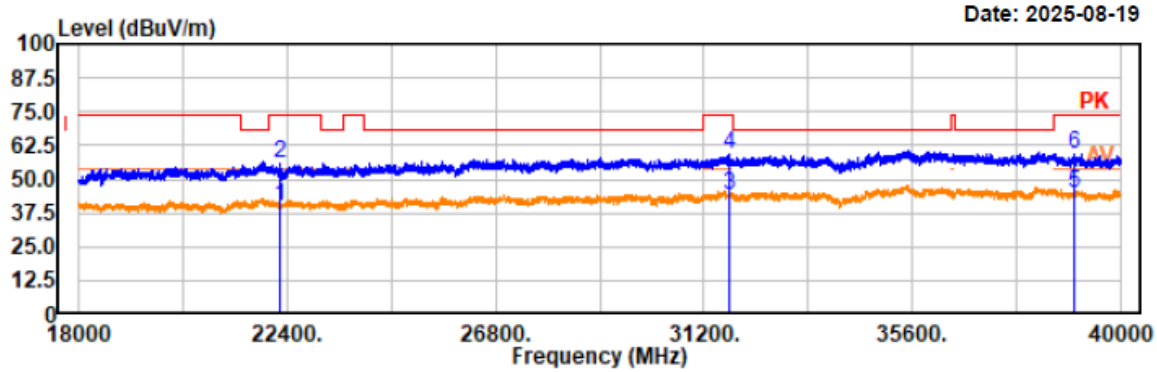

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
22265.80	35.13	4.54	39.67	54.00	14.33	horizontal	Average
22265.80	51.03	4.54	55.57	74.00	18.43	horizontal	Peak
31723.60	36.94	7.35	44.29	54.00	9.71	horizontal	Average
31723.60	52.00	7.35	59.35	74.00	14.65	horizontal	Peak
39023.20	35.59	9.17	44.76	54.00	9.24	horizontal	Average
39023.20	50.18	9.17	59.35	74.00	14.65	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5785MHz
EUT Model: SNM927
Test distance: 1.5m

Temp/Humi/ATM: 22.1℃/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

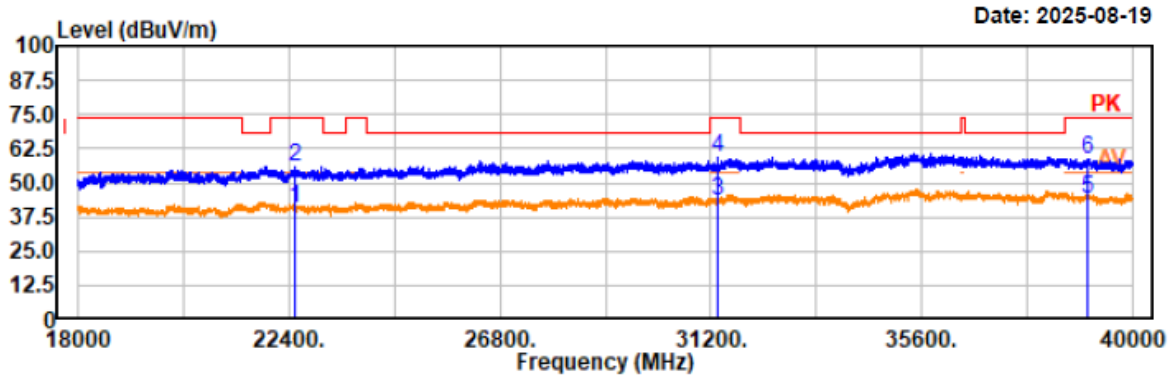

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
22514.40	35.51	5.09	40.60	54.00	13.40	vertical	Average
22514.40	51.06	5.09	56.15	74.00	17.85	vertical	Peak
31329.80	35.93	7.45	43.38	54.00	10.62	vertical	Average
31329.80	51.57	7.45	59.02	74.00	14.98	vertical	Peak
39076.00	35.27	9.15	44.42	54.00	9.58	vertical	Average
39076.00	49.36	9.15	58.51	74.00	15.49	vertical	Peak

Restricted Bands Emissions:

Band 1:

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5180MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

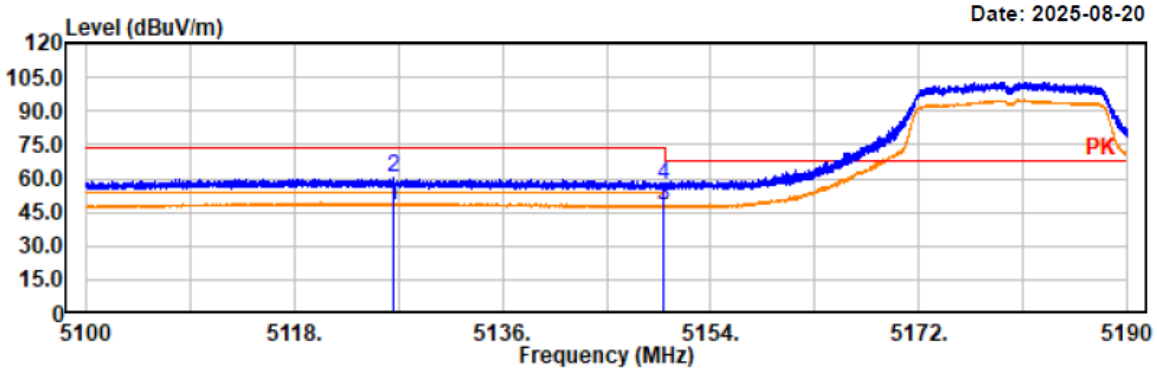

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5126.60	36.54	11.13	47.67	54.00	6.33	horizontal	Average
5126.60	49.33	11.13	60.46	74.00	13.54	horizontal	Peak
5149.99	36.44	11.17	47.61	54.00	6.39	horizontal	Average
5149.99	46.23	11.17	57.40	74.00	16.60	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5180MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

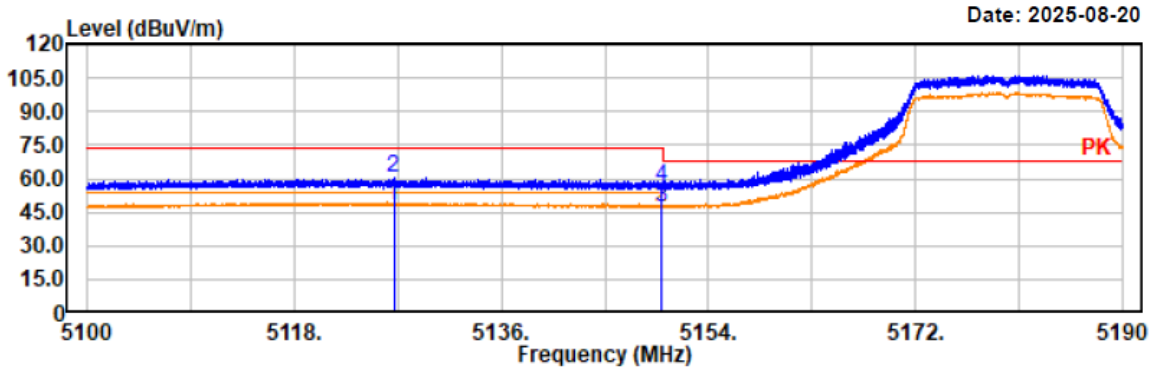

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5126.64	36.81	11.13	47.94	54.00	6.06	vertical	Average
5126.64	49.61	11.13	60.74	74.00	13.26	vertical	Peak
5149.99	36.37	11.17	47.54	54.00	6.46	vertical	Average
5149.99	45.24	11.17	56.41	74.00	17.59	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5240MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

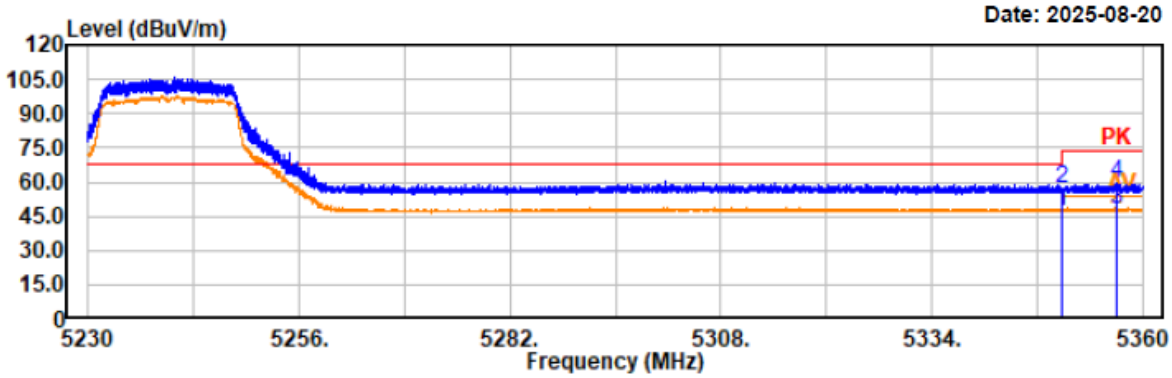

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
5350.00	35.87	11.51	47.38	54.00	6.62	horizontal	Average
5350.00	45.36	11.51	56.87	74.00	17.13	horizontal	Peak
5356.71	36.23	11.51	47.74	54.00	6.26	horizontal	Average
5356.71	47.69	11.51	59.20	74.00	14.80	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11a 5240MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

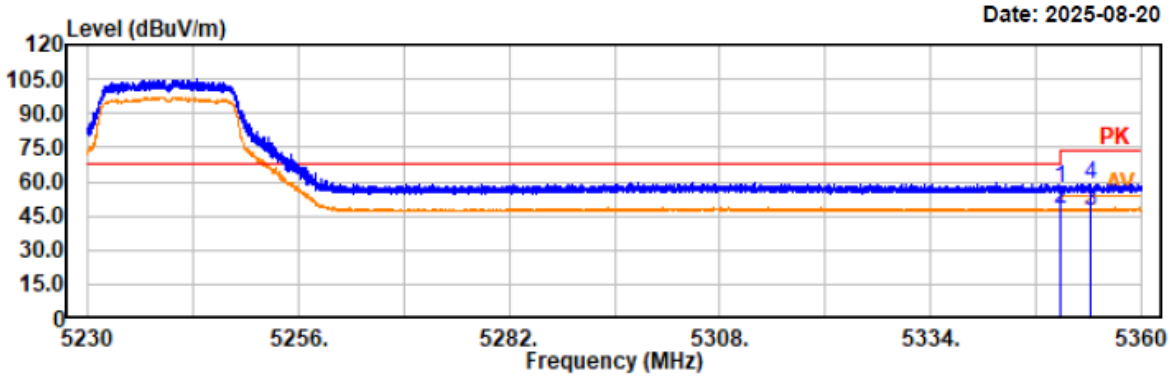

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	45.23	11.51	56.74	74.00	17.26	vertical	Peak
5350.00	36.12	11.51	47.63	54.00	6.37	vertical	Average
5353.71	35.92	11.52	47.44	54.00	6.56	vertical	Average
5353.71	47.54	11.52	59.06	74.00	14.94	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5180MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

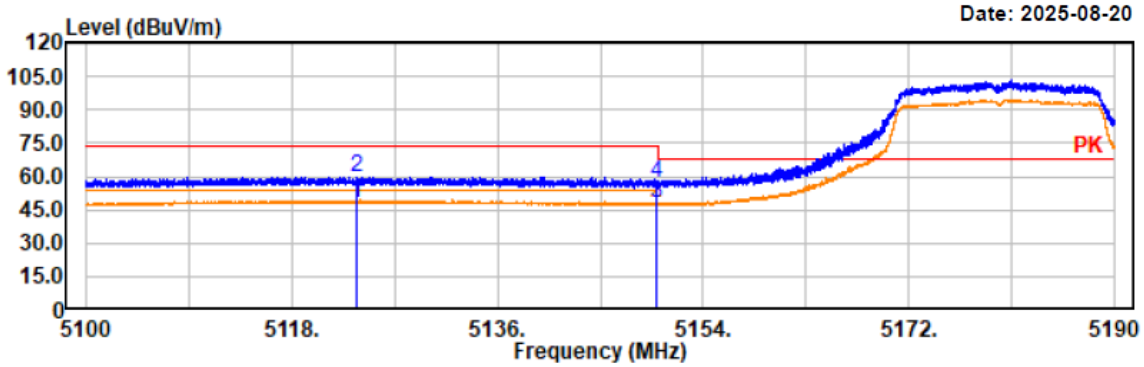

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5123.64	36.73	11.13	47.86	54.00	6.14	horizontal	Average
5123.64	48.86	11.13	59.99	74.00	14.01	horizontal	Peak
5149.99	36.54	11.17	47.71	54.00	6.29	horizontal	Average
5149.99	46.04	11.17	57.21	74.00	16.79	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5180MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

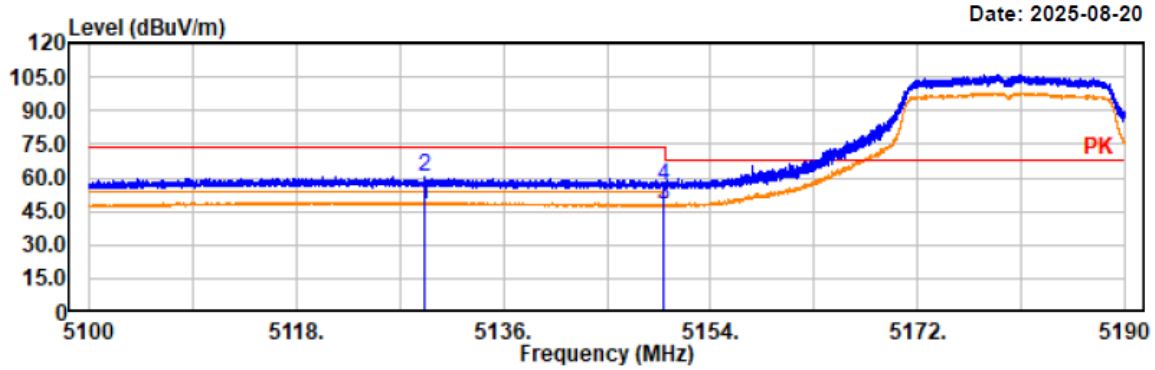

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5129.17	36.53	11.14	47.67	54.00	6.33	vertical	Average
5129.17	49.19	11.14	60.33	74.00	13.67	vertical	Peak
5149.99	36.55	11.17	47.72	54.00	6.28	vertical	Average
5149.99	45.27	11.17	56.44	74.00	17.56	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5240MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

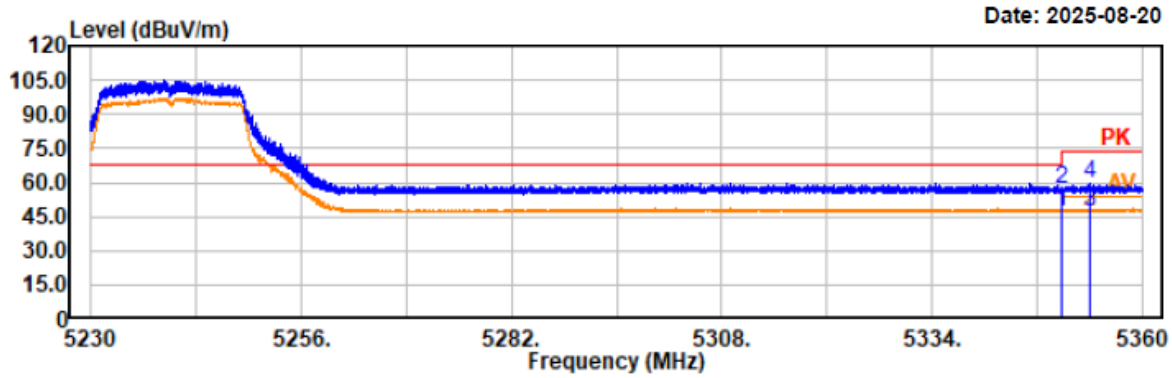

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
5350.00	35.97	11.51	47.48	54.00	6.52	horizontal	Average
5350.00	45.21	11.51	56.72	74.00	17.28	horizontal	Peak
5353.44	36.02	11.52	47.54	54.00	6.46	horizontal	Average
5353.44	48.38	11.52	59.90	74.00	14.10	horizontal	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac20 5240MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

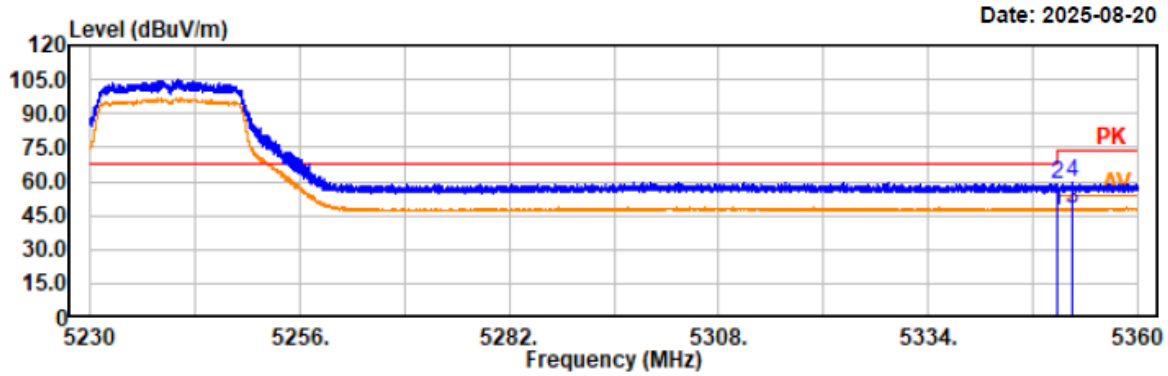

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
5350.00	35.98	11.51	47.49	54.00	6.51	vertical	Average
5350.00	46.97	11.51	58.48	74.00	15.52	vertical	Peak
5351.94	36.14	11.51	47.65	54.00	6.35	vertical	Average
5351.94	47.92	11.51	59.43	74.00	14.57	vertical	Peak

Project No.: 2507W73938E-RF
Test Mode: 802.11ac40 5190MHz
EUT Model: SNM927
Test distance: 3m

Temp/Humi/ATM: 23.1℃/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

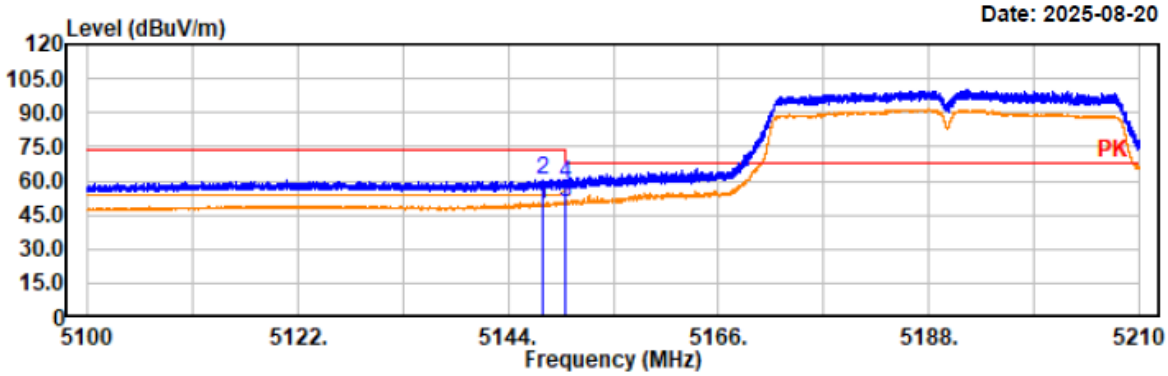

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5147.69	38.51	11.17	49.68	54.00	4.32	horizontal	Average
5147.69	49.38	11.17	60.55	74.00	13.45	horizontal	Peak
5150.00	39.73	11.17	50.90	54.00	3.10	horizontal	Average
5150.00	47.69	11.17	58.86	74.00	15.14	horizontal	Peak