

TEST REPORT

Applicant: Xi'an NovaStar Tech Co., Ltd.

Address of Applicant: Building 2, NovaStar Tech Park, No. 1699, Yunshui 3rd Road, Xi'an, Shaanxi, China

Manufacturer: Xi'an NovaStar Tech Co., Ltd.

Address of Manufacturer: Building 2, NovaStar Tech Park, No. 1699, Yunshui 3rd Road, Xi'an, Shaanxi, China

Equipment Under Test (EUT)

Product Name: Taurus-MediaPlayer

Model No.: TB40

FCC ID: 2AG8JTB40

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: April 14, 2026

Date of Test: April 15, 2026- May 18, 2026

Date of report issued: May 25, 2026

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	May 25, 2026	Original

Tested By:

Jauch. Gai

Date:

May 25, 2026

Test Engineer

Prepared By:

Jauch. Gai

Date:

May 25, 2026

Project Engineer

Check By:

Robinson Luy

Date:

May 25, 2026

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 Version	2
3 Contents.....	3
4 Test Summary.....	4
5 General Information	5
5.1 General Description of EUT	5
5.2 Test mode.....	7
5.3 Description of Support Units.....	7
5.4 Deviation from Standards	7
5.5 Abnormalities from Standard Conditions	7
5.6 Test Facility	7
5.7 Test Location	7
6 Test Instruments list	8
7 Test results and Measurement Data	10
7.1 Antenna requirement.....	10
7.2 AC Power Line Conducted Emission	11
7.3 Conducted Output Power	14
7.4 Channel Bandwidth	15
7.5 Power Spectral Density	16
7.6 Spurious Emission in Non-restricted & restricted Bands.....	17
7.6.1 Conducted Emission Method	17
7.6.2 Radiated Emission Method	18
8 Test Setup Photo.....	71
9 EUT Constructional Details	71

4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	FCC part 15.207	Pass
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
Channel Bandwidth & 99% OCB	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Band Edge	FCC part 15.247(d)	Pass
Spurious Emission	FCC part 15.205/15.209/15.247(d)	Pass

Remark:

1. Test according to ANSI C63.10:2020
2. Pass: The EUT complies with the essential requirements in the standard.
3. N/A: Not applicable.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Taurus-MediaPlayer
Model No.:	TB40
Test sample(s) ID:	GTSL2026050680-1
Sample(s) Status	Engineer sample
Operation Frequency:	802.11b/g/n-HT20: 2412 ~ 2462MHz
Channel numbers:	802.11b/g/n-HT20: 11
Channel separation:	5MHz
Transfer Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n-HT20: MCS0~MCS7
Modulation technology:	802.11b: DSSS 802.11g/n-HT20: OFDM
Antenna Type:	External rod antenna
Antenna gain:	5.03dBi
Power supply:	DC 12V $\overline{\text{---}}$ 2A Adapter: Model: DYS12300CC-U Input: 100-240V 50/60Hz, 1.5A Output: 12V $\overline{\text{---}}$ 3A, 36.0W

Disclaimer statement:

1. Antenna gain information provided by the customer, and the laboratory is not responsible for its authenticity.
2. The information in this section is provided by the applicant or manufacturer, GTS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

Channel List

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/g/n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	--

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)
Data rate	1Mbps	6Mbps	MCS 0

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Lenovo	PC Host	M6900	EA05257893

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **ISED—Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Apr. 10, 2026	Apr. 09, 2027
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 10, 2026	Apr. 09, 2027
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Apr. 11, 2026	Apr. 10, 2027
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 11, 2026	Apr. 10, 2027
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Jul. 11, 2025	Jul 10, 2026
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.22, 2025	Nov.21, 2026
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 10, 2026	Apr. 09, 2027
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 10, 2026	Apr. 09, 2027
10	Horn Antenna (18GH-40GHz)	Schwarzbeck	BBHA 9170	GTS691	Apr. 11, 2026	Apr. 10, 2027
11	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 10, 2026	Mar. 09, 2027
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 10, 2026	Apr. 09, 2027
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 24, 2025	Nov. 23, 2026
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 10, 2026	Apr. 09, 2027
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 13, 2026	Apr. 12, 2027
16	RE cable 1	GTS	N/A	GTS675	Jul. 11, 2025	Jul. 10, 2026
17	RE cable 2	GTS	N/A	GTS676	Jul. 11, 2025	Jul. 10, 2026
18	RE cable 3	GTS	N/A	GTS677	Jul. 11, 2025	Jul. 10, 2026
19	RE cable 4	GTS	N/A	GTS678	Jul. 11, 2025	Jul. 10, 2026
20	RE cable 5	GTS	N/A	GTS679	Jul. 11, 2025	Jul. 10, 2026
21	RE cable 6	GTS	N/A	GTS680	Jul. 11, 2025	Jul. 10, 2026
22	RE cable 7	GTS	N/A	GTS681	Jul. 11, 2025	Jul. 10, 2026
23	RE cable 8	GTS	N/A	GTS682	Jul. 11, 2025	Jul. 10, 2026
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Jul. 12, 2022	Jul. 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 11, 2026	Apr. 10, 2027
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	Apr. 10, 2026	Apr. 09, 2027
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	Thermo meter	JINCHUANG	GSP-8A	GTS642	Apr. 14, 2026	Apr. 13, 2027
6	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	Apr. 11, 2026	Apr. 10, 2027
7	ISN	SCHWARZBECK	NTFM 8158	GTS565	Apr. 10, 2026	Apr. 09, 2027
8	High voltage probe	SCHWARZBECK	TK9420	GTS537	Apr. 10, 2026	Apr. 09, 2027
9	Antenna end assembly	Weinschel	1870A	GTS560	Apr. 10, 2026	Apr. 09, 2027
10	EMI Test Software	AUDIX	E3-6.100622	GTS726	N/A	N/A
11	Current probe	CYBERTEK	EM5011	GTS698	Jan. 27, 2026	Jan. 26, 2027

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	Apr. 10, 2026	Apr. 09, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 11, 2026	Apr. 10, 2027
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	Apr. 10, 2026	Apr. 09, 2027
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	Apr. 10, 2026	Apr. 09, 2027
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	Apr. 10, 2026	Apr. 09, 2027
6	Wideband Power Meter	Keysight	N1924A	GTS673	Apr. 11, 2026	Apr. 10, 2027
7	USB RF Power Sensor	DARE	RPR3006W	GTS569	Apr. 10, 2026	Apr. 09, 2027
8	RF Switch Box	Shongyi	RFSW3003328	GTS571	Apr. 10, 2026	Apr. 09, 2027
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 10, 2026	Apr. 09, 2027
10	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 14, 2026	Apr. 13, 2027
11	EXA Signal Analyzer	Keysight	N9010B	MY60241168	Nov. 01, 2025	Oct. 31, 2026

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	Jul. 16, 2025	Jul. 15, 2026

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	External rod antennas with RP-SMA connector, and gain is 5.03dBi


7.2 AC Power Line Conducted Emission

Test Requirement:	FCC Part15 C Section 15.207						
Test Method:	ANSI C63.10:2020						
Test Frequency Range:	150kHz to 30MHz						
Receiver setup:	RBW=9kHz, VBW=30kHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane <i>Remark:</i> E.U.T. Equipment Under Test LISN Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.3 for details						
Test environment:	Temp.:	23.6 °C	Humid.:	46%	Press.:	1023mbar	
Test voltage:	AC 120V, 60Hz						
Test results:	PASS						

Measurement data


Pre-scan all test modes, found worst case at 802.11b 2412MHz, and so only show the test result of it.

Line:

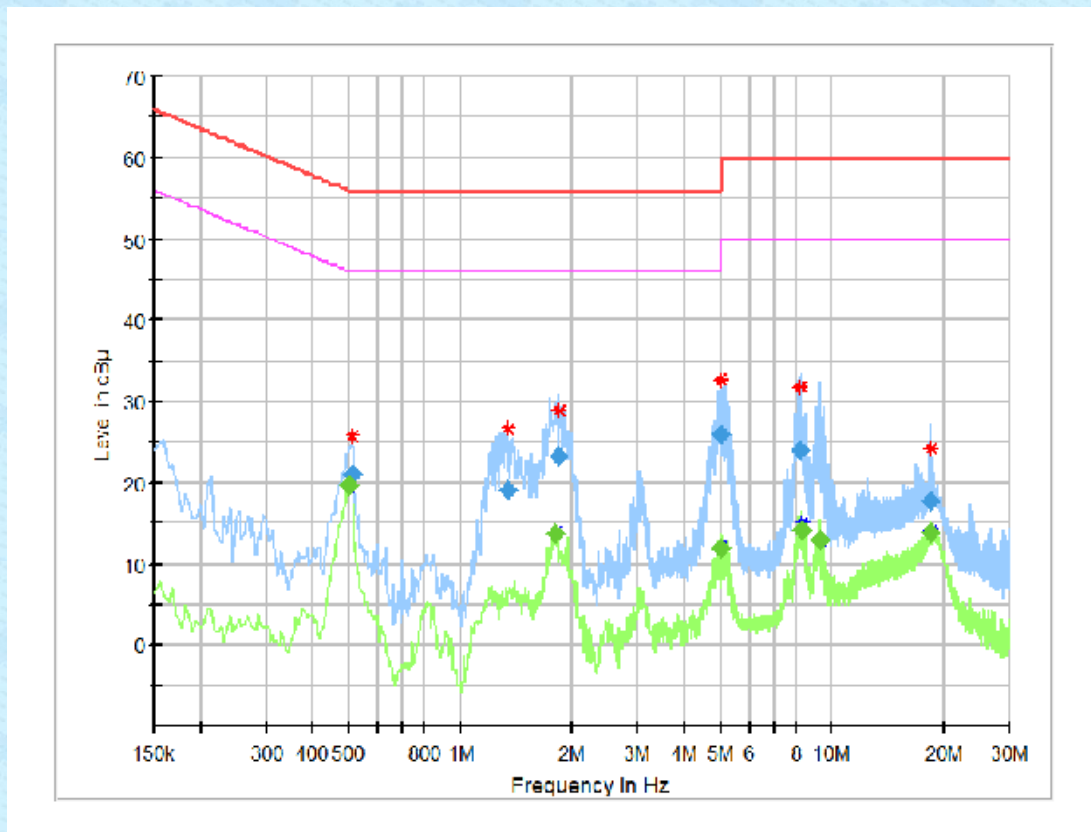


Frequency (MHz)	QuasiPeak (dBμ V)	Average (dBμ V)	Limit (dBμ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.501000	---	19.63	46.00	26.37	100.0	9.000	L1	ON	9.6
0.510000	21.15	---	56.00	34.85	100.0	9.000	L1	ON	9.6
1.347000	19.02	---	56.00	36.98	100.0	9.000	L1	ON	9.6
1.806000	---	13.78	46.00	32.22	100.0	9.000	L1	ON	9.6
1.837500	23.32	---	56.00	32.68	100.0	9.000	L1	ON	9.6
5.005500	---	11.96	50.00	38.04	100.0	9.000	L1	ON	9.7
5.037000	26.05	---	60.00	33.95	100.0	9.000	L1	ON	9.7
8.214000	24.04	---	60.00	35.96	100.0	9.000	L1	ON	9.7
8.326500	---	14.24	50.00	35.76	100.0	9.000	L1	ON	9.7
9.280500	---	12.97	50.00	37.03	100.0	9.000	L1	ON	9.7
18.550500	17.75	---	60.00	42.25	100.0	9.000	L1	ON	9.7
18.559500	---	13.96	50.00	36.04	100.0	9.000	L1	ON	9.7

Neutral:

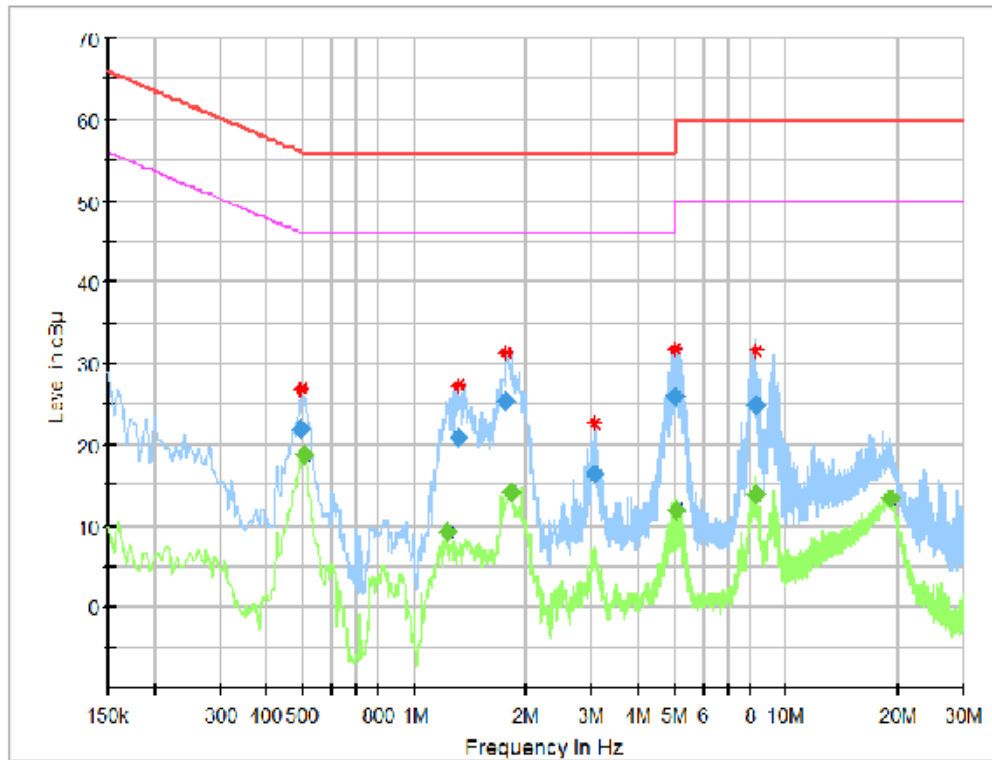


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.496500	21.96	---	56.06	34.10	100.0	9.000	N	ON	9.6
0.505500	---	18.81	46.00	27.19	100.0	9.000	N	ON	9.6
1.230000	---	9.33	46.00	36.67	100.0	9.000	N	ON	9.6
1.315500	20.90	---	56.00	35.10	100.0	9.000	N	ON	9.6
1.770000	25.23	---	56.00	30.77	100.0	9.000	N	ON	9.6
1.828500	---	14.21	46.00	31.79	100.0	9.000	N	ON	9.6
3.052500	16.30	---	56.00	39.70	100.0	9.000	N	ON	9.6
5.014500	25.89	---	60.00	34.11	100.0	9.000	N	ON	9.7
5.086500	---	12.01	50.00	37.99	100.0	9.000	N	ON	9.7
8.317500	---	13.82	50.00	36.18	100.0	9.000	N	ON	9.7
8.317500	24.80	---	60.00	35.20	100.0	9.000	N	ON	9.7
19.216500	---	13.49	50.00	36.51	100.0	9.000	N	ON	9.8

7.3 Conducted Output Power

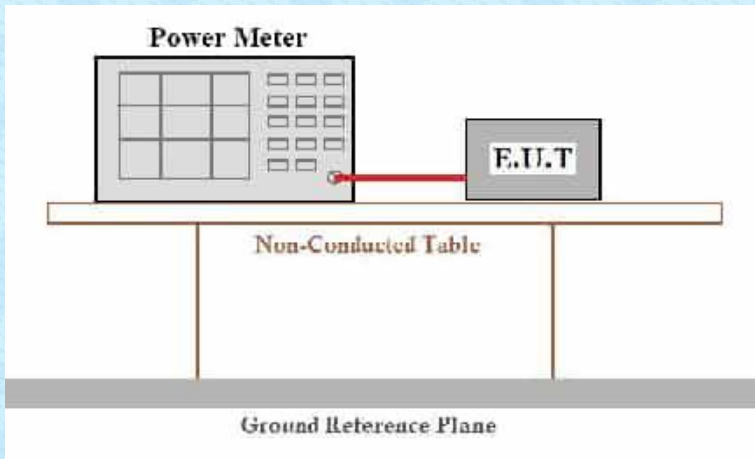Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10-2020 Section 11.9.2.2.4
Limit:	30dBm The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Test setup:	 The diagram illustrates the test setup. A 'Power Meter' is connected to an 'E.U.T.' (Equipment Under Test) via a red cable. Both the Power Meter and the E.U.T. are placed on a 'Non-Conducted Table'. The table is supported by two vertical legs and sits on a 'Ground Reference Plane'.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for WIFI 2.4G.

7.4 Channel Bandwidth

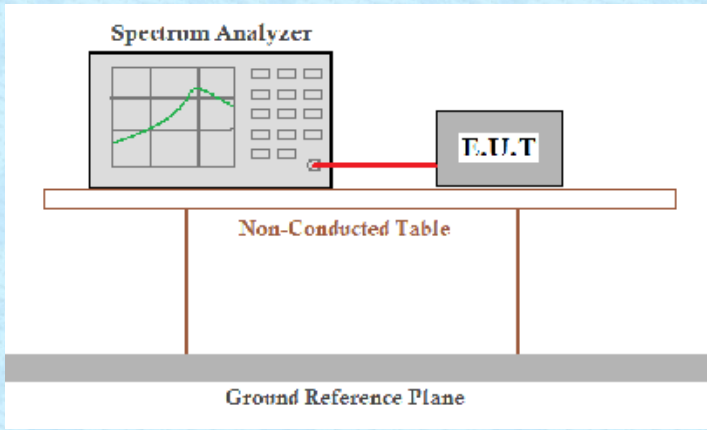Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10-2020 Section 11.8.1 and 6.9.3
Limit:	>500kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to a Device Under Test (D.U.T.) via a red cable. Both the Spectrum Analyzer and the D.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 2.4G.


7.5 Power Spectral Density

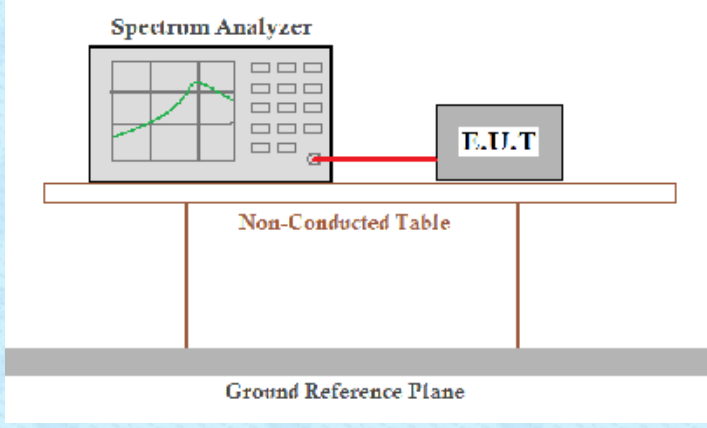Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10-2020 Section 11.10.5
Limit:	8dBm/3kHz
Test setup:	 The diagram illustrates the test setup. A 'Spectrum Analyzer' is connected to a 'D.U.T.' (Device Under Test) via a red cable. Both instruments are positioned on a 'Non-Conducted Table'. This table is supported by a 'Ground Reference Plane'.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 2.4G.


7.6 Spurious Emission in Non-restricted & restricted Bands


7.6.1 Conducted Emission Method

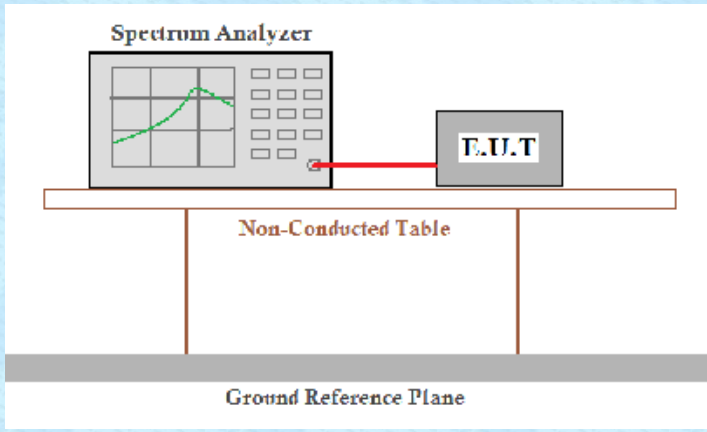Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10-2020 Section 11.11 and 11.12
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A 'Spectrum Analyzer' is connected to a 'D.U.T.' (Device Under Test) by a red cable. Both components are positioned on a 'Non-Conducted Table'. This table is supported by a 'Ground Reference Plane'.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for WIFI 2.4G.

7.6.2 Radiated Emission Method

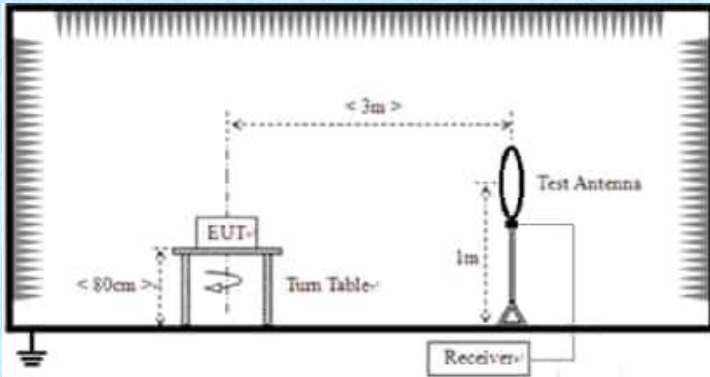Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
	Note: For Duty cycle ≥ 98%, average detector set as above For Duty cycle < 98%, average detector set as below: VBW ≥ 1 / T				
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(kHz)	PK/QP/A V	300m	
	0.490MHz-1.705MHz	24000/F(kHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
For radiated emissions from 30MHz to1GHz					

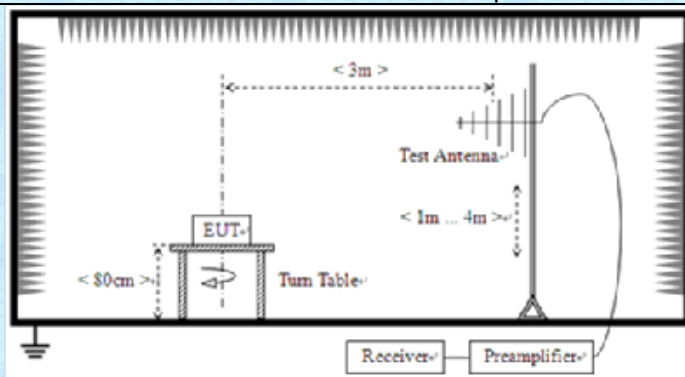

For radiated emissions above 1GHz

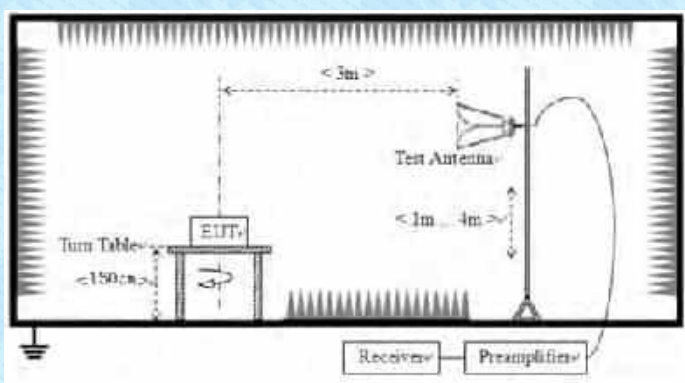

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:

Refer to section 6.0 for details

Test mode:

Refer to section 5.3 for details

Test environment:

Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
--------	-------	---------	-----	---------	----------

Test voltage:	DC 12V
Test results:	Pass

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement data:

■ **9kHz~30MHz, 18-25GHz**


The emission from 9 kHz to 30MHz, 18-25GHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

Below 1GHz

Pre-scan all test modes, found worst case at 802.11b 2412MHz, and so only show the test result of it.

30MHz – 1GHz Test Data

EUT:	Taurus-MediaPlayer	Polarity:	Horizontal
Model:	TB40	Test Date:	2026-05-09
Mode:	Transmit by 802.11b at Channel 2412MHz	Voltage:	DC 12V from adapter
Environment:	Temp: 24.5°C; Humi:38%	Engineer:	Jawb Cai

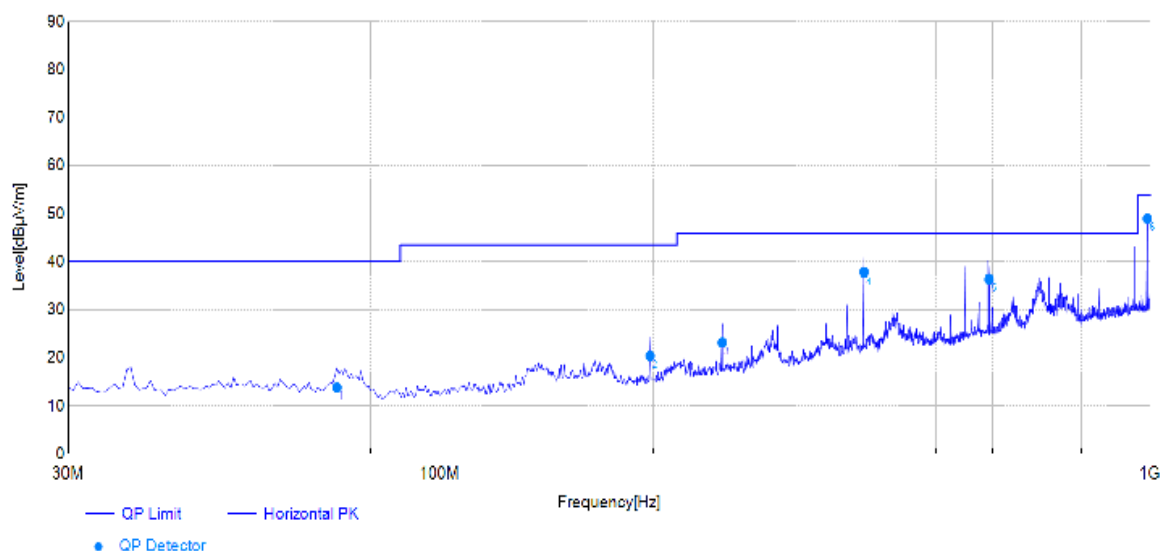

Final Data List										
NO.	Frequency [MHz]	Factor [dB/m]	QP Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pol	Verdict
1	71.73	12.57	1.34	13.91	40.00	26.09	200	360	Horizontal	PASS
2	197.89	14.27	6.12	20.39	43.50	23.11	100	351	Horizontal	PASS
3	249.81	15.89	7.27	23.16	46.00	22.84	200	221	Horizontal	PASS
4	395.87	19.09	18.71	37.80	46.00	8.20	100	360	Horizontal	PASS
5	593.85	23.21	13.19	36.40	46.00	9.60	200	327	Horizontal	PASS
6	990.30	28.23	20.78	49.01	54.00	4.99	100	11	Horizontal	PASS


Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

(3) The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	Taurus-MediaPlayer	Polarity:	Vertical
Model:	TB40	Test Date:	2026-05-09
Mode:	Transmit by 802.11b at Channel 2412MHz	Voltage:	DC 12V from adapter
Environment:	Temp: 24.5°C; Humi:38%	Engineer:	Jawb Cai

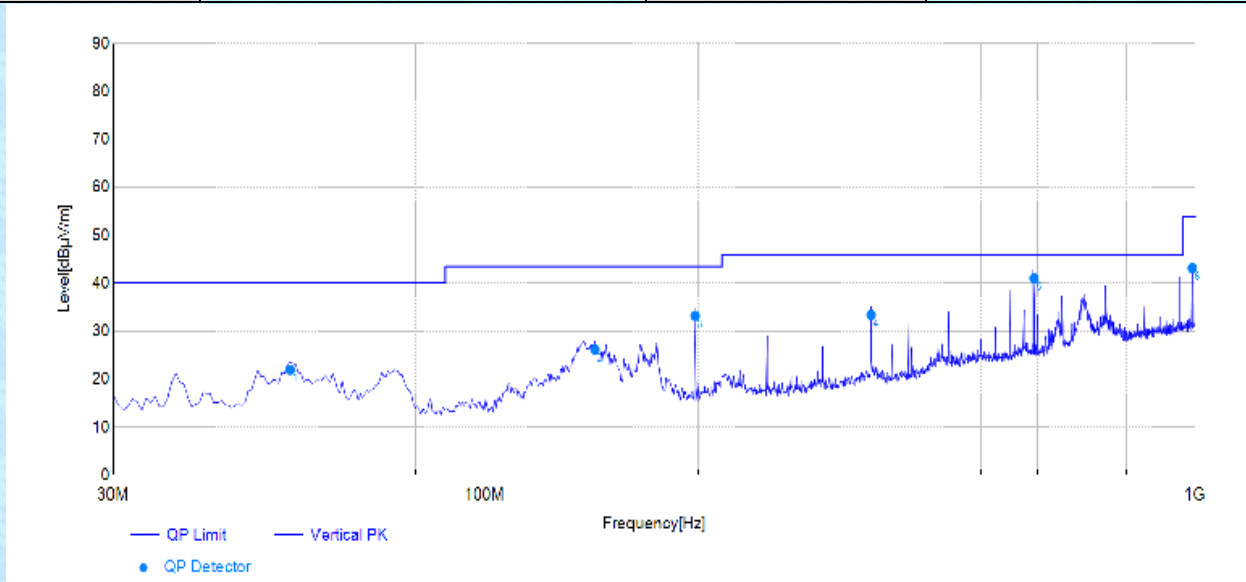

Final Data List										
NO.	Frequency [MHz]	Factor [dB/m]	QP Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pol	Verdict
1	53.29	13.15	8.77	21.92	40.00	18.08	100	360	Vertical	PASS
2	143.06	16.64	9.59	26.23	43.50	17.27	100	47	Vertical	PASS
3	197.89	15.32	17.97	33.29	43.50	10.21	100	224	Vertical	PASS
4	349.77	17.94	15.53	33.47	46.00	12.53	200	272	Vertical	PASS
5	593.85	23.27	17.72	40.99	46.00	5.01	100	187	Vertical	PASS
6	990.30	29.05	14.08	43.13	54.00	10.87	200	207	Vertical	PASS

Note:


(1) Level=Reading + Factor

(2) Margin=Limit-Level

(3) The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

1GHz-6GHz


Test Mode:	802.11b	Test Date:	2026-05-09
Test Channel:	01	Test Engineer:	Jawb Cai

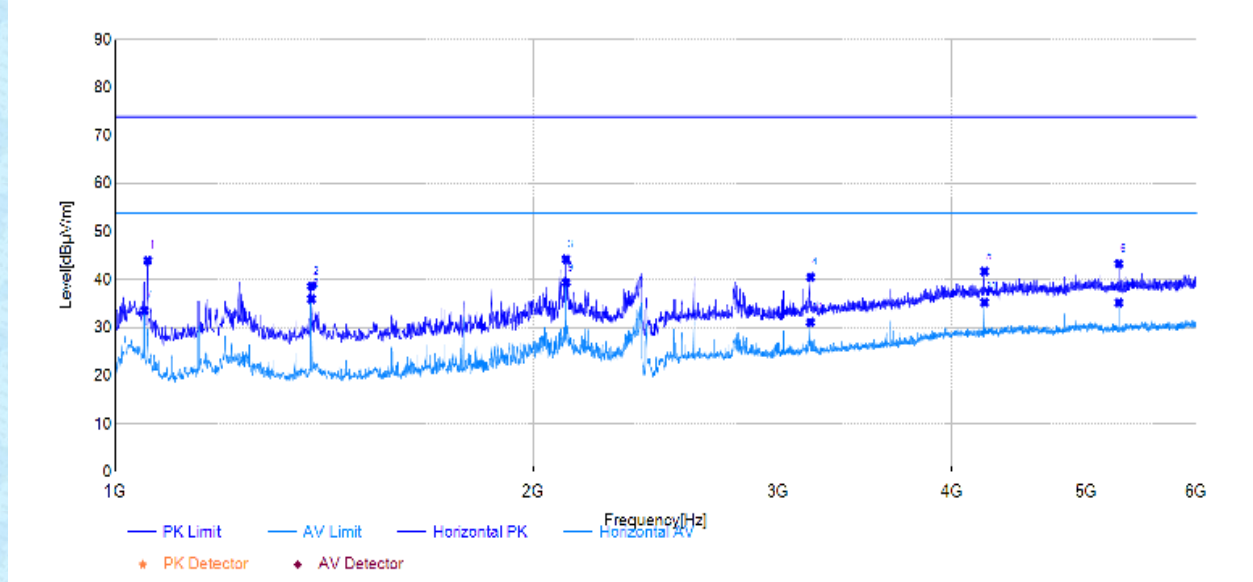

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1055.83	68.09	43.99	-24.10	74.00	30.01	150	155	PK	Horizontal	PASS
2	1385.83	60.83	38.60	-22.23	74.00	35.40	150	162	PK	Horizontal	PASS
3	2111.67	61.74	44.23	-17.51	74.00	29.77	150	59	PK	Horizontal	PASS
4	3168.33	54.21	40.49	-13.72	74.00	33.51	150	237	PK	Horizontal	PASS
5	4224.17	49.69	41.70	-7.99	74.00	32.30	150	196	PK	Horizontal	PASS
6	5280.00	49.40	43.30	-6.10	74.00	30.70	150	127	PK	Horizontal	PASS
7	1050.00	57.80	33.67	-24.13	54.00	20.33	150	359	AV	Horizontal	PASS
8	1385.83	58.31	36.08	-22.23	54.00	17.92	150	162	AV	Horizontal	PASS
9	2111.67	56.88	39.37	-17.51	54.00	14.63	150	0	AV	Horizontal	PASS
10	3167.50	44.91	31.19	-13.72	54.00	22.81	150	293	AV	Horizontal	PASS
11	4224.17	43.37	35.38	-7.99	54.00	18.62	150	196	AV	Horizontal	PASS
12	5280.00	41.41	35.31	-6.10	54.00	18.69	150	25	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor


(2) Margin=Limit-Level

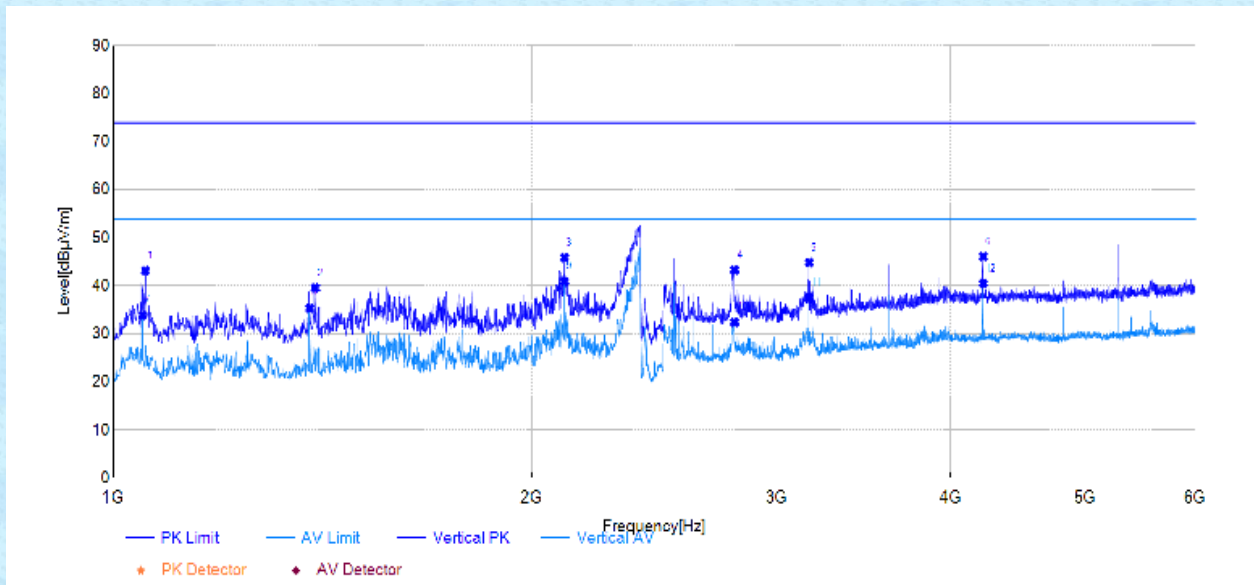

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1055.00	66.33	43.11	-23.22	74.00	30.89	150	330	PK	Vertical	PASS
2	1398.33	60.83	39.51	-21.32	74.00	34.49	150	86	PK	Vertical	PASS
3	2111.67	63.44	45.87	-17.57	74.00	28.13	150	93	PK	Vertical	PASS
4	2799.17	58.34	43.27	-15.07	74.00	30.73	150	86	PK	Vertical	PASS
5	3168.33	58.05	44.83	-13.22	74.00	29.17	150	114	PK	Vertical	PASS
6	4224.17	54.05	46.09	-7.96	74.00	27.91	150	310	PK	Vertical	PASS
7	1050.00	57.17	33.93	-23.24	54.00	20.07	150	229	AV	Vertical	PASS
8	1385.83	56.81	35.40	-21.41	54.00	18.60	150	180	AV	Vertical	PASS
9	2111.67	58.43	40.86	-17.57	54.00	13.14	150	153	AV	Vertical	PASS
10	2799.17	47.55	32.48	-15.07	54.00	21.52	150	86	AV	Vertical	PASS
11	3167.50	50.68	37.46	-13.22	54.00	16.54	150	114	AV	Vertical	PASS
12	4224.17	48.40	40.44	-7.96	54.00	13.56	150	310	AV	Vertical	PASS

Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level


Test Mode:	802.11b	Test Date:	2026-05-09
Test Channel:	06	Test Engineer:	Jawb Cai

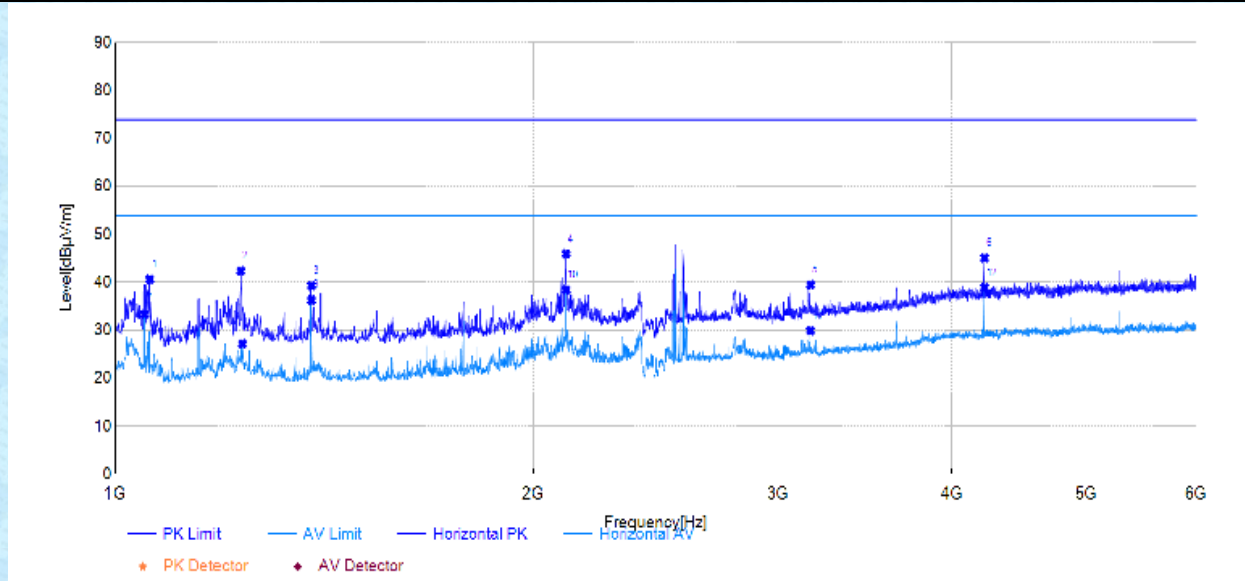

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1059.17	64.64	40.56	-24.08	74.00	33.44	150	322	PK	Horizontal	PASS
2	1231.67	65.61	42.33	-23.28	74.00	31.67	150	169	PK	Horizontal	PASS
3	1385.83	61.48	39.25	-22.23	74.00	34.75	150	162	PK	Horizontal	PASS
4	2111.67	63.44	45.93	-17.51	74.00	28.07	150	241	PK	Horizontal	PASS
5	3168.33	53.12	39.40	-13.72	74.00	34.60	150	169	PK	Horizontal	PASS
6	4224.17	53.05	45.06	-7.99	74.00	28.94	150	360	PK	Horizontal	PASS
7	1050.00	57.51	33.38	-24.13	54.00	20.62	150	359	AV	Horizontal	PASS
8	1235.00	50.45	27.18	-23.27	54.00	26.82	150	201	AV	Horizontal	PASS
9	1385.83	58.55	36.32	-22.23	54.00	17.68	150	162	AV	Horizontal	PASS
10	2111.67	55.86	38.35	-17.51	54.00	15.65	150	360	AV	Horizontal	PASS
11	3167.50	43.68	29.96	-13.72	54.00	24.04	150	228	AV	Horizontal	PASS
12	4224.17	46.81	38.82	-7.99	54.00	15.18	150	360	AV	Horizontal	PASS

Note: (1) Level=Reading+Factor


(2) Margin=Limit-Level

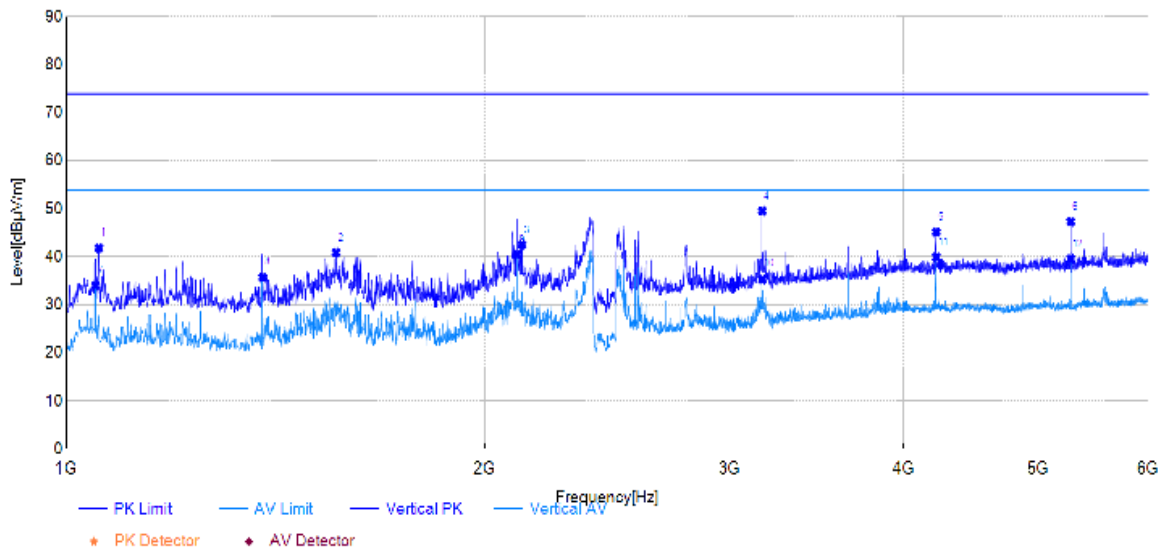

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1055.83	64.97	41.76	-23.21	74.00	32.24	150	5	PK	Vertical	PASS
2	1564.17	61.36	40.83	-20.53	74.00	33.17	150	107	PK	Vertical	PASS
3	2127.50	59.98	42.47	-17.51	74.00	31.53	150	107	PK	Vertical	PASS
4	3168.33	62.78	49.56	-13.22	74.00	24.44	150	194	PK	Vertical	PASS
5	4224.17	53.10	45.14	-7.96	74.00	28.86	150	303	PK	Vertical	PASS
6	5280.00	53.78	47.31	-6.47	74.00	26.69	150	119	PK	Vertical	PASS
7	1050.00	57.30	34.06	-23.24	54.00	19.94	150	228	AV	Vertical	PASS
8	1385.83	57.20	35.79	-21.41	54.00	18.21	150	58	AV	Vertical	PASS
9	2111.67	57.97	40.40	-17.57	54.00	13.60	150	92	AV	Vertical	PASS
10	3168.33	48.60	35.38	-13.22	54.00	18.62	150	215	AV	Vertical	PASS
11	4224.17	47.81	39.85	-7.96	54.00	14.15	150	168	AV	Vertical	PASS
12	5280.00	45.99	39.52	-6.47	54.00	14.48	150	31	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11b	Test Date:	2026-05-09
Test Channel:	11	Test Engineer:	Jawb Cai

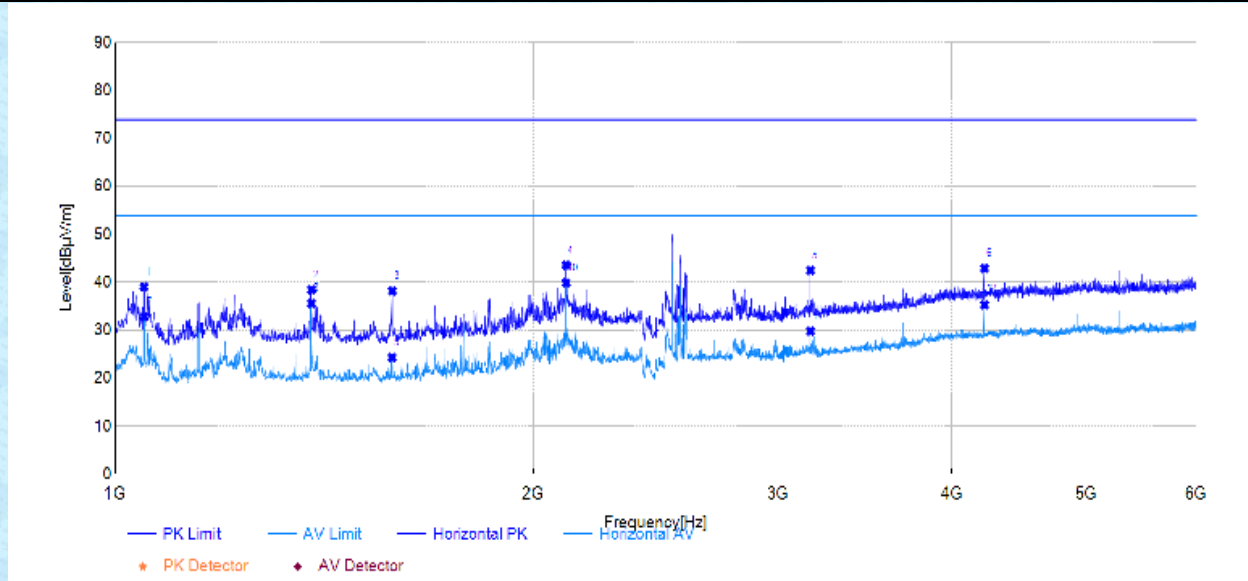

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1049.17	63.12	38.99	-24.13	74.00	35.01	150	360	PK	Horizontal	PASS
2	1385.83	60.61	38.38	-22.23	74.00	35.62	150	132	PK	Horizontal	PASS
3	1584.17	59.21	38.13	-21.08	74.00	35.87	150	99	PK	Horizontal	PASS
4	2111.67	61.07	43.56	-17.51	74.00	30.44	150	267	PK	Horizontal	PASS
5	3167.50	56.16	42.44	-13.72	74.00	31.56	150	99	PK	Horizontal	PASS
6	4224.17	50.88	42.89	-7.99	74.00	31.11	150	193	PK	Horizontal	PASS
7	1050.00	57.01	32.88	-24.13	54.00	21.12	150	358	AV	Horizontal	PASS
8	1385.83	57.90	35.67	-22.23	54.00	18.33	150	132	AV	Horizontal	PASS
9	1583.33	45.38	24.30	-21.08	54.00	29.70	150	233	AV	Horizontal	PASS
10	2111.67	57.33	39.82	-17.51	54.00	14.18	150	78	AV	Horizontal	PASS
11	3167.50	43.57	29.85	-13.72	54.00	24.15	150	173	AV	Horizontal	PASS
12	4224.17	43.37	35.38	-7.99	54.00	18.62	150	359	AV	Horizontal	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

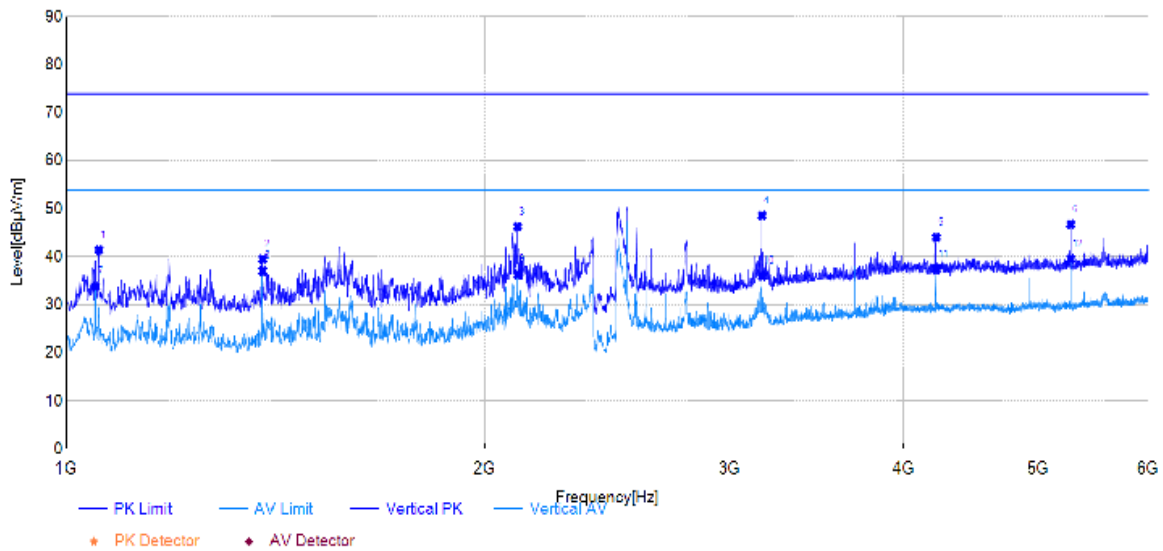

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1055.83	64.58	41.37	-23.21	74.00	32.63	150	76	PK	Vertical	PASS
2	1385.83	60.88	39.47	-21.41	74.00	34.53	150	209	PK	Vertical	PASS
3	2111.67	63.84	46.27	-17.57	74.00	27.73	150	142	PK	Vertical	PASS
4	3167.50	61.81	48.59	-13.22	74.00	25.41	150	228	PK	Vertical	PASS
5	4224.17	51.99	44.03	-7.96	74.00	29.97	150	175	PK	Vertical	PASS
6	5280.00	53.20	46.73	-6.47	74.00	27.27	150	29	PK	Vertical	PASS
7	1050.00	57.09	33.85	-23.24	54.00	20.15	150	228	AV	Vertical	PASS
8	1385.83	58.44	37.03	-21.41	54.00	16.97	150	209	AV	Vertical	PASS
9	2111.67	53.92	36.35	-17.57	54.00	17.65	150	303	AV	Vertical	PASS
10	3168.33	49.27	36.05	-13.22	54.00	17.95	150	290	AV	Vertical	PASS
11	4224.17	45.31	37.35	-7.96	54.00	16.65	150	175	AV	Vertical	PASS
12	5280.00	45.98	39.51	-6.47	54.00	14.49	150	123	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11g	Test Date:	2026-05-09
Test Channel:	01	Test Engineer:	Jawb Cai

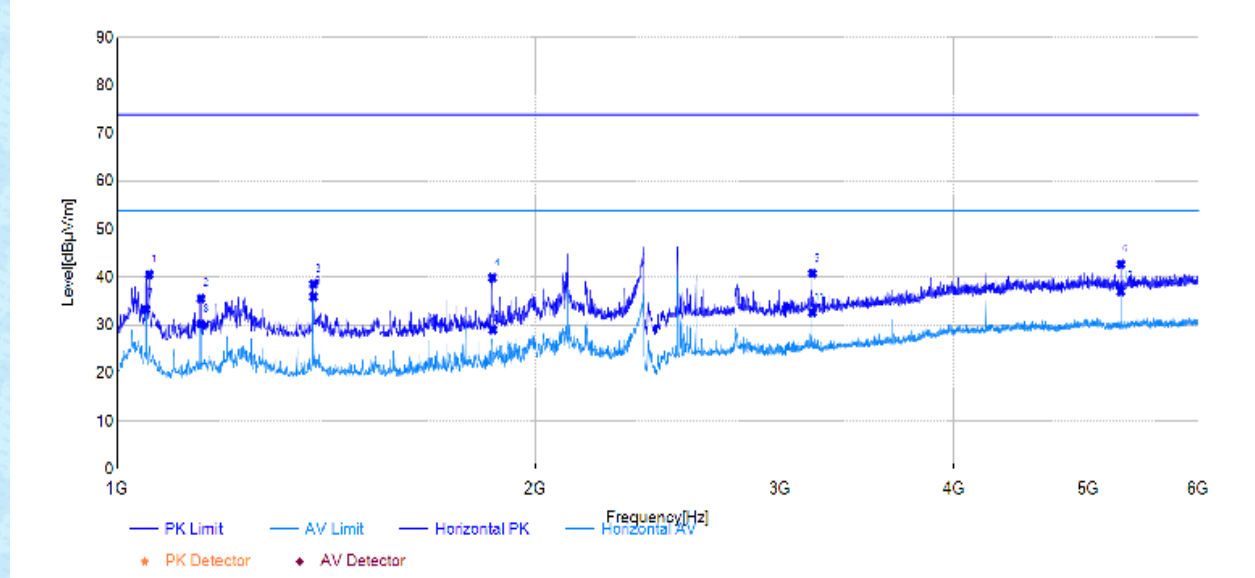

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1055.00	64.62	40.52	-24.10	74.00	33.48	150	103	PK	Horizontal	PASS
2	1150.00	59.33	35.64	-23.69	74.00	38.36	150	16	PK	Horizontal	PASS
3	1385.83	60.74	38.51	-22.23	74.00	35.49	150	137	PK	Horizontal	PASS
4	1863.33	58.90	39.87	-19.03	74.00	34.13	150	117	PK	Horizontal	PASS
5	3167.50	54.49	40.77	-13.72	74.00	33.23	150	225	PK	Horizontal	PASS
6	5280.00	48.78	42.68	-6.10	74.00	31.32	150	28	PK	Horizontal	PASS
7	1049.17	57.53	33.40	-24.13	54.00	20.60	150	360	AV	Horizontal	PASS
8	1150.00	53.99	30.30	-23.69	54.00	23.70	150	16	AV	Horizontal	PASS
9	1385.83	58.28	36.05	-22.23	54.00	17.95	150	137	AV	Horizontal	PASS
10	1865.00	48.11	29.09	-19.02	54.00	24.91	150	110	AV	Horizontal	PASS
11	3167.50	46.43	32.71	-13.72	54.00	21.29	150	225	AV	Horizontal	PASS
12	5280.00	43.21	37.11	-6.10	54.00	16.89	150	28	AV	Horizontal	PASS


Note:(1) Level=Reading+Factor
(2) Margin=Limit-Level

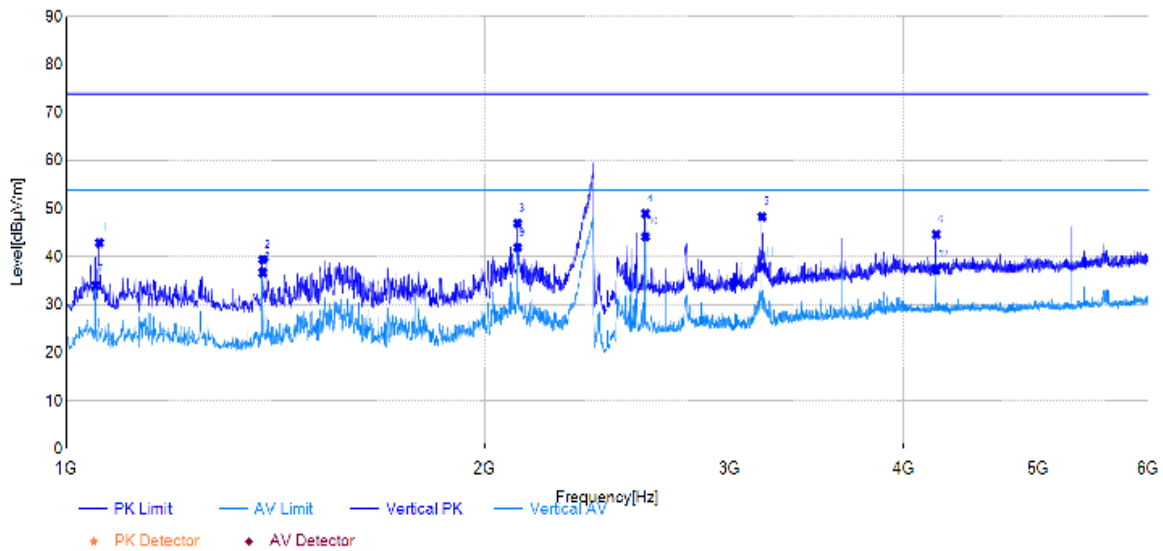

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1056.67	66.09	42.88	-23.21	74.00	31.12	150	33	PK	Vertical	PASS
2	1385.83	60.77	39.36	-21.41	74.00	34.64	150	80	PK	Vertical	PASS
3	2111.67	64.55	46.98	-17.57	74.00	27.02	150	141	PK	Vertical	PASS
4	2610.83	64.62	49.03	-15.59	74.00	24.97	150	6	PK	Vertical	PASS
5	3167.50	61.58	48.36	-13.22	74.00	25.64	150	128	PK	Vertical	PASS
6	4224.17	52.60	44.64	-7.96	74.00	29.36	150	162	PK	Vertical	PASS
7	1050.00	57.33	34.09	-23.24	54.00	19.91	150	87	AV	Vertical	PASS
8	1385.83	58.17	36.76	-21.41	54.00	17.24	150	80	AV	Vertical	PASS
9	2111.67	59.46	41.89	-17.57	54.00	12.11	150	141	AV	Vertical	PASS
10	2610.83	59.75	44.16	-15.59	54.00	9.84	150	6	AV	Vertical	PASS
11	3167.50	51.09	37.87	-13.22	54.00	16.13	150	128	AV	Vertical	PASS
12	4224.17	45.23	37.27	-7.96	54.00	16.73	150	26	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11g	Test Date:	2026-05-09
Test Channel:	06	Test Engineer:	Jawb Cai

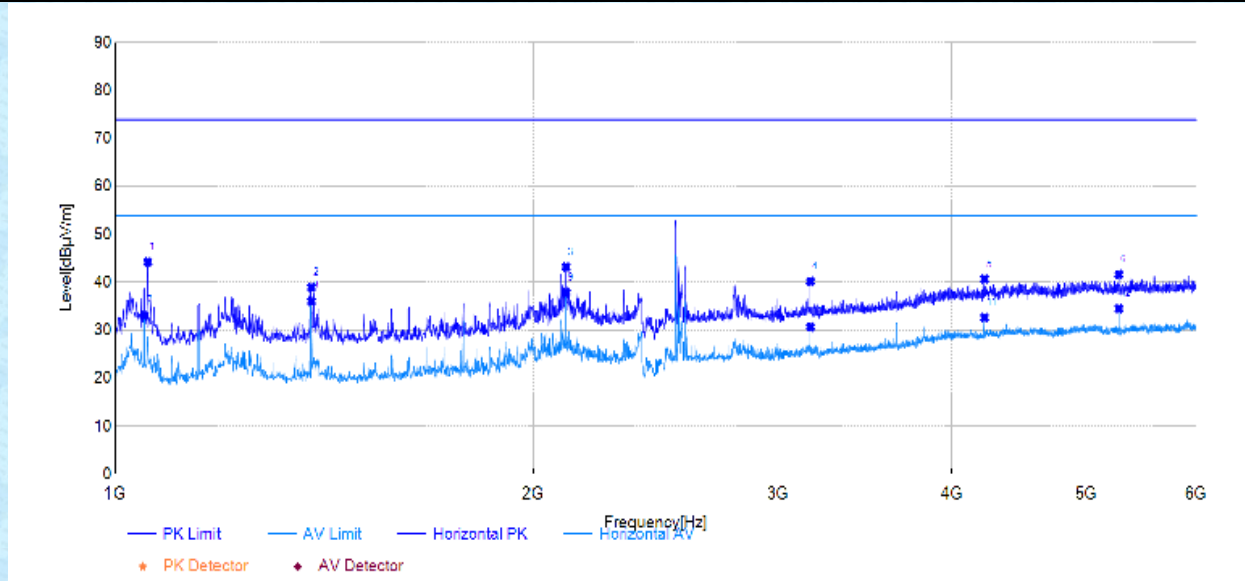

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1055.83	68.32	44.22	-24.10	74.00	29.78	150	166	PK	Horizontal	PASS
2	1385.83	61.11	38.88	-22.23	74.00	35.12	150	160	PK	Horizontal	PASS
3	2111.67	60.69	43.18	-17.51	74.00	30.82	150	261	PK	Horizontal	PASS
4	3167.50	53.84	40.12	-13.72	74.00	33.88	150	234	PK	Horizontal	PASS
5	4224.17	48.62	40.63	-7.99	74.00	33.37	150	241	PK	Horizontal	PASS
6	5280.00	47.68	41.58	-6.10	74.00	32.42	150	328	PK	Horizontal	PASS
7	1050.00	57.24	33.11	-24.13	54.00	20.89	150	358	AV	Horizontal	PASS
8	1385.83	58.36	36.13	-22.23	54.00	17.87	150	160	AV	Horizontal	PASS
9	2111.67	55.30	37.79	-17.51	54.00	16.21	150	261	AV	Horizontal	PASS
10	3167.50	44.45	30.73	-13.72	54.00	23.27	150	308	AV	Horizontal	PASS
11	4224.17	40.69	32.70	-7.99	54.00	21.30	150	241	AV	Horizontal	PASS
12	5280.00	40.70	34.60	-6.10	54.00	19.40	150	30	AV	Horizontal	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

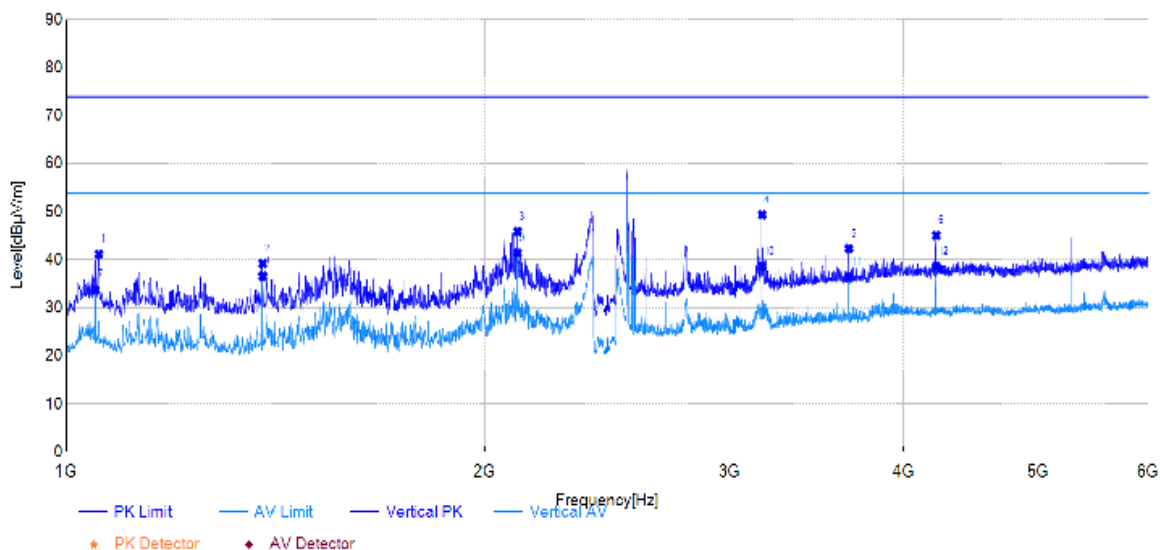

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1055.83	64.33	41.12	-23.21	74.00	32.88	150	134	PK	Vertical	PASS
2	1385.83	60.57	39.16	-21.41	74.00	34.84	150	208	PK	Vertical	PASS
3	2111.67	63.47	45.90	-17.57	74.00	28.10	150	168	PK	Vertical	PASS
4	3168.33	62.63	49.41	-13.22	74.00	24.59	150	146	PK	Vertical	PASS
5	3655.83	52.79	42.29	-10.50	74.00	31.71	150	99	PK	Vertical	PASS
6	4224.17	53.02	45.06	-7.96	74.00	28.94	150	168	PK	Vertical	PASS
7	1050.00	57.04	33.80	-23.24	54.00	20.20	150	229	AV	Vertical	PASS
8	1385.83	57.98	36.57	-21.41	54.00	17.43	150	215	AV	Vertical	PASS
9	2111.67	58.93	41.36	-17.57	54.00	12.64	150	310	AV	Vertical	PASS
10	3168.33	51.81	38.59	-13.22	54.00	15.41	150	146	AV	Vertical	PASS
11	3655.83	46.93	36.43	-10.50	54.00	17.57	150	92	AV	Vertical	PASS
12	4224.17	46.60	38.64	-7.96	54.00	15.36	150	303	AV	Vertical	PASS


Note:(1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11g	Test Date:	2026-05-09
Test Channel:	11	Test Engineer:	Jawb Cai

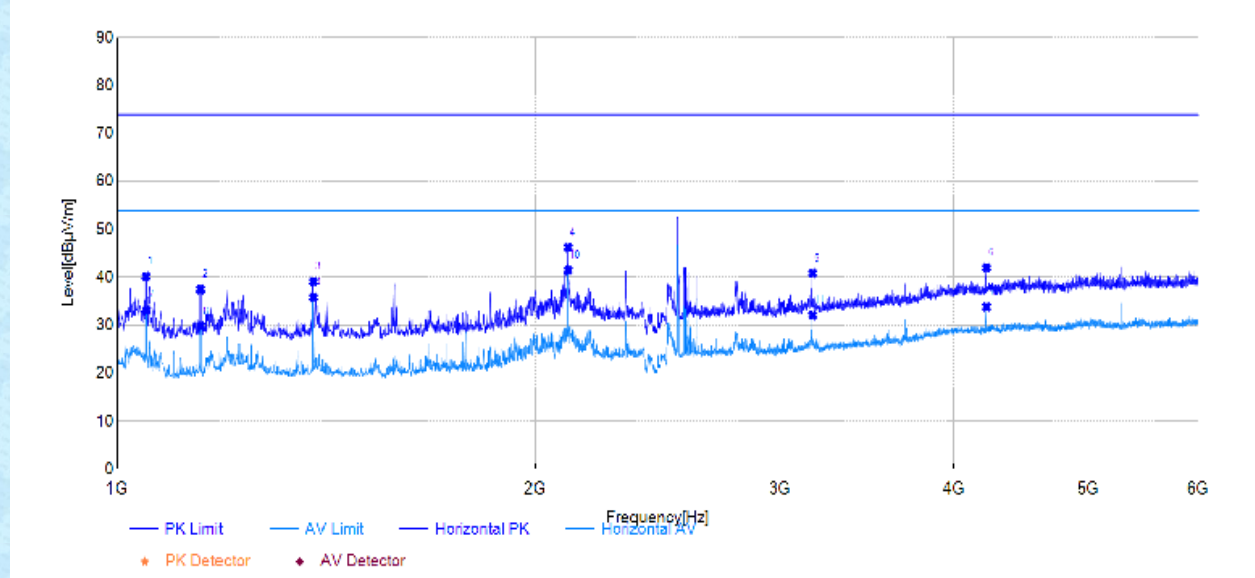

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1049.17	64.25	40.12	-24.13	74.00	33.88	150	0	PK	Horizontal	PASS
2	1149.17	61.17	37.49	-23.68	74.00	36.51	150	0	PK	Horizontal	PASS
3	1385.83	61.26	39.03	-22.23	74.00	34.97	150	158	PK	Horizontal	PASS
4	2111.67	63.76	46.25	-17.51	74.00	27.75	150	275	PK	Horizontal	PASS
5	3168.33	54.53	40.81	-13.72	74.00	33.19	150	227	PK	Horizontal	PASS
6	4224.17	49.93	41.94	-7.99	74.00	32.06	150	352	PK	Horizontal	PASS
7	1050.00	57.31	33.18	-24.13	54.00	20.82	150	360	AV	Horizontal	PASS
8	1150.00	53.57	29.88	-23.69	54.00	24.12	150	16	AV	Horizontal	PASS
9	1385.83	58.13	35.90	-22.23	54.00	18.10	150	158	AV	Horizontal	PASS
10	2111.67	58.93	41.42	-17.51	54.00	12.58	150	234	AV	Horizontal	PASS
11	3168.33	45.87	32.15	-13.72	54.00	21.85	150	221	AV	Horizontal	PASS
12	4224.17	41.89	33.90	-7.99	54.00	20.10	150	234	AV	Horizontal	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

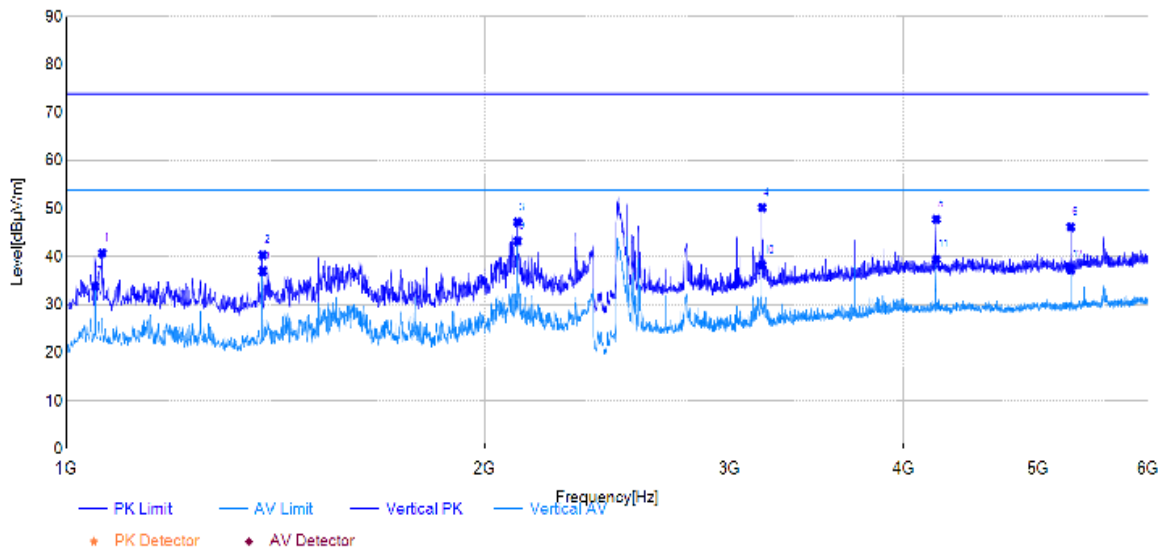

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1061.67	63.87	40.69	-23.18	74.00	33.31	150	2	PK	Vertical	PASS
2	1385.83	61.72	40.31	-21.41	74.00	33.69	150	207	PK	Vertical	PASS
3	2111.67	64.80	47.23	-17.57	74.00	26.77	150	134	PK	Vertical	PASS
4	3168.33	63.49	50.27	-13.22	74.00	23.73	150	202	PK	Vertical	PASS
5	4224.17	55.76	47.80	-7.96	74.00	26.20	150	153	PK	Vertical	PASS
6	5280.00	52.66	46.19	-6.47	74.00	27.81	150	119	PK	Vertical	PASS
7	1049.17	57.12	33.88	-23.24	54.00	20.12	150	228	AV	Vertical	PASS
8	1385.83	58.39	36.98	-21.41	54.00	17.02	150	207	AV	Vertical	PASS
9	2111.67	60.79	43.22	-17.57	54.00	10.78	150	134	AV	Vertical	PASS
10	3168.33	51.39	38.17	-13.22	54.00	15.83	150	207	AV	Vertical	PASS
11	4224.17	47.36	39.40	-7.96	54.00	14.60	150	160	AV	Vertical	PASS
12	5280.00	43.79	37.32	-6.47	54.00	16.68	150	126	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11n-HT20	Test Date:	2026-05-09
Test Channel:	01	Test Engineer:	Jawb Cai

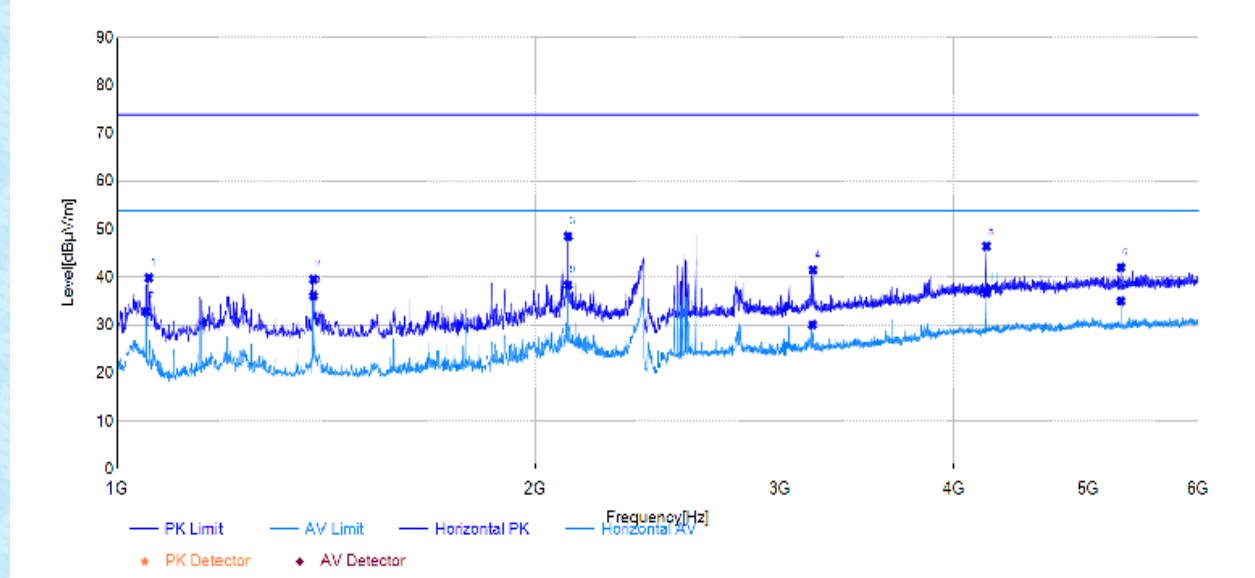

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1054.17	63.96	39.85	-24.11	74.00	34.15	150	360	PK	Horizontal	PASS
2	1385.83	61.77	39.54	-22.23	74.00	34.46	150	166	PK	Horizontal	PASS
3	2111.67	66.08	48.57	-17.51	74.00	25.43	150	360	PK	Horizontal	PASS
4	3170.00	55.19	41.48	-13.71	74.00	32.52	150	239	PK	Horizontal	PASS
5	4224.17	54.47	46.48	-7.99	74.00	27.52	150	360	PK	Horizontal	PASS
6	5280.00	48.11	42.01	-6.10	74.00	31.99	150	23	PK	Horizontal	PASS
7	1050.00	57.03	32.90	-24.13	54.00	21.10	150	359	AV	Horizontal	PASS
8	1385.83	58.42	36.19	-22.23	54.00	17.81	150	158	AV	Horizontal	PASS
9	2111.67	55.84	38.33	-17.51	54.00	15.67	150	232	AV	Horizontal	PASS
10	3167.50	43.86	30.14	-13.72	54.00	23.86	150	300	AV	Horizontal	PASS
11	4224.17	44.77	36.78	-7.99	54.00	17.22	150	360	AV	Horizontal	PASS
12	5280.00	41.24	35.14	-6.10	54.00	18.86	150	23	AV	Horizontal	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

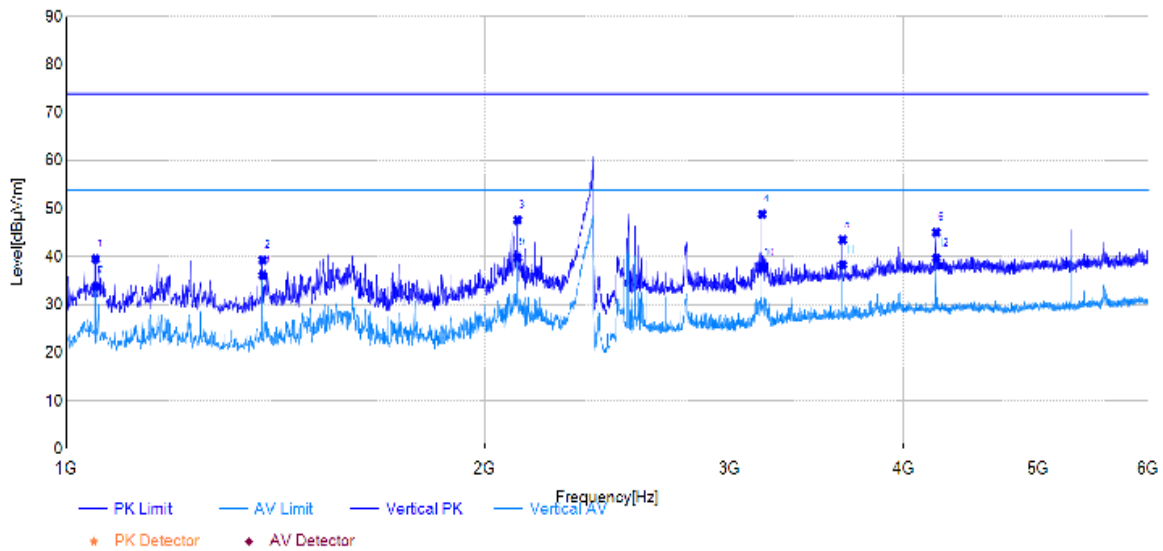

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1050.00	62.74	39.50	-23.24	74.00	34.50	150	126	PK	Vertical	PASS
2	1385.83	60.66	39.25	-21.41	74.00	34.75	150	73	PK	Vertical	PASS
3	2111.67	65.22	47.65	-17.57	74.00	26.35	150	148	PK	Vertical	PASS
4	3168.33	62.10	48.88	-13.22	74.00	25.12	150	160	PK	Vertical	PASS
5	3618.33	54.12	43.52	-10.60	74.00	30.48	150	100	PK	Vertical	PASS
6	4224.17	53.03	45.07	-7.96	74.00	28.93	150	255	PK	Vertical	PASS
7	1050.00	57.10	33.86	-23.24	54.00	20.14	150	228	AV	Vertical	PASS
8	1385.83	57.61	36.20	-21.41	54.00	17.80	150	73	AV	Vertical	PASS
9	2111.67	57.32	39.75	-17.57	54.00	14.25	150	317	AV	Vertical	PASS
10	3167.50	50.94	37.72	-13.22	54.00	16.28	150	160	AV	Vertical	PASS
11	3618.33	48.85	38.25	-10.60	54.00	15.75	150	108	AV	Vertical	PASS
12	4224.17	47.61	39.65	-7.96	54.00	14.35	150	270	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11n-HT20	Test Date:	2026-05-09
Test Channel:	06	Test Engineer:	Jawb Cai

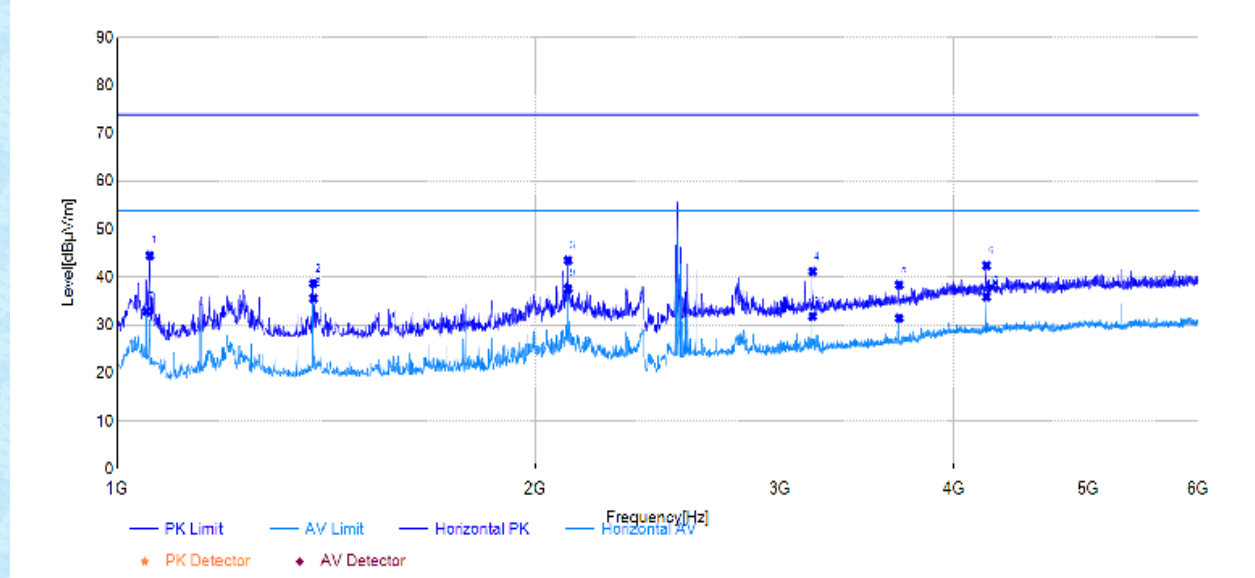

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1055.83	68.62	44.52	-24.10	74.00	29.48	150	72	PK	Horizontal	PASS
2	1385.83	60.87	38.64	-22.23	74.00	35.36	150	166	PK	Horizontal	PASS
3	2111.67	61.01	43.50	-17.51	74.00	30.50	150	253	PK	Horizontal	PASS
4	3168.33	54.89	41.17	-13.72	74.00	32.83	150	64	PK	Horizontal	PASS
5	3655.83	49.66	38.34	-11.32	74.00	35.66	150	246	PK	Horizontal	PASS
6	4224.17	50.40	42.41	-7.99	74.00	31.59	150	358	PK	Horizontal	PASS
7	1050.00	57.10	32.97	-24.13	54.00	21.03	150	360	AV	Horizontal	PASS
8	1385.83	57.92	35.69	-22.23	54.00	18.31	150	132	AV	Horizontal	PASS
9	2111.67	55.09	37.58	-17.51	54.00	16.42	150	91	AV	Horizontal	PASS
10	3168.33	45.64	31.92	-13.72	54.00	22.08	150	146	AV	Horizontal	PASS
11	3655.83	42.85	31.53	-11.32	54.00	22.47	150	253	AV	Horizontal	PASS
12	4224.17	44.00	36.01	-7.99	54.00	17.99	150	360	AV	Horizontal	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

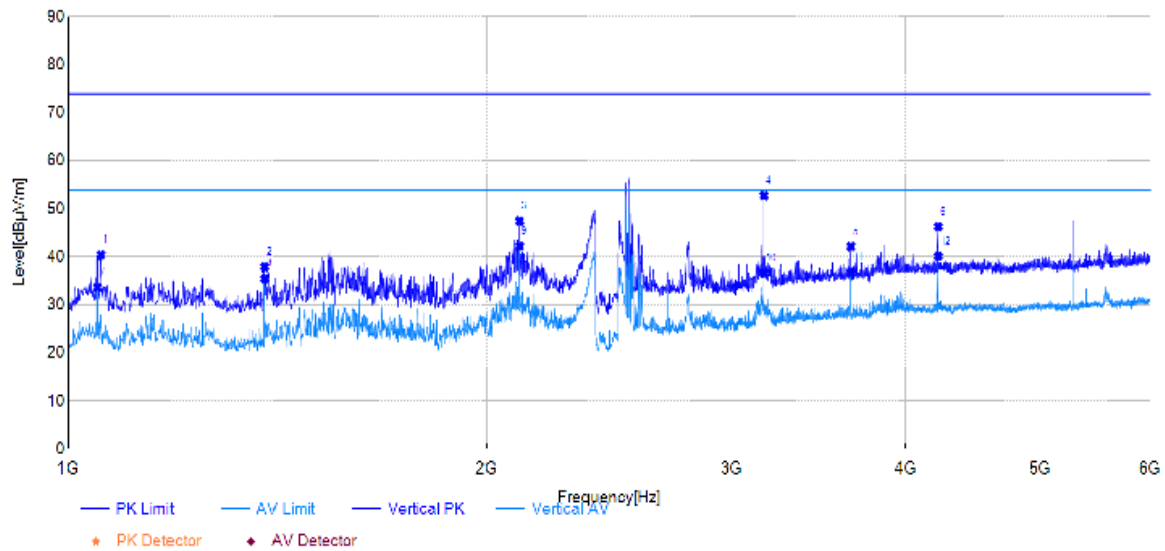

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1055.83	63.54	40.33	-23.21	74.00	33.67	150	357	PK	Vertical	PASS
2	1385.83	59.26	37.85	-21.41	74.00	36.15	150	59	PK	Vertical	PASS
3	2111.67	65.02	47.45	-17.57	74.00	26.55	150	142	PK	Vertical	PASS
4	3167.50	66.00	52.78	-13.22	74.00	21.22	150	162	PK	Vertical	PASS
5	3655.83	52.61	42.11	-10.50	74.00	31.89	150	115	PK	Vertical	PASS
6	4224.17	54.22	46.26	-7.96	74.00	27.74	150	270	PK	Vertical	PASS
7	1050.00	56.92	33.68	-23.24	54.00	20.32	150	229	AV	Vertical	PASS
8	1385.83	56.91	35.50	-21.41	54.00	18.50	150	59	AV	Vertical	PASS
9	2111.67	59.72	42.15	-17.57	54.00	11.85	150	108	AV	Vertical	PASS
10	3167.50	49.82	36.60	-13.22	54.00	17.40	150	108	AV	Vertical	PASS
11	3655.83	47.24	36.74	-10.50	54.00	17.26	150	250	AV	Vertical	PASS
12	4224.17	48.03	40.07	-7.96	54.00	13.93	150	270	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11n-HT20	Test Date:	2026-05-09
Test Channel:	11	Test Engineer:	Jawb Cai

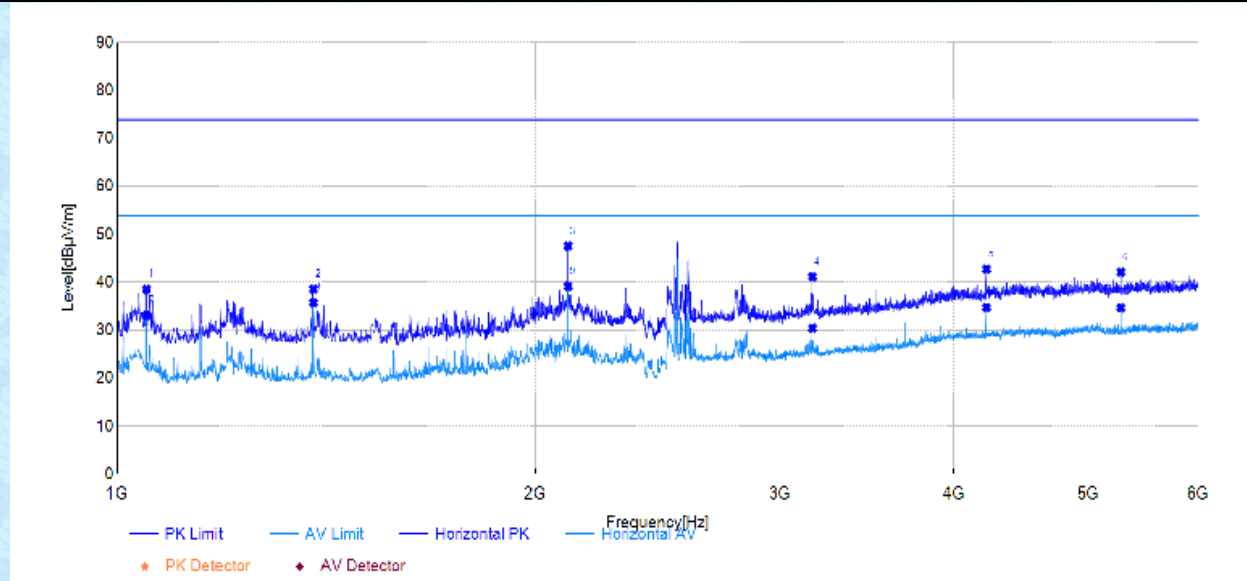

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1050.00	62.60	38.47	-24.13	74.00	35.53	150	360	PK	Horizontal	PASS
2	1385.83	60.74	38.51	-22.23	74.00	35.49	150	112	PK	Horizontal	PASS
3	2111.67	65.10	47.59	-17.51	74.00	26.41	150	360	PK	Horizontal	PASS
4	3167.50	54.84	41.12	-13.72	74.00	32.88	150	227	PK	Horizontal	PASS
5	4224.17	50.70	42.71	-7.99	74.00	31.29	150	355	PK	Horizontal	PASS
6	5280.00	48.18	42.08	-6.10	74.00	31.92	150	25	PK	Horizontal	PASS
7	1050.00	57.28	33.15	-24.13	54.00	20.85	150	360	AV	Horizontal	PASS
8	1385.83	58.06	35.83	-22.23	54.00	18.17	150	112	AV	Horizontal	PASS
9	2111.67	56.59	39.08	-17.51	54.00	14.92	150	360	AV	Horizontal	PASS
10	3167.50	44.20	30.48	-13.72	54.00	23.52	150	227	AV	Horizontal	PASS
11	4224.17	42.81	34.82	-7.99	54.00	19.18	150	347	AV	Horizontal	PASS
12	5280.00	40.87	34.77	-6.10	54.00	19.23	150	85	AV	Horizontal	PASS

Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

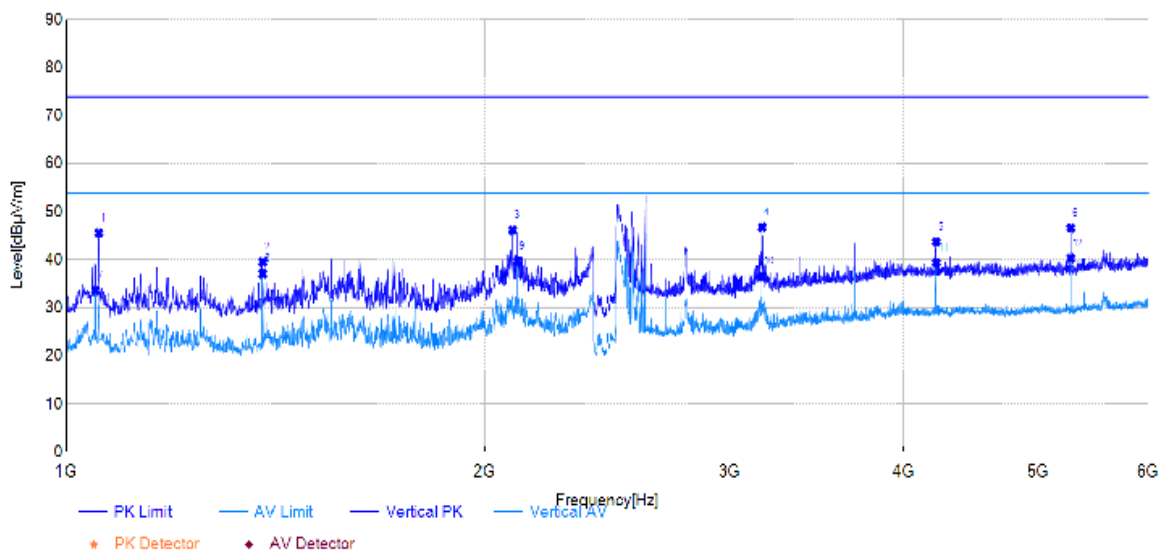


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1055.83	68.79	45.58	-23.21	74.00	28.42	150	19	PK	Vertical	PASS
2	1385.83	60.92	39.51	-21.41	74.00	34.49	150	73	PK	Vertical	PASS
3	2094.17	63.82	46.18	-17.64	74.00	27.82	150	87	PK	Vertical	PASS
4	3168.33	59.98	46.76	-13.22	74.00	27.24	150	215	PK	Vertical	PASS
5	4224.17	51.67	43.71	-7.96	74.00	30.29	150	298	PK	Vertical	PASS
6	5280.00	53.08	46.61	-6.47	74.00	27.39	150	38	PK	Vertical	PASS
7	1050.00	56.94	33.70	-23.24	54.00	20.30	150	229	AV	Vertical	PASS
8	1385.83	58.56	37.15	-21.41	54.00	16.85	150	210	AV	Vertical	PASS
9	2111.67	57.23	39.66	-17.57	54.00	14.34	150	141	AV	Vertical	PASS
10	3168.33	49.72	36.50	-13.22	54.00	17.50	150	215	AV	Vertical	PASS
11	4224.17	47.29	39.33	-7.96	54.00	14.67	150	298	AV	Vertical	PASS
12	5280.00	46.71	40.24	-6.47	54.00	13.76	150	121	AV	Vertical	PASS

Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

6GHz-18GHz


Test Mode:	802.11b	Test Date:	2026-05-09
Test Channel:	01	Test Engineer:	Jawb Cai

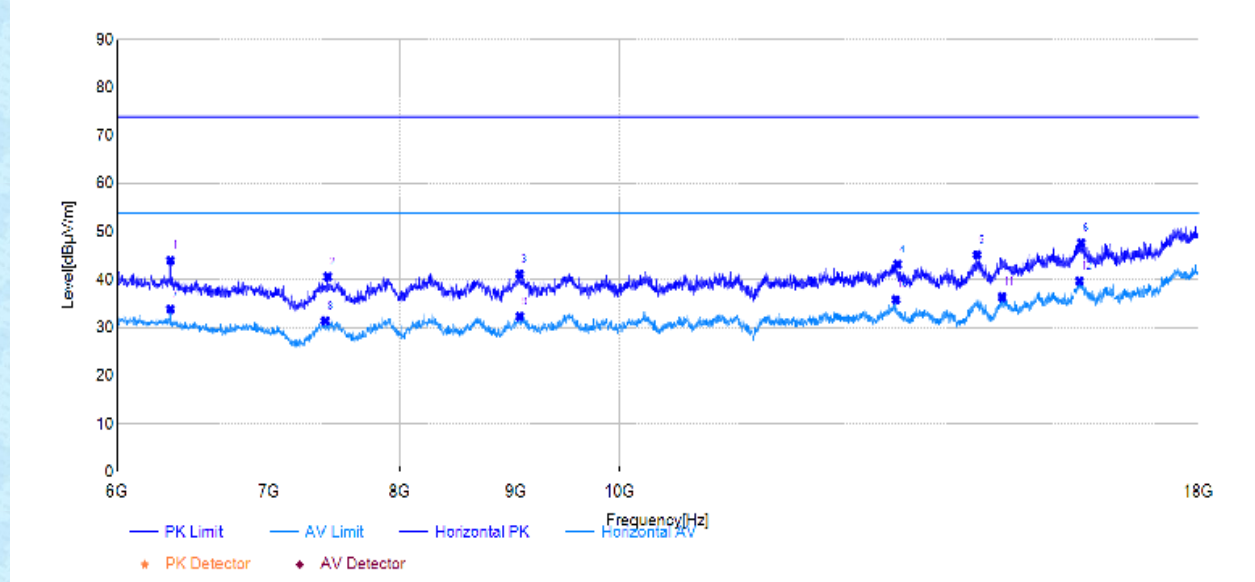

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6336.00	48.40	44.00	-4.40	74.00	30.00	150	322	PK	Horizontal	PASS
2	7431.00	43.28	40.59	-2.69	74.00	33.41	150	43	PK	Horizontal	PASS
3	9036.00	41.72	41.15	-0.57	74.00	32.85	150	122	PK	Horizontal	PASS
4	13263.00	40.25	43.18	2.93	74.00	30.82	150	249	PK	Horizontal	PASS
5	14376.00	40.21	45.18	4.97	74.00	28.82	150	219	PK	Horizontal	PASS
6	15979.50	38.10	47.69	9.59	74.00	26.31	150	73	PK	Horizontal	PASS
7	6336.00	38.35	33.95	-4.40	54.00	20.05	150	318	AV	Horizontal	PASS
8	7414.50	34.15	31.50	-2.65	54.00	22.50	150	126	AV	Horizontal	PASS
9	9037.50	32.99	32.43	-0.56	54.00	21.57	150	273	AV	Horizontal	PASS
10	13239.00	32.80	35.94	3.14	54.00	18.06	150	268	AV	Horizontal	PASS
11	14749.50	31.14	36.41	5.27	54.00	17.59	150	360	AV	Horizontal	PASS
12	15951.00	30.08	39.69	9.61	54.00	14.31	150	360	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor


(2) Margin=Limit-Level

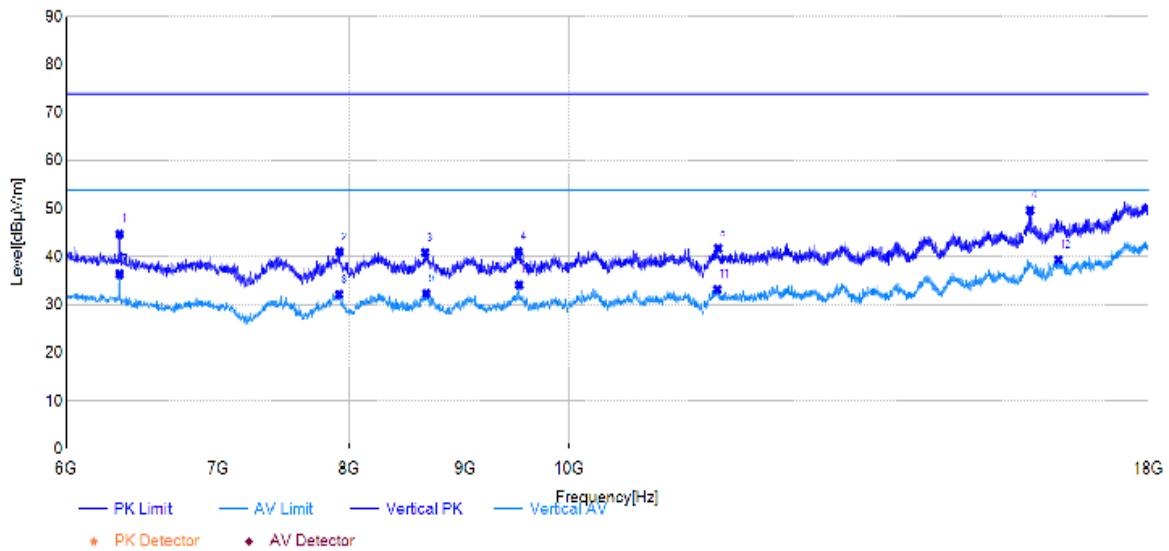

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6336.00	49.16	44.69	-4.47	74.00	29.31	150	81	PK	Vertical	PASS
2	7921.50	42.24	41.01	-1.23	74.00	32.99	150	179	PK	Vertical	PASS
3	8640.00	42.13	40.83	-1.30	74.00	33.17	150	37	PK	Vertical	PASS
4	9499.50	41.28	41.03	-0.25	74.00	32.97	150	22	PK	Vertical	PASS
5	11631.00	40.00	41.69	1.69	74.00	32.31	150	76	PK	Vertical	PASS
6	15963.00	40.65	49.69	9.04	74.00	24.31	150	149	PK	Vertical	PASS
7	6336.00	40.86	36.39	-4.47	54.00	17.61	150	81	AV	Vertical	PASS
8	7918.50	33.44	32.23	-1.21	54.00	21.77	150	96	AV	Vertical	PASS
9	8650.50	33.69	32.40	-1.29	54.00	21.60	150	145	AV	Vertical	PASS
10	9504.00	34.47	34.21	-0.26	54.00	19.79	150	81	AV	Vertical	PASS
11	11622.00	31.46	33.25	1.79	54.00	20.75	150	71	AV	Vertical	PASS
12	16432.50	29.60	39.32	9.72	54.00	14.68	150	253	AV	Vertical	PASS

Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level


Test Mode:	802.11b	Test Date:	2026-05-09
Test Channel:	06	Test Engineer:	Jawb Cai

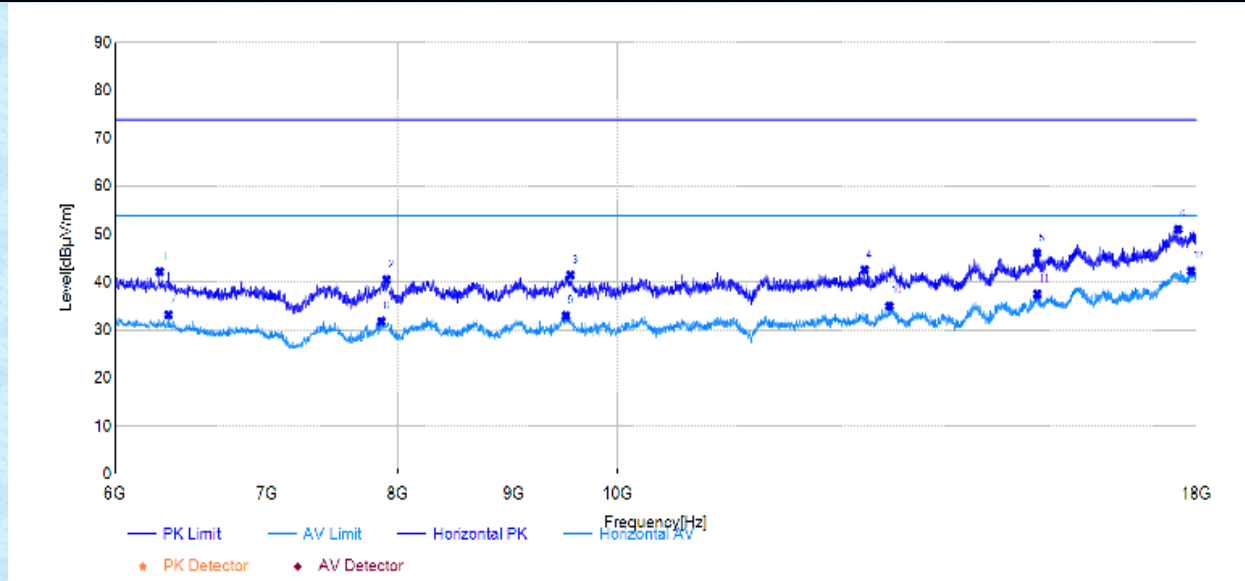

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6279.00	46.28	42.15	-4.13	74.00	31.85	150	249	PK	Horizontal	PASS
2	7908.00	41.63	40.50	-1.13	74.00	33.50	150	288	PK	Horizontal	PASS
3	9531.00	41.21	41.48	0.27	74.00	32.52	150	63	PK	Horizontal	PASS
4	12849.00	40.58	42.58	2.00	74.00	31.42	150	73	PK	Horizontal	PASS
5	15318.00	38.89	46.09	7.20	74.00	27.91	150	258	PK	Horizontal	PASS
6	17670.00	37.43	51.08	13.65	74.00	22.92	150	175	PK	Horizontal	PASS
7	6336.00	37.70	33.30	-4.40	54.00	20.70	150	360	AV	Horizontal	PASS
8	7866.00	33.71	31.93	-1.78	54.00	22.07	150	146	AV	Horizontal	PASS
9	9487.50	32.86	33.11	0.25	54.00	20.89	150	53	AV	Horizontal	PASS
10	13179.00	31.74	35.13	3.39	54.00	18.87	150	20	AV	Horizontal	PASS
11	15321.00	30.31	37.51	7.20	54.00	16.49	150	136	AV	Horizontal	PASS
12	17907.00	27.86	42.34	14.48	54.00	11.66	150	4	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor


(2) Margin=Limit-Level

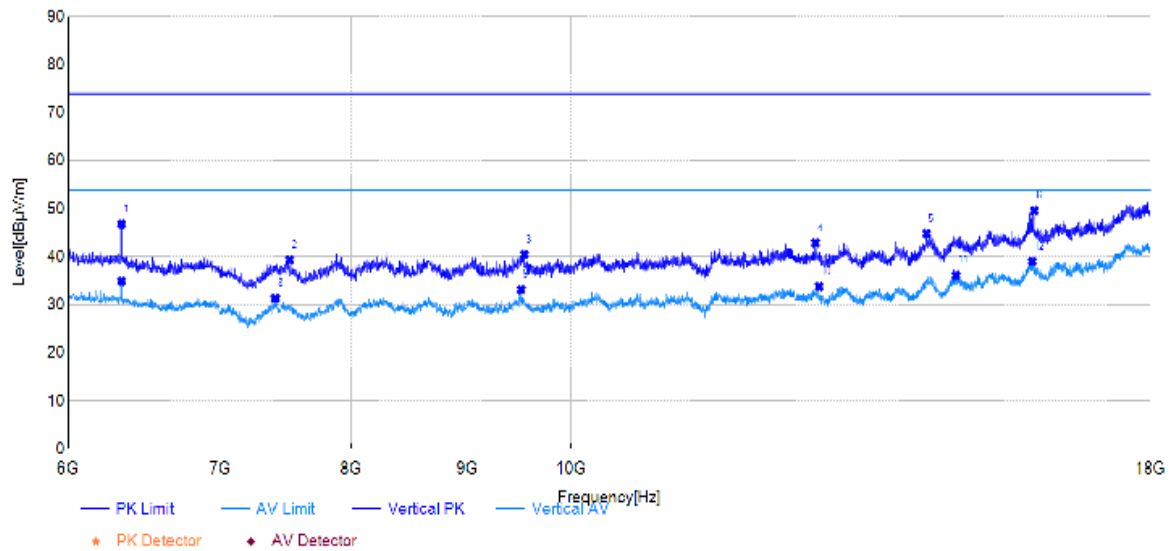

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6336.00	51.28	46.81	-4.47	74.00	27.19	150	115	PK	Vertical	PASS
2	7512.00	42.18	39.29	-2.89	74.00	34.71	150	37	PK	Vertical	PASS
3	9535.50	40.73	40.42	-0.31	74.00	33.58	150	159	PK	Vertical	PASS
4	12811.50	40.83	42.84	2.01	74.00	31.16	150	76	PK	Vertical	PASS
5	14341.50	39.54	44.82	5.28	74.00	29.18	150	86	PK	Vertical	PASS
6	16000.50	40.65	49.62	8.97	74.00	24.38	150	60	PK	Vertical	PASS
7	6336.00	39.48	35.01	-4.47	54.00	18.99	150	66	AV	Vertical	PASS
8	7405.50	34.03	31.38	-2.65	54.00	22.62	150	100	AV	Vertical	PASS
9	9504.00	33.47	33.21	-0.26	54.00	20.79	150	76	AV	Vertical	PASS
10	12859.50	32.13	33.88	1.75	54.00	20.12	150	11	AV	Vertical	PASS
11	14779.50	30.59	36.17	5.58	54.00	17.83	150	41	AV	Vertical	PASS
12	15967.50	29.94	38.96	9.02	54.00	15.04	150	149	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11b	Test Date:	2026-05-09
Test Channel:	11	Test Engineer:	Jawb Cai

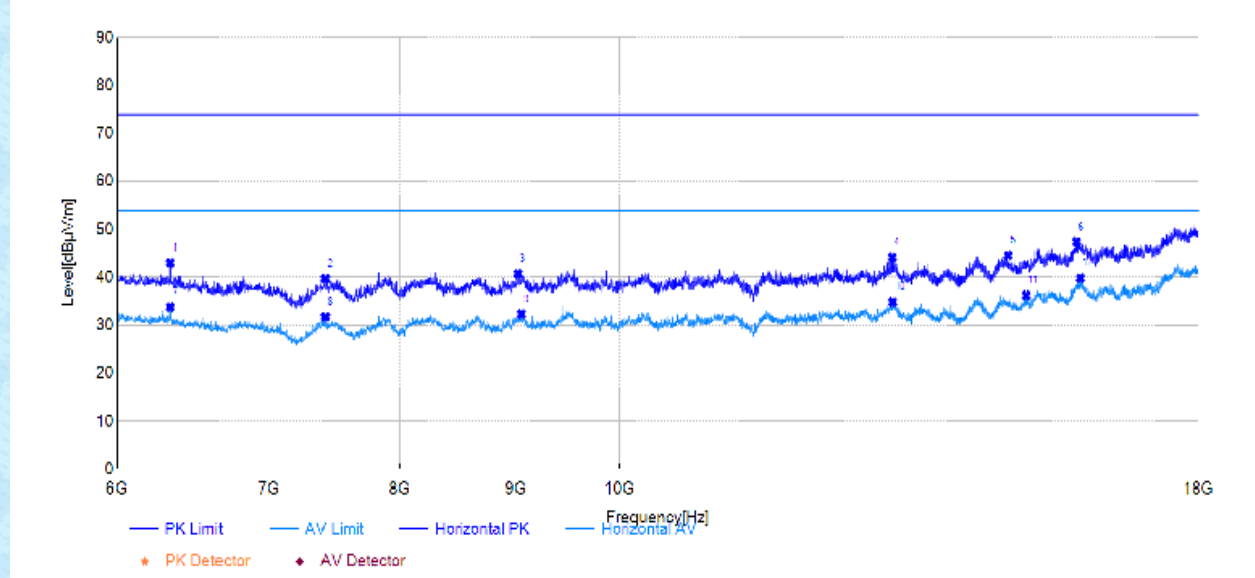

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6334.50	47.36	42.97	-4.39	74.00	31.03	150	316	PK	Horizontal	PASS
2	7416.00	42.32	39.66	-2.66	74.00	34.34	150	287	PK	Horizontal	PASS
3	9021.00	41.25	40.68	-0.57	74.00	33.32	150	48	PK	Horizontal	PASS
4	13191.00	40.70	44.15	3.45	74.00	29.85	150	29	PK	Horizontal	PASS
5	14839.50	39.48	44.52	5.04	74.00	29.48	150	194	PK	Horizontal	PASS
6	15903.00	37.77	47.41	9.64	74.00	26.59	150	297	PK	Horizontal	PASS
7	6334.50	38.23	33.84	-4.39	54.00	20.16	150	311	AV	Horizontal	PASS
8	7416.00	34.45	31.79	-2.66	54.00	22.21	150	282	AV	Horizontal	PASS
9	9052.50	32.95	32.38	-0.57	54.00	21.62	150	180	AV	Horizontal	PASS
10	13195.50	31.45	34.92	3.47	54.00	19.08	150	262	AV	Horizontal	PASS
11	15117.00	30.62	36.27	5.65	54.00	17.73	150	301	AV	Horizontal	PASS
12	15967.50	30.17	39.77	9.60	54.00	14.23	150	282	AV	Horizontal	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

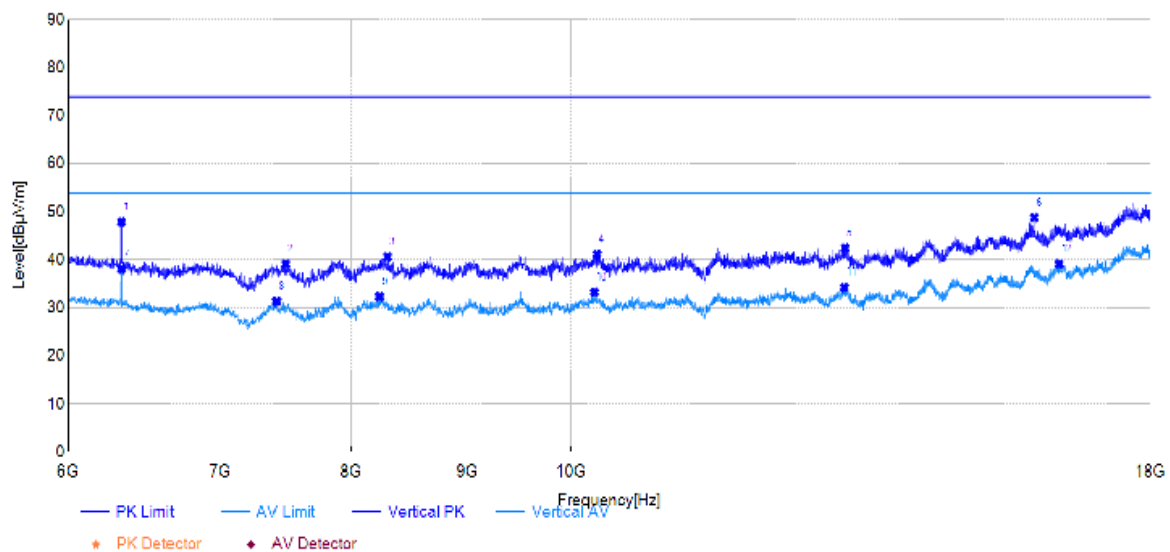

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6336.00	52.36	47.89	-4.47	74.00	26.11	150	100	PK	Vertical	PASS
2	7482.00	41.92	39.06	-2.86	74.00	34.94	150	37	PK	Vertical	PASS
3	8296.50	41.83	40.57	-1.26	74.00	33.43	150	1	PK	Vertical	PASS
4	10263.00	40.99	41.10	0.11	74.00	32.90	150	46	PK	Vertical	PASS
5	13206.00	39.51	42.41	2.90	74.00	31.59	150	91	PK	Vertical	PASS
6	16000.50	39.84	48.81	8.97	74.00	25.19	150	149	PK	Vertical	PASS
7	6336.00	42.48	38.01	-4.47	54.00	15.99	150	100	AV	Vertical	PASS
8	7416.00	34.07	31.39	-2.68	54.00	22.61	150	130	AV	Vertical	PASS
9	8232.00	33.88	32.40	-1.48	54.00	21.60	150	46	AV	Vertical	PASS
10	10236.00	33.22	33.31	0.09	54.00	20.69	150	17	AV	Vertical	PASS
11	13195.50	31.37	34.30	2.93	54.00	19.70	150	0	AV	Vertical	PASS
12	16413.00	29.28	39.06	9.78	54.00	14.94	150	198	AV	Vertical	PASS


Note:(1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11g	Test Date:	2026-05-09
Test Channel:	01	Test Engineer:	Jawb Cai

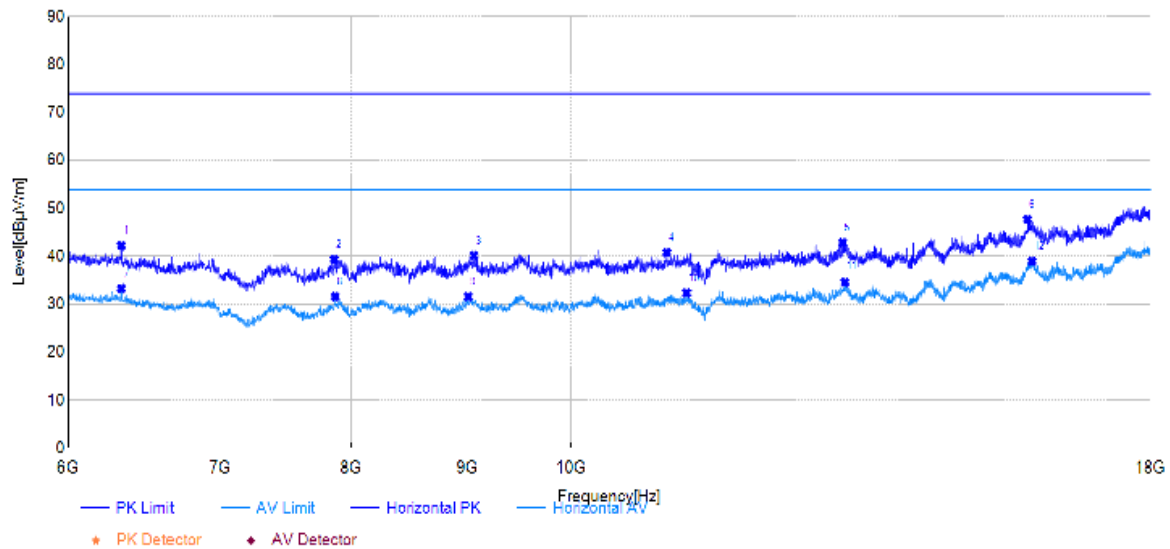

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6334.50	46.59	42.20	-4.39	74.00	31.80	150	306	PK	Horizontal	PASS
2	7863.00	41.12	39.28	-1.84	74.00	34.72	150	208	PK	Horizontal	PASS
3	9063.00	40.66	40.10	-0.56	74.00	33.90	150	116	PK	Horizontal	PASS
4	11022.00	39.27	40.73	1.46	74.00	33.27	150	38	PK	Horizontal	PASS
5	13173.00	39.46	42.82	3.36	74.00	31.18	150	44	PK	Horizontal	PASS
6	15889.50	38.24	47.69	9.45	74.00	26.31	150	73	PK	Horizontal	PASS
7	6334.50	37.73	33.34	-4.39	54.00	20.66	150	306	AV	Horizontal	PASS
8	7870.50	33.32	31.64	-1.68	54.00	22.36	150	28	AV	Horizontal	PASS
9	9010.50	32.22	31.64	-0.58	54.00	22.36	150	160	AV	Horizontal	PASS
10	11247.00	31.36	32.42	1.06	54.00	21.58	150	92	AV	Horizontal	PASS
11	13204.50	31.22	34.67	3.45	54.00	19.33	150	194	AV	Horizontal	PASS
12	15963.00	29.29	38.90	9.61	54.00	15.10	150	229	AV	Horizontal	PASS


Note:(1) Level=Reading+Factor
(2) Margin=Limit-Level

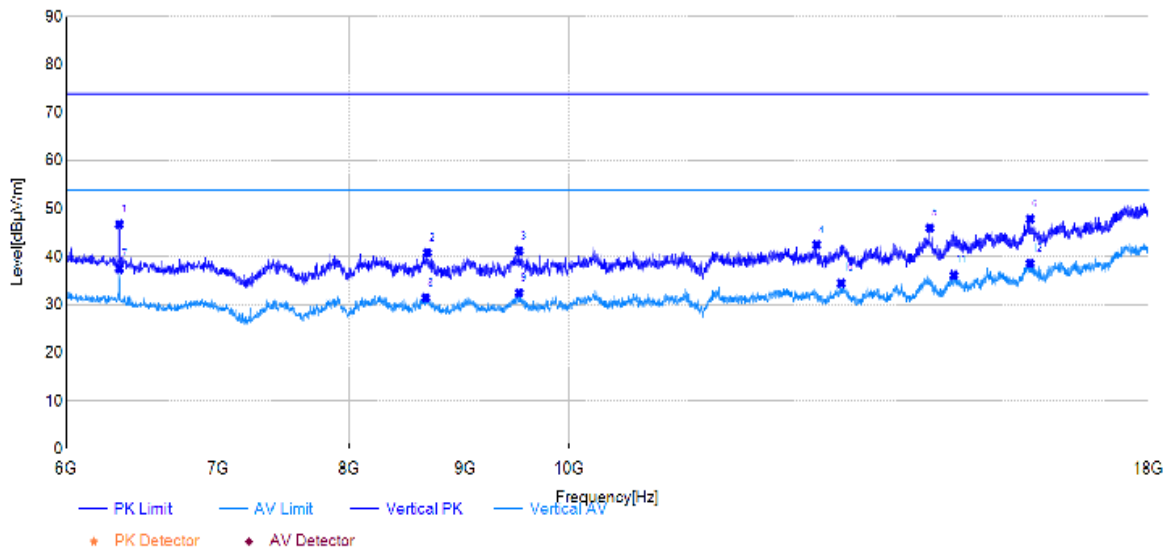

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6334.50	51.21	46.75	-4.46	74.00	27.25	150	111	PK	Vertical	PASS
2	8659.50	42.09	40.81	-1.28	74.00	33.19	150	27	PK	Vertical	PASS
3	9504.00	41.46	41.20	-0.26	74.00	32.80	150	82	PK	Vertical	PASS
4	12853.50	40.69	42.47	1.78	74.00	31.53	150	0	PK	Vertical	PASS
5	14419.50	40.68	45.97	5.29	74.00	28.03	150	111	PK	Vertical	PASS
6	15966.00	38.85	47.88	9.03	74.00	26.12	150	268	PK	Vertical	PASS
7	6334.50	42.00	37.54	-4.46	54.00	16.46	150	116	AV	Vertical	PASS
8	8644.50	32.82	31.52	-1.30	54.00	22.48	150	2	AV	Vertical	PASS
9	9504.00	32.79	32.53	-0.26	54.00	21.47	150	87	AV	Vertical	PASS
10	13180.50	31.71	34.56	2.85	54.00	19.44	150	184	AV	Vertical	PASS
11	14778.00	30.62	36.20	5.58	54.00	17.80	150	135	AV	Vertical	PASS
12	15964.50	29.54	38.57	9.03	54.00	15.43	150	37	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11g	Test Date:	2026-05-09
Test Channel:	06	Test Engineer:	Jawb Cai

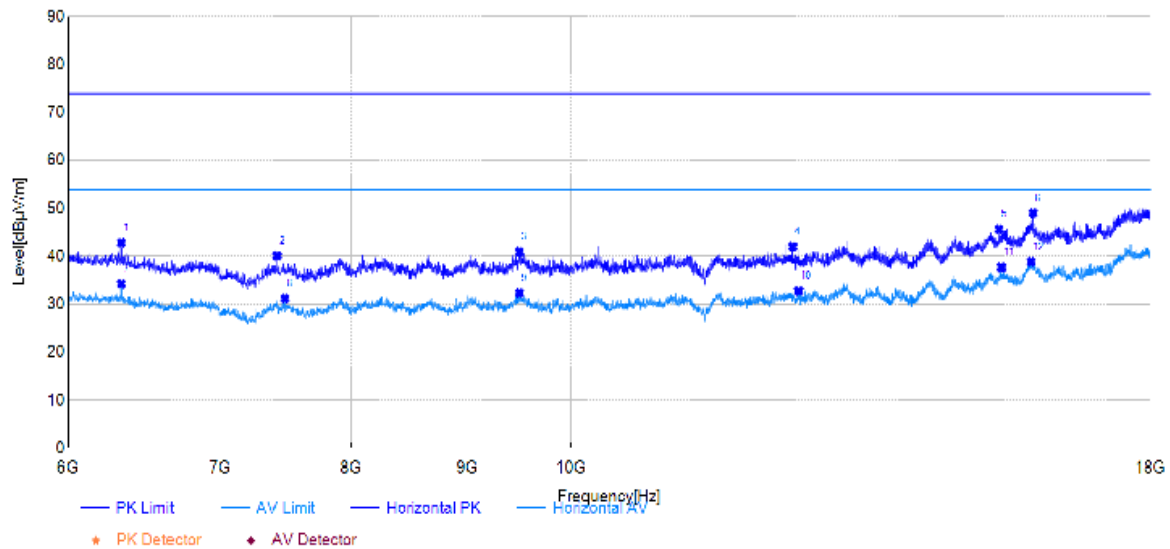

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6334.50	47.18	42.79	-4.39	74.00	31.21	150	319	PK	Horizontal	PASS
2	7419.00	42.71	40.04	-2.67	74.00	33.96	150	359	PK	Horizontal	PASS
3	9487.50	40.65	40.90	0.25	74.00	33.10	150	5	PK	Horizontal	PASS
4	12525.00	39.66	41.97	2.31	74.00	32.03	150	15	PK	Horizontal	PASS
5	15447.00	38.35	45.62	7.27	74.00	28.38	150	324	PK	Horizontal	PASS
6	15981.00	39.46	49.05	9.59	74.00	24.95	150	54	PK	Horizontal	PASS
7	6334.50	38.72	34.33	-4.39	54.00	19.67	150	319	AV	Horizontal	PASS
8	7476.00	34.02	31.24	-2.78	54.00	22.76	150	20	AV	Horizontal	PASS
9	9487.50	32.16	32.41	0.25	54.00	21.59	150	0	AV	Horizontal	PASS
10	12598.50	30.62	32.83	2.21	54.00	21.17	150	103	AV	Horizontal	PASS
11	15480.00	30.16	37.69	7.53	54.00	16.31	150	34	AV	Horizontal	PASS
12	15948.00	29.19	38.81	9.62	54.00	15.19	150	34	AV	Horizontal	PASS


Note:(1) Level=Reading+Factor
(2) Margin=Limit-Level

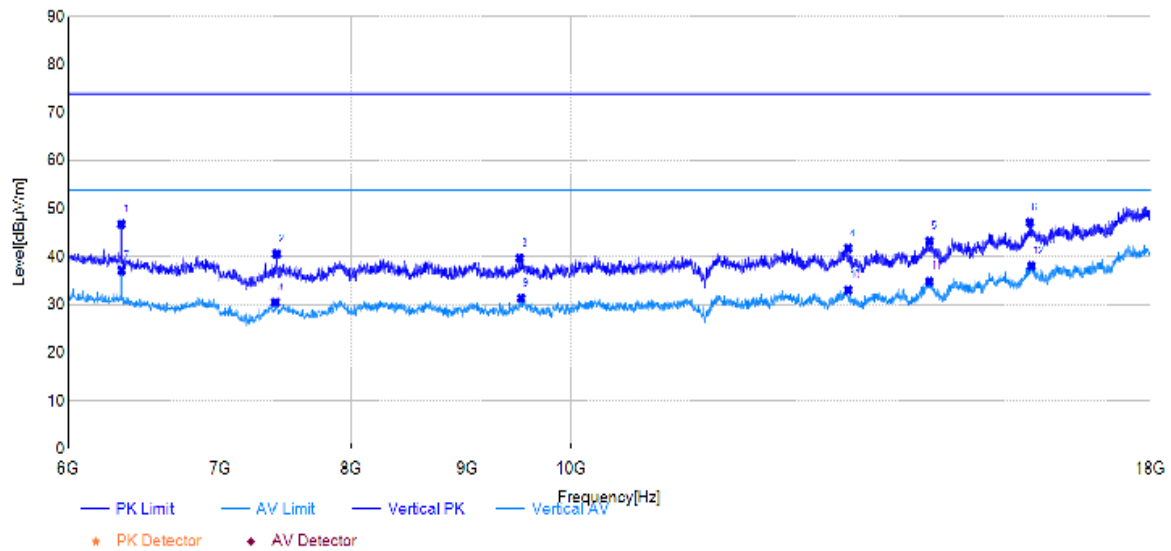

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6334.50	51.24	46.78	-4.46	74.00	27.22	150	81	PK	Vertical	PASS
2	7416.00	43.24	40.56	-2.68	74.00	33.44	150	37	PK	Vertical	PASS
3	9489.00	39.99	39.66	-0.33	74.00	34.34	150	22	PK	Vertical	PASS
4	13248.00	39.21	41.72	2.51	74.00	32.28	150	232	PK	Vertical	PASS
5	14385.00	37.82	43.24	5.42	74.00	30.76	150	86	PK	Vertical	PASS
6	15927.00	38.06	47.14	9.08	74.00	26.86	150	139	PK	Vertical	PASS
7	6336.00	41.64	37.17	-4.47	54.00	16.83	150	106	AV	Vertical	PASS
8	7405.50	33.20	30.55	-2.65	54.00	23.45	150	272	AV	Vertical	PASS
9	9504.00	31.69	31.43	-0.26	54.00	22.57	150	86	AV	Vertical	PASS
10	13248.00	30.60	33.11	2.51	54.00	20.89	150	174	AV	Vertical	PASS
11	14382.00	29.51	34.92	5.41	54.00	19.08	150	1	AV	Vertical	PASS
12	15952.50	29.00	38.04	9.04	54.00	15.96	150	31	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11g	Test Date:	2026-05-09
Test Channel:	11	Test Engineer:	Jawb Cai

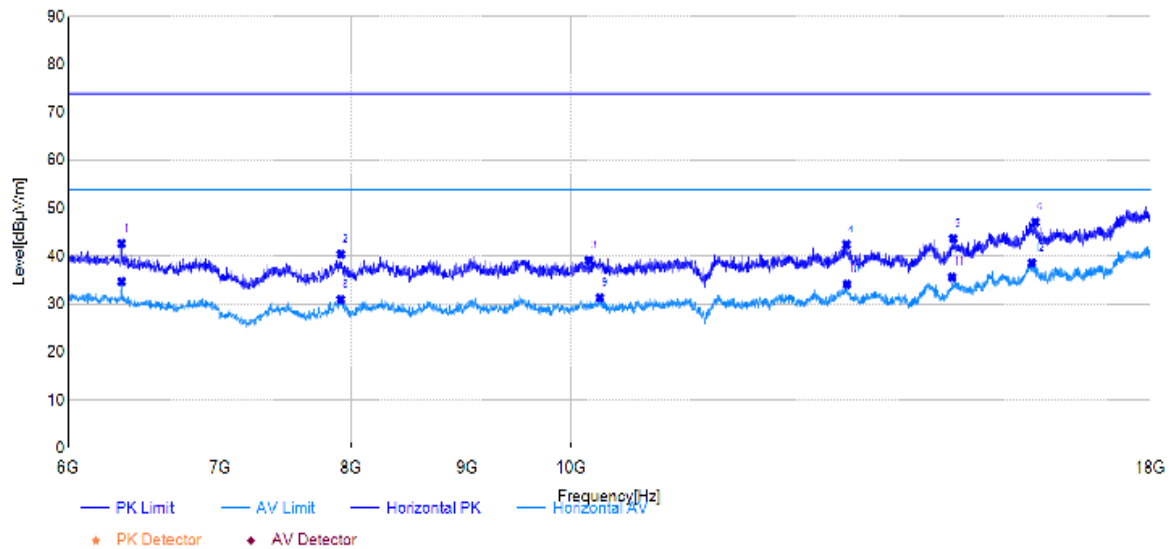

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6336.00	47.04	42.64	-4.40	74.00	31.36	150	316	PK	Horizontal	PASS
2	7917.00	41.58	40.39	-1.19	74.00	33.61	150	360	PK	Horizontal	PASS
3	10183.50	39.10	39.07	-0.03	74.00	34.93	150	326	PK	Horizontal	PASS
4	13224.00	39.14	42.42	3.28	74.00	31.58	150	276	PK	Horizontal	PASS
5	14739.00	38.40	43.66	5.26	74.00	30.34	150	106	PK	Horizontal	PASS
6	16017.00	37.82	47.12	9.30	74.00	26.88	150	312	PK	Horizontal	PASS
7	6336.00	39.22	34.82	-4.40	54.00	19.18	150	316	AV	Horizontal	PASS
8	7915.50	32.22	31.04	-1.18	54.00	22.96	150	272	AV	Horizontal	PASS
9	10293.00	31.45	31.40	-0.05	54.00	22.60	150	23	AV	Horizontal	PASS
10	13231.50	31.01	34.22	3.21	54.00	19.78	150	199	AV	Horizontal	PASS
11	14721.00	30.47	35.72	5.25	54.00	18.28	150	38	AV	Horizontal	PASS
12	15960.00	28.94	38.54	9.60	54.00	15.46	150	345	AV	Horizontal	PASS


Note:(1) Level=Reading+Factor
(2) Margin=Limit-Level

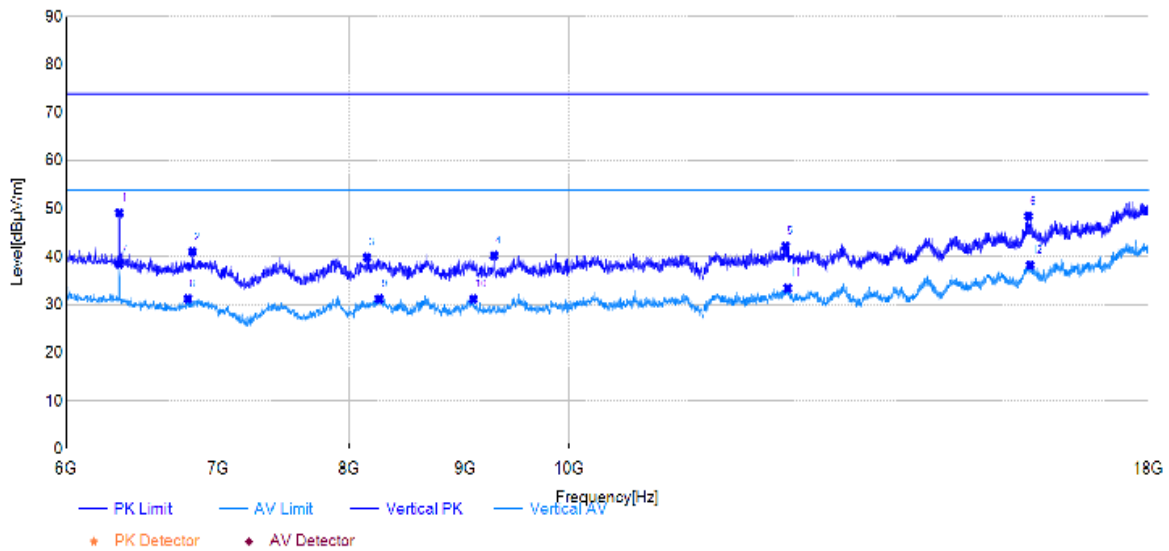

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6334.50	53.60	49.14	-4.46	74.00	24.86	150	111	PK	Vertical	PASS
2	6820.50	45.75	41.01	-4.74	74.00	32.99	150	360	PK	Vertical	PASS
3	8148.00	41.17	39.80	-1.37	74.00	34.20	150	111	PK	Vertical	PASS
4	9264.00	41.59	40.18	-1.41	74.00	33.82	150	208	PK	Vertical	PASS
5	12460.50	39.40	42.17	2.77	74.00	31.83	150	208	PK	Vertical	PASS
6	15937.50	39.41	48.48	9.07	74.00	25.52	150	154	PK	Vertical	PASS
7	6334.50	42.85	38.39	-4.46	54.00	15.61	150	111	AV	Vertical	PASS
8	6789.00	36.26	31.31	-4.95	54.00	22.69	150	360	AV	Vertical	PASS
9	8245.50	32.72	31.29	-1.43	54.00	22.71	150	340	AV	Vertical	PASS
10	9076.50	32.31	31.24	-1.07	54.00	22.76	150	91	AV	Vertical	PASS
11	12489.00	30.69	33.52	2.83	54.00	20.48	150	169	AV	Vertical	PASS
12	15966.00	29.15	38.18	9.03	54.00	15.82	150	232	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11n-HT20	Test Date:	2026-05-09
Test Channel:	01	Test Engineer:	Jawb Cai

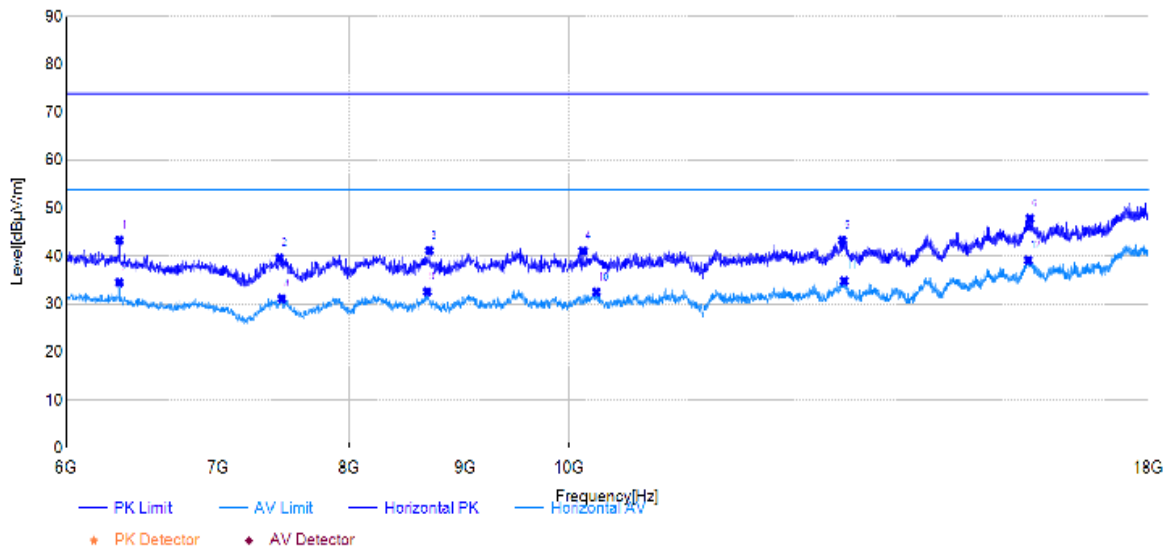

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6334.50	47.73	43.34	-4.39	74.00	30.66	150	318	PK	Horizontal	PASS
2	7450.50	42.31	39.58	-2.73	74.00	34.42	150	73	PK	Horizontal	PASS
3	8677.50	42.30	41.15	-1.15	74.00	32.85	150	292	PK	Horizontal	PASS
4	10143.00	41.03	41.04	0.01	74.00	32.96	150	186	PK	Horizontal	PASS
5	13195.50	39.86	43.33	3.47	74.00	30.67	150	82	PK	Horizontal	PASS
6	15961.50	38.29	47.89	9.60	74.00	26.11	150	233	PK	Horizontal	PASS
7	6334.50	39.02	34.63	-4.39	54.00	19.37	150	318	AV	Horizontal	PASS
8	7467.00	33.98	31.22	-2.76	54.00	22.78	150	63	AV	Horizontal	PASS
9	8658.00	33.86	32.67	-1.19	54.00	21.33	150	205	AV	Horizontal	PASS
10	10276.50	32.66	32.61	-0.05	54.00	21.39	150	292	AV	Horizontal	PASS
11	13221.00	31.64	34.94	3.30	54.00	19.06	150	292	AV	Horizontal	PASS
12	15934.50	29.49	39.11	9.62	54.00	14.89	150	337	AV	Horizontal	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

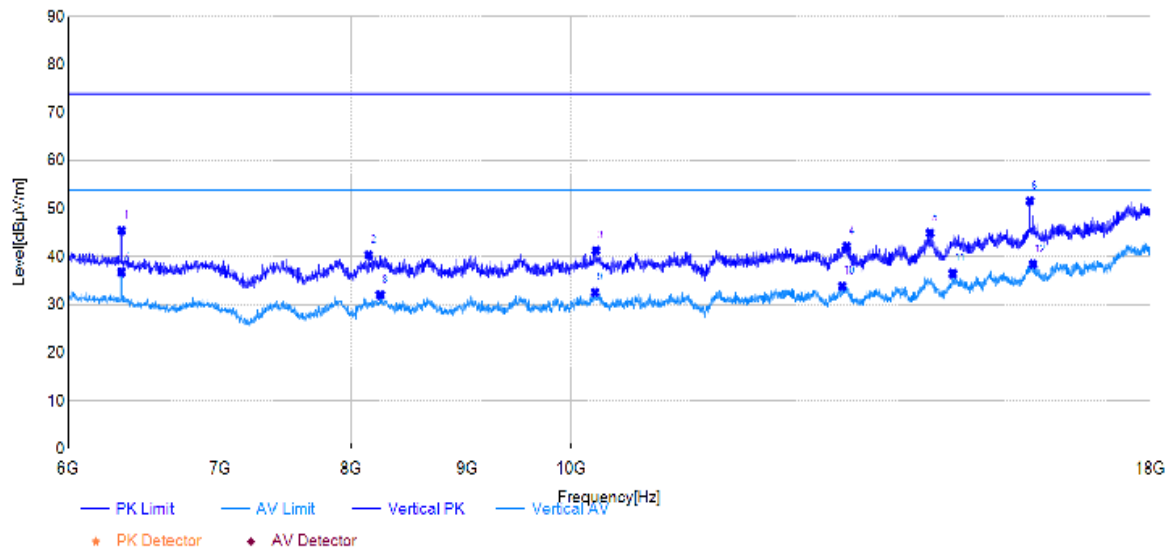

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6336.00	49.93	45.46	-4.47	74.00	28.54	150	99	PK	Vertical	PASS
2	8145.00	41.66	40.30	-1.36	74.00	33.70	150	272	PK	Vertical	PASS
3	10252.50	41.14	41.24	0.10	74.00	32.76	150	0	PK	Vertical	PASS
4	13228.50	39.46	42.15	2.69	74.00	31.85	150	223	PK	Vertical	PASS
5	14392.50	39.48	44.93	5.45	74.00	29.07	150	282	PK	Vertical	PASS
6	15928.50	42.59	51.67	9.08	74.00	22.33	150	60	PK	Vertical	PASS
7	6334.50	41.30	36.84	-4.46	54.00	17.16	150	120	AV	Vertical	PASS
8	8238.00	33.57	32.11	-1.46	54.00	21.89	150	228	AV	Vertical	PASS
9	10242.00	32.54	32.64	0.10	54.00	21.36	150	287	AV	Vertical	PASS
10	13167.00	31.16	33.96	2.80	54.00	20.04	150	209	AV	Vertical	PASS
11	14731.50	30.95	36.51	5.56	54.00	17.49	150	228	AV	Vertical	PASS
12	15979.50	29.39	38.40	9.01	54.00	15.60	150	232	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11n-HT20	Test Date:	2026-05-09
Test Channel:	06	Test Engineer:	Jawb Cai

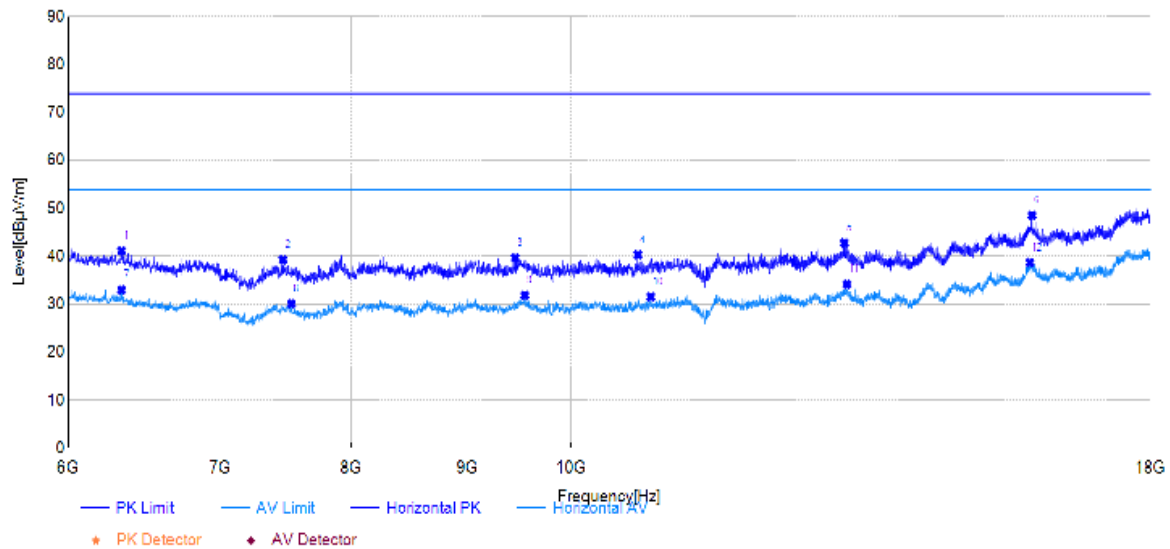

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6336.00	45.49	41.09	-4.40	74.00	32.91	150	358	PK	Horizontal	PASS
2	7461.00	41.97	39.22	-2.75	74.00	34.78	150	234	PK	Horizontal	PASS
3	9447.00	39.66	39.59	-0.07	74.00	34.41	150	342	PK	Horizontal	PASS
4	10701.00	39.87	40.28	0.41	74.00	33.72	150	48	PK	Horizontal	PASS
5	13195.50	39.28	42.75	3.47	74.00	31.25	150	360	PK	Horizontal	PASS
6	15963.00	38.94	48.55	9.61	74.00	25.45	150	126	PK	Horizontal	PASS
7	6336.00	37.45	33.05	-4.40	54.00	20.95	150	24	AV	Horizontal	PASS
8	7525.50	32.91	30.15	-2.76	54.00	23.85	150	352	AV	Horizontal	PASS
9	9540.00	31.68	31.91	0.23	54.00	22.09	150	9	AV	Horizontal	PASS
10	10843.50	30.75	31.60	0.85	54.00	22.40	150	78	AV	Horizontal	PASS
11	13231.50	31.02	34.23	3.21	54.00	19.77	150	44	AV	Horizontal	PASS
12	15928.50	29.01	38.64	9.63	54.00	15.36	150	355	AV	Horizontal	PASS


Note:(1) Level=Reading+Factor
(2) Margin=Limit-Level

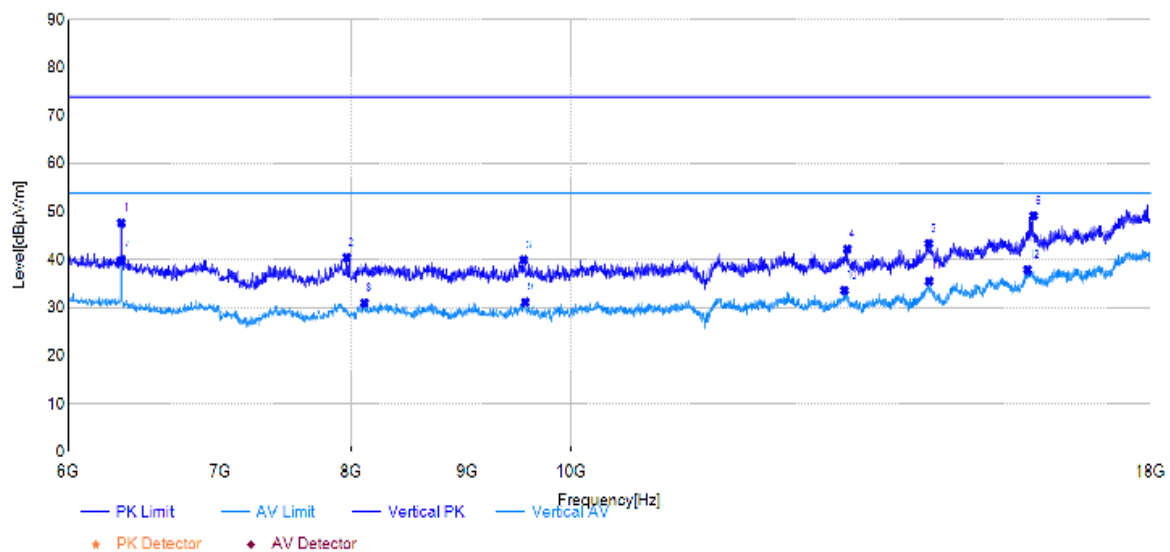

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6334.50	52.13	47.67	-4.46	74.00	26.33	150	75	PK	Vertical	PASS
2	7963.50	41.89	40.41	-1.48	74.00	33.59	150	154	PK	Vertical	PASS
3	9529.50	40.20	39.90	-0.30	74.00	34.10	150	248	PK	Vertical	PASS
4	13236.00	39.54	42.16	2.62	74.00	31.84	150	21	PK	Vertical	PASS
5	14376.00	37.96	43.35	5.39	74.00	30.65	150	45	PK	Vertical	PASS
6	15988.50	40.19	49.19	9.00	74.00	24.81	150	124	PK	Vertical	PASS
7	6334.50	44.28	39.82	-4.46	54.00	14.18	150	75	AV	Vertical	PASS
8	8109.00	32.27	31.05	-1.22	54.00	22.95	150	110	AV	Vertical	PASS
9	9544.50	31.53	31.21	-0.32	54.00	22.79	150	16	AV	Vertical	PASS
10	13197.00	30.76	33.70	2.94	54.00	20.30	150	149	AV	Vertical	PASS
11	14380.50	30.21	35.62	5.41	54.00	18.38	150	0	AV	Vertical	PASS
12	15891.00	28.91	37.87	8.96	54.00	16.13	150	41	AV	Vertical	PASS


Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Test Mode:	802.11n-HT20	Test Date:	2026-05-09
Test Channel:	11	Test Engineer:	Jawb Cai

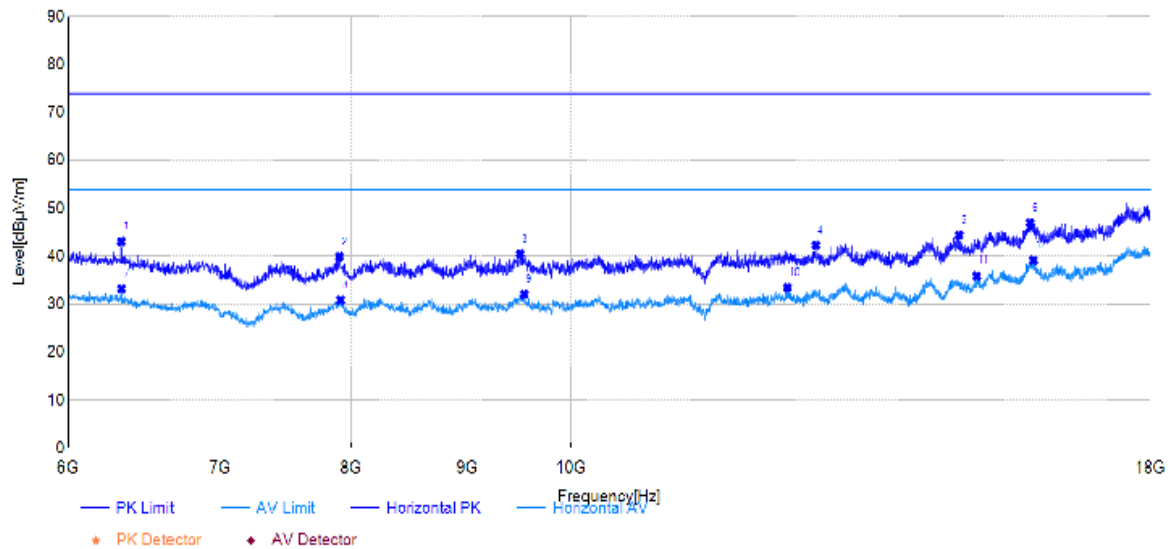

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6334.50	47.43	43.04	-4.39	74.00	30.96	150	313	PK	Horizontal	PASS
2	7905.00	41.00	39.89	-1.11	74.00	34.11	150	48	PK	Horizontal	PASS
3	9495.00	40.14	40.45	0.31	74.00	33.55	150	39	PK	Horizontal	PASS
4	12817.50	40.15	42.26	2.11	74.00	31.74	150	360	PK	Horizontal	PASS
5	14827.50	39.27	44.38	5.11	74.00	29.62	150	328	PK	Horizontal	PASS
6	15931.50	37.38	47.00	9.62	74.00	27.00	150	250	PK	Horizontal	PASS
7	6336.00	37.70	33.30	-4.40	54.00	20.70	150	313	AV	Horizontal	PASS
8	7914.00	32.08	30.91	-1.17	54.00	23.09	150	152	AV	Horizontal	PASS
9	9534.00	31.86	32.12	0.26	54.00	21.88	150	83	AV	Horizontal	PASS
10	12459.00	31.24	33.53	2.29	54.00	20.47	150	196	AV	Horizontal	PASS
11	15096.00	30.30	35.96	5.66	54.00	18.04	150	88	AV	Horizontal	PASS
12	15985.50	29.50	39.09	9.59	54.00	14.91	150	128	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor
(2) Margin=Limit-Level

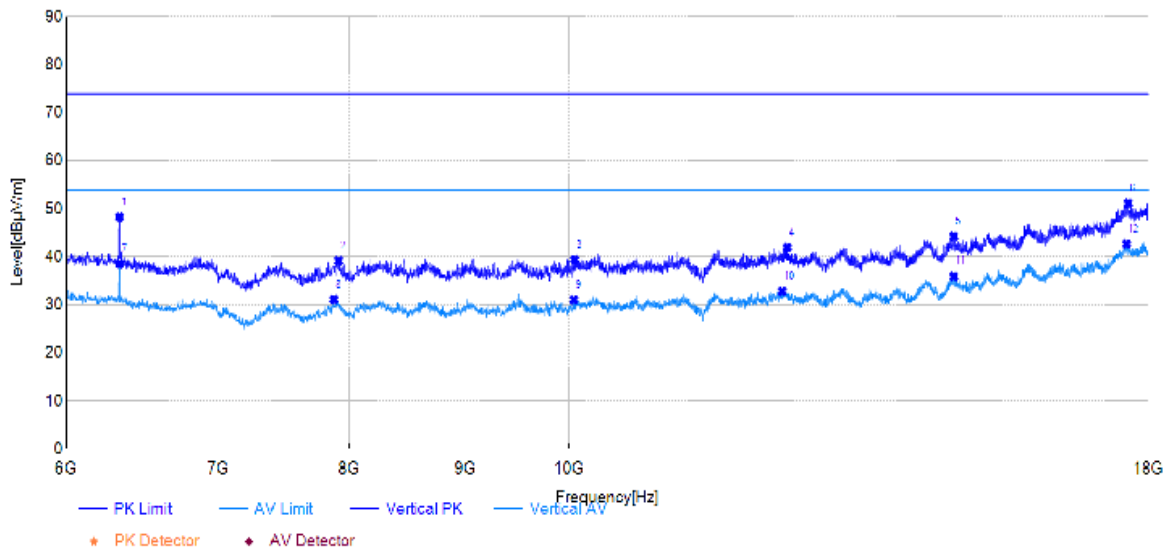


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6336.00	52.76	48.29	-4.47	74.00	25.71	150	99	PK	Vertical	PASS
2	7914.00	40.30	39.12	-1.18	74.00	34.88	150	85	PK	Vertical	PASS
3	10059.00	39.19	39.33	0.14	74.00	34.67	150	134	PK	Vertical	PASS
4	12484.50	39.08	41.90	2.82	74.00	32.10	150	257	PK	Vertical	PASS
5	14776.50	38.63	44.21	5.58	74.00	29.79	150	267	PK	Vertical	PASS
6	17635.50	36.70	51.17	14.47	74.00	22.83	150	272	PK	Vertical	PASS
7	6336.00	42.96	38.49	-4.47	54.00	15.51	150	99	AV	Vertical	PASS
8	7876.50	32.74	31.15	-1.59	54.00	22.85	150	317	AV	Vertical	PASS
9	10051.50	30.94	31.08	0.14	54.00	22.92	150	283	AV	Vertical	PASS
10	12418.50	30.20	32.89	2.69	54.00	21.11	150	179	AV	Vertical	PASS
11	14776.50	30.40	35.98	5.58	54.00	18.02	150	267	AV	Vertical	PASS
12	17605.50	27.99	42.63	14.64	54.00	11.37	150	203	AV	Vertical	PASS

Note: (1) Level=Reading+Factor
(2) Margin=Limit-Level

Radiated Restricted Band Edge Measurement:

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB40
Test Date:	2026-05-15	Voltage:	DC 12V from adapter
Environment:	Temp: 24.5°C; Humi:46%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11b at Channel 2412MHz		

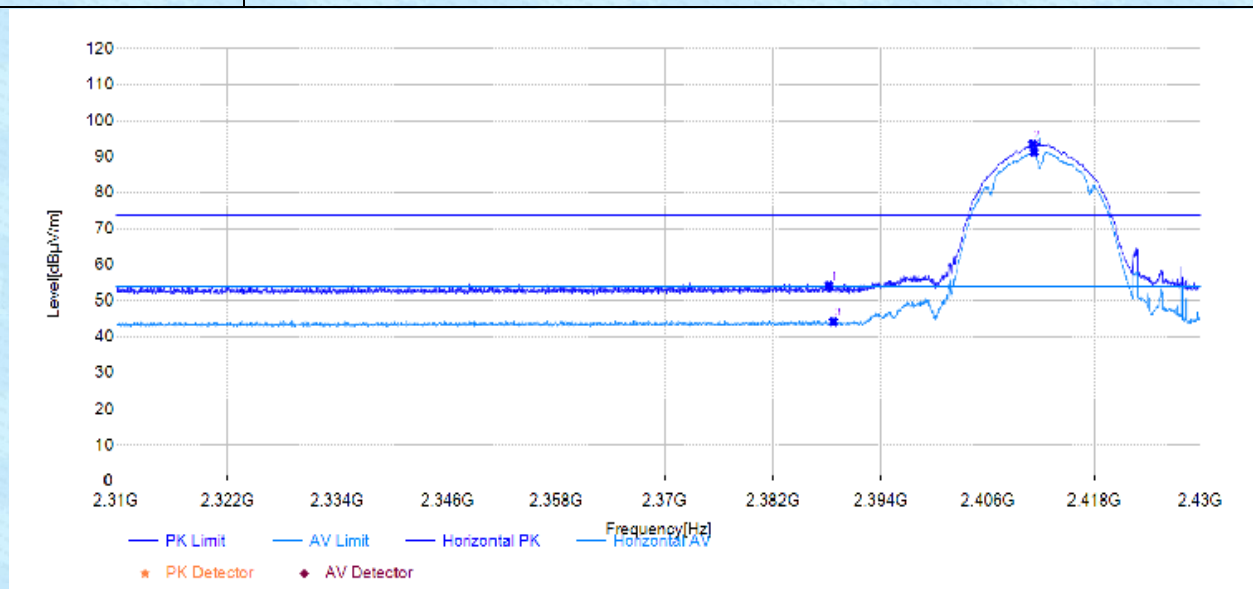


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2388.23	18.86	54.16	35.30	74.00	19.84	150	294	PK	Horizontal	PASS
2	2411.10	58.16	93.52	35.36	/	/	150	183	PK	Horizontal	PASS
3	2388.74	8.99	44.28	35.29	54.00	9.72	150	183	AV	Horizontal	PASS
4	2411.25	55.91	91.28	35.37	/	/	150	183	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

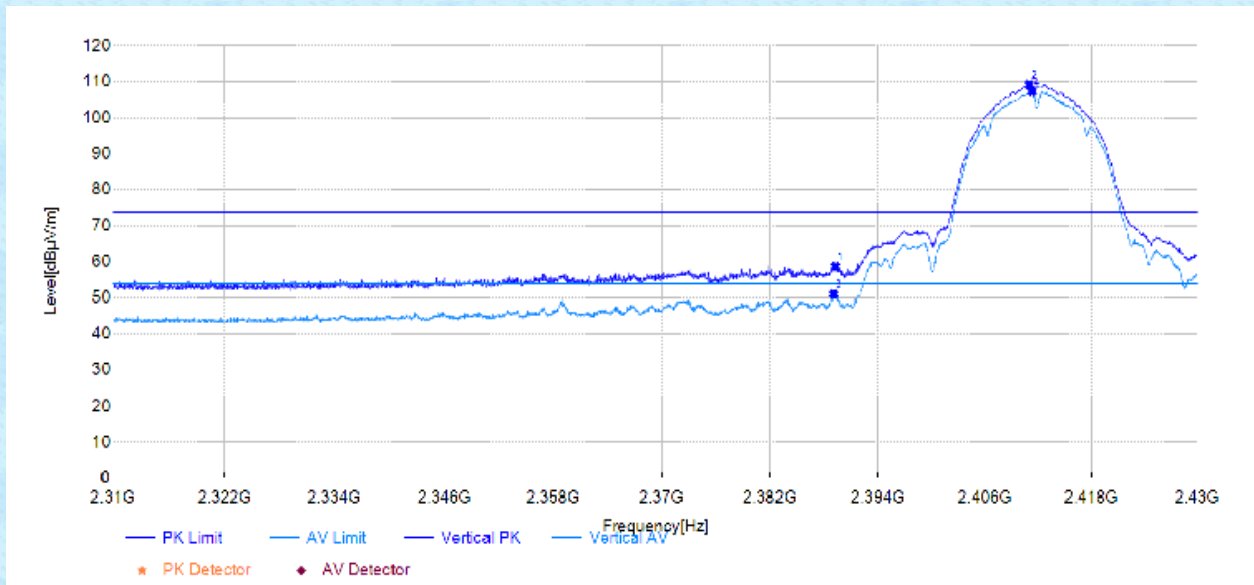


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2389.31	23.30	58.65	35.35	74.00	15.35	150	226	PK	Vertical	PASS
2	2411.04	73.65	109.07	35.42	/	/	150	139	PK	Vertical	PASS
3	2389.10	15.66	51.01	35.35	54.00	2.99	150	6	AV	Vertical	PASS
4	2411.37	71.79	107.22	35.43	/	/	150	143	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB40
Test Date:	2026-05-15	Voltage:	DC 12V from adapter
Environment:	Temp: 24.5°C; Humi:46%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11b at Channel 2462MHz		

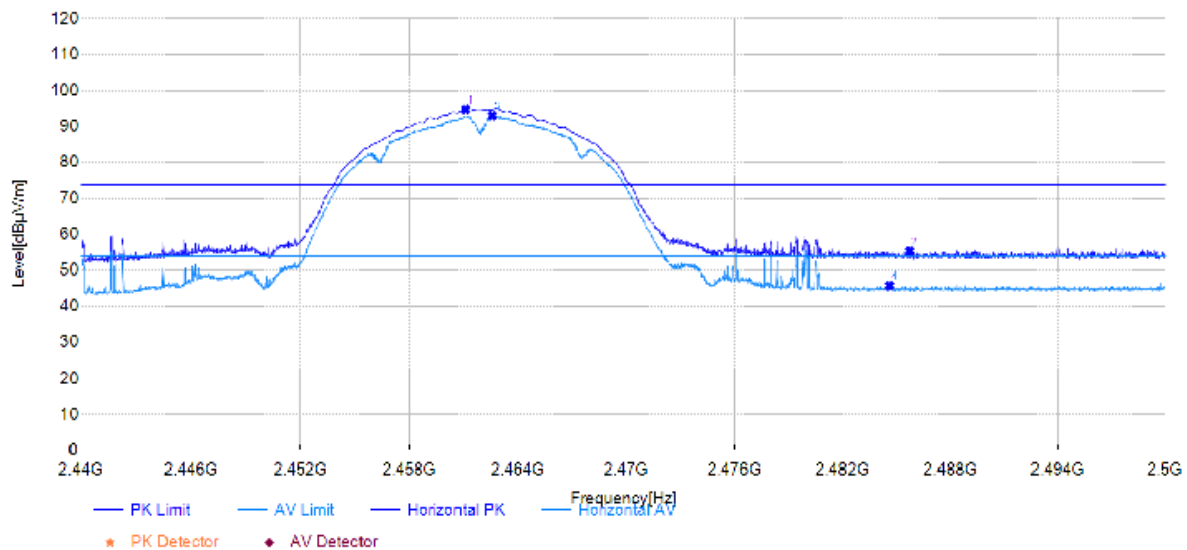


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2461.10	58.92	94.73	35.81	/	/	150	311	PK	Horizontal	PASS
2	2485.75	19.32	55.35	36.03	74.00	18.65	150	176	PK	Horizontal	PASS
3	2462.58	57.17	93.00	35.83	/	/	150	311	AV	Horizontal	PASS
4	2484.61	9.76	45.78	36.02	54.00	8.22	150	303	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

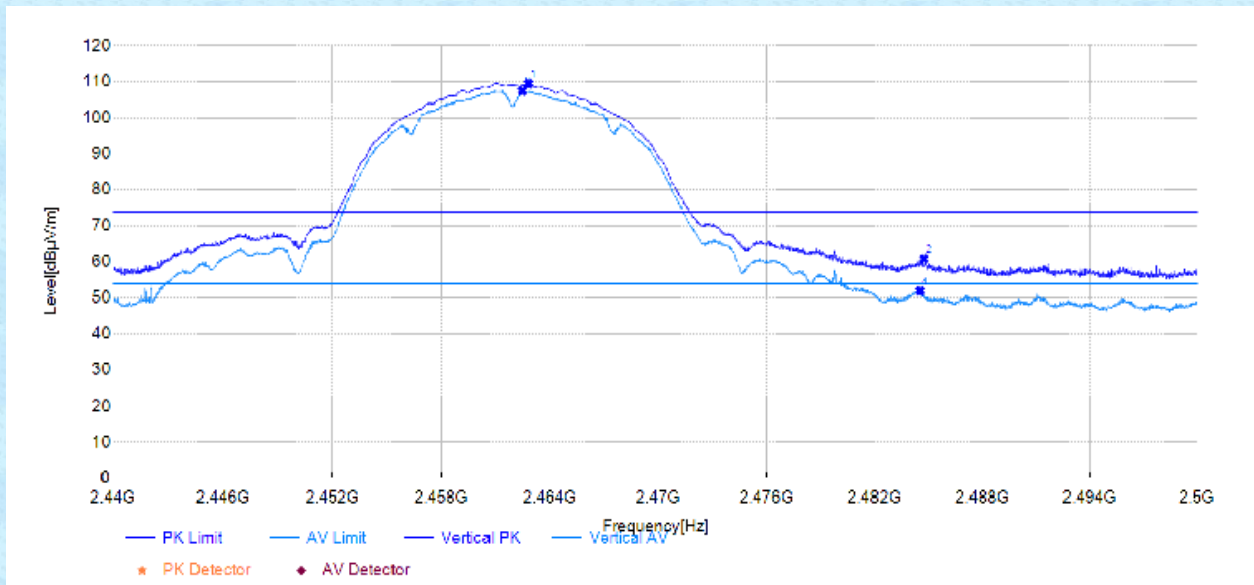


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2462.82	73.48	109.39	35.91	/	/	150	271	PK	Vertical	PASS
2	2484.74	24.68	60.79	36.11	74.00	13.21	150	0	PK	Vertical	PASS
3	2462.48	71.52	107.42	35.90	/	/	150	352	AV	Vertical	PASS
4	2484.53	15.77	51.88	36.11	54.00	2.12	150	0	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB40
Test Date:	2026-05-15	Voltage:	DC 12V from adapter
Environment:	Temp: 24.5°C; Humi:46%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11g at Channel 2412MHz		

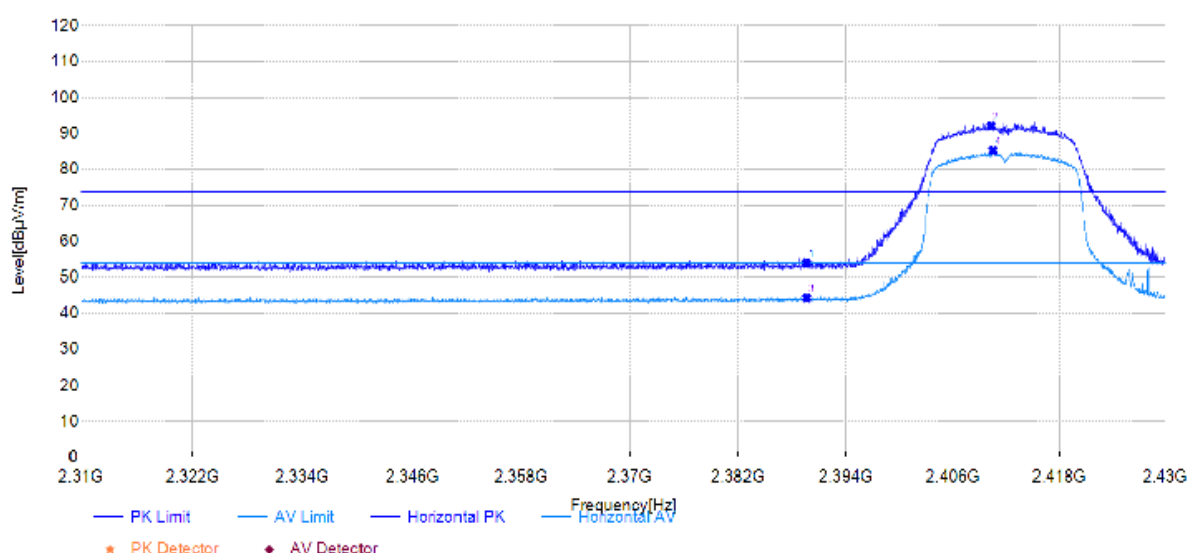


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2389.64	18.62	53.92	35.30	74.00	20.08	150	196	PK	Horizontal	PASS
2	2410.35	56.78	92.13	35.35	/	/	150	184	PK	Horizontal	PASS
3	2389.67	9.05	44.35	35.30	54.00	9.65	150	359	AV	Horizontal	PASS
4	2410.56	49.89	85.24	35.35	/	/	150	3	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

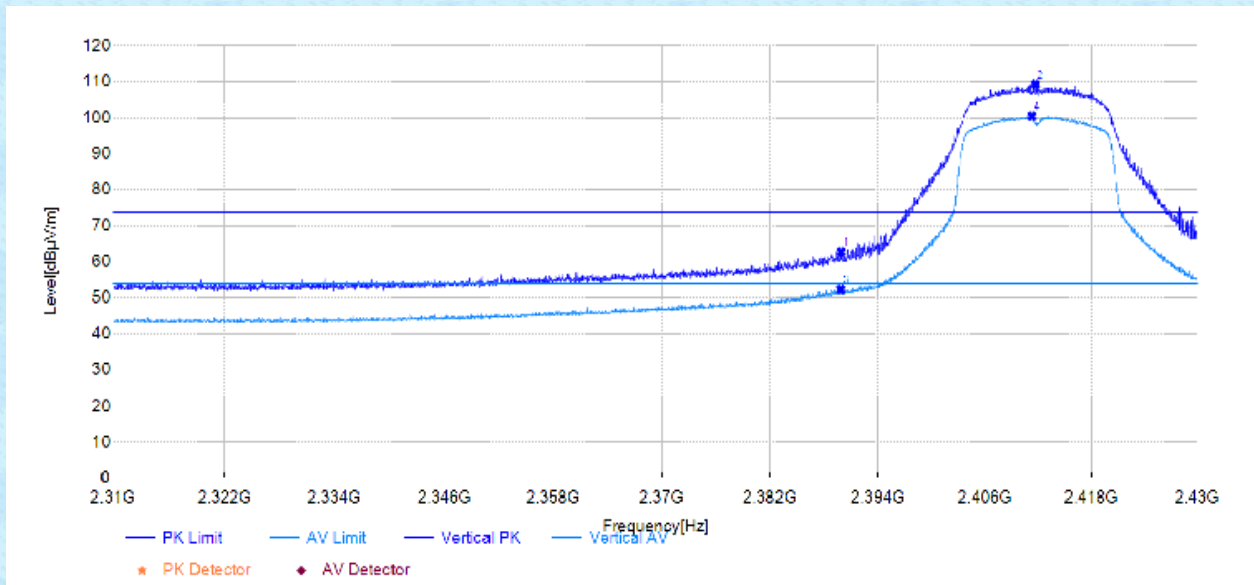


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2389.94	27.41	62.76	35.35	74.00	11.24	150	127	PK	Vertical	PASS
2	2411.73	73.74	109.17	35.43	/	/	150	213	PK	Vertical	PASS
3	2389.91	16.89	52.24	35.35	54.00	1.76	150	234	AV	Vertical	PASS
4	2411.34	65.09	100.52	35.43	/	/	150	143	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB40
Test Date:	2026-05-15	Voltage:	DC 12V from adapter
Environment:	Temp: 23.6°C; Humi:41%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11g at Channel 2462MHz		

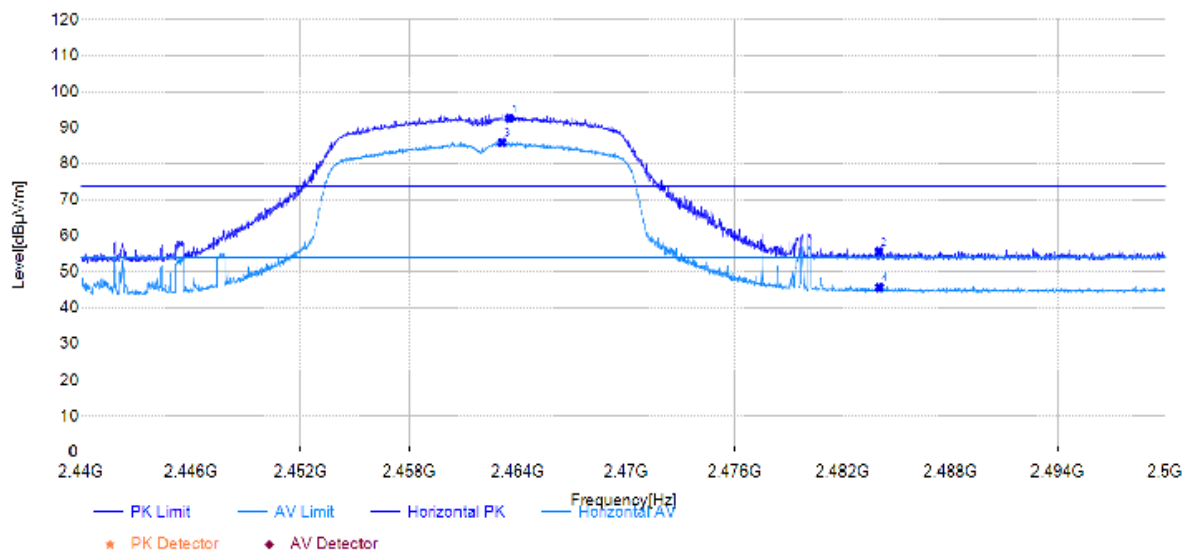


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2463.54	56.80	92.63	35.83	/	/	150	309	PK	Horizontal	PASS
2	2484.02	19.54	55.56	36.02	74.00	18.44	150	346	PK	Horizontal	PASS
3	2463.12	50.02	85.85	35.83	/	/	150	309	AV	Horizontal	PASS
4	2484.04	9.74	45.76	36.02	54.00	8.24	150	359	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

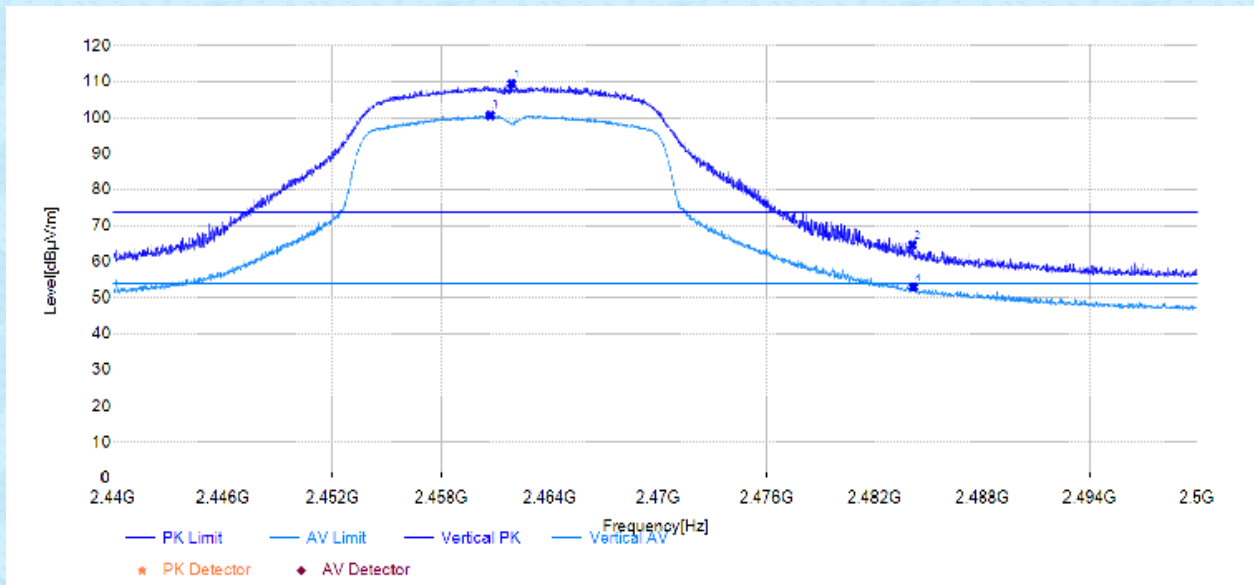


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2461.88	73.46	109.36	35.90	/	/	150	308	PK	Vertical	PASS
2	2484.10	28.59	64.70	36.11	74.00	9.30	150	360	PK	Vertical	PASS
3	2460.71	64.82	100.71	35.89	/	/	150	328	AV	Vertical	PASS
4	2484.16	16.80	52.91	36.11	54.00	1.09	150	357	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB40
Test Date:	2026-05-15	Voltage:	DC 12V from adapter
Environment:	Temp: 23.6°C; Humi:41%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11n-HT20 at Channel 2412MHz		

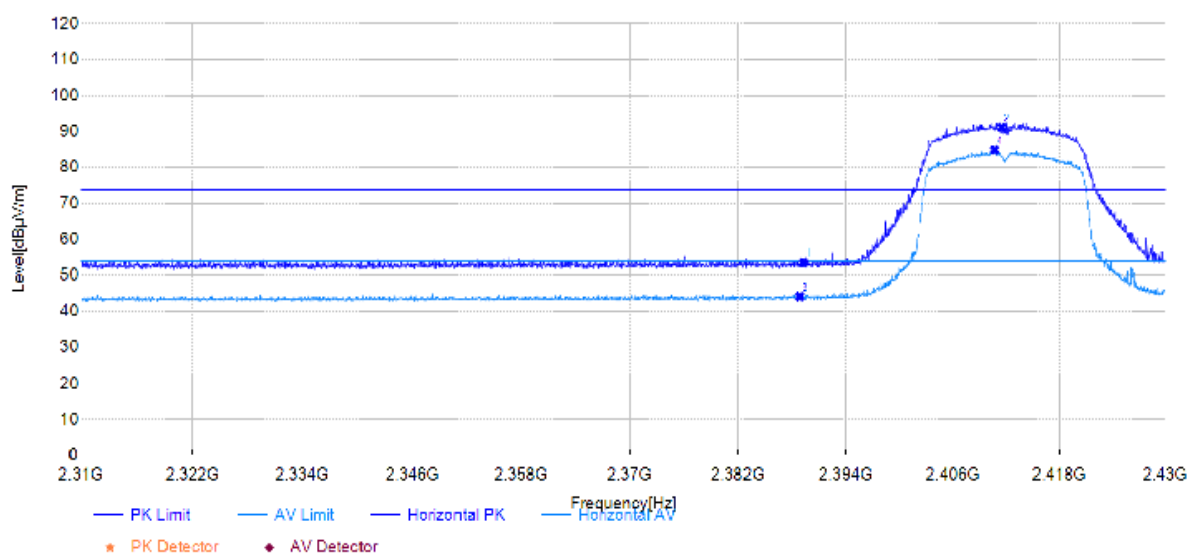


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2389.31	18.18	53.48	35.30	74.00	20.52	150	178	PK	Horizontal	PASS
2	2411.55	55.77	91.14	35.37	/	/	150	174	PK	Horizontal	PASS
3	2388.89	8.87	44.16	35.29	54.00	9.84	150	23	AV	Horizontal	PASS
4	2410.74	49.46	84.82	35.36	/	/	150	7	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

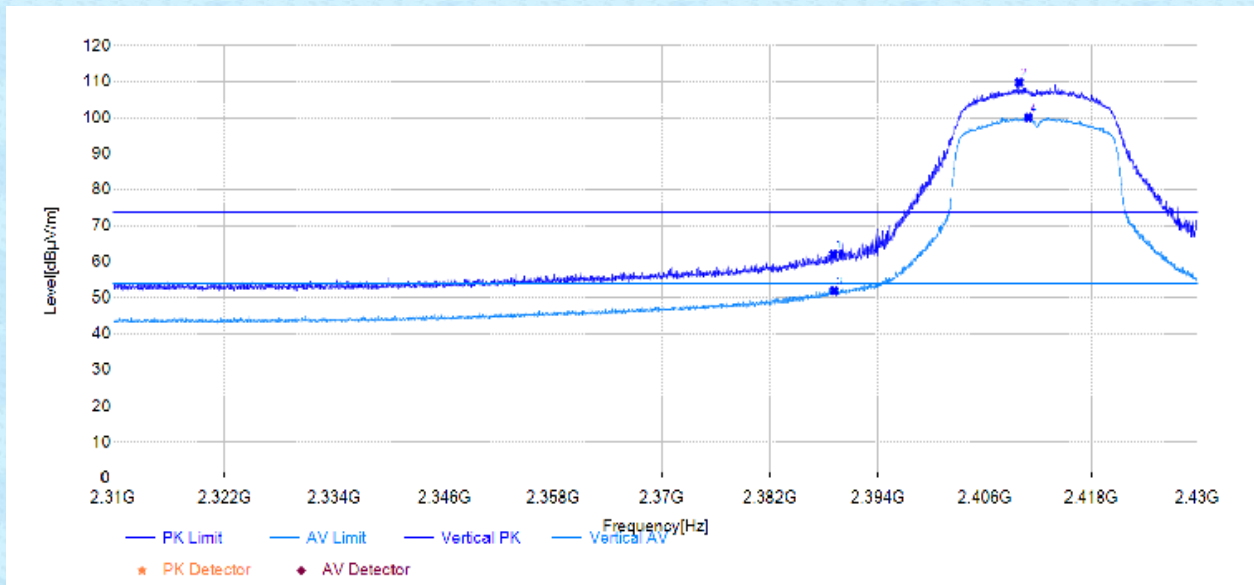


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2389.07	26.72	62.07	35.35	74.00	11.93	150	312	PK	Vertical	PASS
2	2409.89	74.29	109.71	35.42	/	/	150	296	PK	Vertical	PASS
3	2389.16	16.51	51.86	35.35	54.00	2.14	150	133	AV	Vertical	PASS
4	2410.95	64.69	100.11	35.42	/	/	150	138	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB40
Test Date:	2026-05-15	Voltage:	DC 12V from adapter
Environment:	Temp: 24.5°C; Humi:46%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11n-HT20 at Channel 2462MHz		

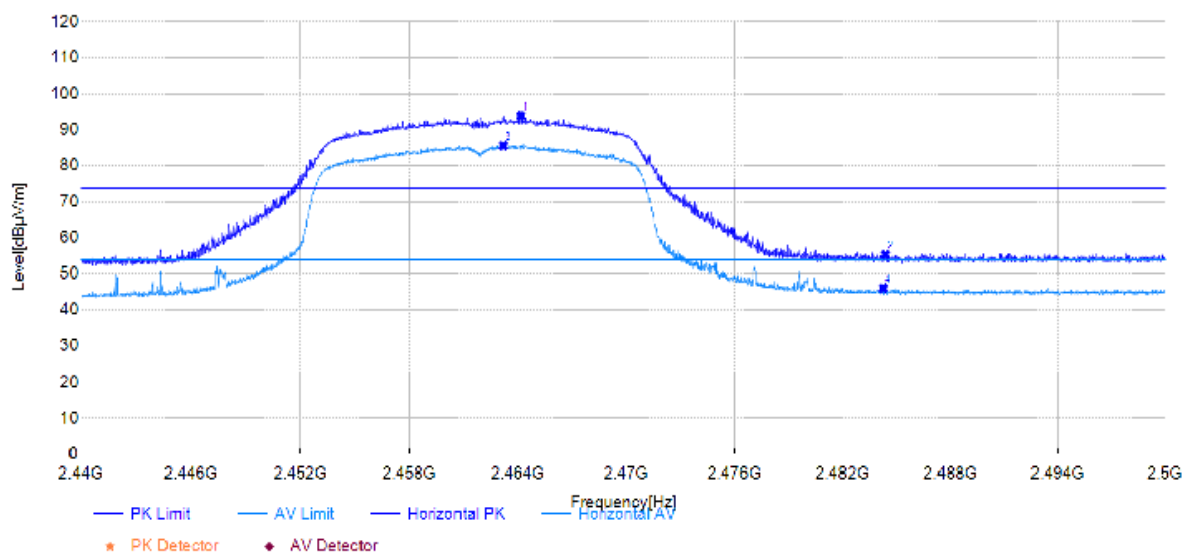


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2464.17	57.99	93.83	35.84	/	/	150	309	PK	Horizontal	PASS
2	2484.38	19.26	55.28	36.02	74.00	18.72	150	360	PK	Horizontal	PASS
3	2463.20	49.69	85.52	35.83	/	/	150	309	AV	Horizontal	PASS
4	2484.26	10.03	46.05	36.02	54.00	7.95	150	158	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

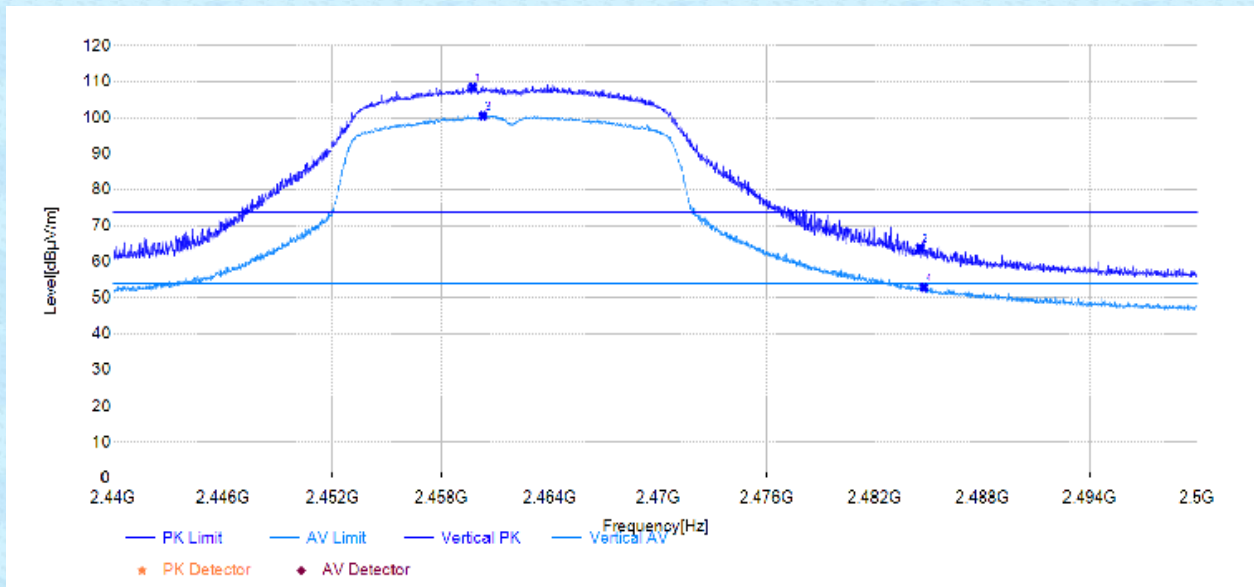

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2459.76	72.50	108.38	35.88	/	/	150	281	PK	Vertical	PASS
2	2484.53	27.74	63.85	36.11	74.00	10.15	150	0	PK	Vertical	PASS
3	2460.33	64.71	100.60	35.89	/	/	150	272	AV	Vertical	PASS
4	2484.74	16.69	52.80	36.11	54.00	1.20	150	318	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----