TEST REPORT
On behalf of

Signify (China) Investment Co., Ltd

Product Name: Miscellaneous Controls

Model No.: SC1500/05, SC1500/10, SC1500/15

FCC ID: 2AGBW-SC1500

Prepared For: Signify (China) Investment Co., Ltd
Building no.9, Lane 888, Tianlin Road,
Minhang District, Shanghai 200233, China

Prepared By: Audix Technology (Shanghai) Co., Ltd.
3F and 4F, 34Bldg, 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai 200233, China

Tel: +86-21-64955500
Fax: +86-21-64955491

TESTING
NVLAP LAB CODE 200371-0

File No.	:	C1D1911021
Report No.	:	ACI-F19371
Date of Test	:	2019.12.18-25
Date of Report	:	2019.12.28

The statement is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.
The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

TABLE OF CONTENTS

Page

1 SUMMARY OF STANDARDS AND RESULTS 5
1.1 Description of Standards and Results 5
2 GENERAL INFORMATION 6
2.1 Description of Equipment Under Test 6
2.2 EUT Specifications Assessed in Current Report 7
2.3 Test Information 7
2.4 Supported equipment 7
2.5 Description of Test Facility 7
3 CONDUCTED EMISSION TEST 8
3.1 Test Equipment 8
3.2 Block Diagram of Test Setup 8
3.3 Conducted Emission Limits (§15.207) 9
3.4 Test Configuration 9
3.5 Operating Condition of EUT 9
3.6 Test Procedures 9
3.7 Test Results 10
4 RADIATED EMISSION TEST 12
4.1 Test Equipment 12
4.2 Block Diagram of Test Setup 12
4.3 Radiated Emission Limit (§15.209] 13
4.4 Test Configuration 13
4.5 Operating Condition of EUT 14
4.6 Test Procedures 14
4.7 Test Results 15
5 6 DB BANDWIDTH MEASUREMENT 22
5.1 Test Equipment 22
5.2 Block Diagram of Test Setup 22
5.3 Specification Limits (§15.247(a)(2)) 22
5.4 Operating Condition of EUT 22
5.5 Test Procedure 22
5.6 Test Results 23
6 MAXIMUM PEAK OUTPUT POWER MEASUREMENT 26
6.1 Test Equipment 26
6.2 Block Diagram of Test Setup 26
6.3 Specification Limits ((§15.247(b)(3)) 26
6.4 Operating Condition of EUT 26
6.5 Test Procedure 26
6.6 Test Results 27
7 EMISSION LIMITATIONS MEASUREMENT 30
7.1 Test Equipment 30
7.2 Block Diagram of Test Setup 30
7.3 Specification Limits (§15.247(d)) 30
7.4 Operating Condition of EUT 30
7.5 Test Procedure 30

7.6 Test Results 32
8 BAND EDGES MEASUREMENT 39
8.1 Test Equipment 39
8.2 Block Diagram of Test Setup 39
8.3 Specification Limits (§15.247(d)) 39
8.4 Operating Condition of EUT 39
8.5 Test Procedure 39
8.6 Test Results 40
9 POWER SPECTRAL DENSITY MEASUREMENT 42
9.1 Test Equipment 42
9.2 Block Diagram of Test Setup 42
9.3 Specification Limits (§15.247(e)) 42
9.4 Operating Condition of EUT 42
9.5 Test Procedure 42
9.6 Test Results 43
10 DEVIATION TO TEST SPECIFICATIONS 46
11 MEASUREMENT UNCERTAINTY LIST 47

TEST REPORT

Applicant	:	Signify (China) Investment Co., Ltd
EUT Description	:	Miscellaneous Controls
		(A) Model No. : Refer to Sec.2.1
		(B) Power Supply : 12-20.5V; 25mA
		(C) Test Voltage : DC16V

Test Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C
AND ANSI C63.10-2013

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report also shows that the EUT (M/N: Refer to Sec2.1), which was tested is technically compliance with the FCC limits.

This report applies to above tested Sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

Date of Test : 2019.12.18-25 Date of Report : 2019.12.28

Producer : Jarey Lu
JAREY LU / Supervisor

Reviewer : Byron Wu
BYRON WU / Deputy Assistant Manager

AUDIX® For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

Signatory :
Authorized Signature(s) BYRON KWO/Assistant General Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description / Test Item	Test Standard	Results	Meets Limit
EMISSION			
Conducted Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.207
Radiated Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.209(a) 15.205(a)(c)
6 dB Bandwidth Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(a)(2)
Maximum Peak Output Power Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(b)(3)
Emission Limitations Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(d)
Band Edge Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(d)
Power Spectral Density Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(e)
N/A is an abbreviation for Not Applicable.			

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description	:	Miscellaneous Controls
Type of EUT	:	☑ Production ☐ Pre-product ☐ Pro-type
Model Number	:	SC1500/05, SC1500/10, SC1500/15
Note	:	SC1500/05, SC1500/10, SC1500/15 are identical with each other, except the color of the front cover is different. /05 is white, /10 is grey and /15 is black.
Tested Model	:	SC1500/05
Radio Tech	:	Bluetooth v4.2 BLE Zigbee
Channel Freq.	:	BLE: 2402MHz-2480MHz; Zigbee: 2405MHz-2480MHz.
Modulation	:	BLE: GFSK Zigbee: OQPSK
Antenna Info.	:	Antenna Type: PCB Antenna Antenna Gain: 2.35 dBi The Antenna is permanently attached to the intentional radiator that is comply with 15.203 requirement.
Test Mode	:	The EUT was set at continuous TX during all the test in the report
Applicant	:	Signify (China) Investment Co., Ltd Building no.9, Lane 888, Tianlin Road, Minhang District, Shanghai 200233, China
Manufacturer	:	same as Applicant
Factory	:	Fideltronik Poland Sp.z.o.o. UL. Beniowskiego 1 34-200, Sucha Beskidzka Poland Postcode/Zip Code: 34-200

2.2 EUT Specifications Assessed in Current Report

Mode	Modulation	Data Rate(Mbps)
BLE	GFSK	1

Channel List			
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
…	…	…	…
…	…	…	…
…	…	…	…
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

2.3 Test Information

The test software "Philips MultiOne" was used to control EUT work in TX mode, and select test channel.

Modulation	data rate (Mbps)	Test Channel		Frequency (MHz)
BLE	1	Low:	00	2402
		Middle:	20	2442
		High:	39	2480

2.4 Supported equipment

Model Name : LED Electronic Driver
Model Number : XI040C119V054VPT1

2.5 Description of Test Facility

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F and 4F, 34Bldg, 680 Guiping Rd., Caohejing Hi-Tech Park, Shanghai 200233, China.

Accredited by NVLAP, Lab Code : 200371-0

FCC Designation Number : CN5027

Test Firm Registration Number : 954668

3 CONDUCTED EMISSION TEST

3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESCI	101302	Apr 27, 2019	Apr 26, 2020
2.	Artificial Mains Network (AMN)	R&S	ENV4200	100125	Jun 24, 2019	Jun 23, 2020
3.	Software	Audix	E3	6.2009-1-15	--	--

3.2 Block Diagram of Test Setup

3.2.1 EUT & Peripherals



3.2.2 Conducted Disturbance Test Setup

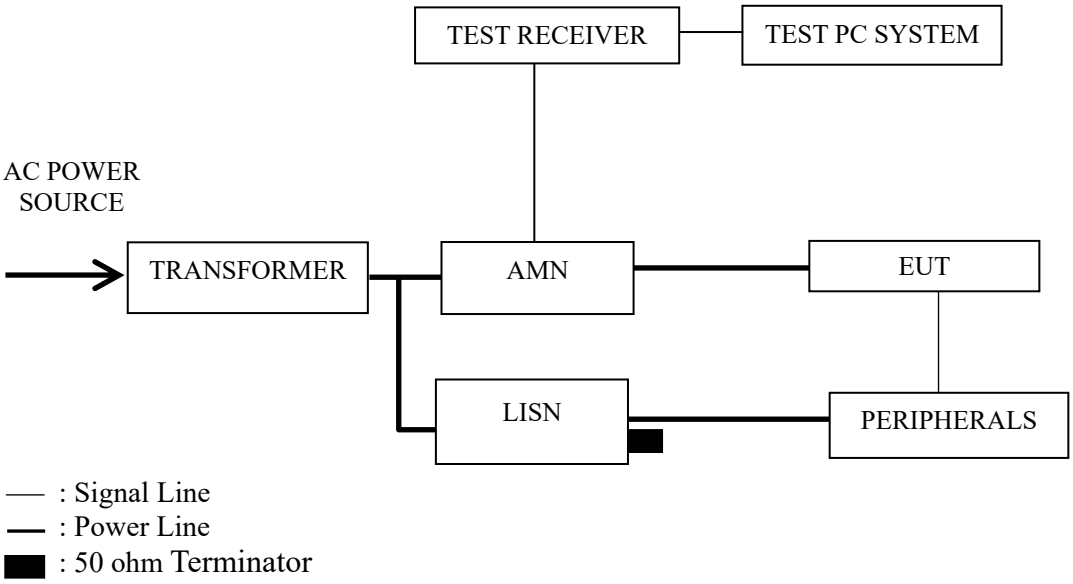

3.3 Conducted Emission Limits (§15.207)

Frequency Range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE 1 – The lower limit shall apply at the transition frequencies.

NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz

3.4 Test Configuration

The EUT (listed in Sec.2.1) was installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner which tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

3.5.1 Setup the EUT as shown in Sec. 3.2.

3.5.2 Turn on the power of all equipment.

3.5.3 Turn the EUT on the test mode, and then test.

3.6 Test Procedures

The EUT was placed upon a non-metallic table, which is 0.8 m above the horizontal conducting ground plane and 0.4 m from a vertical reference plane. The EUT was connected to the power mains through an Artificial Mains Network (AMN) to provide a 50 Ω coupling impedance for the measuring equipment. Both sides of AC line (Line & Neutral) were checked to find out the maximum conducted emission according to FCC Part 15 Subpart C and ANSI C63.10: 2013 requirements during conducted disturbance test.

The I.F. bandwidth of Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

Test with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. (According to KDB 174176 D01 Line Conducted FAQ)

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7

3.7 Test Results

< PASS >

The frequency and amplitude of the highest conducted emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Worst case emission:

No.	Operation	Modulation	Channel	Frequency (MHz)	Data Page
1.	Normal	BLE	--	--	P11

NOTE 1 – Level = Read Level + AMN Factor + Cable Loss
NOTE 2 – "QP" means "Quasi-Peak" values
NOTE 3 – The emission levels which not reported are too low against the official limit.

Worst case emission

EUT	:	Miscellaneous Controls	Temperature :	22℃
Model No.	:	SC1500/05	Humidity :	51%RH
Test Mode	:	Normal	Date of Test :	2019.12.25

Polarization	Frequency (MHz)	Meter Reading dB (μV)	AMN Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Line	0.22319	29.13	10.43	0.04	39.6	62.7	23.1	QP
	0.22319	27.41	10.43	0.04	37.88	52.7	14.82	Average
	0.54934	21.45	10.33	0.04	31.82	56	24.18	QP
	0.54934	19.35	10.33	0.04	29.72	46	16.28	Average
	0.73519	14.92	10.32	0.05	25.29	56	30.71	QP
	0.73519	6.93	10.32	0.05	17.3	46	28.7	Average
	1.716	9.5	10.3	0.06	19.86	56	36.14	QP
	1.716	6.35	10.3	0.06	16.71	46	29.29	Average
	12.988	23.31	10.26	0.07	33.64	60	26.36	QP
	12.988	18.14	10.26	0.07	28.47	50	21.53	Average
	28.152	20.25	10.32	0.09	30.66	60	29.34	QP
	28.152	13.43	10.32	0.09	23.84	50	26.16	Average
Neutral	0.22797	22.21	10.42	0.04	32.67	62.52	29.85	QP
	0.22797	20.42	10.42	0.04	30.88	52.52	21.64	Average
	0.55226	19.85	10.32	0.04	30.21	56	25.79	QP
	0.55226	14.59	10.32	0.04	24.95	46	21.05	Average
	0.73819	18.81	10.32	0.05	29.18	56	26.82	QP
	0.73819	8.38	10.32	0.05	18.75	46	27.25	Average
	1.1	12.05	10.32	0.05	22.42	56	33.58	QP
	1.1	5.21	10.32	0.05	15.58	46	30.42	Average
	12.784	22.1	10.3	0.07	32.47	60	27.53	QP
	12.784	17.61	10.3	0.07	27.98	50	22.02	Average
	28.603	18.93	10.34	0.09	29.36	60	30.64	QP
	28.603	12.46	10.34	0.09	22.89	50	27.11	Average

TEST ENGINEER: Jarey

4 RADIATED EMISSION TEST

4.1 Test Equipment

The following test equipment are used during the radiated emission test in a semi-anechoic chamber:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Preamplifier	Agilent	8447D	2944A06664	Apr 27, 2019	Apr 26, 2020
2.	Preamplifier	HP	8449B	3008A00864	Mar 8, 2019	Mar 7, 2020
3.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jan 05, 2019	Jan 05, 2020
4.	Test Receiver	R&S	ESCI	101303	May 07, 2019	May 06, 2020
5.	Bi-log Antenna	Schwarz beck	VULB 9168	708	Jul 20, 2019	Jul 19, 2020
6.	Horn Antenna	EMCO	3115	9607-4878	Jun 02, 2019	Jun 01, 2020
7.	Horn Antenna	EMCO	3116	00062643	Sep 08, 2019	Sep 07, 2020
8.	Software	Audix	E3	SET00200 9912M295-2	--	--

4.2 Block Diagram of Test Setup

4.2.1 EUT & Peripherals



4.2.2 Below 1GHz

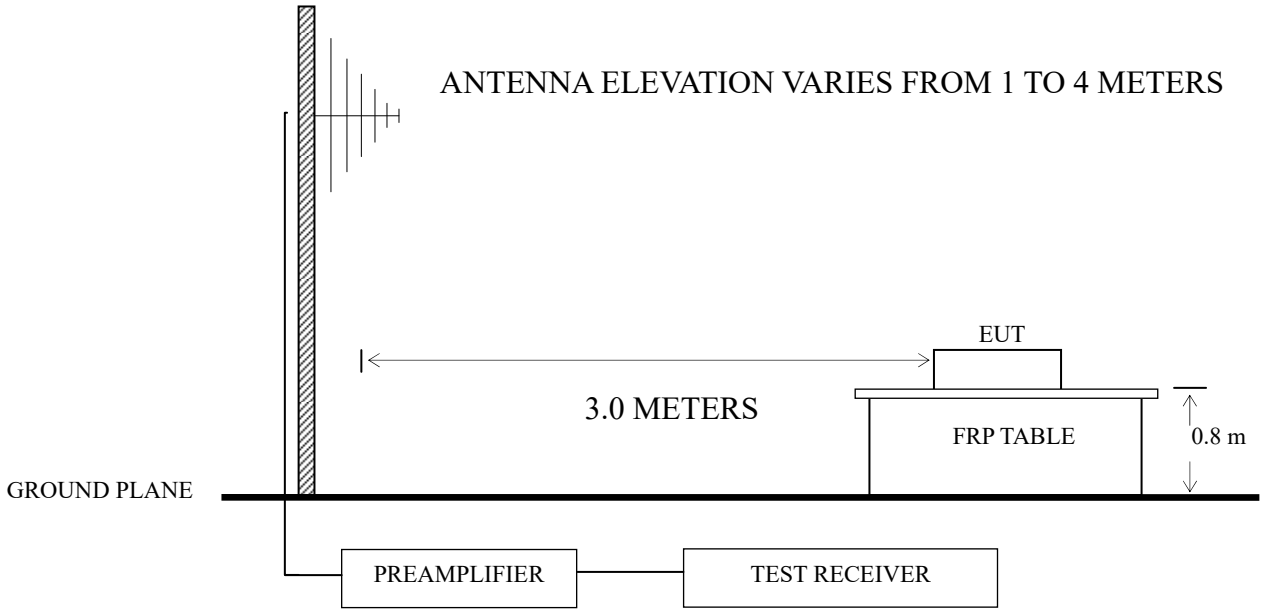

4.2.3 Above 1GHz

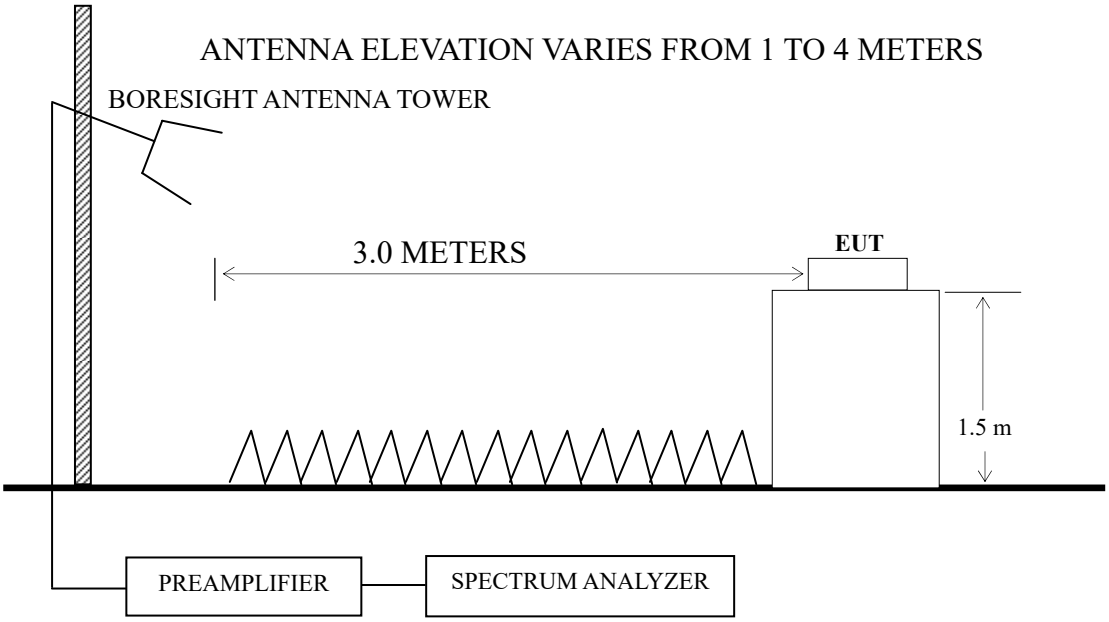

4.3 Radiated Emission Limit (§15.209]

Frequency (MHz)	Distance (m)	Field strength limits (μV/m)	
		(μV/m)	dB(μV/m)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB (μV/m) = 20 log Emission Level (μV/m)
NOTE 2 - The tighter limit applies at the band edges.
NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
NOTE 4 - The limits shown are based on Quasi-peak value detector below or equal to 1GHz and Average value detector above 1GHz.
NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT

4.4 Test Configuration

The EUT (listed in Sec.2.1) and the simulators (listed in Sec.2.2) were installed as shown on Sec.4.2 to meet FCC requirements and operating in a manner that tends to maximize its emission level in a normal application.

4.5 Operating Condition of EUT

4.5.1 Setup the EUT as shown in Sec. 4.2.

4.5.2 Turn on the power of all equipment.

4.5.3 Turn the EUT on the test mode, and then test.

4.6 Test Procedures

Radiated emission test applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. A pre-amp is necessary for this measurement. For measurement above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

The EUT was placed on a turntable. Below 1 GHz, the table height is 80 cm above the reference ground plane. Above 1 GHz, the table height is 1.5 m. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) or Horn antenna was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.10: 2013 requirements during radiated emission test.

The bandwidth of Test Receiver R&S ESCI was set at 120 kHz from 30MHz to 1000MHz.

The bandwidth of the VBW was set at 1MHz and RBW was set at 1MHz for peak emission measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emission above 1GHz for Spectrum Agilent N9010A.

The frequency range from 30 MHz to 25 GHz (Up to 10th harmonics from fundamental frequency) was checked.

All the test results are listed in Sec.4.7.

4.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Frequency range: below 1G (Worst case emission)

No.	Operation	Modulation	Channel	Frequency	Data Page
1.	Transmitting	BLE	00	2402 MHz	P16
2.	Receiving	BLE	39	2480 MHz	P17

Frequency range: above 1G

No.	Operation	Modulation	Channel	Frequency	Data Page
1.	Transmitting	BLE	00	2402 MHz	P18
2.	Transmitting	BLE	20	2442 MHz	P18
3.	Transmitting	BLE	39	2480 MHz	P19
4.	Receiving	BLE	39	2480 MHz	P20

Restricted bands:

No.	Operation	Modulation	Channel	Frequency	Data Page
1.	Transmitting	BLE	Cabinet Emission		P21

NOTE 1 – Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
NOTE 2 – "QP" means "Quasi-Peak" values
NOTE 3 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.
NOTE 4 – The emission levels which not reported are too low against the official limit.
NOTE 5 – The emission levels recorded below is data of EUT configured in Lying direction, for Lying direction was the maximum emission direction during the test. The data of Side & Standing direction are too low against the official limit to be reported.
NOTE 6 – All reading are Quasi-Peak values below or equal to 1GHz, Peak and Average values above 1GHz.
For above 1GHz test, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
NOTE 7 – The frequency range 2310-2390MHz & 2483.5-2500MHz were tested for Restricted bands.

Worst case emission < 1GHz

EUT	:	Miscellaneous Controls	Temperature :	22℃
Model No.	:	SC1500/05	Humidity :	51%RH
Test Mode	:	Transmitting	Date of Test :	2019.12.22

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	41.64	35.88	17.78	0.75	27.61	26.8	40	13.2	QP
	56.19	36.03	18.33	0.85	27.6	27.61	40	12.39	QP
	128.94	41.12	18.05	1.28	27.38	33.07	43.5	10.43	QP
	138.64	41.35	19.27	1.33	27.31	34.64	43.5	8.86	QP
	278.32	28.23	19.38	1.89	26.84	22.66	46	23.34	QP
	853.53	25.06	28.3	3.16	27.67	28.85	46	17.15	QP
Vertical	41.277	35.7	17.96	0.75	27.61	26.8	40	13.2	QP
	55.805	35.86	18.5	0.85	27.6	27.61	40	12.39	QP
	128.56	41.13	18.05	1.27	27.38	33.07	43.5	10.43	QP
	139.36	38.67	19.49	1.33	27.31	32.18	43.5	11.32	QP
	307.83	26.08	20.64	1.99	26.87	21.84	46	24.16	QP
	801.79	25.74	28.11	3.09	27.9	29.04	46	16.96	QP

TEST ENGINEER: Jarey

EUT :	Miscellaneous Controls	Temperature :	22℃
Model No. :	SC1500/05	Humidity :	51%RH
Test Mode :	Receiving	Date of Test :	2019.12.22

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	56.19	29.4	18.33	0.85	27.6	20.98	40	19.02	QP
	120.21	37	17.5	1.23	27.44	28.29	43.5	15.21	QP
	140.58	41.55	19.63	1.34	27.3	35.22	43.5	8.28	QP
	282.2	26.79	19.48	1.9	26.83	21.34	46	24.66	QP
	569.32	24.33	24.9	2.63	28	23.86	46	22.14	QP
	943.74	24.07	29.57	3.29	27.41	29.52	46	16.48	QP
Vertical	47.46	35.95	17.64	0.79	27.6	26.78	40	13.22	QP
	56.19	35.08	18.33	0.85	27.6	26.66	40	13.34	QP
	127	41.44	17.73	1.27	27.39	33.05	43.5	10.45	QP
	140.58	41.55	19.63	1.34	27.3	35.22	43.5	8.28	QP
	301.6	26.21	20.26	1.96	26.82	21.61	46	24.39	QP
	843.83	24.65	28.3	3.14	27.73	28.36	46	17.64	QP

TEST ENGINEER: Jarey

Radiated Emission > 1GHz

EUT	:	Miscellaneous Controls	Temperature :	22℃
Model No.	:	SC1500/05	Humidity :	51%RH
Test Mode	:	Transmitting	Date of Test :	2019.12.22

CH00 (2402MHz)

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	1801	45.19	27.27	4.55	37.12	39.89	74	34.11	Peak
	3826	42.55	32.29	6.69	36.52	45.01	74	28.99	Peak
	5032	42.32	33.45	7.73	36.5	47	74	27	Peak
	6427	41	35.34	9.23	36.91	48.66	74	25.34	Peak
	7651	40.82	36.16	10	37.04	49.94	74	24.06	Peak
	8830	40.05	36.68	10.41	35.53	51.61	74	22.39	Peak
Vertical	1837	45.15	27.41	4.6	37.1	40.06	74	33.94	Peak
	3952	42.25	32.64	6.84	36.5	45.23	74	28.77	Peak
	5482	41.13	34.18	8.26	36.55	47.02	74	26.98	Peak
	7003	40.86	35.8	9.76	37.3	49.12	74	24.88	Peak
	7975	41.73	36.29	10.12	36.91	51.23	74	22.77	Peak
	9199	39.75	36.93	10.65	35.26	52.07	74	21.93	Peak

CH20 (2442MHz)

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	1837	44.89	27.41	4.6	37.1	39.8	74	34.2	Peak
	3835	43.08	32.32	6.69	36.51	45.58	74	28.42	Peak
	5599	40.46	34.36	8.44	36.56	46.7	74	27.3	Peak
	6814	40.53	35.66	9.58	37.18	48.59	74	25.41	Peak
	8002	41.04	36.3	10.12	36.9	50.56	74	23.44	Peak
	9037	40.12	36.83	10.55	35.29	52.21	74	21.79	Peak
Vertical	1900	43.81	27.69	4.66	37.06	39.1	74	34.9	Peak
	3628	42.71	31.71	6.53	36.53	44.42	74	29.58	Peak
	5086	41.66	33.55	7.82	36.51	46.52	74	27.48	Peak
	6391	40.49	35.31	9.23	36.88	48.15	74	25.85	Peak
	7696	40.74	36.18	10	37.02	49.9	74	24.1	Peak
	8830	40.24	36.68	10.41	35.53	51.8	74	22.2	Peak

CH39 (2480MHz)

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	1810	44.38	27.3	4.57	37.12	39.13	74	34.87	Peak
	3826	43.44	32.29	6.69	36.52	45.9	74	28.1	Peak
	4960	42.89	33.34	7.67	36.5	47.4	74	26.6	Peak
	5932	41.05	34.89	8.7	36.59	48.05	74	25.95	Peak
	7237	40.99	35.95	9.84	37.2	49.58	74	24.42	Peak
	8434	41	36.39	10.28	36.17	51.5	74	22.5	Peak
Vertical	1810	44.22	27.3	4.57	37.12	38.97	74	35.03	Peak
	3817	42.32	32.26	6.69	36.52	44.75	74	29.25	Peak
	5500	40.27	34.2	8.26	36.55	46.18	74	27.82	Peak
	6787	40.73	35.64	9.58	37.15	48.8	74	25.2	Peak
	7957	40.8	36.29	10.12	36.92	50.29	74	23.71	Peak
	9217	40.18	36.93	10.65	35.25	52.51	74	21.49	Peak

TEST ENGINEER: Jarey

EUT	:	Miscellaneous Controls	Temperature :	22℃
Model No.	:	SC1500/05	Humidity :	51%RH
Test Mode	:	Receiving	Date of Test :	2019.12.22

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2548	43.73	29.66	5.4	36.76	42.03	74	31.97	Peak
	3718	42.43	31.97	6.58	36.53	44.45	74	29.55	Peak
	5374	40.89	34.01	8.17	36.54	46.53	74	27.47	Peak
	6436	39.97	35.34	9.23	36.91	47.63	74	26.37	Peak
	7759	40.35	36.21	10.04	37	49.6	74	24.4	Peak
	8974	41.16	36.78	10.45	35.3	53.09	74	20.91	Peak
Vertical	2548	43.76	29.66	5.4	36.76	42.06	74	31.94	Peak
	3718	43.55	31.97	6.58	36.53	45.57	74	28.43	Peak
	4906	41.14	33.27	7.62	36.5	45.53	74	28.47	Peak
	6526	39.02	35.42	9.32	36.97	46.79	74	27.21	Peak
	7993	40.74	36.3	10.12	36.91	50.25	74	23.75	Peak
	9298	39.62	36.97	10.65	35.24	52	74	22	Peak

TEST ENGINEER: Jarey

Emissions in restricted frequency bands:

EUT	:	Miscellaneous Controls	Temperature :	22℃
Model No.	:	SC1500/05	Humidity :	51%RH
Test Mode	:	Transmitting	Date of Test :	2019.12.22

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2345.7	44.61	29.17	5.21	36.84	42.15	74	31.85	Peak
	2345.7	32.42	29.17	5.21	36.84	29.96	54	24.04	Average
	2385.8	44.81	29.29	5.25	36.83	42.52	74	31.48	Peak
	2385.8	30.45	29.29	5.25	36.83	28.16	54	25.84	Average
	2484.3	52.68	29.56	5.36	36.79	50.81	74	23.19	Peak
	2484.3	38.38	29.56	5.36	36.79	36.51	54	17.49	Average
	2491.3	45.13	29.58	5.36	36.78	43.29	74	30.71	Peak
	2491.3	31.41	29.58	5.36	36.78	29.57	54	24.43	Average
Vertical	2327.3	44.88	29.11	5.17	36.85	42.31	74	31.69	Peak
	2327.3	32.23	29.11	5.17	36.85	29.66	54	24.34	Average
	2384.2	44.27	29.29	5.25	36.83	41.98	74	32.02	Peak
	2384.2	31.52	29.29	5.25	36.83	29.23	54	24.77	Average
	2484.3	47.43	29.56	5.36	36.79	45.56	74	28.44	Peak
	2484.3	32.15	29.56	5.36	36.79	30.28	54	23.72	Average
	2491.9	44.36	29.58	5.36	36.78	42.52	74	31.48	Peak
	2491.9	30.04	29.58	5.36	36.78	28.2	54	25.8	Average

TEST ENGINEER: Jarey

5 6 dB BANDWIDTH MEASUREMENT

5.1 Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jan 05, 2019	Jan 05, 2020

5.2 Block Diagram of Test Setup

5.3 Specification Limits (§15.247(a)(2))

The minimum 6 dB bandwidth shall be at least 500 kHz.

5.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

5.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with settings: RBW = 100kHz, VBW ≥ 3 × RBW.

The 6 dB bandwidth is defined as the total spectrum the power of which is lower than peak power minus 6 dB .

The test procedure is defined in ANSI C63.10-2013 (the 11.8.2 Measurement Procedure “Option 2” was used).

5.6 Test Results

PASSED.

All the test results are attached in next pages.

(Test Date: 2019.12.18 Temperature: 23℃ Humidity: 51 %)

Modulation	Channel	Frequency (MHz)	**6dB Bandwidth (kHz)**	Limit
BLE	00	2402	**657.8**	500 kHz
	20	2442	**659.0**	500 kHz
	39	2480	**655.5**	500 kHz

CH00 (2402 MHz)

CH20 (2442 MHz)

CH39 (2480 MHz)

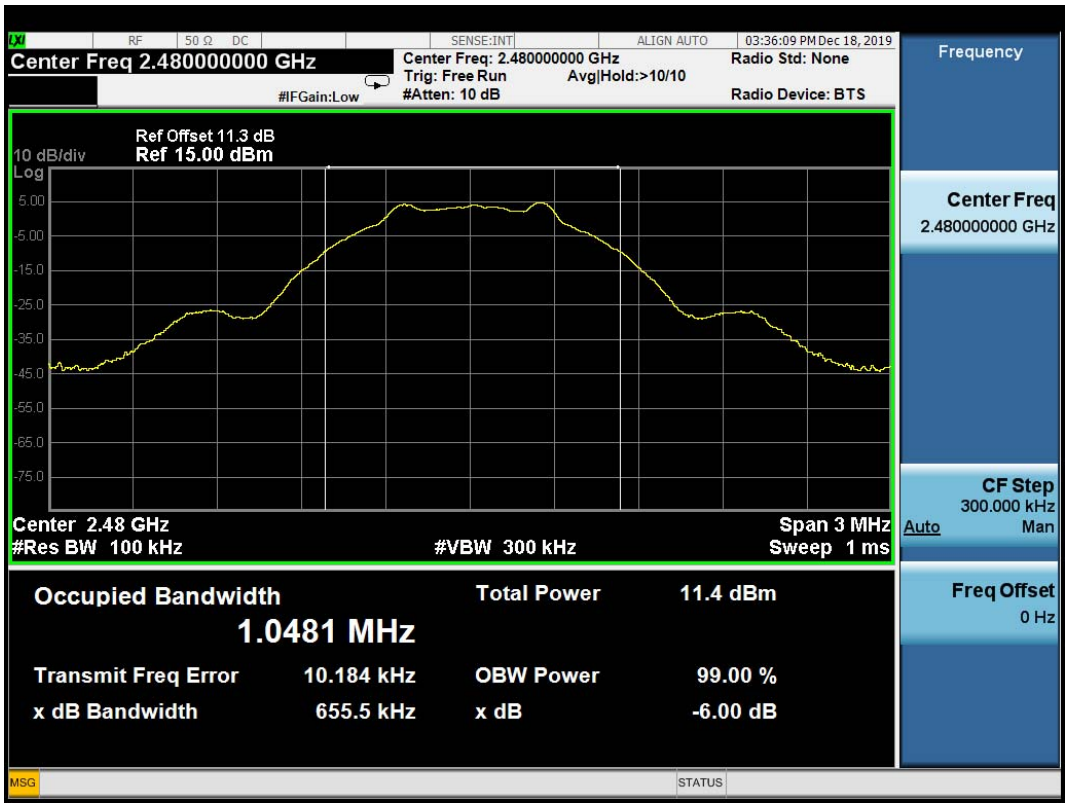

6 MAXIMUM PEAK OUTPUT POWER MEASUREMENT

6.1 Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jan 05, 2019	Jan 05, 2020

6.2 Block Diagram of Test Setup

The Same as Section. 5.2.

6.3 Specification Limits ((§15.247(b)(3))

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5 MHz is: 1 Watt. (30 dBm)

6.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

6.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

a) RBW ≥ DTS Bandwidth.
b) VBW ≥ [3 × RBW].
c) Span ≥ [3 × RBW].
d) Sweep time = auto.
e) Detector = peak.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use peak marker function to determine the peak amplitude level.

The test procedure is defined in ANSI C63.10-2013 (11.9.1.1 Measurement Procedure “ RBW ≥ DTS bandwidth” was used).

6.6 Test Results

PASSED.

All the test results are listed below.

(Test Date: 2019.12.18 Temperature: 23℃ Humidity: 51 %)

Modulation	Channel	Frequency (MHz)	**Peak Output Power (dBm)**	Limit
BLE	00	2402 MHz	**4.617**	30 dBm
	20	2442 MHz	**4.547**	30 dBm
	39	2480 MHz	**4.695**	30 dBm

CH00 (2402 MHz)

CH20 (2442 MHz)

CH39 (2480 MHz)

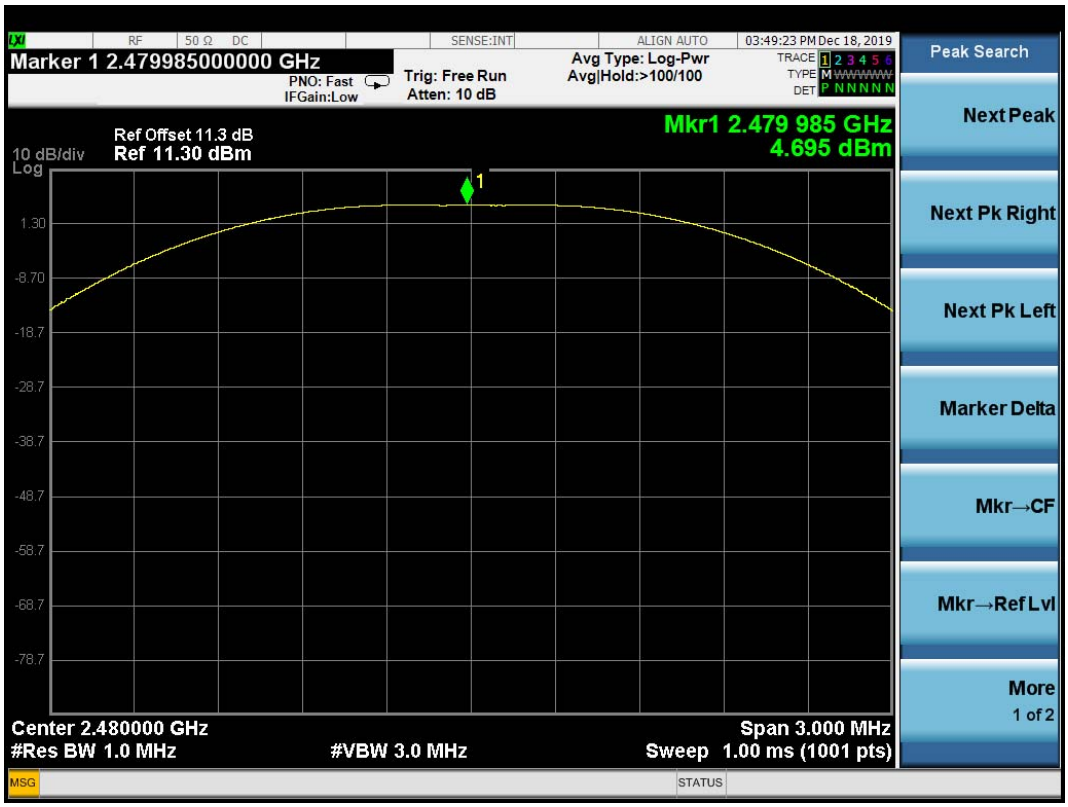

7 EMISSION LIMITATIONS MEASUREMENT

7.1 Test Equipment

The following test equipment was used during the emission limitations test：

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jan 05, 2019	Jan 05, 2020

7.2 Block Diagram of Test Setup

The Same as Section. 5.2.

7.3 Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.
In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). (※This test result attaching to Section. 3.7)

7.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

7.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

Establish a reference level by using the following procedure:
a) Set instrument center frequency to DTS channel center frequency.
b) Set the span to ≥ 1.5 times the DTS bandwidth.
c) Set the RBW = 100 kHz.
d) Set the VBW ≥ [3 × RBW].
e) Detector = peak.
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum PSD level.
Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:
a) Set the center frequency and span to encompass frequency range to be measured.

b) Set the RBW = 100 kHz.
c) Set the VBW ≥ [3 × RBW].
d) Detector = peak.
e) Sweep time = auto couple.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use the peak marker function to determine the maximum amplitude level.
Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Scan up through 10th harmonic.

The test procedure is defined in ANSI C63.10-2013 (11.11.2 Reference level measurement and 11.11.3 Emission level measurement was used).

7.6 Test Results

PASSED.

The test data was attached in the next pages.

(Test Date: 2019.12.18 Temperature: 23℃ Humidity: 51 %)

Modulation	Channel	Frequency (MHz)	Data Page
BLE	00	2402 MHz	P33-34
	20	2442 MHz	P35-36
	39	2480 MHz	P37-38

CH00 (2402 MHz)

Reference level

Emission level

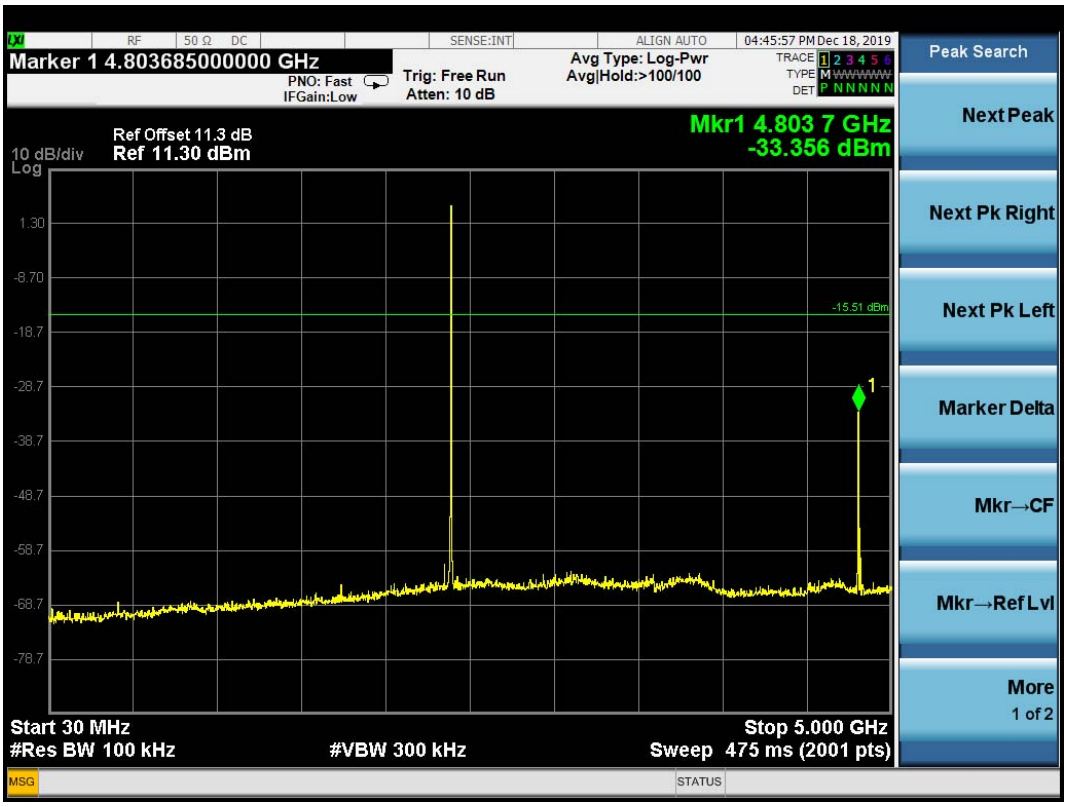

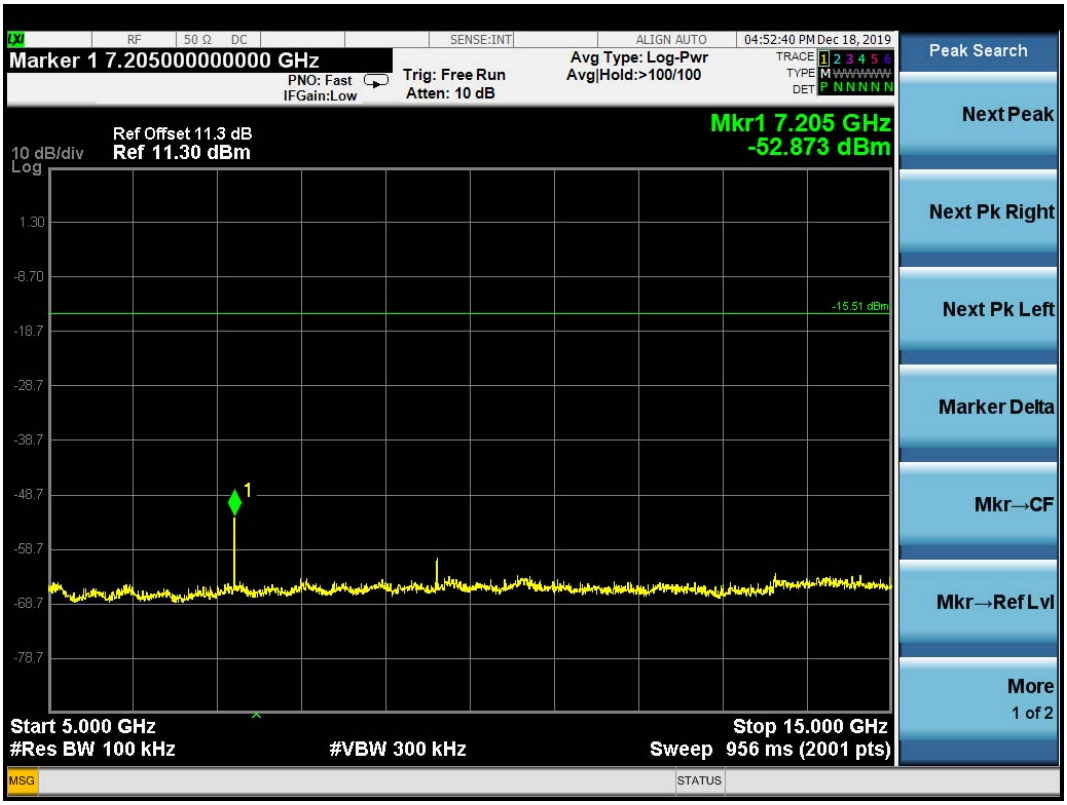
Marker 1 7.205000000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
Atten: 10 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
04:52:40 PM Dec 18, 2019
Ref Offset 11.3 dB
10 dB/div
Ref 11.30 dBm
Mkr1 7.205 GHz
-52.873 dBm
-15.51 dBm
Start 5.000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 15.000 GHz
Sweep 956 ms (2001 pts)
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2

Marker 1 23.650000000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
Atten: 10 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
04:55:07 PM Dec 18, 2019
Ref Offset 11.3 dB
10 dB/div
Ref 11.30 dBm
Mkr1 23.650 GHz
-59.984 dBm
-15.51 dBm
Start 15.000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 25.000 GHz
Sweep 956 ms (2001 pts)
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2

CH20 (2442 MHz)

Reference level

Emission level

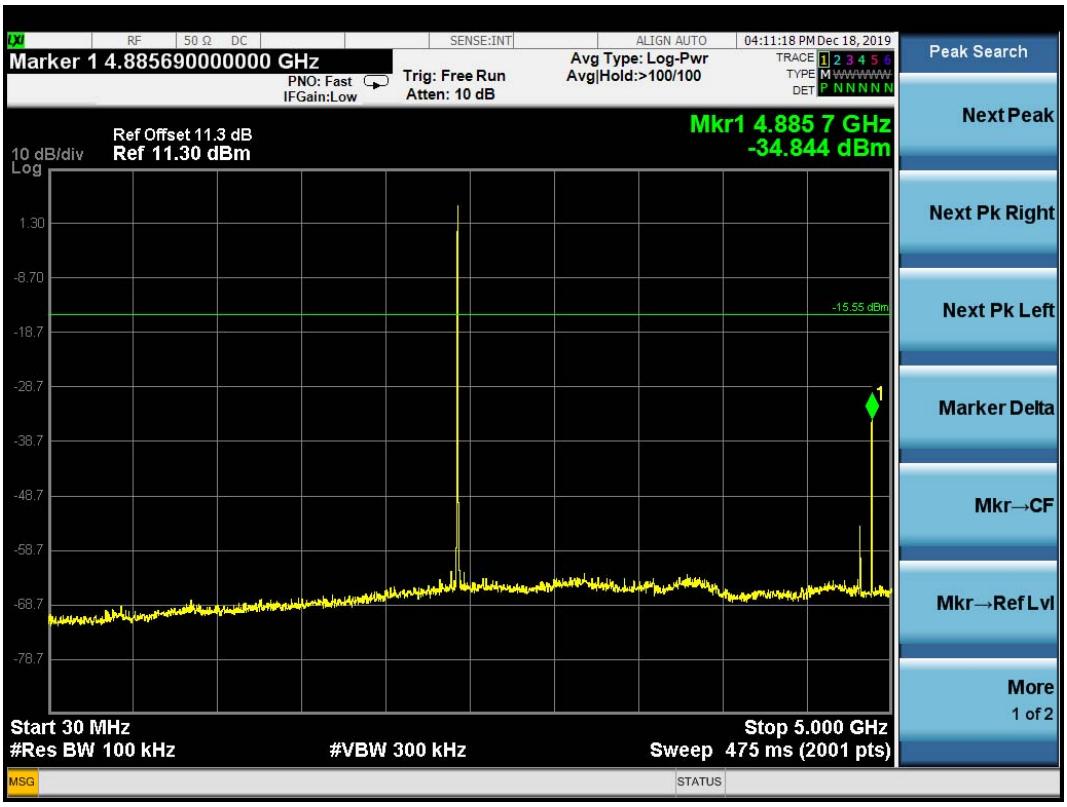

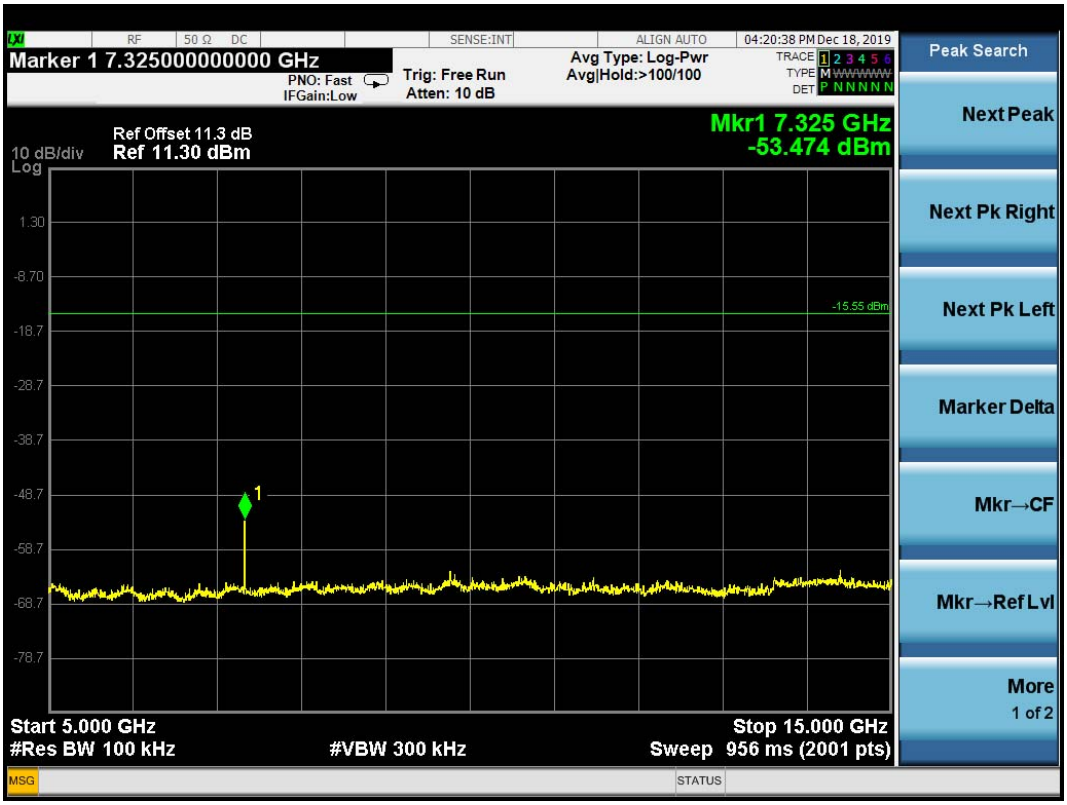
Marker 1 7.325000000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
Atten: 10 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
04:20:38 PM Dec 18, 2019
Ref Offset 11.3 dB
10 dB/div
Ref 11.30 dBm
Mkr1 7.325 GHz
-53.474 dBm
-15.55 dBm
Start 5.000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 15.000 GHz
Sweep 956 ms (2001 pts)
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2

Marker 1 23.620000000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
Atten: 10 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
04:23:10 PM Dec 18, 2019
Ref Offset 11.3 dB
10 dB/div
Ref 11.30 dBm
Mkr1 23.620 GHz
-59.599 dBm
-15.55 dBm
Start 15.000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 25.000 GHz
Sweep 956 ms (2001 pts)
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2

CH39 (2480 MHz)

Reference level

Emission level

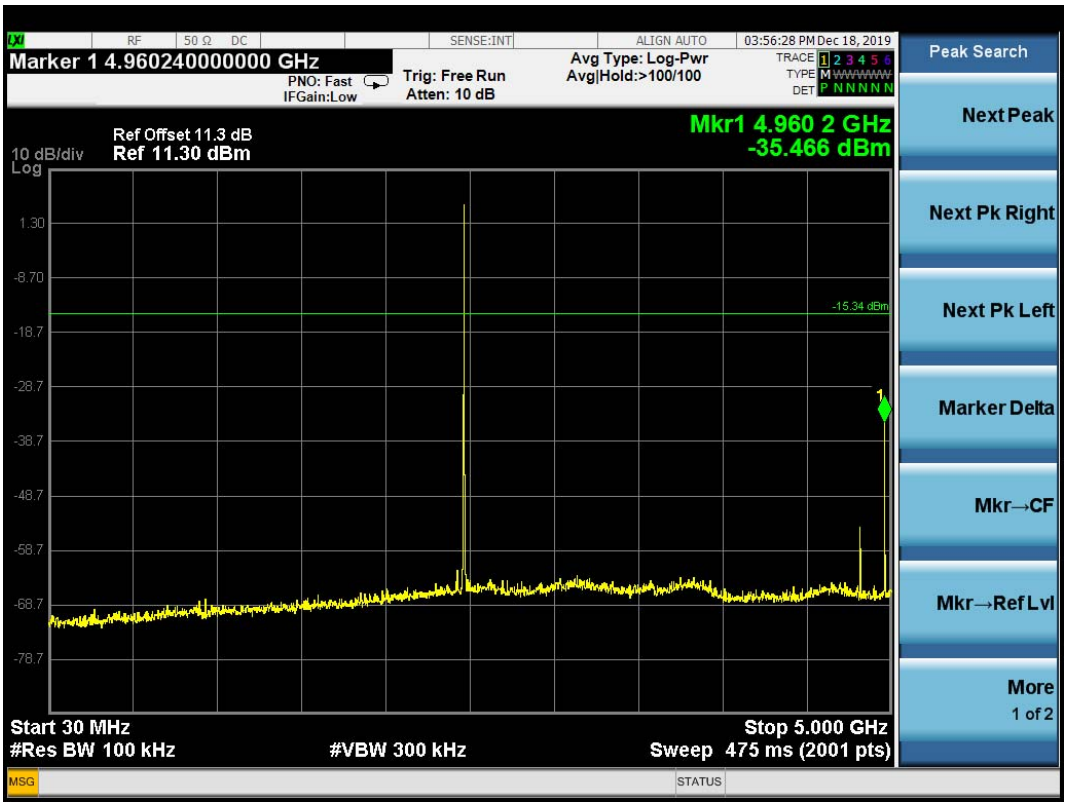

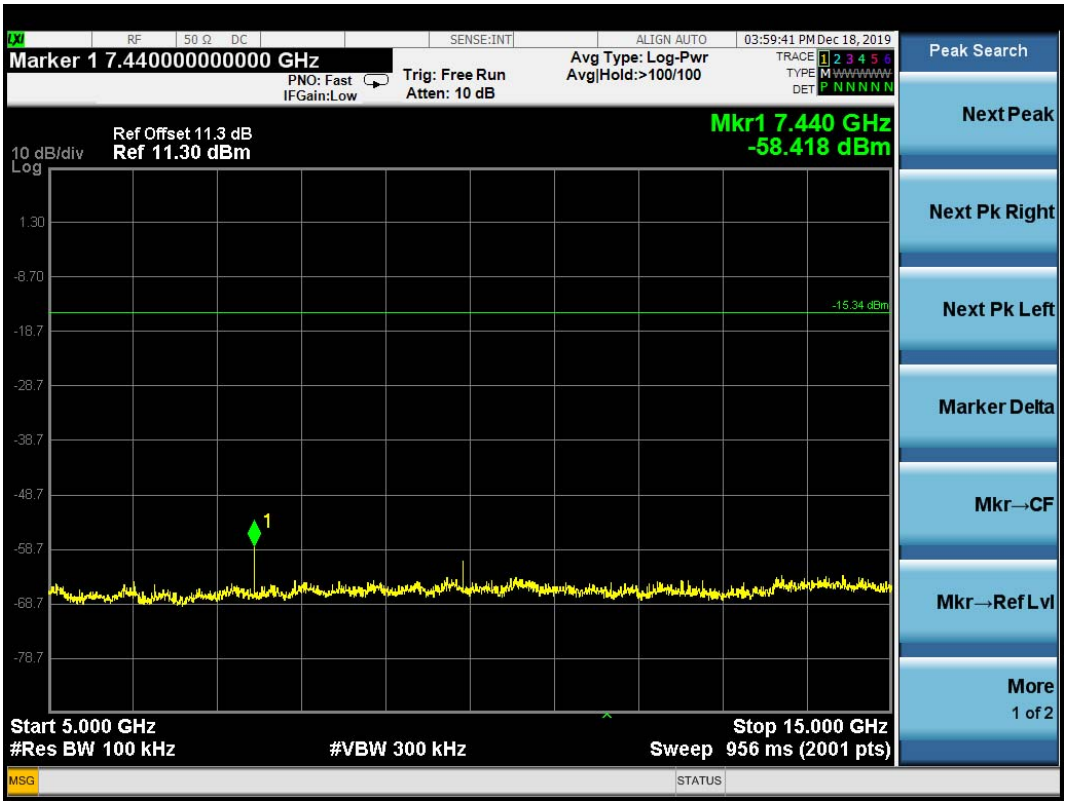
RF 50 Ω DC
SENSE:INT
ALIGN AUTO
03:59:41 PM Dec 18, 2019
Marker 1 7.440000000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
Atten: 10 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
TRACE 1 2 3 4 5 6
TYPE M
DET P N N N N N
Ref Offset 11.3 dB
10 dB/div Ref 11.30 dBm
Log
Mkr1 7.440 GHz
-58.418 dBm
1.30
-8.70
-18.7
-28.7
-38.7
-48.7
-58.7
-68.7
-78.7
-15.34 dBm
Start 5.000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 15.000 GHz
Sweep 956 ms (2001 pts)
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2
MSG
STATUS

RF 50 Ω DC
SENSE:INT
ALIGN AUTO
04:02:56 PM Dec 18, 2019
Marker 1 23.605000000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
Atten: 10 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
TRACE 1 2 3 4 5 6
TYPE M
DET P N N N N N
Ref Offset 11.3 dB
10 dB/div Ref 11.30 dBm
Log
Mkr1 23.605 GHz
-59.359 dBm
1.30
-8.70
-18.7
-28.7
-38.7
-48.7
-58.7
-68.7
-78.7
-15.34 dBm
Start 15.000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 25.000 GHz
Sweep 956 ms (2001 pts)
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2
MSG
STATUS

8 BAND EDGES MEASUREMENT

8.1 Test Equipment

The following test equipment was used during the band edges measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jan 05, 2019	Jan 05, 2020

8.2 Block Diagram of Test Setup

The Same as section. 5.2.

8.3 Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

8.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

8.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. Set RBW of Test Receiver to 100kHz and VBW to 300kHz with suitable frequency span including 100kHz bandwidth from band edge.
The test procedure is defined in ANSI C63.10-2013 (11.11.3 Emission level measurement was used).

8.6 Test Results

PASSED.

All the test results are attached in next pages.

(Test Date: 2019.12.19 Temperature: 23℃ Humidity: 51 %)

Modulation	Location	Channel	Frequency (MHz)	**Delta Marker (dB)**	Result
BLE	Below Band Edge	00	2402	**68.033**	More than **20 dB** below the highest level of the desired power
	Upper Band Edge	39	2480	**58.455**	

CH00 2402MHz (Below Edge 2390 MHz)

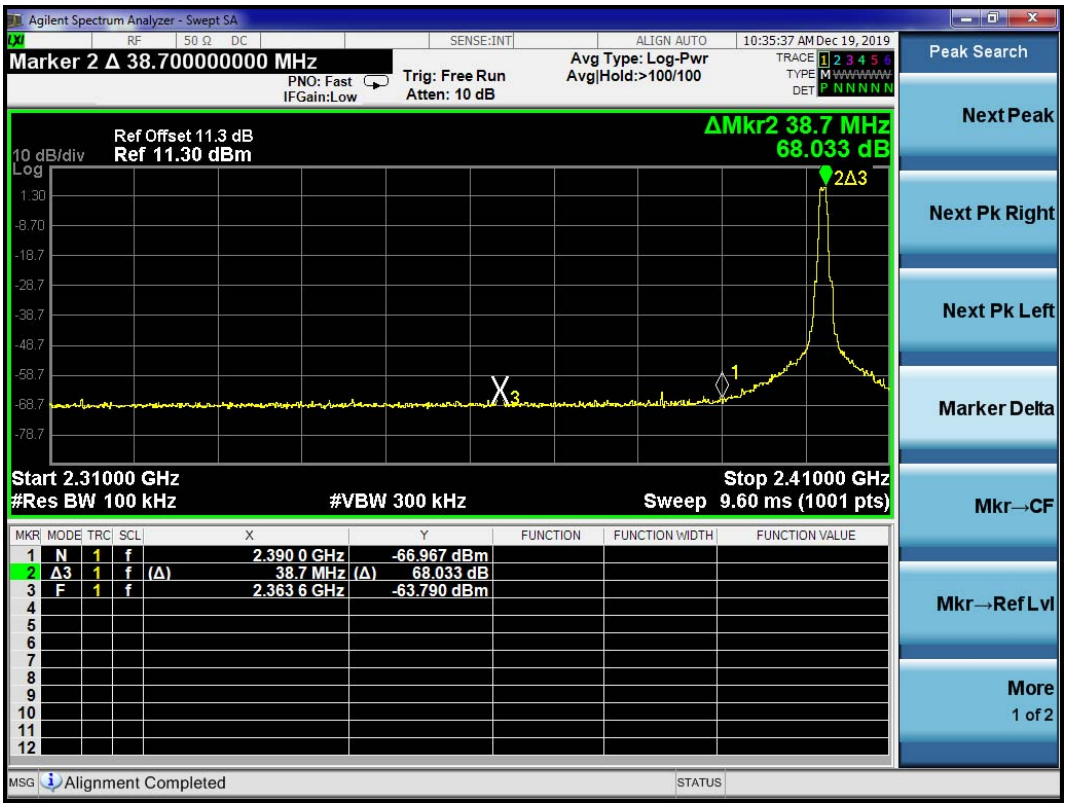

CH39 2480MHz (Upper Edge 2483.5 MHz)

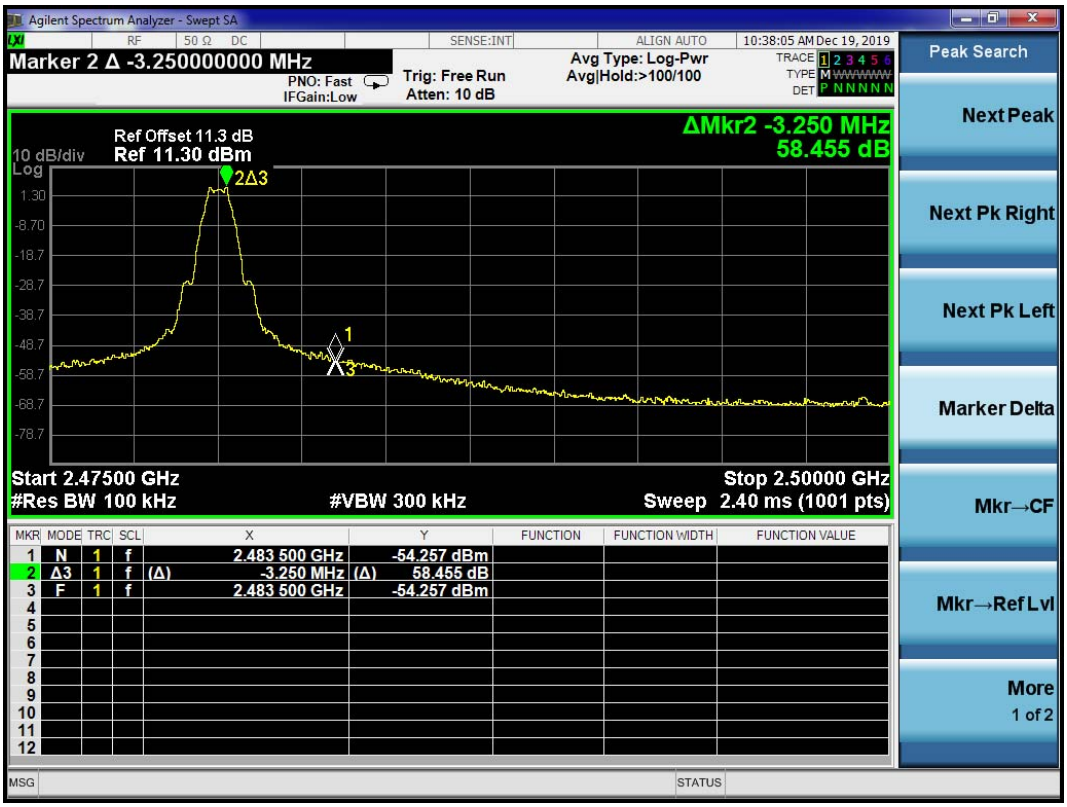

9 POWER SPECTRAL DENSITY MEASUREMENT

9.1 Test Equipment

The following test equipment was used during the power spectral density measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jan 05, 2019	Jan 05, 2020

9.2 Block Diagram of Test Setup

The Same as section 5.2.

9.3 Specification Limits (§15.247(e))

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band.

9.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

9.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

a) Set analyzer center frequency to DTS channel center frequency.
b) Set the span to 1.5 times the DTS bandwidth.
c) Set the RBW to 3 kHz ≤ RBW ≤ 100 kHz.
d) Set the VBW ≥ [3 × RBW].
e) Detector = peak.
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum amplitude level within the RBW.
j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

The test procedure is defined in ANSI C63.10-2013 (11.10.2 Measurement Procedure “Method PKPSD (peak PSD)” was used).

9.6 Test Results

PASSED.

All the test results are attached in next pages.

(Test Date: 2019.12.18 Temperature: 23℃ Humidity: 51 %)

Modulation	Channel	Frequency (MHz)	**Power Spectral Density (dBm)**	Limit
BLE	00	2402	**4.489**	8 dBm
	20	2442	**4.453**	8 dBm
	39	2480	**4.658**	8 dBm

CH00 2402 MHz

CH20 2442 MHz

CH39 2480 MHz

10 DEVIATION TO TEST SPECIFICATIONS

None.

11 MEASUREMENT UNCERTAINTY LIST

The measurement uncertainty was estimated for test on the EUT according to CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage of K=2.
The uncertainties value is not used in determining the PASS/FAIL results.

Test Items/Facilities	Frequency/Equipment/Unit	Uncertainty
Conducted Emission No.1 Shielded Room	9kHz~150kHz	±3.8dB
	150kHz~30MHz	±3.4dB
Conducted Emission No.3 Shielded Room	150kHz~30MHz	±3.4dB
Radiated Emission	30MHz~200MHz, Horizontal	±4.5dB
	30MHz~200MHz, Vertical	±4.5dB
	200MHz~1000MHz, Horizontal	±4.6dB
	200MHz~1000MHz, Vertical	±5.7dB
	1GHz~6GHz	±6.0dB
	6GHz~18GHz	±5.7dB
Output Power Test	50MHz~18GHz	0.77dB
Power Density Test	9kHz~6GHz	1.08dB
RF Frequency Test	9kHz~40GHz	$6*10^{-4}$
Bandwidth Test	9kHz~6GHz	$1.5*10^{-3}$
RF Radiated Power Test	30MHz~1000MHz	3.06dB
Conducted Output Power Test	50MHz~18GHz	0.83dB
AC Voltage(<10kHz) Test	120V~230V	0.04%
DC Power Test	0V~30V	0.4%
Temperature	-40℃~+100℃	0.52℃
Humidity	30%~95%	2.6%