Profile: 24B1031R	Page No.: 18
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3：Transmit at 2402MHz by LE_Coded S=2	

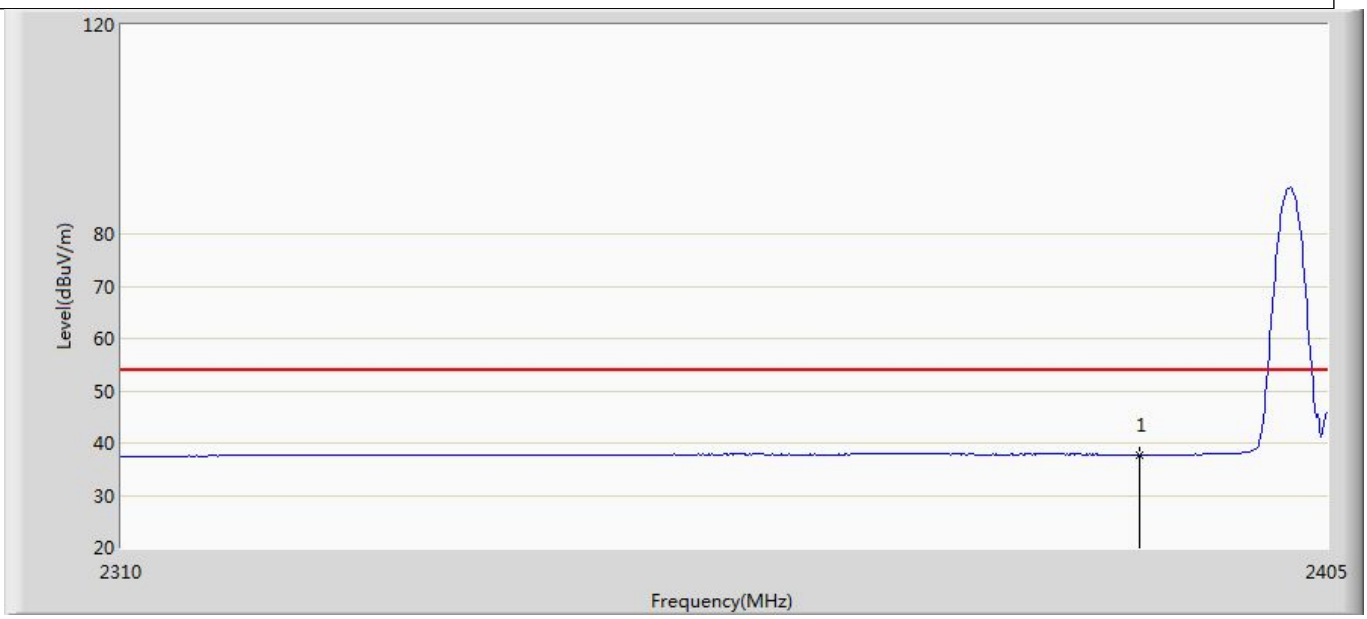

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.808	3.707	-16.192	54.000	34.102	AV

Profile: 24B1031R	Page No.: 19
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3：Transmit at 2402MHz by LE_Coded S=2	

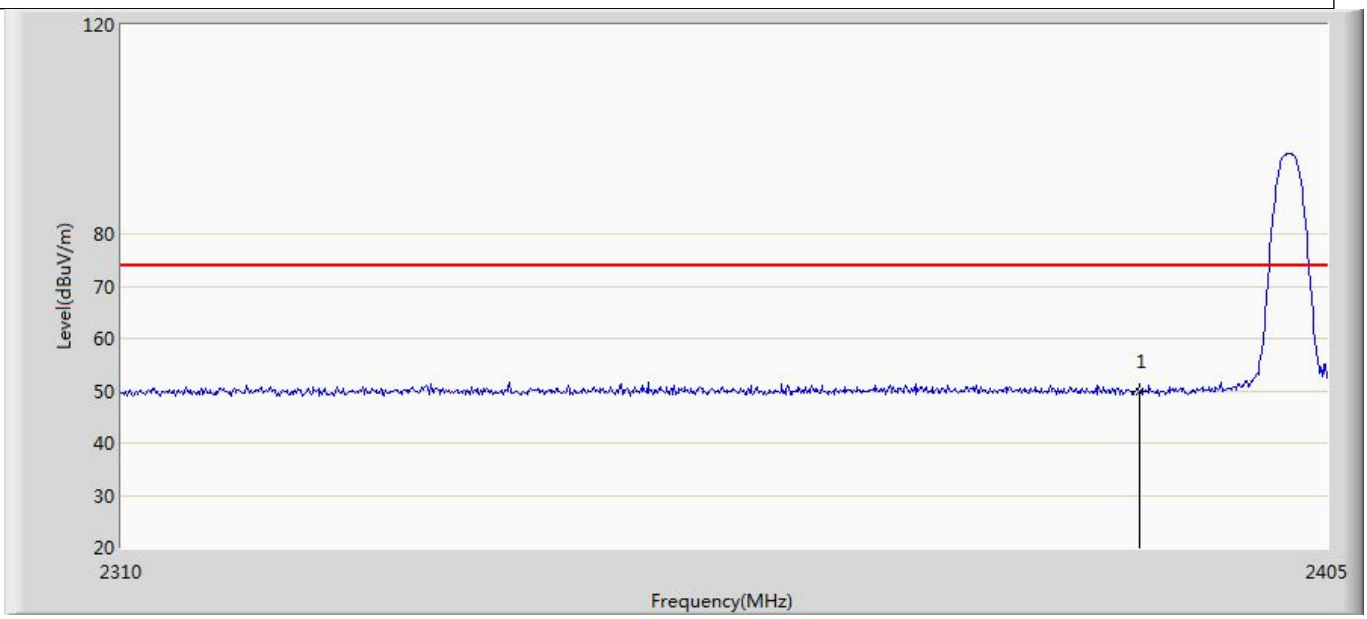

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.767	15.666	-24.233	74.000	34.102	PK

Profile: 24B1031R	Page No.: 20
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3：Transmit at 2402MHz by LE_Coded S=2	

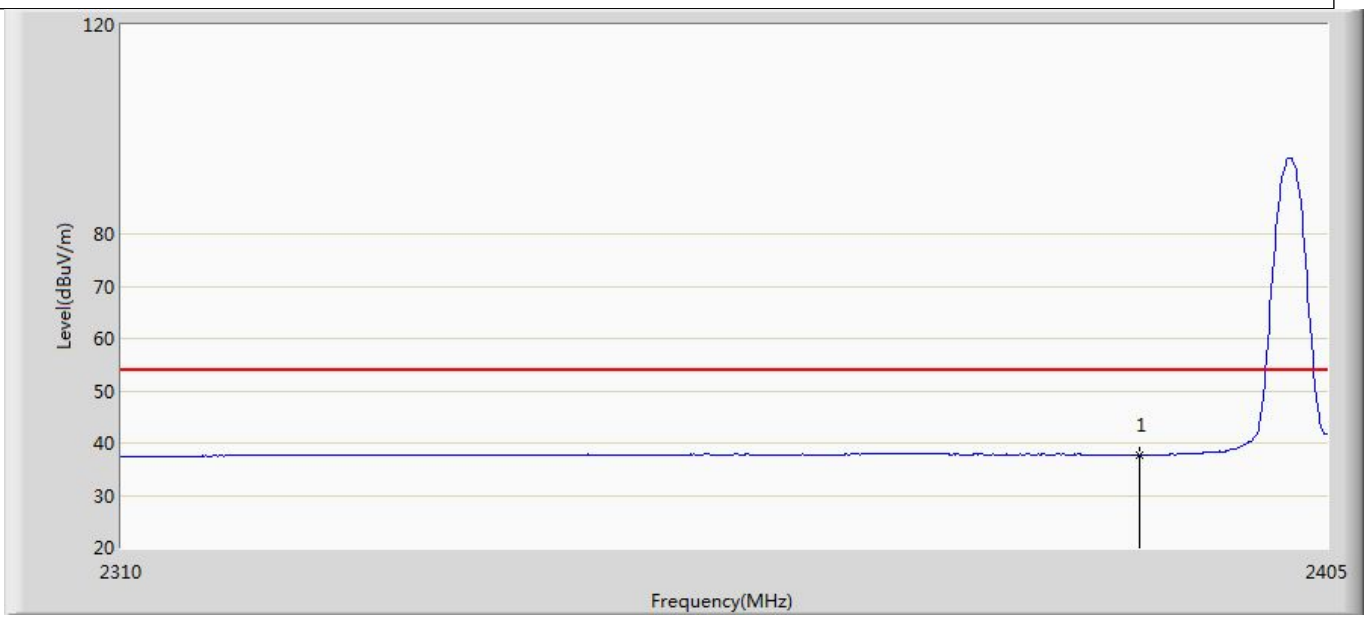

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.721	3.620	-16.279	54.000	34.102	AV

Profile: 24B1031R	Page No.: 21
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3：Transmit at 2480MHz by LE_Coded S=2	

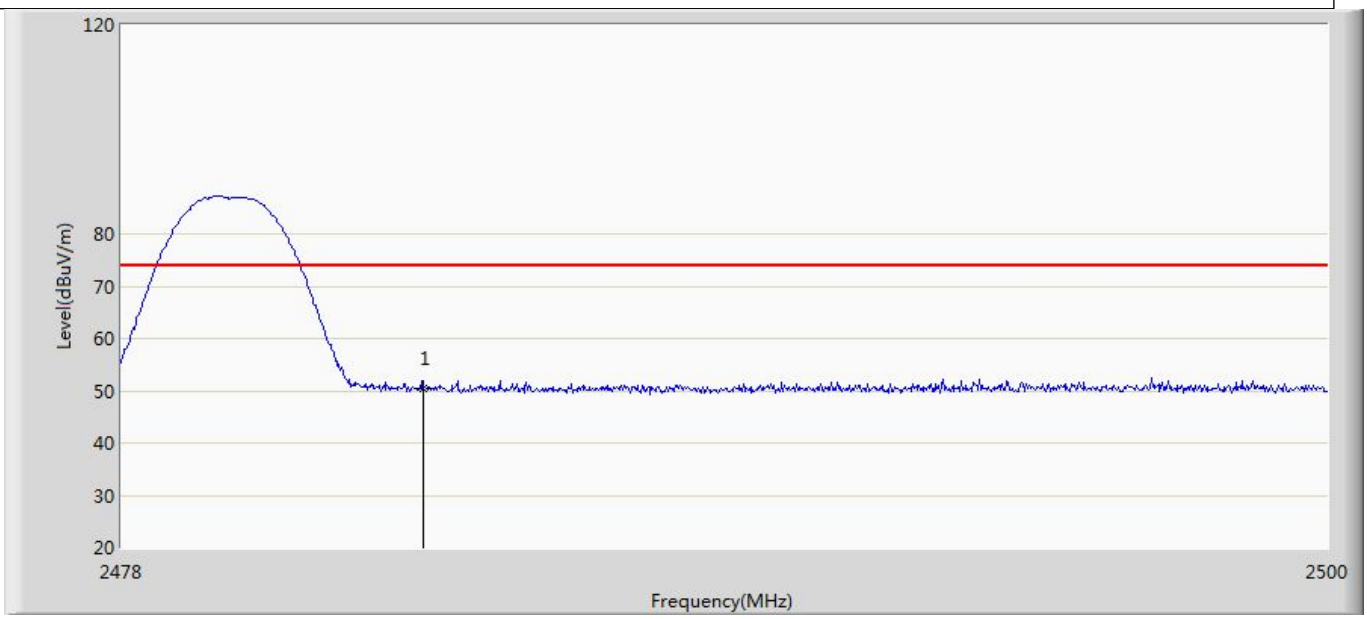

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.546	16.433	-23.454	74.000	34.114	PK

Profile: 24B1031R	Page No.: 22
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3：Transmit at 2480MHz by LE_Coded S=2	

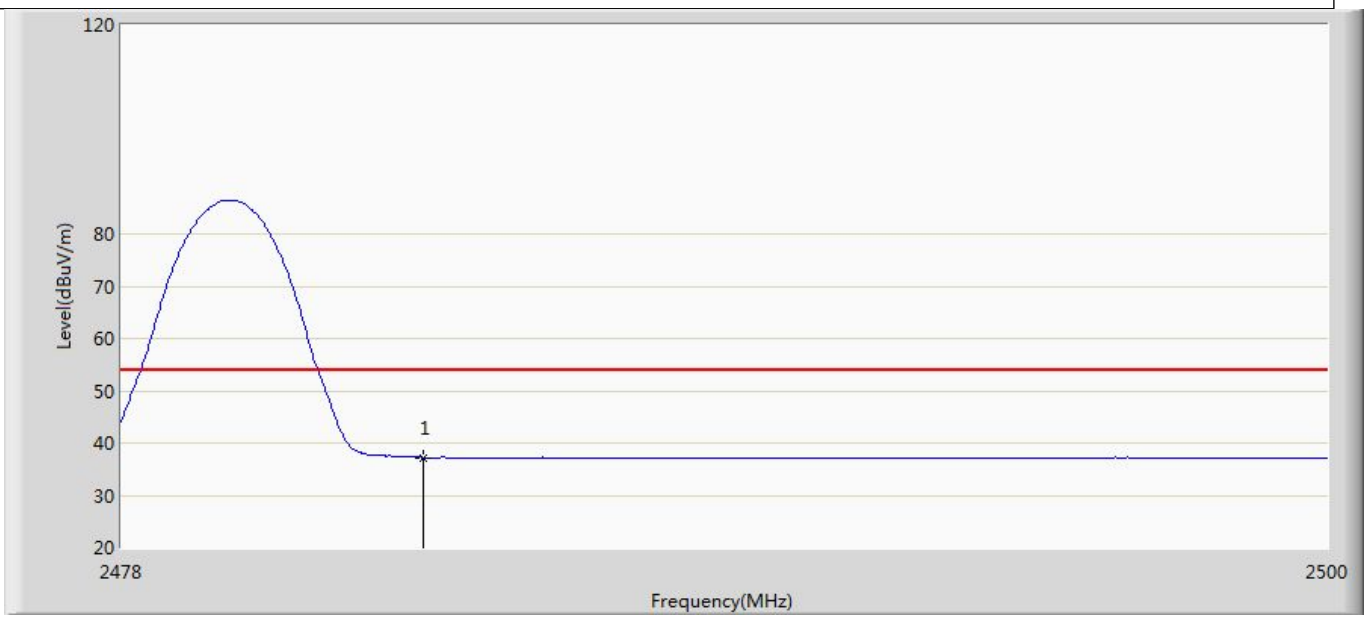

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.219	3.106	-16.781	54.000	34.114	AV

Profile: 24B1031R	Page No.: 23
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3：Transmit at 2480MHz by LE_Coded S=2	

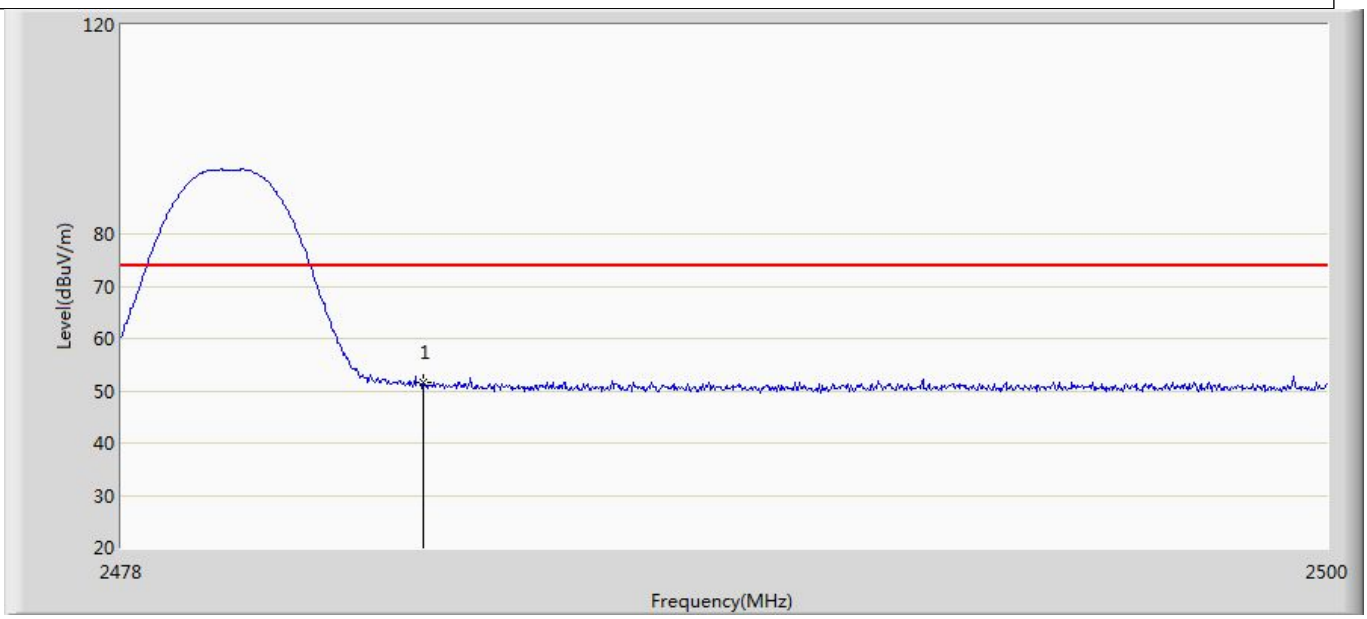

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.496	17.383	-22.504	74.000	34.114	PK

Profile: 24B1031R	Page No.: 24
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 3：Transmit at 2480MHz by LE_Coded S=2	

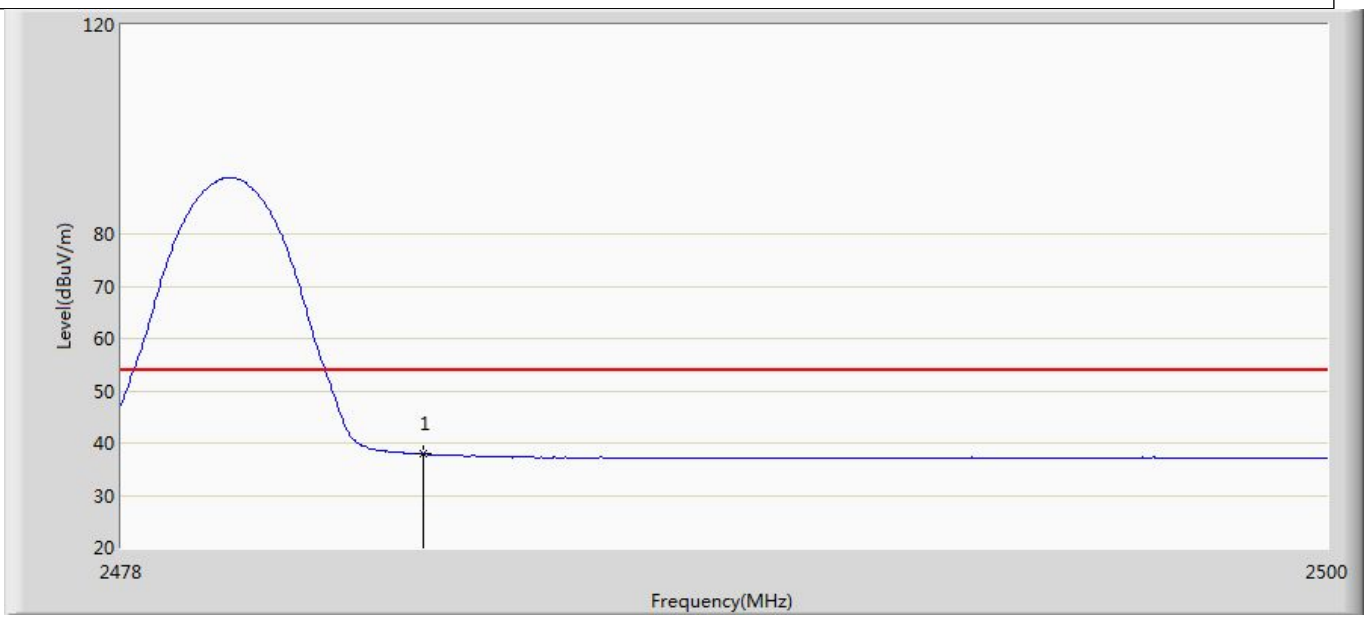

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.913	3.800	-16.087	54.000	34.114	AV

Profile: 24B1031R	Page No.: 25
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4：Transmit at 2402MHz by LE_Coded S=8	

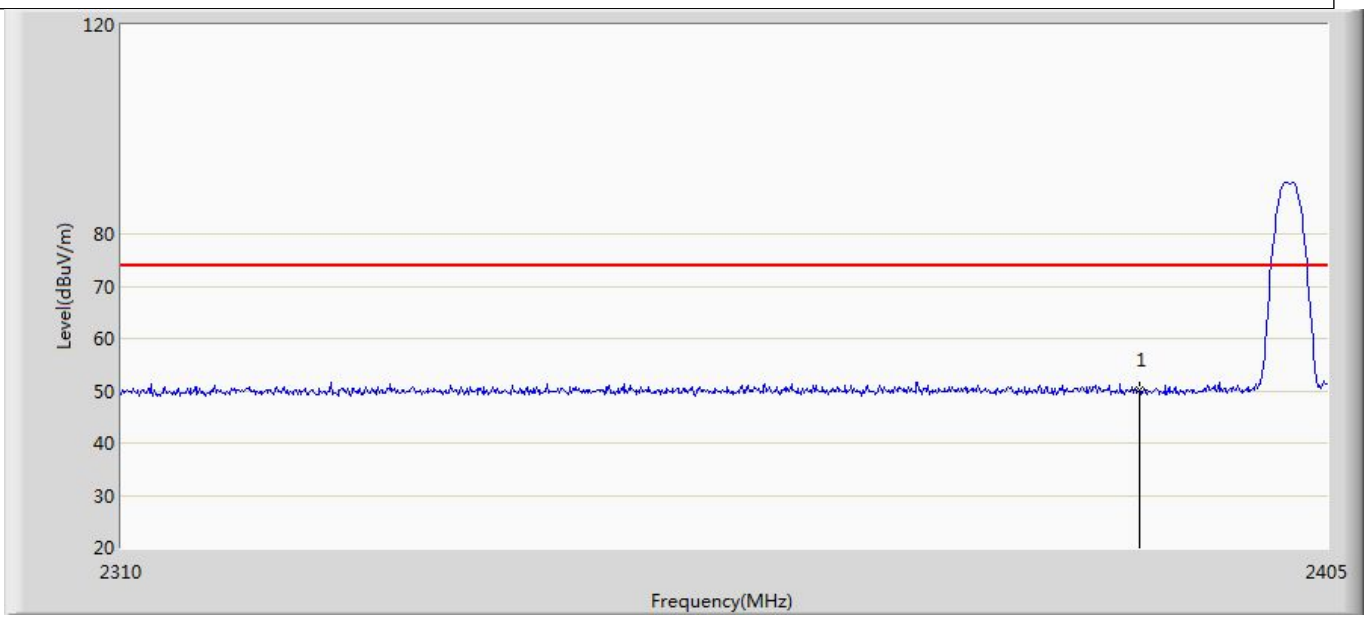

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.031	15.930	-23.969	74.000	34.102	PK

Profile: 24B1031R	Page No.: 26
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4：Transmit at 2402MHz by LE_Coded S=8	

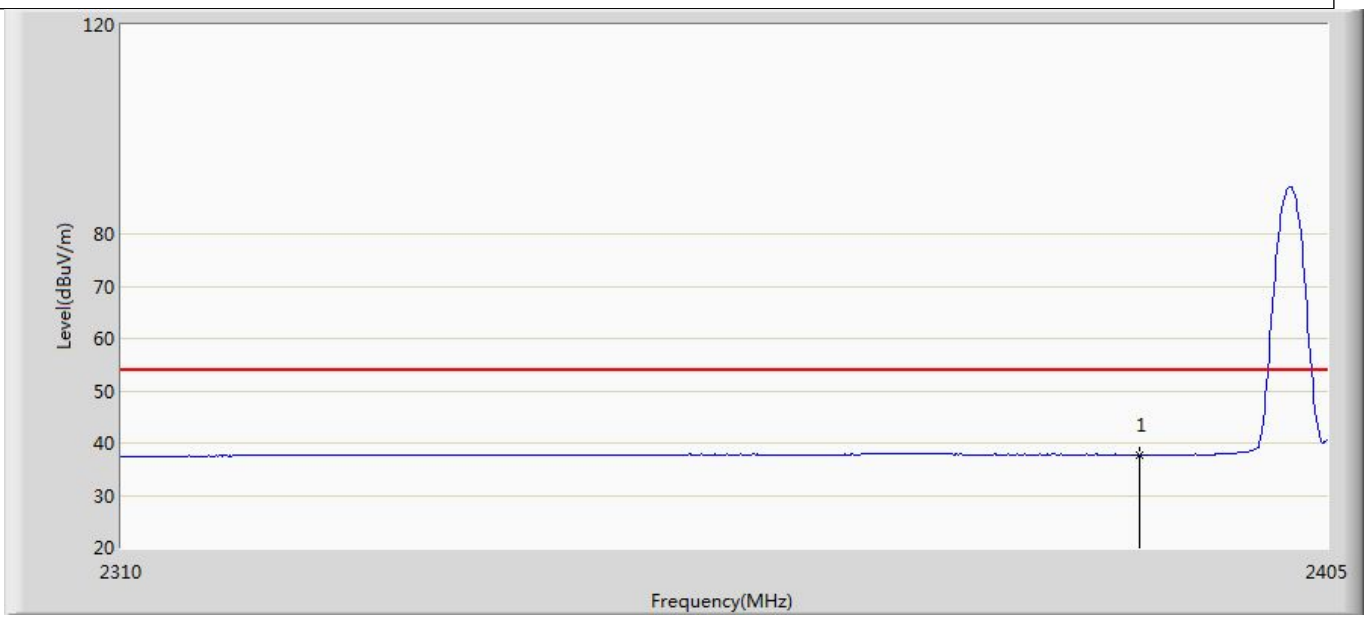

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.730	3.629	-16.270	54.000	34.102	AV

Profile: 24B1031R	Page No.: 27
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4：Transmit at 2402MHz by LE_Coded S=8	

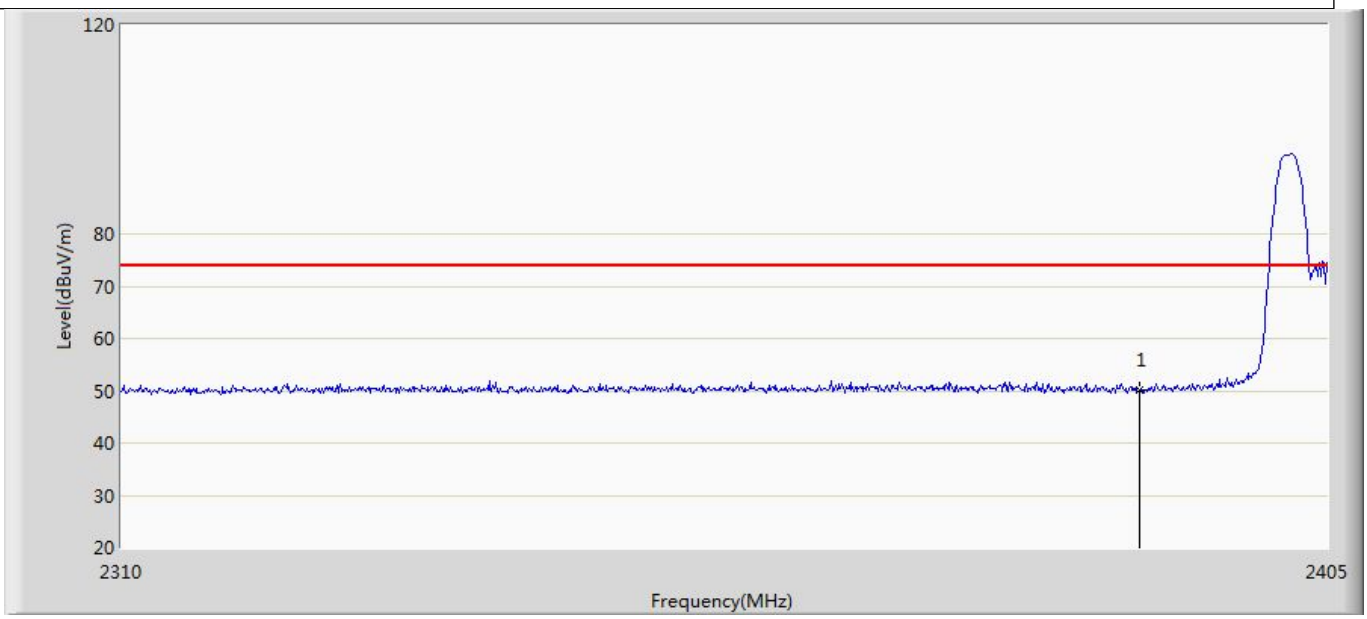

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.260	16.159	-23.740	74.000	34.102	PK

Profile: 24B1031R	Page No.: 28
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4：Transmit at 2402MHz by LE_Coded S=8	

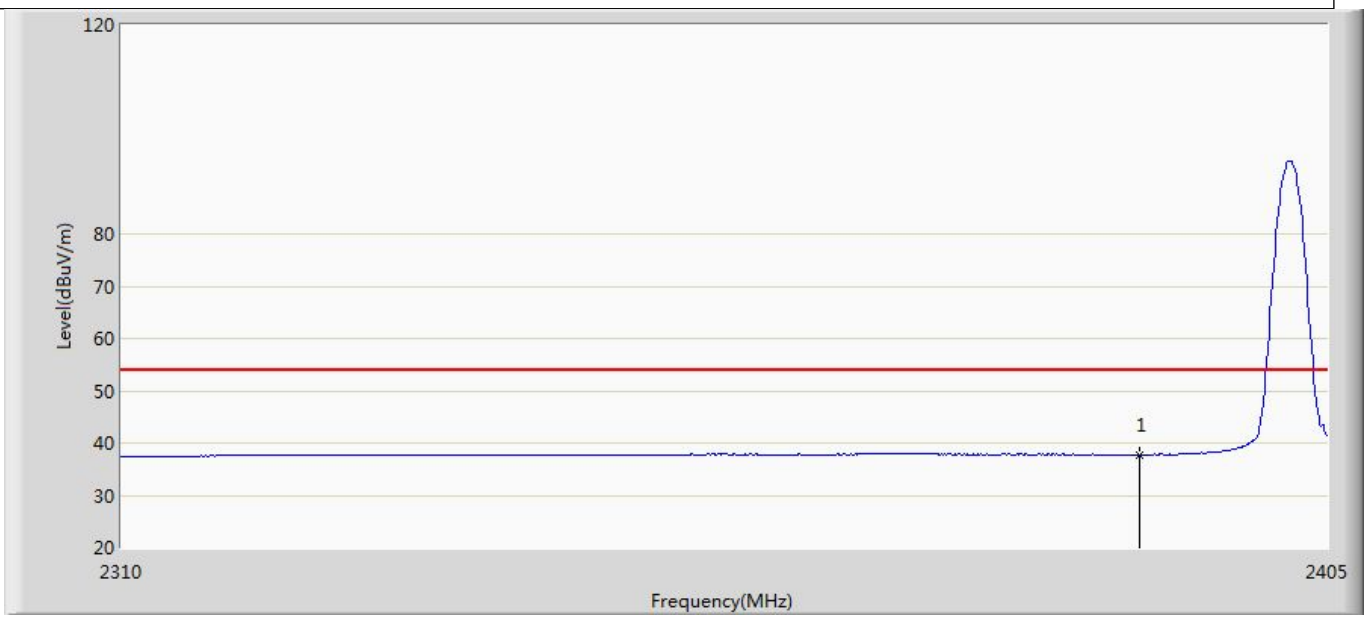

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.696	3.595	-16.304	54.000	34.102	AV

Profile: 24B1031R	Page No.: 29
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4：Transmit at 2480MHz by LE_Coded S=8	

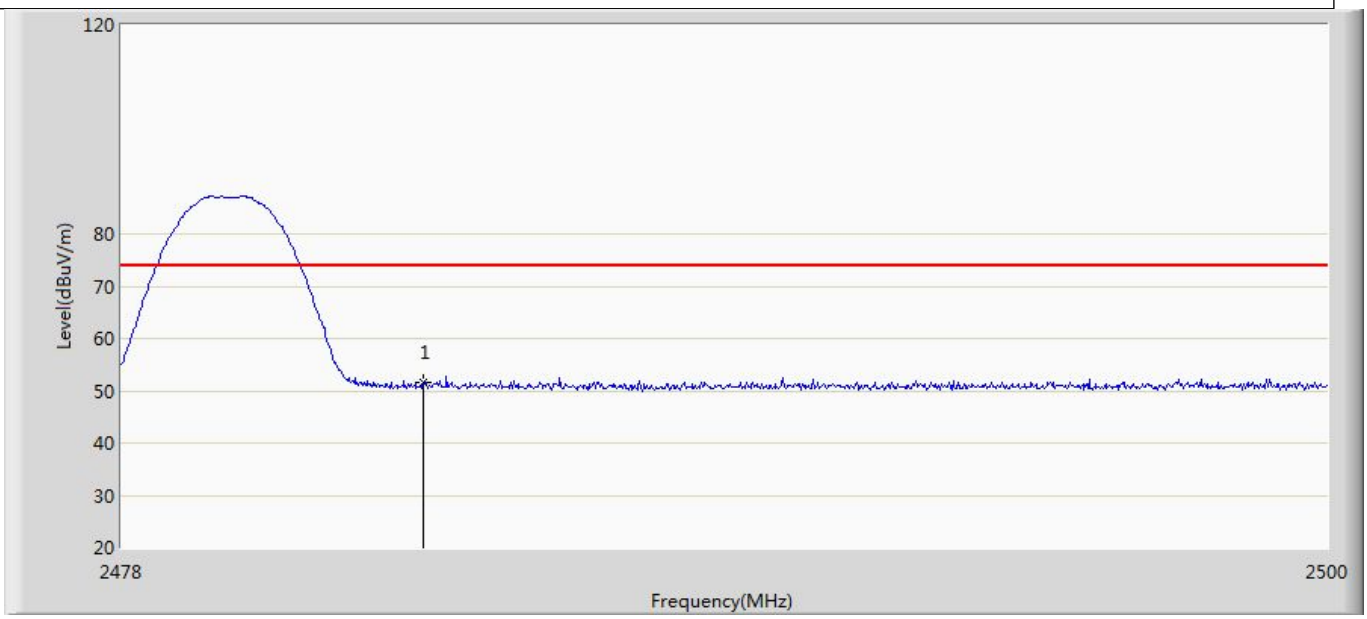

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.726	17.613	-22.274	74.000	34.114	PK

Profile: 24B1031R	Page No.: 30
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4：Transmit at 2480MHz by LE_Coded S=8	

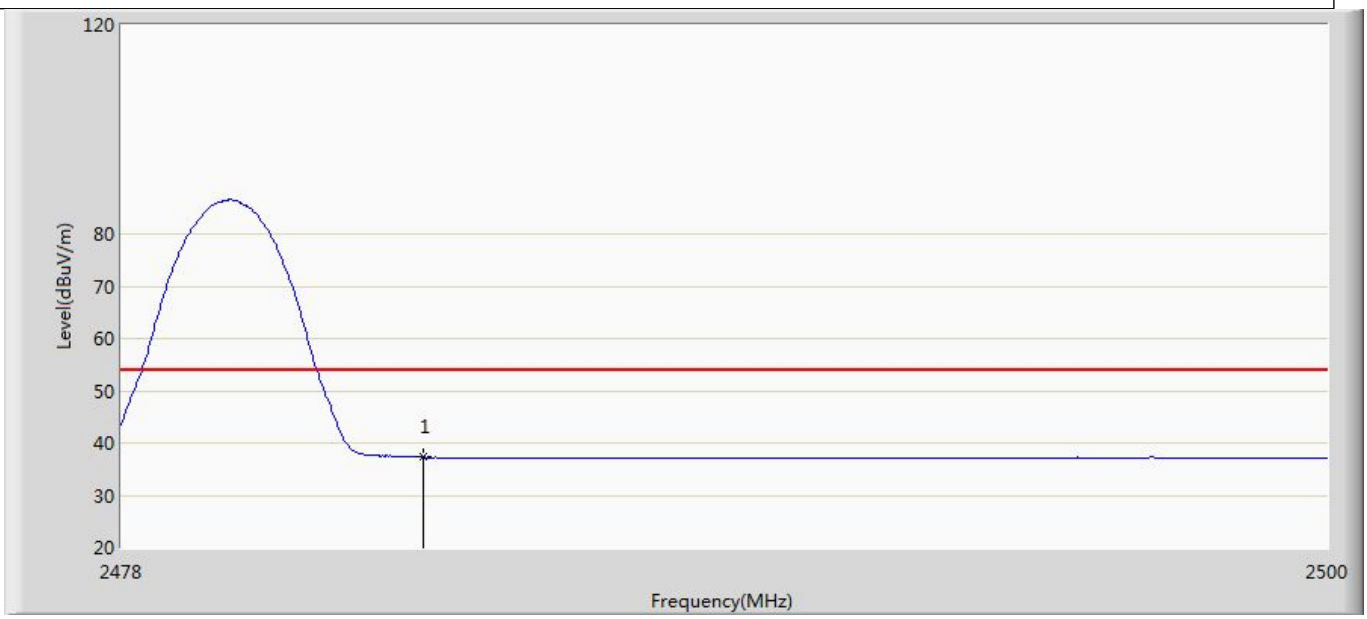

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.311	3.198	-16.689	54.000	34.114	AV

Profile: 24B1031R	Page No.: 31
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4：Transmit at 2480MHz by LE_Coded S=8	

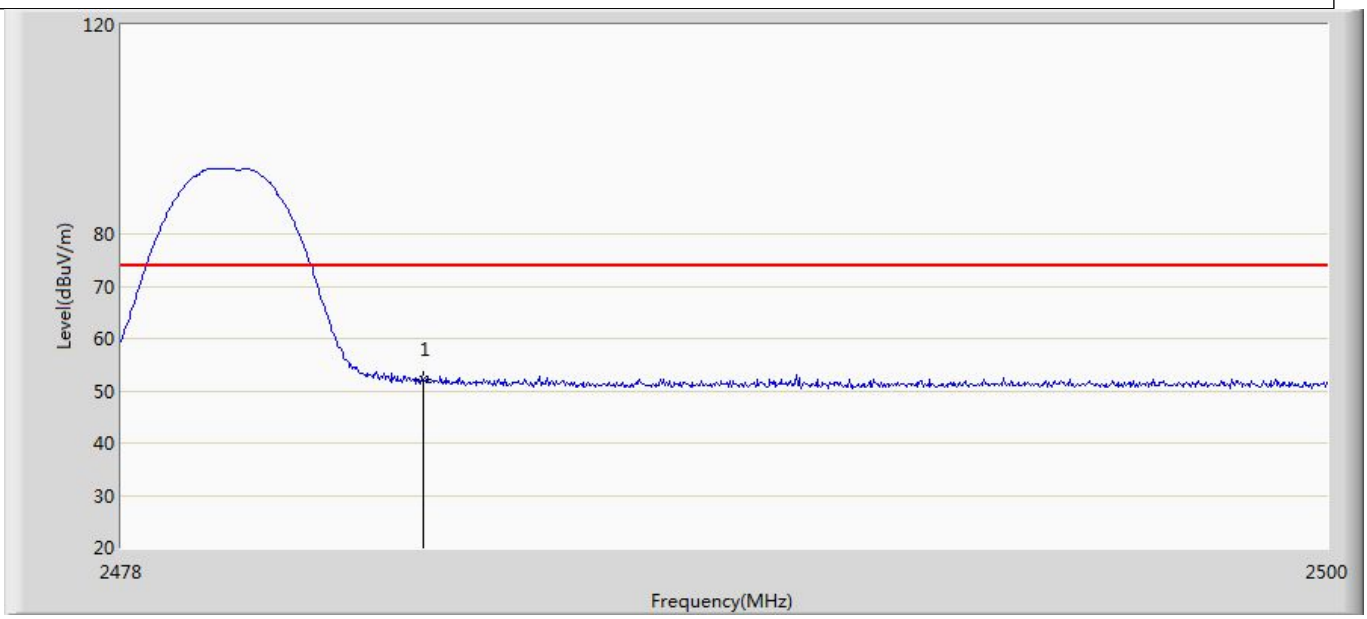

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	52.067	17.954	-21.933	74.000	34.114	PK

Profile: 24B1031R	Page No.: 32
Engineer: Yuliu	
Site: AC5	Time: 2024/11/20 - 01:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: 120Vac/60Hz
Note: Mode 4 : Transmit at 2480MHz by LE_Coded S=8	

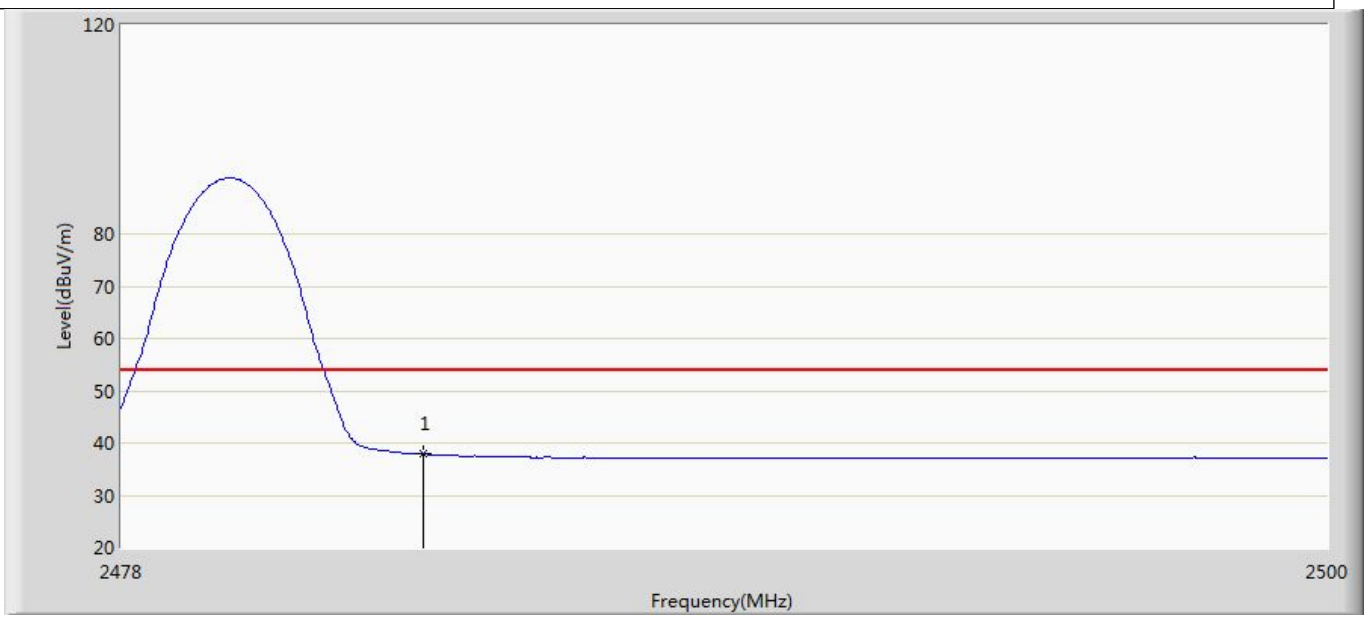

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.900	3.787	-16.100	54.000	34.114	AV

Note:
1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

Appendix F: Conducted Spurious Emission

Reference level measurement :

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
Mode 1	Ant1	2402	2402.33	10.91
	Ant1	2440	2440.33	10.87
	Ant1	2480	2480.33	10.93
Mode 2	Ant1	2402	2402.25	8.77
	Ant1	2440	2440.26	8.72
	Ant1	2480	2480.25	8.71
Mode 3	Ant1	2402	2402.09	8.34
	Ant1	2440	2440.09	8.31
	Ant1	2480	2480.10	8.39
Mode 4	Ant1	2402	2402.33	10.93
	Ant1	2440	2440.34	10.84
	Ant1	2480	2480.33	10.89

BLE_1M-Ant1-2402-PASS

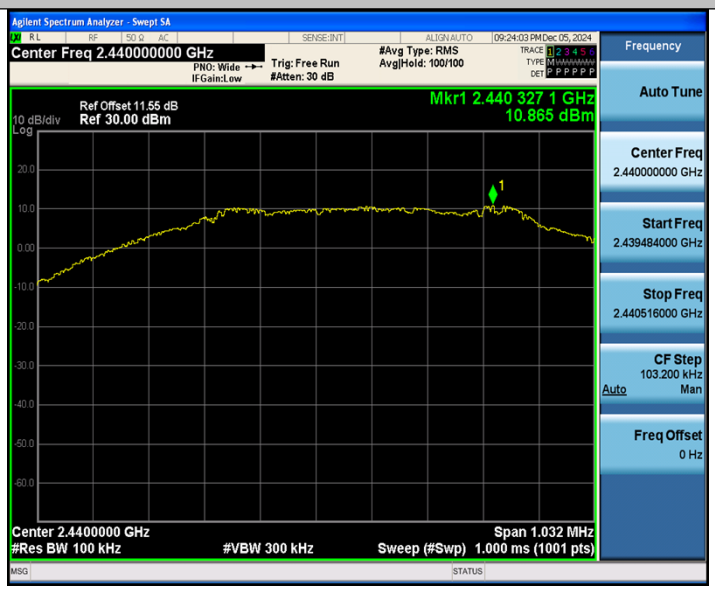

BLE_1M-Ant1-2440-PASS

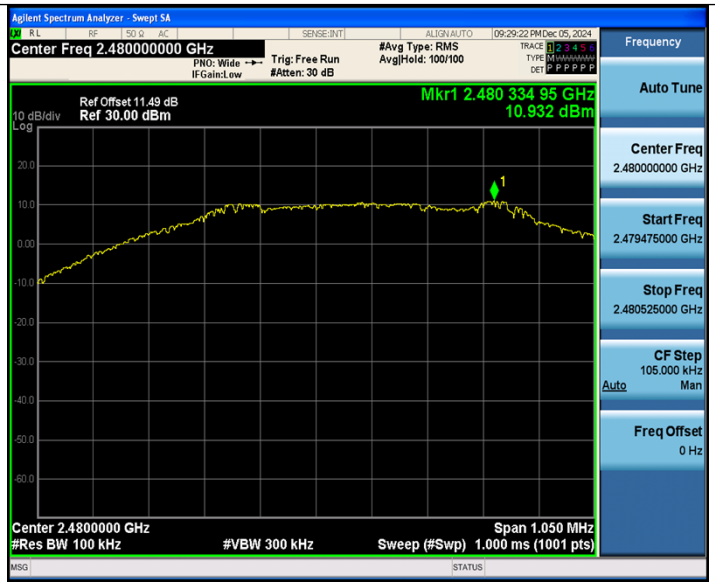

BLE_1M-Ant1-2480-PASS

BLE_2M-Ant1-2402-PASS

BLE_2M-Ant1-2440-PASS

BLE_2M-Ant1-2480-PASS

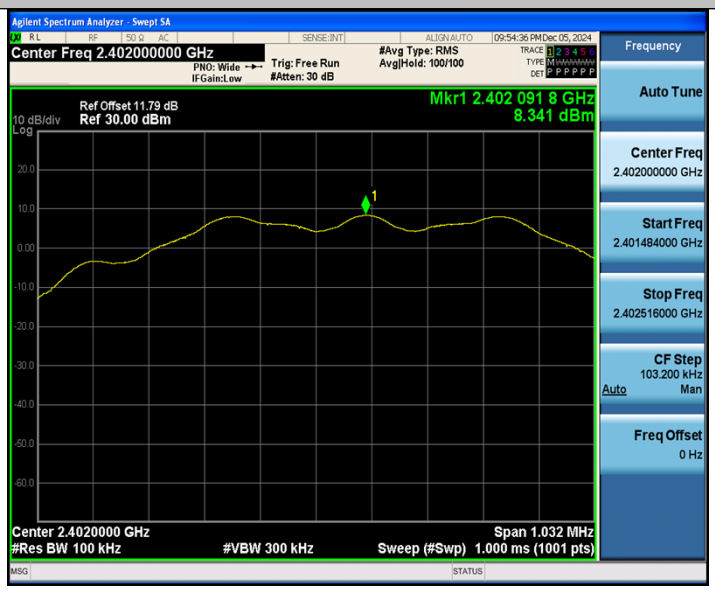

BLE_125K-Ant1-2402-PASS

BLE_125K-Ant1-2440-PASS

BLE_125K-Ant1-2480-PASS

BLE_500K-Ant1-2402-PASS

BLE_500K-Ant1-2440-PASS

BLE_500K-Ant1-2480-PASS

Band edge measurements：

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
Mode 1	Ant1	Low	2402	10.91	-41.44	≤-9.09	PASS
	Ant1	High	2480	10.93	-43.28	≤-9.07	PASS
Mode 2	Ant1	Low	2402	8.77	-25.95	≤-11.23	PASS
	Ant1	High	2480	8.71	-40.36	≤-11.29	PASS
Mode 3	Ant1	Low	2402	8.34	-41.32	≤-11.66	PASS
	Ant1	High	2480	8.39	-42.85	≤-11.61	PASS
Mode 4	Ant1	Low	2402	10.93	-41.01	≤-9.07	PASS
	Ant1	High	2480	10.89	-42.81	≤-9.11	PASS

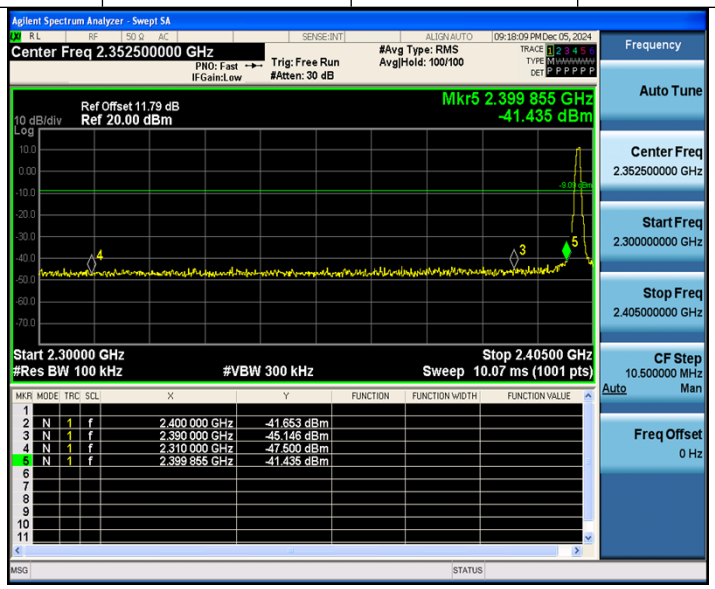

BLE_1M-Ant1-2402-PASS

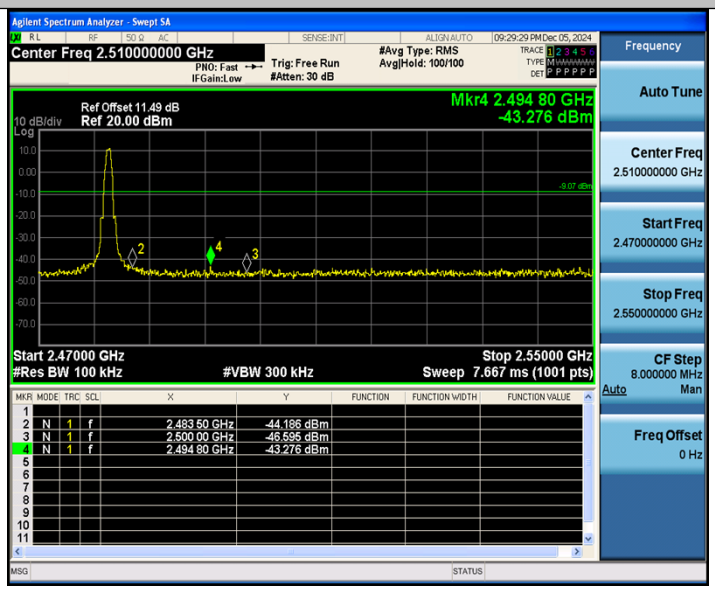

BLE_1M-Ant1-2480-PASS

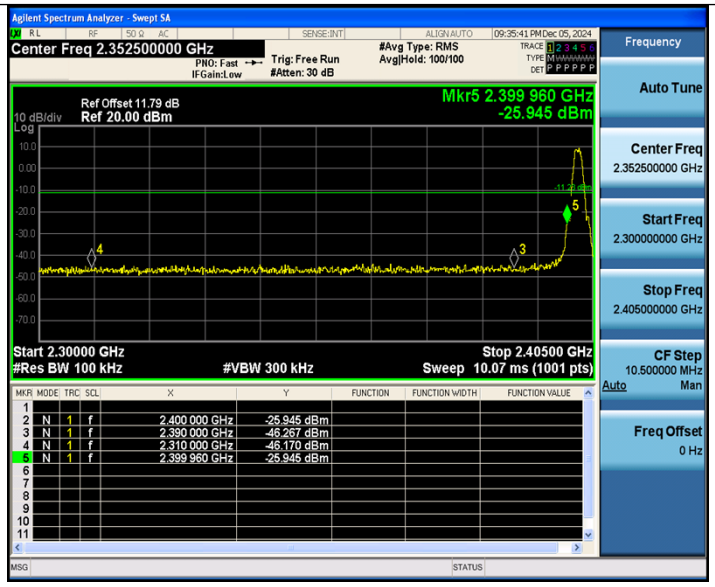

BLE_2M-Ant1-2402-PASS

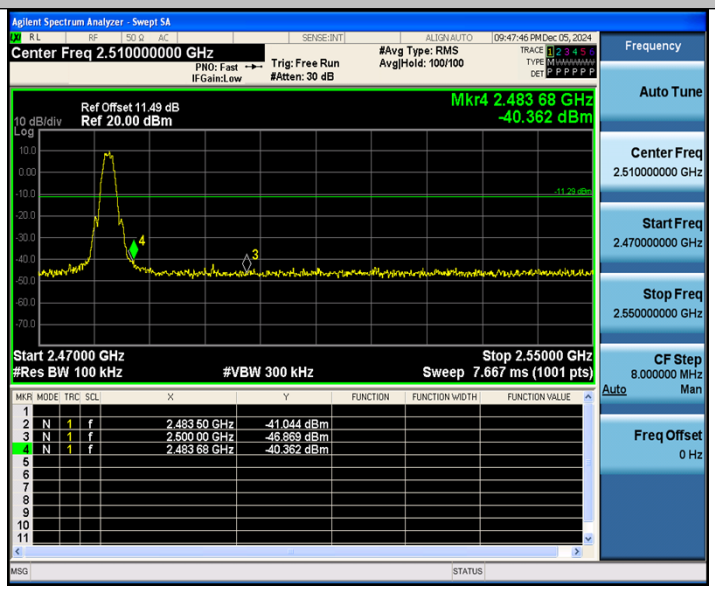

BLE_2M-Ant1-2480-PASS

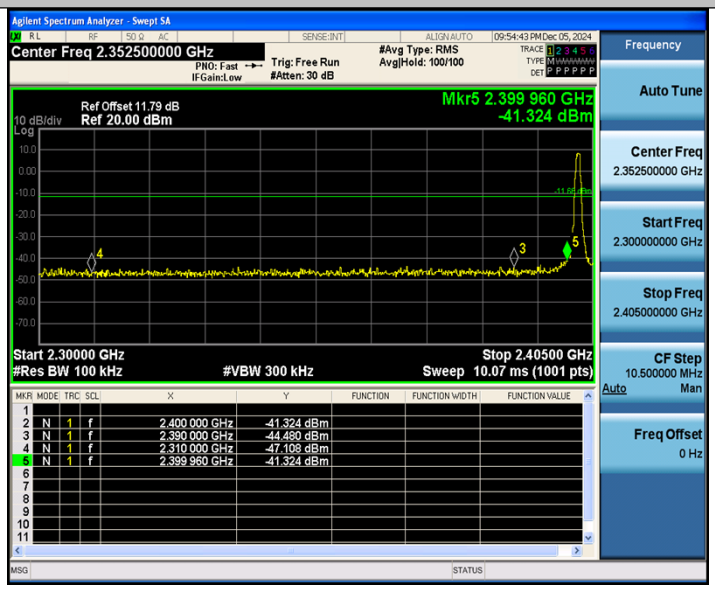

BLE_125K-Ant1-2402-PASS

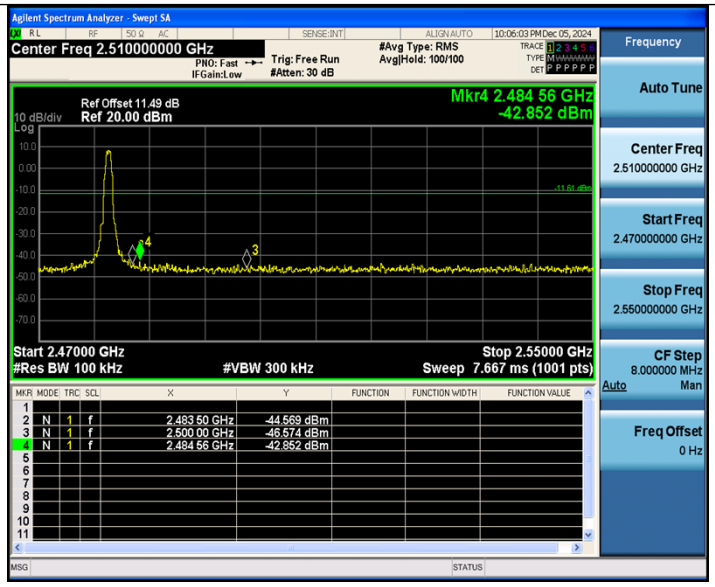

BLE_125K-Ant1-2480-PASS

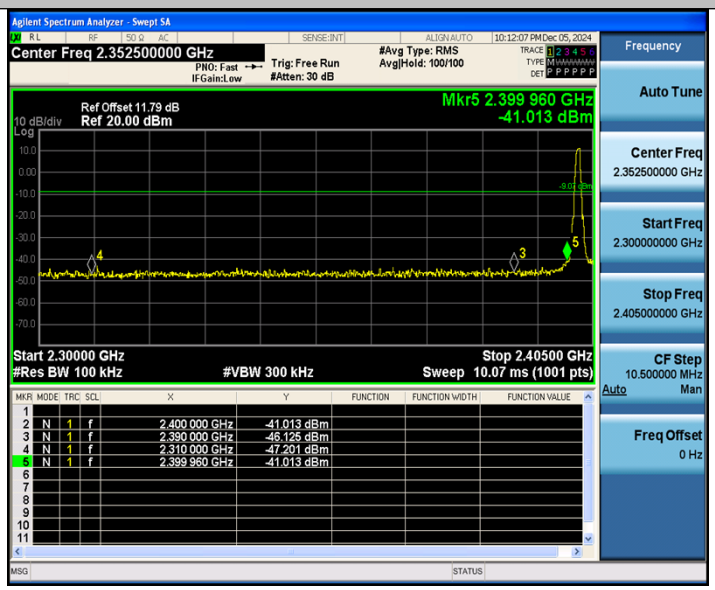

BLE_500K-Ant1-2402-PASS

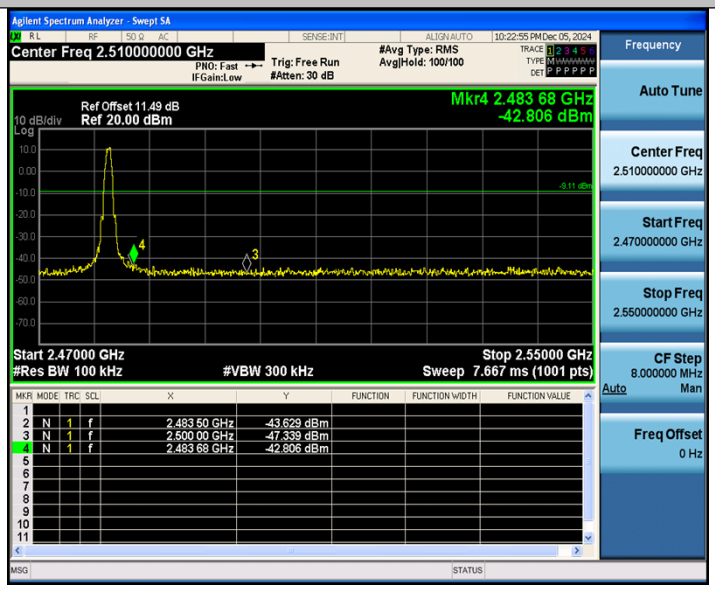

BLE_500K-Ant1-2480-PASS

Conducted Spurious Emission :

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
Mode 1	Ant1	2402	30~1000	10.91	-53.12	≤-9.09	PASS
	Ant1	2402	1000~3000	10.91	-51.95	≤-9.09	PASS
	Ant1	2402	3000~5000	10.91	-37.17	≤-9.09	PASS
	Ant1	2402	5000~7000	10.91	-50.79	≤-9.09	PASS
	Ant1	2402	7000~9000	10.91	-50.94	≤-9.09	PASS
	Ant1	2402	9000~11000	10.91	-50.18	≤-9.09	PASS
	Ant1	2402	11000~13000	10.91	-50.96	≤-9.09	PASS
	Ant1	2402	13000~15000	10.91	-45.53	≤-9.09	PASS
	Ant1	2402	15000~17000	10.91	-44.98	≤-9.09	PASS
	Ant1	2402	17000~19000	10.91	-44.31	≤-9.09	PASS
	Ant1	2402	19000~21000	10.91	-43.22	≤-9.09	PASS
	Ant1	2402	21000~23000	10.91	-43.16	≤-9.09	PASS
	Ant1	2402	23000~25000	10.91	-40.23	≤-9.09	PASS
	Ant1	2440	30~1000	10.87	-53.48	≤-9.13	PASS
	Ant1	2440	1000~3000	10.87	-51.85	≤-9.13	PASS
	Ant1	2440	3000~5000	10.87	-38.31	≤-9.13	PASS
	Ant1	2440	5000~7000	10.87	-48.16	≤-9.13	PASS
	Ant1	2440	7000~9000	10.87	-51.7	≤-9.13	PASS
	Ant1	2440	9000~11000	10.87	-50.59	≤-9.13	PASS
	Ant1	2440	11000~13000	10.87	-51.78	≤-9.13	PASS
	Ant1	2440	13000~15000	10.87	-46.41	≤-9.13	PASS
	Ant1	2440	15000~17000	10.87	-44.86	≤-9.13	PASS
	Ant1	2440	17000~19000	10.87	-44.82	≤-9.13	PASS
	Ant1	2440	19000~21000	10.87	-42.98	≤-9.13	PASS
	Ant1	2440	21000~23000	10.87	-43.43	≤-9.13	PASS
	Ant1	2440	23000~25000	10.87	-41.44	≤-9.13	PASS
	Ant1	2480	30~1000	10.93	-53.5	≤-9.07	PASS
	Ant1	2480	1000~3000	10.93	-51.08	≤-9.07	PASS
	Ant1	2480	3000~5000	10.93	-40.53	≤-9.07	PASS
	Ant1	2480	5000~7000	10.93	-51.62	≤-9.07	PASS
	Ant1	2480	7000~9000	10.93	-52.26	≤-9.07	PASS
	Ant1	2480	9000~11000	10.93	-51.37	≤-9.07	PASS
	Ant1	2480	11000~13000	10.93	-51.34	≤-9.07	PASS
	Ant1	2480	13000~15000	10.93	-46.84	≤-9.07	PASS
	Ant1	2480	15000~17000	10.93	-44.7	≤-9.07	PASS
	Ant1	2480	17000~19000	10.93	-44.77	≤-9.07	PASS
	Ant1	2480	19000~21000	10.93	-42.82	≤-9.07	PASS
	Ant1	2480	21000~23000	10.93	-43.26	≤-9.07	PASS
	Ant1	2480	23000~25000	10.93	-41.2	≤-9.07	PASS
Mode 2	Ant1	2402	30~1000	8.77	-52.73	≤-11.23	PASS
	Ant1	2402	1000~3000	8.77	-51.43	≤-11.23	PASS
	Ant1	2402	3000~5000	8.77	-37.18	≤-11.23	PASS
	Ant1	2402	5000~7000	8.77	-51.39	≤-11.23	PASS
	Ant1	2402	7000~9000	8.77	-51.58	≤-11.23	PASS
	Ant1	2402	9000~11000	8.77	-50.79	≤-11.23	PASS
	Ant1	2402	11000~13000	8.77	-51.37	≤-11.23	PASS
	Ant1	2402	13000~15000	8.77	-46.57	≤-11.23	PASS

	Ant1	2402	15000~17000	8.77	-44.84	≤-11.23	PASS
	Ant1	2402	17000~19000	8.77	-44.26	≤-11.23	PASS
	Ant1	2402	19000~21000	8.77	-42.16	≤-11.23	PASS
	Ant1	2402	21000~23000	8.77	-43.15	≤-11.23	PASS
	Ant1	2402	23000~25000	8.77	-40.36	≤-11.23	PASS
	Ant1	2440	30~1000	8.72	-53.54	≤-11.28	PASS
	Ant1	2440	1000~3000	8.72	-51.62	≤-11.28	PASS
	Ant1	2440	3000~5000	8.72	-38.85	≤-11.28	PASS
	Ant1	2440	5000~7000	8.72	-51.74	≤-11.28	PASS
	Ant1	2440	7000~9000	8.72	-51.73	≤-11.28	PASS
	Ant1	2440	9000~11000	8.72	-51.11	≤-11.28	PASS
	Ant1	2440	11000~13000	8.72	-49.99	≤-11.28	PASS
	Ant1	2440	13000~15000	8.72	-47.18	≤-11.28	PASS
	Ant1	2440	15000~17000	8.72	-44.84	≤-11.28	PASS
	Ant1	2440	17000~19000	8.72	-44.44	≤-11.28	PASS
	Ant1	2440	19000~21000	8.72	-43.4	≤-11.28	PASS
	Ant1	2440	21000~23000	8.72	-42.69	≤-11.28	PASS
	Ant1	2440	23000~25000	8.72	-40.98	≤-11.28	PASS
	Ant1	2480	30~1000	8.71	-53.37	≤-11.29	PASS
	Ant1	2480	1000~3000	8.71	-51.01	≤-11.29	PASS
	Ant1	2480	3000~5000	8.71	-43.1	≤-11.29	PASS
	Ant1	2480	5000~7000	8.71	-50.57	≤-11.29	PASS
	Ant1	2480	7000~9000	8.71	-51.75	≤-11.29	PASS
	Ant1	2480	9000~11000	8.71	-50.91	≤-11.29	PASS
	Ant1	2480	11000~13000	8.71	-50.79	≤-11.29	PASS
	Ant1	2480	13000~15000	8.71	-46.65	≤-11.29	PASS
	Ant1	2480	15000~17000	8.71	-44.55	≤-11.29	PASS
	Ant1	2480	17000~19000	8.71	-44.55	≤-11.29	PASS
	Ant1	2480	19000~21000	8.71	-42.97	≤-11.29	PASS
	Ant1	2480	21000~23000	8.71	-43.39	≤-11.29	PASS
	Ant1	2480	23000~25000	8.71	-41.68	≤-11.29	PASS
Mode 3	Ant1	2402	30~1000	8.34	-53.13	≤-11.66	PASS
	Ant1	2402	1000~3000	8.34	-51.4	≤-11.66	PASS
	Ant1	2402	3000~5000	8.34	-38.82	≤-11.66	PASS
	Ant1	2402	5000~7000	8.34	-51.09	≤-11.66	PASS
	Ant1	2402	7000~9000	8.34	-50.76	≤-11.66	PASS
	Ant1	2402	9000~11000	8.34	-50.5	≤-11.66	PASS
	Ant1	2402	11000~13000	8.34	-51.59	≤-11.66	PASS
	Ant1	2402	13000~15000	8.34	-45.81	≤-11.66	PASS
	Ant1	2402	15000~17000	8.34	-44.87	≤-11.66	PASS
	Ant1	2402	17000~19000	8.34	-43.53	≤-11.66	PASS
	Ant1	2402	19000~21000	8.34	-42.65	≤-11.66	PASS
	Ant1	2402	21000~23000	8.34	-43.21	≤-11.66	PASS
	Ant1	2402	23000~25000	8.34	-41.16	≤-11.66	PASS
	Ant1	2440	30~1000	8.31	-53.42	≤-11.69	PASS
	Ant1	2440	1000~3000	8.31	-51.24	≤-11.69	PASS
	Ant1	2440	3000~5000	8.31	-40.71	≤-11.69	PASS
	Ant1	2440	5000~7000	8.31	-51.11	≤-11.69	PASS
	Ant1	2440	7000~9000	8.31	-51.88	≤-11.69	PASS
	Ant1	2440	9000~11000	8.31	-51.11	≤-11.69	PASS
	Ant1	2440	11000~13000	8.31	-51.64	≤-11.69	PASS

	Ant1	2440	13000~15000	8.31	-46.18	≤-11.69	PASS
	Ant1	2440	15000~17000	8.31	-45.65	≤-11.69	PASS
	Ant1	2440	17000~19000	8.31	-44.5	≤-11.69	PASS
	Ant1	2440	19000~21000	8.31	-43.36	≤-11.69	PASS
	Ant1	2440	21000~23000	8.31	-43.15	≤-11.69	PASS
	Ant1	2440	23000~25000	8.31	-41.54	≤-11.69	PASS
	Ant1	2480	30~1000	8.39	-53.11	≤-11.61	PASS
	Ant1	2480	1000~3000	8.39	-51.83	≤-11.61	PASS
	Ant1	2480	3000~5000	8.39	-43.99	≤-11.61	PASS
	Ant1	2480	5000~7000	8.39	-42.24	≤-11.61	PASS
	Ant1	2480	7000~9000	8.39	-51.24	≤-11.61	PASS
	Ant1	2480	9000~11000	8.39	-50.46	≤-11.61	PASS
	Ant1	2480	11000~13000	8.39	-51.93	≤-11.61	PASS
	Ant1	2480	13000~15000	8.39	-46.71	≤-11.61	PASS
	Ant1	2480	15000~17000	8.39	-44.62	≤-11.61	PASS
	Ant1	2480	17000~19000	8.39	-43.53	≤-11.61	PASS
	Ant1	2480	19000~21000	8.39	-42.56	≤-11.61	PASS
	Ant1	2480	21000~23000	8.39	-42.99	≤-11.61	PASS
	Ant1	2480	23000~25000	8.39	-41.17	≤-11.61	PASS
Mode 4	Ant1	2402	30~1000	10.93	-53.02	≤-9.07	PASS
	Ant1	2402	1000~3000	10.93	-51.1	≤-9.07	PASS
	Ant1	2402	3000~5000	10.93	-37.53	≤-9.07	PASS
	Ant1	2402	5000~7000	10.93	-51.4	≤-9.07	PASS
	Ant1	2402	7000~9000	10.93	-50.6	≤-9.07	PASS
	Ant1	2402	9000~11000	10.93	-50.74	≤-9.07	PASS
	Ant1	2402	11000~13000	10.93	-50.67	≤-9.07	PASS
	Ant1	2402	13000~15000	10.93	-46.15	≤-9.07	PASS
	Ant1	2402	15000~17000	10.93	-44.47	≤-9.07	PASS
	Ant1	2402	17000~19000	10.93	-43.26	≤-9.07	PASS
	Ant1	2402	19000~21000	10.93	-42.81	≤-9.07	PASS
	Ant1	2402	21000~23000	10.93	-42.73	≤-9.07	PASS
	Ant1	2402	23000~25000	10.93	-41.24	≤-9.07	PASS
	Ant1	2440	30~1000	10.84	-53.22	≤-9.16	PASS
	Ant1	2440	1000~3000	10.84	-51.51	≤-9.16	PASS
	Ant1	2440	3000~5000	10.84	-38.07	≤-9.16	PASS
	Ant1	2440	5000~7000	10.84	-21.16	≤-9.16	PASS
	Ant1	2440	7000~9000	10.91	-53.12	≤-9.09	PASS
	Ant1	2440	9000~11000	10.91	-51.95	≤-9.09	PASS
	Ant1	2440	11000~13000	10.91	-37.17	≤-9.09	PASS
	Ant1	2440	13000~15000	10.91	-50.79	≤-9.09	PASS
	Ant1	2440	15000~17000	10.91	-50.94	≤-9.09	PASS
	Ant1	2440	17000~19000	10.91	-50.18	≤-9.09	PASS
	Ant1	2440	19000~21000	10.91	-50.96	≤-9.09	PASS
	Ant1	2440	21000~23000	10.91	-45.53	≤-9.09	PASS
	Ant1	2440	23000~25000	10.91	-44.98	≤-9.09	PASS
	Ant1	2480	30~1000	10.91	-44.31	≤-9.09	PASS
	Ant1	2480	1000~3000	10.91	-43.22	≤-9.09	PASS
	Ant1	2480	3000~5000	10.91	-43.16	≤-9.09	PASS
	Ant1	2480	5000~7000	10.91	-40.23	≤-9.09	PASS
	Ant1	2480	7000~9000	10.87	-53.48	≤-9.13	PASS
	Ant1	2480	9000~11000	10.87	-51.85	≤-9.13	PASS

	Ant1	2480	11000~13000	10.87	-38.31	≤-9.13	PASS
	Ant1	2480	13000~15000	10.87	-48.16	≤-9.13	PASS
	Ant1	2480	15000~17000	10.87	-51.7	≤-9.13	PASS
	Ant1	2480	17000~19000	10.87	-50.59	≤-9.13	PASS
	Ant1	2480	19000~21000	10.87	-51.78	≤-9.13	PASS
	Ant1	2480	21000~23000	10.87	-46.41	≤-9.13	PASS
	Ant1	2480	23000~25000	10.87	-44.86	≤-9.13	PASS

BLE_1M_Ant1_Low_2402

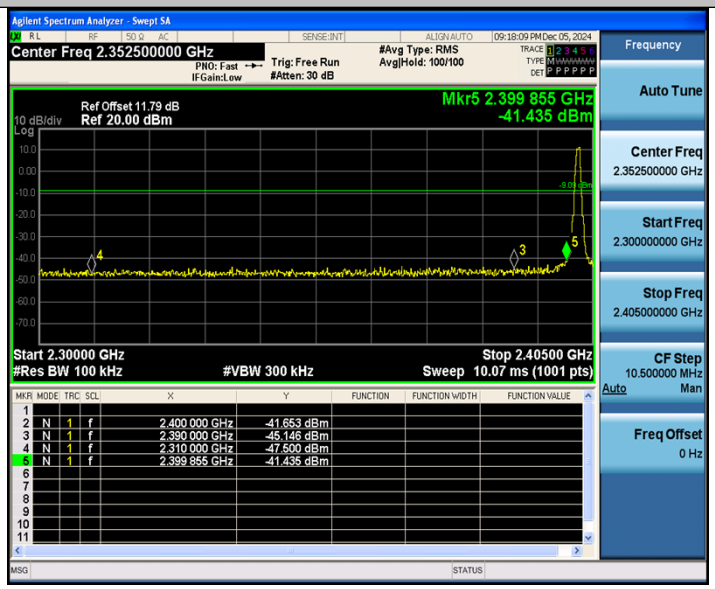

BLE_1M_Ant1_High_2480

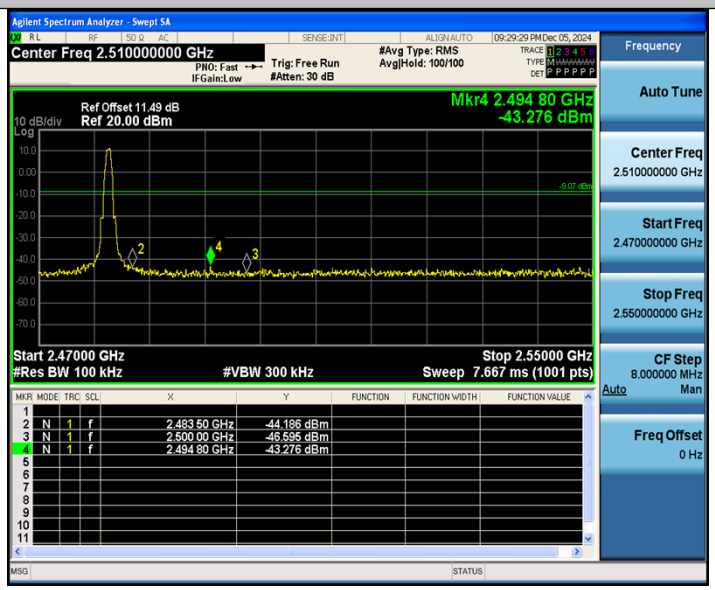

BLE_2M_Ant1_Low_2402

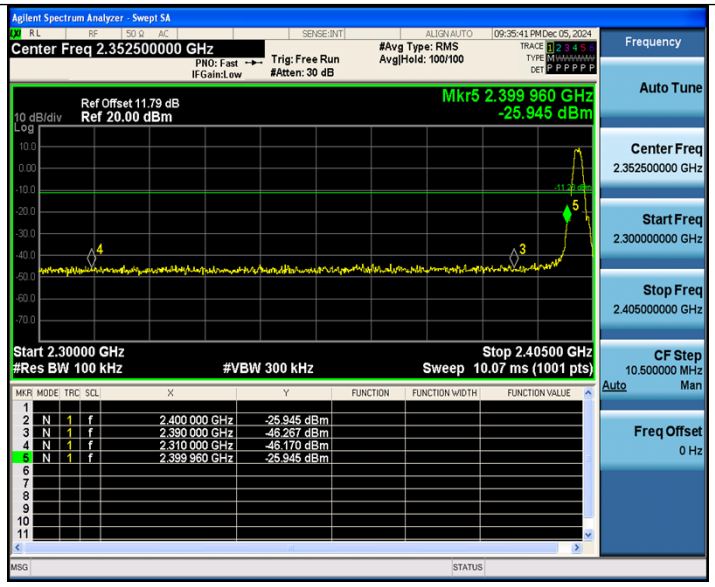

BLE_2M_Ant1_High_2480

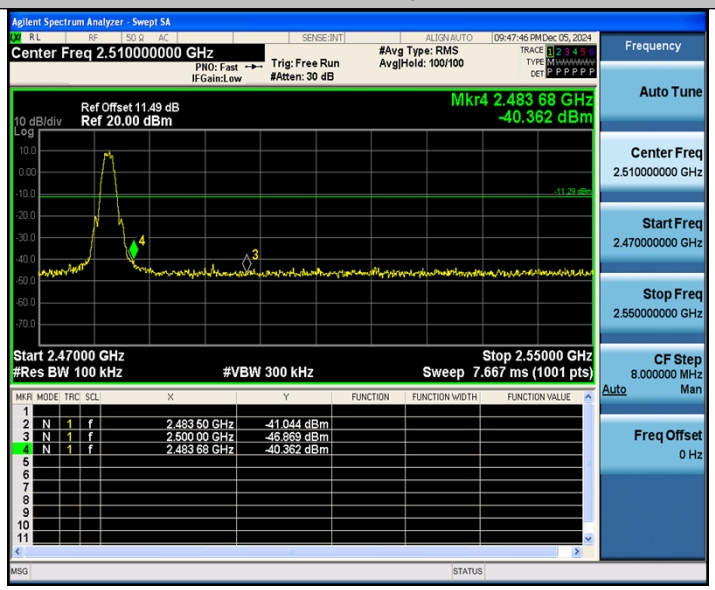

BLE_125K_Ant1_Low_2402

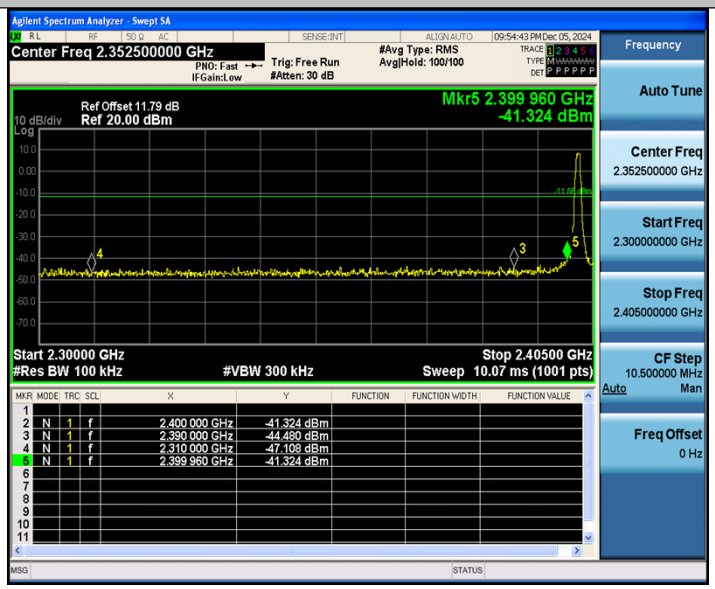

BLE_125K_Ant1_High_2480

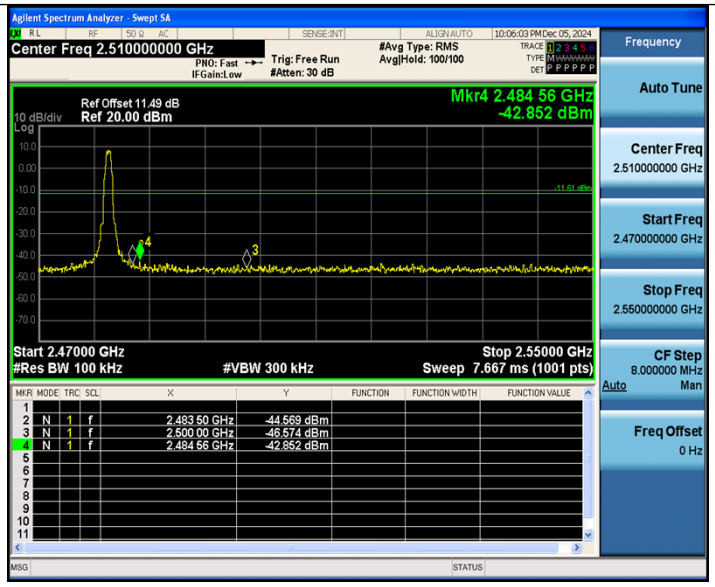

BLE_500K_Ant1_Low_2402

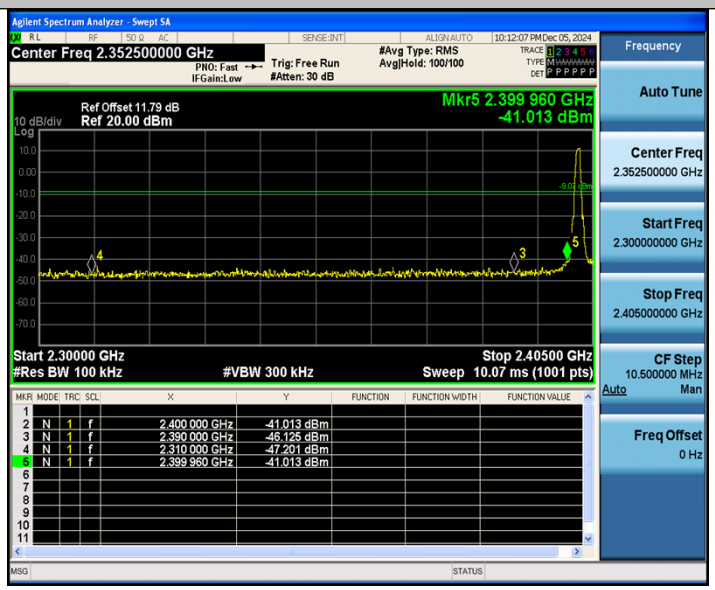

BLE_500K_Ant1_High_2480

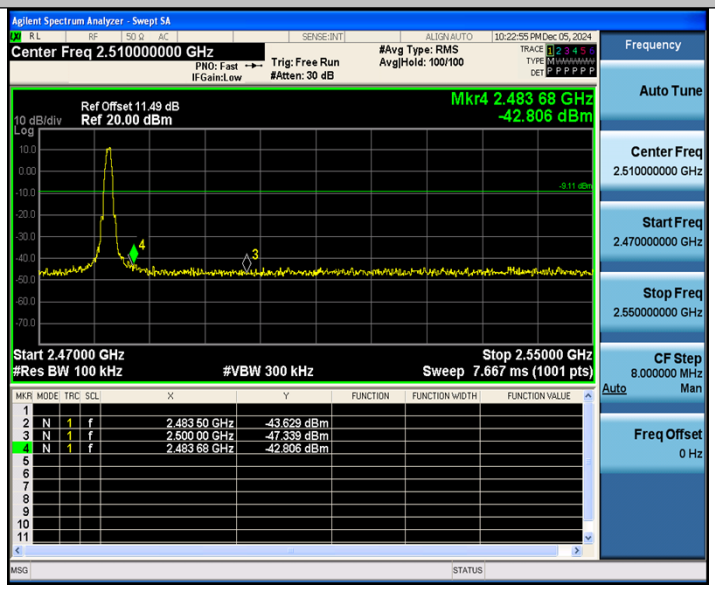

Test Graphs for Spurious Emission

BLE_1M_Ant1_2402_30~1000

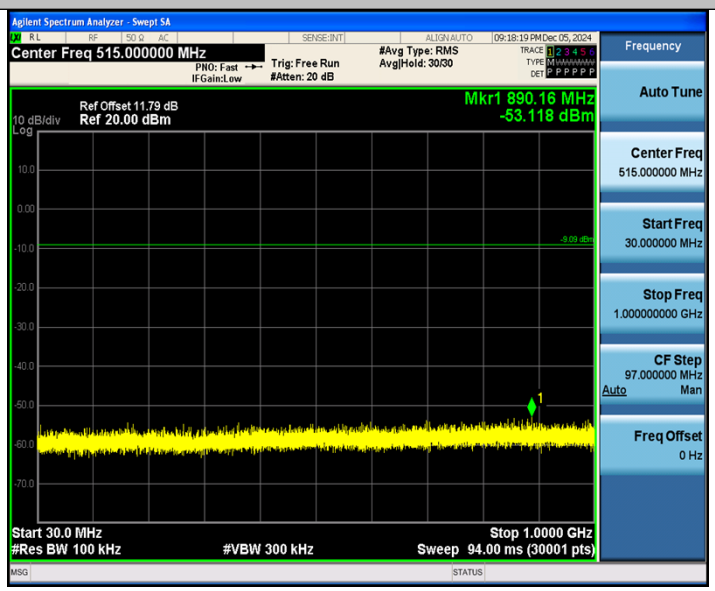

BLE_1M_Ant1_2402_1000~3000

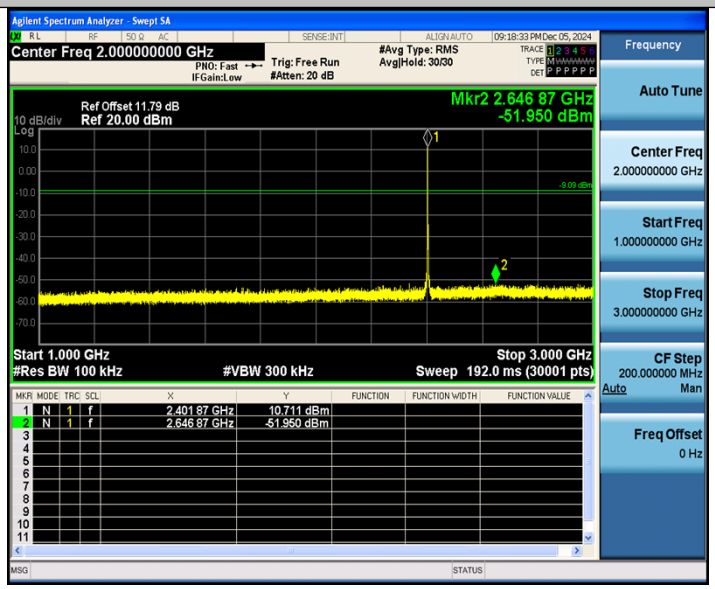

BLE_1M_Ant1_2402_3000~5000