

Meas.1 Body Plane with Back Side 0mm on 9262 Channel in WCDMA Band2 mode with ANT0

Date: 2026.07.26

Communication System Band: 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 41.156$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.79, 7.79, 7.79) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch9262/Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.427 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.79 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.207 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 0.466 W/kg

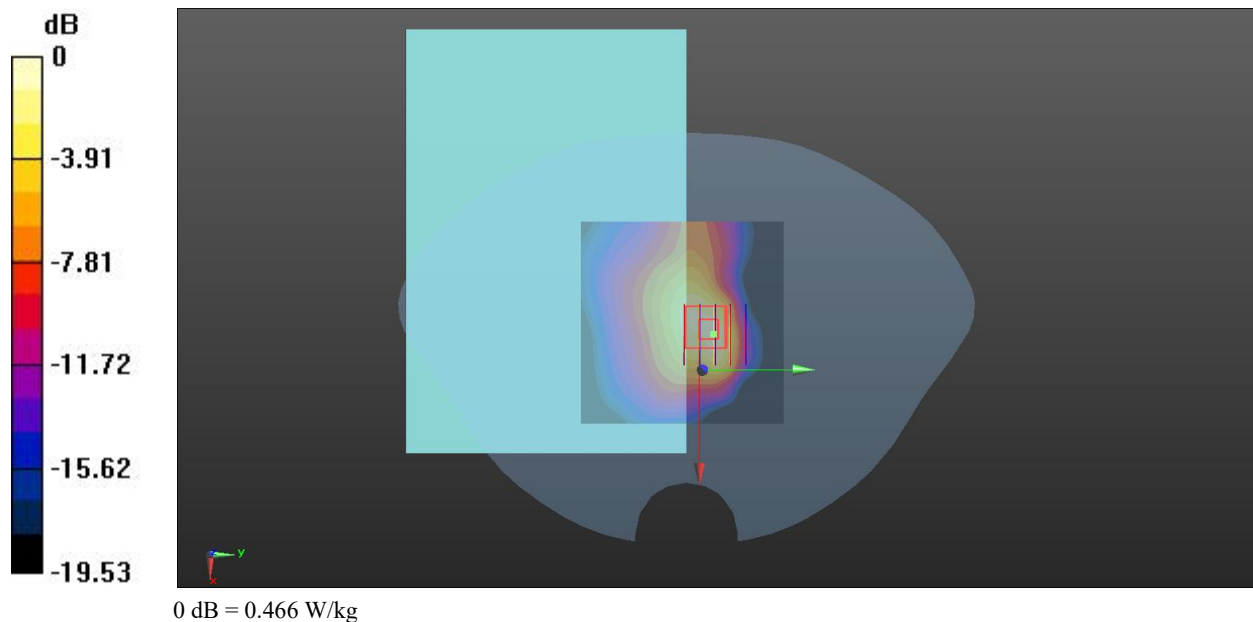

Meas.2 Body Plane with Back Side 0mm on 1412 Channel in WCDMA Band4 mode with ANT0

Date: 2026.07.25

Communication System Band: 4; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 41.103$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(8.28, 8.28, 8.28) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1412/Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.307 W/kg

Ch1412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.15 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.339 W/kg

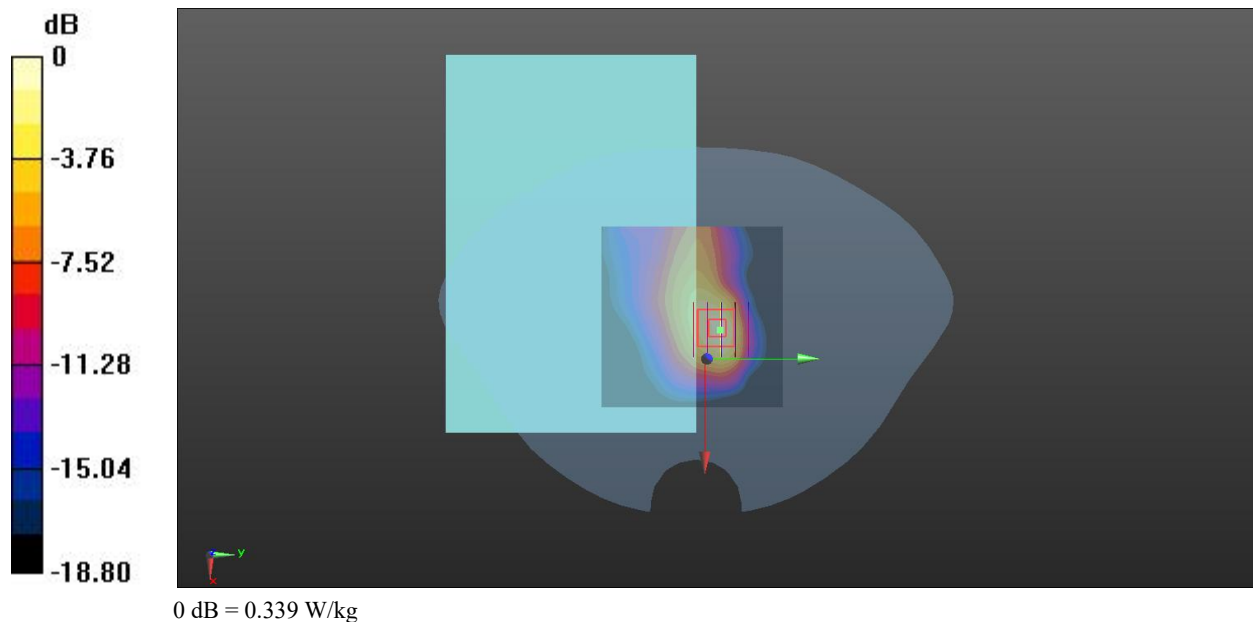

Meas.3 Body Plane with Front Side 0mm on 4233 Channel in WCDMA Band5 mode with ANT0

Date: 2026.07.25

Communication System Band: 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.291$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(9.85, 9.85, 9.85) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch4233/Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.384 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.04 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.221 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.7%

Maximum value of SAR (measured) = 0.414 W/kg

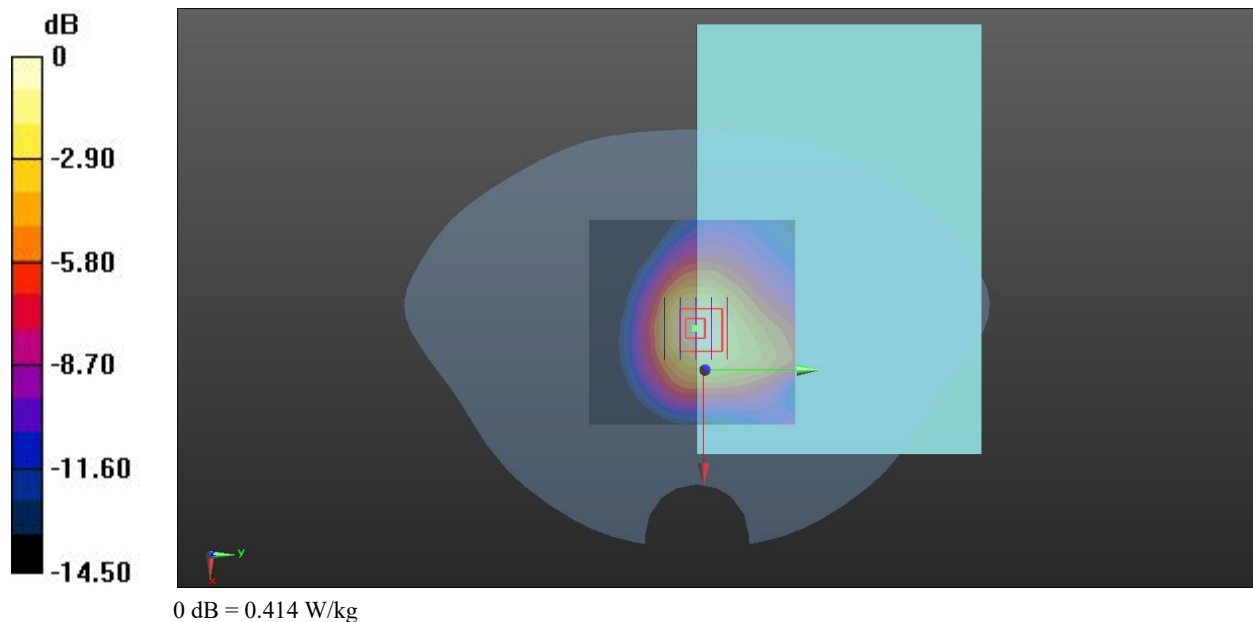

Meas.4 Body Plane with Front Side 0mm on 20850 Channel in LTE Band7 mode with ANT0

Date: 2026.07.28

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 1.866$ S/m; $\epsilon_r = 39.281$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.01, 7.01, 7.01) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch20850/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.249 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.31 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 43%

Maximum value of SAR (measured) = 0.319 W/kg

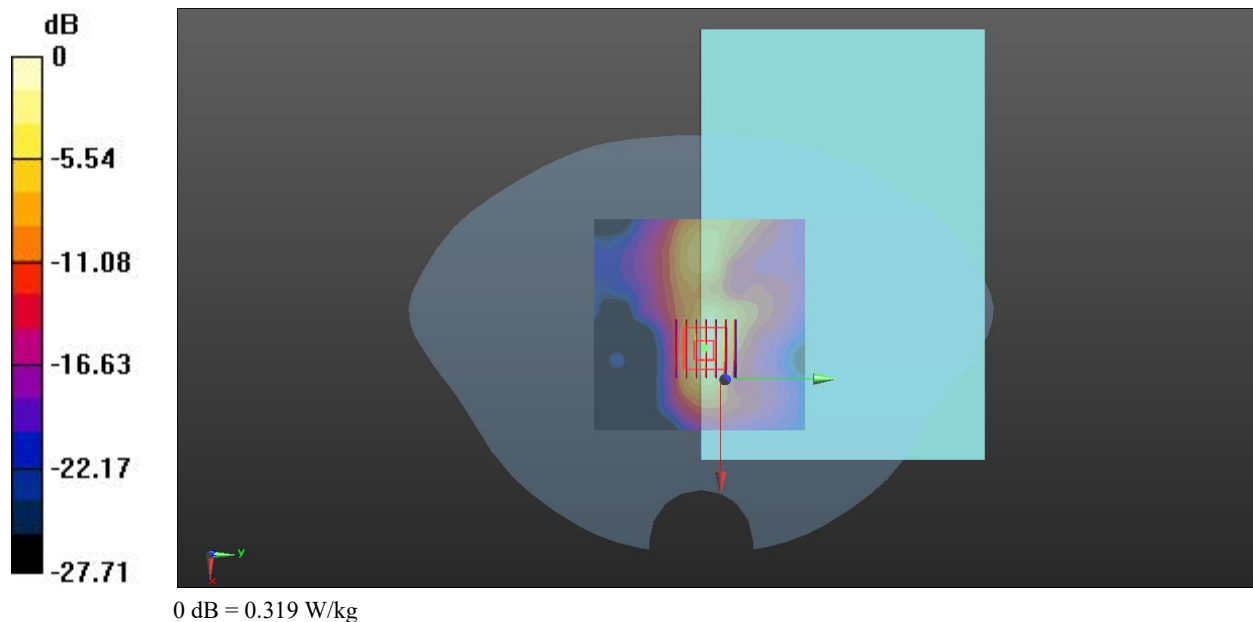

Meas.5 Body Plane with Back Side 0mm on 23130 Channel in LTE Band12 mode with ANT0

Date: 2026.07.24

Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 43.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(10.06, 10.06, 10.06) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23130/Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.565 W/kg

Ch23130/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.18 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.327 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.522 W/kg

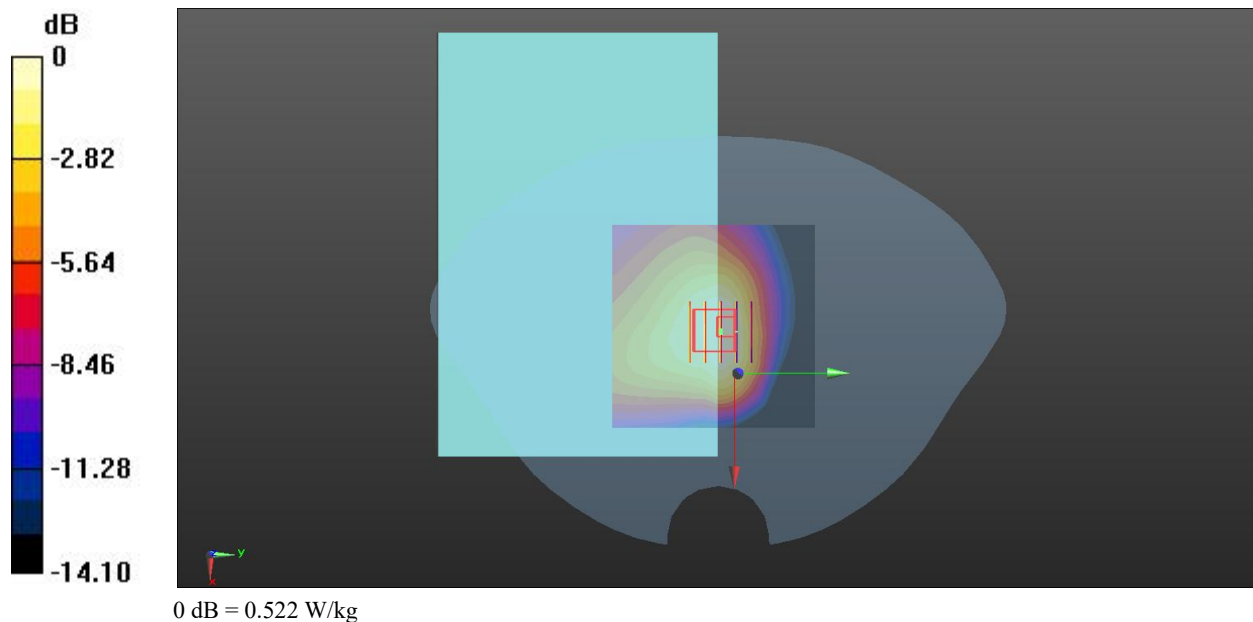

Meas.6 Body Plane with Back Side 0mm on 23230 Channel in LTE Band13 mode with ANT0

Date: 2026.07.24

Communication System Band: Band 13, E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(10.06, 10.06, 10.06) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23230/Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.380 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.40 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.357 W/kg

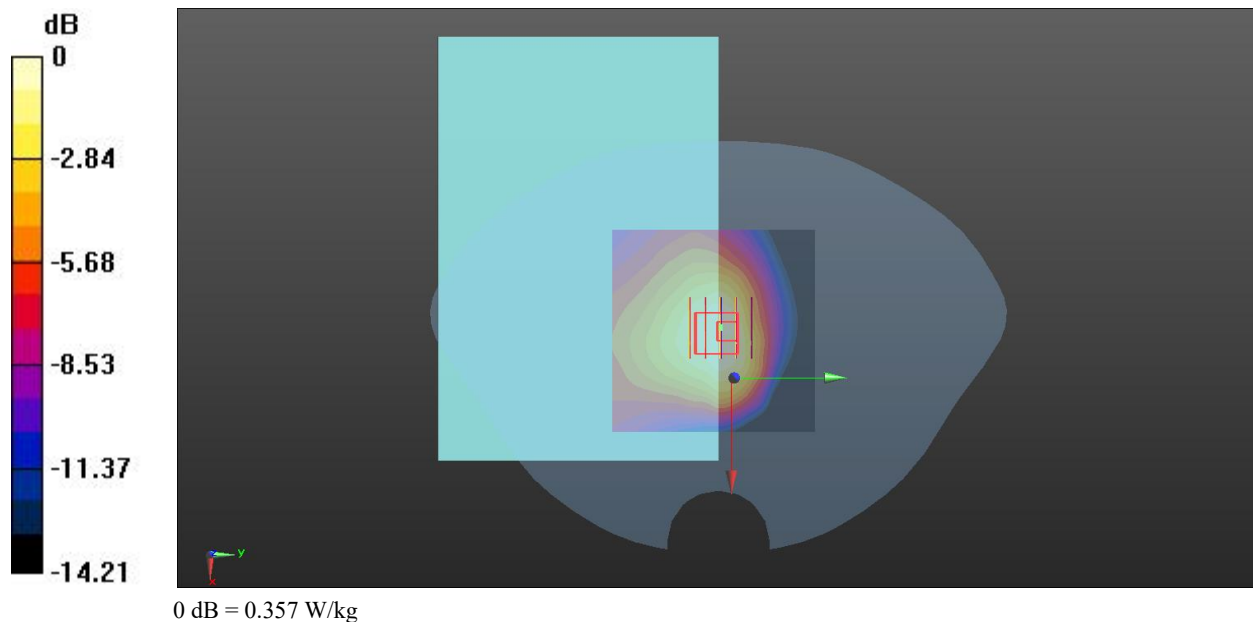

Meas.7 Body Plane with Back Side 0mm on 23330 Channel in LTE Band14 mode with ANT0

Date: 2026.07.24

Communication System Band: Band 14, E-UTRA/FDD (788.0 - 798.0 MHz); Frequency: 793 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(10.06, 10.06, 10.06) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23330/Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.269 W/kg

Ch23330/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.22 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.152 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.255 W/kg

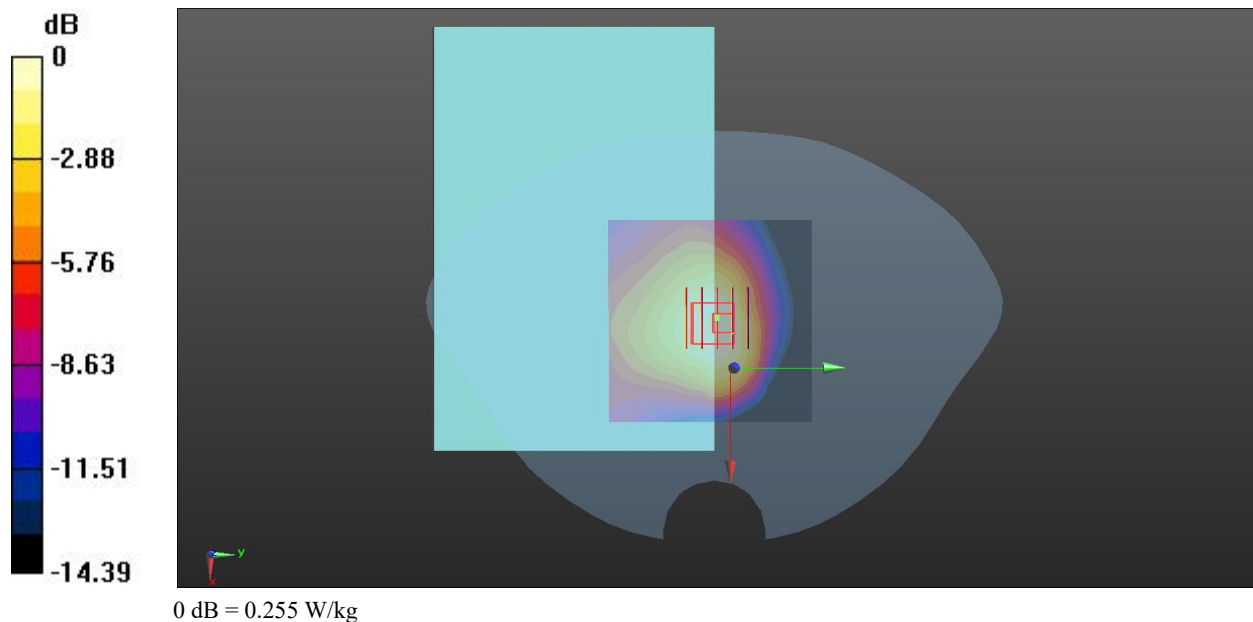

Meas.8 Body Plane with Back Side 0mm on 26140 Channel in LTE Band25 mode with ANT0

Date: 2026.07.26

Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 41.14$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.79, 7.79, 7.79) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch26140/Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.434 W/kg

Ch26140/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.88 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 0.489 W/kg

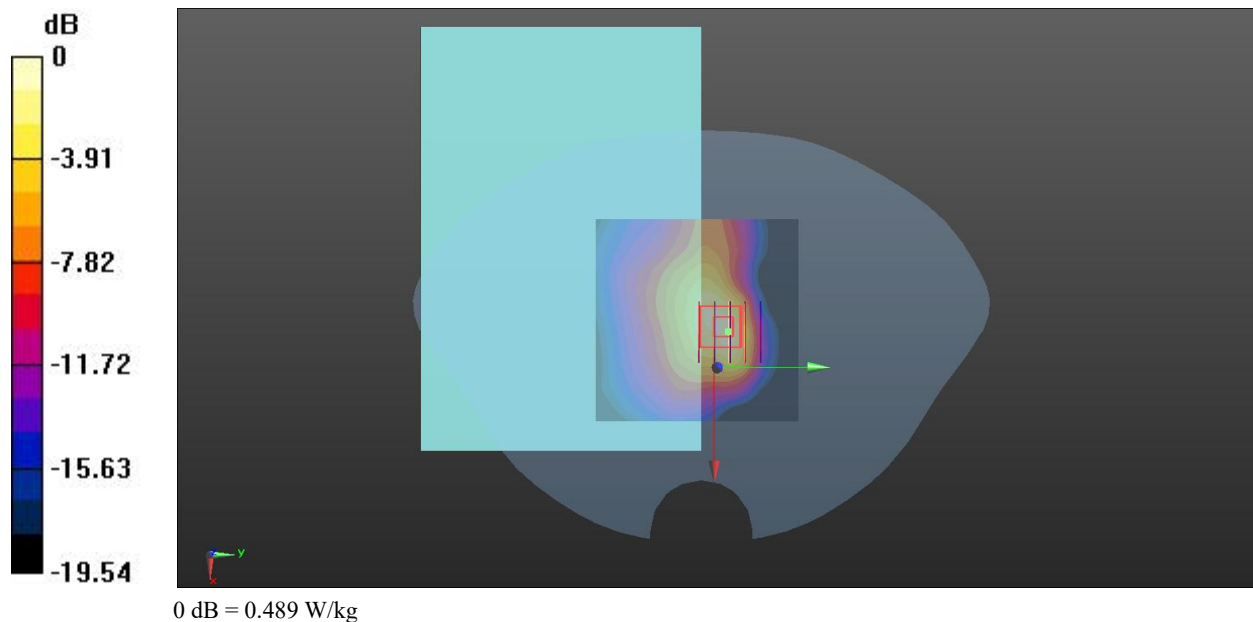

Meas.9 Body Plane with Front Side 0mm on 26765 Channel in LTE Band26 mode with ANT0

Date: 2026.07.25

Communication System Band: Band26,E-UTRA/FDD(814-849); Frequency: 821.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 821.5$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.587$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(9.85, 9.85, 9.85) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch26765/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.484 W/kg

Ch26765/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.09 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.266 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 0.487 W/kg

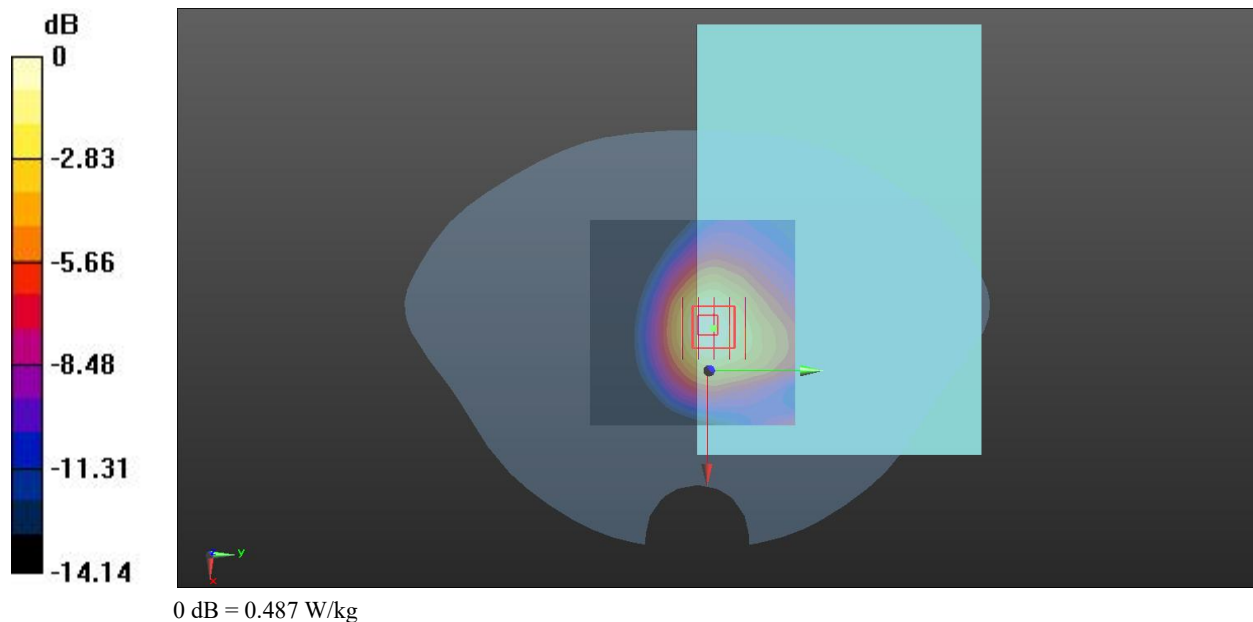

Meas.10 Body Plane with Front Side 0mm on 27710 Channel in LTE Band30 mode with ANT0

Date: 2026.07.27

Communication System Band: Band30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2310$ MHz; $\sigma = 1.649$ S/m; $\epsilon_r = 40.431$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.37, 7.37, 7.37) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch27710/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.540 W/kg

Ch27710/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.748 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 0.499 W/kg

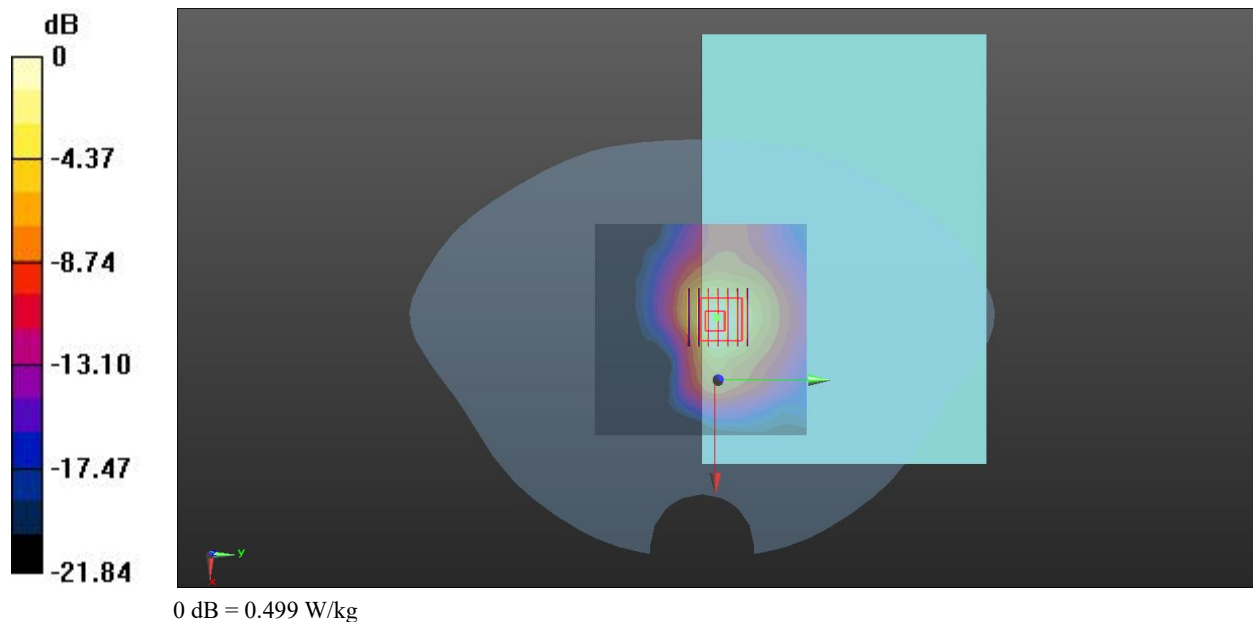

Meas.11 Body Plane with Back Side 0mm on 132572 Channel in LTE Band66 mode with ANT0

Date: 2026.07.25

Communication System Band: Band 66,E-UTRA/FDD; Frequency: 1770 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1770$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.748$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(8.28, 8.28, 8.28) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch132572/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.327 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.06 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.159 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.363 W/kg

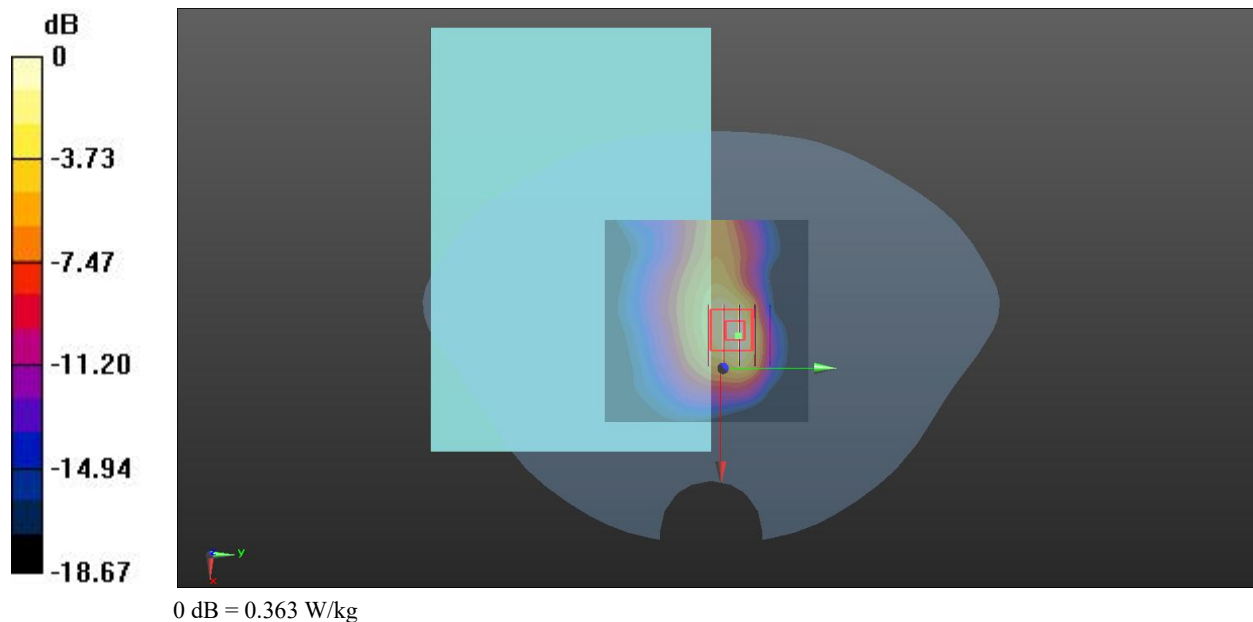

Meas.12 Body Plane with Back Side 0mm on 133222 Channel in LTE Band71 mode with ANT0

Date: 2026.07.24

Communication System Band: Band71; Frequency: 673 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 673$ MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 43.673$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(10.06, 10.06, 10.06) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch133222/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.230 W/kg

Ch133222/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.90 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.367 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.138 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 0.221 W/kg

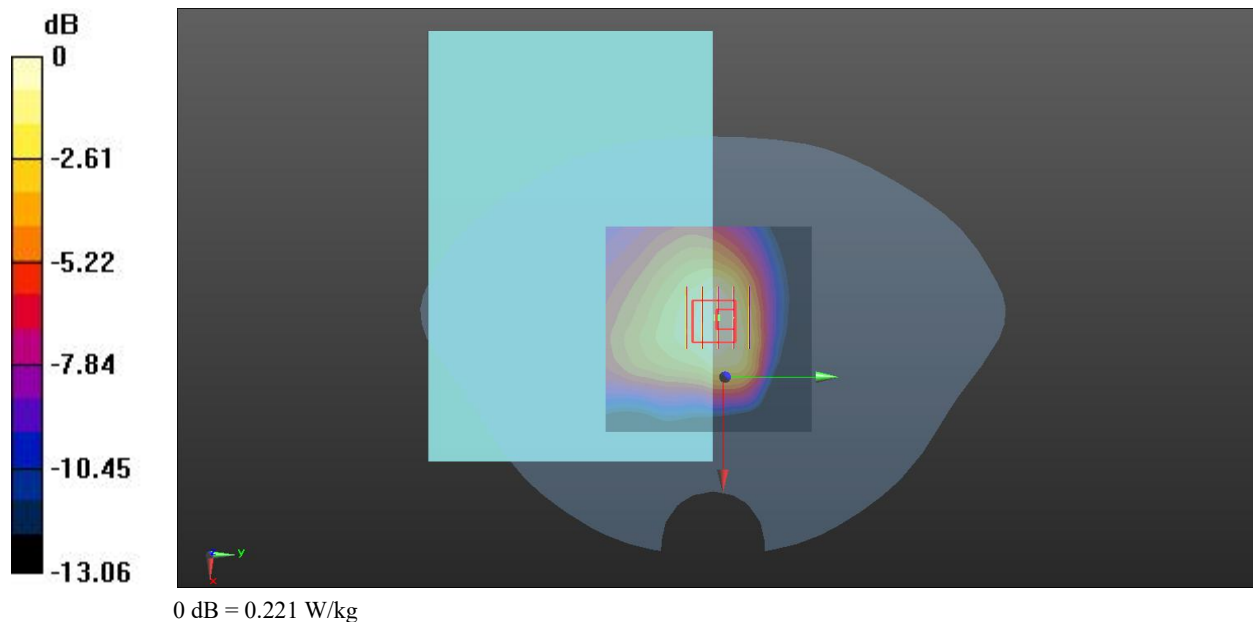

Meas.13 Body Plane with Front Side 0mm on 41490 Channel in LTE Band41 mode with ANT0

Date: 2026.07.28

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2680 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.094$ S/m; $\epsilon_r = 38.857$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.01, 7.01, 7.01) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41490/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.959 W/kg

Ch41490/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.70 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 44.3%

Maximum value of SAR (measured) = 0.959 W/kg

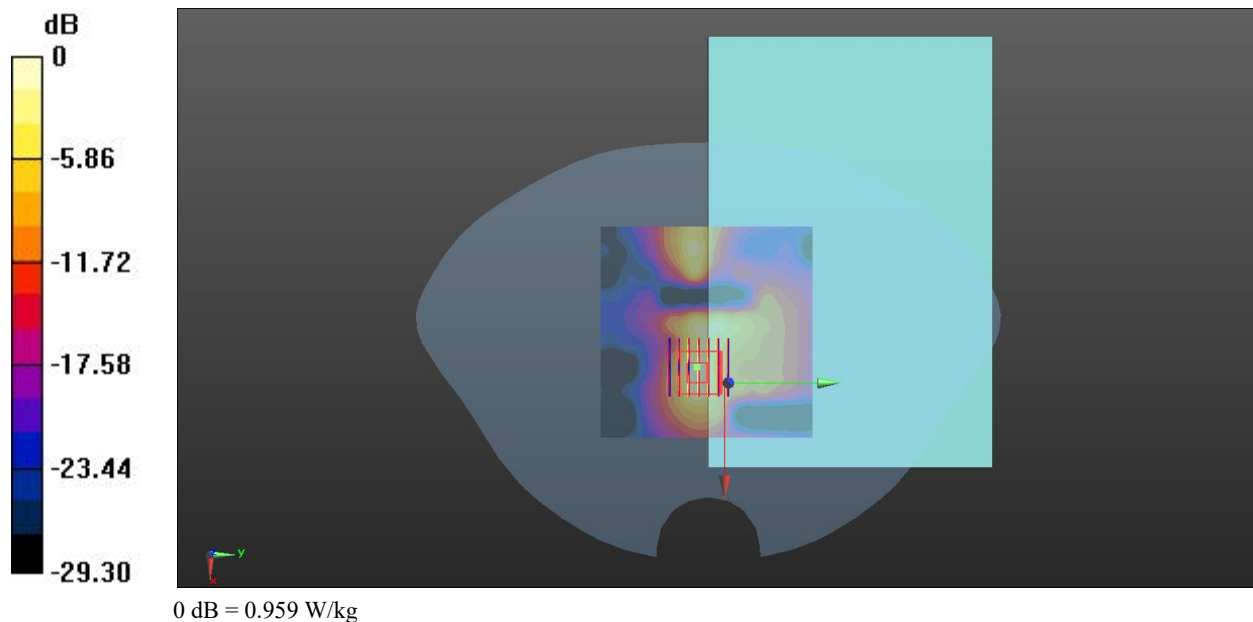

Meas.14 Body Plane with Front Side 0mm on 41690 Channel in LTE Band42 mode with ANT0

Date: 2026.07.28

Communication System Band: Band 42, E-UTRA/TDD (3400.0 - 3600.0 MHz); Frequency: 3410 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3410$ MHz; $\sigma = 2.815$ S/m; $\epsilon_r = 38.467$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.56, 6.56, 6.56) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41690/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.528 W/kg

Ch41690/Zoom Scan (7x7x11)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 5.007 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 0.540 W/kg

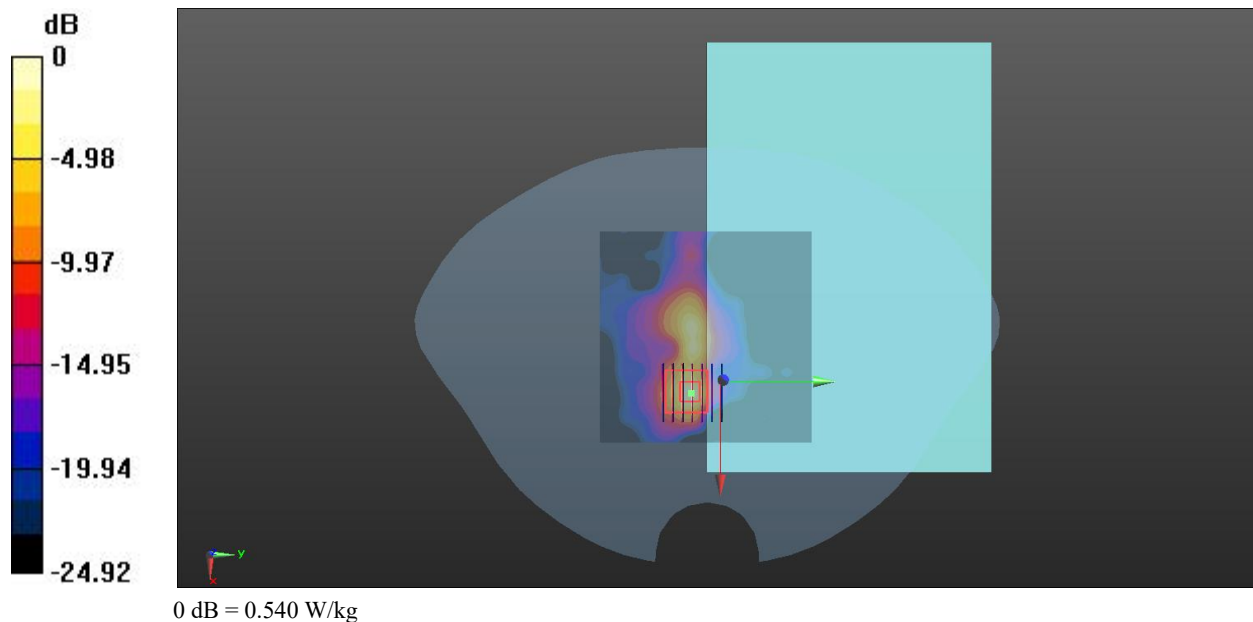

Meas.15 Body Plane with Front Side 0mm on 43690 Channel in LTE Band43 mode with ANT0

Date: 2026.07.29

Communication System Band: Band 43, E-UTRA/TDD (3600.0 - 3800.0 MHz); Frequency: 3610 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3610$ MHz; $\sigma = 3.081$ S/m; $\epsilon_r = 37.518$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.5, 6.5, 6.5) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch43690/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.533 W/kg

Ch43690/Zoom Scan (7x7x11)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 6.690 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 0.538 W/kg

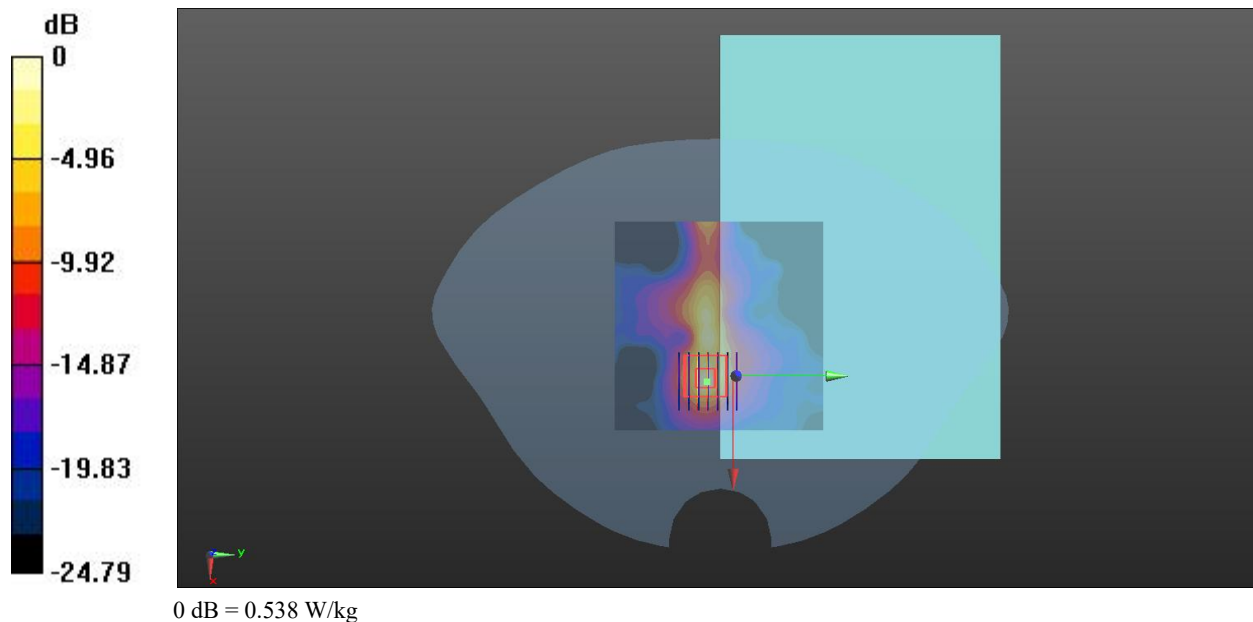

Meas.16 Body Plane with Front Side 0mm on 55340 Channel in LTE Band48 mode with ANT0

Date: 2026.07.29

Communication System Band: Bnad 48; Frequency: 3560 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3560$ MHz; $\sigma = 3.012$ S/m; $\epsilon_r = 37.601$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(6.56, 6.56, 6.56) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch55340/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.371 W/kg

Ch55340/Zoom Scan (7x7x11)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 3.757 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.085 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.424 W/kg

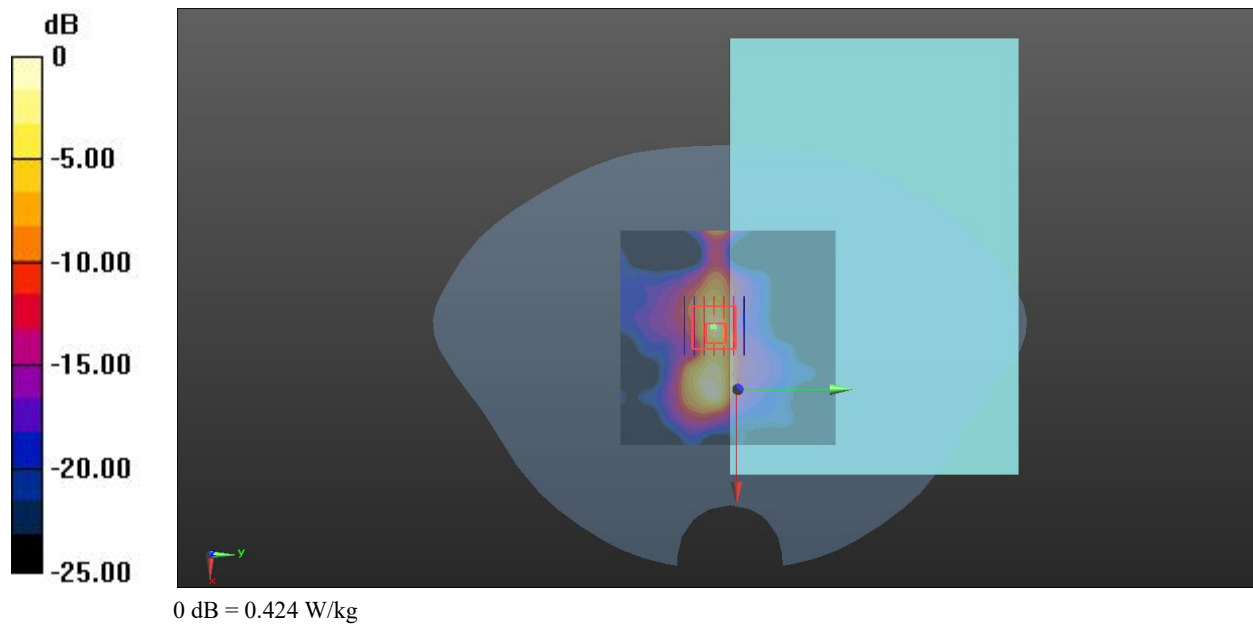

Meas.17 Body Plane with Back Side 0mm on 0 Channel in BT mode with ANT0

Date: 2026.07.27

Communication System Band: 1; Frequency: 2402 MHz; Duty Cycle: 1:292

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 40.184$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.17, 7.17) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch0/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.175 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.4800 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 0.180 W/kg

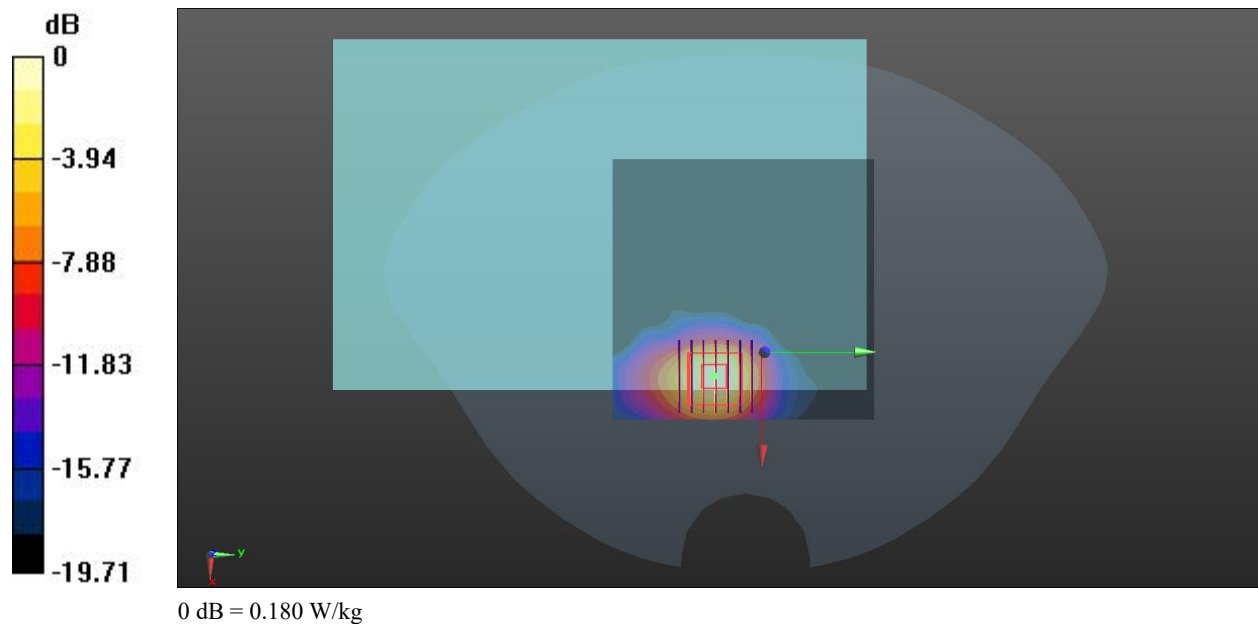

Meas.18 Body Plane with Bottom Edge 0mm on 1 Channel in IEEE802.11b mode with ANT0

Date: 2026.07.27

Communication System Band: 2.4G; Frequency: 2412 MHz; Duty Cycle: 1:1.012

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.751$ S/m; $\epsilon_r = 39.975$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.17, 7.17) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1/Area Scan (51x191x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.639 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.4300 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.629 W/kg

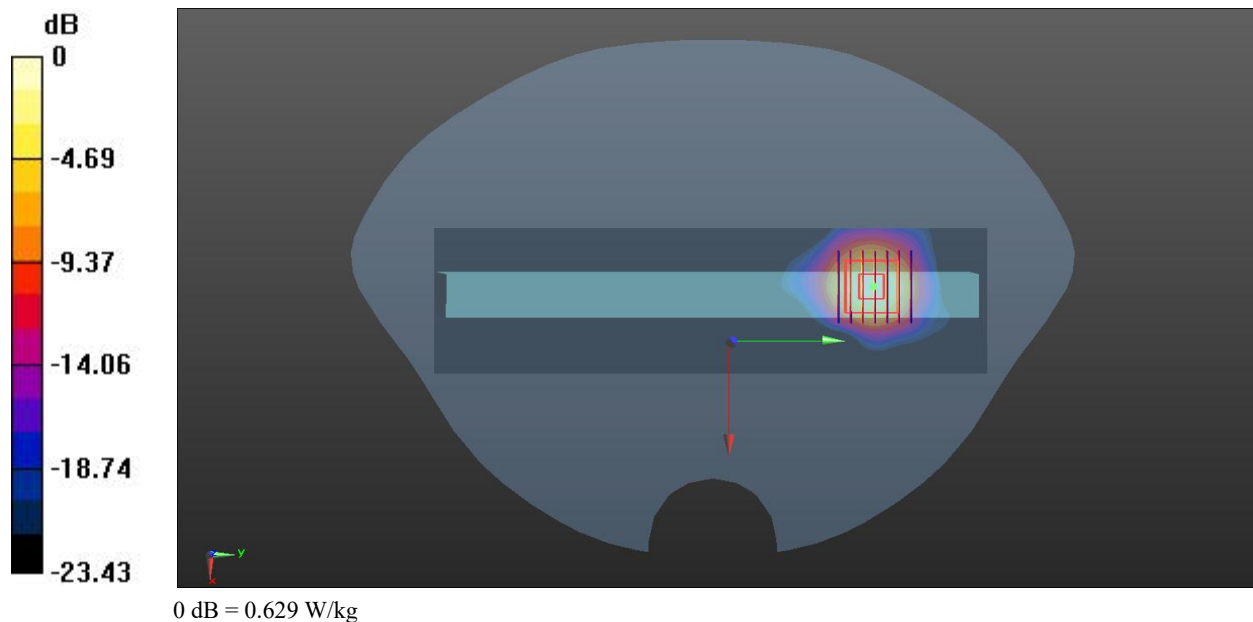

Meas.19 Body Plane with Back Side 0mm on 58 Channel in IEEE802.11ac80 mode with ANT0

Date: 2026.07.29

Communication System Band: 5.3G; Frequency: 5290 MHz; Duty Cycle: 1:1.013

Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.735$ S/m; $\epsilon_r = 36.719$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.37, 5.37, 5.37) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch58/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.573 W/kg

Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 0.511 W/kg

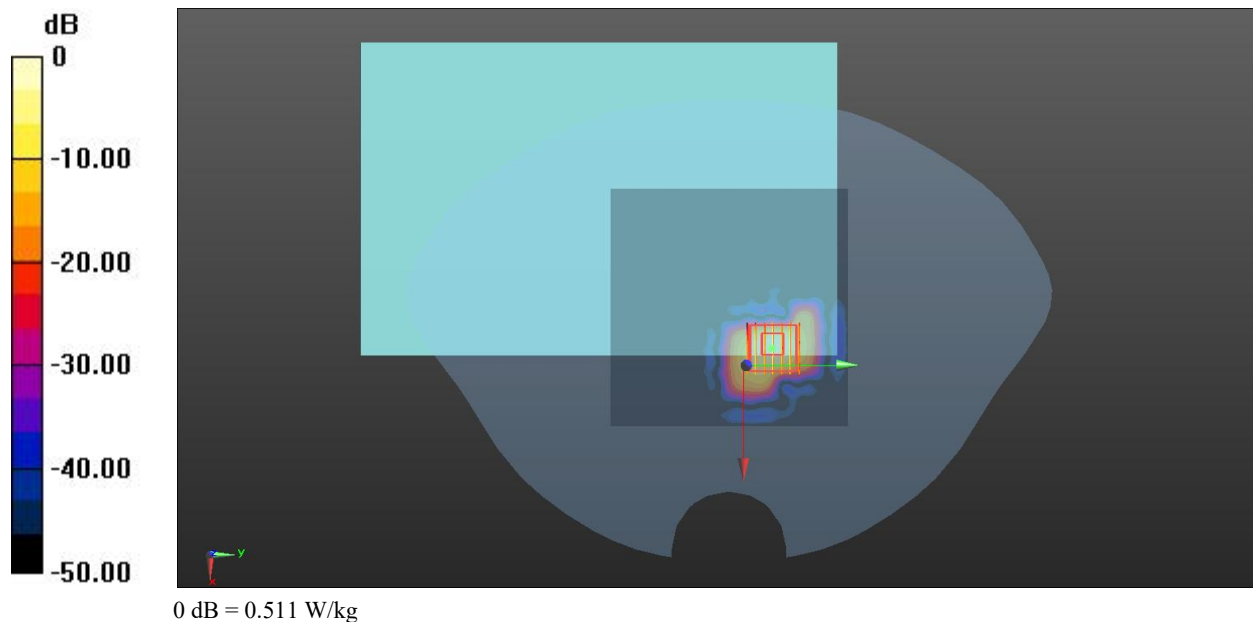

Meas.20 Body Plane with Back Side 0mm on 106 Channel in IEEE802.11ac80 mode with ANT1

Date: 2026.07.30

Communication System Band: 5.6G; Frequency: 5530 MHz; Duty Cycle: 1:1.013

Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 4.906$ S/m; $\epsilon_r = 35.689$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.14, 5.14, 5.14) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch106/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.538 W/kg

Ch106/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.048 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 0.517 W/kg

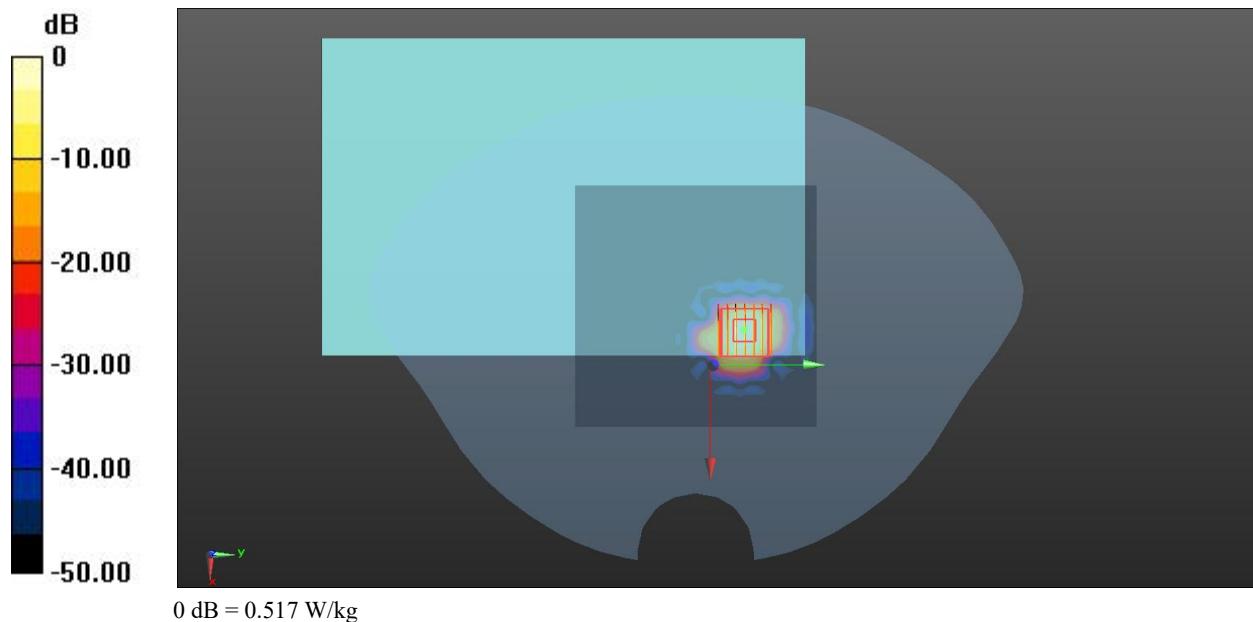

Meas.21 Body Plane with Back Side 0mm on 155 Channel in IEEE802.11ac80 mode with ANT1

Date: 2026.07.30

Communication System Band: 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:1.013

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.205$ S/m; $\epsilon_r = 35.148$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.1, 5.1, 5.1) ; Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch155/Area Scan (111x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.554 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.903 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.045 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 0.453 W/kg

