

FCC PART 15C REPORT FOR CERTIFICATION

On Behalf of

Sceptre Inc.

LED TV

Model Number: G65

Additional Model: A65, A650CV-UMC, A651CV-UMC, A652CV-UMC, A653CV-UMC, A654CV-UMC, A655CV-UMC, A656CV-UMC, A657CV-UMC, A658CV-UMC, A659CV-UMC, A550CV-UMC, G55, A55, A551CV-UMC, A552CV-UMC, A553CV-UMC, A554CV-UMC, , A555CV-UMC, A556CV-UMC, A557CV-UMC, A558CV-UMC, A559CV-UMC, G50, A50, A510CV-UMC, A511CV-UMC, A512CV-UMC, A513CV-UMC, A514CV-UMC, A515CV-UMC, A516CV-UMC, A517CV-UMC, A518CV-UMC, A519CV-UMC

FCC ID: 2AGEEG55

Prepared for:	Sceptre Inc.
	16800 E. Gale Ave.City of Industry, CA,91745,USA
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808



Report Number:	ESTE-R1912053
Date of Test:	Nov. 14~Dec. 17, 2019
Date of Report:	Dec. 18, 2019

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
1.2. Antenna Information	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty	8
2.4. Assistant equipment used for test	8
2.5. Block Diagram.....	8
2.6. Test Mode	9
2.7. Power Setting of Test Software	10
2.8. Duty Cycle.....	10
2.9. Channel List.....	13
2.10. Test Equipment List	14
3. 6dB BANDWIDTH	15
3.1. Limit	15
3.2. Test Setup	15
3.3. Spectrum Analyzer Setting.....	15
3.4. Test Procedure	15
3.5. Test Result	16
4. MAXIMUM PEAK OUTPUT POWER	29
4.1. Limit	29
4.2. Test Setup	29
4.3. Spectrum Analyzer Setting.....	29
4.4. Test Procedure	29
4.5. Test Result	30
5. POWER SPECTRAL DENSITY.....	43
5.1. Limit	43
5.2. Test Setup	43
5.3. Spectrum Analyzer Setting.....	43
5.4. Test Procedure	43
5.5. Test Result	44
6. CONDUCTED BAND EDGE	57
6.1. Limit	57
6.2. Test Setup	57
6.3. Spectrum Analyzer Setting.....	57
6.4. Test Procedure	57
6.5. Test Result	58
7. CONDUCTED SPURIOUS EMISSIONS	59
7.1. Limit	59
7.2. Test Setup	59
7.3. Spectrum Analyzer Setting.....	59
7.4. Test Procedure	59

7.5.	Test Result	60
8.	RADIATED SPURIOUS EMISSIONS AND BAND EDGE	62
8.1.	Limit	62
8.2.	Test Setup	63
8.3.	Spectrum Analyzer Setting.....	64
8.4.	Test Procedure	65
8.5.	Test Result	66
9.	AC POWER LINE CONDUCTED EMISSIONS	82
9.1.	Limit	82
9.2.	Test Setup	82
9.3.	Spectrum Analyzer Setting.....	82
9.4.	Test Procedure	82
9.5.	Test Result	83
10.	ANTENNA REQUIREMENTS.....	95
10.1.	Limit	95
10.2.	Test Result	95
11.	TEST SETUP PHOTO.....	96
12.	EUT PHOTO	100

EST Technology Co., Ltd.

Applicant:	Sceptre Inc.		
Address:	16800 E. Gale Ave.City of Industry, CA,91745,USA		
Manufacturer:	Sceptre Inc.		
Address:	16800 E. Gale Ave.City of Industry, CA,91745,USA		
E.U.T:	LED TV		
Model Number:	G65		
Additional Model:	A65, A650CV-UMC, A651CV-UMC, A652CV-UMC, A653CV-UMC, A654CV-UMC, A655CV-UMC, A656CV-UMC, A657CV-UMC, A658CV-UMC, A659CV-UMC, A550CV-UMC, G55, A55, A551CV-UMC, A552CV-UMC, A553CV-UMC, A554CV-UMC, , A555CV-UMC, A556CV-UMC, A557CV-UMC, A558CV-UMC, A559CV-UMC, G50, A50, A510CV-UMC, A511CV-UMC, A512CV-UMC, A513CV-UMC, A514CV-UMC, A515CV-UMC, A516CV-UMC, A517CV-UMC, A518CV-UMC, A519CV-UMC Note: The three TV sets are of different sizes with different power boards, all other parameters are the same.		
Power Supply:	AC 100-240V, 50/60Hz		
Trade Name:	-----	Serial No.:	-----
Date of Receipt:	Nov. 14, 2019	Date of Test:	Nov. 14~Dec. 17, 2019
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:	Reviewed by:	Date: Dec. 18, 2019	
 _____ Ring / Assistant	 _____ Shawn / Engineer	 _____ Iceman Hu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	LED TV
Model Number	:	G65
Software Version	:	N/A
Hardware Version	:	N/A
Operation frequency	:	2412MHz~2462MHz 2422MHz~2452MHz
Number of channel	:	IEEE 802.11b: 11 Channels IEEE 802.11g: 11 Channels IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Max Output Power (PEAK)	:	IEEE 802.11b: 15.55dBm IEEE 802.11g: 19.71dBm IEEE 802.11n HT20: 21.37dBm IEEE 802.11n HT40: 21.05dBm
Modulation Type	:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Sample Type	:	Prototype production

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal antenna	N/A	3.2
2	N/A	N/A	Internal antenna	N/A	3.2

Note:

- The EUT has two antennas, the antennas can support SISO function in IEEE 802.11b and IEEE 802.11g, and can support MIMO function in IEEE 802.11n.
- The EUT can work as CDD mode in IEEE 802.11n HT20 and IEEE 802.11n HT40, and can operate with one spatial stream.
- According to ANSI C63.10:2013 14.4.3.2.5 a):
 $\text{Directional gain} = 3.2\text{dBi} + 10 \times \log(2/1)\text{dB} = 6.21\text{dBi} > 6\text{dBi}$
 So, the power spectral density limit needs to be reduced.
 $\text{PSD limit} = 8\text{dBm}/3\text{kHz} - (6.21 - 6)\text{dB} = 7.79\text{dBm}/3\text{kHz}$
- After pre-test all antenna configurations, the worst case configuration is listed below.

TX Mode \ ANT No.	SISO Configuration	MIMO Configuration
IEEE 802.11b	ANT1, ANT2	/
IEEE 802.11g	ANT1, ANT2	/
IEEE 802.11n HT20	/	ANT1+ANT2
IEEE 802.11n HT40	/	ANT1+ANT2

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth	15.247(a)(2)	PASS
4	Maximum Peak Output Power	15.247(b)(3)	PASS
5	Power Spectral Density	15.247(e)	PASS
6	Conducted Band Edge	15.247(d)	PASS
7	Conducted Spurious Emissions	15.247(d)	PASS
8	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
9	AC Power Line Conducted Emissions	15.207	PASS
10	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certificated by CNAS, CHINA
Registration No.: L5288
Date of registration: November 13, 2017

Certificated by FCC, USA
Designation Number: CN1215
Test Firm Registration Number: 722932
Date of registration: November 21, 2017

Certificated by A2LA, USA
Registration No.: 4366.01
Date of registration: November 07, 2017

Certificated by Industry Canada
CAB identifier No.: CN0035
Date of registration: January 04, 2019

Certificated by VCCI, Japan
Registration No.: R-13663; C-14103
Date of registration: July 25, 2017
This Certificate is valid until: July 24, 2020

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by TUV/PS, Shenzhen
Registration No.: SCN1017
Date of registration: January 27, 2011

Certificated by Intertek ETL SEMKO
Registration No.: 2011-RTL-L2-64
Date of registration: April 28, 2011

Certificated by Nemko, Hong Kong
Registration No.: 175193
Date of registration: May 4, 2011

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 18GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.8m	AC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into 2.4G WIFI test mode by software before test.

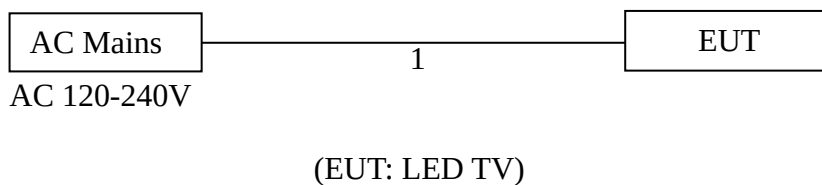

2.6. Test Mode

The test mode was selected for the final test as listed below.

Test Item	Mode	Date Rate	Test Channel
6dB Bandwidth	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS8	Low/Middle/High
	IEEE 802.11n HT40	MCS8	Low/Middle/High
Maximum Peak Output Power	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS8	Low/Middle/High
	IEEE 802.11n HT40	MCS8	Low/Middle/High
Power Spectral Density	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS8	Low/Middle/High
	IEEE 802.11n HT40	MCS8	Low/Middle/High
Conducted Band Edge	IEEE 802.11b	1Mbps	Low/ High
	IEEE 802.11g	6Mbps	Low/ High
	IEEE 802.11n HT20	MCS8	Low/ High
	IEEE 802.11n HT40	MCS8	Low/ High
Conducted Spurious Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS8	Low/Middle/High
	IEEE 802.11n HT40	MCS8	Low/Middle/High
Radiated Spurious Emissions(Below 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS8	Low/Middle/High
	IEEE 802.11n HT40	MCS8	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS8	Low/Middle/High
	IEEE 802.11n HT40	MCS8	Low/Middle/High
Radiated Band Edge	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS8	Low/Middle/High
	IEEE 802.11n HT40	MCS8	Low/Middle/High
AC Power Line Conducted Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS8	Low/Middle/High
	IEEE 802.11n HT40	MCS8	Low/Middle/High

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Power Setting of Test Software

Software Name	SecureCRT 5.50		
Frequency(MHz)	2412	2437	2462
IEEE 802.11b Setting	11	11	11
IEEE 802.11g Setting	11	11	11
IEEE 802.11n HT20 Setting	11	11	11
Frequency(MHz)	2422	2437	2452
IEEE 802.11n HT40 Setting	11	11	11


2.8. Duty Cycle

Temperature	25℃	Relative Humidity	41%	Test Voltage	120V/60Hz
Mode	Fre(MHz)	On time(ms)	Total Time(ms)	Duty Cycle	Duty Factor
IEEE 802.11b	2437	8.46380	8.49280	99.66	0.00
IEEE 802.11g	2437	1.42029	1.50725	94.23	0.26
IEEE 802.11n HT20	2437	0.90580	1.57951	57.35	2.41
IEEE 802.11n HT40	2437	0.53625	1.48116	36.20	4.41


Note:

1. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
2. If duty cycle $\geq$ 98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor(consider to be zero).
3. The conducted peak output power and peak power spectral density no need to consider duty factor.
4. The on-time time is transmission duration(T).


IEEE 802.11b 2437MHz

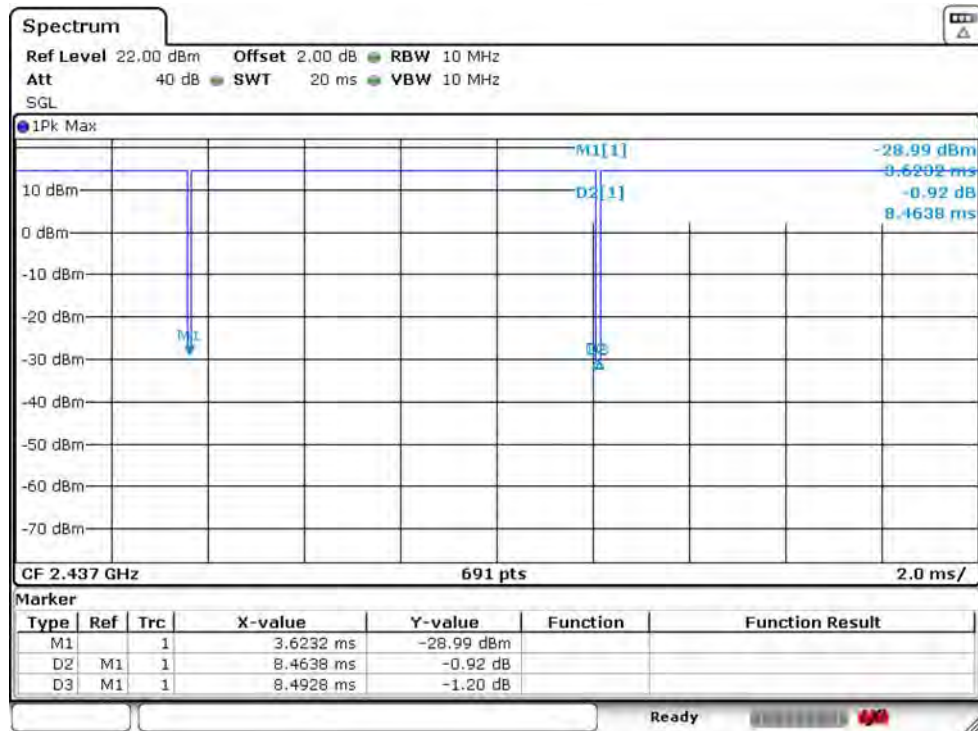


IEEE 802.11g 2437MHz

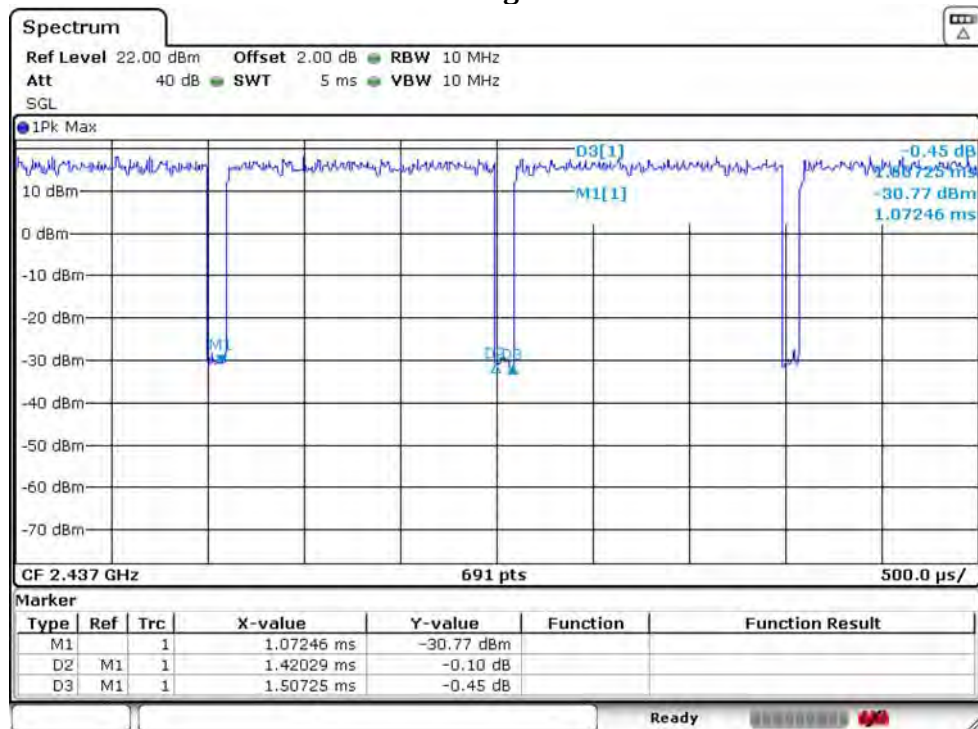

IEEE 802.11n HT20 2437MHz

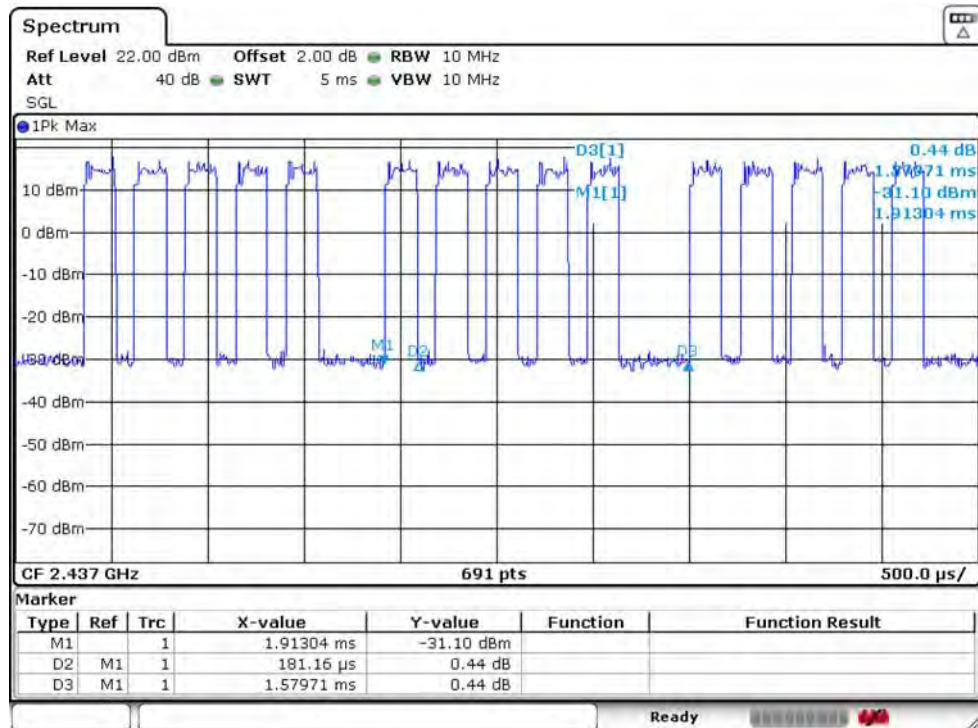

IEEE 802.11n HT40 2437MHz

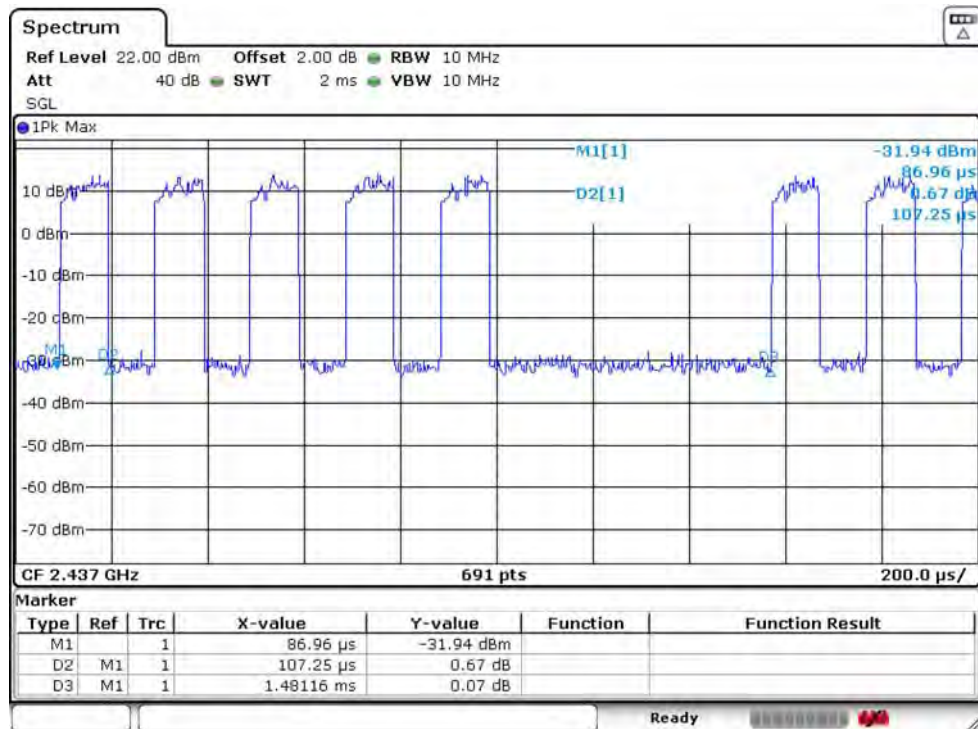

2.9. Channel List

IEEE 802.11b/802.11g/802.11n HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		
IEEE 802.11n HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

2.10. Test Equipment List

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 14,19	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 14,19	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 14,19	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 14,19	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	EST-E031	LISAI	June 14,19	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 14,19	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 14,19	1 Year

3. 6dB BANDWIDTH

3.1. Limit

Systems using digital modulation techniques operate in the 2400-2483.5 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2. Test Setup



3.3. Spectrum Analyzer Setting

6dB Bandwidth

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth

Spectrum Parameters	Setting
RBW	300KHz(20MHz Bandwidth mode)/1MHz(40MHz Bandwidth mode)
VBW	1MHz(20MHz Bandwidth mode)/3MHz(40MHz Bandwidth mode)
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


3.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.


3.5. Test Result

Temperature	25℃	Relative Humidity	41%	Test Voltage	120V/60Hz
Mode	Freq (MHz)	6dB Bandwidth (MHz)		Limit (MHz)	Result
		ANT 1	ANT 2		
IEEE 802.11b	2412	9.06	9.03	≥ 0.5	PASS
	2437	9.07	9.06	≥ 0.5	PASS
	2462	9.01	9.06	≥ 0.5	PASS
IEEE 802.11g	2412	15.12	15.11	≥ 0.5	PASS
	2437	15.12	15.11	≥ 0.5	PASS
	2462	15.12	15.11	≥ 0.5	PASS
IEEE 802.11n HT20	2412	16.04	15.99	≥ 0.5	PASS
	2437	16.02	15.98	≥ 0.5	PASS
	2462	16.02	16.02	≥ 0.5	PASS
IEEE 802.11n HT40	2422	35.11	35.10	≥ 0.5	PASS
	2437	35.12	35.10	≥ 0.5	PASS
	2452	35.11	35.10	≥ 0.5	PASS


IEEE 802.11b 2412MHz_ANT 1

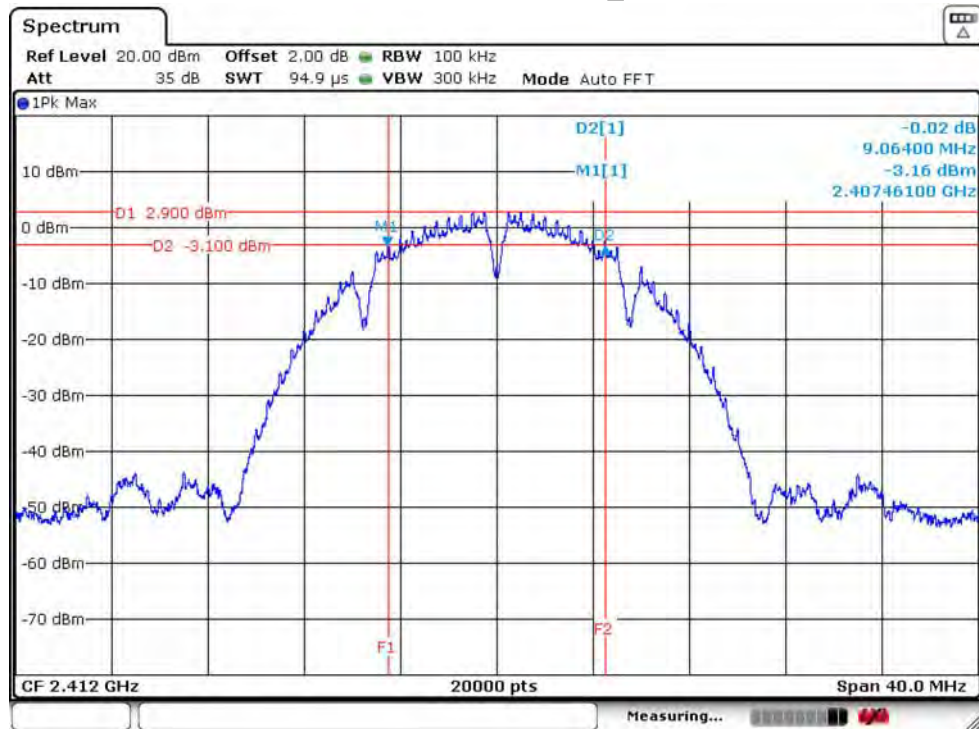


IEEE 802.11b 2412MHz_ANT 2

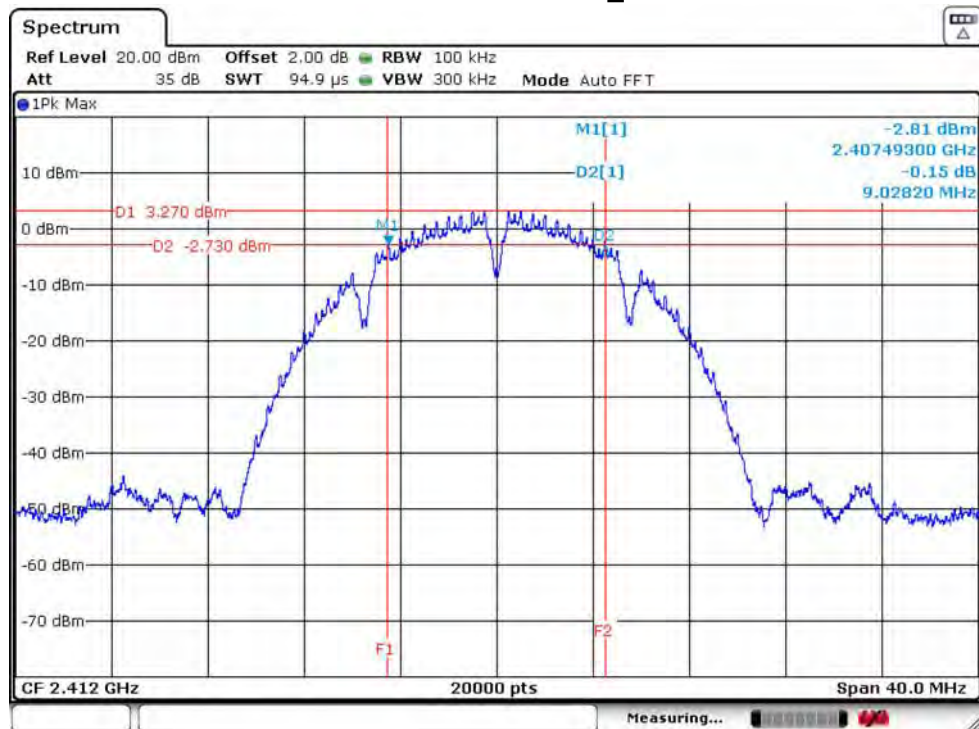


IEEE 802.11b 2437MHz_ANT 1

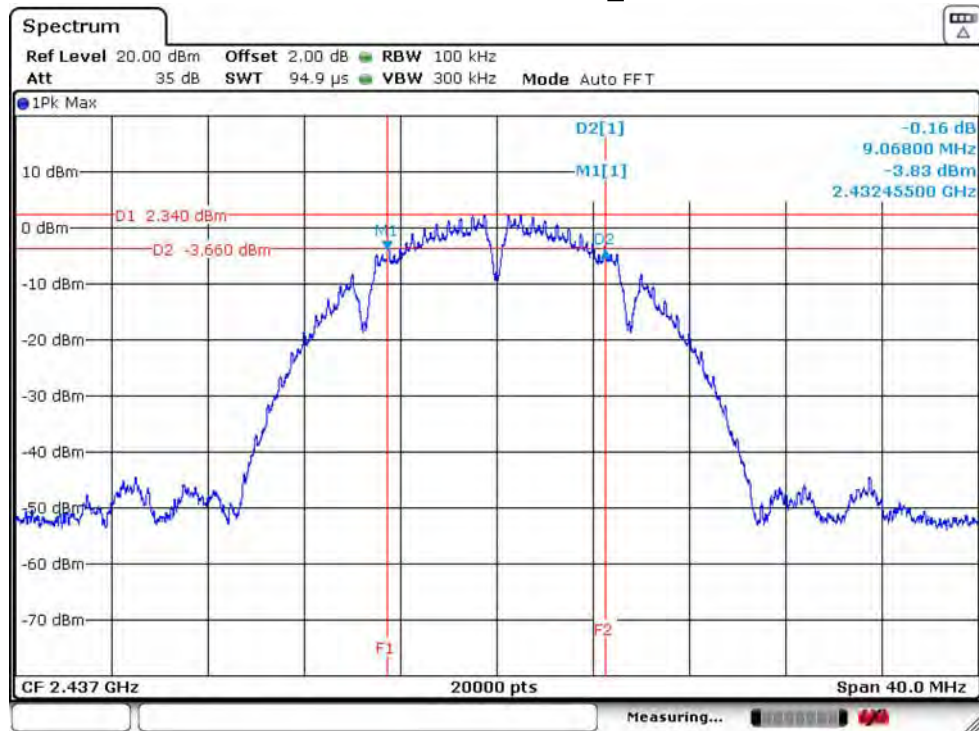


IEEE 802.11b 2437MHz_ANT 2

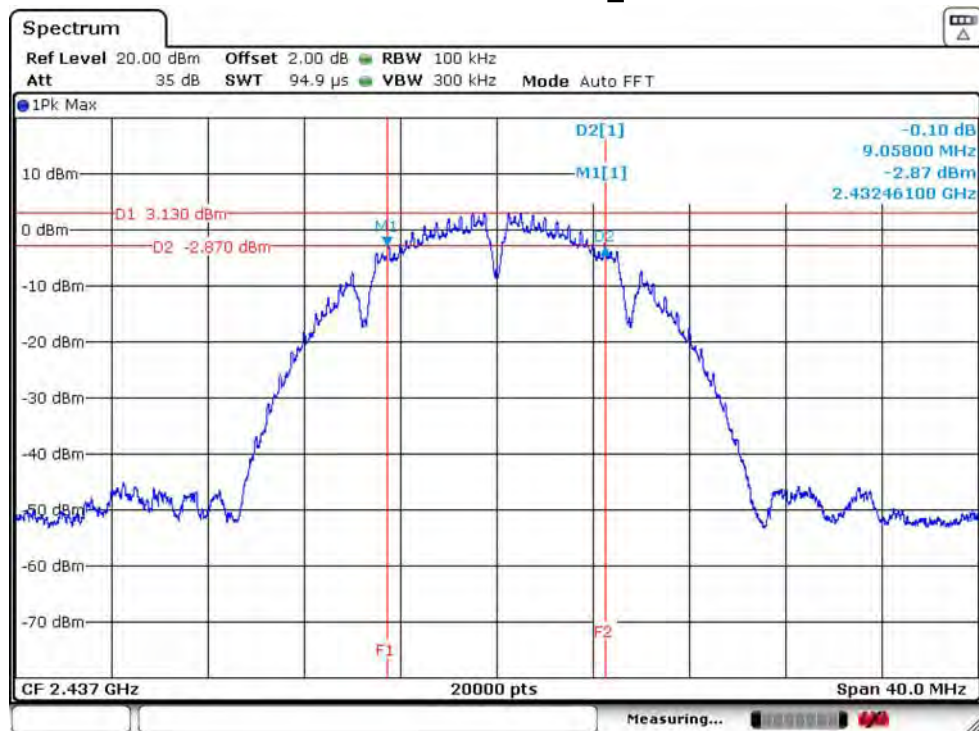


IEEE 802.11b 2462MHz_ANT 1

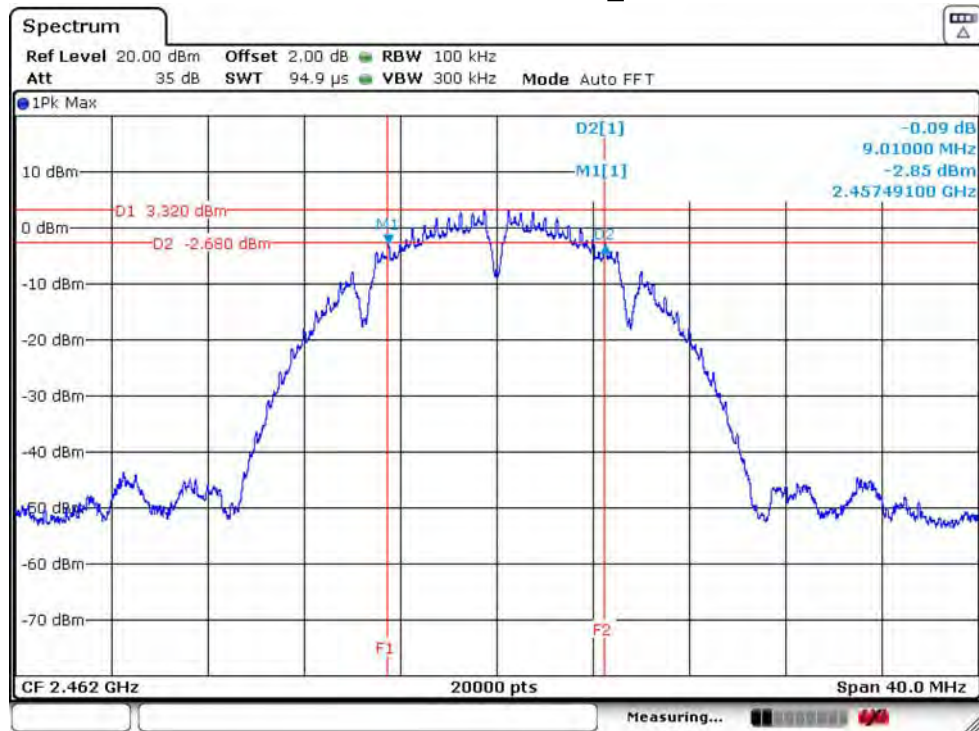


IEEE 802.11b 2462MHz_ANT 2

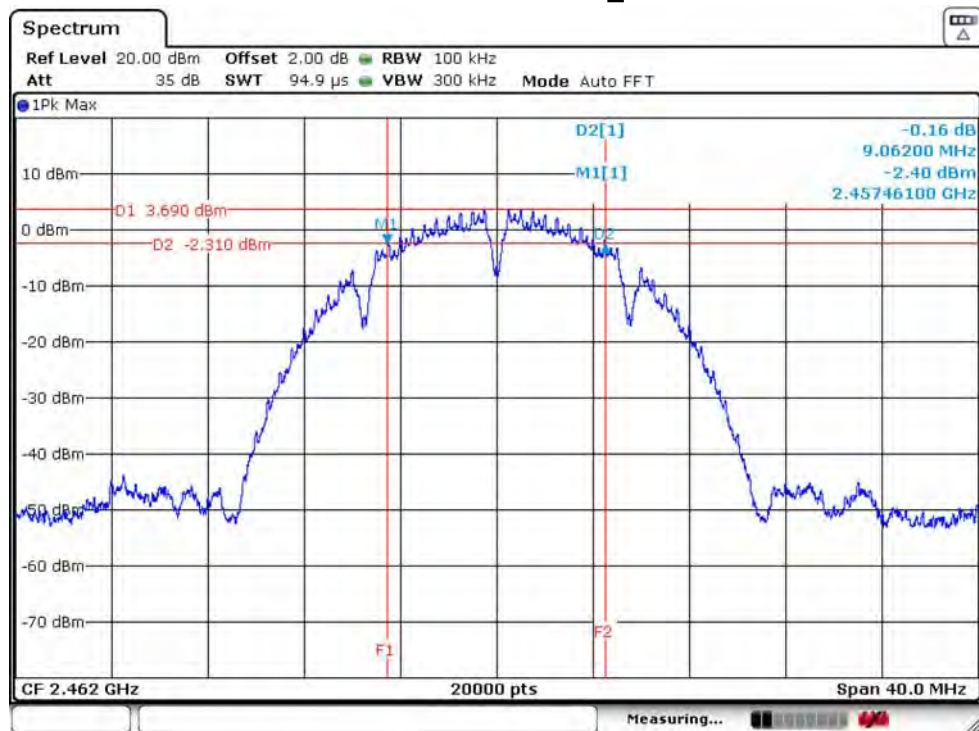


IEEE 802.11g 2412MHz_ANT 1

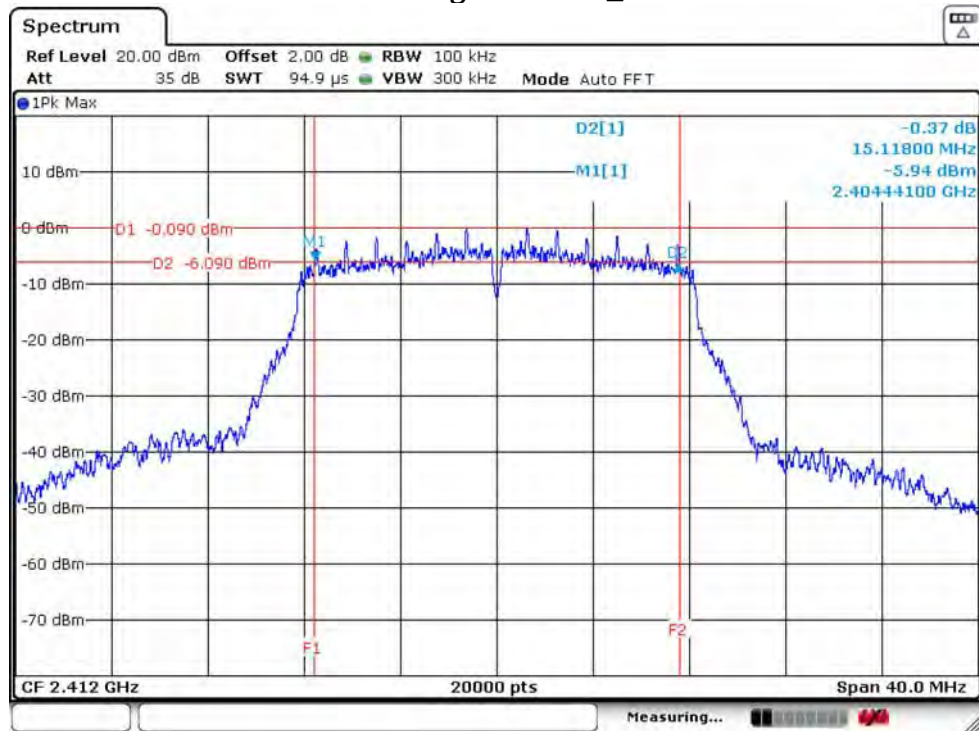


IEEE 802.11g 2412MHz_ANT 2

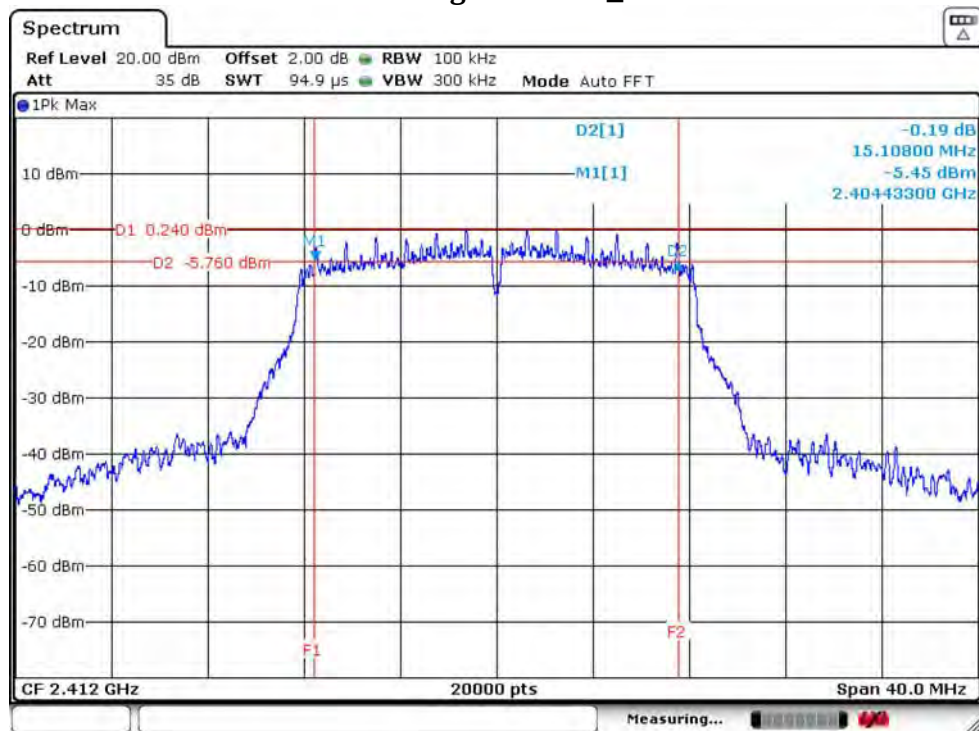


IEEE 802.11g 2437MHz_ANT 1

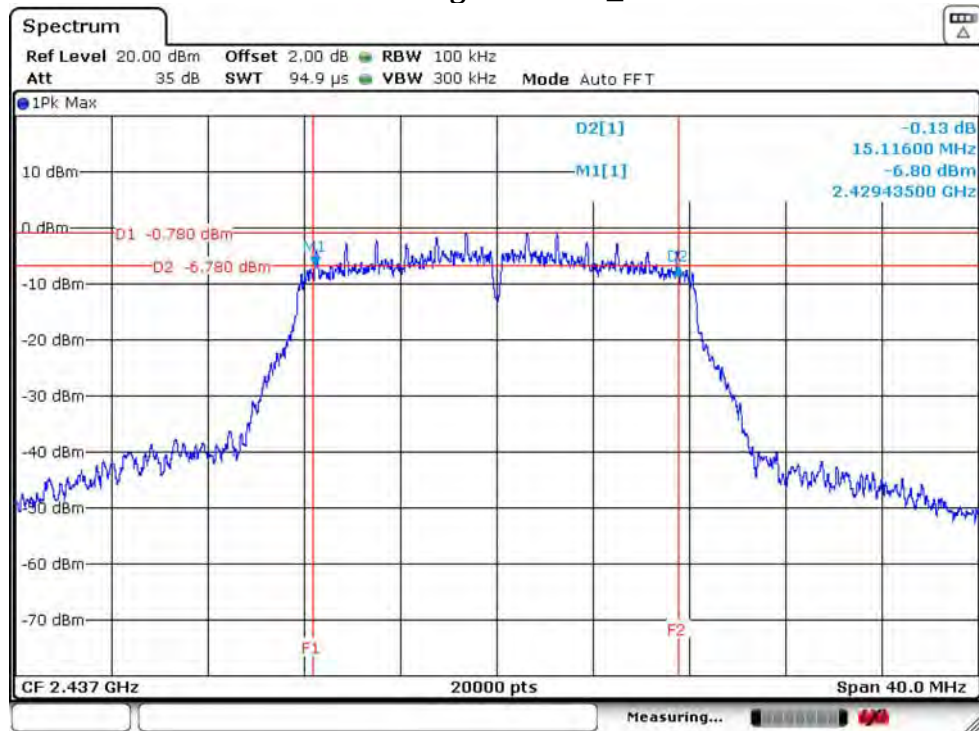


IEEE 802.11g 2437MHz_ANT 2

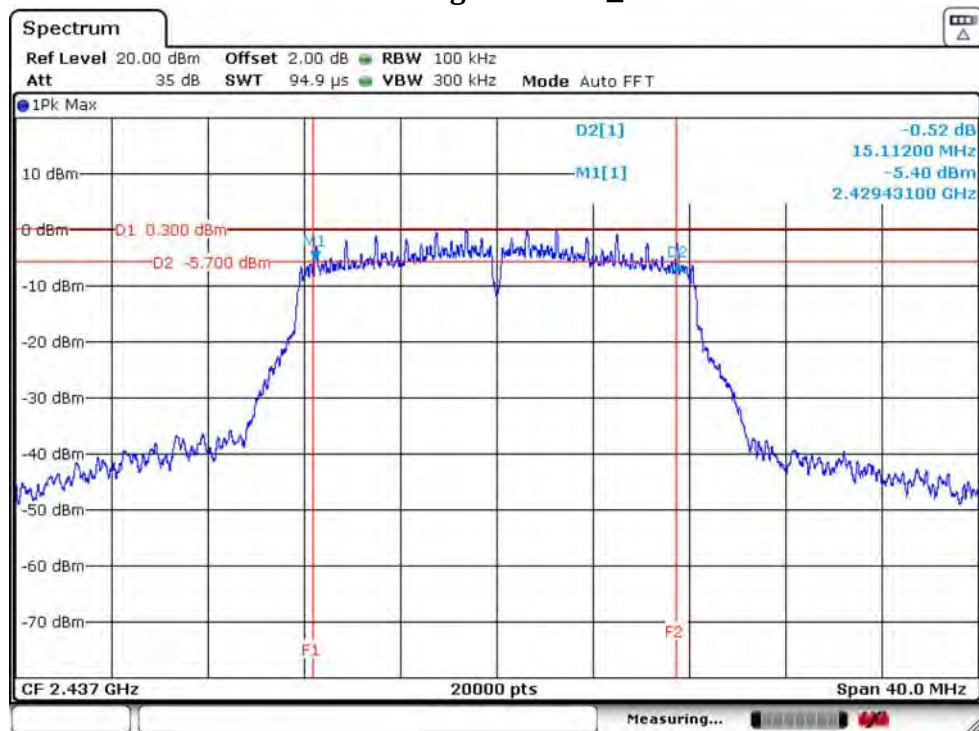


IEEE 802.11g 2462MHz_ANT 1

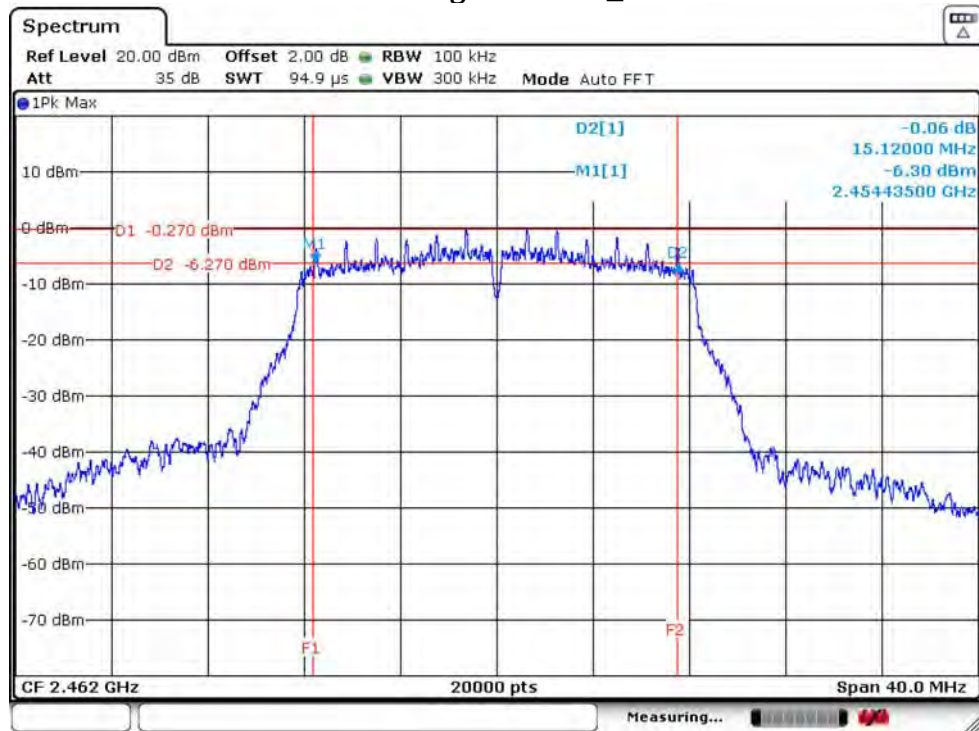


IEEE 802.11g 2462MHz_ANT 2

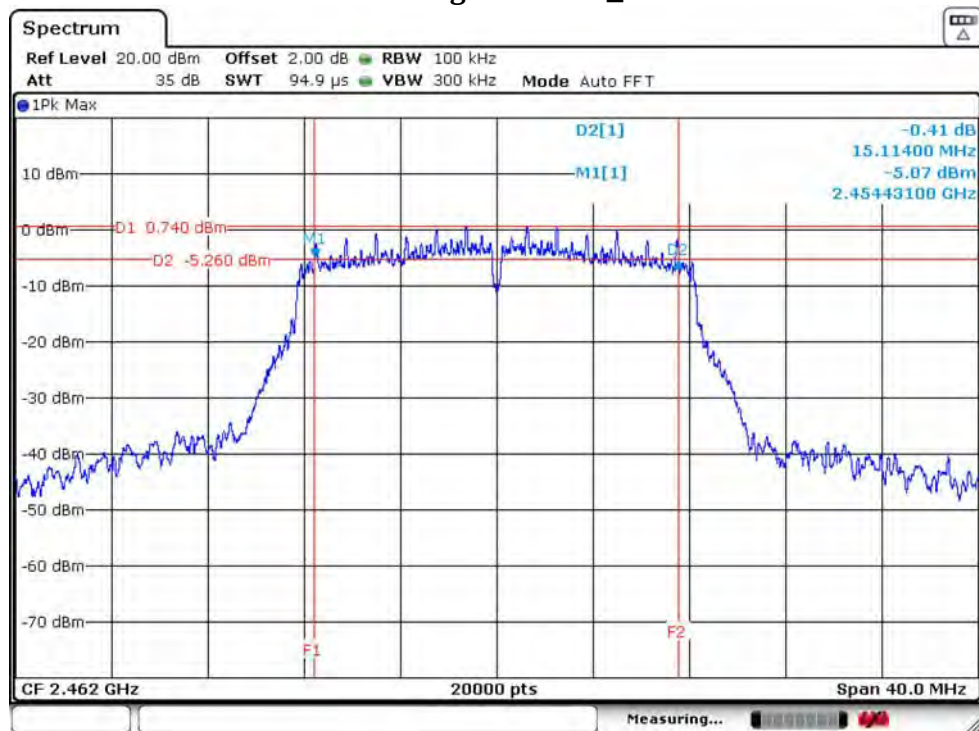


IEEE 802.11n HT20 2412MHz_ANT 1

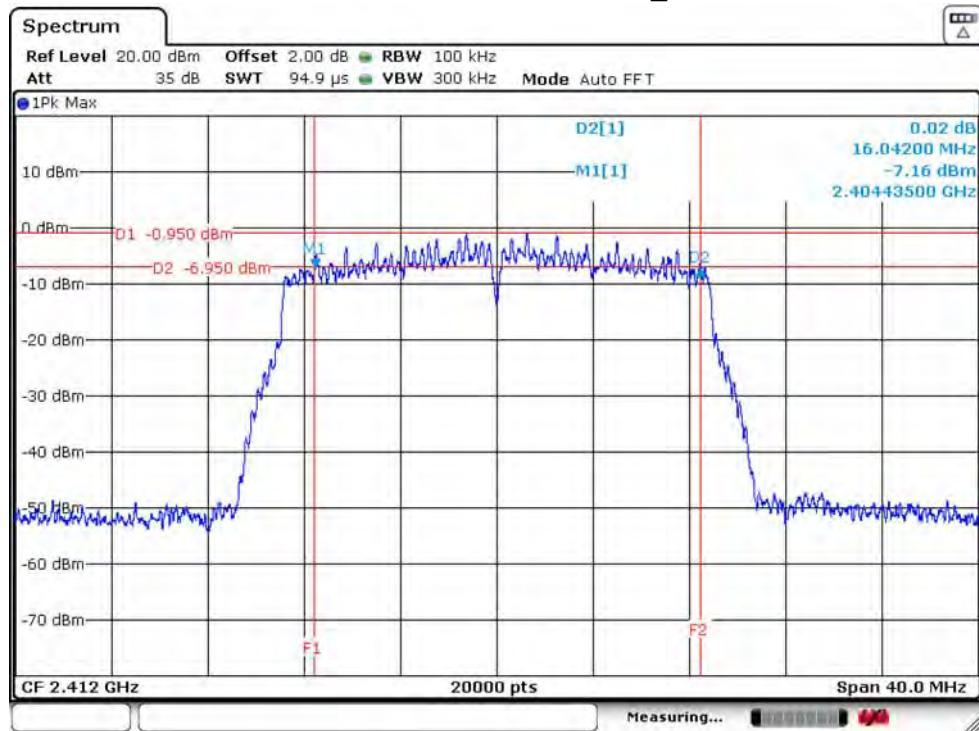


IEEE 802.11n HT20 2412MHz_ANT 2

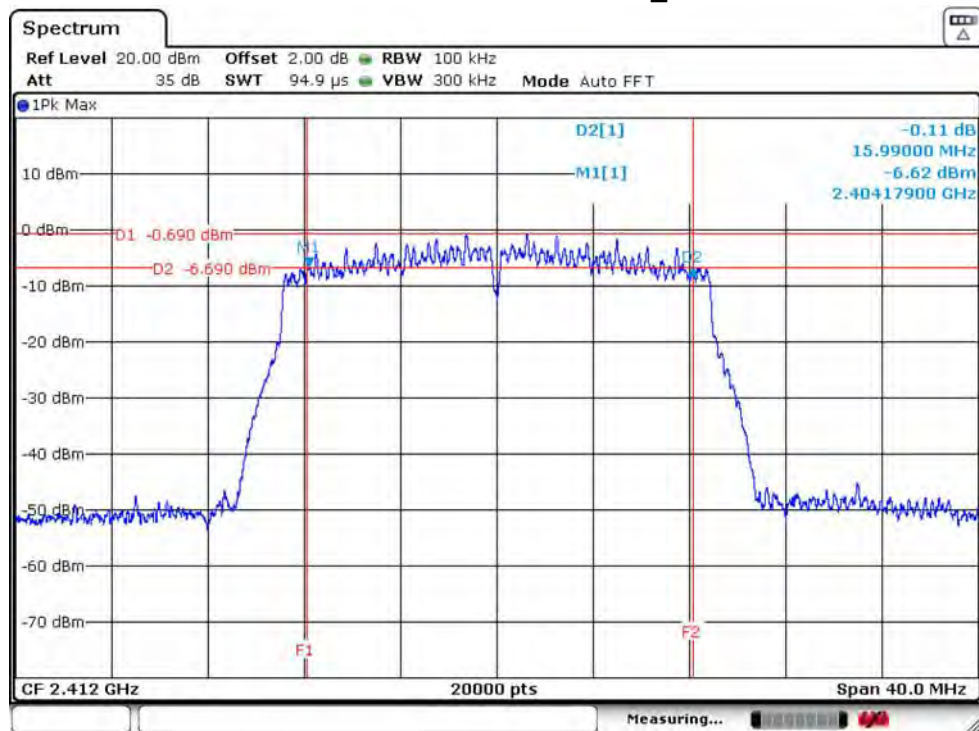


IEEE 802.11n HT20 2437MHz_ANT 1

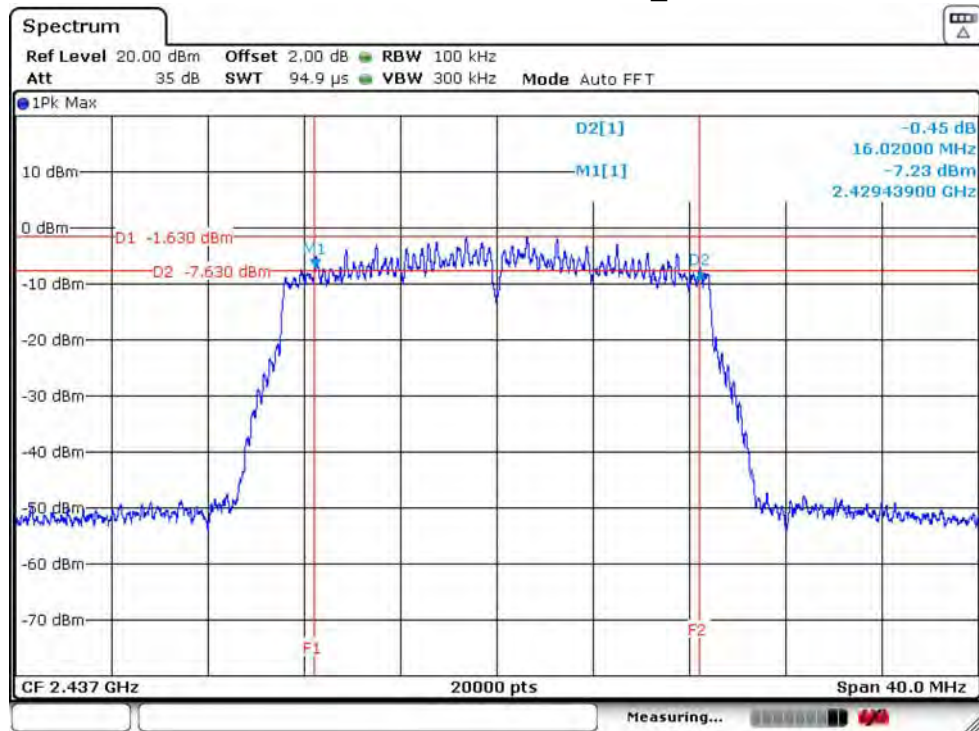


IEEE 802.11n HT20 2437MHz_ANT 2

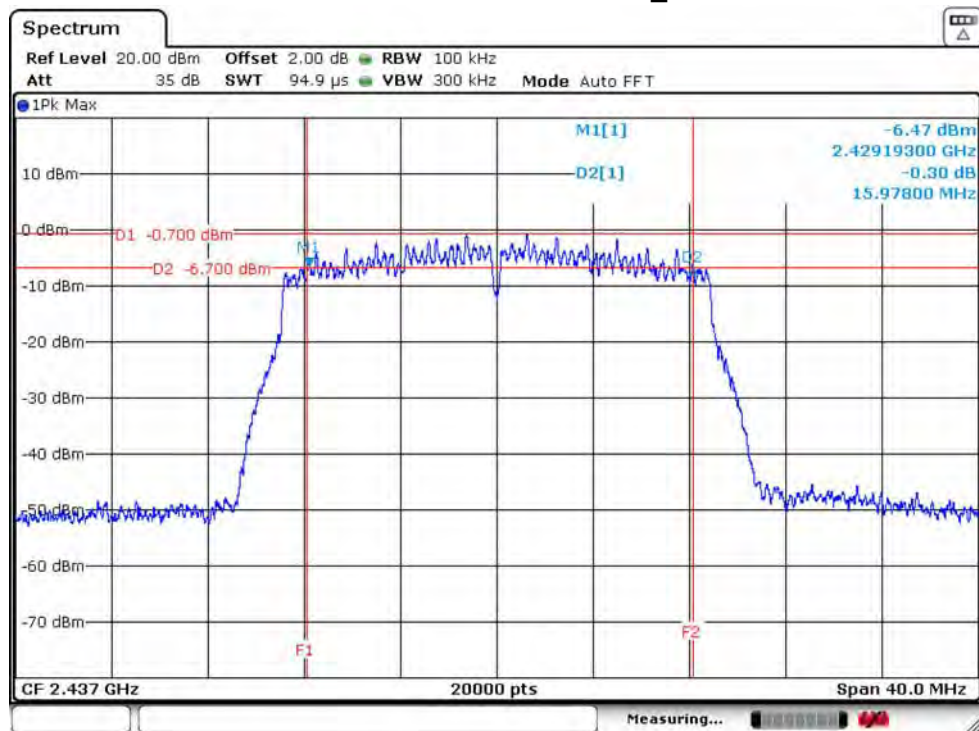


IEEE 802.11n HT20 2462MHz_ANT 1

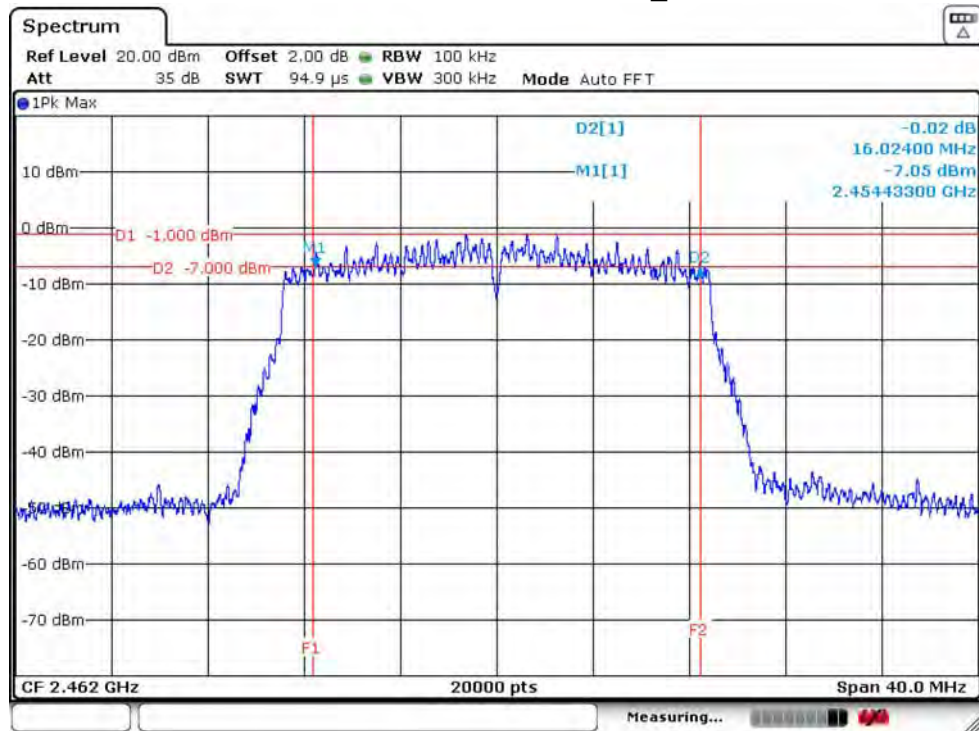


IEEE 802.11n HT20 2462MHz_ANT 2

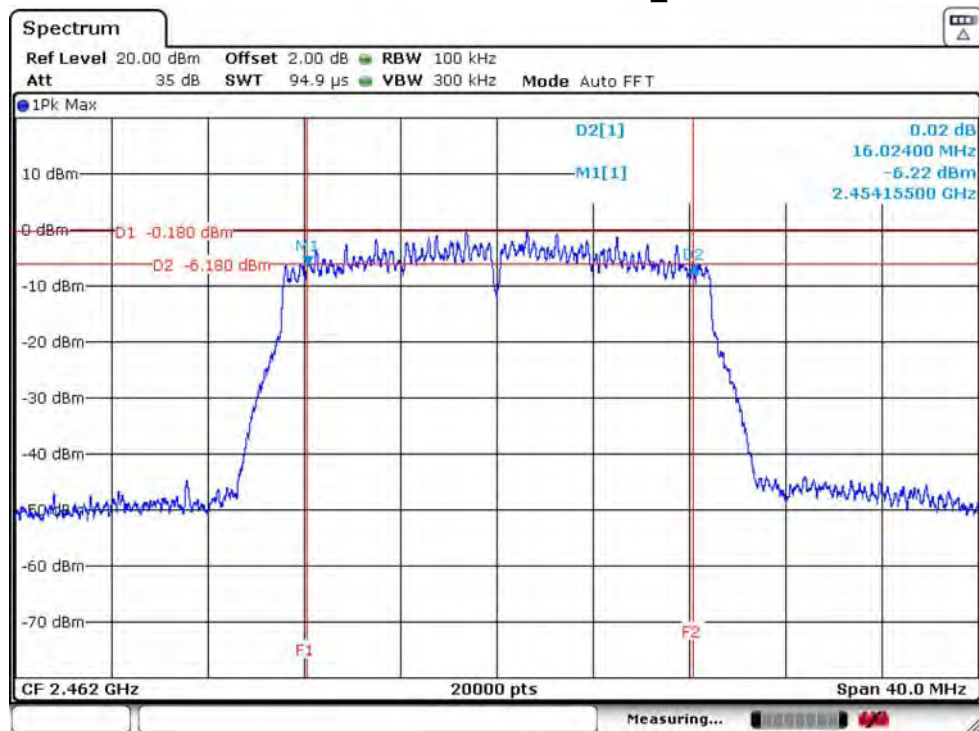


IEEE 802.11n HT40 2422MHz_ANT 1

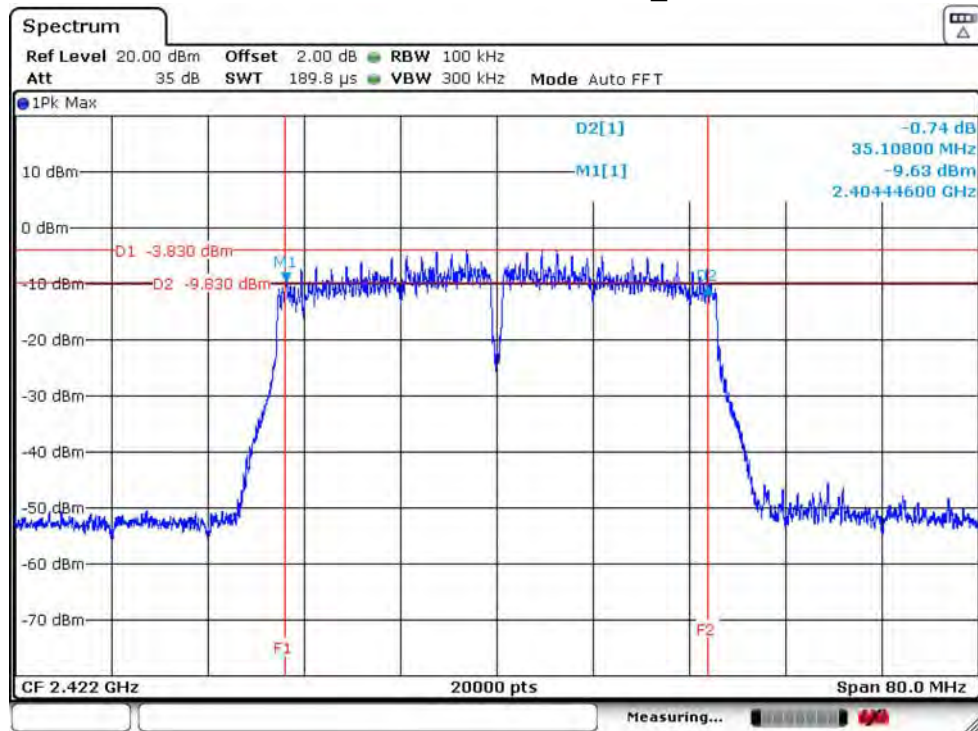


IEEE 802.11n HT40 2422MHz_ANT 2

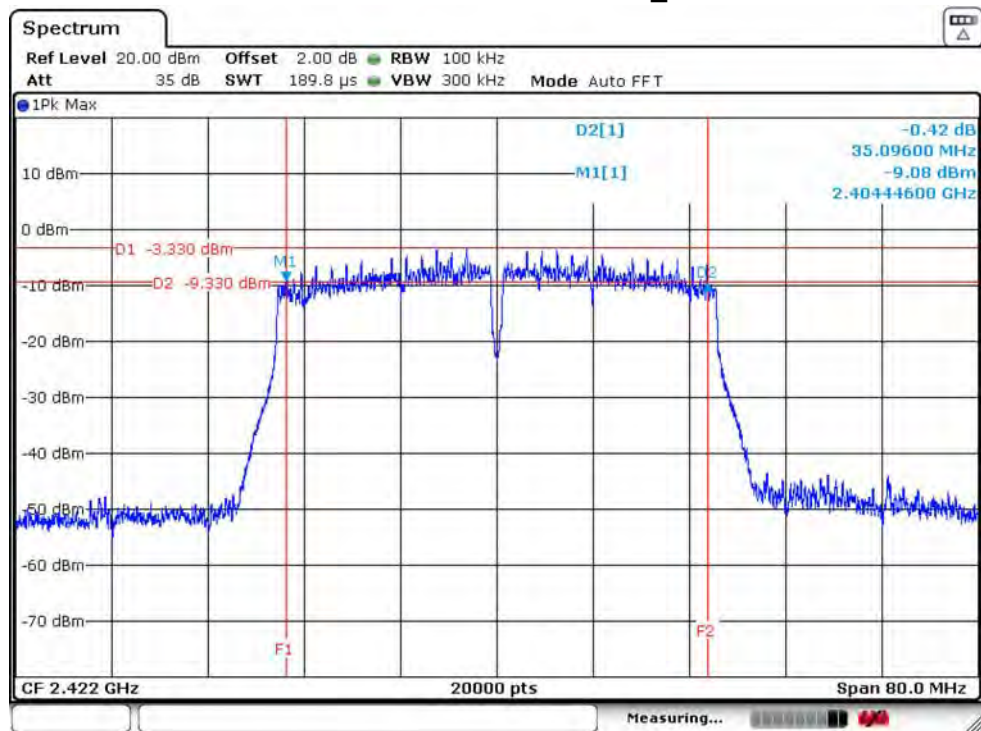


IEEE 802.11n HT40 2437MHz_ANT 1

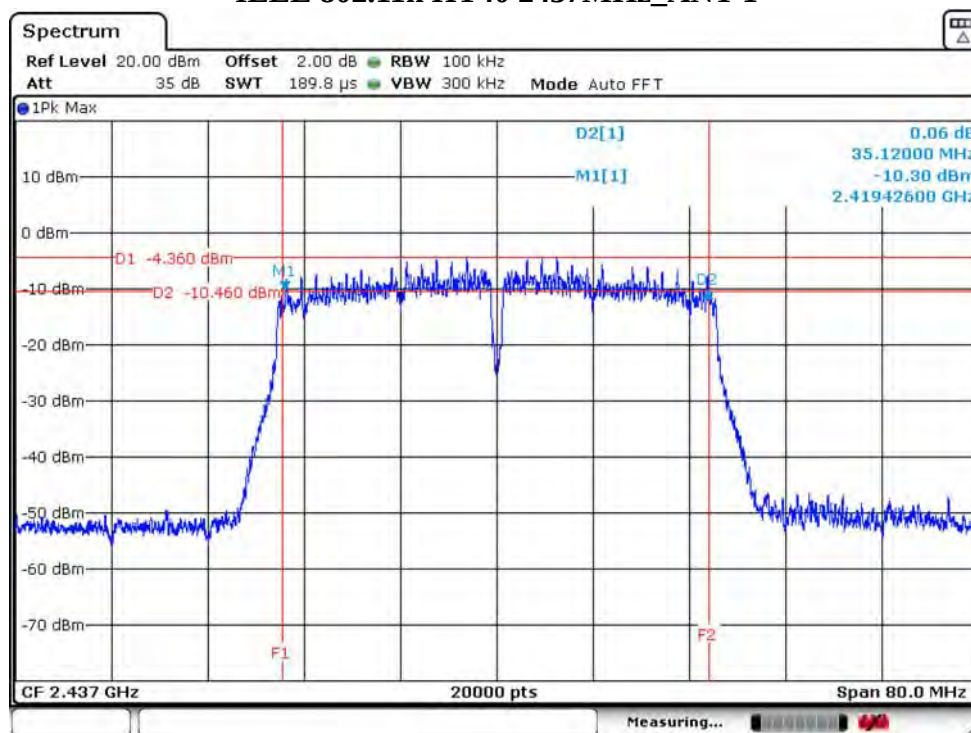


IEEE 802.11n HT40 2437MHz_ANT 2

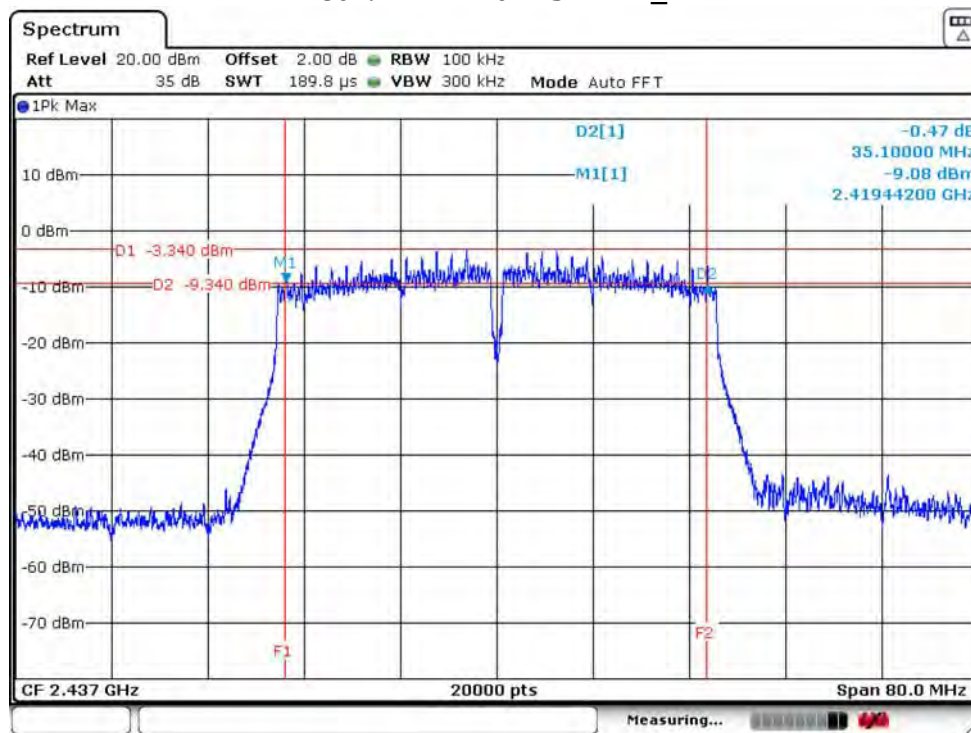

IEEE 802.11n HT40 2452MHz_ANT 1

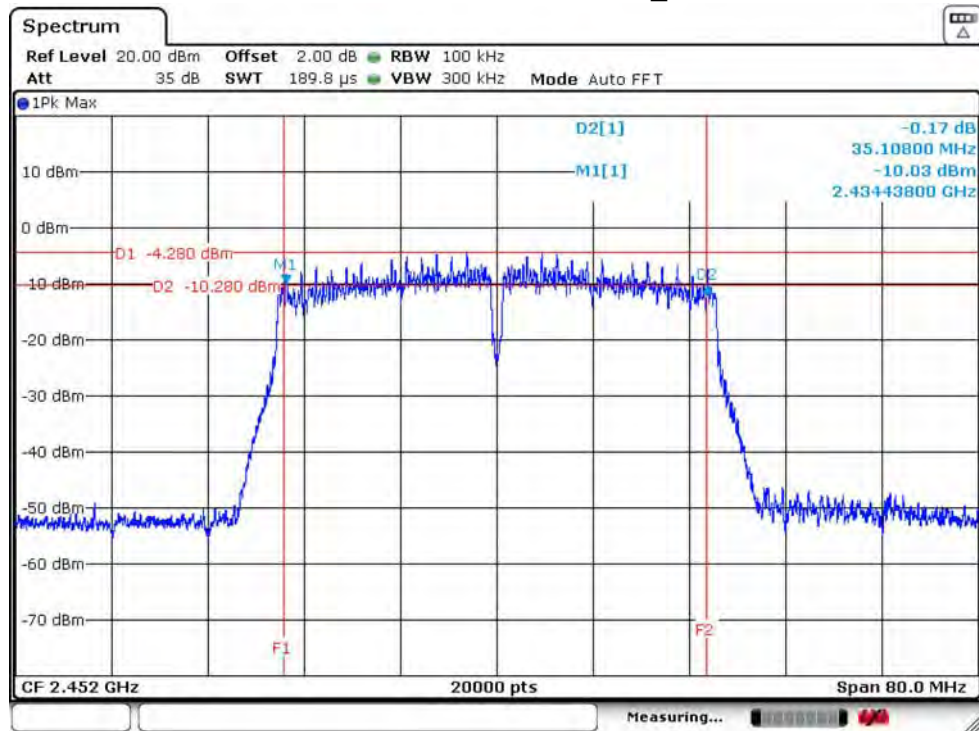

IEEE 802.11n HT40 2452MHz_ANT 2

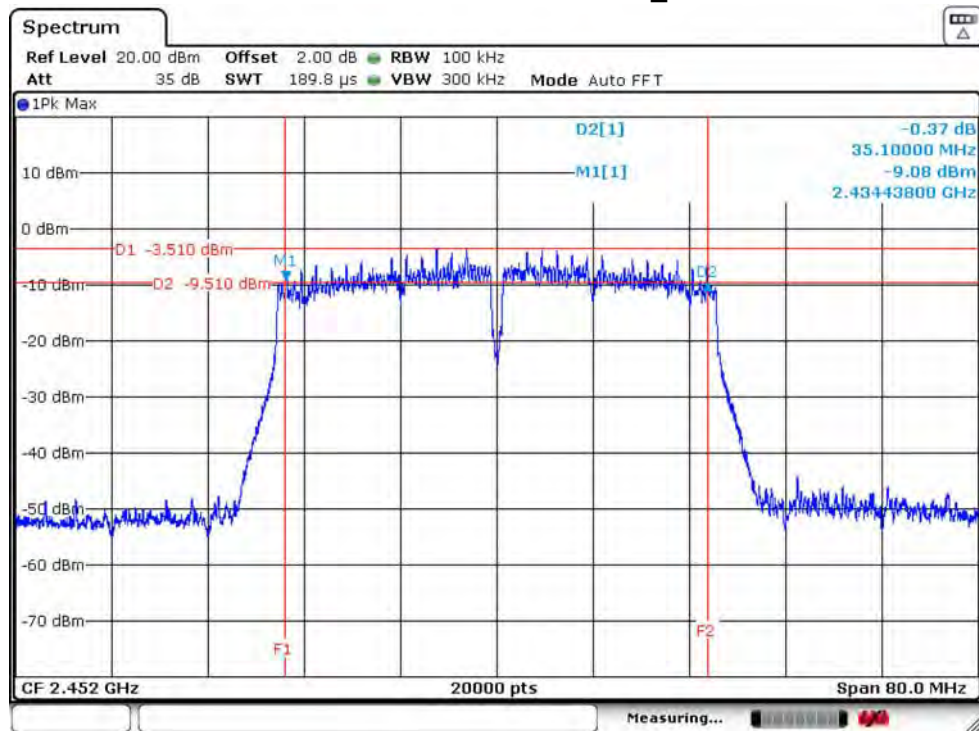

4. MAXIMUM PEAK OUTPUT POWER

4.1. Limit

For systems using digital modulation in 2400-2483.5MHz, the maximum peak output power is 1 Watt(30dBm).

4.2. Test Setup



4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz
VBW	3MHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


4.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 4.3.
- Set the EUT transmit continuously with maximum output power.
- Use the channel power function to measure maximum peak output power, allow trace to stabilize, save test pictures.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.


4.5. Test Result

Temperature	25℃	Relative Humidity		41%				Test Voltage		120V/60Hz
Mode	Freq (MHz)	Peak Output Power (dBm)		Total Peak Output Power (W)		Total Peak Output Power (dBm)		Limit		Result
		ANT 1	ANT 2	ANT 1	ANT 2	ANT 1	ANT 2	W	dBm	
IEEE 802.11b	2412	15.42	15.55	0.0348	0.0359	15.42	15.55	1.0000	30.00	PASS
	2437	14.89	15.00	0.0308	0.0316	14.89	15.00	1.0000	30.00	PASS
	2462	15.39	15.49	0.0346	0.0354	15.39	15.49	1.0000	30.00	PASS
IEEE 802.11g	2412	18.49	19.14	0.0706	0.0820	18.49	19.14	1.0000	30.00	PASS
	2437	18.02	19.08	0.0634	0.0809	18.02	19.08	1.0000	30.00	PASS
	2462	18.49	19.71	0.0706	0.0935	18.49	19.71	1.0000	30.00	PASS
IEEE 802.11n HT20	2412	17.85	18.20	0.1270		21.04		1.0000	30.00	PASS
	2437	17.47	18.15	0.1212		20.83		1.0000	30.00	PASS
	2462	18.04	18.65	0.1370		21.37		1.0000	30.00	PASS
IEEE 802.11n HT40	2422	17.89	18.19	0.1274		21.05		1.0000	30.00	PASS
	2437	17.41	17.98	0.1179		20.71		1.0000	30.00	PASS
	2452	17.25	18.03	0.1166		20.67		1.0000	30.00	PASS


IEEE 802.11b 2412MHz_ANT 1

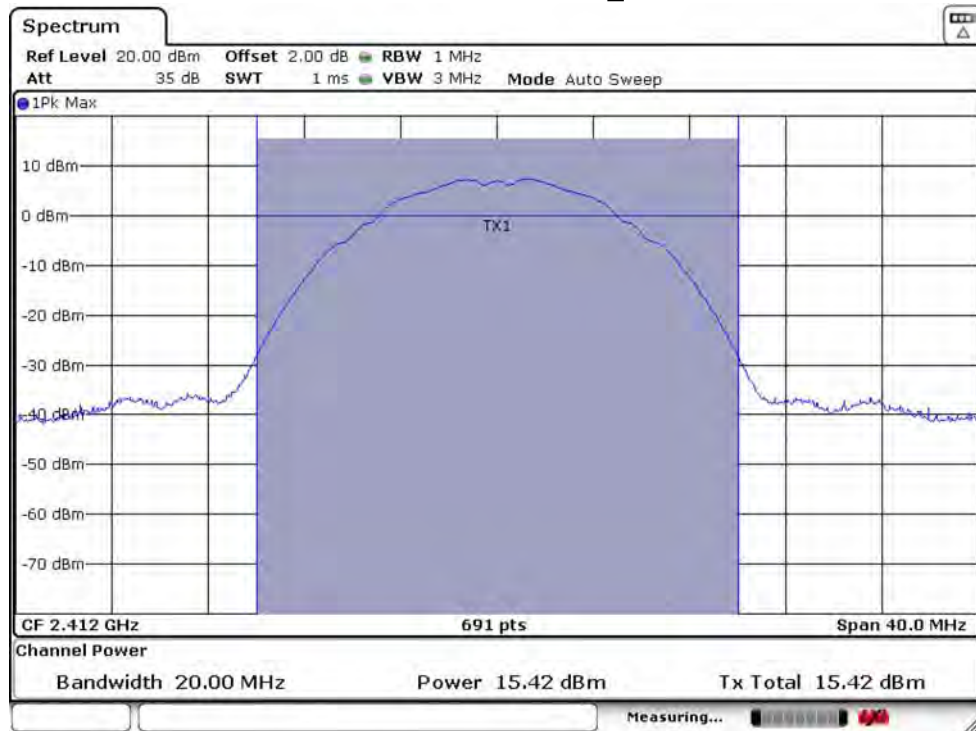


IEEE 802.11b 2412MHz_ANT 2

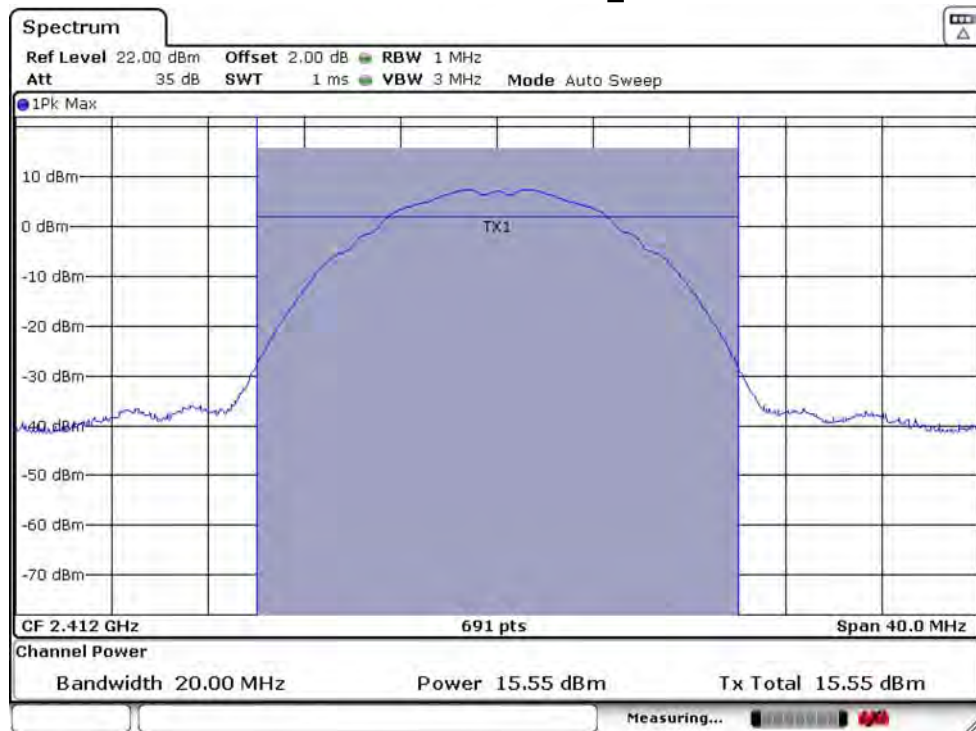


IEEE 802.11b 2437MHz_ANT 1

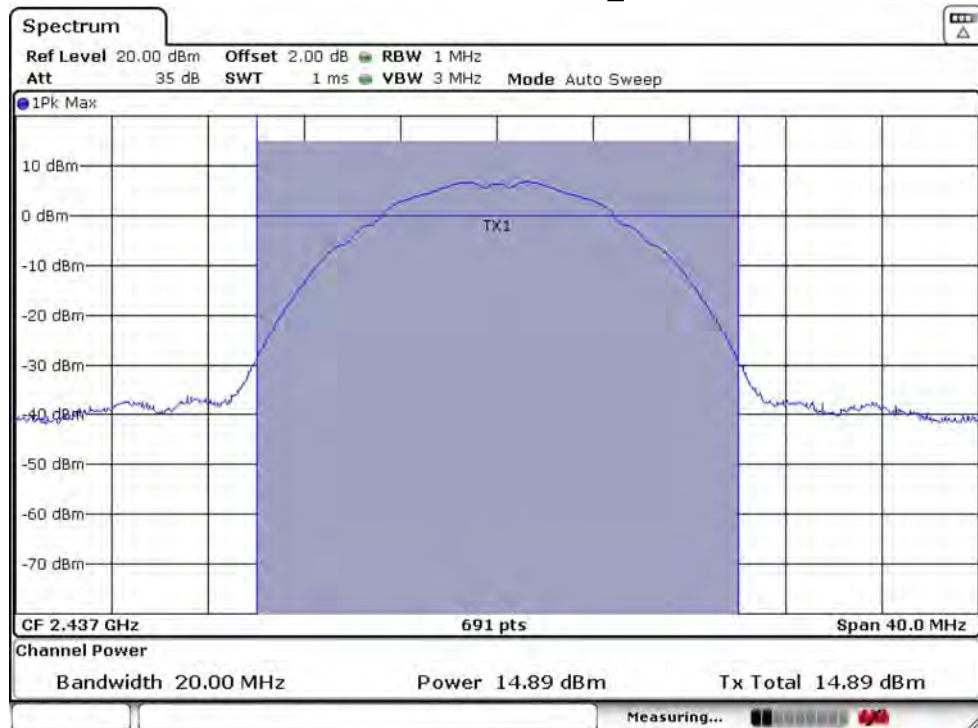


IEEE 802.11b 2437MHz_ANT 2

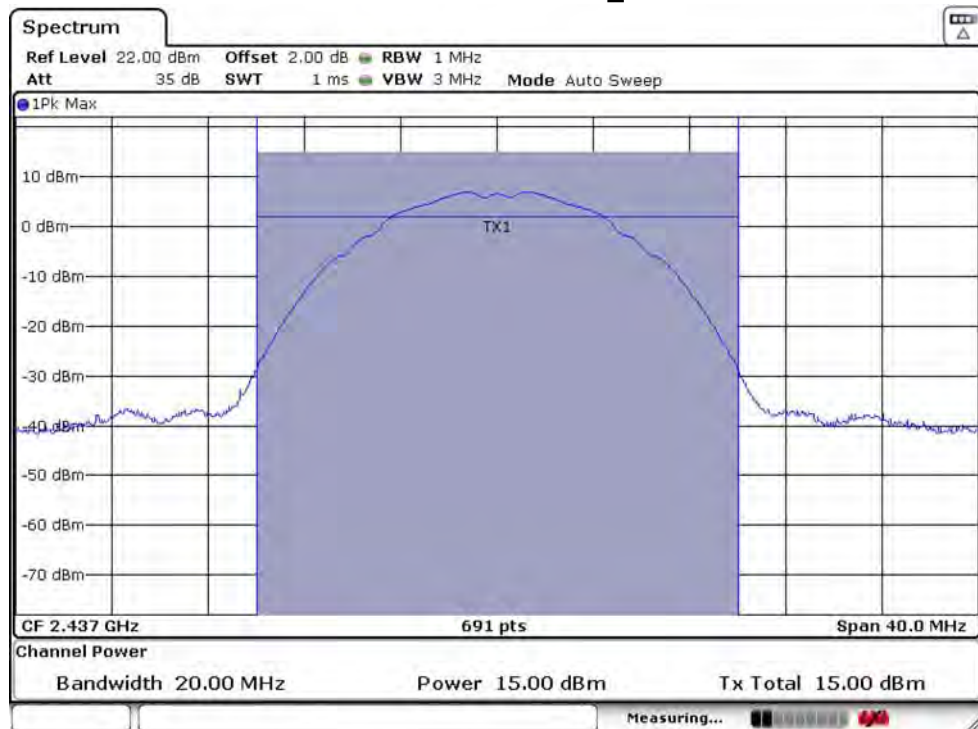


IEEE 802.11b 2462MHz_ANT 1

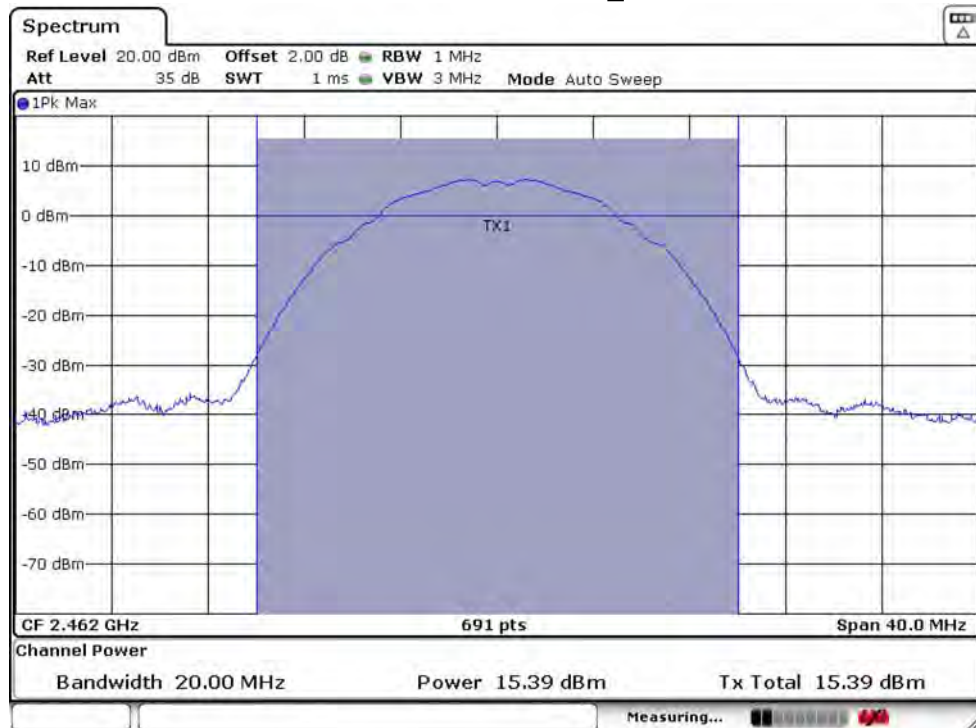


IEEE 802.11b 2462MHz_ANT 2

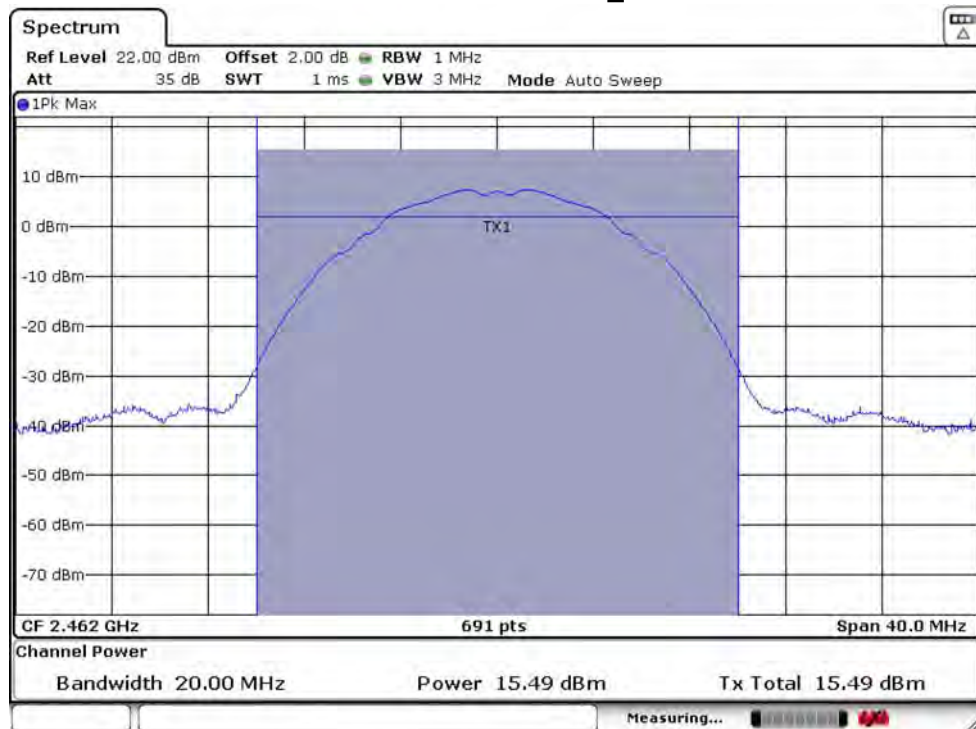


IEEE 802.11g 2412MHz_ANT 1

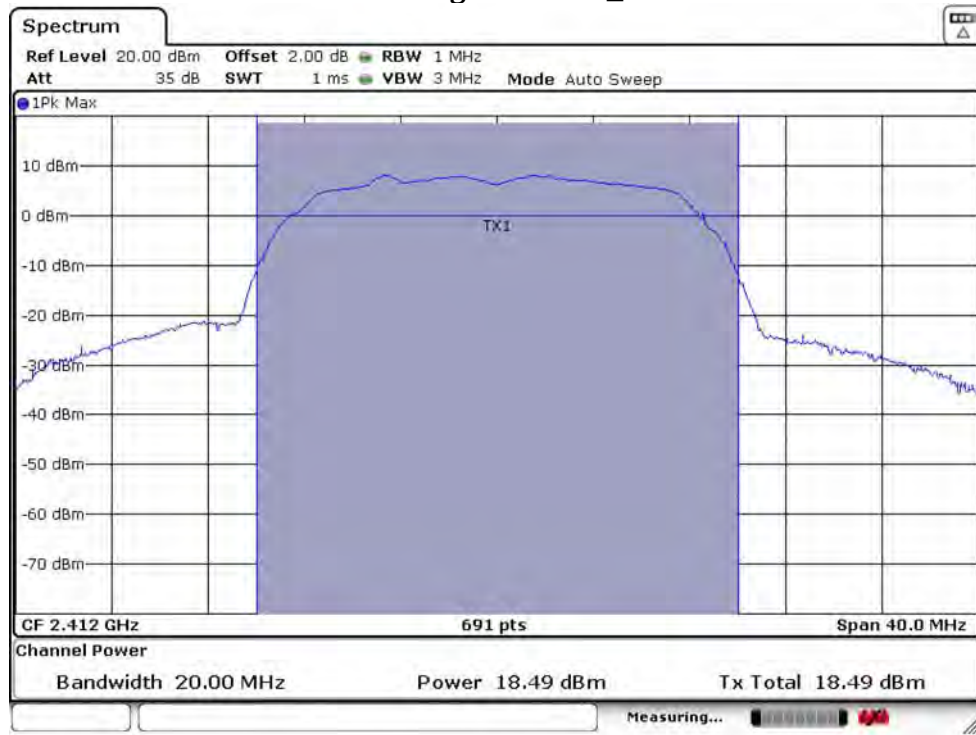


IEEE 802.11g 2412MHz_ANT 2

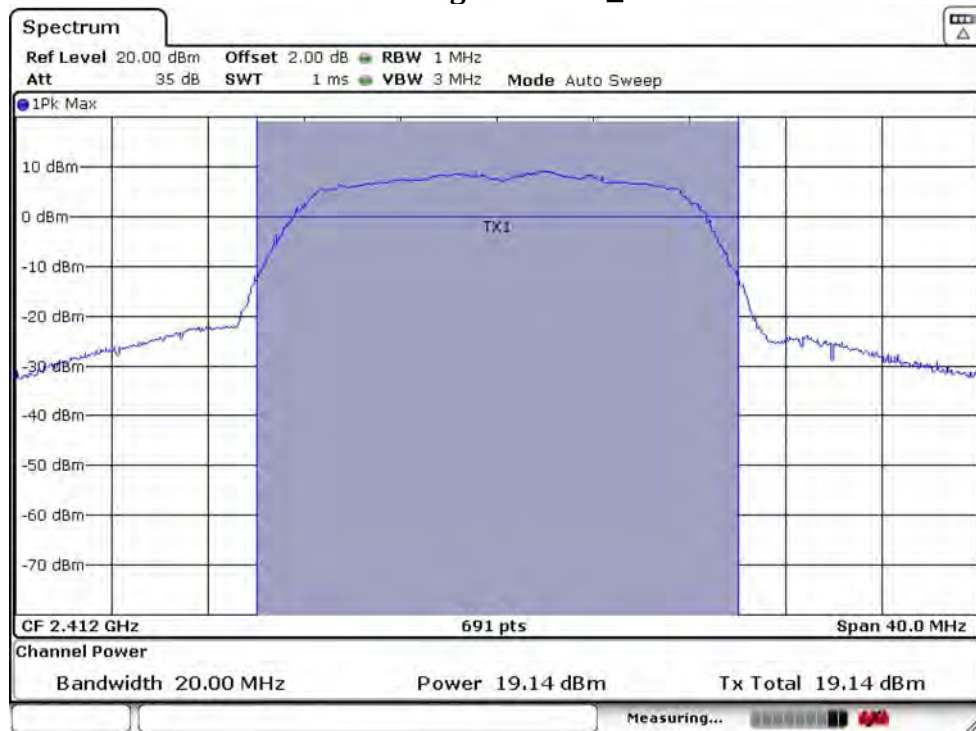


IEEE 802.11g 2437MHz_ANT 1

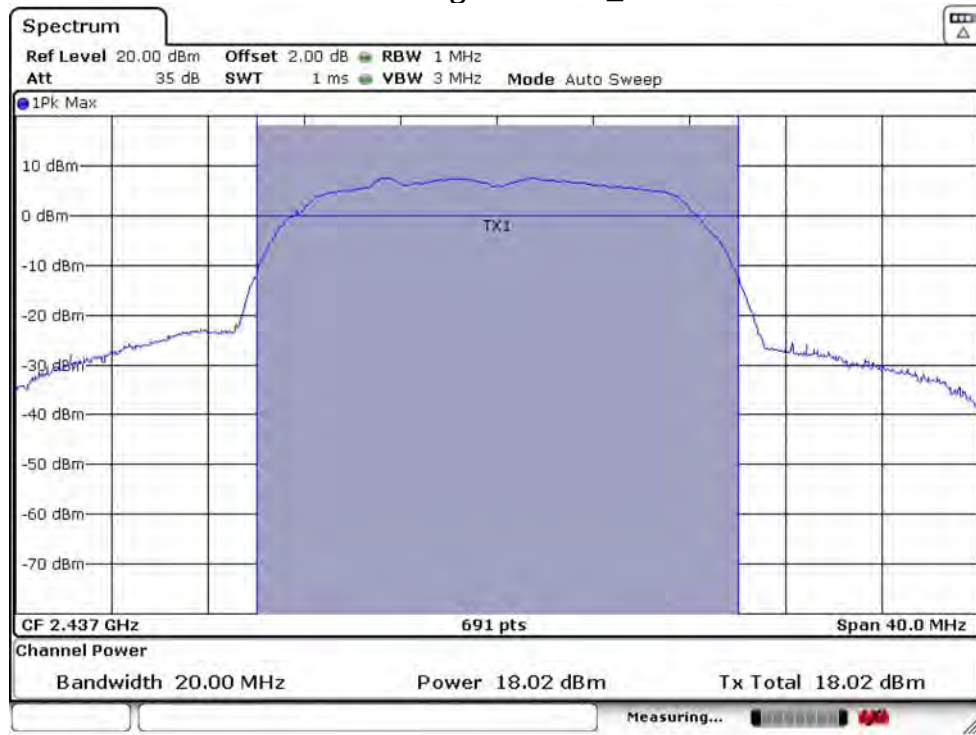


IEEE 802.11g 2437MHz_ANT 2

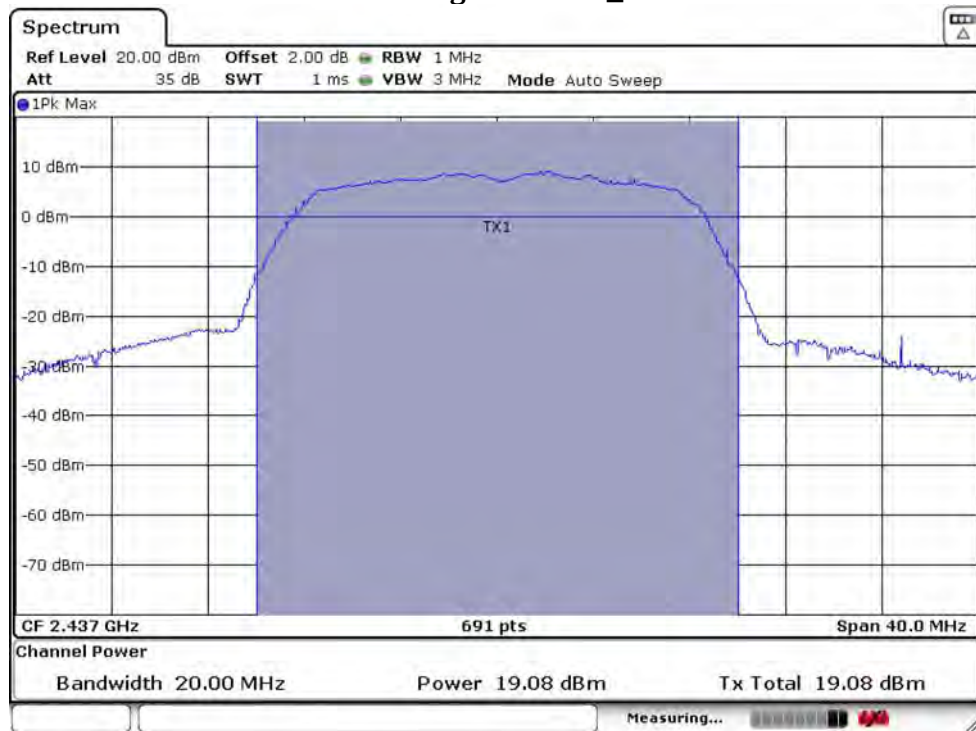


IEEE 802.11g 2462MHz_ANT 1

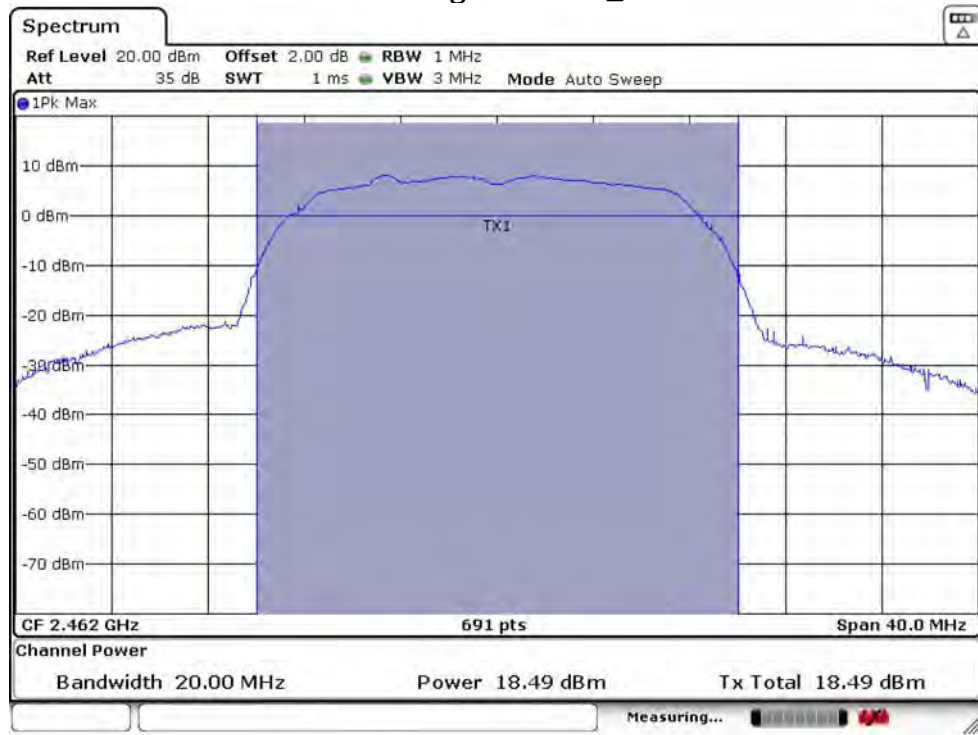


IEEE 802.11g 2462MHz_ANT 2

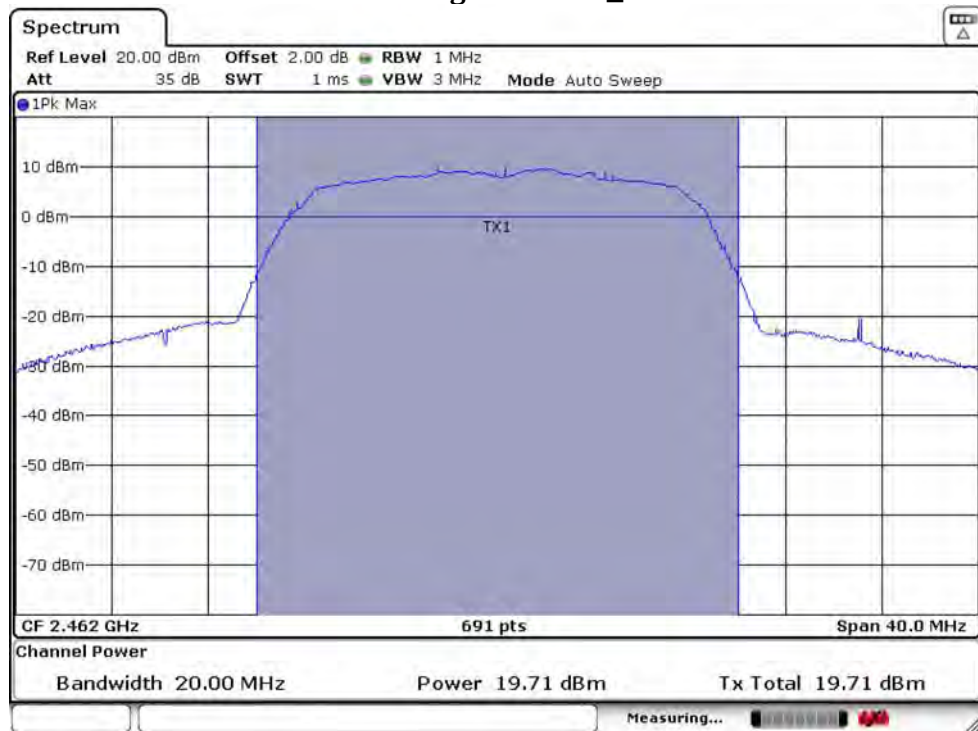


IEEE 802.11n HT20 2412MHz_ANT 1

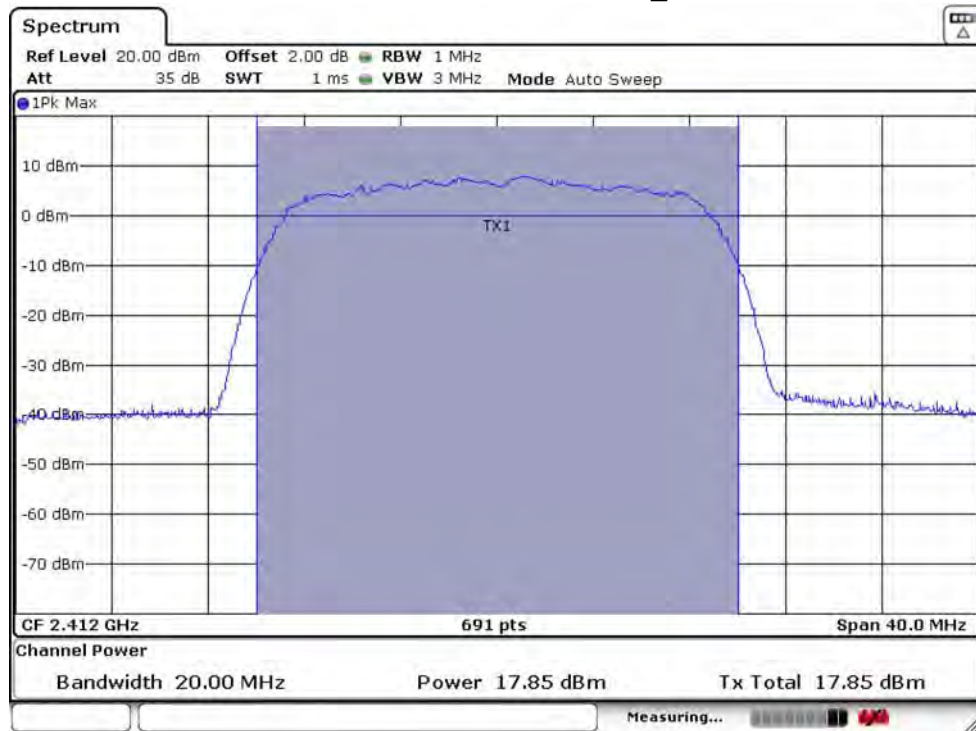


IEEE 802.11n HT20 2412MHz_ANT 2

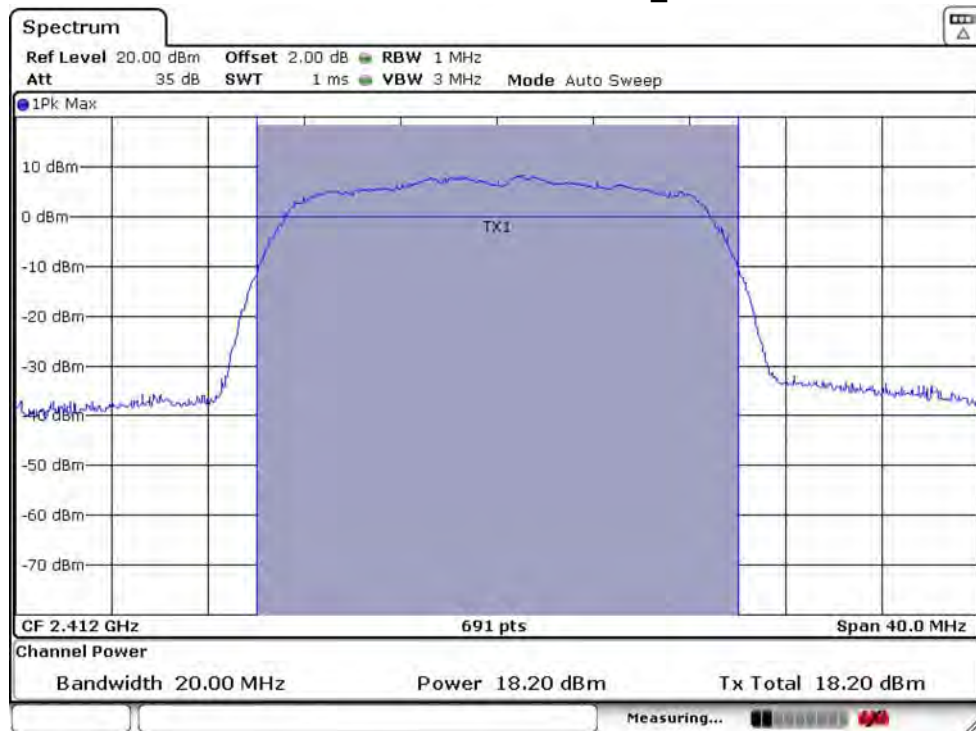


IEEE 802.11n HT20 2437MHz_ANT 1

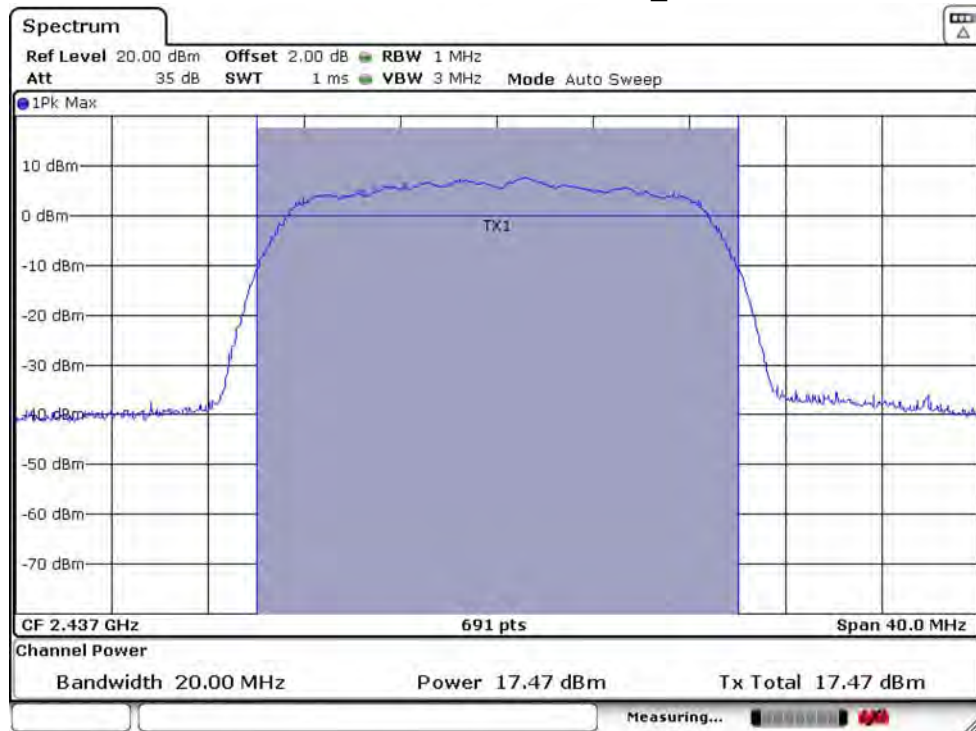


IEEE 802.11n HT20 2437MHz_ANT 2

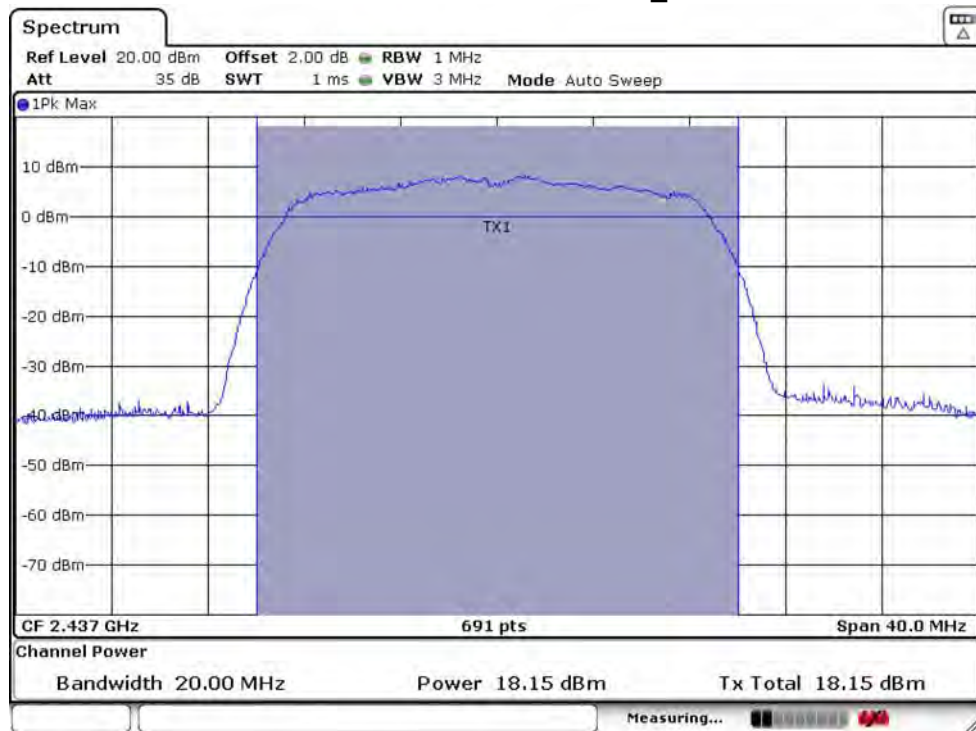


IEEE 802.11n HT20 2462MHz_ANT 1

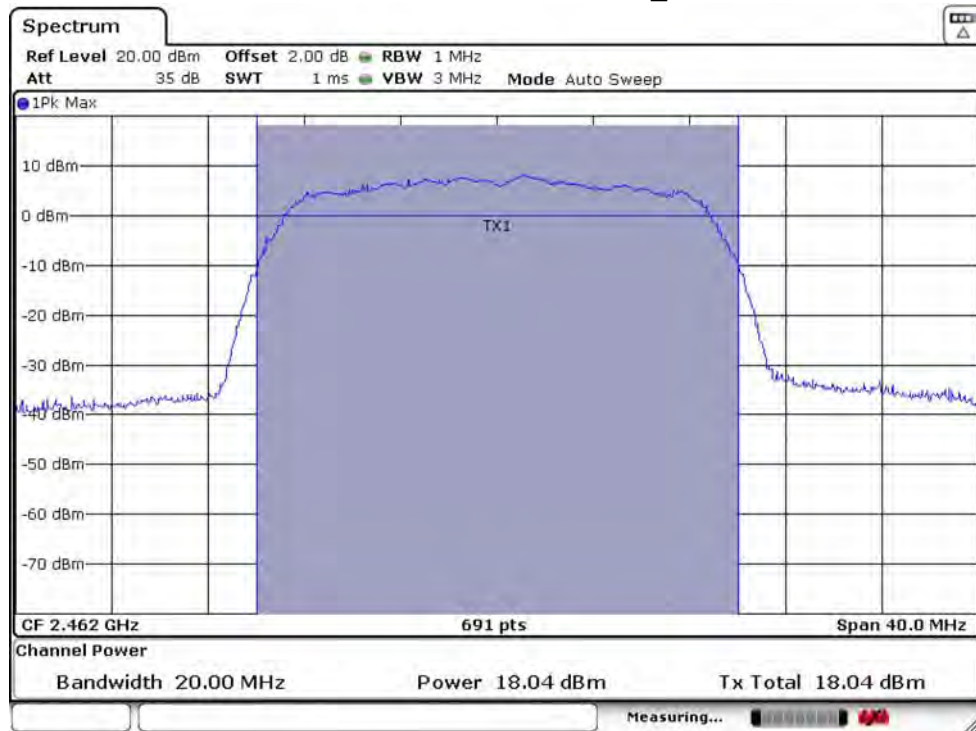


IEEE 802.11n HT20 2462MHz_ANT 2

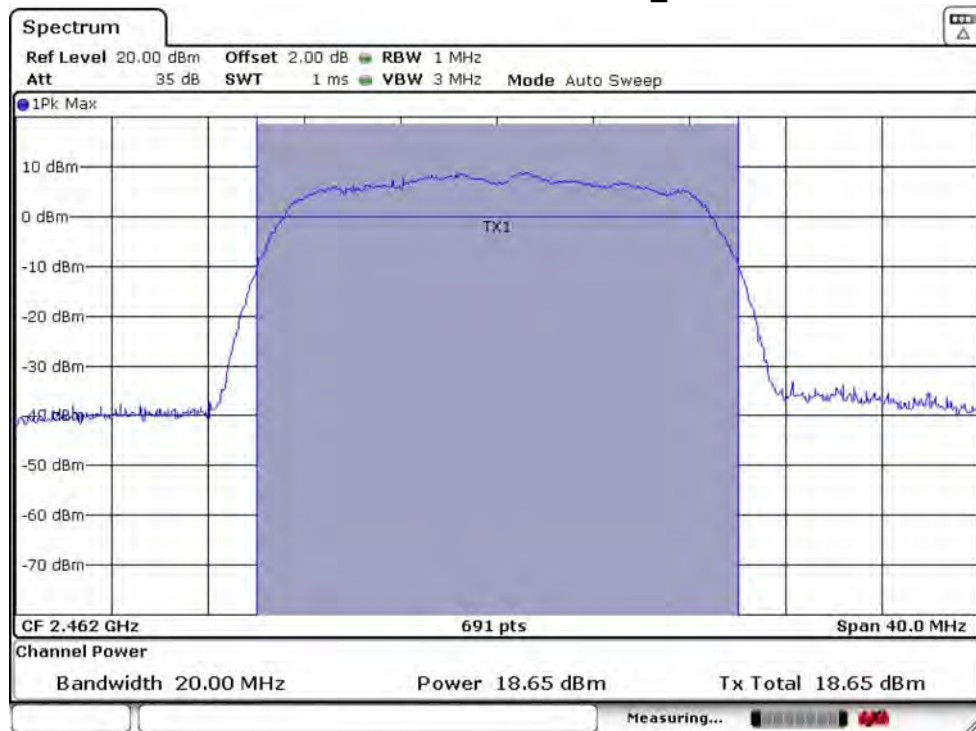


IEEE 802.11n HT40 2422MHz_ANT 1

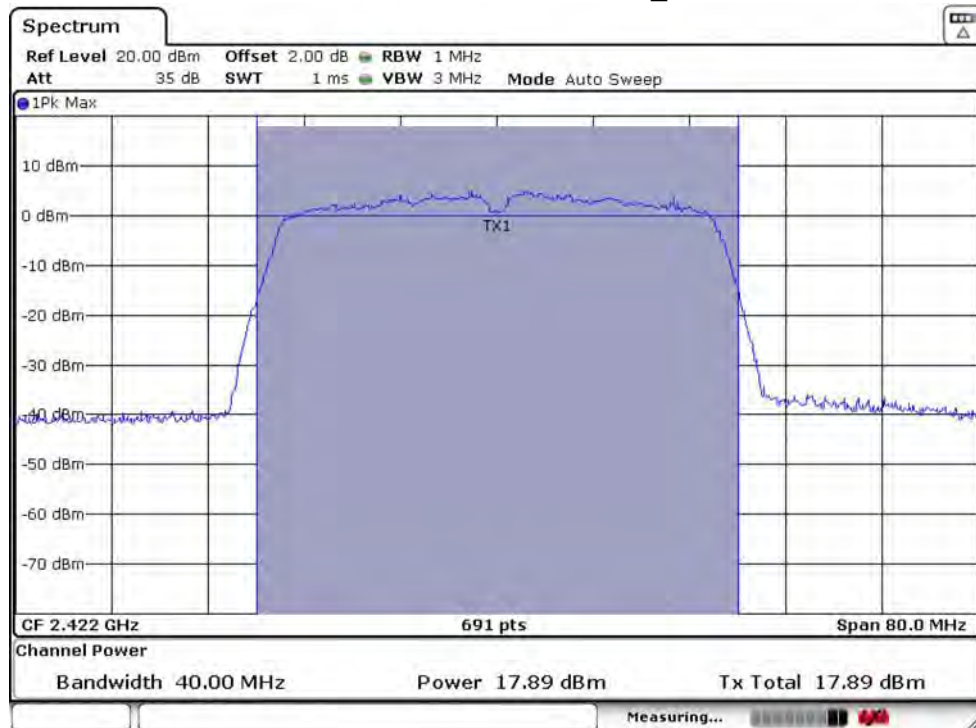


IEEE 802.11n HT40 2422MHz_ANT 2

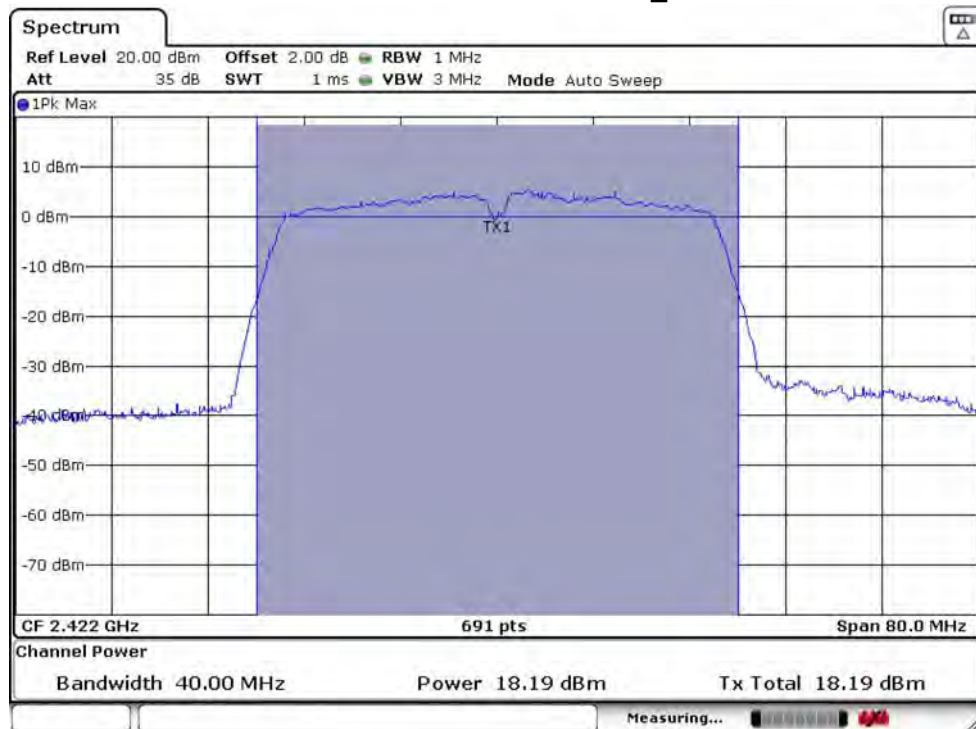


IEEE 802.11n HT40 2437MHz_ANT 1

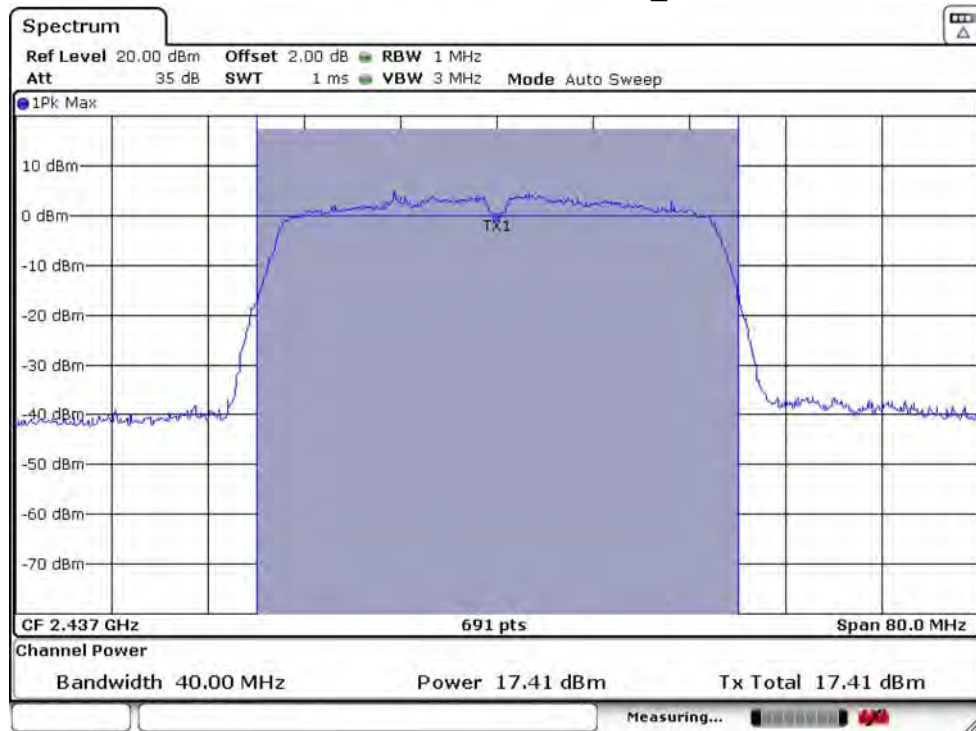


IEEE 802.11n HT40 2437MHz_ANT 2

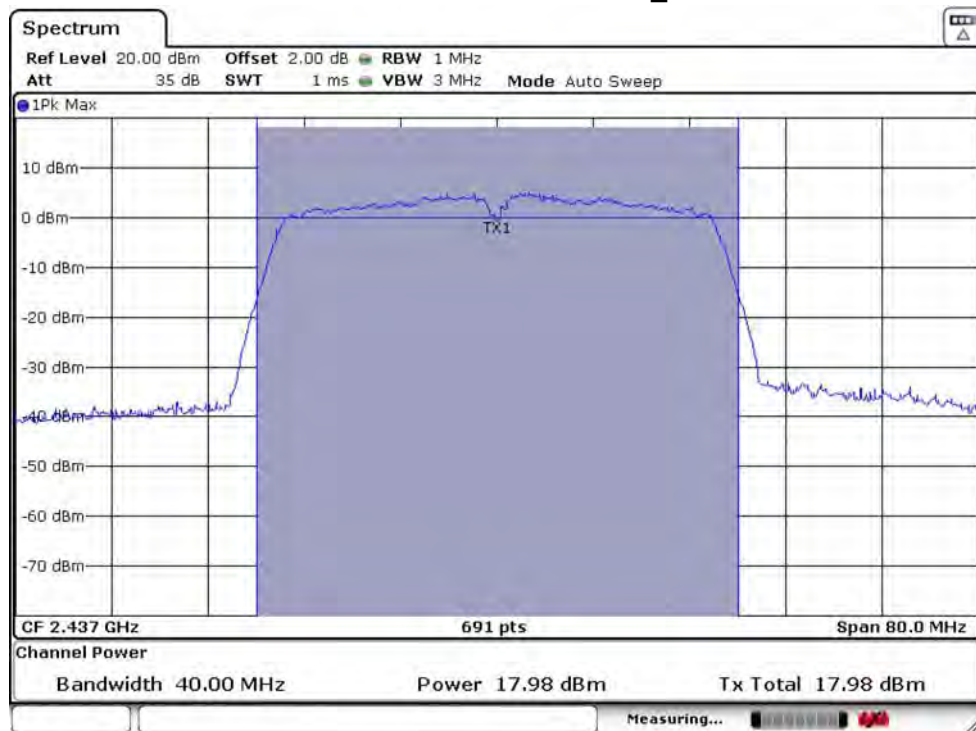

IEEE 802.11n HT40 2452MHz_ANT 1

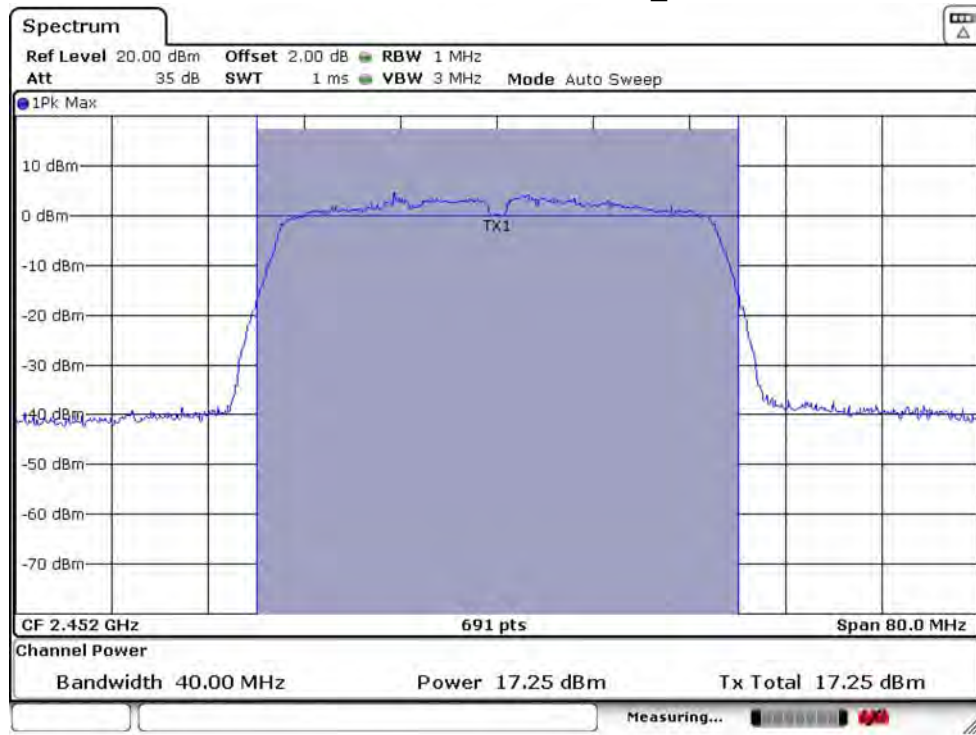

IEEE 802.11n HT40 2452MHz_ANT 2

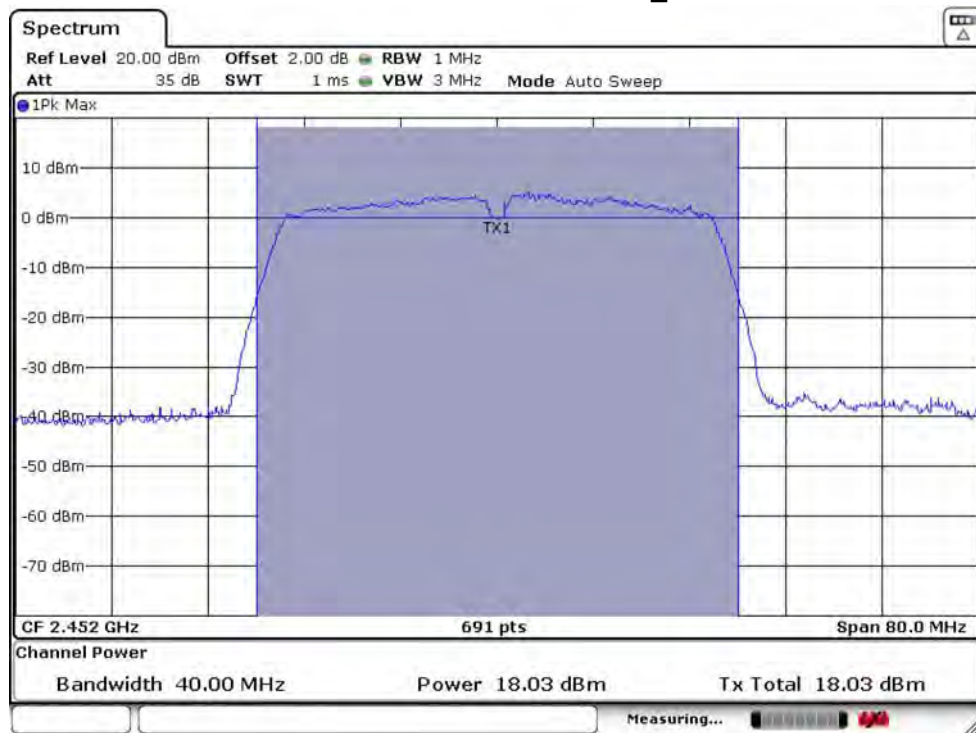


5. POWER SPECTRAL DENSITY

5.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2. Test Setup

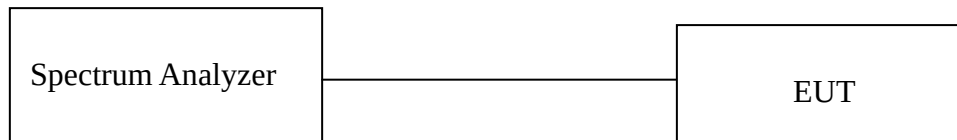

5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	3KHz
VBW	10KHz
Span	30MHz(20MHz Bandwidth mode)/60MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


5.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 5.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.


5.5. Test Result

Temperature	25℃	Relative Humidity		41%	Test Voltage	120V/60Hz
Mode	Freq (MHz)	Power Density (dBm/3KHz)		Total Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
		ANT 1	ANT 2			
IEEE 802.11b	2412	2.08	2.30	2.08	7.79	PASS
	2437	1.46	2.38	1.46	7.79	PASS
	2462	1.90	2.86	1.90	7.79	PASS
IEEE 802.11g	2412	-15.46	-13.77	-15.46	7.79	PASS
	2437	-16.28	-14.71	-16.28	7.79	PASS
	2462	-15.28	-13.91	-15.28	7.79	PASS
IEEE 802.11n HT20	2412	-15.81	-16.40	-13.08	7.79	PASS
	2437	-17.02	-16.36	-13.67	7.79	PASS
	2462	-16.37	-15.44	-12.87	7.79	PASS
IEEE 802.11n HT40	2422	-20.05	-19.24	-16.62	7.79	PASS
	2437	-20.72	-19.40	-17.00	7.79	PASS
	2452	-20.63	-18.87	-16.65	7.79	PASS


IEEE 802.11b 2412MHz_ANT 1

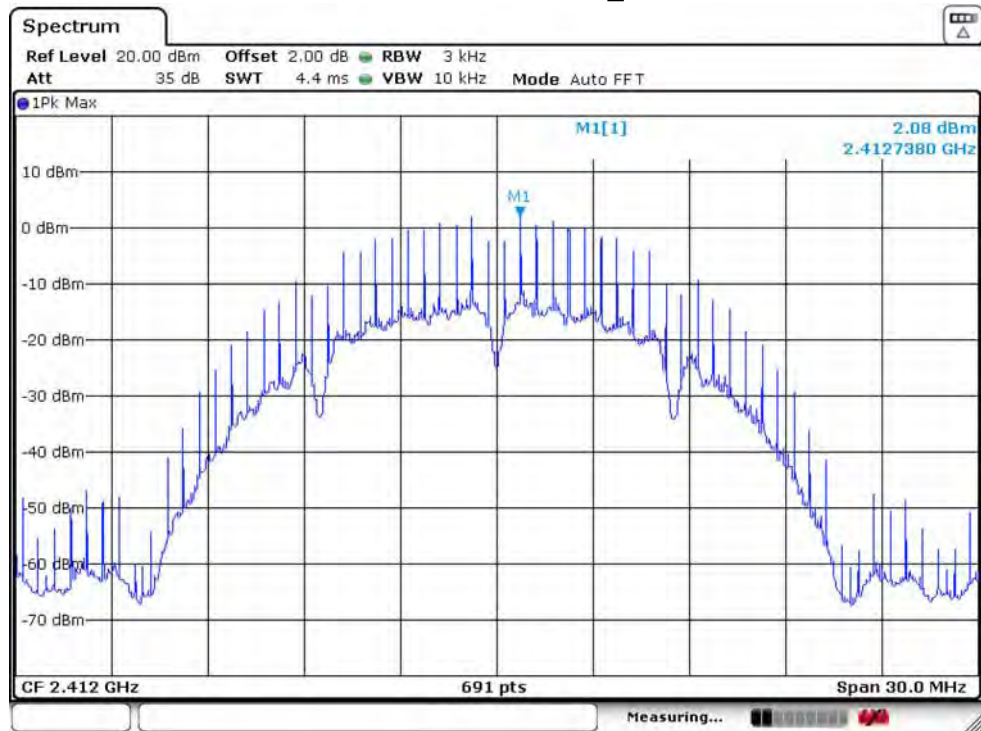


IEEE 802.11b 2412MHz_ANT 2

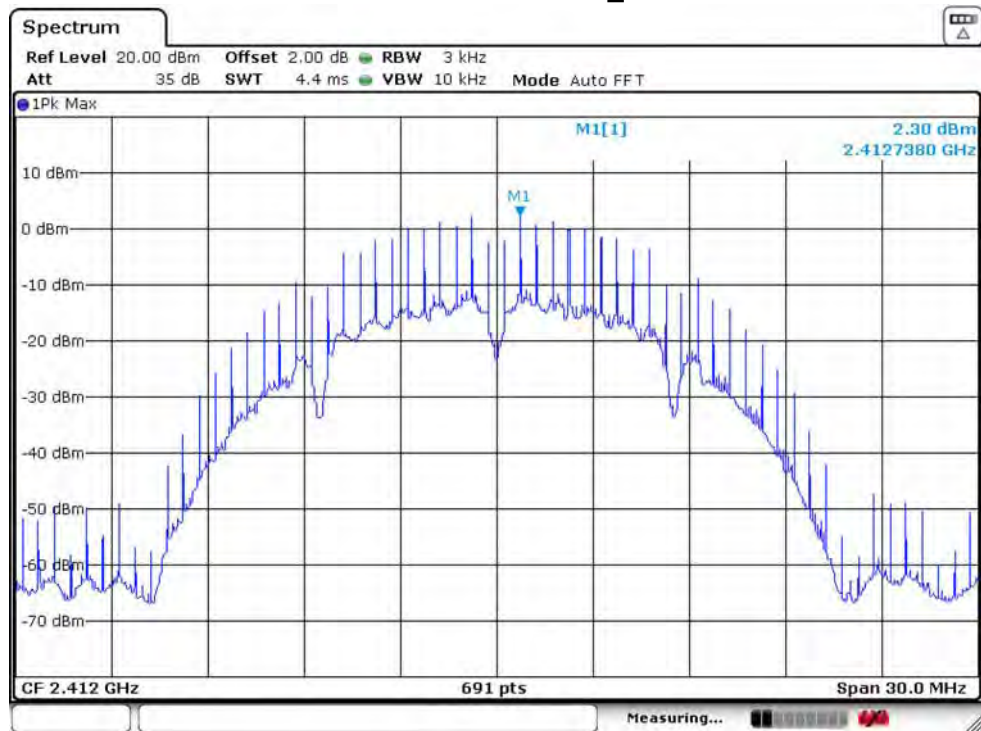


IEEE 802.11b 2437MHz_ANT 1

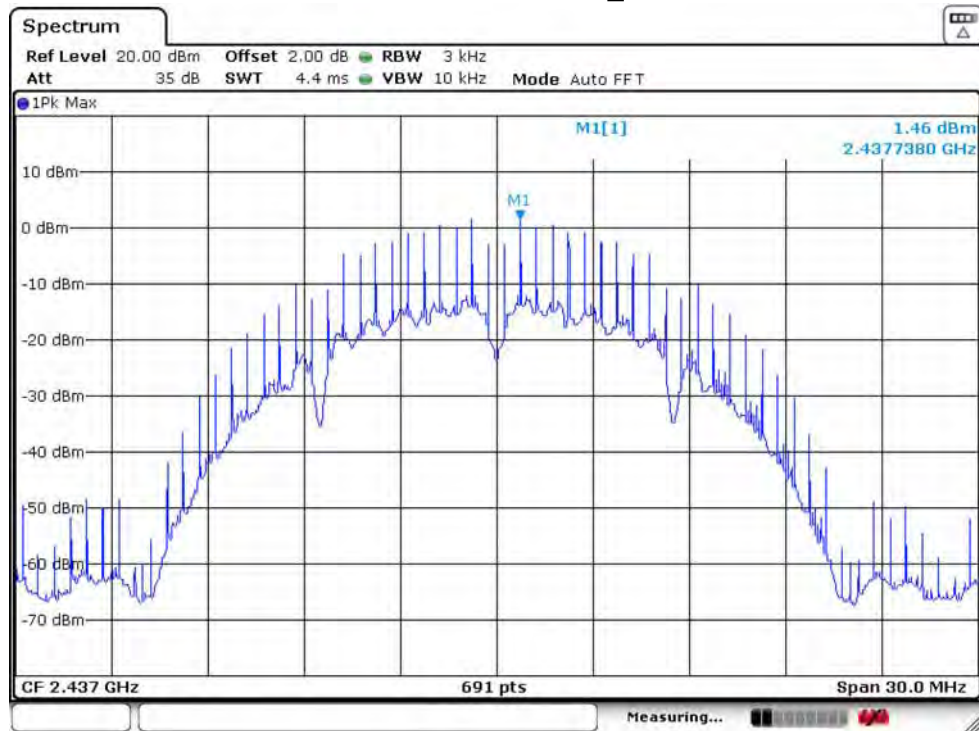


IEEE 802.11b 2437MHz_ANT 2

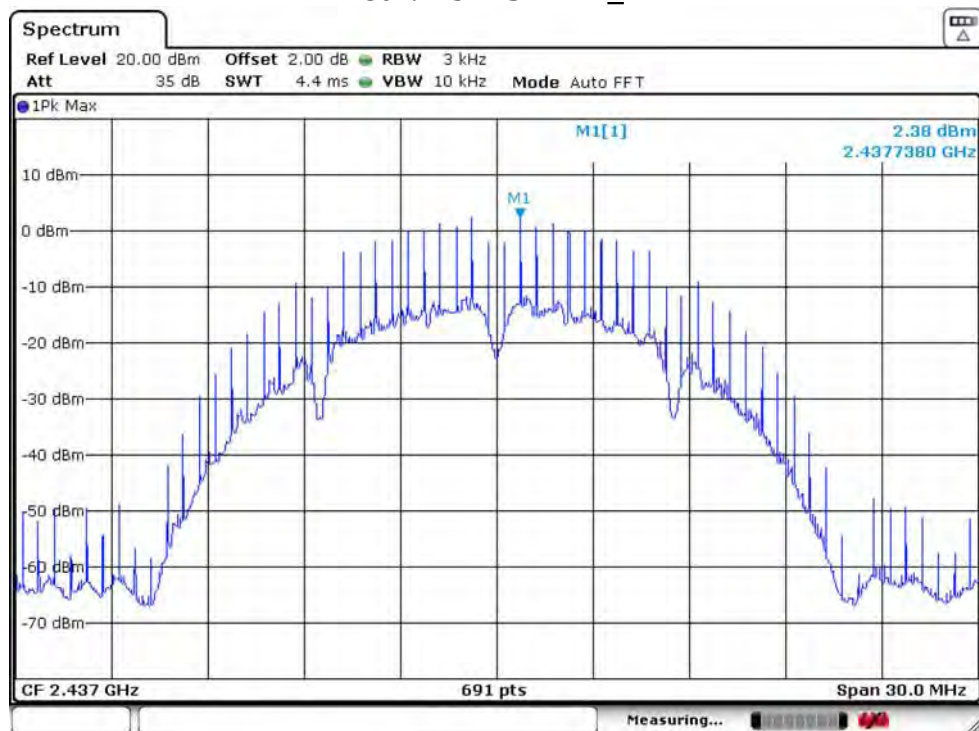


IEEE 802.11b 2462MHz_ANT 1

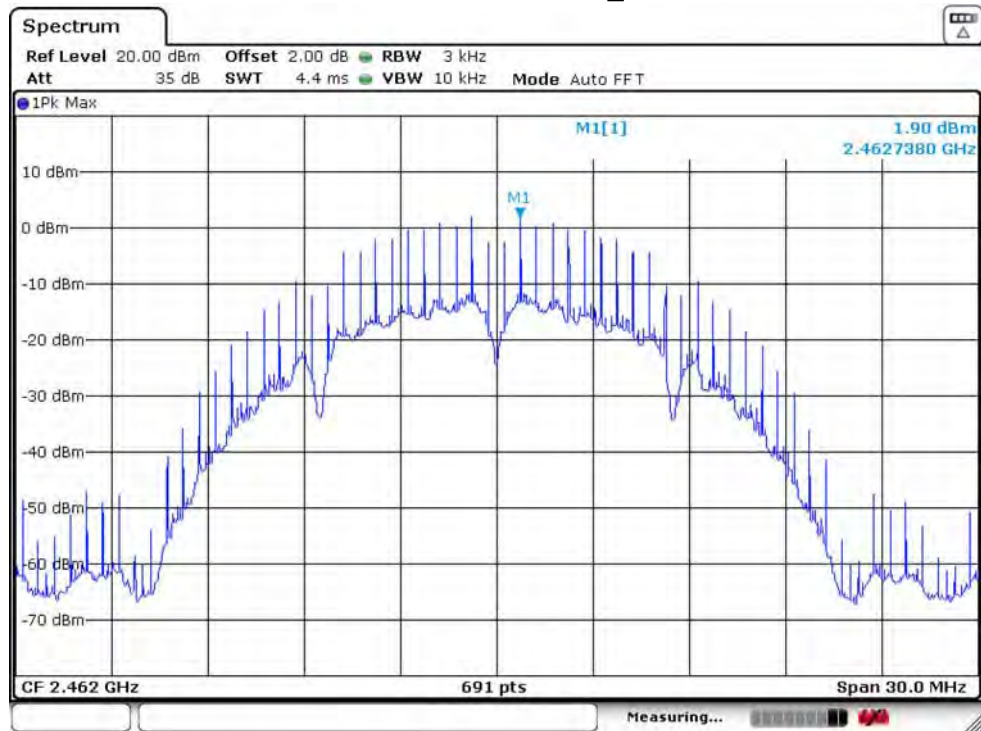


IEEE 802.11b 2462MHz_ANT 2

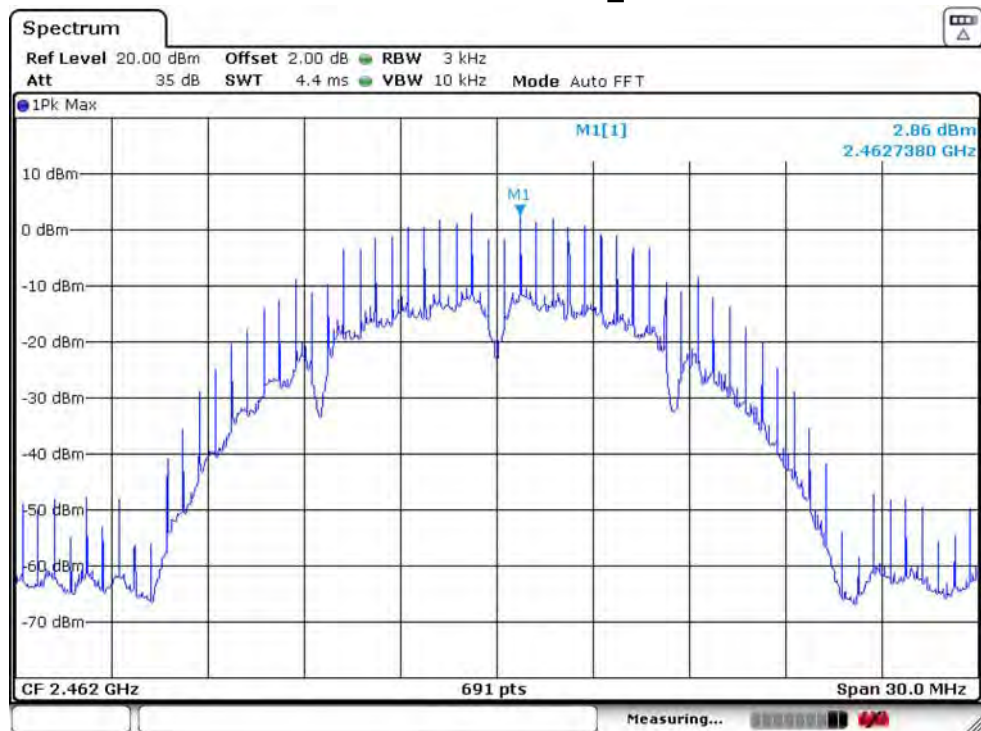


IEEE 802.11g 2412MHz_ANT 1

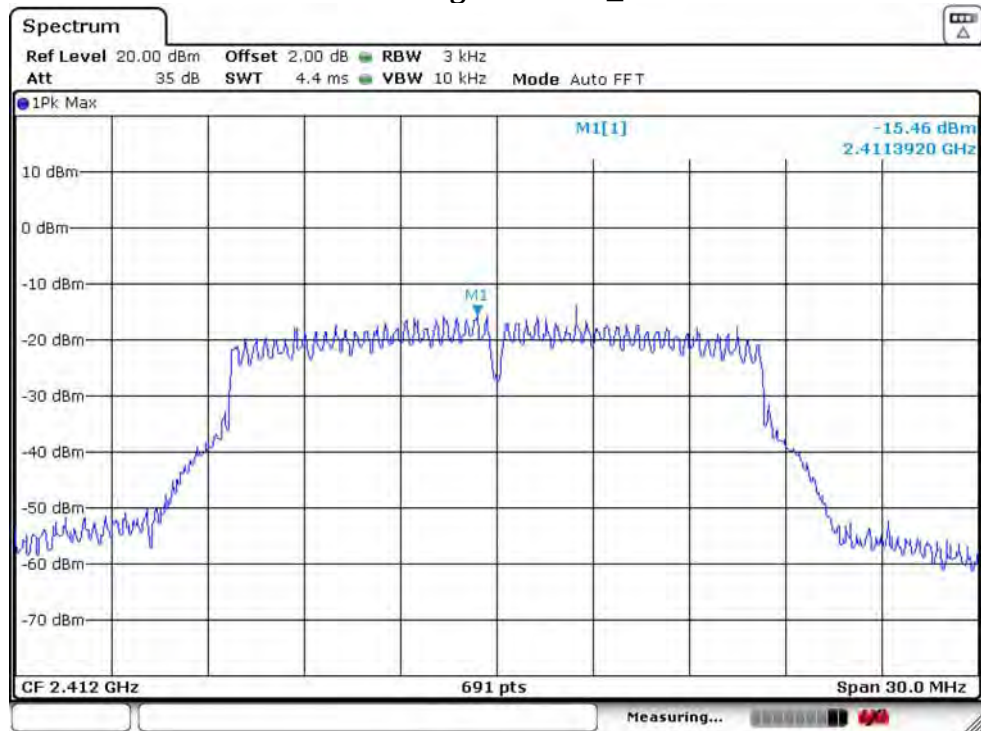


IEEE 802.11g 2412MHz_ANT 2

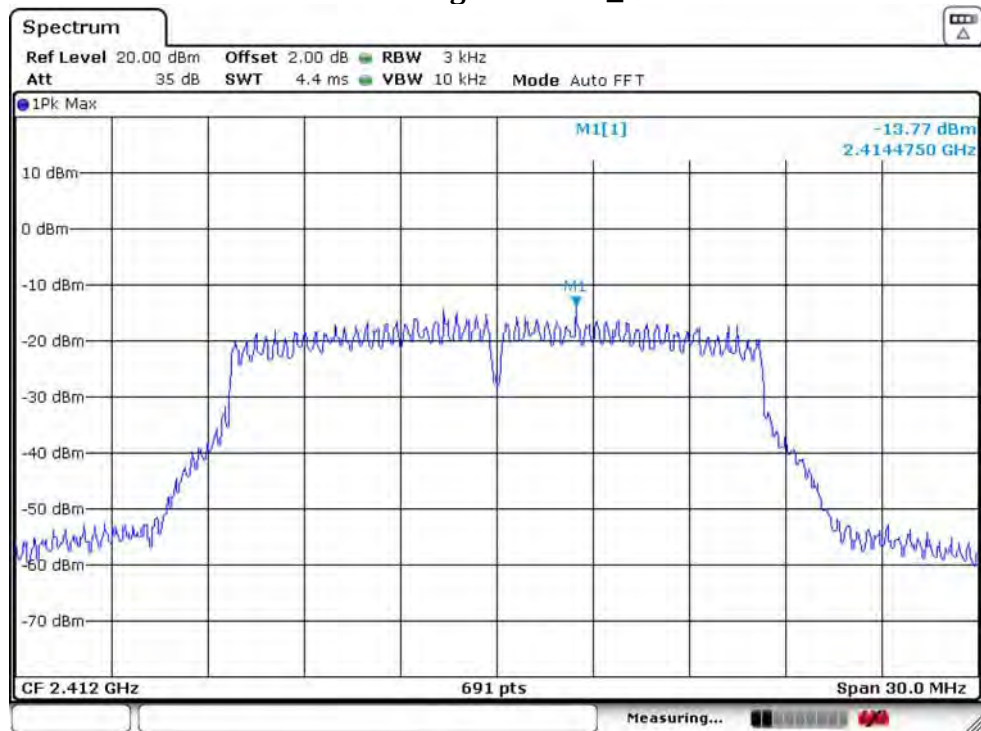


IEEE 802.11g 2437MHz_ANT 1

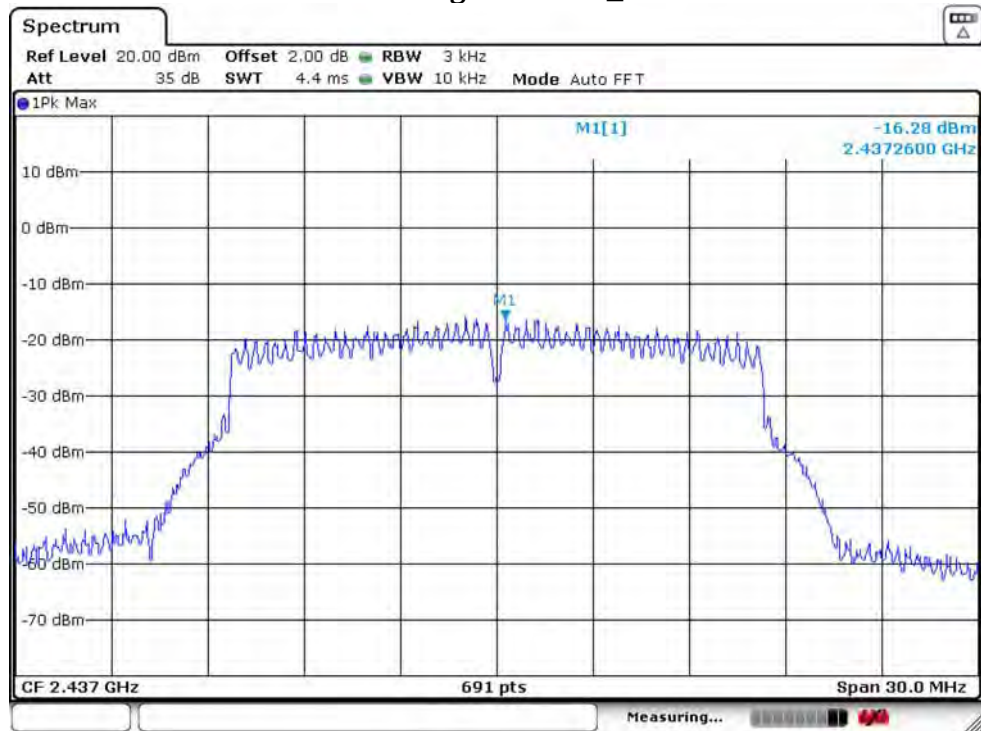


IEEE 802.11g 2437MHz_ANT 2

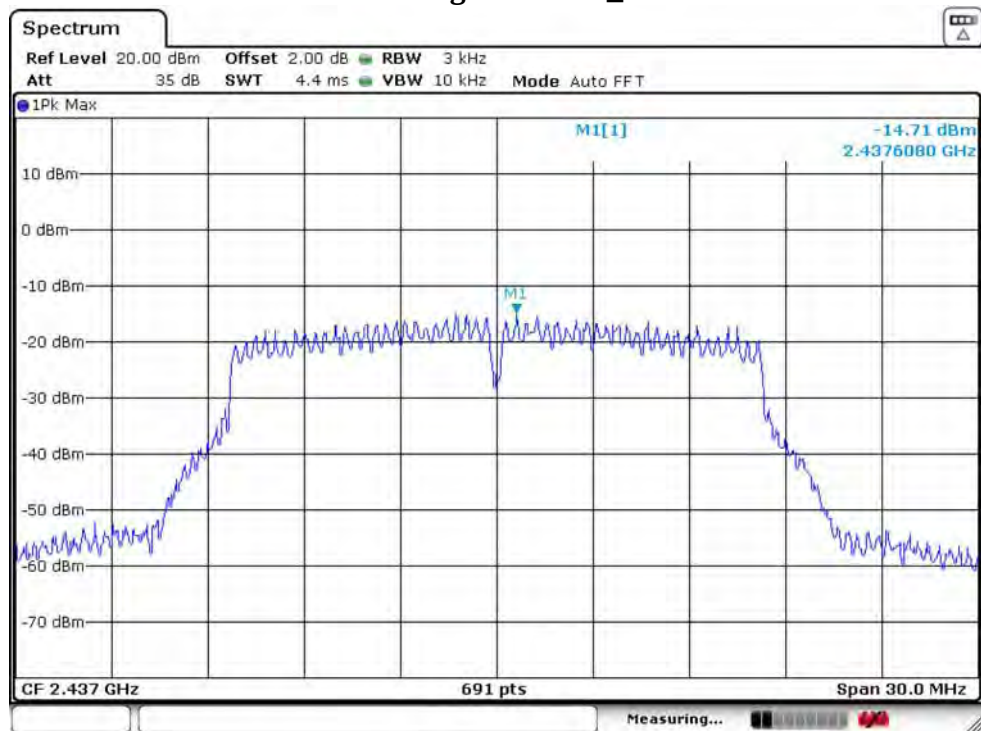


IEEE 802.11g 2462MHz_ANT 1

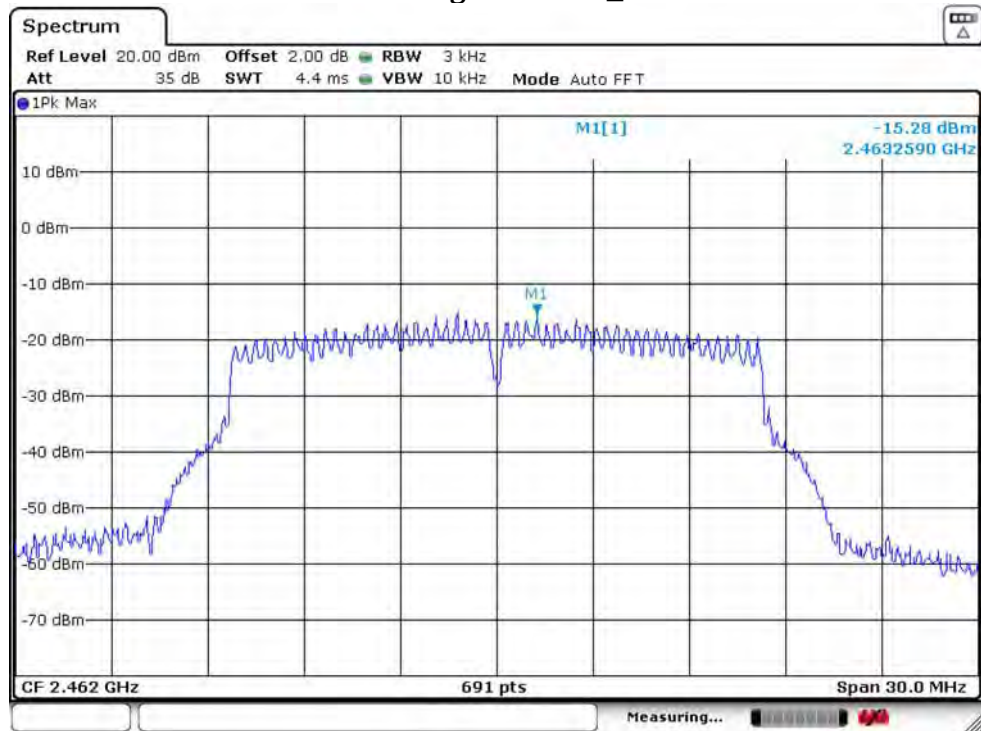


IEEE 802.11g 2462MHz_ANT 2

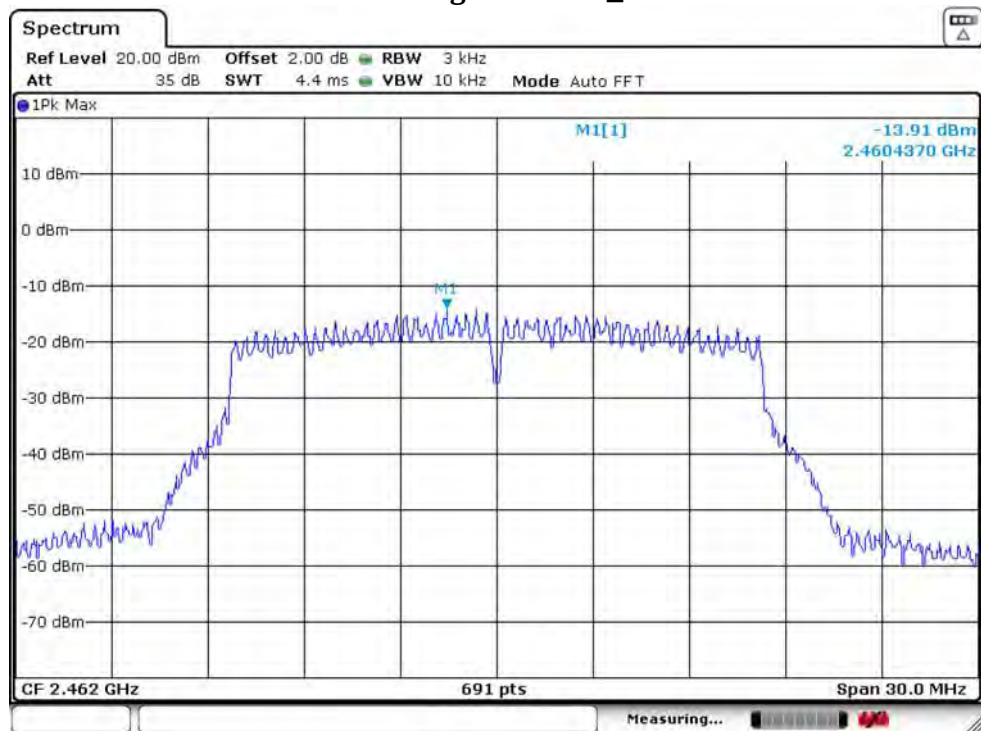


IEEE 802.11n HT20 2412MHz_ANT 1

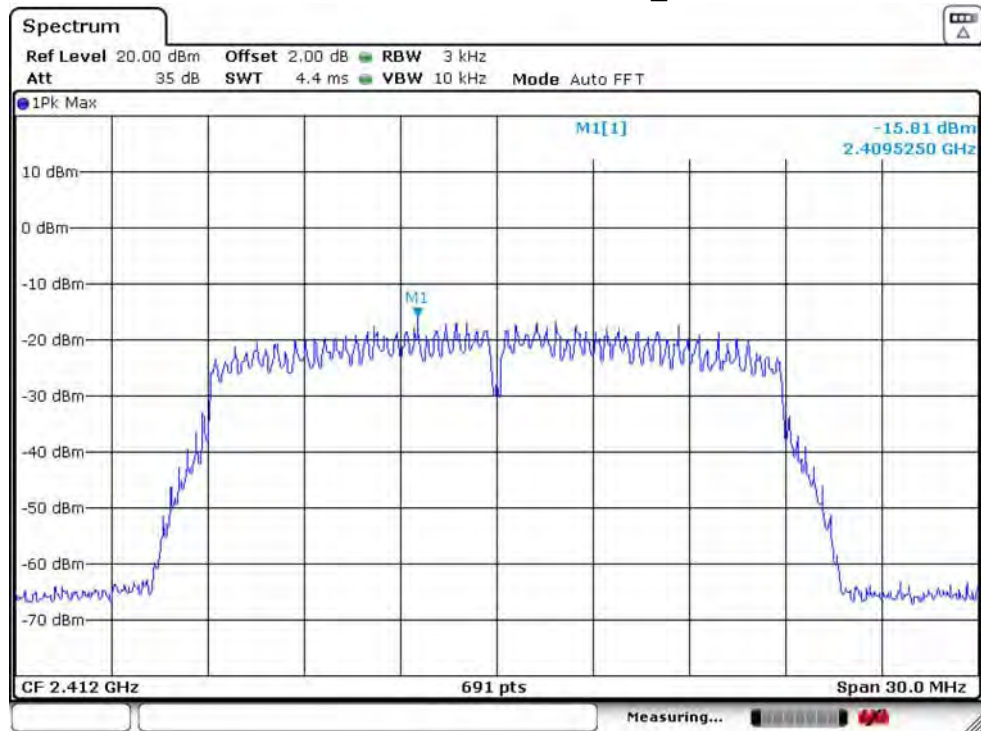


IEEE 802.11n HT20 2412MHz_ANT 2

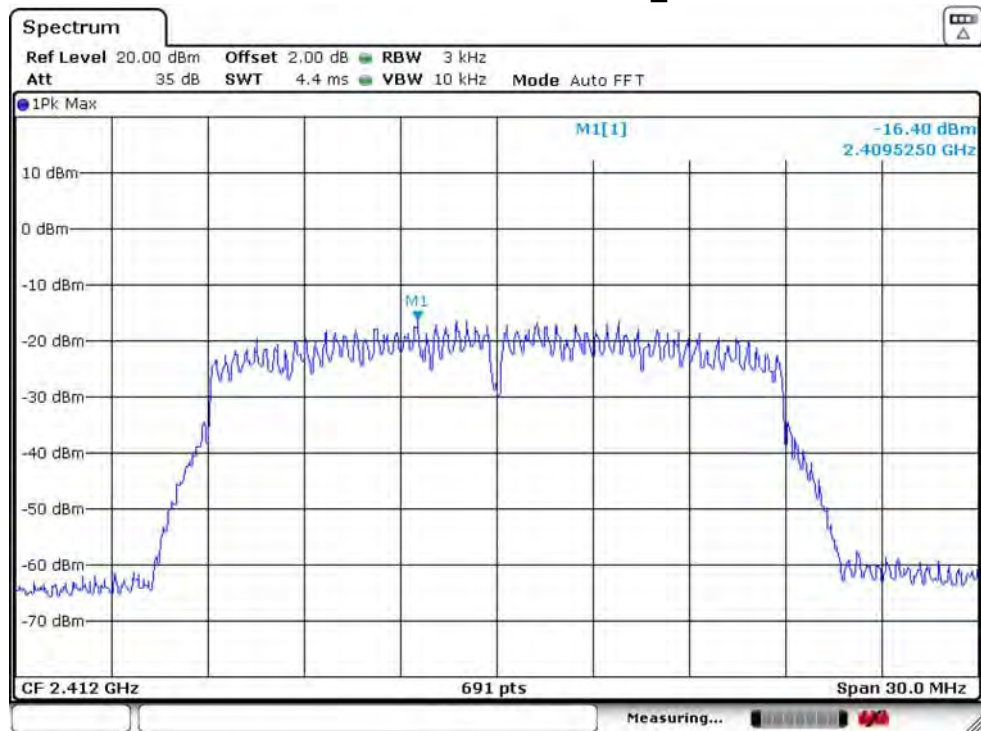


IEEE 802.11n HT20 2437MHz_ANT 1

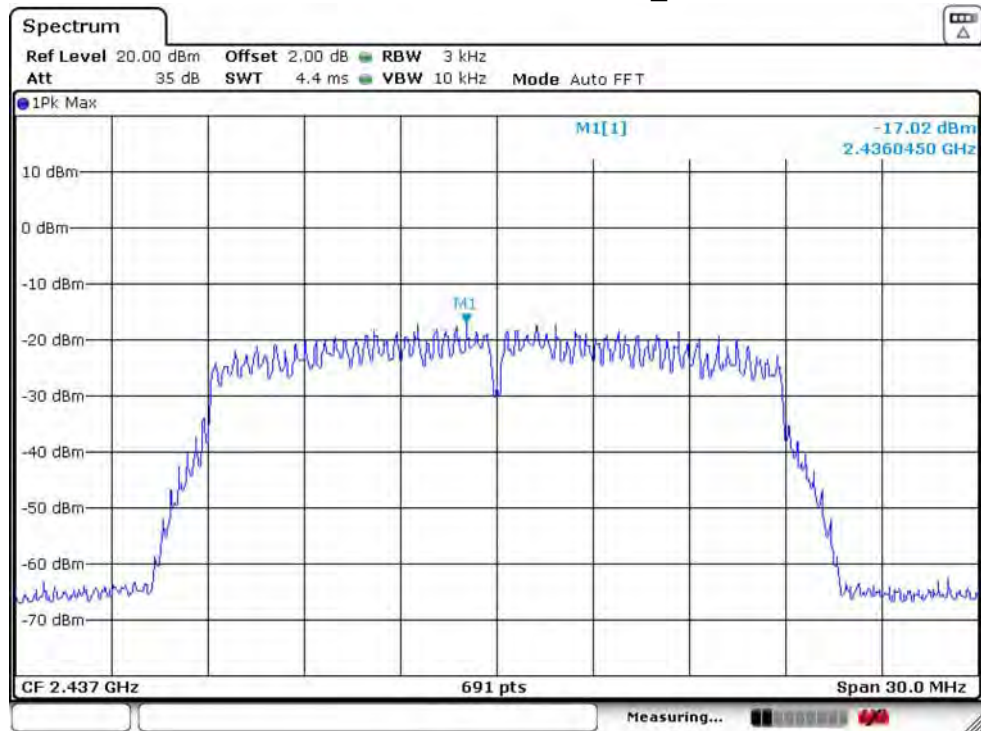


IEEE 802.11n HT20 2437MHz_ANT 2

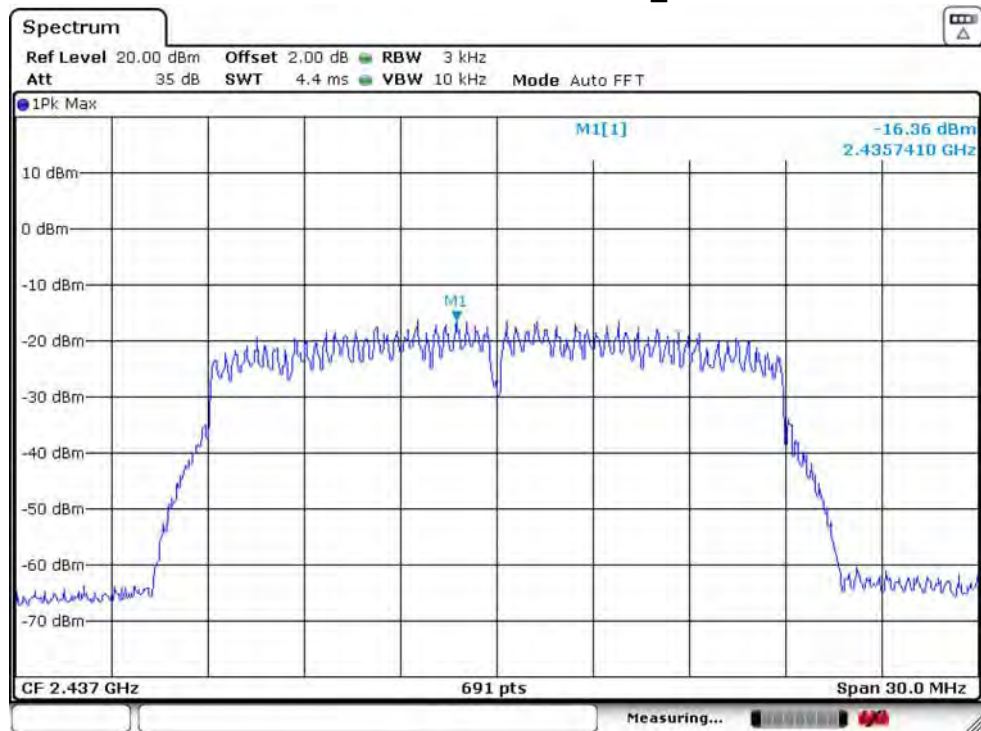


IEEE 802.11n HT20 2462MHz_ANT 1

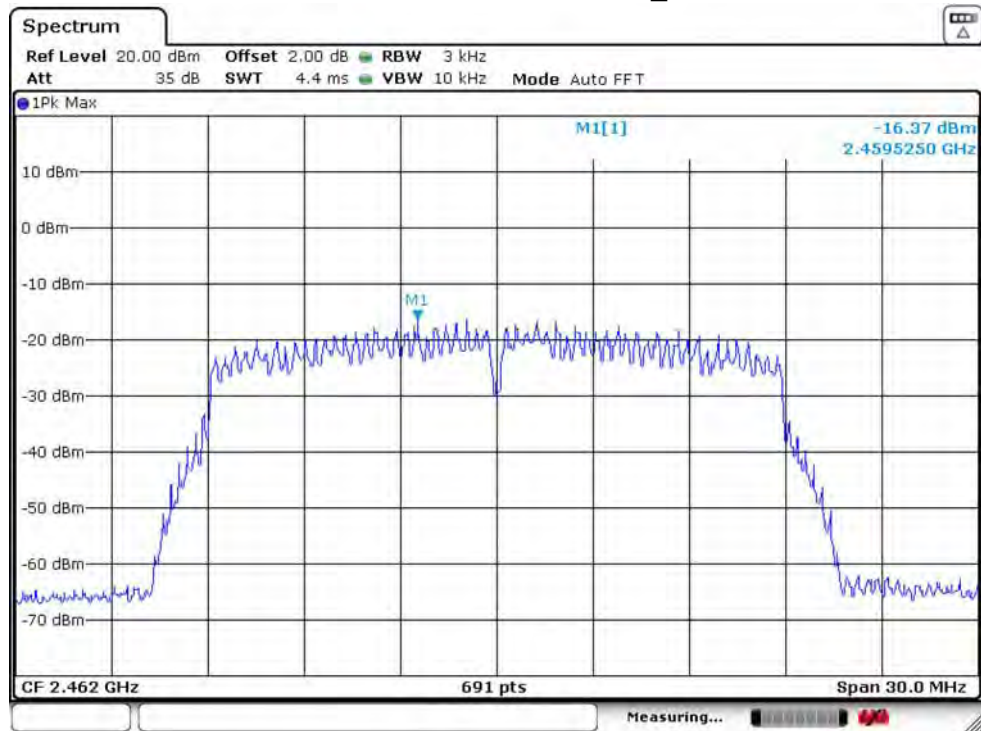


IEEE 802.11n HT20 2462MHz_ANT 2

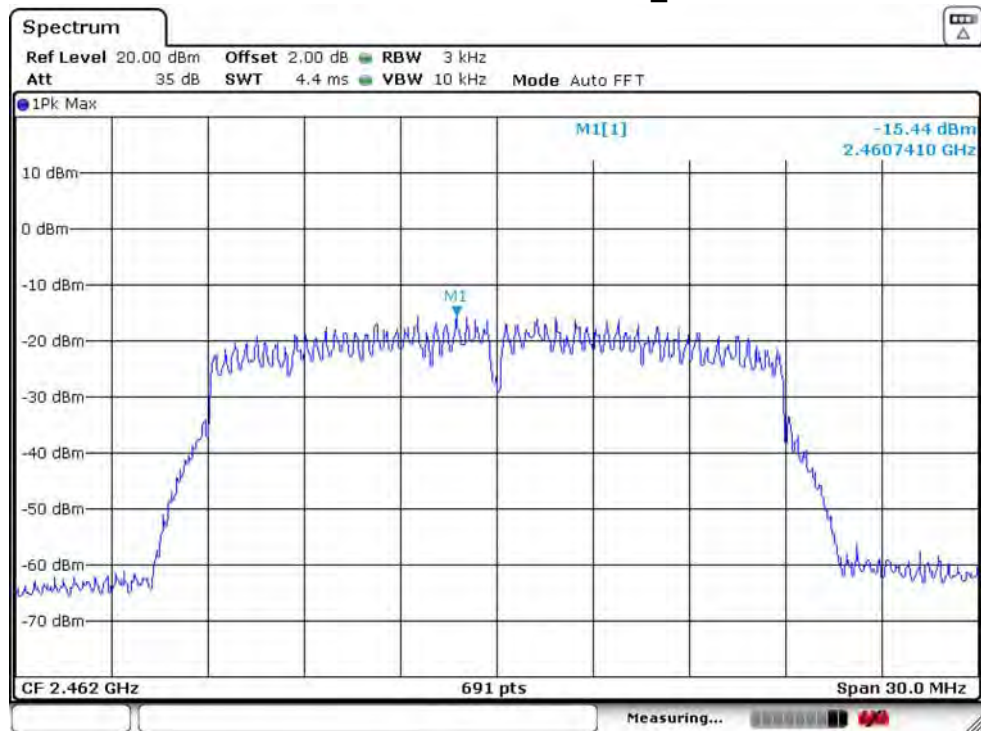


IEEE 802.11n HT40 2422MHz_ANT 1

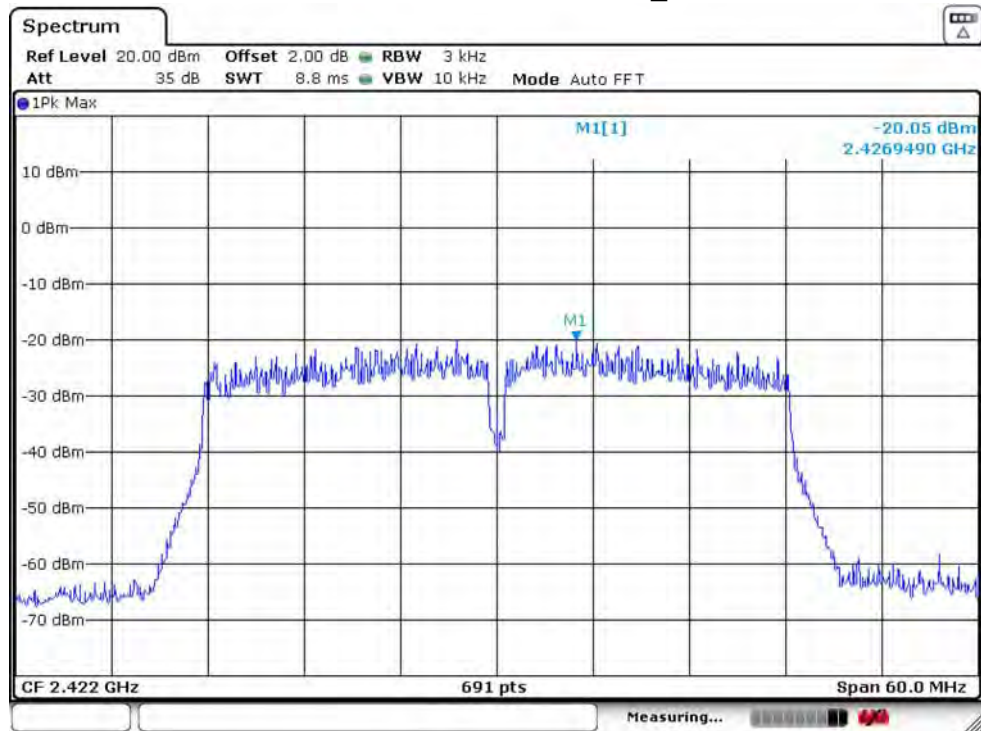


IEEE 802.11n HT40 2422MHz_ANT 2

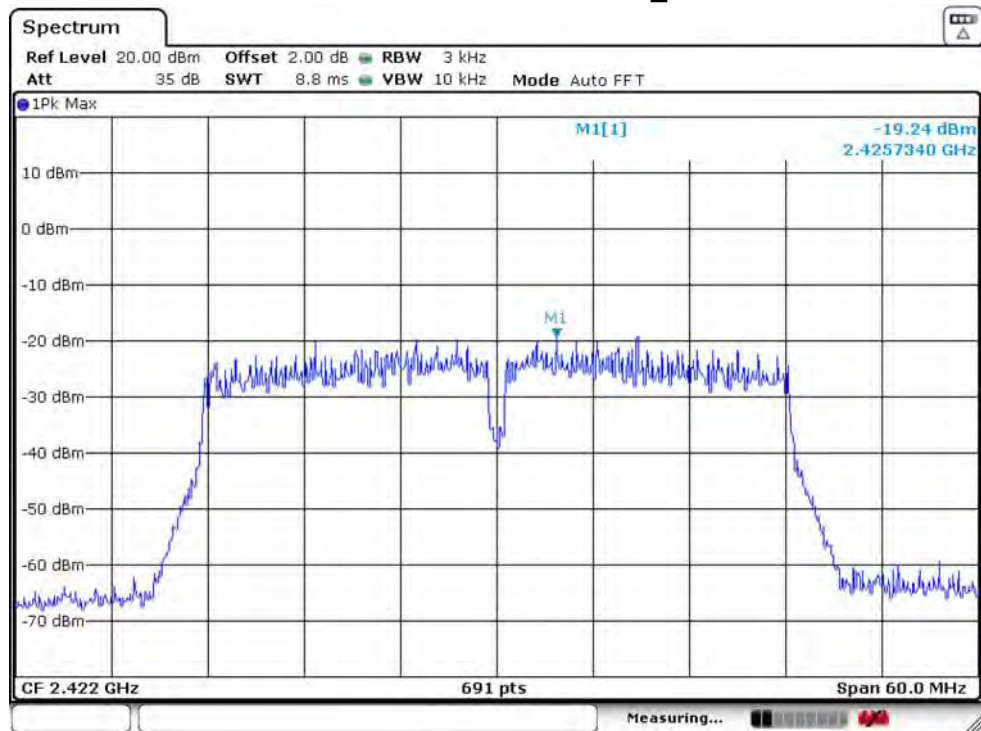


IEEE 802.11n HT40 2437MHz_ANT 1

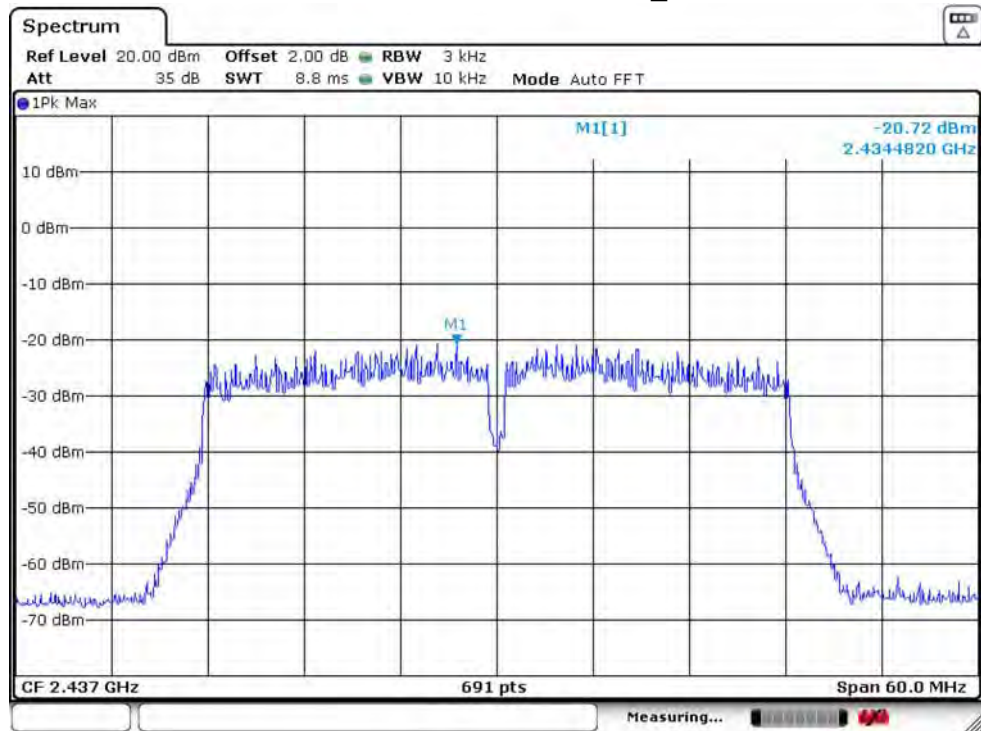


IEEE 802.11n HT40 2437MHz_ANT 2

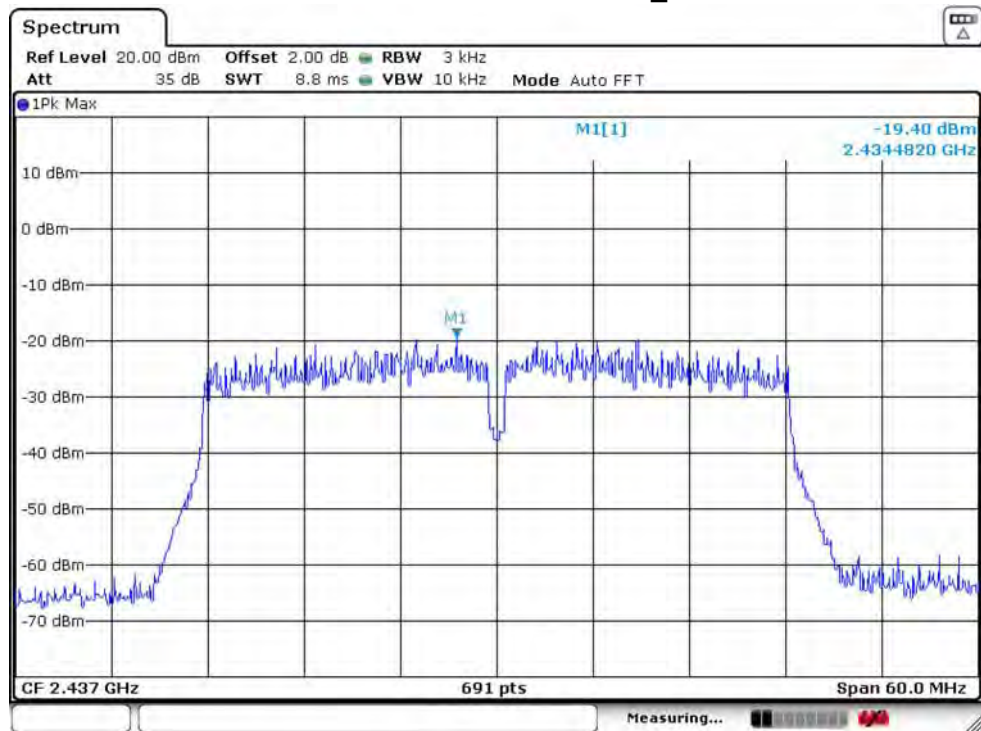

IEEE 802.11n HT40 2452MHz_ANT 1

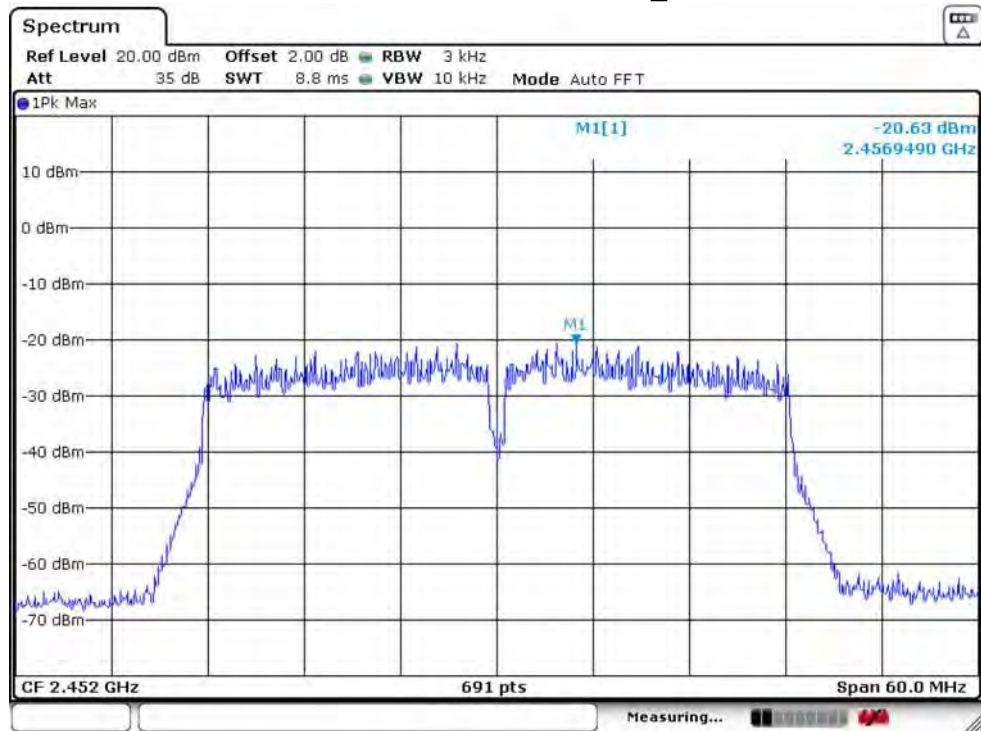

IEEE 802.11n HT40 2452MHz_ANT 2

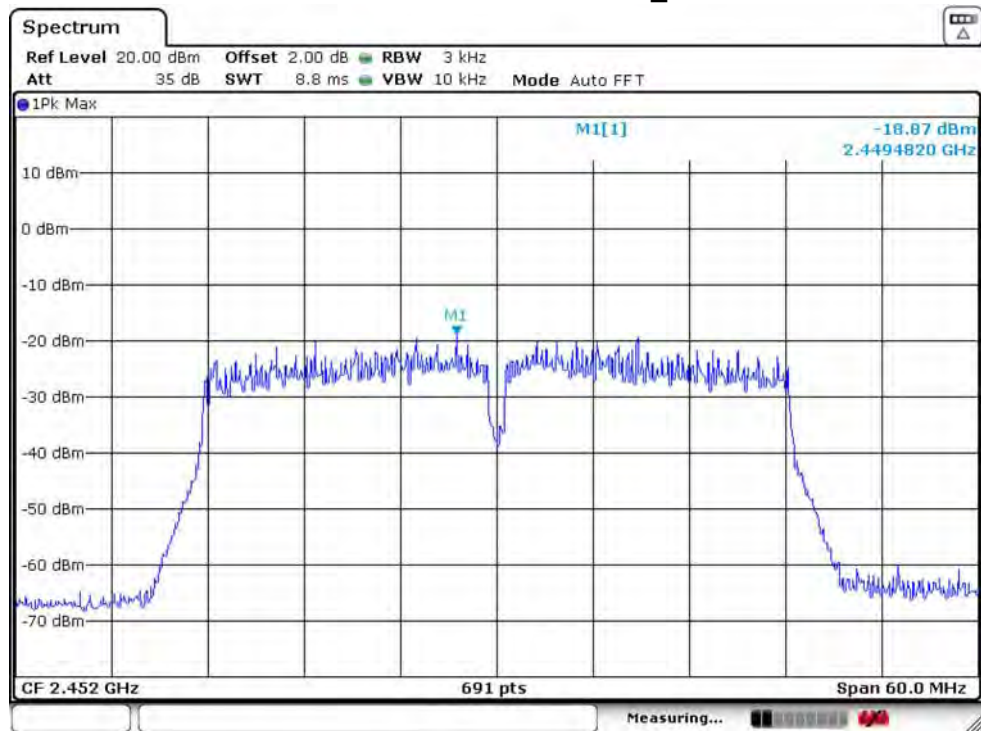


6. CONDUCTED BAND EDGE

6.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2. Test Setup

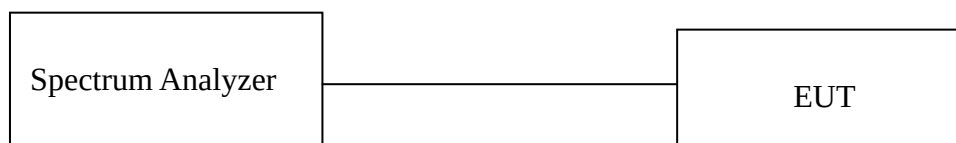

6.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz(20MHz Bandwidth mode)/200MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


6.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 6.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.
- all modulation have been tested, only worse case IEEE 802.11n HT20.


6.5. Test Result

Temperature	25°C	Relative Humidity	41%	Test Voltage	120V/60Hz
Result	PASS				

IEEE 802.11n HT20 2412MHz_ANT 2

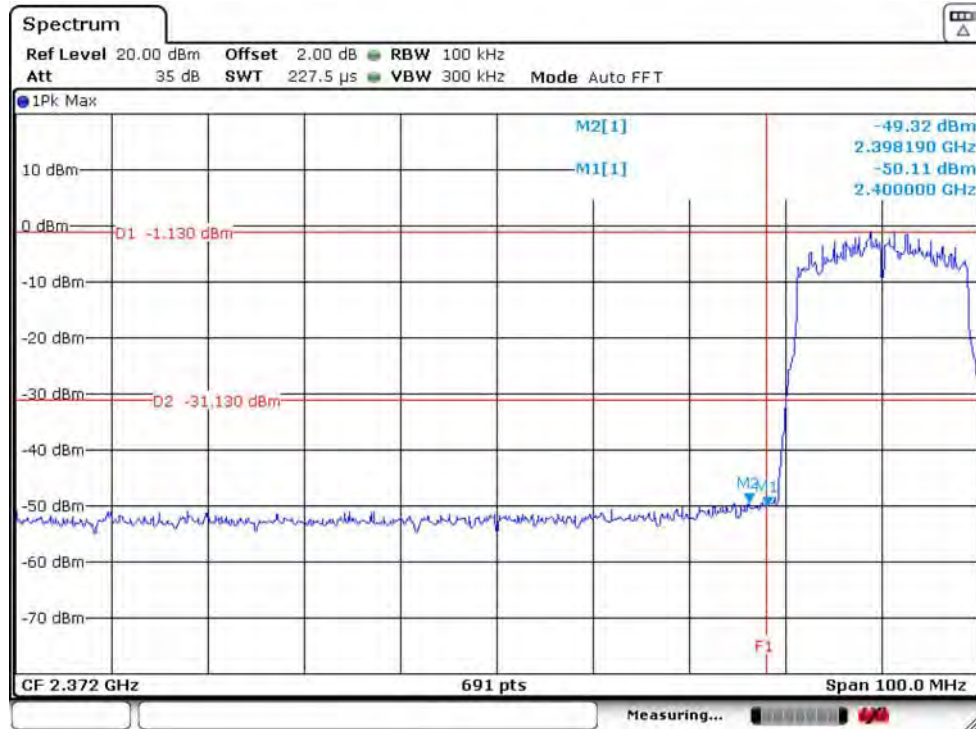

IEEE 802.11n HT20 2462MHz_ANT 2

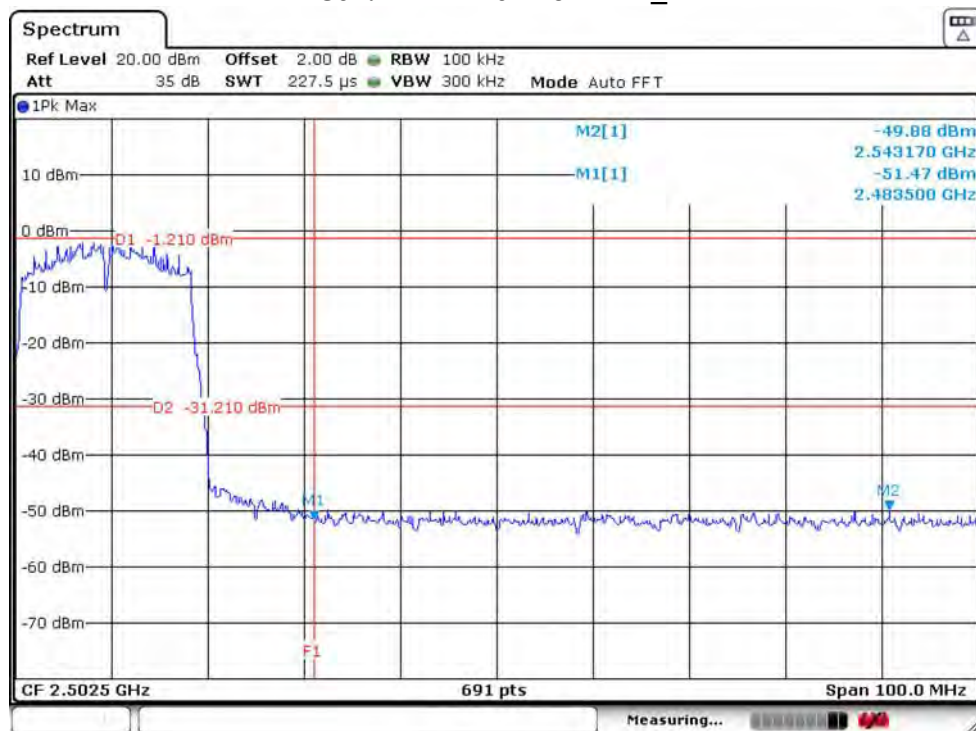

Note:


1:All modulations are all tested ,only worse case is reported

7. CONDUCTED SPURIOUS EMISSIONS

7.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2. Test Setup

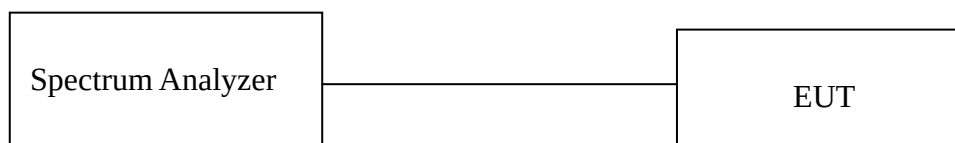

7.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	25GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


7.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 7.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.
- all modulation have been tested, only worse case IEEE 802.11n HT20.


7.5. Test Result

Temperature	25°C	Relative Humidity	41%	Test Voltage	120V/60Hz
Result	PASS				


IEEE 802.11n HT20 2412MHz_ANT 2

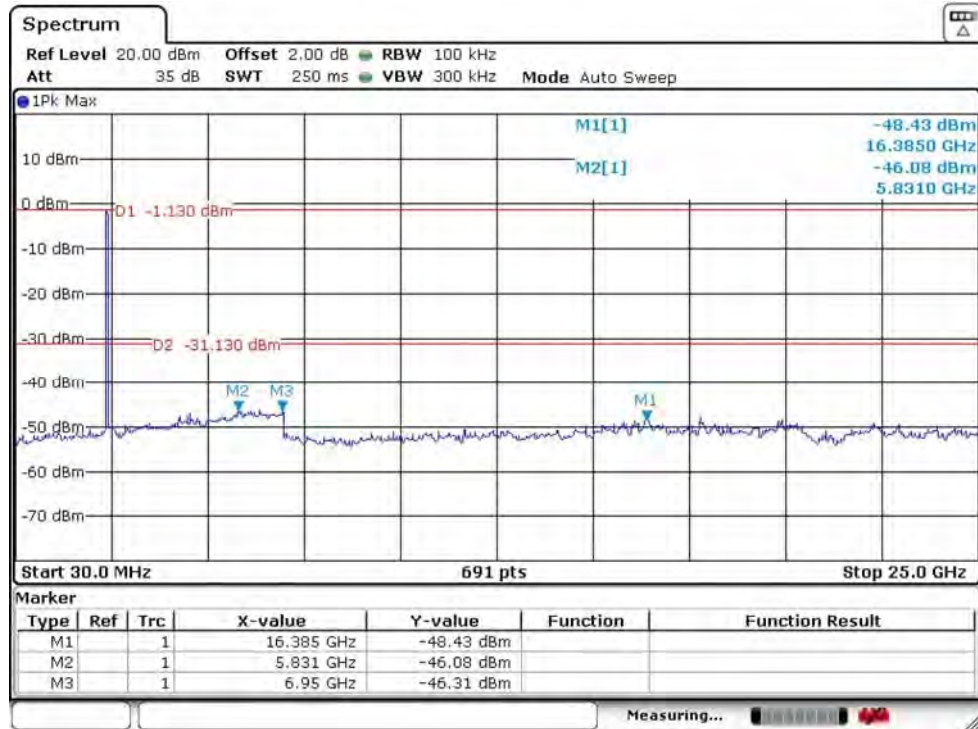

IEEE 802.11n HT20 2437MHz_ANT 2

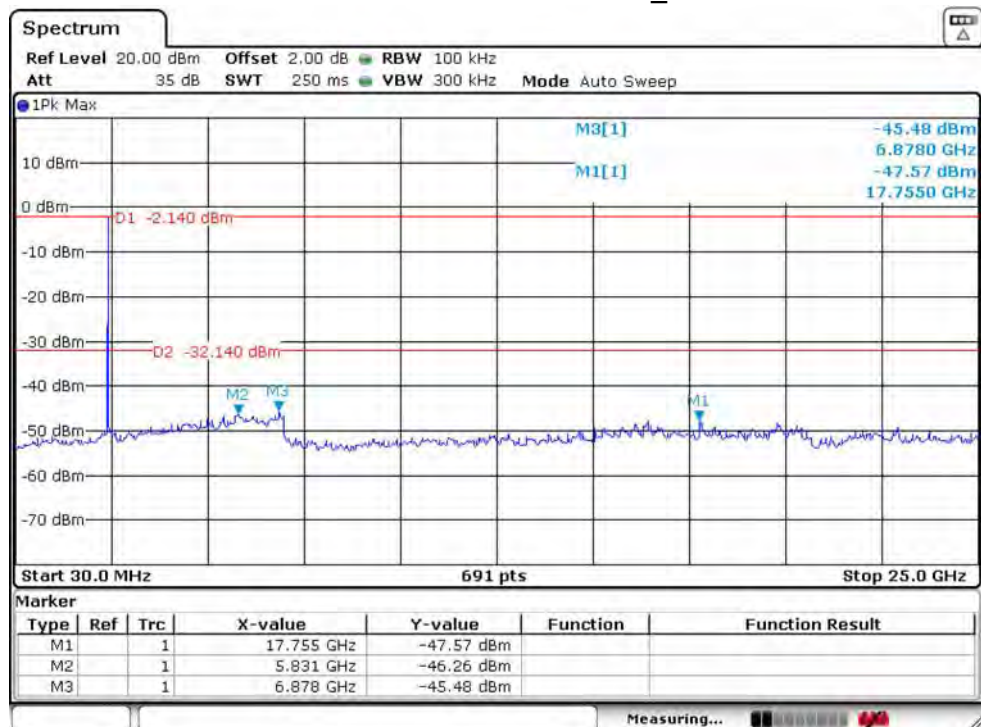

IEEE 802.11n HT20 2462MHz_ANT 2

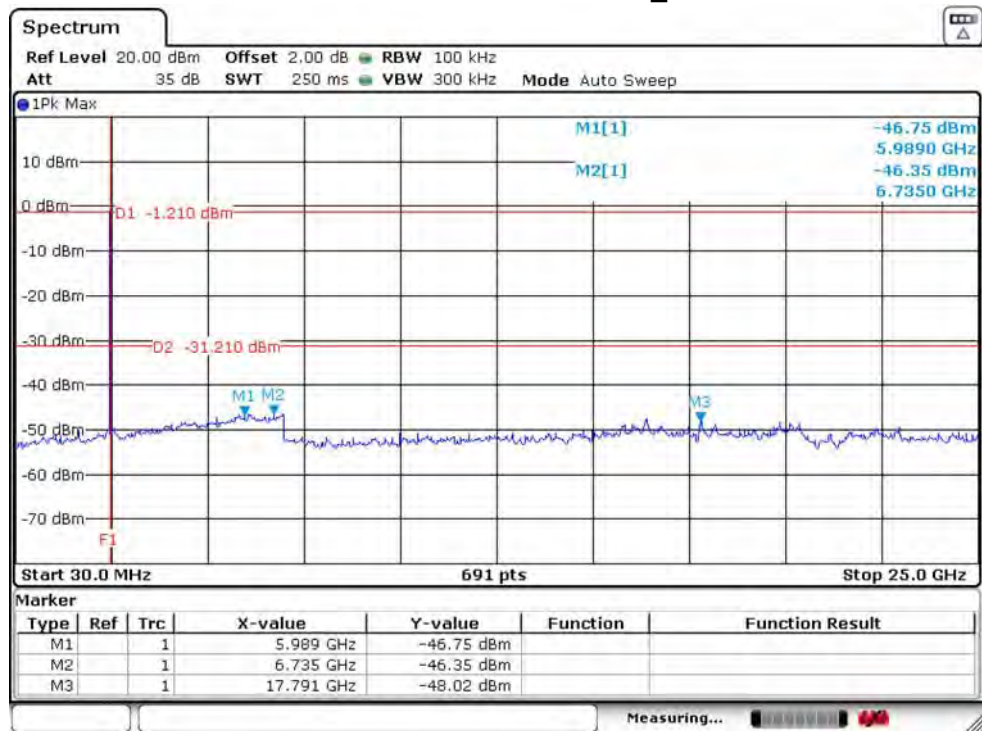

Note:

1:All modulations are all tested ,only worse case is reported

8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


- (1) Emission level dB μ V = 20 log Emission level μ V/m.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. Test Setup


9kHz~30MHz

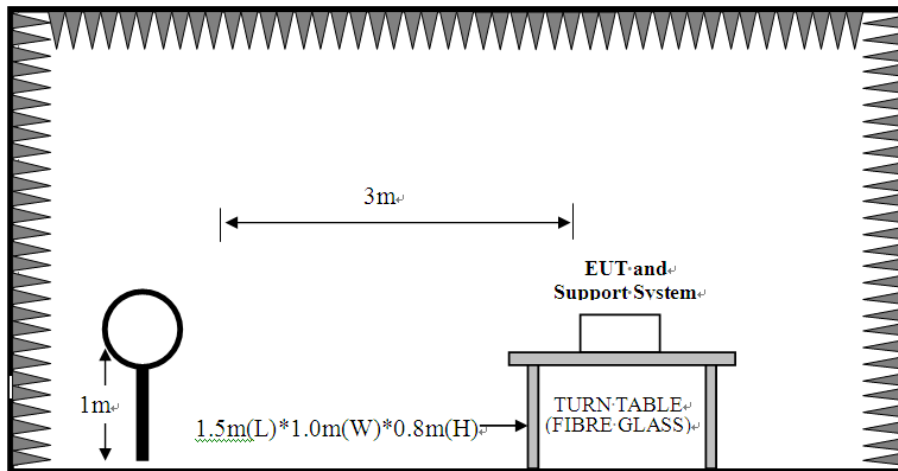

30~1000MHz

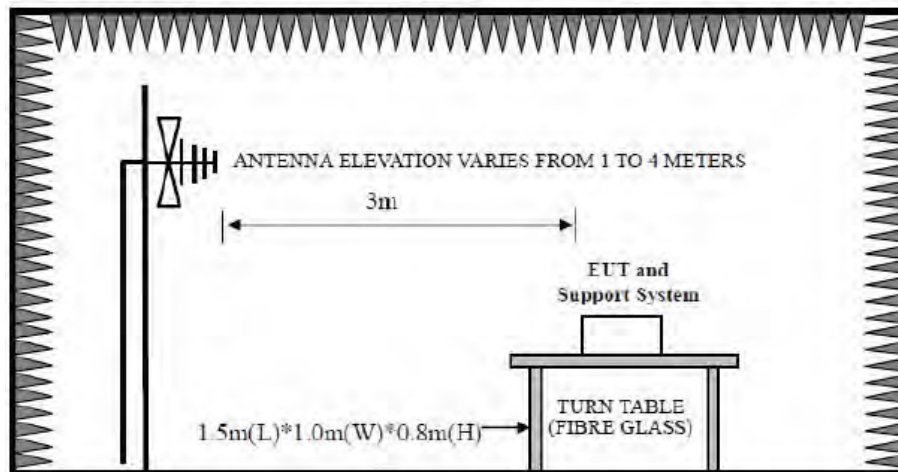

Above 1GHz

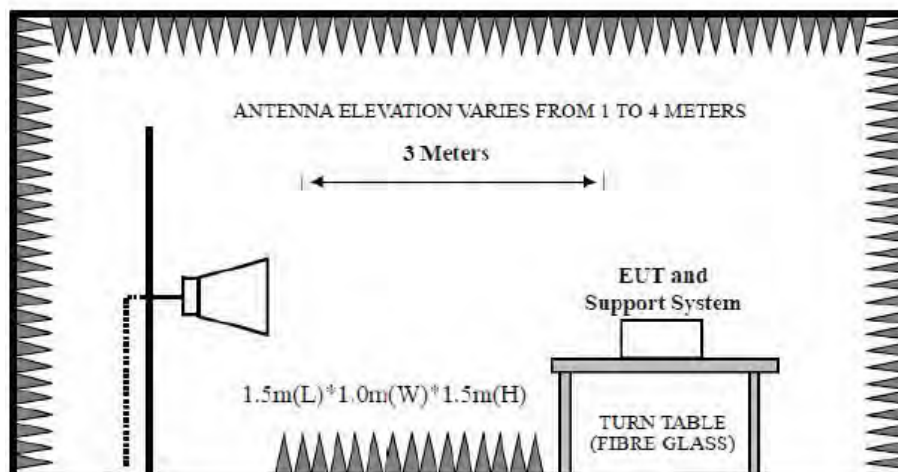

8.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	AVG Measurement
	3MHz	Duty cycle $\geq 98\%$, VBW=10Hz
		Duty cycle $< 98\%$, VBW $\geq 1/T$
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

Note :

1. T is the on-time time of the duty cycle,when EUT transmit continuously with maximum output power,unit is seconds. reference section 2.8 for the on-time time.

8.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 8.3.
- g. Repeat above procedures until all channels were measured.
- h. Record the results in the test report.

Note:


1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2412MHz/2422MHz/2437MHz/2452MHz/2462MHz are fundamental frequency, which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

8.5. Test Result

Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

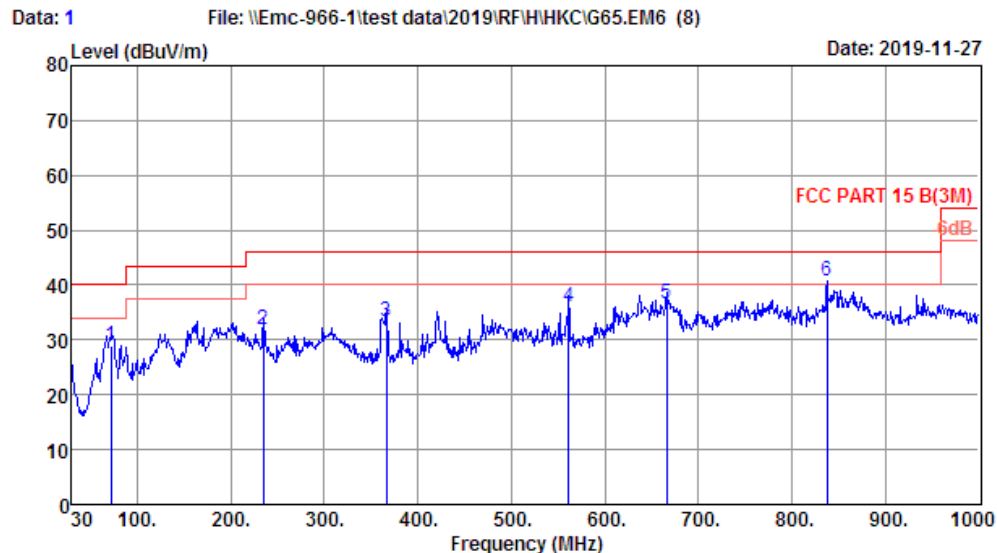

Site no. : 1# 966 chamber Data no. : 1
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:25.1'; Humi:56.8%; Press:101.52kPa
 Engineer : Frank
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : G65
 Test Mode : TX Mode

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
71.71	6.58	0.57	21.72	28.87	40.00	11.13	QP
234.67	10.90	1.56	19.46	31.92	46.00	14.08	QP
366.59	15.33	2.15	15.92	33.40	46.00	12.60	QP
561.56	19.82	2.87	13.43	36.12	46.00	9.88	QP
666.32	21.66	3.22	11.74	36.62	46.00	9.38	QP
838.01	23.48	3.70	13.56	40.74	46.00	5.26	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 2

File: \\Emc-966-1\test data\2019\RF\H\HKC\G65.EM6 (8)

Date: 2019-11-27

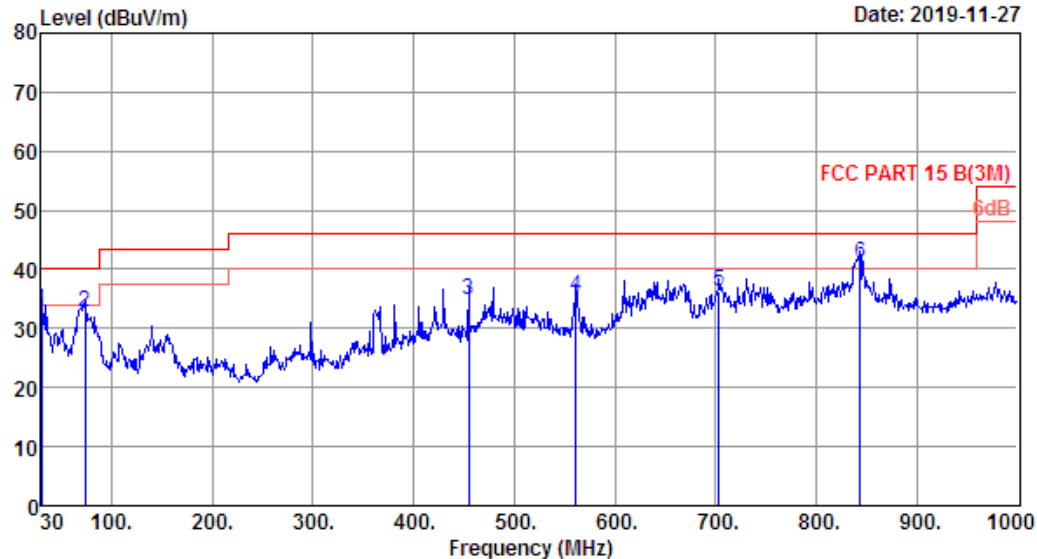

Site no. : 1# 966 chamber Data no. : 2
Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:25.1'; Humi:56.8%; Press:101.52kPa
Engineer : Frank
EUT : LED TV
Power : AC 120V/60Hz
M/N : G65
Test Mode : TX Mode

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.00	18.40	0.14	14.46	33.00	40.00	7.00	QP
73.65	6.66	0.57	25.52	32.75	40.00	7.25	QP
454.86	17.40	2.56	14.90	34.86	46.00	11.14	QP
561.56	19.82	2.87	12.65	35.34	46.00	10.66	QP
703.18	21.70	3.28	11.45	36.43	46.00	9.57	QP
843.83	23.34	3.70	14.01	41.05	46.00	4.95	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 73

File: \\Emc-966-1\\test data\\2019\\RF\\H\\HKC\\A550CV-UMC.EM6 (78)

Date: 2019-11-26

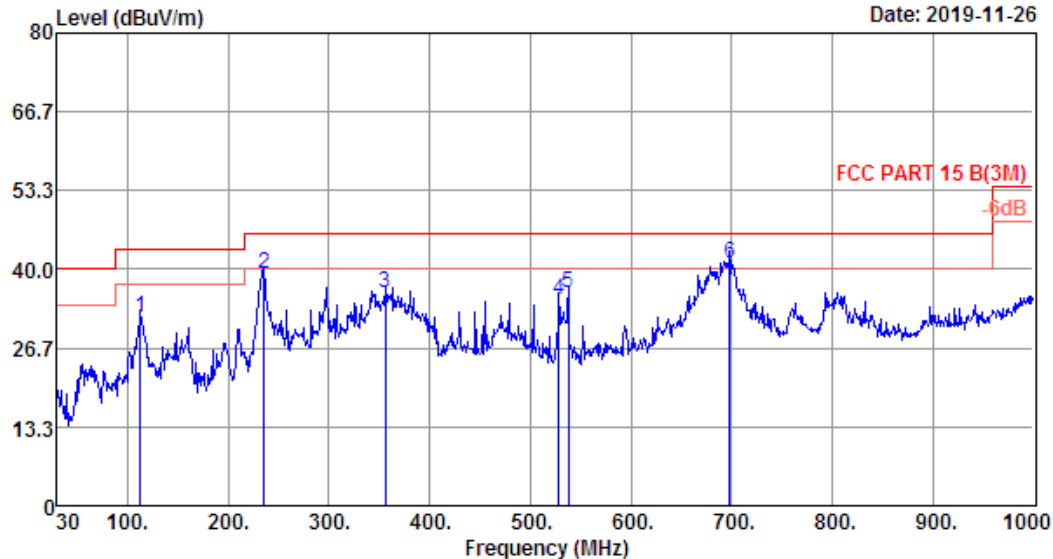

Site no. : 1# 966 Chamber Data no. : 73
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:25.3'; Humi:42%; Press:101.6kPa
 Engineer : Zzb
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : A550CV-UMC
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	112.45	10.90	0.95	20.13	31.98	43.50	11.52	QP
2	235.64	10.98	1.58	26.80	39.36	46.00	6.64	QP
3	355.92	15.28	2.14	18.56	35.98	46.00	10.02	QP
4	528.58	18.76	2.78	13.38	34.92	46.00	11.08	QP
5	538.28	19.05	2.80	14.17	36.02	46.00	9.98	QP
6	698.33	21.68	3.26	16.15	41.09	46.00	4.91	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 74

File: \\Emc-966-1\\test data\\2019\\RF\\HKC\\A550CV-UMC.EM6 (78)

Date: 2019-11-26

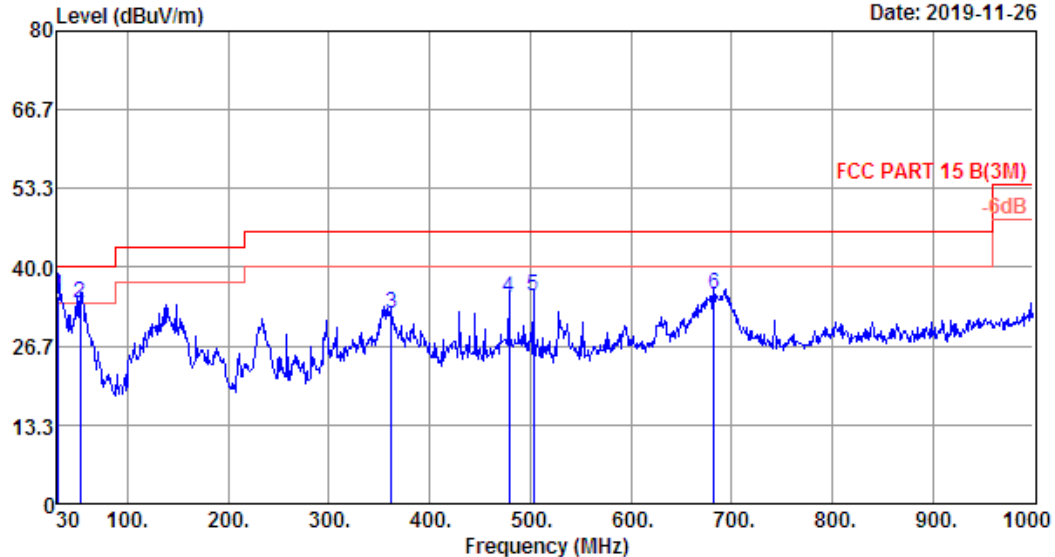

Site no. : 1# 966 Chamber Data no. : 74
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:25.3'; Humi:42%; Press:101.6kPa
 Engineer : Zzb
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : A550CV-UMC
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.97	17.60	0.14	17.30	35.04	40.00	4.96	QP
2	53.28	7.05	0.33	26.47	33.85	40.00	6.15	QP
3	361.74	15.24	2.15	14.93	32.32	46.00	13.68	QP
4	479.11	17.88	2.63	14.44	34.95	46.00	11.05	QP
5	503.36	18.36	2.68	14.01	35.05	46.00	10.95	QP
6	682.81	21.67	3.21	10.67	35.55	46.00	10.45	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 1

File: \\Emc-966-1\test data\2019\RF\H\HKC\G50.EM6 (8)

Date: 2019-11-27

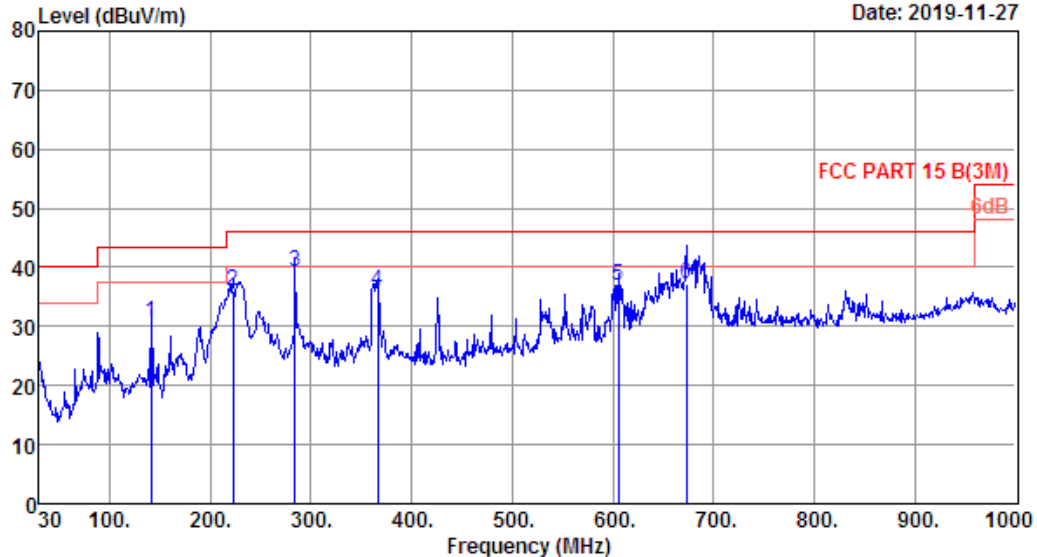


Site no. : 1# 966 chamber Data no. : 1
Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:25.1'; Humi:56.8%; Press:101.52kPa
Engineer : Frank
EUT : LED TV
Power : AC 120V/60Hz
M/N : G50
Test Mode : TX Mode

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
141.55	12.23	1.05	17.42	30.70	43.50	12.80	QP
223.03	10.02	1.46	24.67	36.15	46.00	9.85	QP
284.14	13.04	1.79	24.39	39.22	46.00	6.78	QP
366.59	15.33	2.15	18.49	35.97	46.00	10.03	QP
605.21	20.50	3.00	13.50	37.00	46.00	9.00	QP
673.11	21.70	3.22	12.29	37.21	46.00	8.79	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

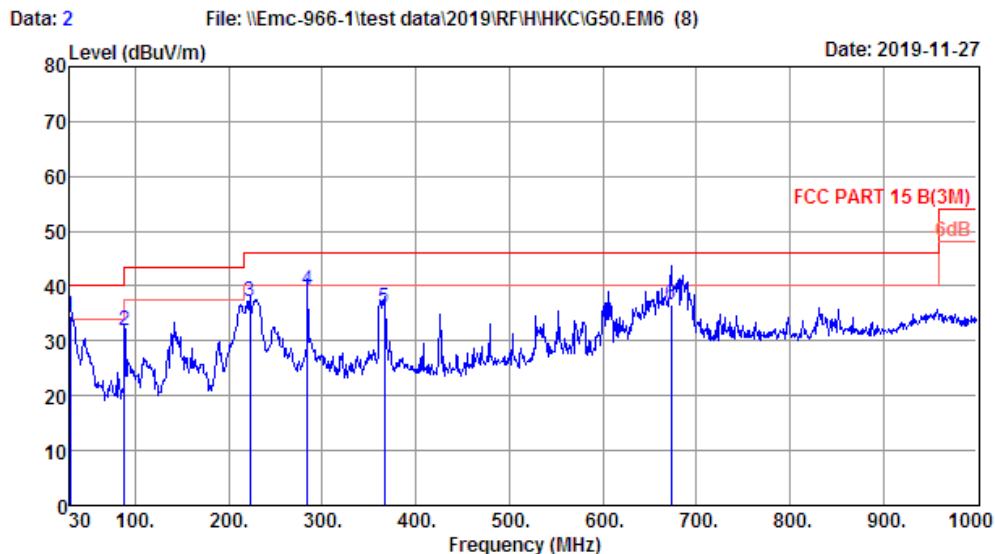

Site no. : 1# 966 chamber Data no. : 2
Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:25.1'; Humi:56.8%; Press:101.52kPa
Engineer : Frank
EUT : LED TV
Power : AC 120V/60Hz
M/N : G50
Test Mode : TX Mode

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.00	18.40	0.14	15.95	34.49	40.00	5.51	QP
88.20	8.90	0.79	22.21	31.90	43.50	11.60	QP
223.03	10.02	1.46	25.67	37.15	46.00	8.85	QP
284.14	13.04	1.79	24.39	39.22	46.00	6.78	QP
366.59	15.33	2.15	18.49	35.97	46.00	10.03	QP
673.11	21.70	3.22	11.79	36.71	46.00	9.29	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All channels had been pre-test, only the worst case was reported.



Radiated Emissions Above 1G


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 26

File: \\Emc-966-1\test data\2019\RF\H\HKC\G65.EM6 (78)

Date: 2019-12-06

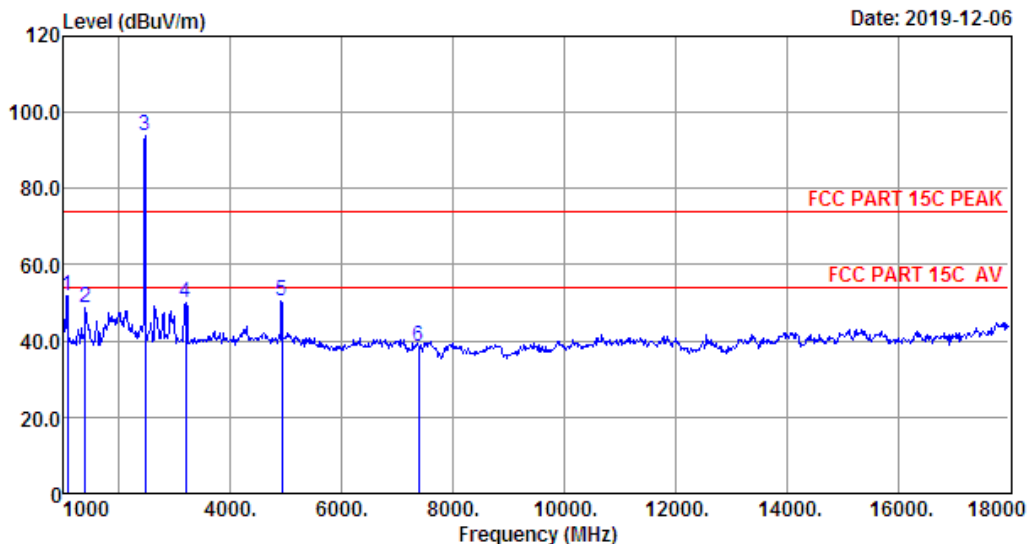

Site no. : 1# 966 Chamber Data no. : 26
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : G65
 Test Mode : IEEE 802.11n HT20 TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1068.00	24.47	1.06	34.61	61.11	52.03	74.00	21.97	Peak
2	1391.00	24.52	1.12	34.68	57.74	48.70	74.00	25.30	Peak
3	2462.00	27.35	1.48	34.62	99.84	94.05	74.00	-20.05	Peak
4	3193.00	28.71	2.46	34.42	53.23	49.98	74.00	24.02	Peak
5	4924.00	31.55	3.35	34.69	50.27	50.48	74.00	23.52	Peak
6	7386.00	36.59	5.24	34.84	31.58	38.57	74.00	35.43	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 25 File: \\Emc-966-1\test data\2019\RF\H\HKC\G65.EM6 (78)

Date: 2019-12-06

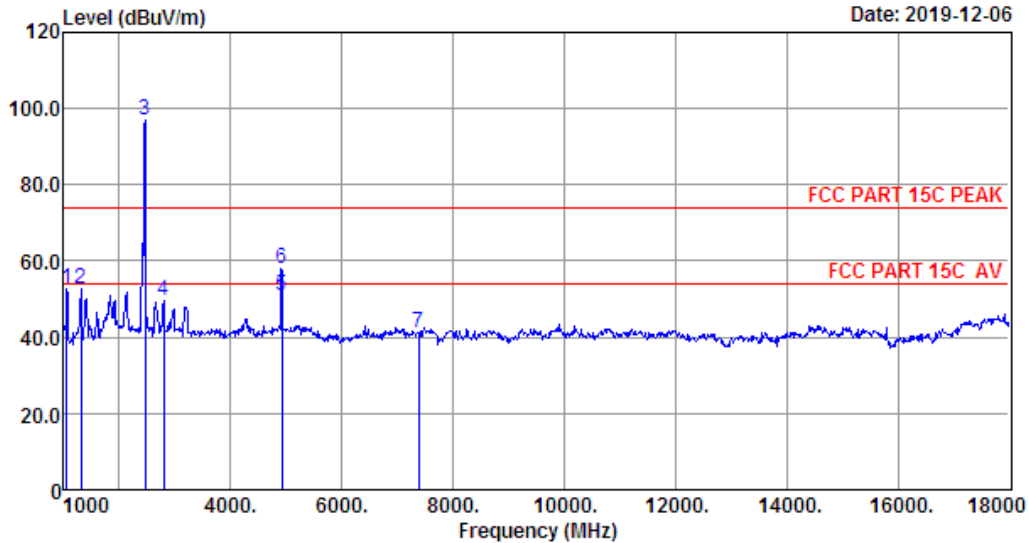

Site no. : 1# 966 Chamber Data no. : 25
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
Engineer : SEVEN
EUT : LED TV
Power : AC 120V/60Hz
M/N : G65
Test Mode : IEEE 802.11n HT20 TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.00	24.42	1.06	34.61	61.87	52.74	74.00	21.26	Peak
2	1306.00	24.65	1.11	34.66	61.49	52.59	74.00	21.41	Peak
3	2462.00	27.35	1.48	34.62	102.71	96.92	74.00	-22.92	Peak
4	2802.00	28.12	1.91	34.48	53.86	49.41	74.00	24.59	Peak
5	4924.00	31.55	3.35	34.69	50.61	50.82	54.00	3.18	Average
6	4924.00	31.55	3.35	34.69	57.61	57.82	74.00	16.18	Peak
7	7386.00	36.59	5.24	34.84	33.98	40.97	74.00	33.03	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 24 File: \\Emc-966-1\test data\2019\RF\H\HKC\G65.EM6 (78)

Date: 2019-12-06

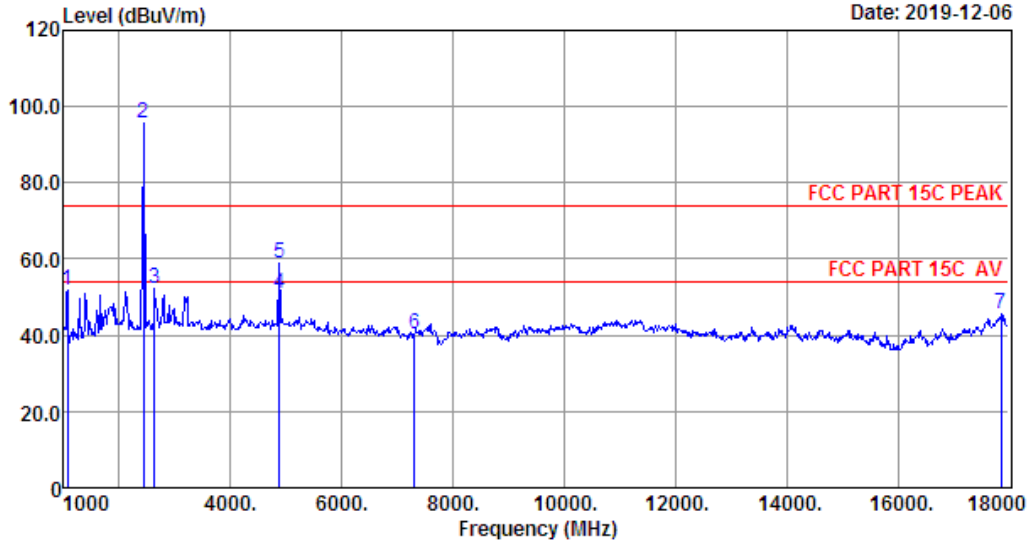

Site no. : 1# 966 Chamber Data no. : 24
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
Engineer : SEVEN
EUT : LED TV
Power : AC 120V/60Hz
M/N : G65
Test Mode : IEEE 802.11n HT20 TX 2437MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1068.00	24.47	1.06	34.61	60.71	51.63	74.00	22.37	Peak
2	2437.00	27.33	1.47	34.62	101.35	95.53	74.00	-21.53	Peak
3	2632.00	27.72	1.68	34.55	57.38	52.23	74.00	21.77	Peak
4	4874.00	31.37	3.31	34.68	50.86	50.86	54.00	3.14	Average
5	4874.00	31.37	3.31	34.68	58.86	58.86	74.00	15.14	Peak
6	7311.00	36.42	5.22	34.83	33.63	40.44	74.00	33.56	Peak
7	17864.00	47.82	8.15	34.31	23.80	45.46	74.00	28.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 23 File: \\Emc-966-1\test data\2019\RF\H\HKC\G65.EM6 (78)

Date: 2019-12-06

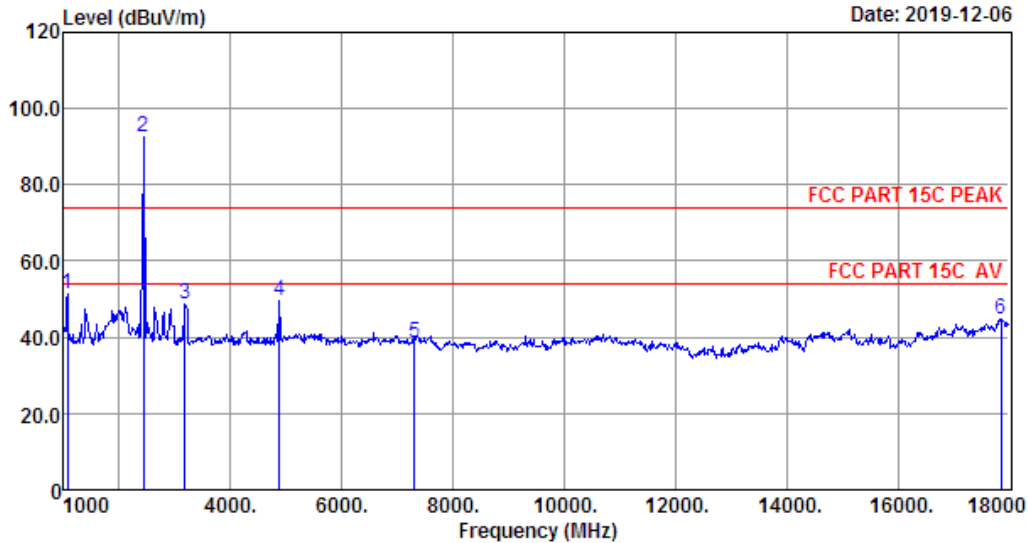

Site no. : 1# 966 Chamber Data no. : 23
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : G65
 Test Mode : IEEE 802.11n HT20 TX 2437MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1068.00	24.47	1.06	34.61	60.46	51.38	74.00	22.62	Peak
2	2437.00	27.33	1.47	34.62	98.36	92.54	74.00	-18.54	Peak
3	3176.00	28.70	2.43	34.42	52.10	48.81	74.00	25.19	Peak
4	4874.00	31.37	3.31	34.68	49.57	49.57	74.00	24.43	Peak
5	7311.00	36.42	5.22	34.83	31.80	38.61	74.00	35.39	Peak
6	17864.00	47.82	8.15	34.31	22.95	44.61	74.00	29.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 22 File: \\Emc-966-1\test data\2019\RF\H\HKC\G65.EM6 (78)

Date: 2019-12-06

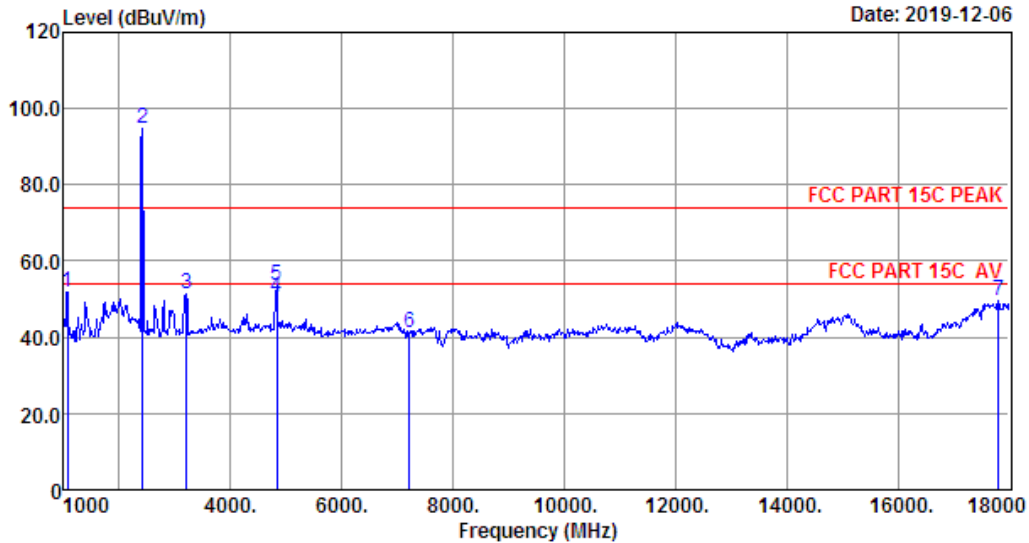


Site no. : 1# 966 Chamber Data no. : 22
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
Engineer : SEVEN
EUT : LED TV
Power : AC 120V/60Hz
M/N : G65
Test Mode : IEEE 802.11n HT20 TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1068.00	24.47	1.06	34.61	61.10	52.02	74.00	21.98	Peak
2	2411.00	27.28	1.46	34.64	100.72	94.82	74.00	-20.82	Peak
3	3210.00	28.72	2.48	34.42	54.44	51.22	74.00	22.78	Peak
4	4825.00	31.18	3.26	34.67	50.88	50.65	54.00	3.35	Average
5	4825.00	31.18	3.26	34.67	53.89	53.66	74.00	20.34	Peak
6	7222.00	36.25	5.19	34.82	34.58	41.20	74.00	32.80	Peak
7	17813.00	47.41	8.12	34.32	28.39	49.60	74.00	24.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

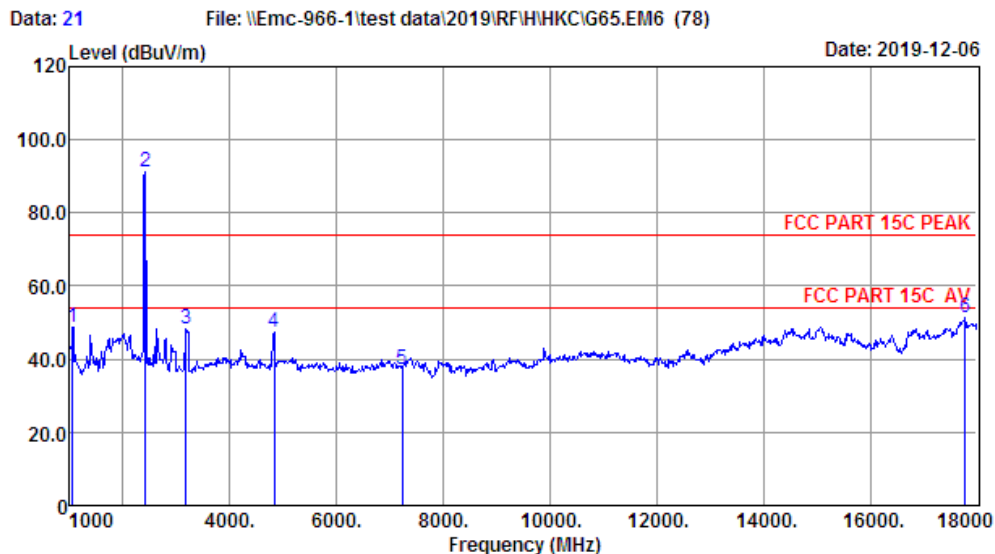

Site no. : 1# 966 Chamber Data no. : 21
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : G65
 Test Mode : IEEE 802.11n HT20 TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.00	24.42	1.06	34.61	57.77	48.64	74.00	25.36	Peak
2	2412.00	27.28	1.46	34.64	97.29	91.39	74.00	-17.39	Peak
3	3176.00	28.70	2.43	34.42	51.44	48.15	74.00	25.85	Peak
4	4824.00	31.18	3.26	34.67	47.44	47.21	74.00	26.79	Peak
5	7236.00	36.28	5.20	34.82	30.49	37.15	74.00	36.85	Peak
6	17779.00	47.14	8.10	34.32	30.57	51.49	74.00	22.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note: 1: All modulations are all tested, only worse case is reported

2: The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Radiated Band Edge

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 17 File: \\Emc-966-1\test data\2019\RF\H\HKC\G65.EM6 (78)

Date: 2019-12-06

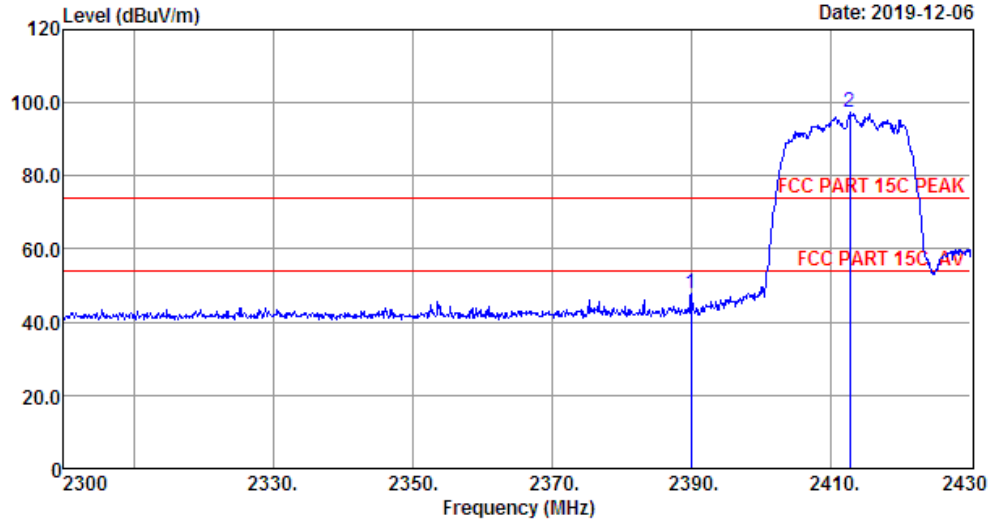

Site no. : 1# 966 Chamber Data no. : 17
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : G65
 Test Mode : IEEE 802.11n HT20 TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2389.96	27.26	1.45	34.64	53.78	47.85	74.00	26.15	Peak
2	2412.71	27.28	1.46	34.64	103.19	97.29	74.00	-23.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 18

File: \\Emc-966-1\\test data\\2019\\RF\\H\\HKC\\G65.EM6 (78)

Date: 2019-12-06

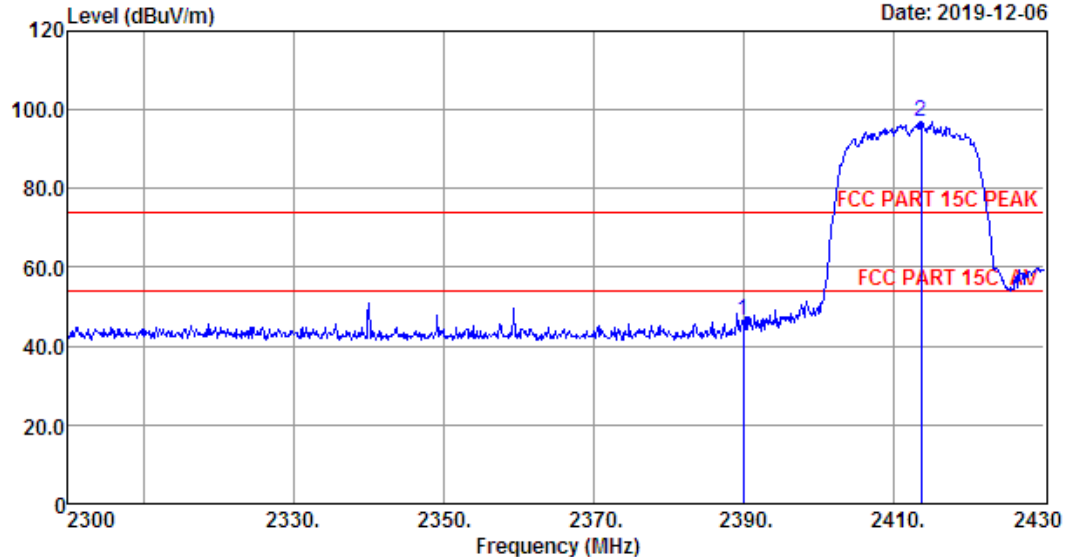

Site no. : 1# 966 Chamber Data no. : 18
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : G65
 Test Mode : IEEE 802.11n HT20 TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2389.96	27.26	1.45	34.64	52.21	46.28	74.00	27.72	Peak
2	2413.62	27.28	1.46	34.64	103.07	97.17	74.00	-23.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 19

File: \\Emc-966-1\\test data\\2019\\RF\\H\\HKC\\G65.EM6 (78)

Date: 2019-12-06

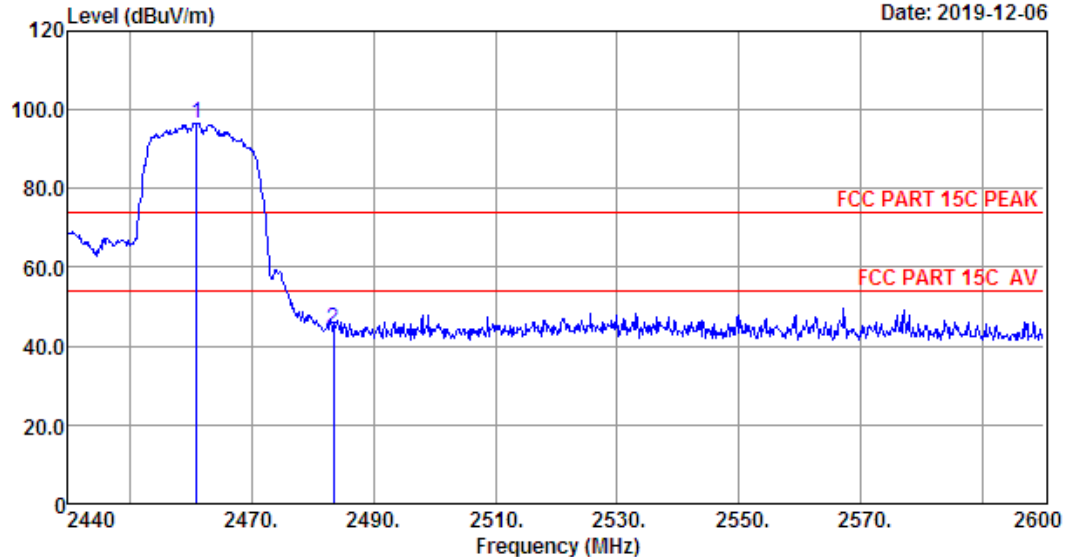


Site no. : 1# 966 Chamber Data no. : 19
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : G65
 Test Mode : IEEE 802.11n HT20 TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.12	27.35	1.48	34.62	102.50	96.71	74.00	-22.71	Peak
2	2483.52	27.38	1.48	34.61	50.09	44.34	74.00	29.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

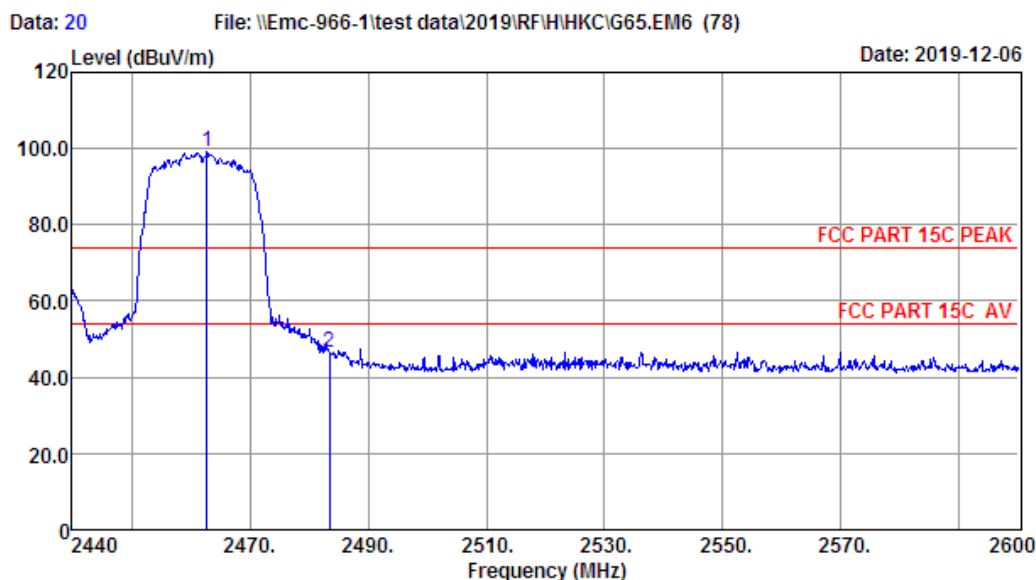

Site no. : 1# 966 Chamber Data no. : 20
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : G65
 Test Mode : IEEE 802.11n HT20 TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.72	27.35	1.48	34.62	104.93	99.14	74.00	-25.14	Peak
2	2483.52	27.38	1.48	34.61	52.35	46.60	74.00	27.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note: 1:All modulations are all tested ,only worse case is reported
 2:All channels had been pre-test,only of the worst case channels were reported.

9. AC POWER LINE CONDUCTED EMISSIONS


9.1. Limit

Frequency			Maximum RF Line Voltage	
			Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz	~	500kHz	66 ~ 56*	56 ~ 46*
500kHz	~	5MHz	56	46
5MHz	~	30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

9.2. Test Setup

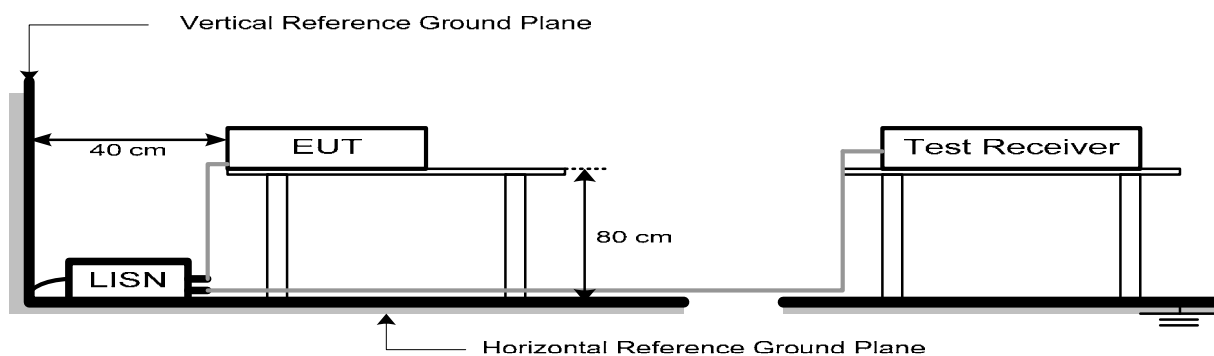

9.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold


9.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 9.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

9.5. Test Result

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

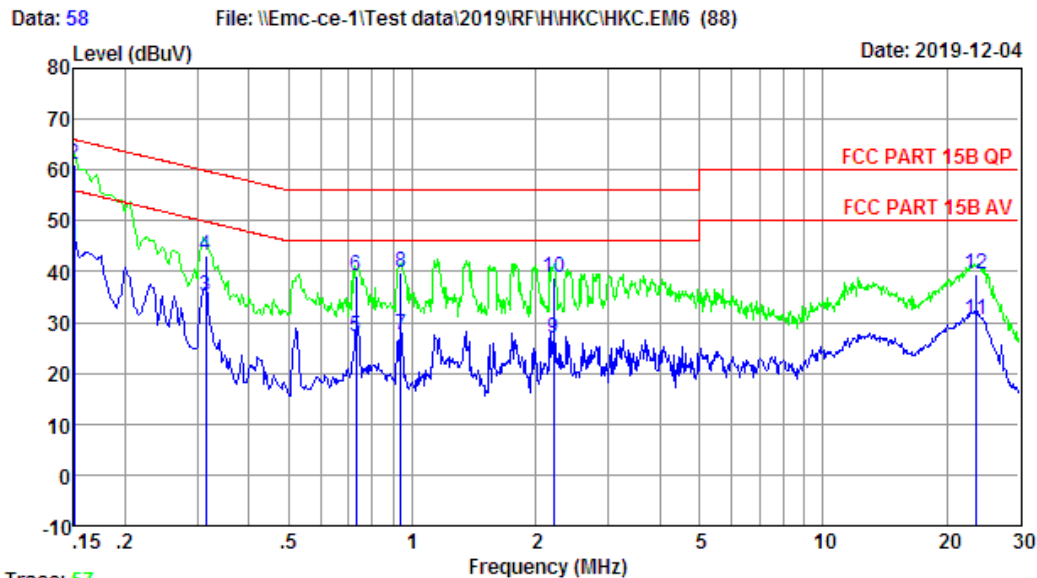

Trace: 57

Site no : 844 Shield Room Data no. : 58

Env. / Ins. : Temp:22.5°C Humi:23% Press:101.40kPa LINE Phase : LINE

Limit : FCC PART 15B QP

Engineer : SHO

EUT : LED TV

Power : AC 120V/60Hz

M/N : G65

Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.68	0.04	35.43	45.15	56.00	10.85	Average
2	0.15	9.68	0.04	51.43	61.15	66.00	4.85	QP
3	0.31	9.73	0.05	25.45	35.23	49.84	14.61	Average
4	0.31	9.73	0.05	33.45	43.23	59.84	16.61	QP
5	0.73	9.85	0.05	17.39	27.29	46.00	18.71	Average
6	0.73	9.85	0.05	29.39	39.29	56.00	16.71	QP
7	0.94	9.88	0.06	17.72	27.66	46.00	18.34	Average
8	0.94	9.88	0.06	29.72	39.66	56.00	16.34	QP
9	2.21	9.85	0.06	16.80	26.71	46.00	19.29	Average
10	2.21	9.85	0.06	28.80	38.71	56.00	17.29	QP
11	23.51	10.01	0.09	20.47	30.57	50.00	19.43	Average
12	23.51	10.01	0.09	29.46	39.56	60.00	20.44	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 60

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (88)

Date: 2019-12-04

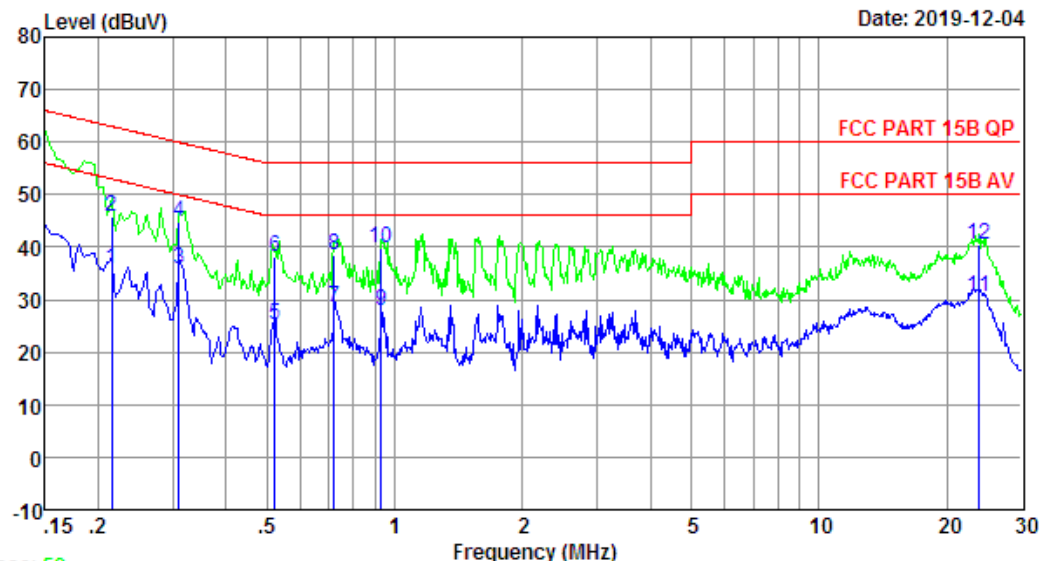

Trace: 59

Site no : 844 Shield Room Data no. : 60
 Env. / Ins. : Temp:22.5°C Humi:23% Press:101.40kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : SHO
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : G65
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.22	9.65	0.04	26.19	35.88	53.01	17.13	Average
2	0.22	9.65	0.04	36.19	45.88	63.01	17.13	QP
3	0.31	9.66	0.04	26.06	35.76	49.97	14.21	Average
4	0.31	9.66	0.04	35.06	44.76	59.97	15.21	QP
5	0.52	9.70	0.05	15.45	25.20	46.00	20.80	Average
6	0.52	9.70	0.05	28.45	38.20	56.00	17.80	QP
7	0.72	9.72	0.05	18.85	28.62	46.00	17.38	Average
8	0.72	9.72	0.05	28.85	38.62	56.00	17.38	QP
9	0.93	9.75	0.06	18.16	27.97	46.00	18.03	Average
10	0.93	9.75	0.06	30.16	39.97	56.00	16.03	QP
11	23.89	10.01	0.09	20.37	30.47	50.00	19.53	Average
12	23.89	10.01	0.09	30.37	40.47	60.00	19.53	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 62

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (88)

Date: 2019-12-02

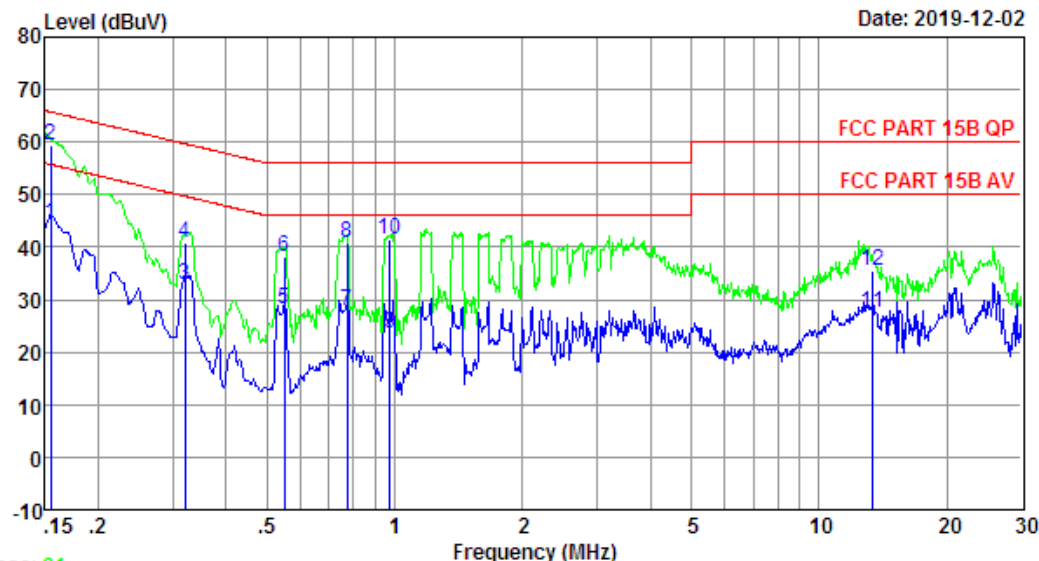

Trace: 61

Site no : 844 Shield Room Data no. : 62
 Env. / Ins. : Temp:23.5°C Humi:38% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : SHO
 EUT : LED TV
 Power : AC 240V/60Hz
 M/N : G65
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.68	0.04	34.60	44.32	55.74	11.42	Average
2	0.15	9.68	0.04	49.60	59.32	65.74	6.42	QP
3	0.32	9.73	0.05	22.94	32.72	49.71	16.99	Average
4	0.32	9.73	0.05	30.94	40.72	59.71	18.99	QP
5	0.55	9.80	0.05	18.33	28.18	46.00	17.82	Average
6	0.55	9.80	0.05	28.33	38.18	56.00	17.82	QP
7	0.77	9.85	0.05	18.04	27.94	46.00	18.06	Average
8	0.77	9.85	0.05	31.04	40.94	56.00	15.06	QP
9	0.97	9.89	0.06	13.43	23.38	46.00	22.62	Average
10	0.97	9.89	0.06	31.43	41.38	56.00	14.62	QP
11	13.41	9.86	0.08	17.67	27.61	50.00	22.39	Average
12	13.41	9.86	0.08	25.67	35.61	60.00	24.39	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 64

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (88)

Date: 2019-12-02

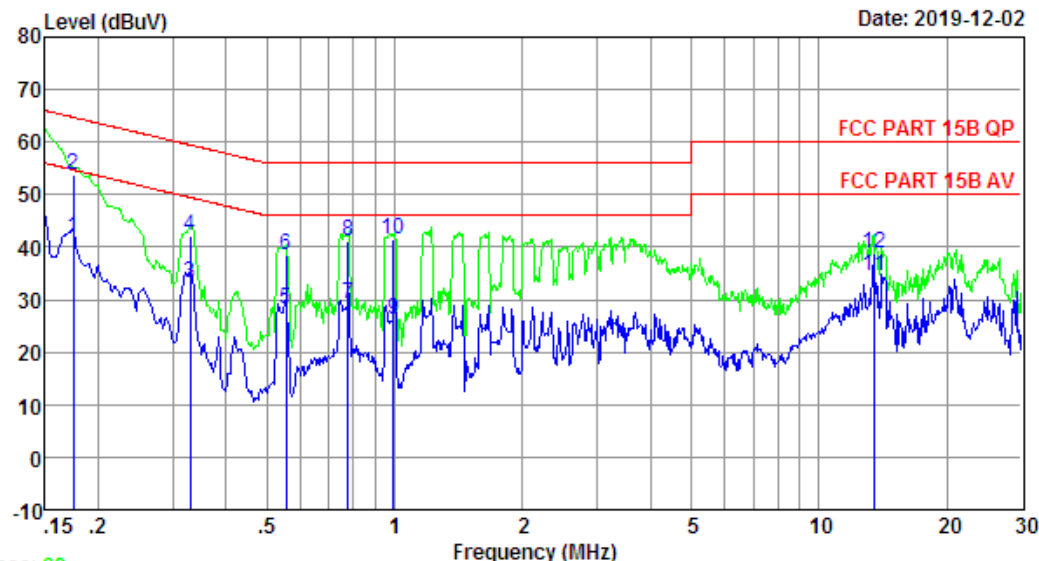

Trace: 63

Site no : 844 Shield Room Data no. : 64
 Env. / Ins. : Temp:23.5°C Humi:38% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : SHO
 EUT : LED TV
 Power : AC 240V/60Hz
 M/N : G65
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	9.65	0.04	31.99	41.68	54.72	13.04	Average
2	0.17	9.65	0.04	43.99	53.68	64.72	11.04	QP
3	0.33	9.67	0.05	23.57	33.29	49.44	16.15	Average
4	0.33	9.67	0.05	32.57	42.29	59.44	17.15	QP
5	0.56	9.70	0.05	18.59	28.34	46.00	17.66	Average
6	0.56	9.70	0.05	28.59	38.34	56.00	17.66	QP
7	0.78	9.73	0.05	19.30	29.08	46.00	16.92	Average
8	0.78	9.73	0.05	31.30	41.08	56.00	14.92	QP
9	0.99	9.76	0.06	16.54	26.36	46.00	19.64	Average
10	0.99	9.76	0.06	31.54	41.36	56.00	14.64	QP
11	13.48	10.03	0.08	24.55	34.66	50.00	15.34	Average
12	13.48	10.03	0.08	28.55	38.66	60.00	21.34	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 36

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (56)

Date: 2019-11-27

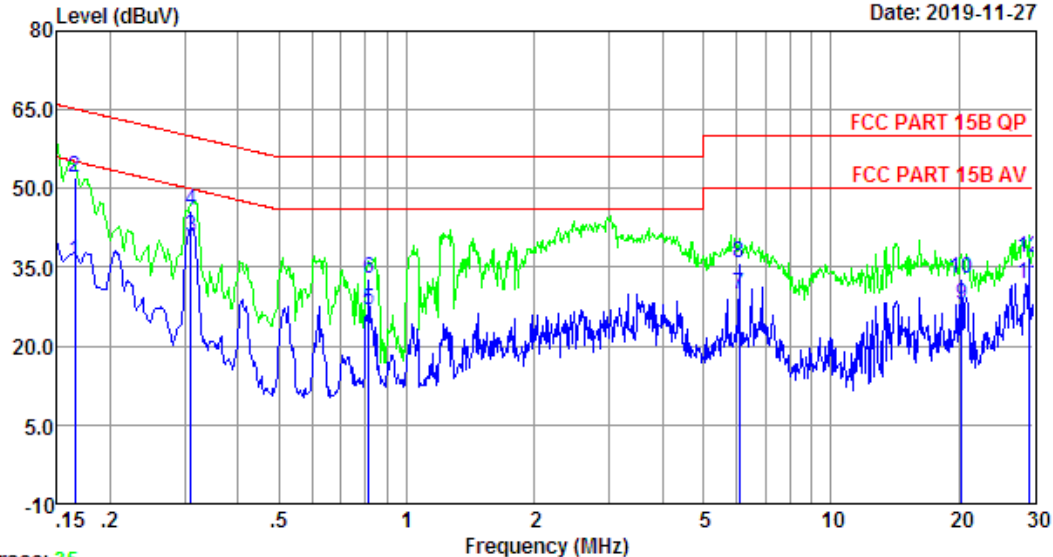

Trace: 35

Site no : 844 Shield Room Data no. : 36
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : SHO
 EUT : LED TV
 Power : AC 240V/60Hz
 M/N : A550CV-UMC
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	9.64	0.04	26.34	36.02	55.21	19.19	Average
2	0.17	9.64	0.04	42.34	52.02	65.21	13.19	QP
3	0.31	9.66	0.04	31.10	40.80	49.97	9.17	Average
4	0.31	9.66	0.04	36.10	45.80	59.97	14.17	QP
5	0.81	9.73	0.05	17.18	26.96	46.00	19.04	Average
6	0.81	9.73	0.05	23.17	32.95	56.00	23.05	QP
7	6.09	9.72	0.07	20.16	29.95	50.00	20.05	Average
8	6.09	9.72	0.07	26.15	35.94	60.00	24.06	QP
9	20.27	9.98	0.09	17.73	27.80	50.00	22.20	Average
10	20.27	9.98	0.09	22.73	32.80	60.00	27.20	QP
11	29.22	10.06	0.09	21.81	31.96	50.00	18.04	Average
12	29.22	10.06	0.09	26.80	36.95	60.00	23.05	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 34

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (56)

Date: 2019-11-27

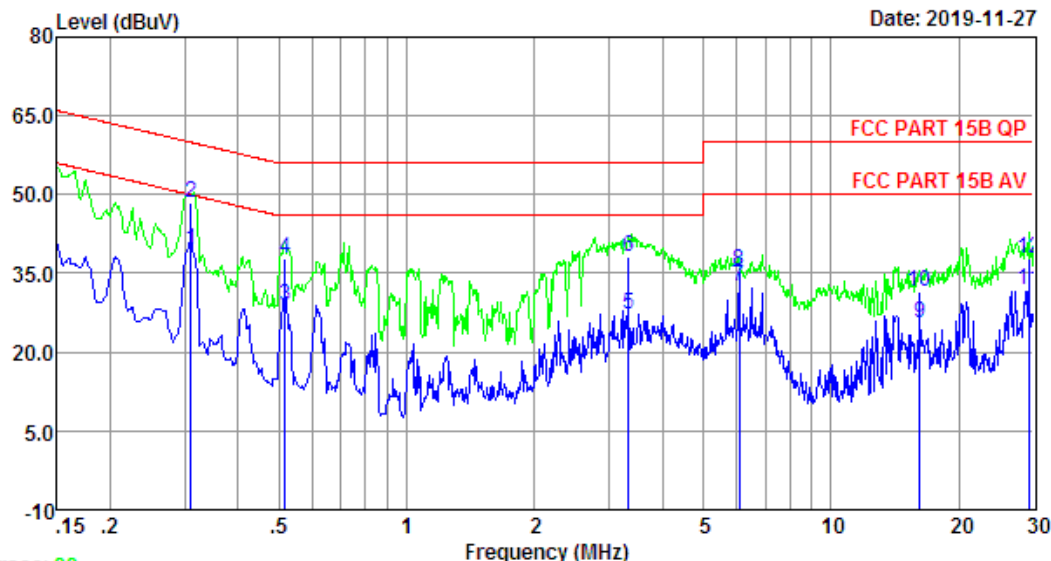

Trace: 33

Site no : 844 Shield Room Data no. : 34
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : SHO
 EUT : LED TV
 Power : AC 240V/60Hz
 M/N : A550CV-UMC
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.31	9.73	0.04	29.64	39.41	49.97	10.56	Average
2	0.31	9.73	0.04	38.63	48.40	59.97	11.57	QP
3	0.52	9.79	0.05	18.86	28.70	46.00	17.30	Average
4	0.52	9.79	0.05	27.85	37.69	56.00	18.31	QP
5	3.33	9.91	0.07	17.14	27.12	46.00	18.88	Average
6	3.33	9.91	0.07	28.14	38.12	56.00	17.88	QP
7	6.09	10.29	0.07	22.04	32.40	50.00	17.60	Average
8	6.09	10.29	0.07	25.03	35.39	60.00	24.61	QP
9	16.23	9.99	0.08	15.51	25.58	50.00	24.42	Average
10	16.23	9.99	0.08	21.51	31.58	60.00	28.42	QP
11	29.22	10.05	0.09	21.60	31.74	50.00	18.26	Average
12	29.22	10.05	0.09	27.60	37.74	60.00	22.26	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 40

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (56)

Date: 2019-11-27

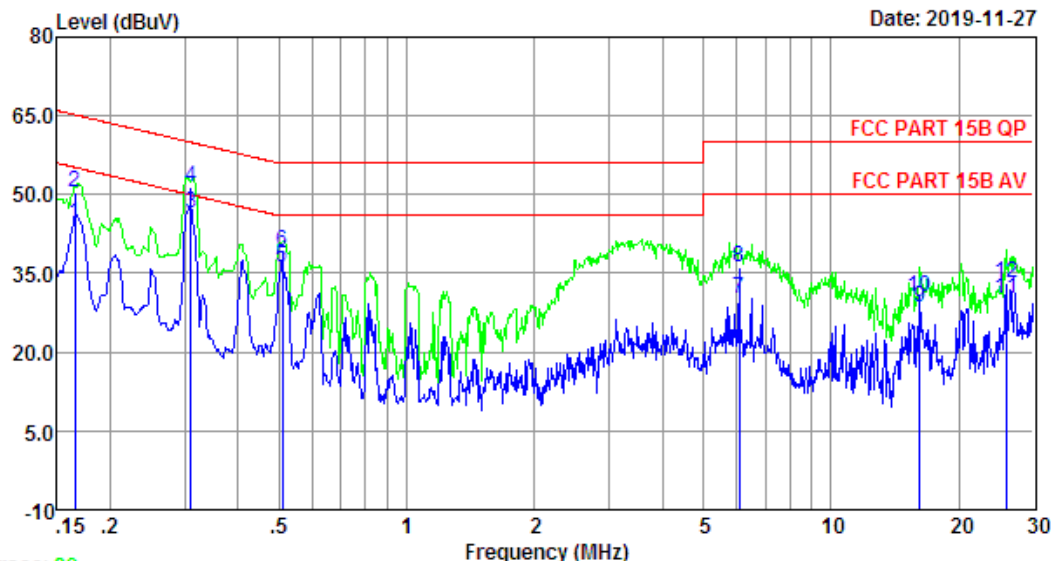

Trace: 39

Site no : 844 Shield Room Data no. : 40
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : SHO
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : A550CV-UMC
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	9.64	0.04	34.90	44.58	55.21	10.63	Average
2	0.17	9.64	0.04	40.90	50.58	65.21	14.63	QP
3	0.31	9.66	0.04	36.75	46.45	49.97	3.52	Average
4	0.31	9.66	0.04	41.75	51.45	59.97	8.52	QP
5	0.51	9.70	0.05	26.56	36.31	46.00	9.69	Average
6	0.51	9.70	0.05	29.56	39.31	56.00	16.69	QP
7	6.09	9.72	0.07	20.47	30.26	50.00	19.74	Average
8	6.09	9.72	0.07	26.46	36.25	60.00	23.75	QP
9	16.23	10.08	0.08	18.28	28.44	50.00	21.56	Average
10	16.23	10.08	0.08	20.27	30.43	60.00	29.57	QP
11	25.86	10.03	0.09	20.21	30.33	50.00	19.67	Average
12	25.86	10.03	0.09	23.20	33.32	60.00	26.68	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 38

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (56)

Date: 2019-11-27

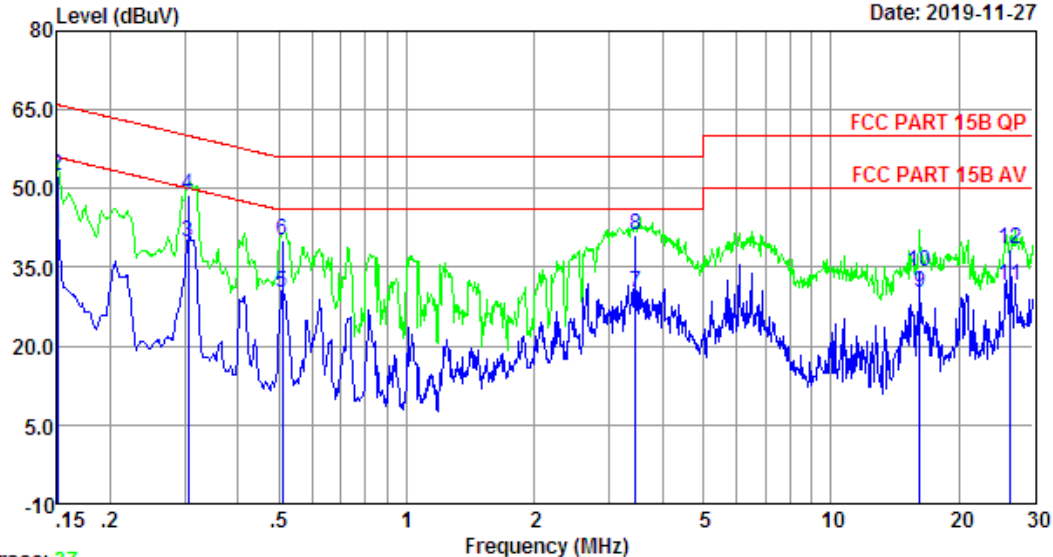

Trace: 37

Site no : 844 Shield Room Data no. : 38
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : SHO
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : A550CV-UMC
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.68	0.04	31.83	41.55	56.00	14.45	Average
2	0.15	9.68	0.04	42.83	52.55	66.00	13.45	QP
3	0.31	9.73	0.04	30.01	39.78	50.10	10.32	Average
4	0.31	9.73	0.04	39.00	48.77	60.10	11.33	QP
5	0.51	9.79	0.05	20.37	30.21	46.00	15.79	Average
6	0.51	9.79	0.05	30.37	40.21	56.00	15.79	QP
7	3.45	9.92	0.07	20.15	30.14	46.00	15.86	Average
8	3.45	9.92	0.07	31.14	41.13	56.00	14.87	QP
9	16.23	9.99	0.08	19.95	30.02	50.00	19.98	Average
10	16.23	9.99	0.08	23.95	34.02	60.00	25.98	QP
11	26.42	10.02	0.09	21.33	31.44	50.00	18.56	Average
12	26.42	10.02	0.09	28.33	38.44	60.00	21.56	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 90

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (120)

Date: 2019-12-04

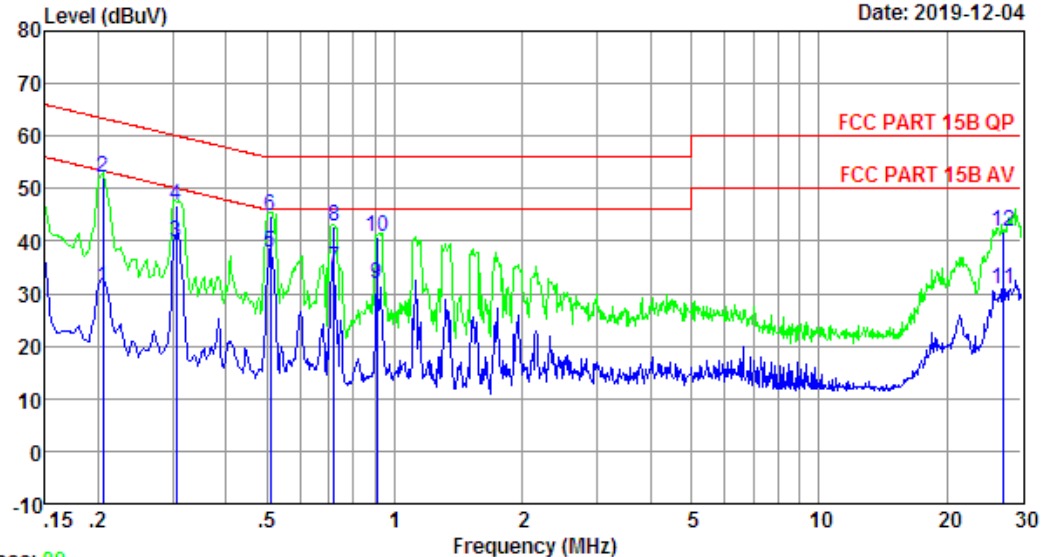

Trace: 89

Site no : 844 Shield Room Data no. : 90
Env. / Ins. : Temp:22.5°C Humi:23% Press:101.40kPa LINE Phase : LINE
Limit : FCC PART 15B QP
Engineer : SHO
EUT : LED TV
Power : AC 120V/60Hz
M/N : G50
Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.21	9.70	0.04	21.29	31.03	53.40	22.37	Average
2	0.21	9.70	0.04	42.28	52.02	63.40	11.38	QP
3	0.31	9.73	0.04	29.89	39.66	50.10	10.44	Average
4	0.31	9.73	0.04	36.88	46.65	60.10	13.45	QP
5	0.51	9.79	0.05	27.92	37.76	46.00	8.24	Average
6	0.51	9.79	0.05	34.92	44.76	56.00	11.24	QP
7	0.72	9.85	0.05	24.82	34.72	46.00	11.28	Average
8	0.72	9.85	0.05	32.81	42.71	56.00	13.29	QP
9	0.91	9.88	0.06	22.00	31.94	46.00	14.06	Average
10	0.91	9.88	0.06	31.00	40.94	56.00	15.06	QP
11	27.27	10.03	0.09	20.64	30.76	50.00	19.24	Average
12	27.27	10.03	0.09	31.63	41.75	60.00	18.25	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 92

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (120)

Date: 2019-12-04

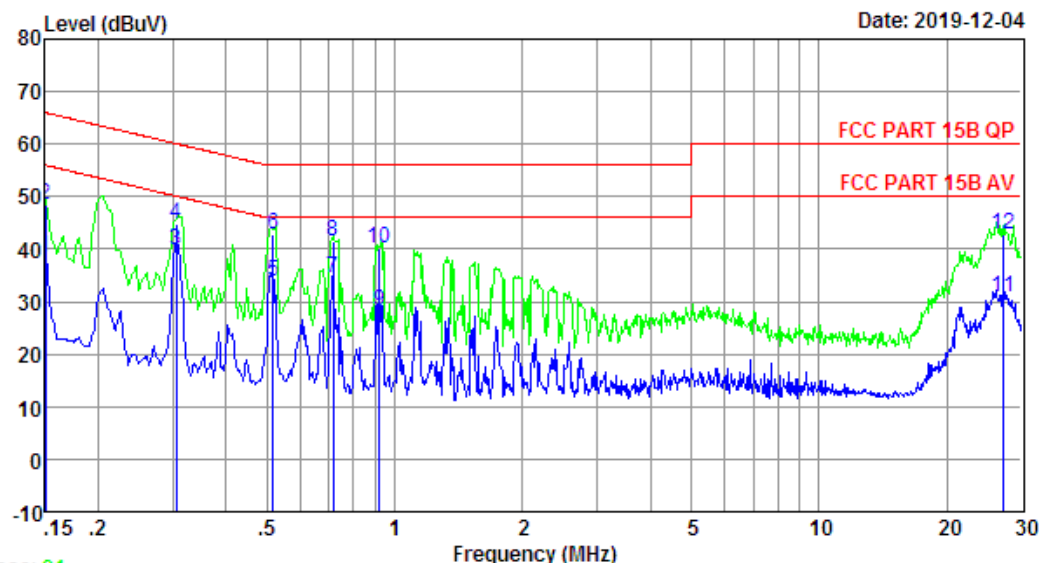

Trace: 91

Site no : 844 Shield Room Data no. : 92
 Env. / Ins. : Temp:22.5°C Humi:23% Press:101.40kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : SHO
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : G50
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.64	0.04	28.78	38.46	56.00	17.54	Average
2	0.15	9.64	0.04	38.77	48.45	66.00	17.55	QP
3	0.31	9.66	0.04	30.25	39.95	50.10	10.15	Average
4	0.31	9.66	0.04	35.24	44.94	60.10	15.16	QP
5	0.52	9.70	0.05	24.20	33.95	46.00	12.05	Average
6	0.52	9.70	0.05	33.20	42.95	56.00	13.05	QP
7	0.72	9.72	0.05	24.60	34.37	46.00	11.63	Average
8	0.72	9.72	0.05	31.60	41.37	56.00	14.63	QP
9	0.92	9.74	0.06	18.45	28.25	46.00	17.75	Average
10	0.92	9.74	0.06	30.45	40.25	56.00	15.75	QP
11	27.13	10.04	0.09	20.81	30.94	50.00	19.06	Average
12	27.13	10.04	0.09	32.80	42.93	60.00	17.07	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 94

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (120)

Date: 2019-11-28

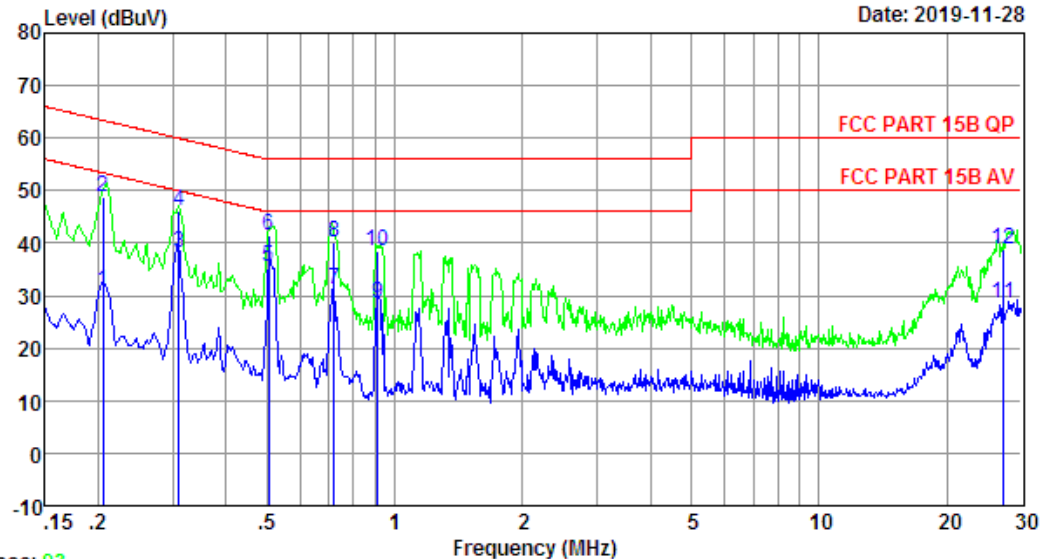

Trace: 93

Site no : 844 Shield Room Data no. : 94
 Env. / Ins. : Temp:24.2°C Humi:43% Press:101.40kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : SHO
 EUT : LED TV
 Power : AC 240V/60Hz
 M/N : G50
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.21	9.70	0.04	21.08	30.82	53.40	22.58	Average
2	0.21	9.70	0.04	39.08	48.82	63.40	14.58	QP
3	0.31	9.73	0.04	28.46	38.23	49.97	11.74	Average
4	0.31	9.73	0.04	36.45	46.22	59.97	13.75	QP
5	0.50	9.79	0.05	25.73	35.57	46.00	10.43	Average
6	0.50	9.79	0.05	31.73	41.57	56.00	14.43	QP
7	0.72	9.85	0.05	21.14	31.04	46.00	14.96	Average
8	0.72	9.85	0.05	30.13	40.03	56.00	15.97	QP
9	0.91	9.88	0.06	18.48	28.42	46.00	17.58	Average
10	0.91	9.88	0.06	28.48	38.42	56.00	17.58	QP
11	27.13	10.03	0.09	18.55	28.67	50.00	21.33	Average
12	27.13	10.03	0.09	28.55	38.67	60.00	21.33	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 96

File: \\Emc-ce-1\Test data\2019\RF\HKC\HKC.EM6 (120)

Date: 2019-11-28

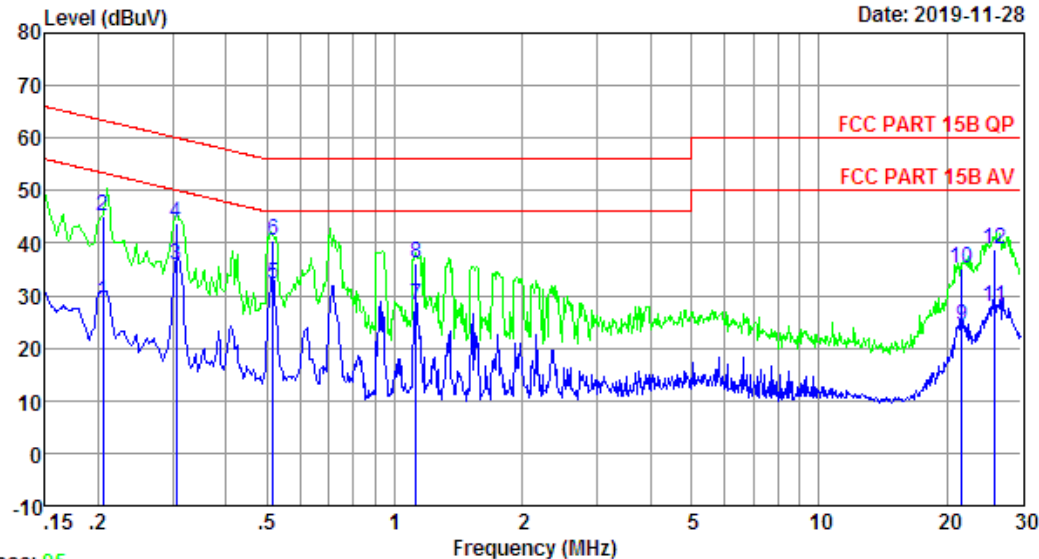

Trace: 95

Site no : 844 Shield Room Data no. : 96
 Env. / Ins. : Temp:24.2°C Humi:43% Press:101.40kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : SHO
 EUT : LED TV
 Power : AC 240V/60Hz
 M/N : G50
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.21	9.65	0.04	19.32	29.01	53.40	24.39	Average
2	0.21	9.65	0.04	35.31	45.00	63.40	18.40	QP
3	0.31	9.66	0.04	25.98	35.68	50.10	14.42	Average
4	0.31	9.66	0.04	33.97	43.67	60.10	16.43	QP
5	0.52	9.70	0.05	22.58	32.33	46.00	13.67	Average
6	0.52	9.70	0.05	30.57	40.32	56.00	15.68	QP
7	1.12	9.76	0.06	18.48	28.30	46.00	17.70	Average
8	1.12	9.76	0.06	26.47	36.29	56.00	19.71	QP
9	21.71	9.99	0.09	14.12	24.20	50.00	25.80	Average
10	21.71	9.99	0.09	25.12	35.20	60.00	24.80	QP
11	25.86	10.03	0.09	17.75	27.87	50.00	22.13	Average
12	25.86	10.03	0.09	28.74	38.86	60.00	21.14	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

10. ANTENNA REQUIREMENTS

10.1. Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

10.2. Test Result


The antennas used for this product is internal antenna ,so compliance with antenna requirements.
(Please refer to the EUT photo for details)

11. TEST SETUP PHOTO

Conducted Test
M/N: G65




M/N: AC550V-UMC

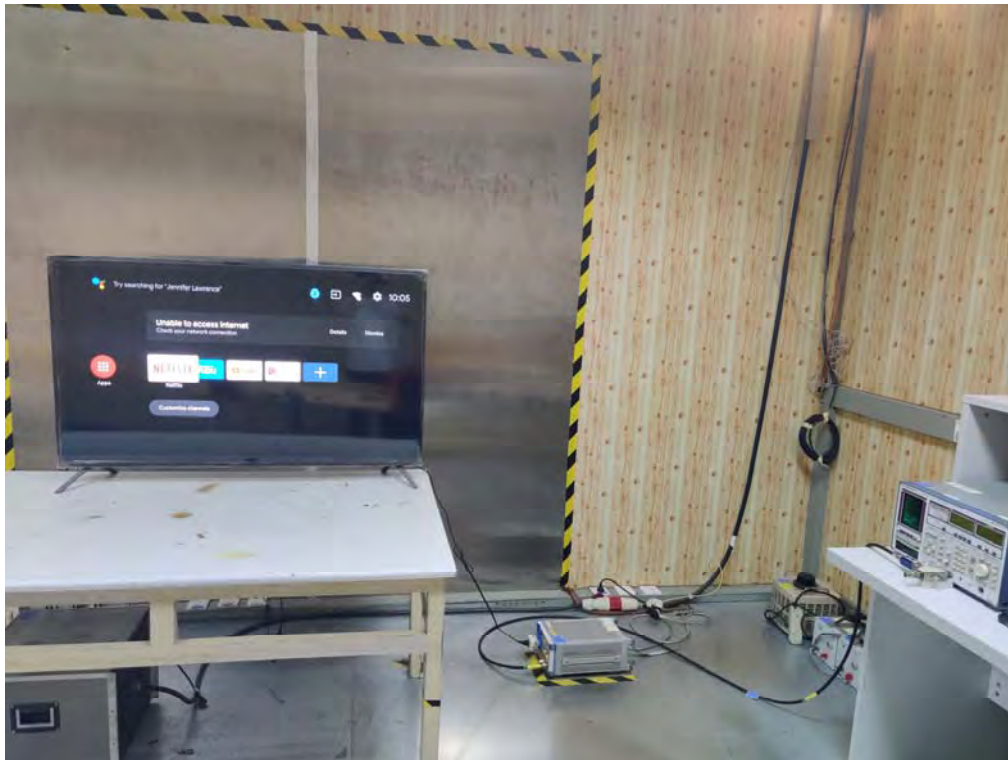


Radiated Test (Below 1GHz)


M/N: G65

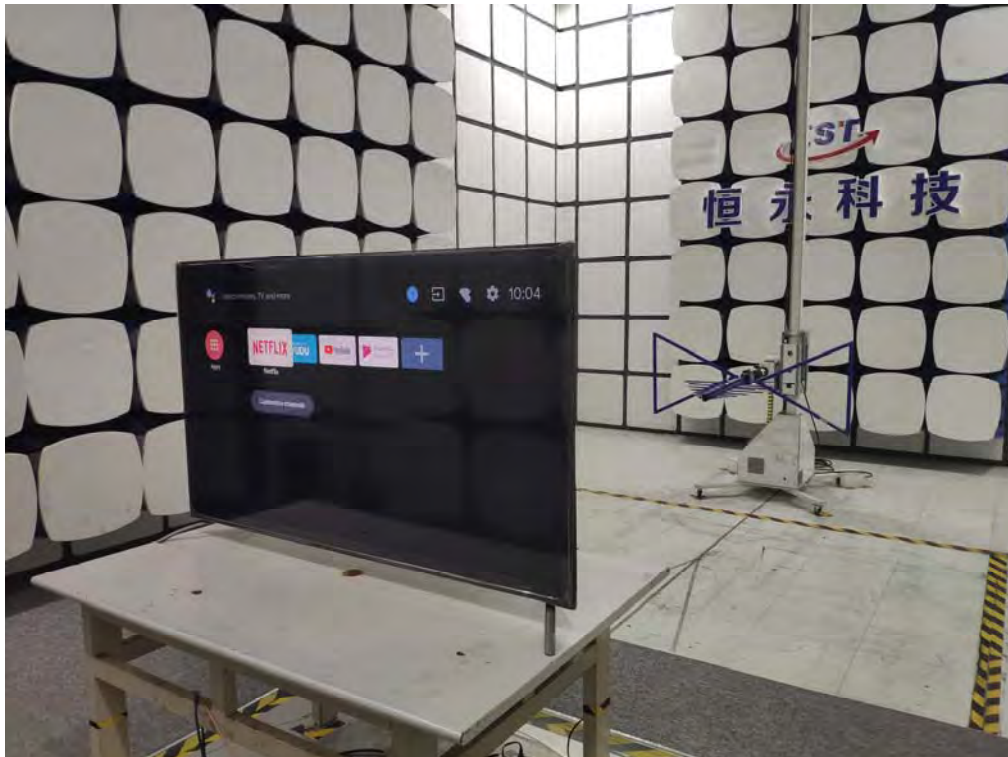


M/N: AC550V-UMC

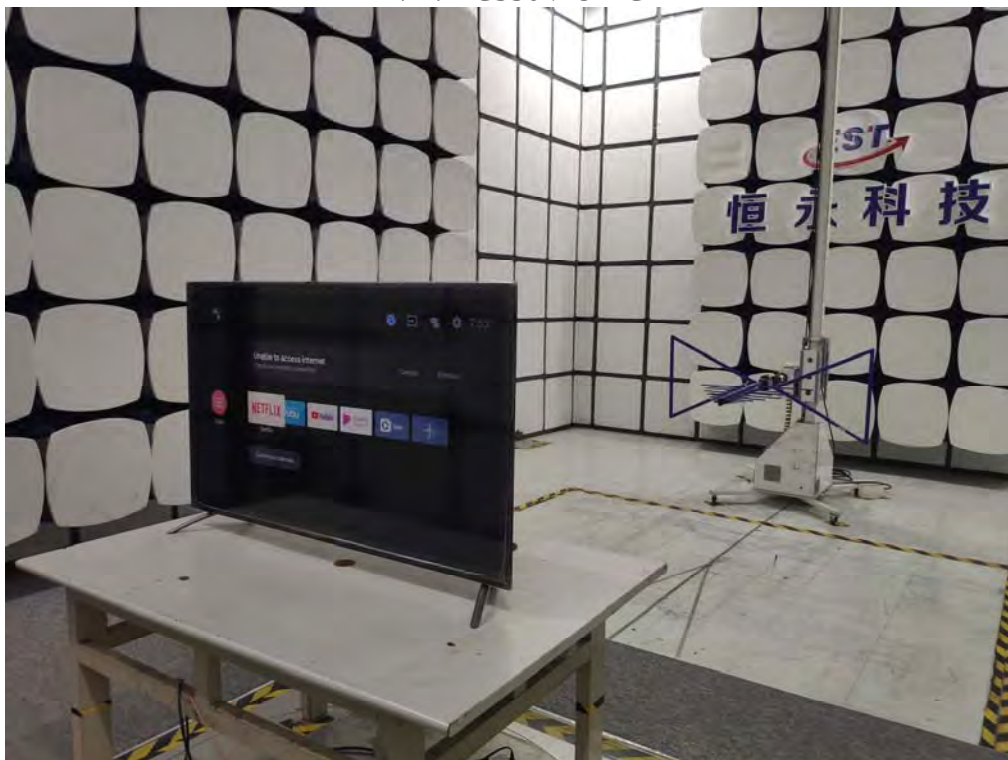

M/N: G50

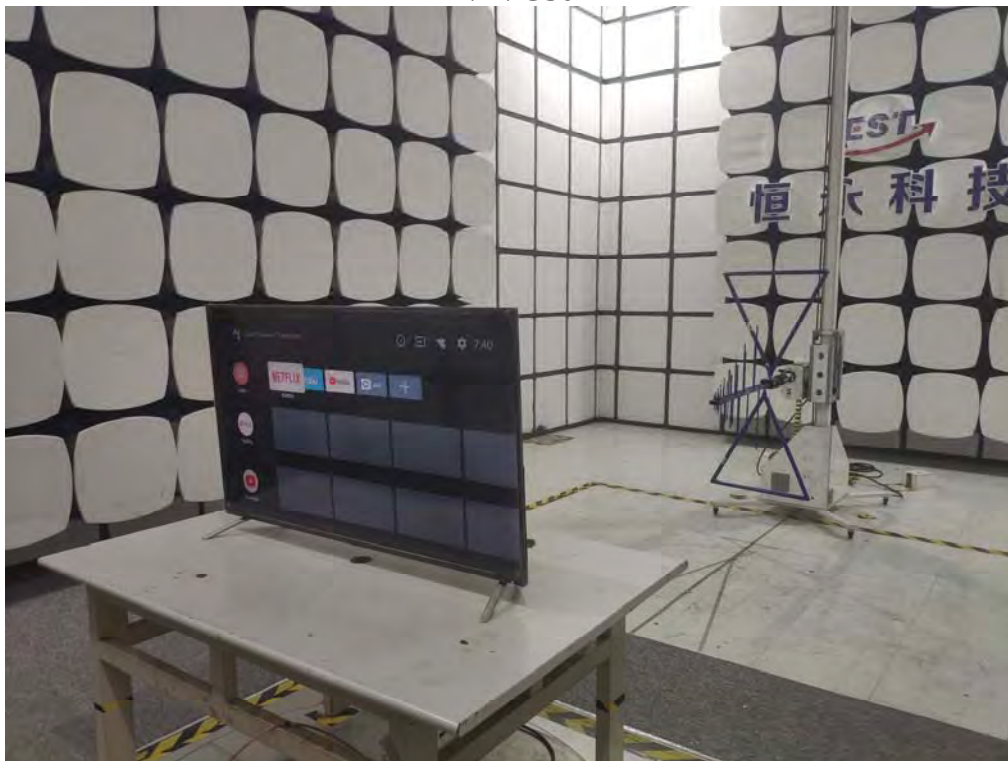

Radiated Test (Above 1GHz)

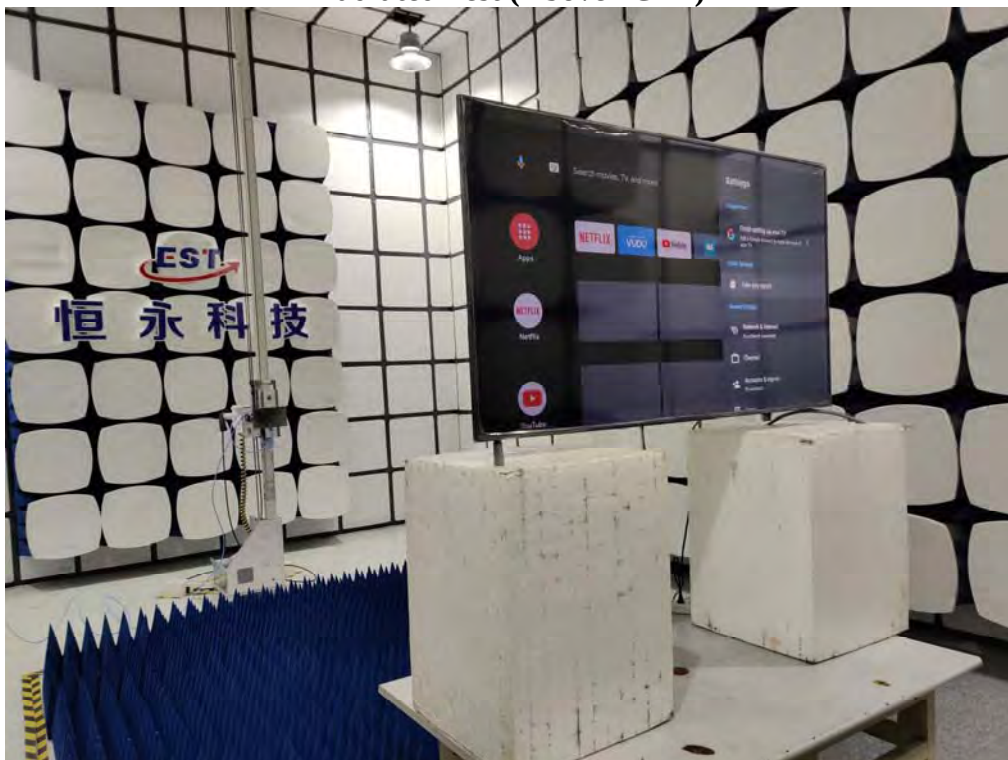

12. EUT PHOTO

M/N: G65
External Photos



External Photos



External Photos





External Photos





Internal Photos





Internal Photos

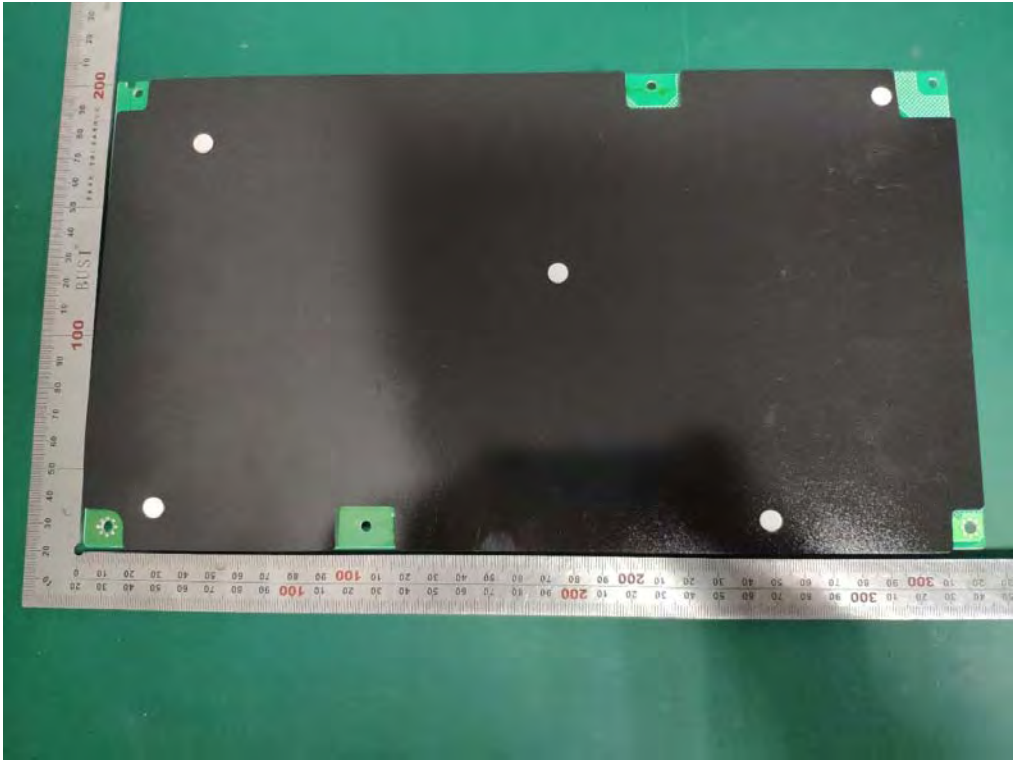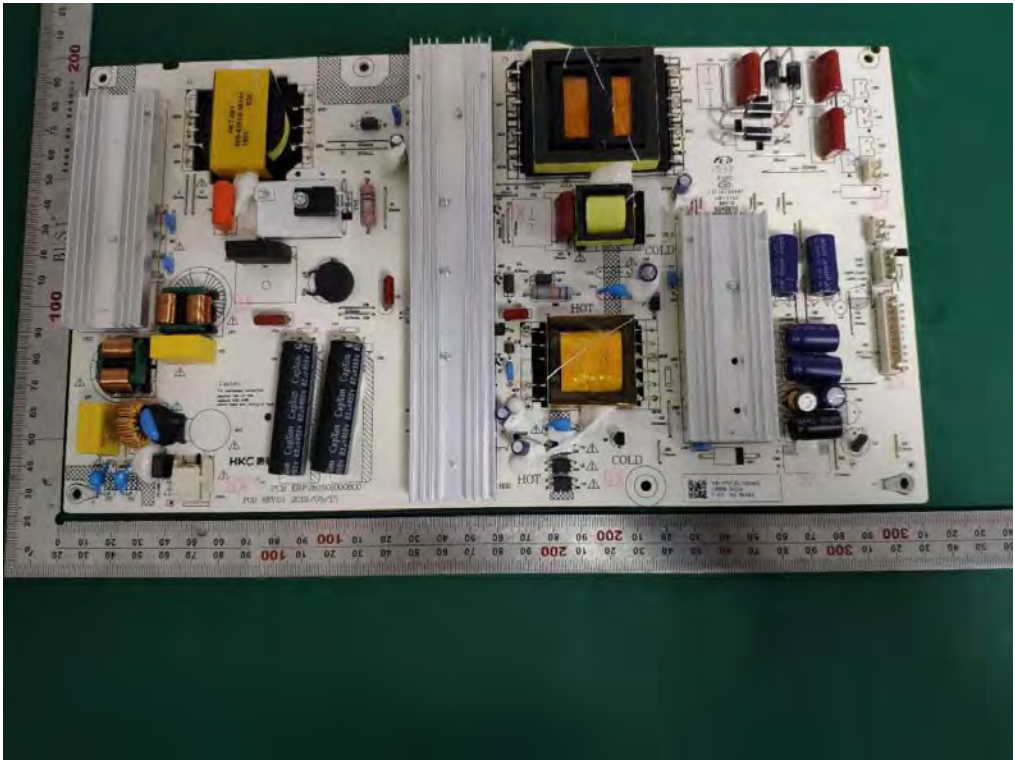


Internal Photos

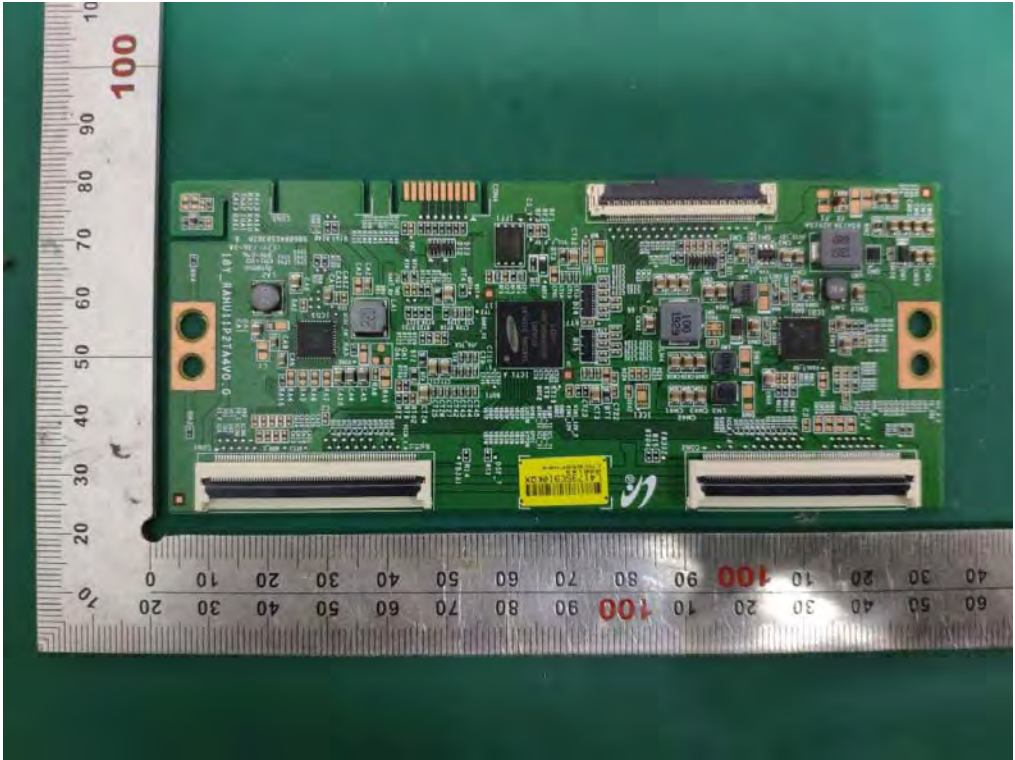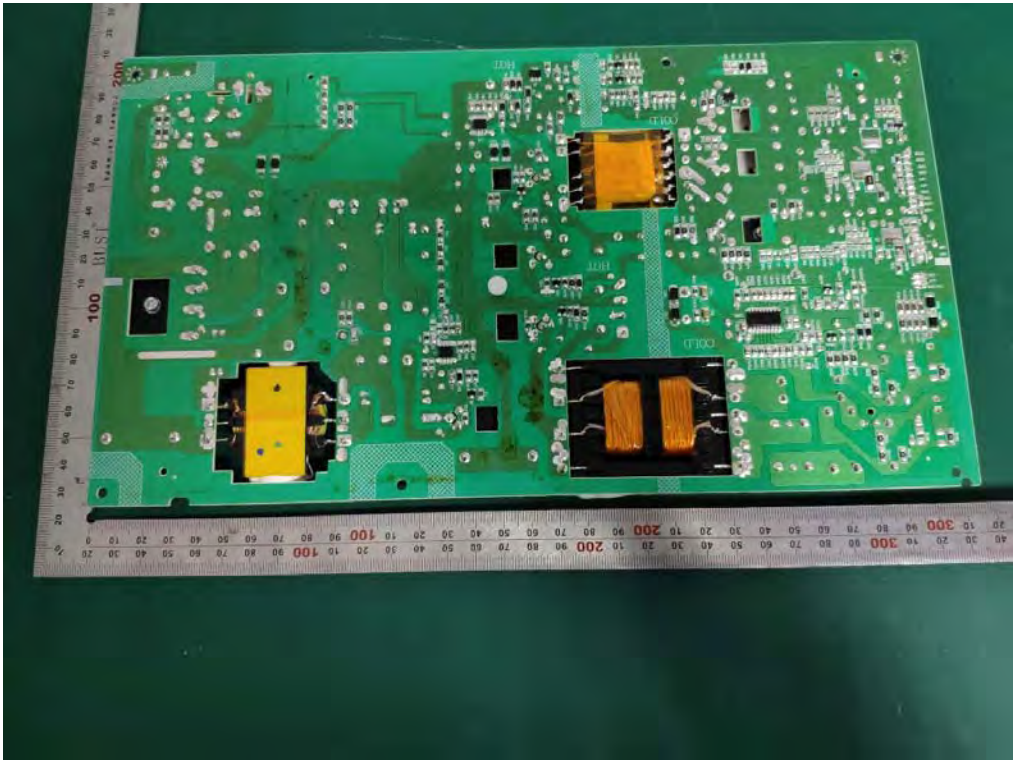


Internal Photos

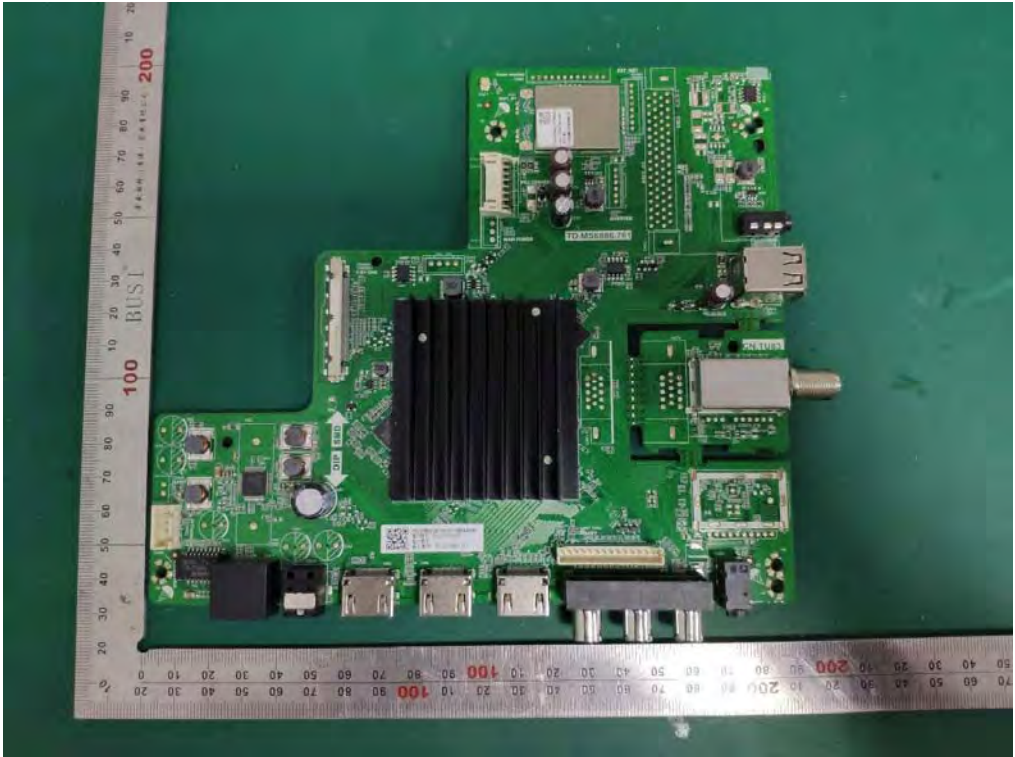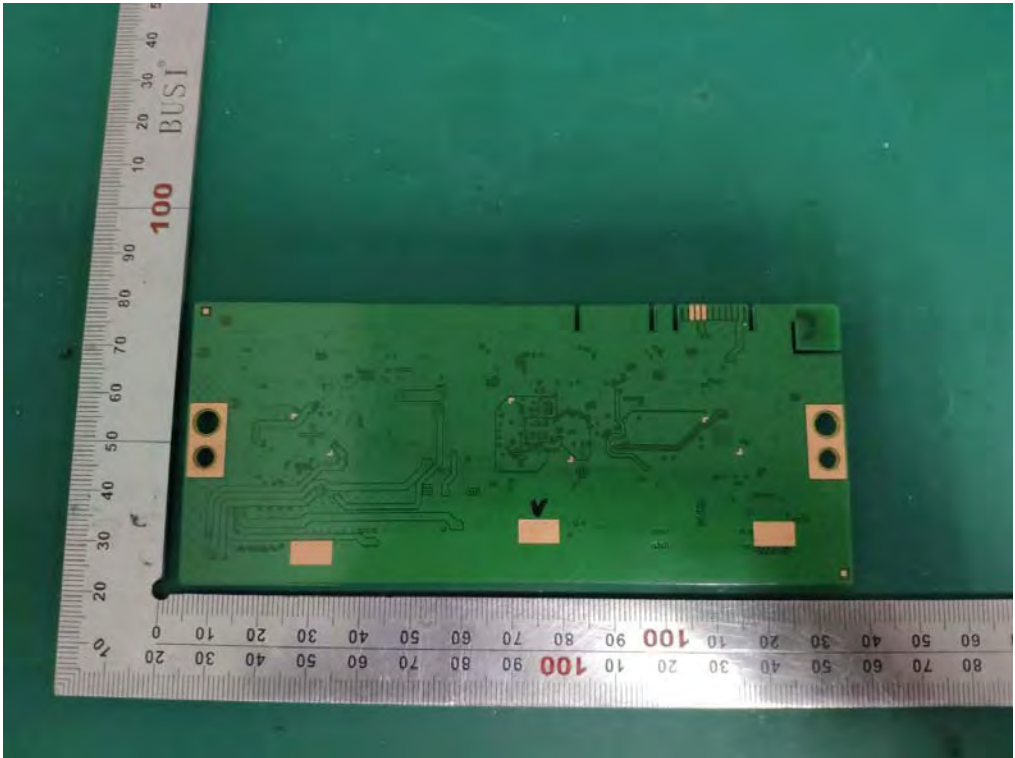

Internal Photos

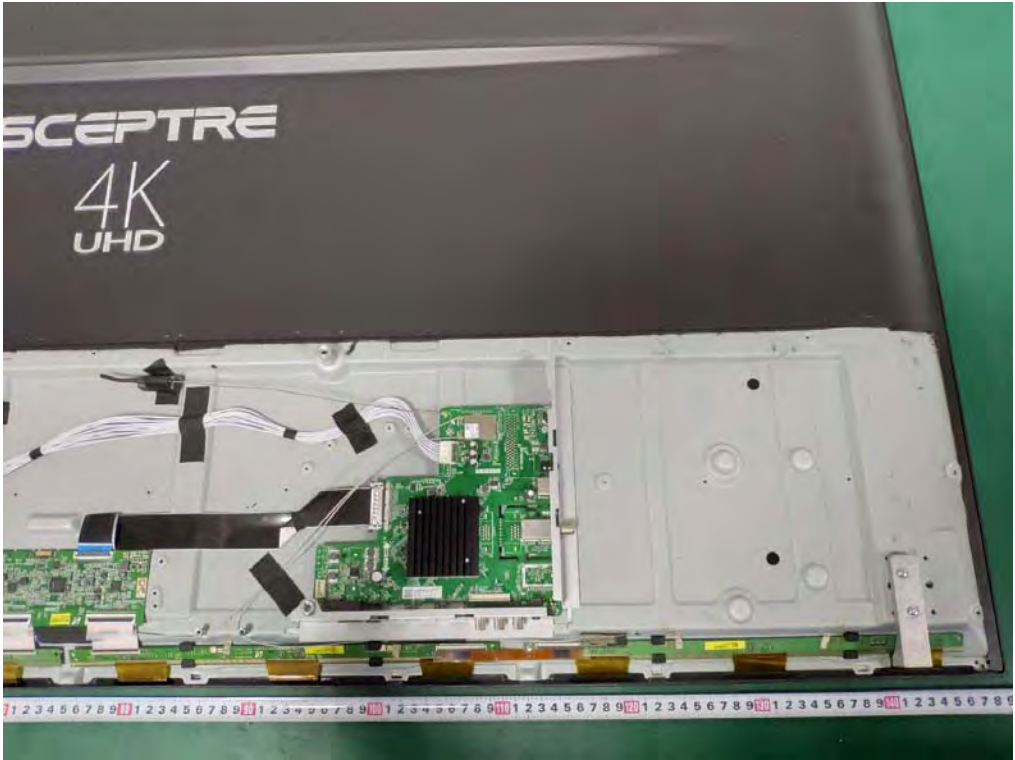

Internal Photos

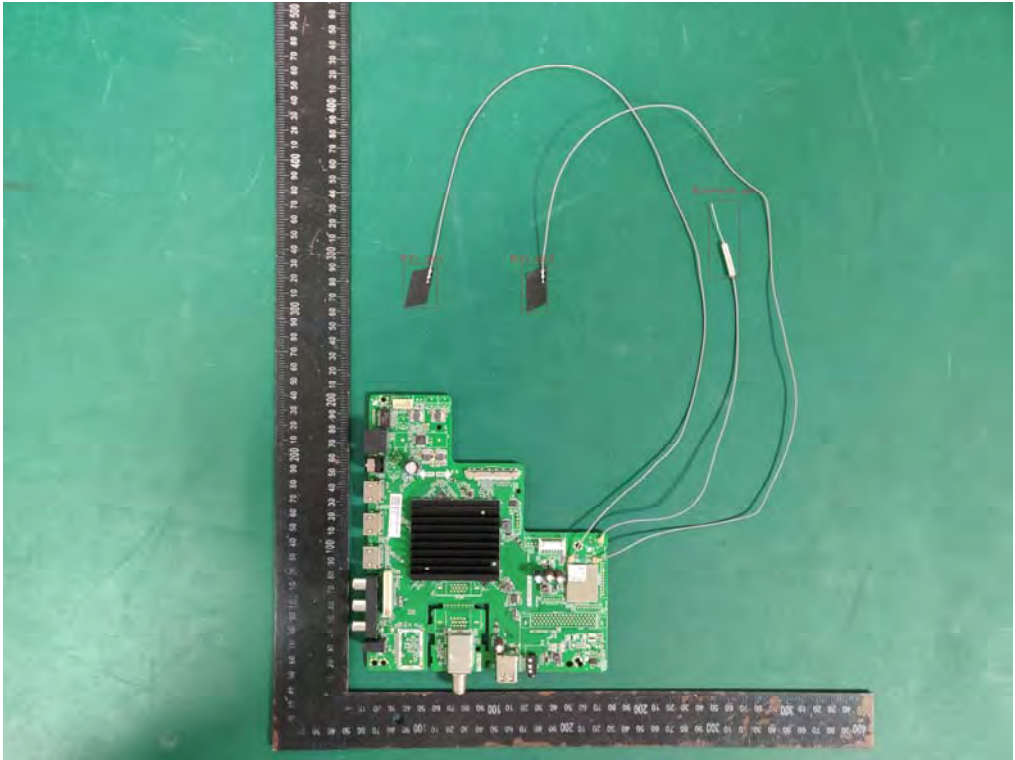

Internal Photos



M/N: A550CV-UMC
External Photos



External Photos



External Photos




External Photos





Internal Photos



Internal Photos

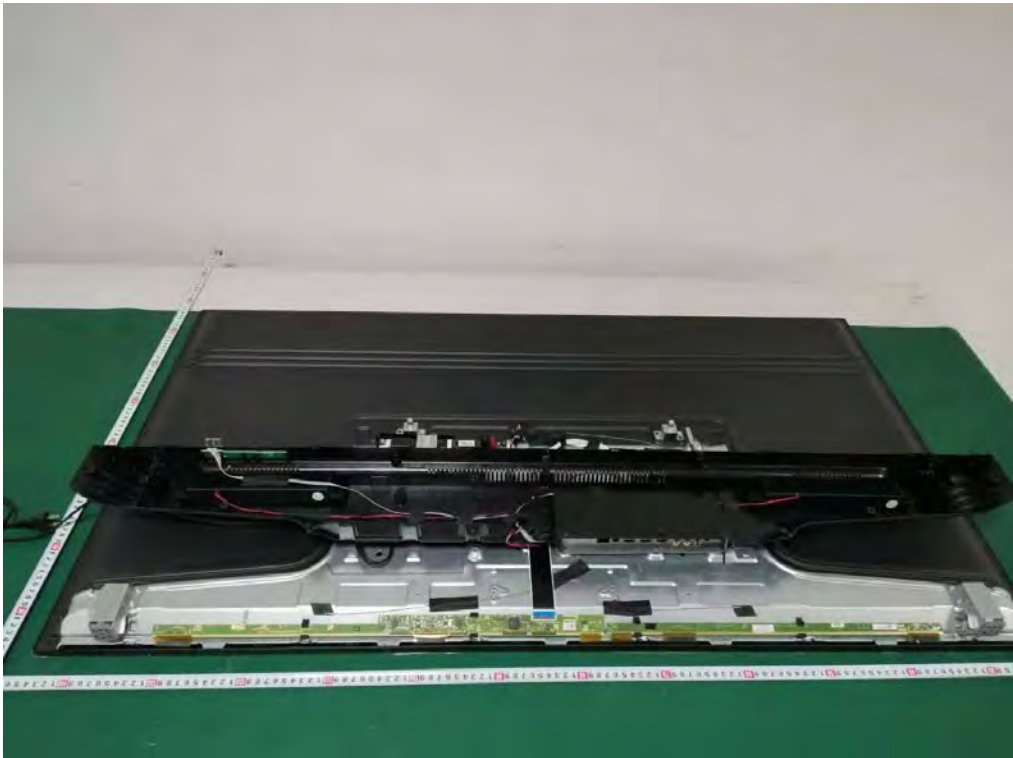


Internal Photos

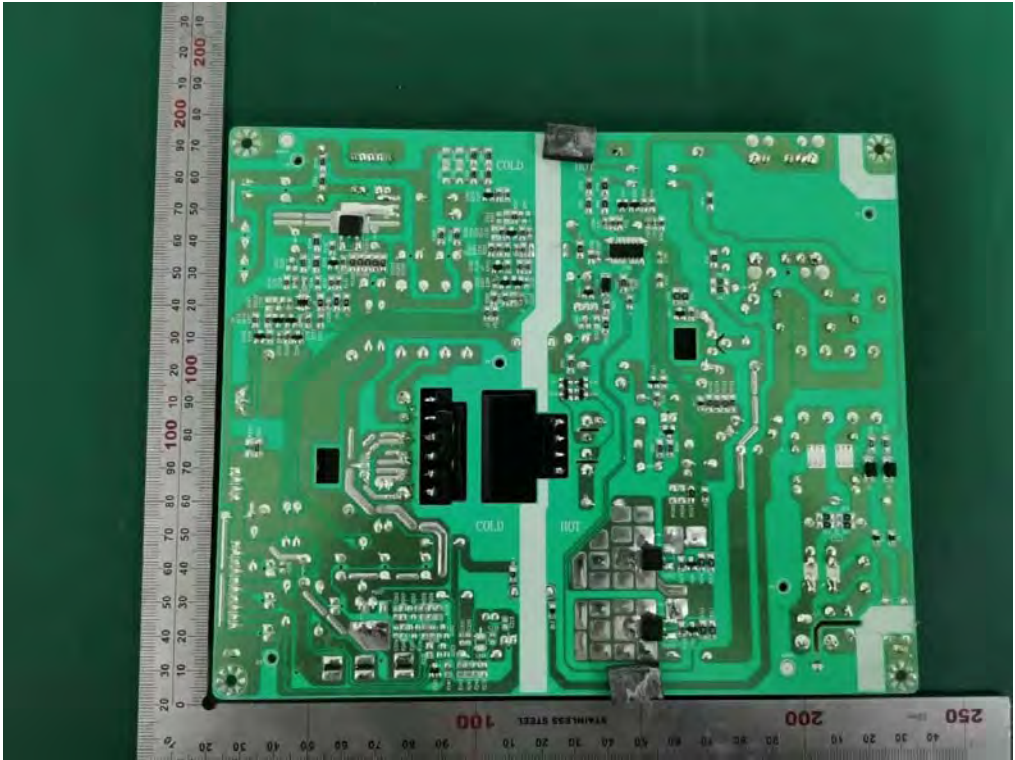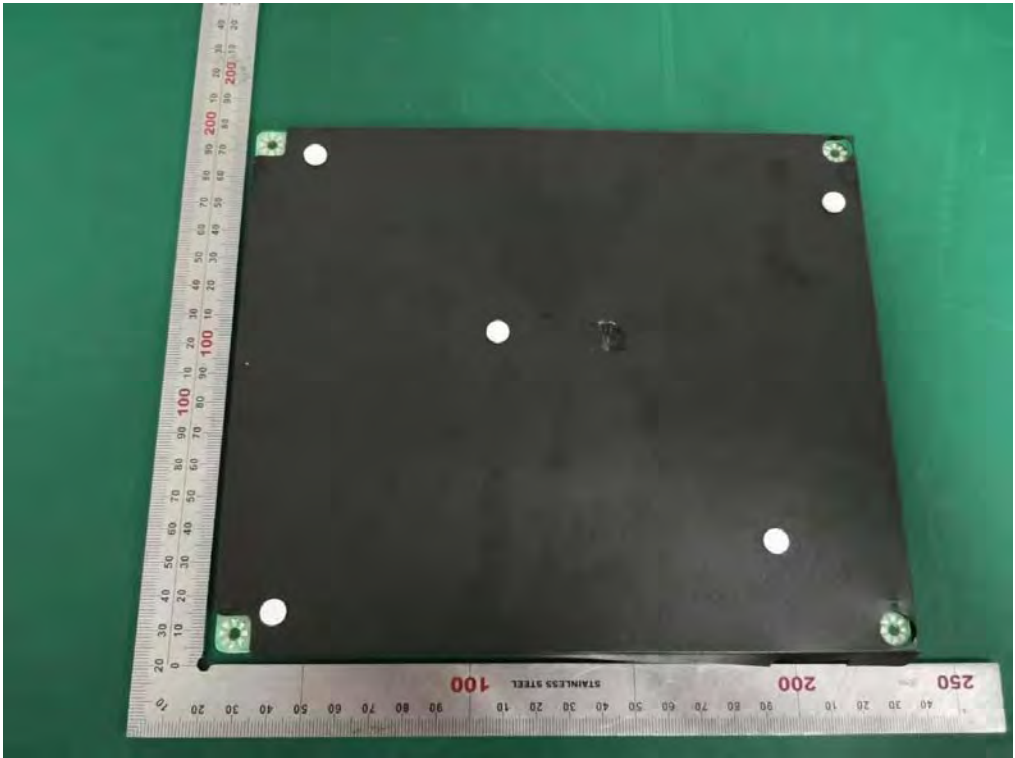

Internal Photos




Internal Photos

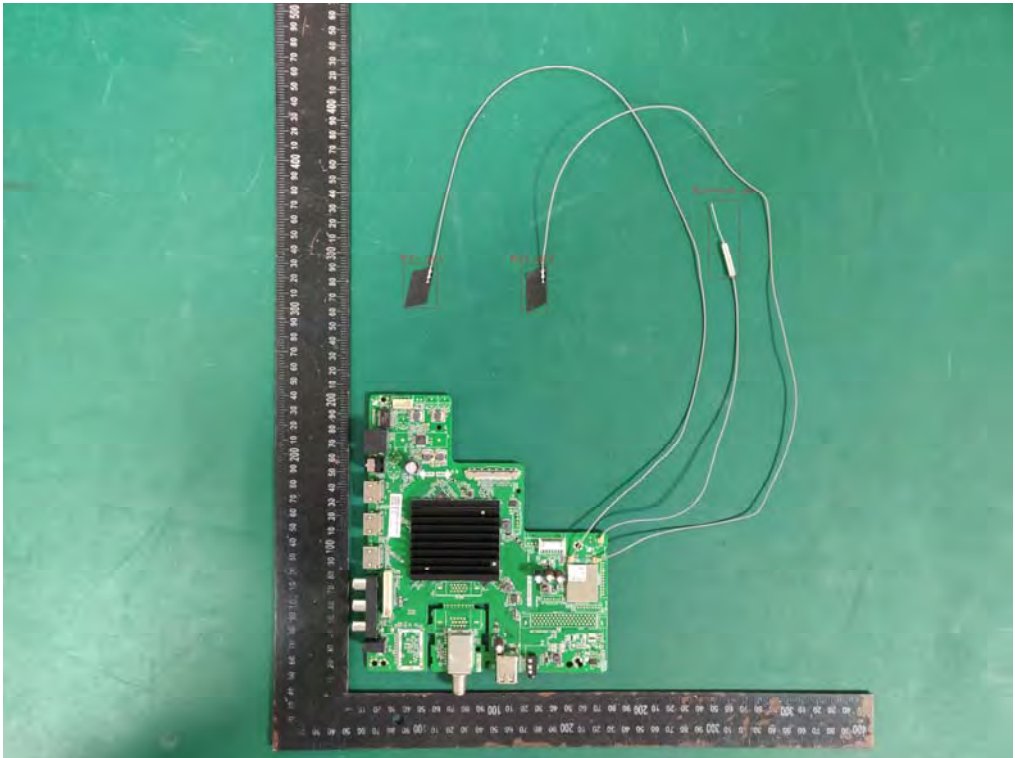

Internal Photos



M/N: G50
External Photos

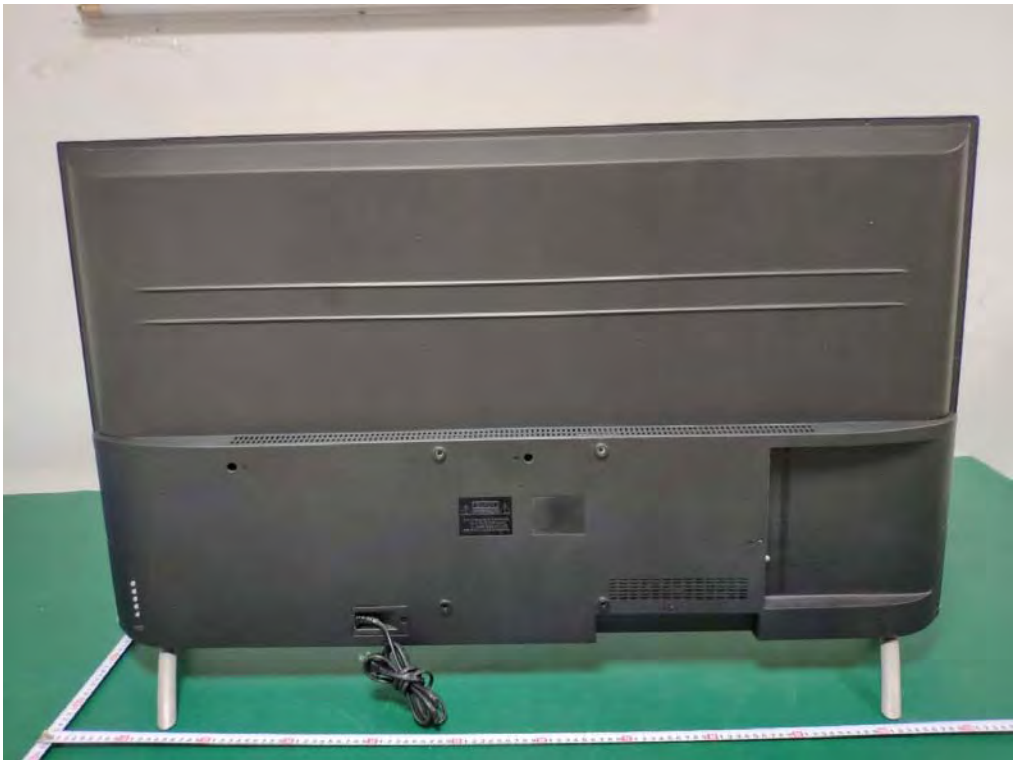

External Photos



External Photos




External Photos




Internal Photos





Internal Photos

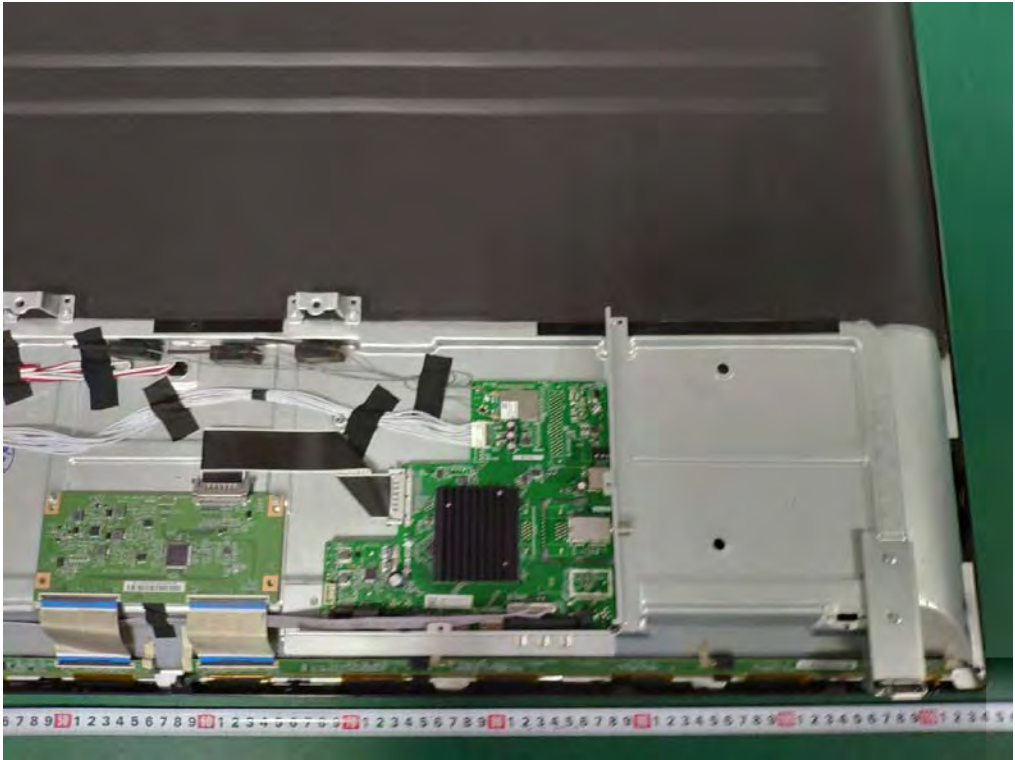



Internal Photos

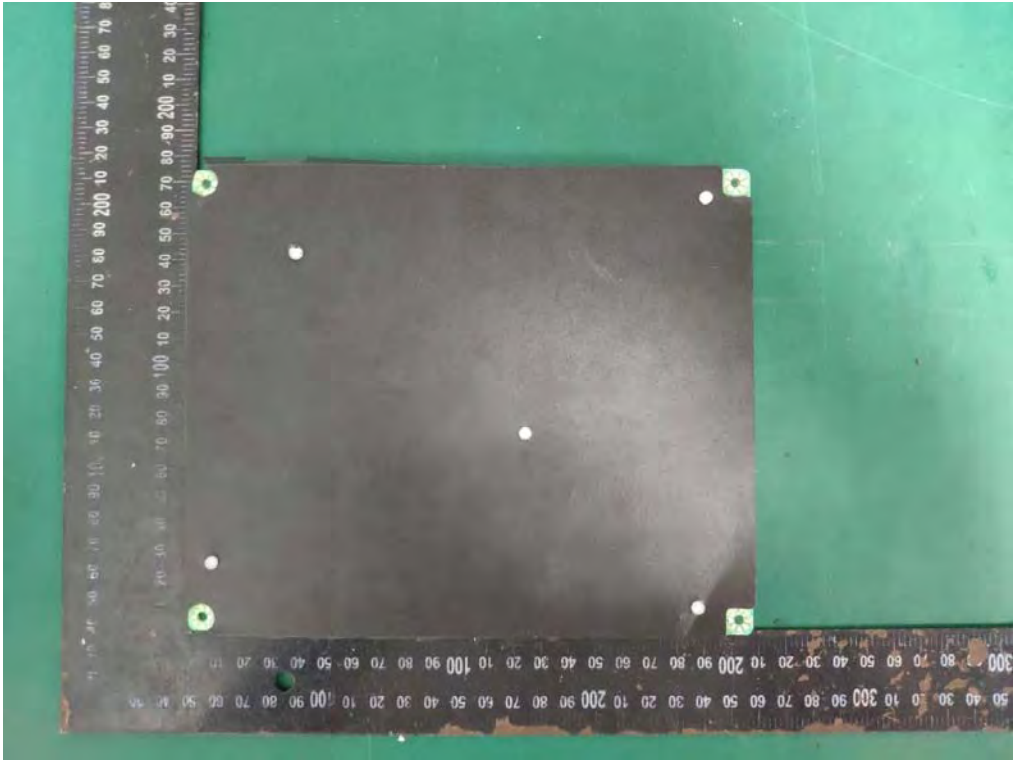


Internal Photos

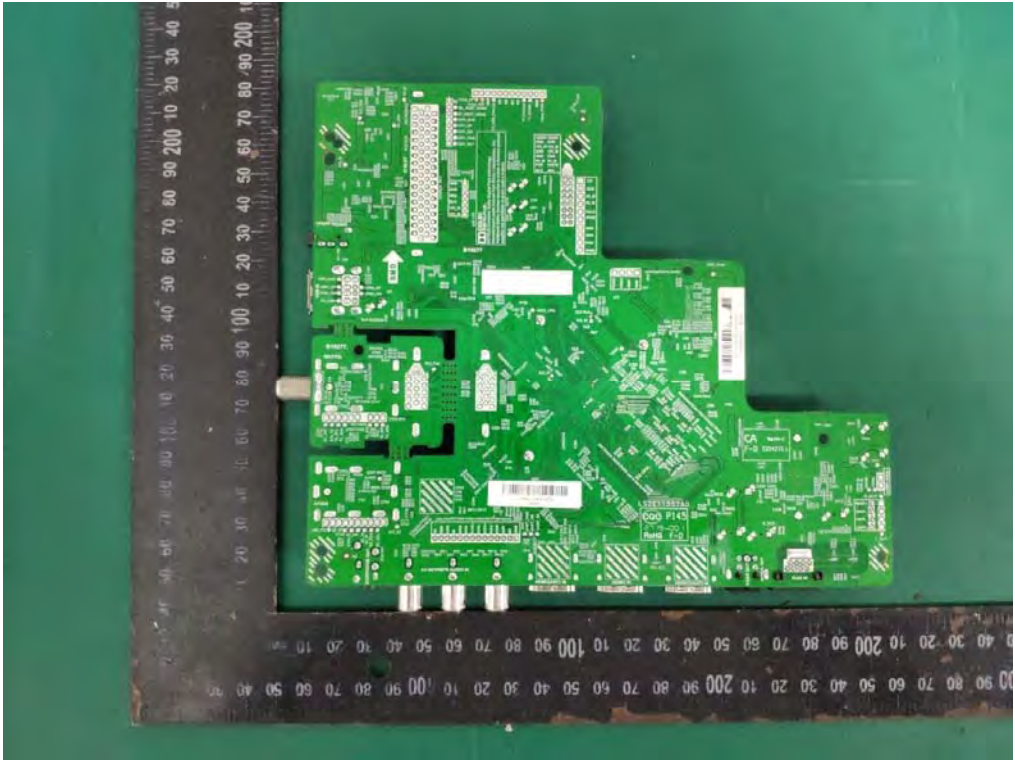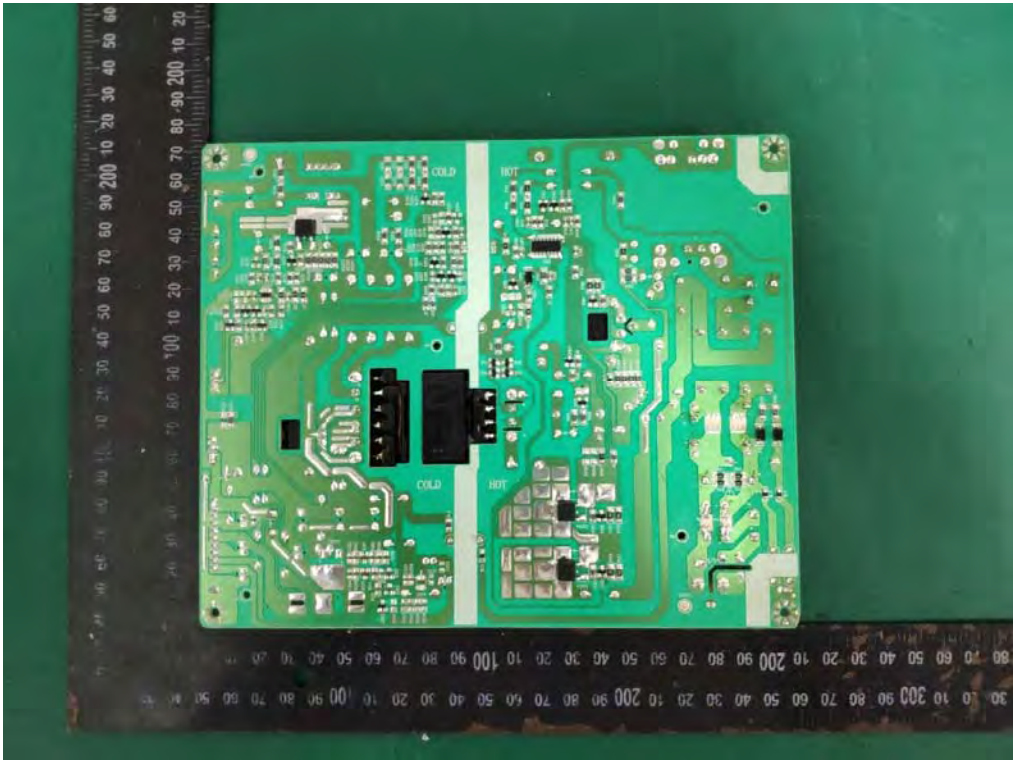

Internal Photos

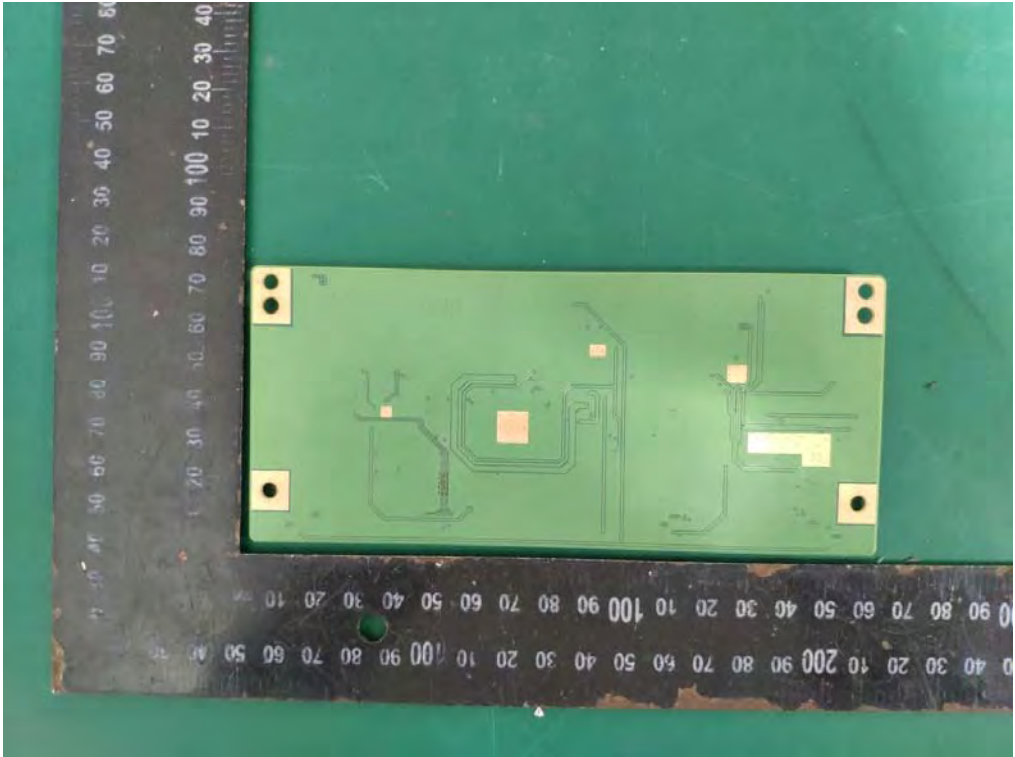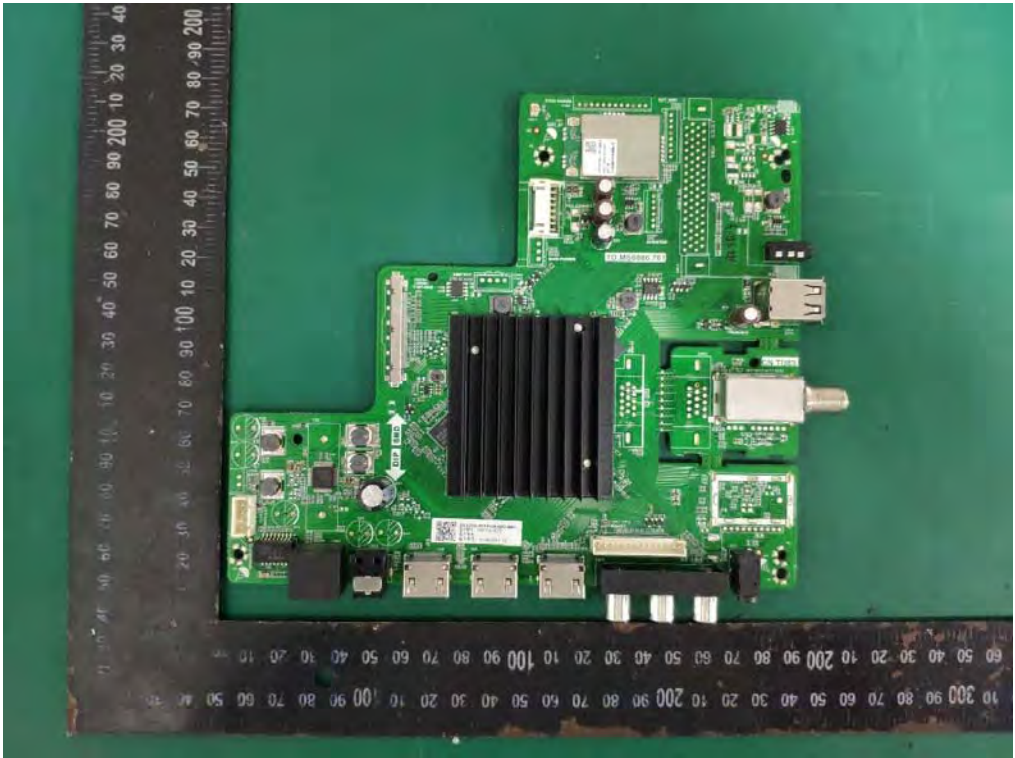

Internal Photos

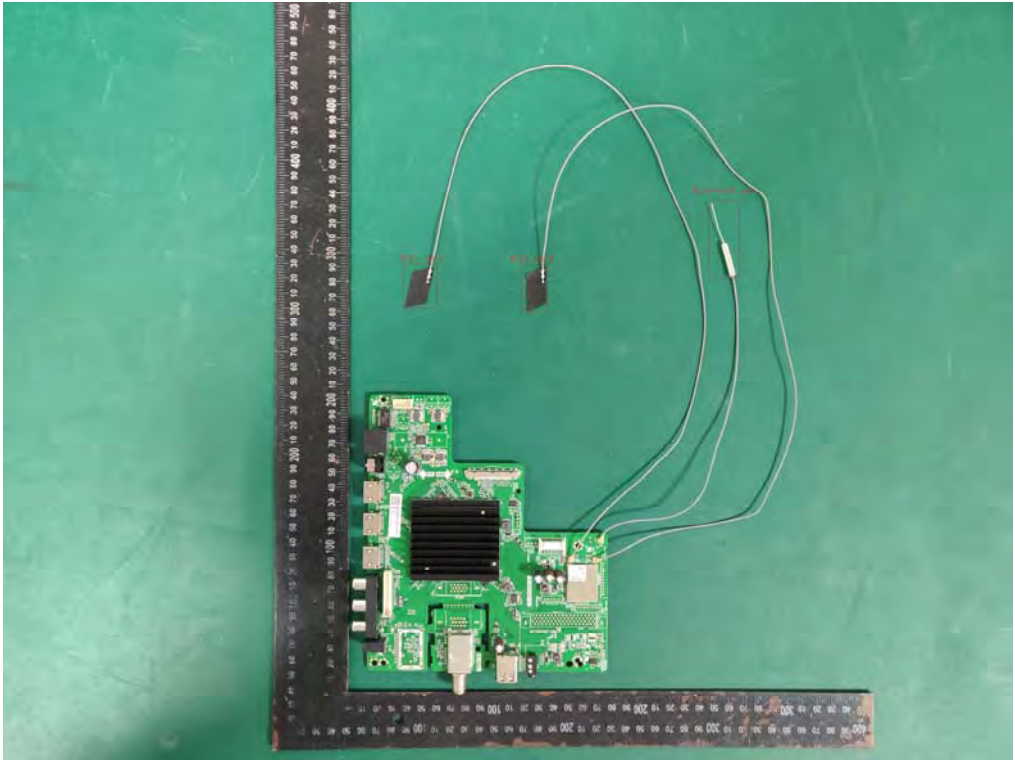

Internal Photos



End of Test Report