


Wireless Microphone Transmitter Model: X-001

How to use the lavalier microphone

1. Open the battery compartment by sliding up the cover.
2. Put the battery into the compartment with correct polarity, and close the cover.
3. Plug the Lavalier microphone part to the jack.
4. Switch on the power of the transmitter and when the LED shows, it is ready to work.
5. Be careful to adjust the main control of the transmitter, start from least volume and slowly turn it to a appropriate level to hear your voice clearly and with feed back. The system is ready to use.
6. After use, you have to take the battery out of the transmitter to avoid battery leaking to damage the transmitter.

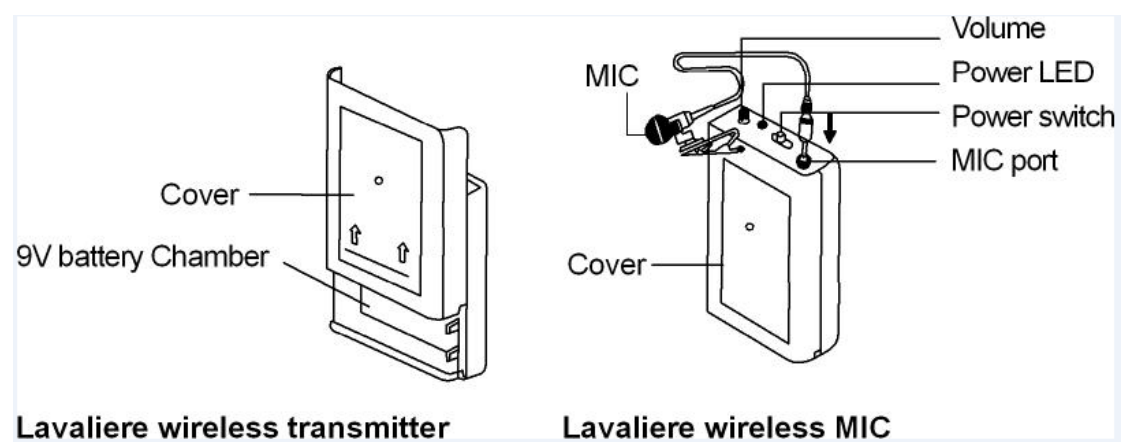

Technical data:

1. Frequency range: VHF 174.2-215.8MHz
2. Transmitter power without the audio input cable: 0.72 mW;
Transmitter power with the audio input cable: 7.59 mW.
3. Band width: no need for Fixed frequency
4. Modulation Mode: FM
5. Frequency span: no need for Fixed frequency

Warning Statement

§ 15.19 Labelling requirements.

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

§ 15.21 Information to user.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

*** RF warning for Portable device:**

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.