

FCC Part 15C

Measurement and Test Report

For

DDC TRADING INC

400 Sunny Isles Blvd # 1506 Sunny Isles Beach, FL 33160, Miami, USA.

FCC ID: 2AGF3L4

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>Mobile phone</u>
Tested Model:	<u>L4</u>
Report No.:	<u>STR17098288I-2</u>
Tested Date:	<u>2017-09-25 to 2017-10-17</u>
Issued Date:	<u>2017-10-17</u>
Tested By:	<u>Jason Su / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Jason Su
Silin Chen
Jandy So

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. RF EXPOSURE	8
3.1 STANDARD APPLICABLE	8
3.2 TEST RESULT	8
4. ANTENNA REQUIREMENT	9
4.1 STANDARD APPLICABLE	9
4.2 EVALUATION INFORMATION	9
5. POWER SPECTRAL DENSITY	10
5.1 STANDARD APPLICABLE	10
5.2 TEST PROCEDURE	10
5.3 ENVIRONMENTAL CONDITIONS	10
5.4 SUMMARY OF TEST RESULTS/PLOTS	11
6. 6DB BANDWIDTH	17
6.1 STANDARD APPLICABLE	17
6.2 TEST PROCEDURE	17
6.3 ENVIRONMENTAL CONDITIONS	17
6.4 SUMMARY OF TEST RESULTS/PLOTS	17
7. RF OUTPUT POWER	23
7.1 STANDARD APPLICABLE	23
7.2 TEST PROCEDURE	23
7.3 ENVIRONMENTAL CONDITIONS	23
7.4 SUMMARY OF TEST RESULTS/PLOTS	24
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	30
8.1 STANDARD APPLICABLE	30
8.2 TEST PROCEDURE	30
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	31
8.4 ENVIRONMENTAL CONDITIONS	32
8.5 SUMMARY OF TEST RESULTS/PLOTS	32
9. OUT OF BAND EMISSIONS	43
9.1 STANDARD APPLICABLE	43
9.2 TEST PROCEDURE	43
9.3 ENVIRONMENTAL CONDITIONS	44
9.4 SUMMARY OF TEST RESULTS/PLOTS	44
10. CONDUCTED EMISSIONS	59
10.1 TEST PROCEDURE	59
10.2 BASIC TEST SETUP BLOCK DIAGRAM	59
10.3 ENVIRONMENTAL CONDITIONS	59
10.4 TEST RECEIVER SETUP	60
10.5 SUMMARY OF TEST RESULTS/PLOTS	60
10.6 CONDUCTED EMISSIONS TEST DATA	60

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: DDC TRADING INC
Address of applicant: 400 Sunny Isles Blvd # 1506 Sunny Isles Beach, FL 33160, Miami, USA.

Manufacturer: DDC TRADING INC
Address of manufacturer: 400 Sunny Isles Blvd # 1506 Sunny Isles Beach, FL 33160, Miami, USA.

General Description of EUT:	
Product Name:	Mobile phone
Brand Name:	DDC
Model No.:	L4
Software version:	5110SD_D4001C-A.A1.170724.AD60.V00.WVGA.ME44.B125.TST.EN
Hardware version:	5110SD_MMI_V00
Rated Voltage:	DC 3.7V Li-ion Battery
Battery:	1300mAh
Power Adapter:	Model: HJ-0501000B3-AR Input:AC100V-240V, 50/60Hz, Output:DC5V,1A
Note: The test data is gathered from a production sample provided by the manufacturer.	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz
RF Output Power:	11.86dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Type of Antenna:	Integral
Antenna Gain:	-5dBi

1.2 Test Standards

The following report is prepared on behalf of the DDC TRADING INC in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 v04 for digital transmission systems shall be performed also.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

FCC – Registration No.: 260439

Centre Testing International Group Co., Ltd Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN1164, and Test Firm Registration Number is 260439.

Note: The Radiation Emission Above 18GHz is test by Centre Testing International Group Co., Ltd And the other test is by Shenzhen SEM Test Technology Co., Ltd.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.		

Accessories Equipment List and Details			
Description	Manufacturer	Model No.	Serial Number
/	/	/	/
Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.8	Shielded	Without Core
Earphone	0.9	Unshielded	Without Core

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

Shenzhen SEM.Test Technology Co., Ltd.

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2017-06-12	2018-06-11
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2017-06-12	2018-06-11
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2017-06-12	2018-06-11
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2017-06-12	2018-06-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2017-06-12	2018-06-11
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2018-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2018-06-07
SEMT-1121	Horn Antenna	Schwarz beck	BBHA 9170	BBHA9170582	2017-06-08	2018-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2018-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2017-06-12	2018-06-11
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2017-06-12	2018-06-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2017-06-12	2018-06-11

Centre Testing International Group Co., Ltd

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
N/A	Pre-amplifier	Direction Systems Inc.	PAP-1840-60	N/A	2017-07-09	2018-07-08
N/A	Spectrum Analyzer	R&S	ESIB40	10116	2017-07-09	2018-07-08
N/A	DRG Horn Antenna	DRG Horn Antenna	SAS-574	374	2017-07-09	2018-07-08

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 v04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-11.15	8
	2437	-11.30	8
	2462	-10.70	8
802.11g	2412	-21.76	8
	2437	-21.73	8
	2462	-21.72	8
802.11n HT20	2412	-23.66	8
	2437	-23.29	8
	2462	-22.93	8

Please refer to the following test plots:


802.11b-Low Channel

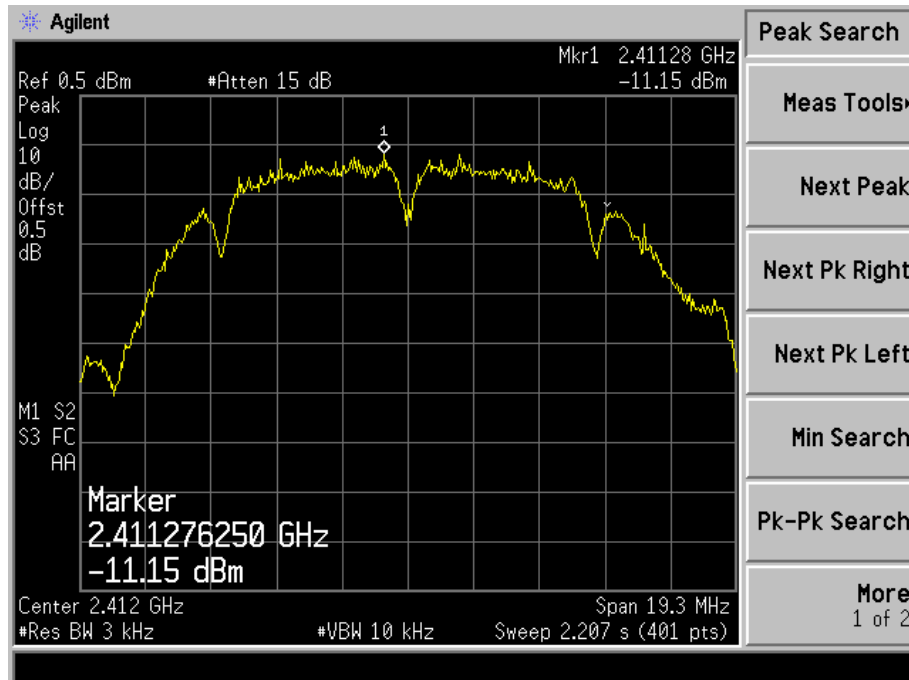


802.11b-Middle Channel

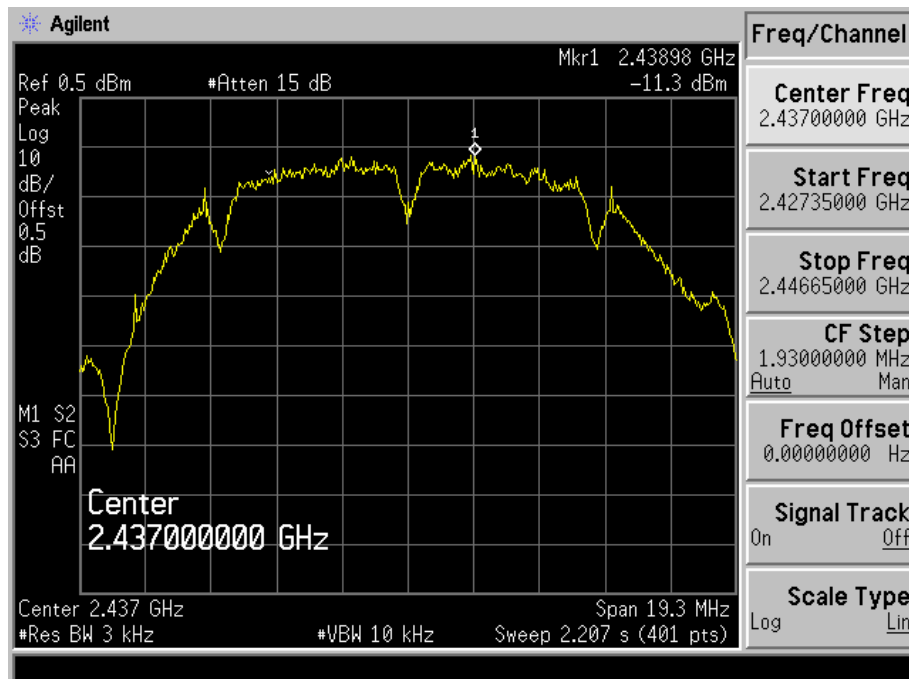


802.11b-High Channel

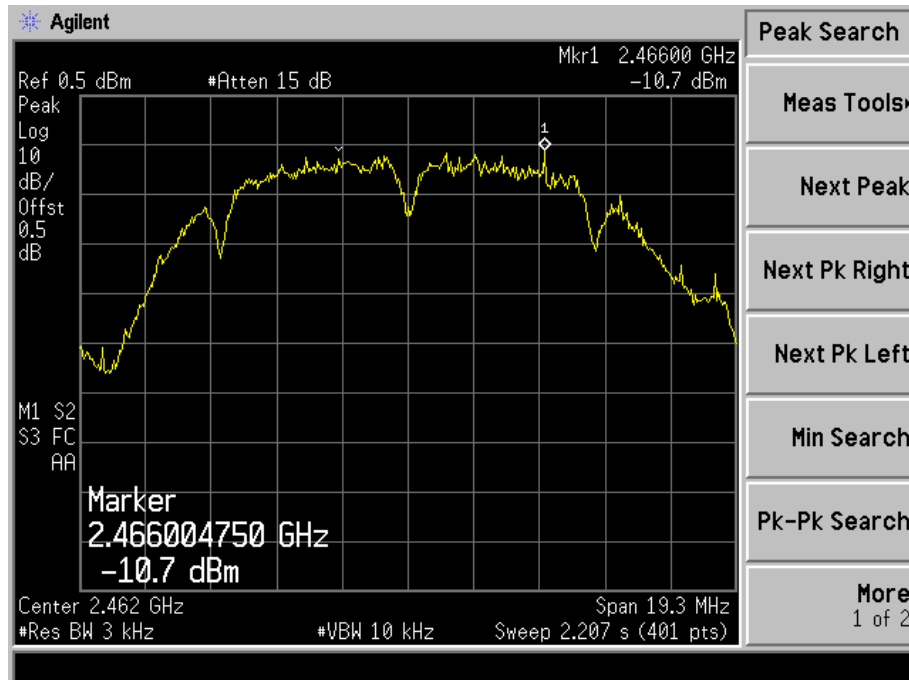


802.11g-Low Channel

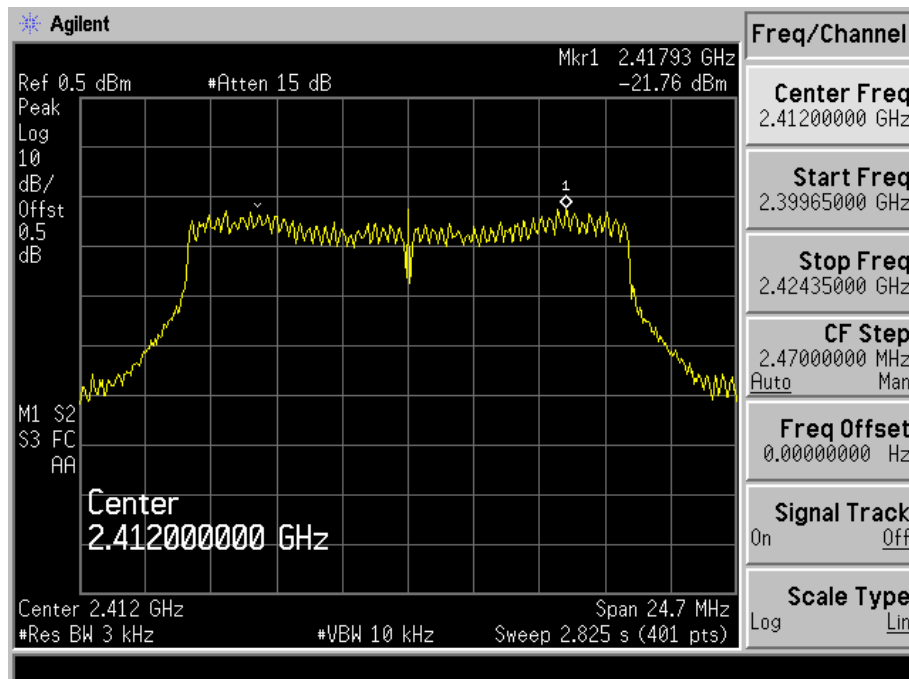


802.11g-Middle Channel

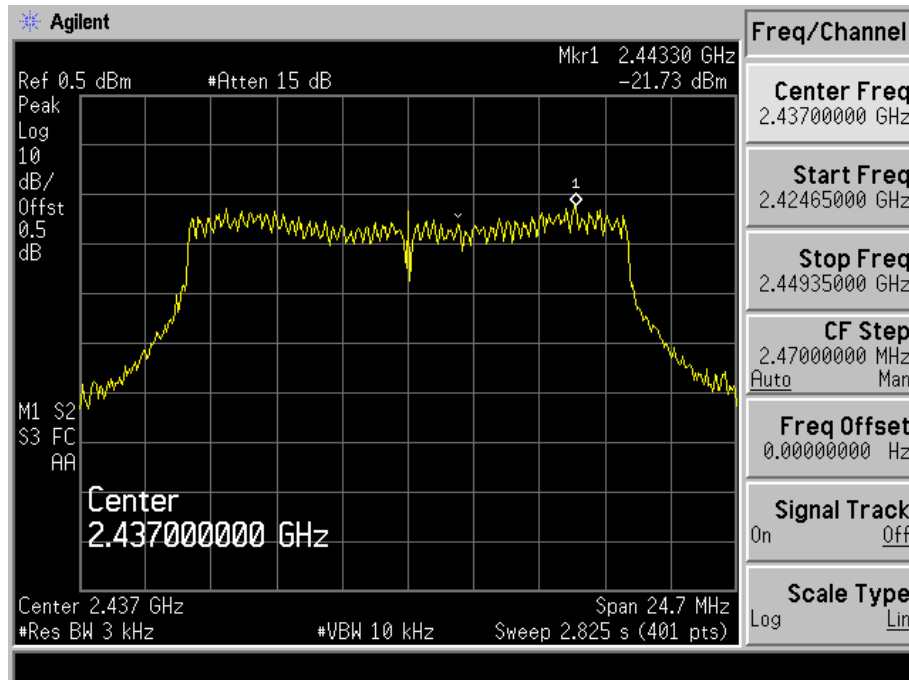


802.11g-High Channel

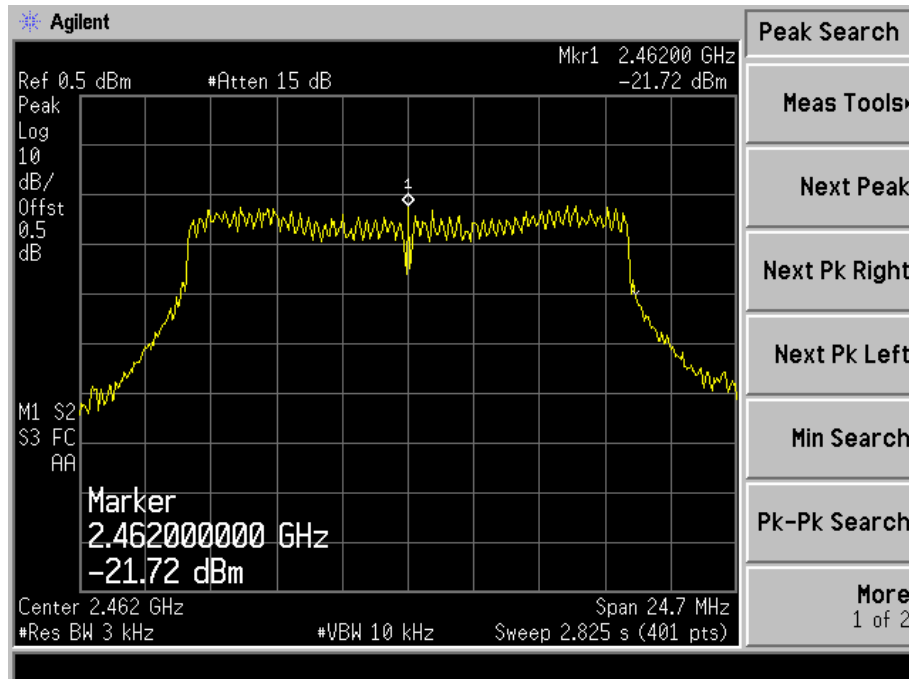


802.11n-HT20-Low Channel

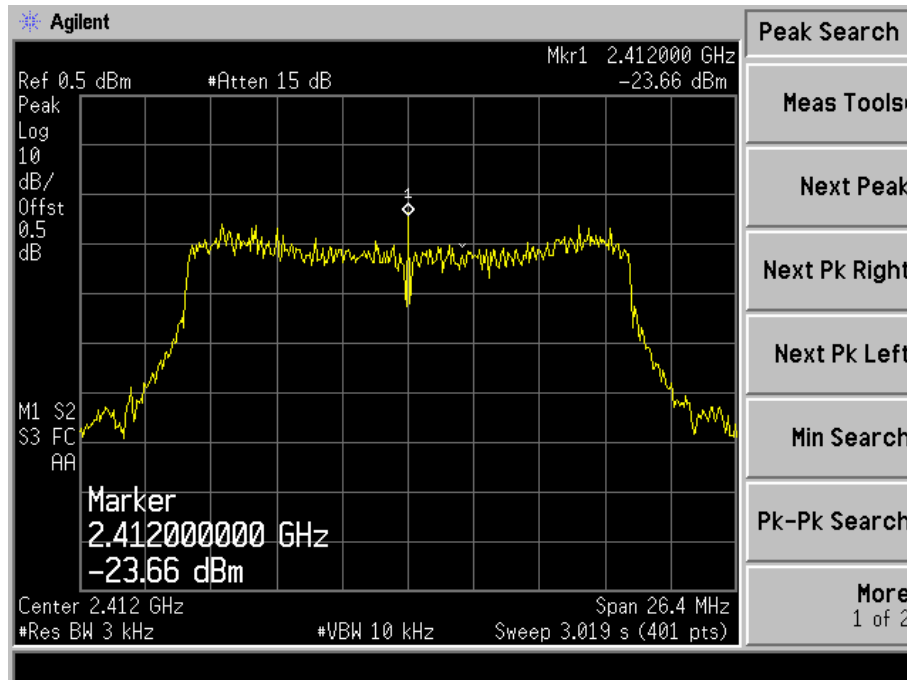

802.11n-HT20-Middle Channel

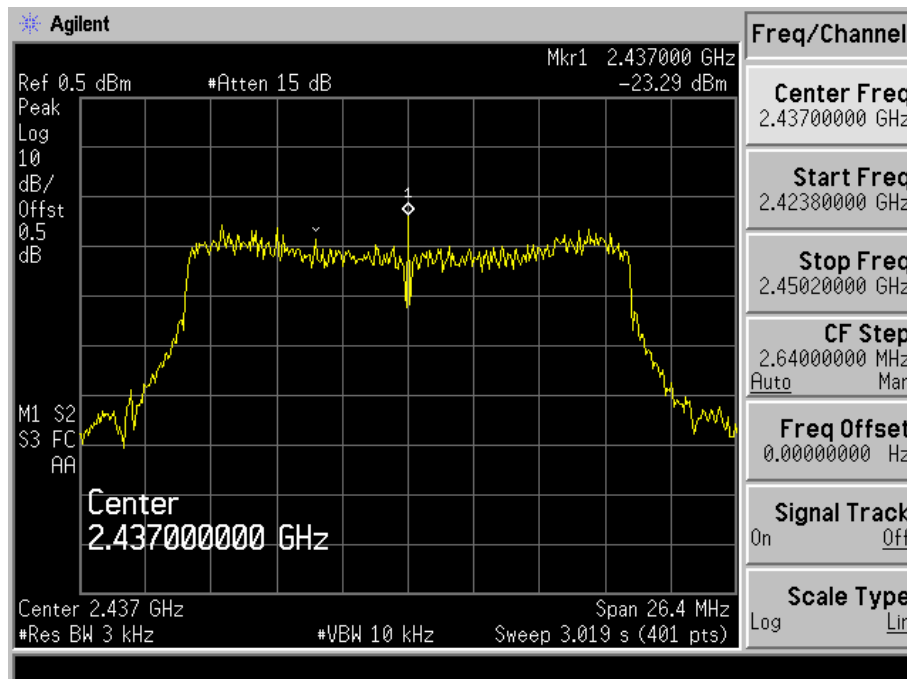

802.11n-HT20-High Channel

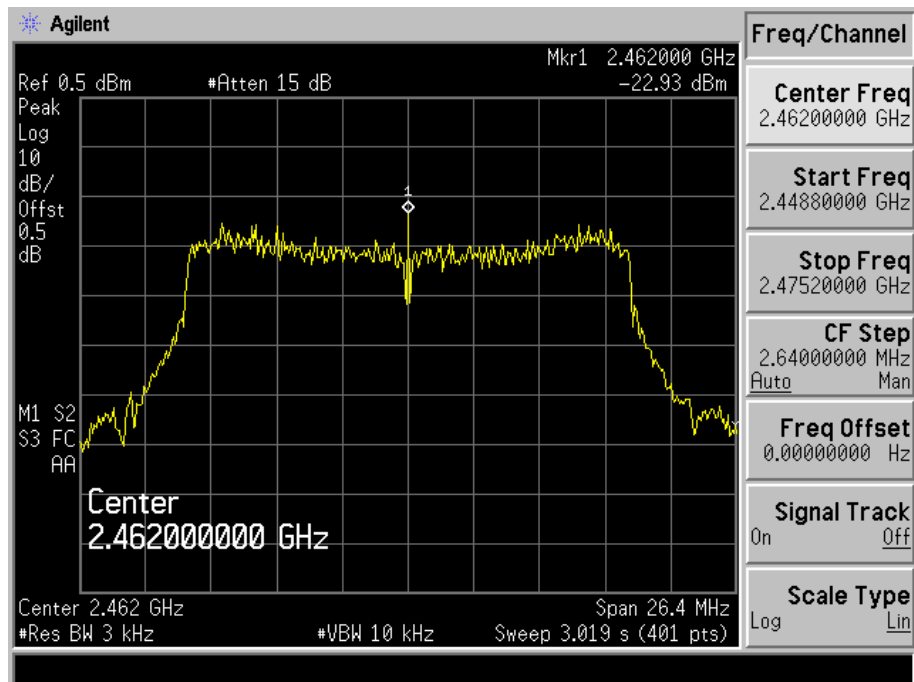

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11b	2412	10.125	12.5892	≥ 500
	2437	9.671	12.5710	≥ 500
	2462	10.127	12.5772	≥ 500
802.11g	2412	16.375	16.4495	≥ 500
	2437	16.022	16.4244	≥ 500
	2462	16.341	16.4572	≥ 500
802.11n-HT20	2412	17.448	17.5883	≥ 500
	2437	17.346	17.5821	≥ 500
	2462	17.366	17.5820	≥ 500

Please refer to the following test plots:


802.11b-Low Channel

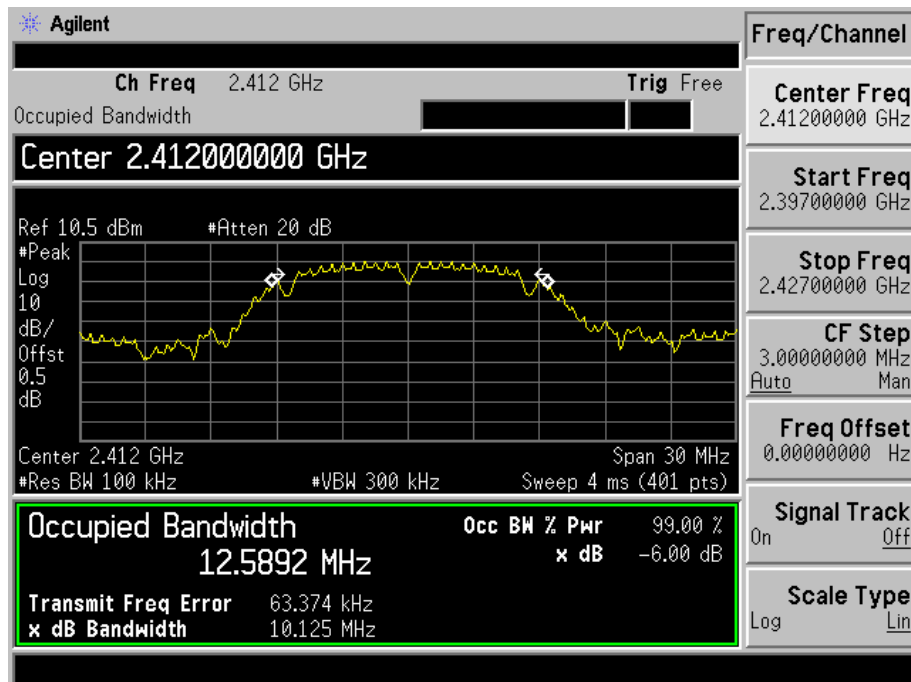


802.11b-Middle Channel

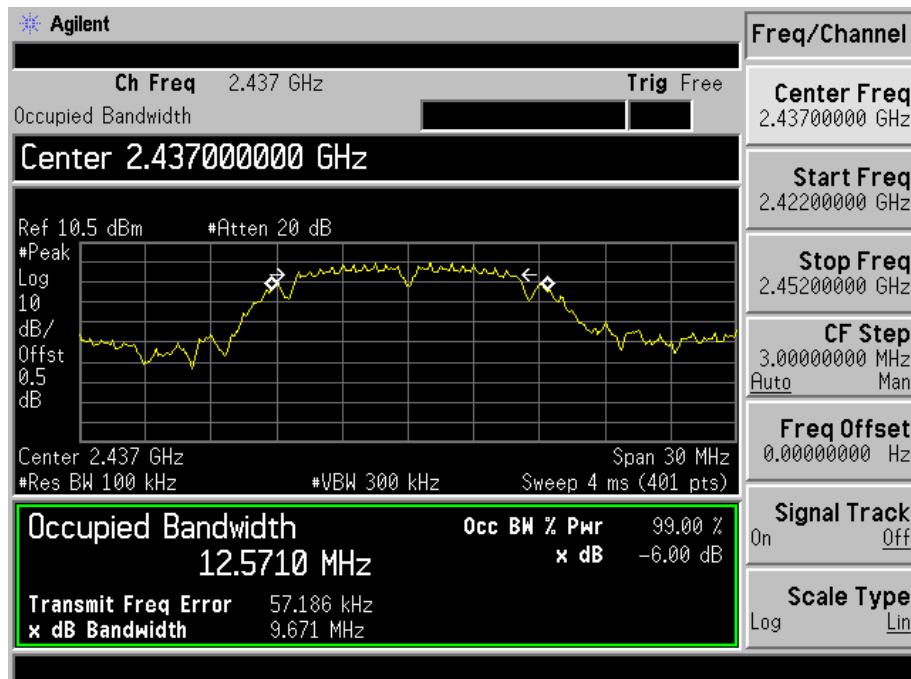


802.11b-High Channel

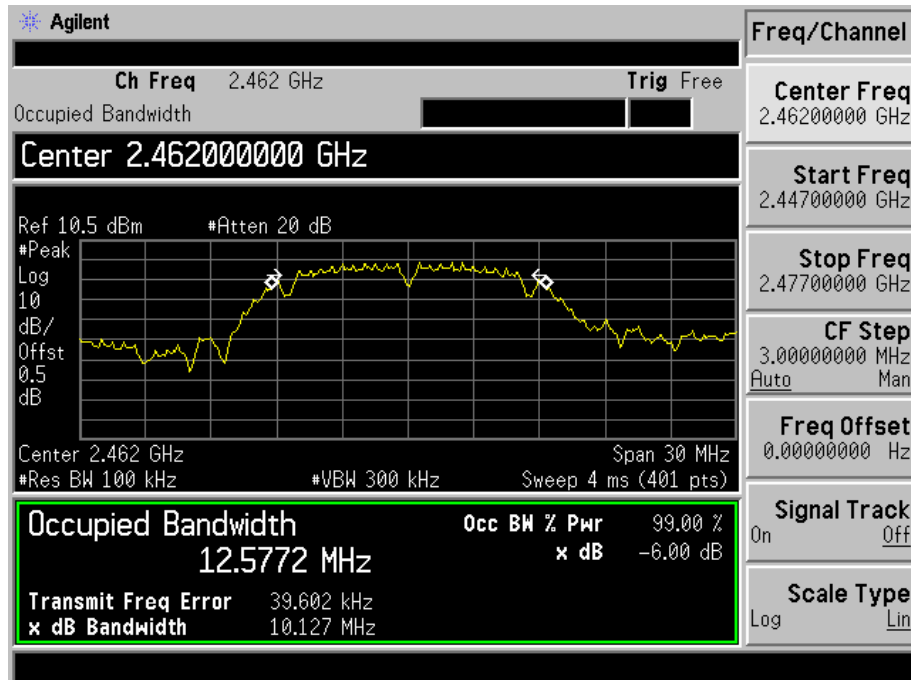


802.11g-Low Channel

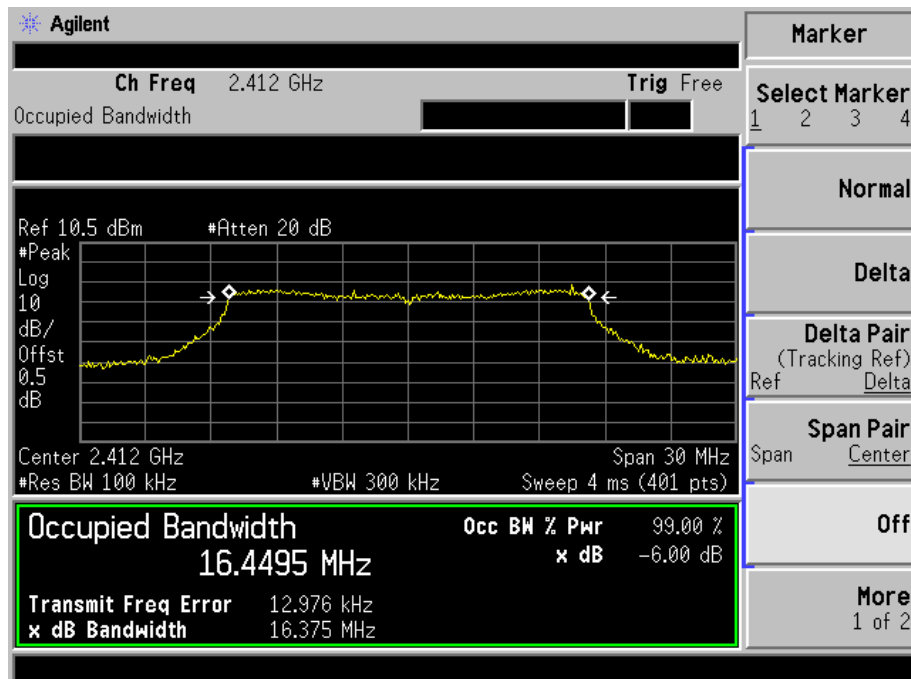


802.11g-Middle Channel

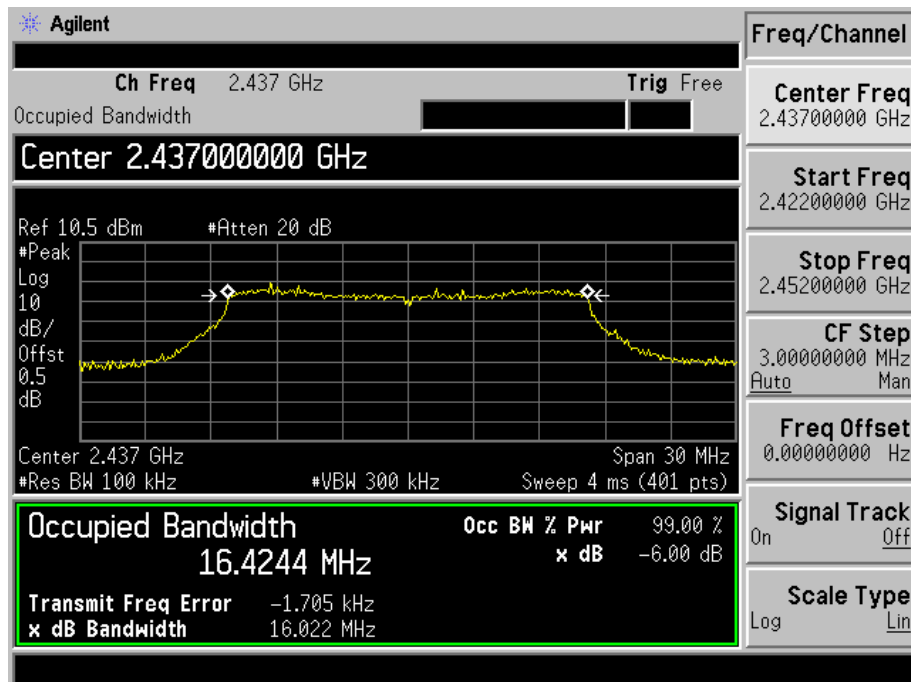


802.11g-High Channel

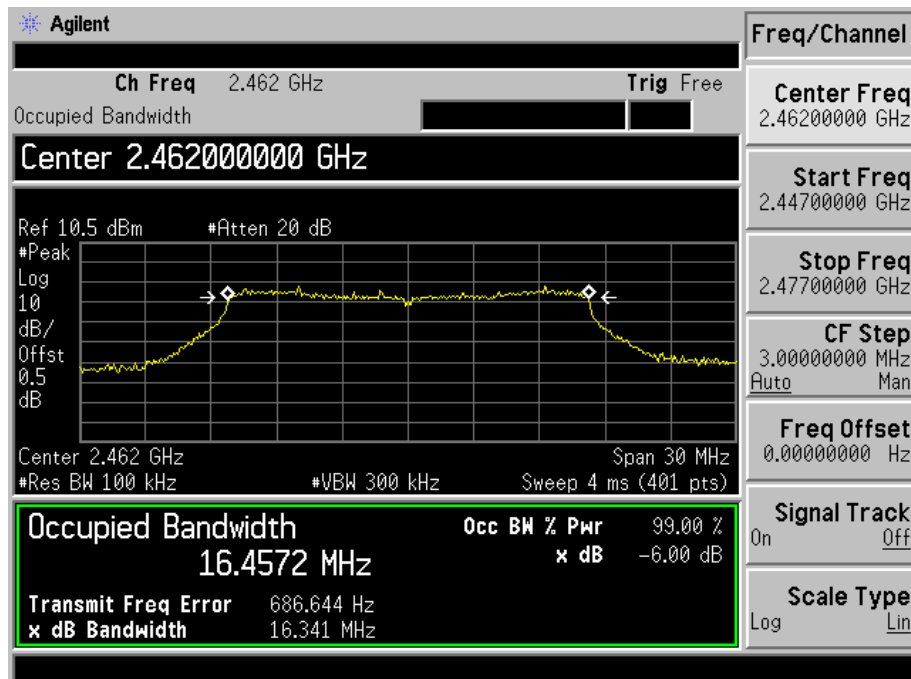


802.11n-HT20-Low Channel

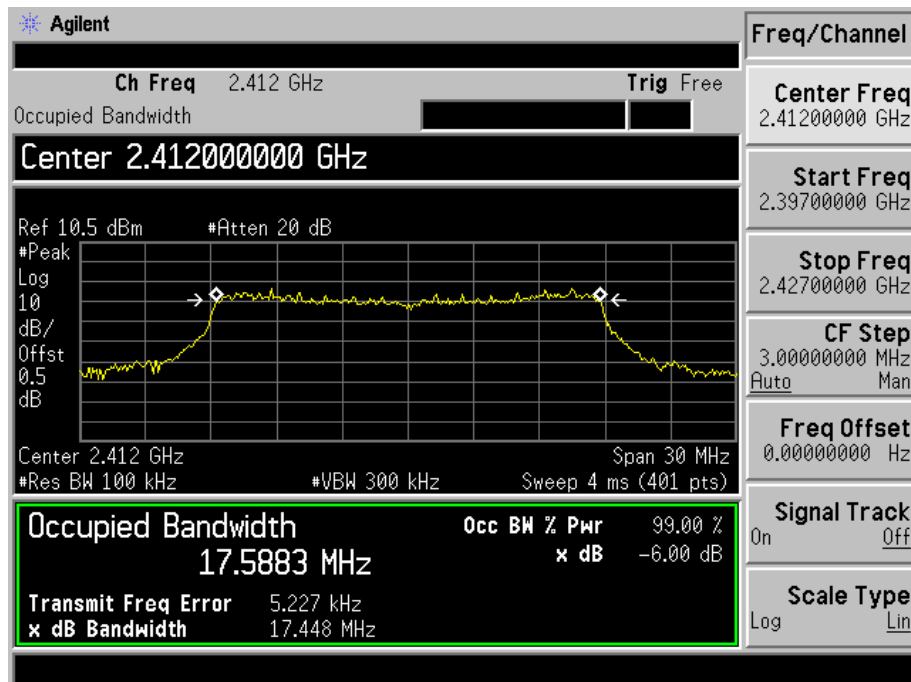

802.11n-HT20-Middle Channel

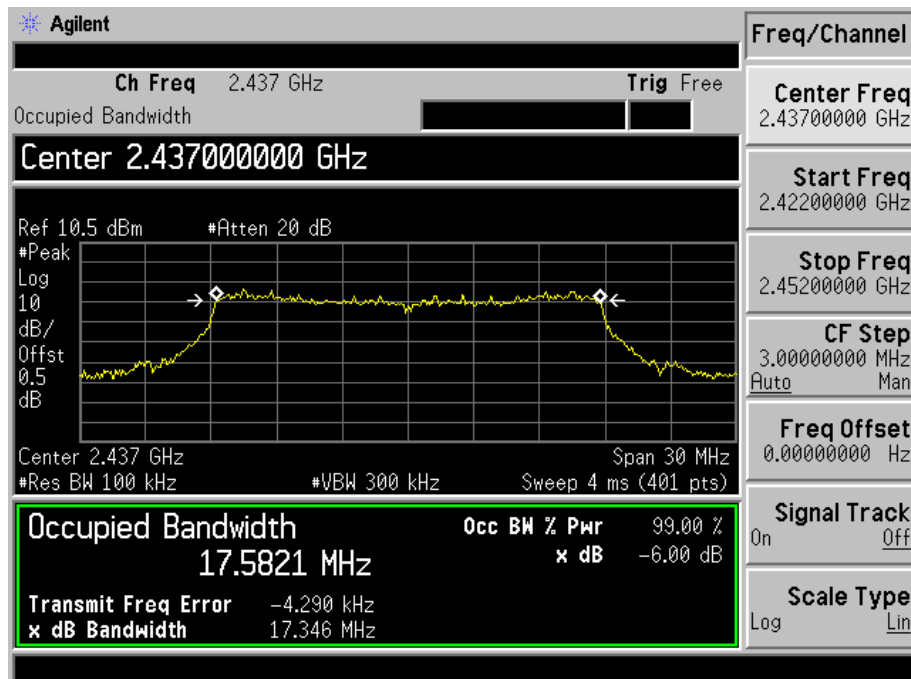

802.11n-HT20-High Channel

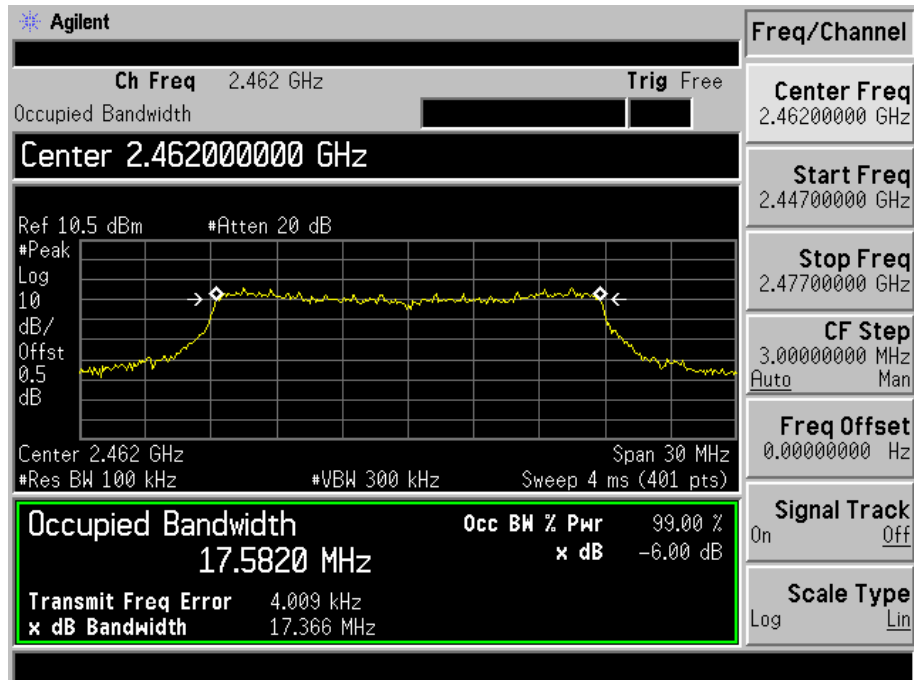

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to the KDB-558074 D01 v04, 9.2.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.3 Environmental Conditions


Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b _ 11Mbps	2412	11.86	15.35	1000
	2437	11.16	13.06	1000
	2462	11.15	13.03	1000
802.11g_54Mbps	2412	10.44	11.07	1000
	2437	10.42	11.02	1000
	2462	9.80	9.55	1000
802.11n HT20_MCS7	2412	8.97	7.89	1000
	2437	8.70	7.41	1000
	2462	8.22	6.64	1000

Please refer to the following test plots:


802.11b-11Mbps-Low Channel

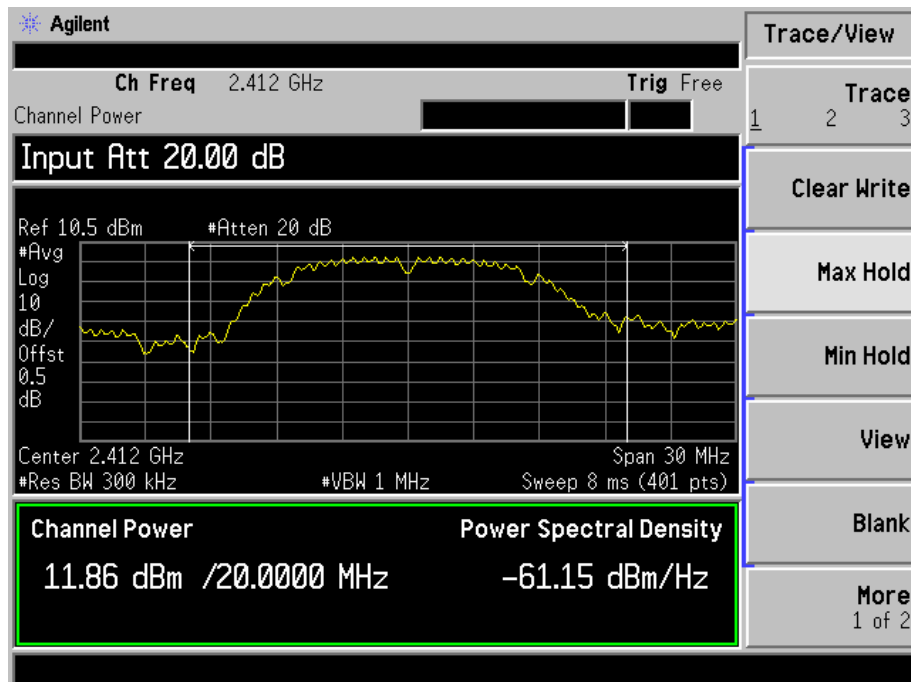


802.11b -11Mbps-Middle Channel




802.11b -11Mbps-High Channel

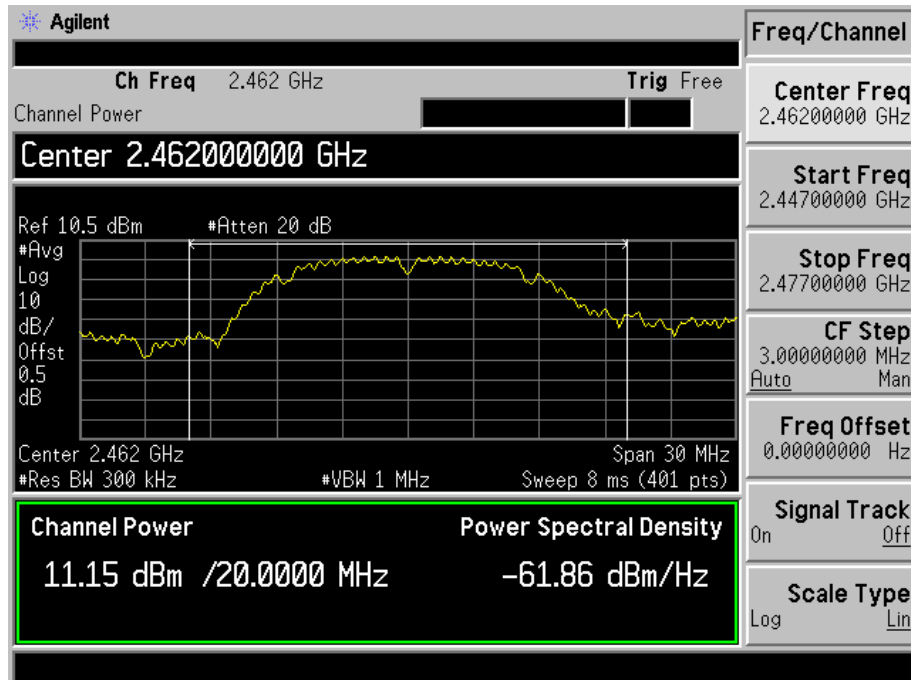


802.11g-54Mbps-Low Channel

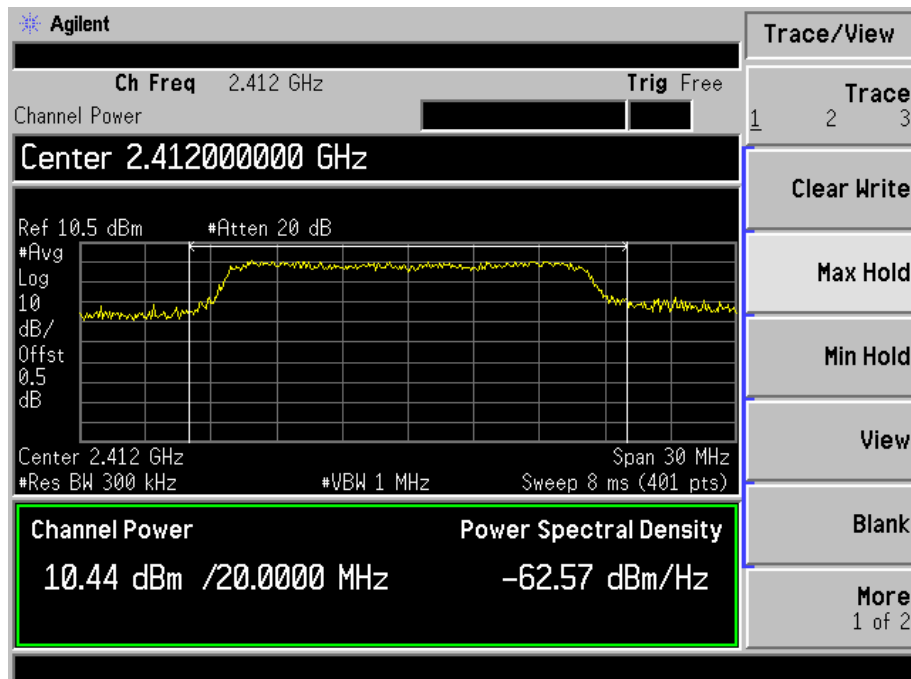


802.11g-54Mbps-Middle Channel

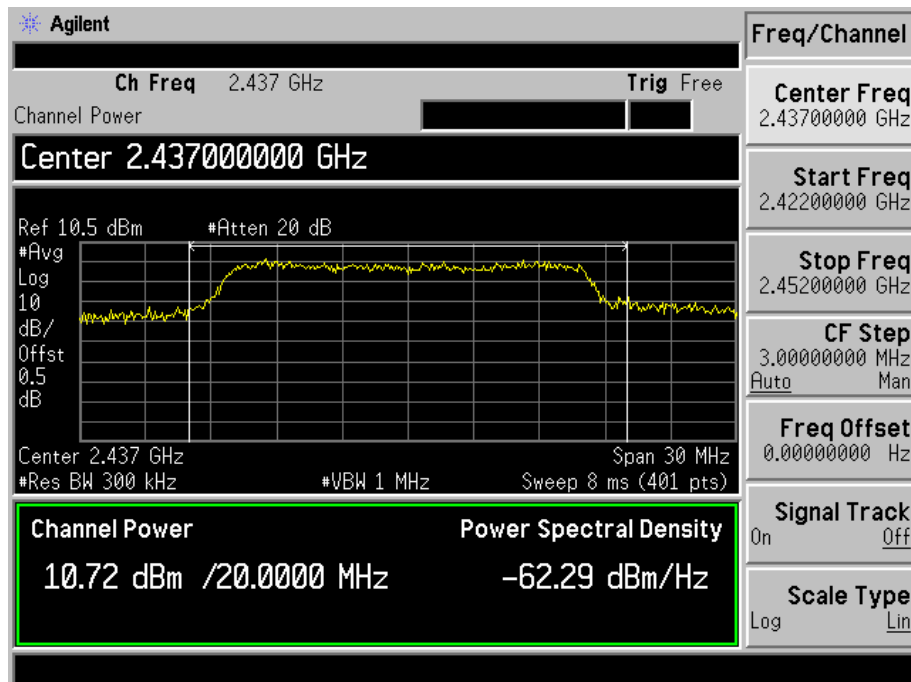


802.11g-54Mbps-High Channel

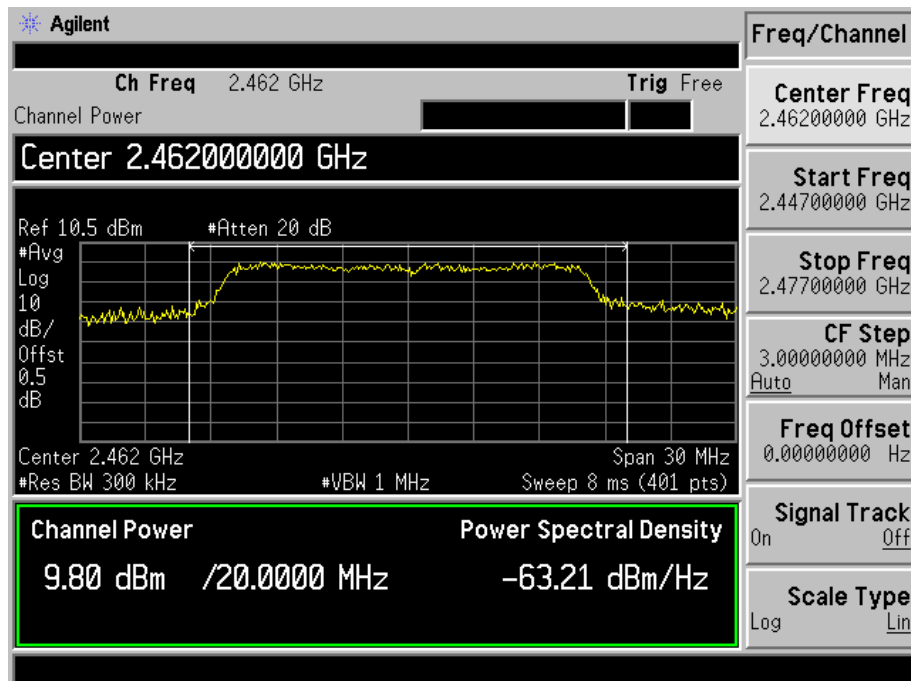


802.11n-HT20-MCS7-Low Channel

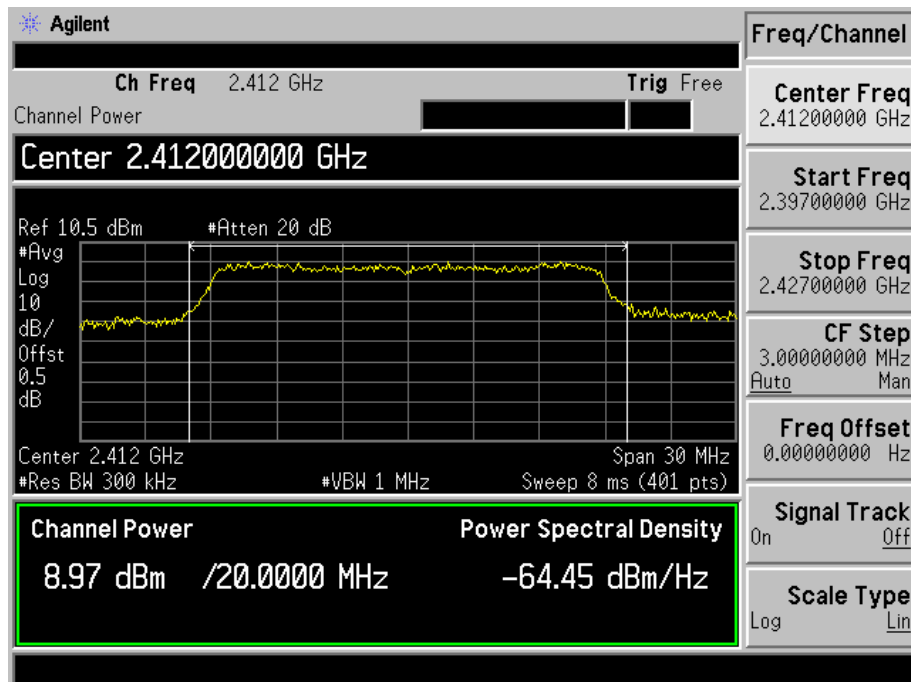

802.11n-HT20-MCS7-Middle Channel

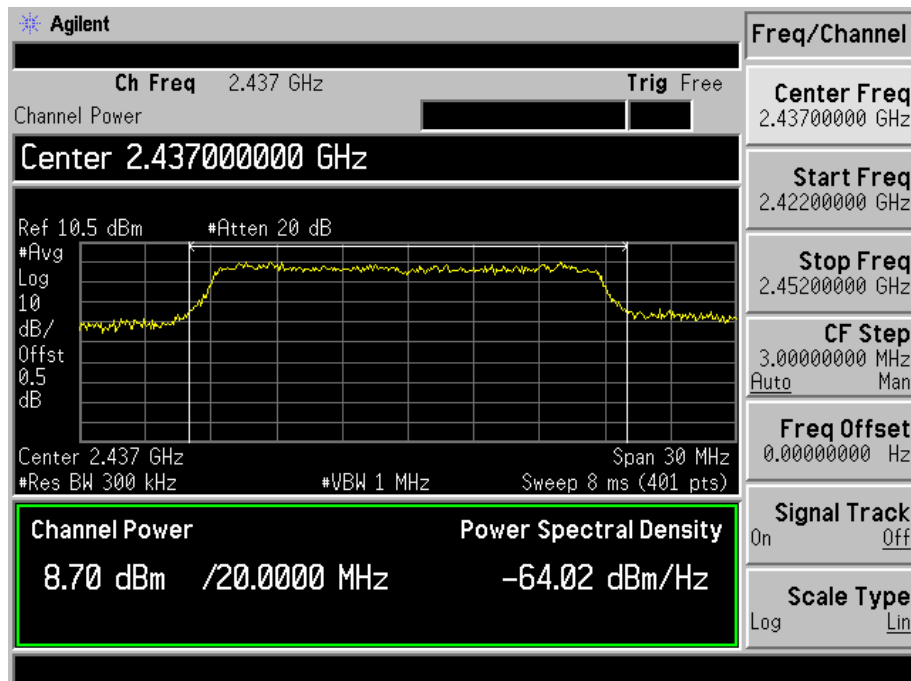

802.11n-HT20-MCS7-High Channel

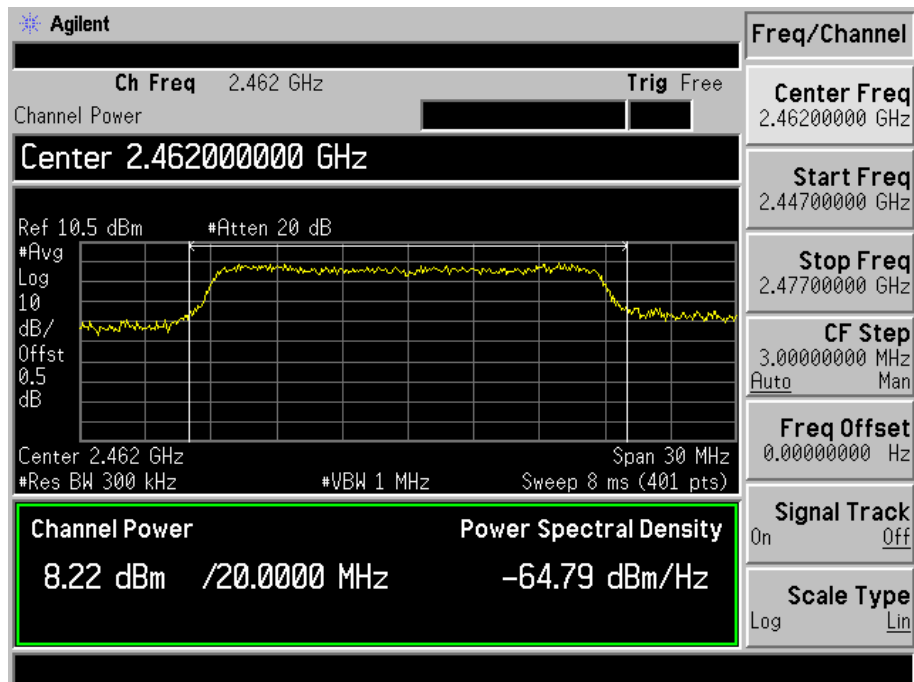

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

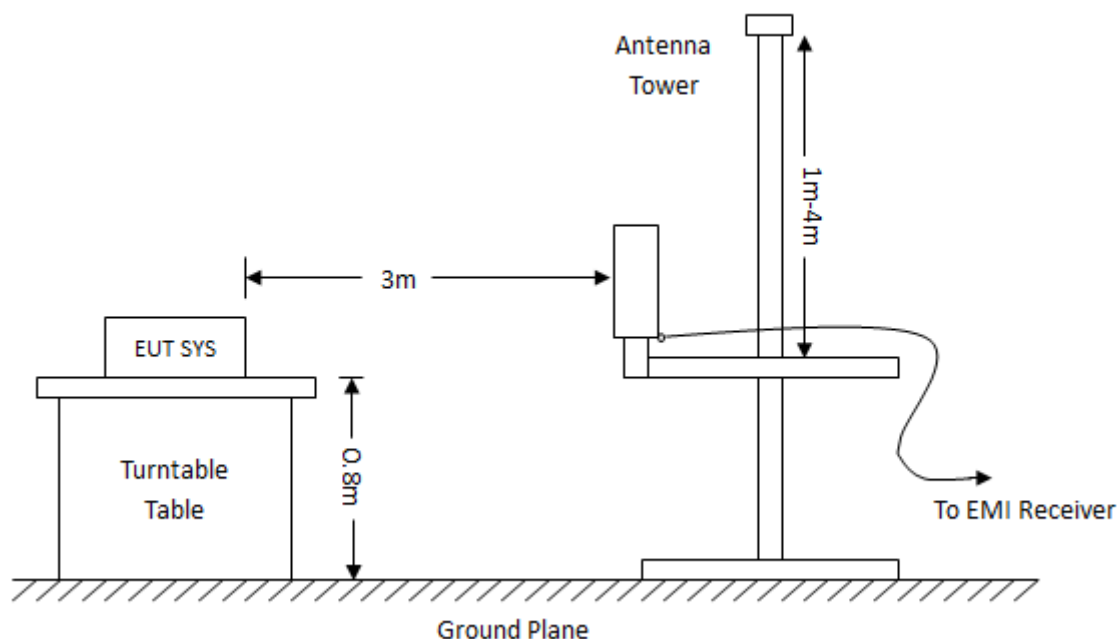

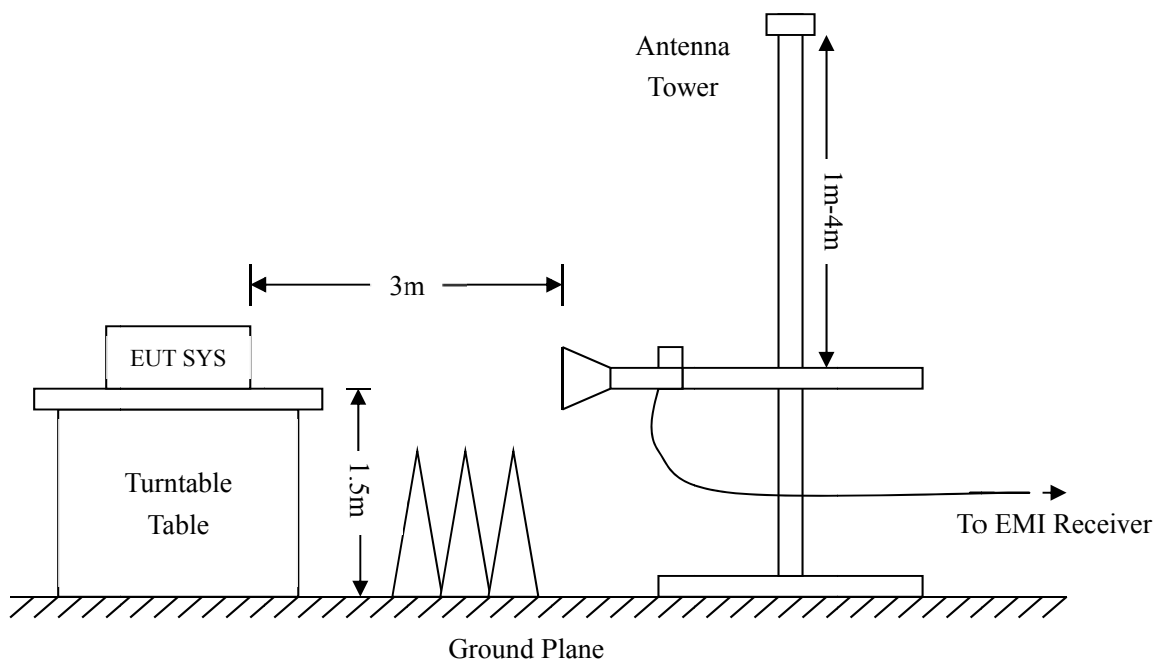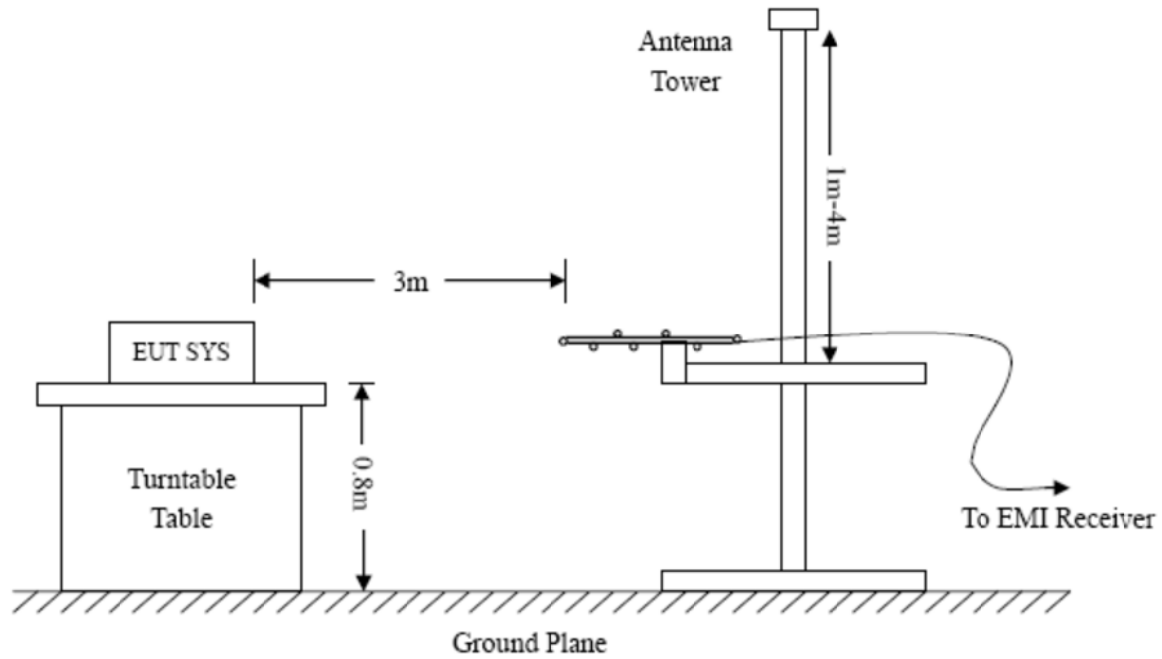

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=360KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.5 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: Mobile phone
Tested Model: L4
Operating Condition: 802.11b Transmitting
Comment: DC 3.7V

Test Specification: Horizontal

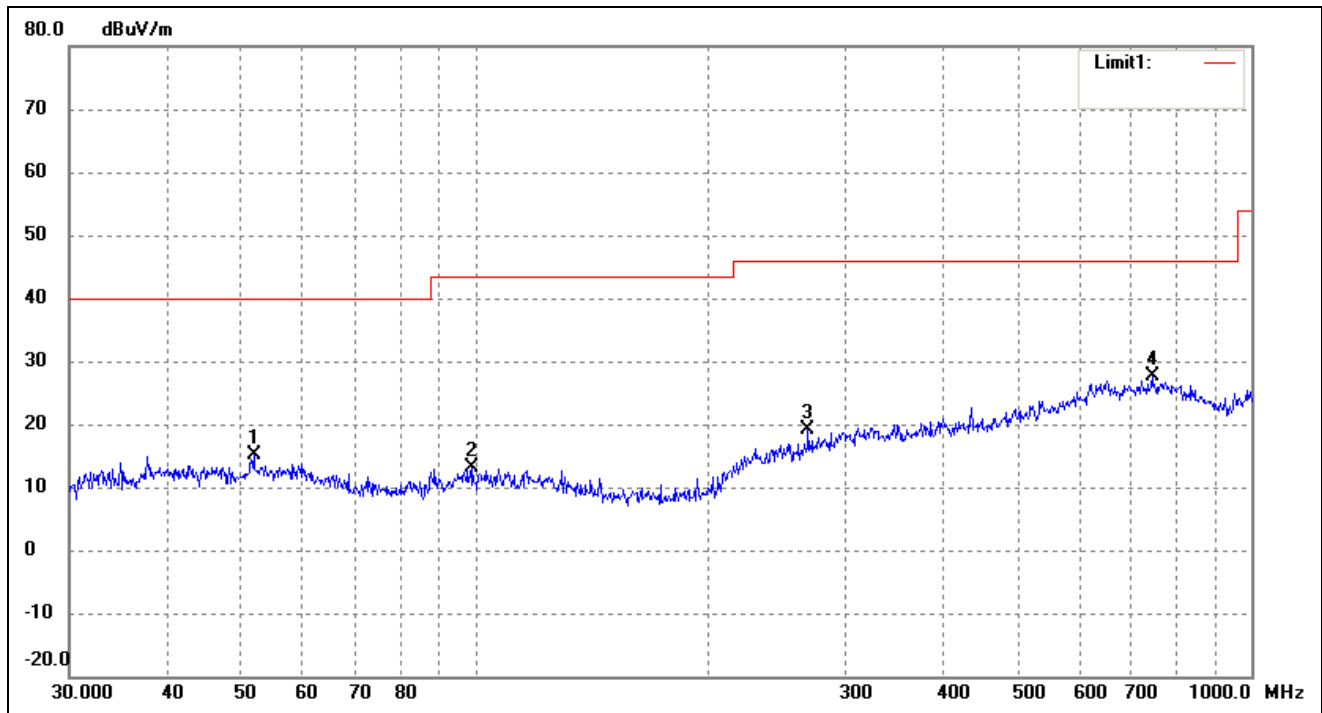

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.8430	31.70	-16.50	15.20	40.00	-24.80	237	100	peak
2	99.1797	29.90	-16.68	13.22	43.50	-30.28	90	100	peak
3	268.4853	30.23	-11.18	19.05	46.00	-26.95	262	100	peak
4	744.8661	27.67	-0.03	27.64	46.00	-18.36	104	100	peak

Test Specification: Vertical

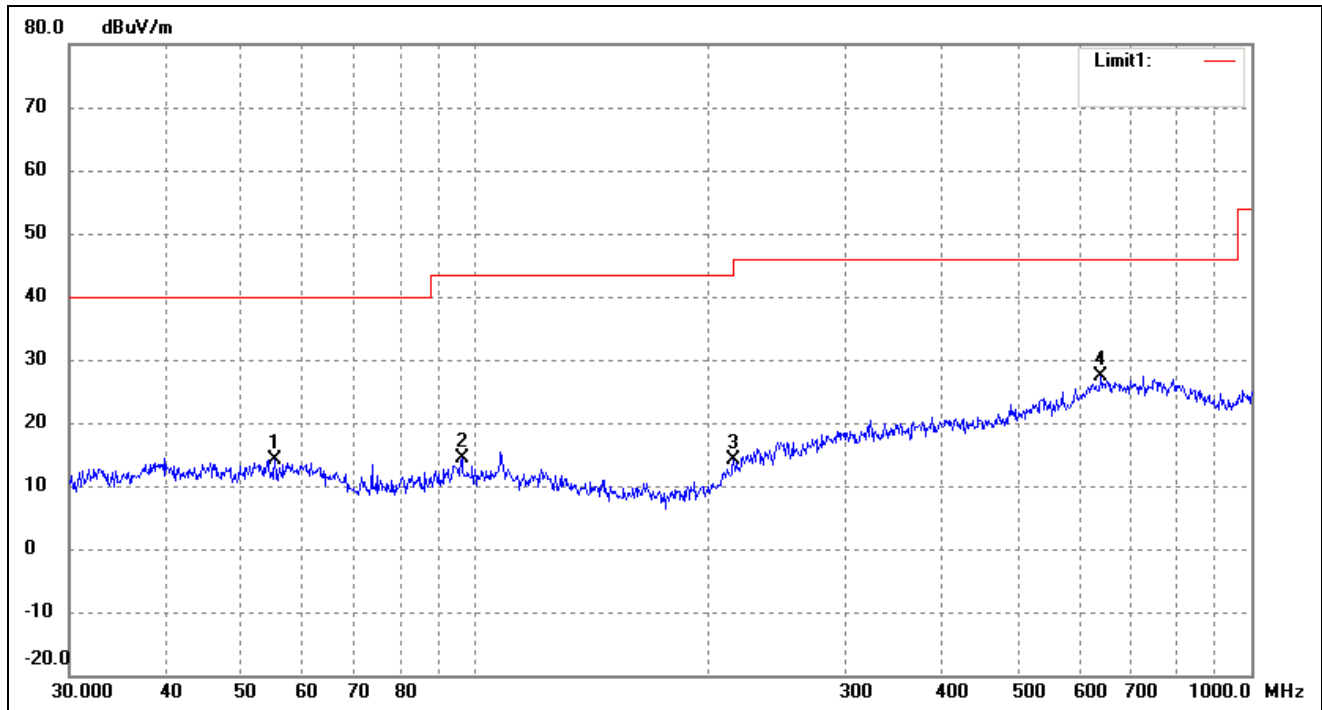


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.2207	30.52	-16.51	14.01	40.00	-25.99	225	100	peak
2	96.0986	31.42	-17.14	14.28	43.50	-29.22	92	100	peak
3	215.2678	28.93	-14.88	14.05	43.50	-29.45	63	100	peak
4	640.6110	28.46	-1.03	27.43	46.00	-18.57	119	100	peak

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: Mobile phone
Tested Model: L4
Operating Condition: 802.11g Transmitting
Comment: DC 3.7V

Test Specification: Horizontal

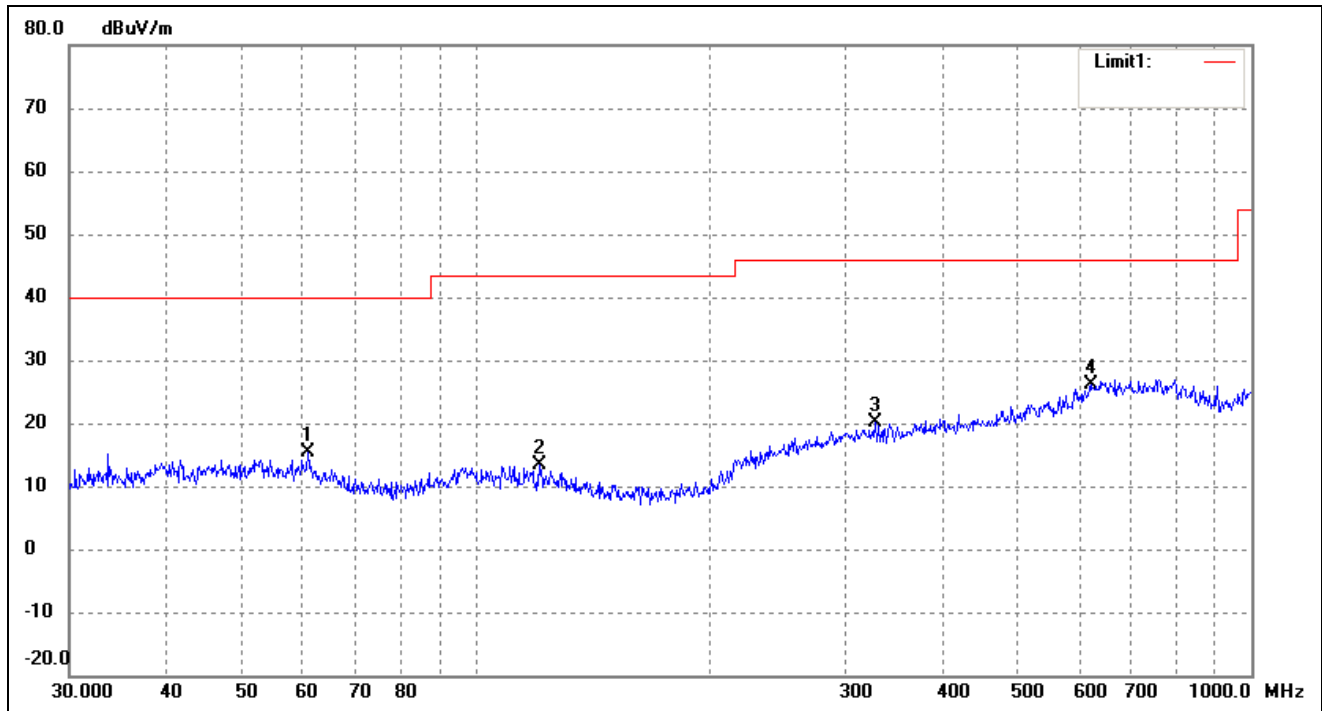

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	60.9176	32.18	-16.70	15.48	40.00	-24.52	127	100	peak
2	121.1231	30.04	-16.77	13.27	43.50	-30.23	318	100	peak
3	327.8873	29.59	-9.49	20.10	46.00	-25.90	77	100	peak
4	620.7096	27.74	-1.67	26.07	46.00	-19.93	112	100	peak

Test Specification: Vertical

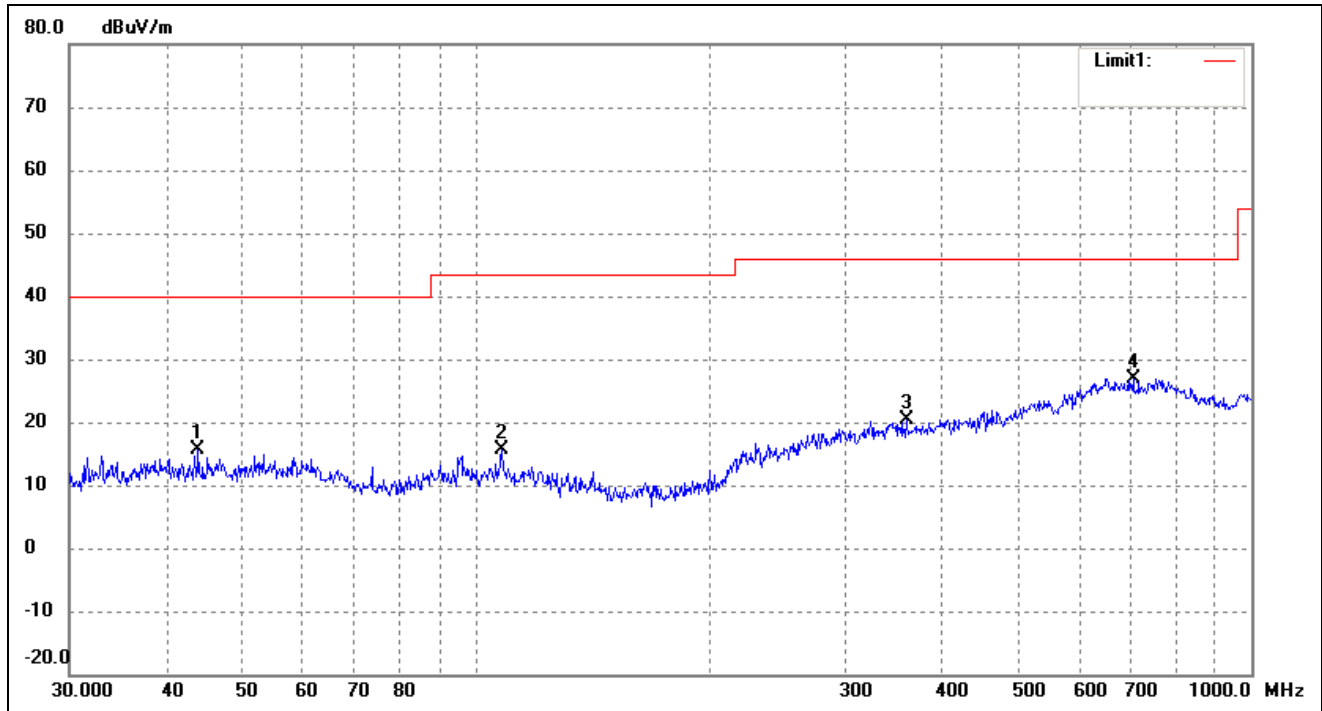


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.9658	32.09	-16.49	15.60	40.00	-24.40	170	100	peak
2	108.2667	32.17	-16.61	15.56	43.50	-27.94	137	100	peak
3	359.1860	29.23	-8.95	20.28	46.00	-25.72	76	100	peak
4	704.2261	28.66	-1.68	26.98	46.00	-19.02	341	100	peak

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: Mobile phone
Tested Model: L4
Operating Condition: 802.11n-HT20 Transmitting
Comment: DC 3.7V

Test Specification: Horizontal

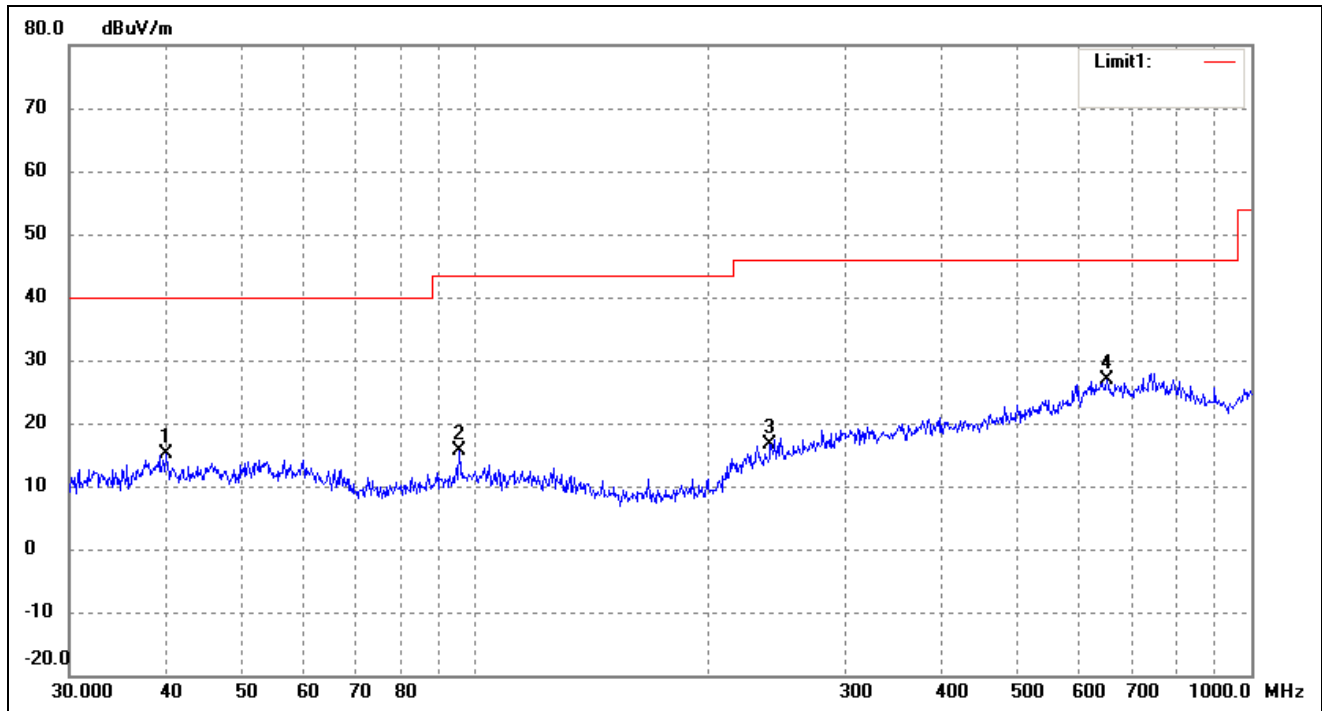

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.9942	31.63	-16.53	15.10	40.00	-24.90	175	100	peak
2	95.4270	32.78	-17.23	15.55	43.50	-27.95	172	100	peak
3	239.9874	29.18	-12.54	16.64	46.00	-29.36	79	100	peak
4	651.9417	28.09	-1.32	26.77	46.00	-19.23	124	100	peak

Test Specification: Vertical

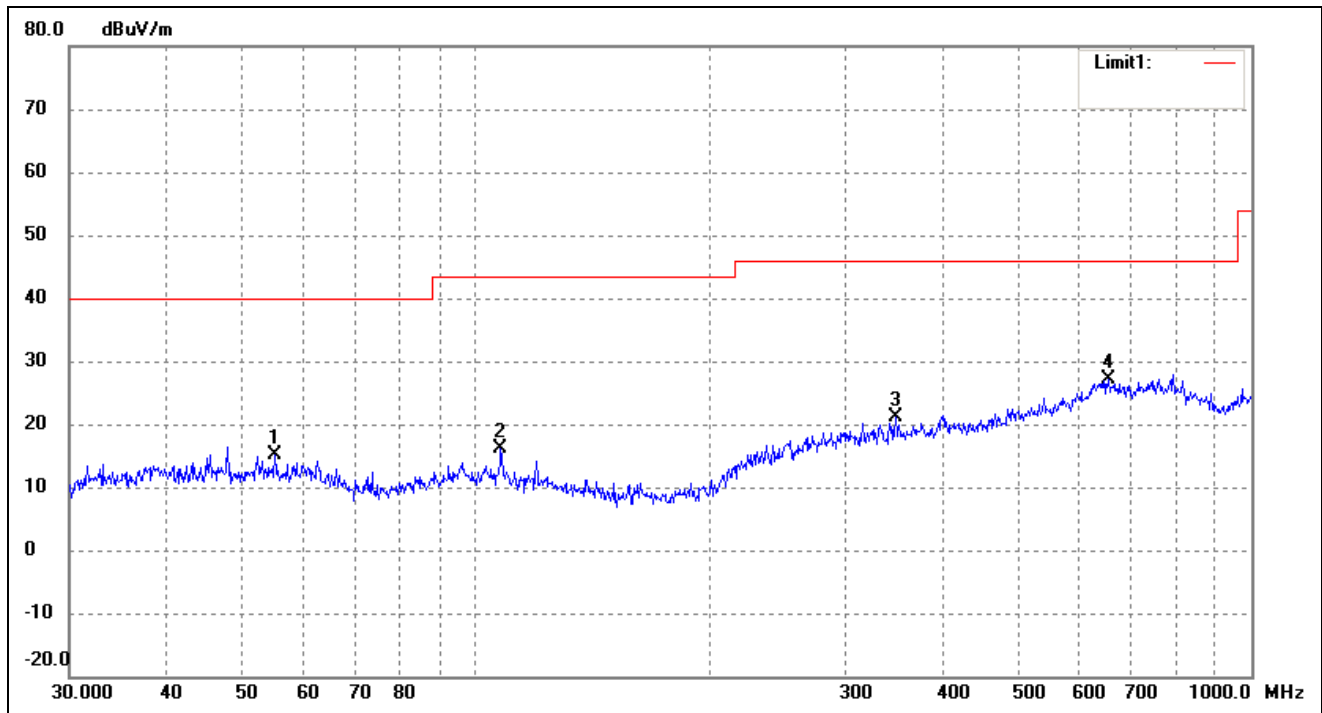

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.2207	31.62	-16.51	15.11	40.00	-24.89	91	100	peak
2	107.8877	32.84	-16.61	16.23	43.50	-27.27	124	100	peak
3	348.0274	30.45	-9.36	21.09	46.00	-24.91	109	100	peak
4	654.2318	28.59	-1.38	27.21	46.00	-18.79	119	100	peak

Spurious Emissions 1GHz to 18GHz

Test Mode: 802.11b

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	58.8	-3.87	54.93	74	-19.07	H	PK
4824.000	41.09	-3.87	37.22	54	-16.78	H	AV
7236.000	53.53	1.14	54.67	74	-19.33	H	PK
7236.000	39.11	1.19	40.3	54	-13.7	H	AV
4824.000	60.74	-3.86	56.88	74	-17.12	V	PK
4824.000	42.2	-3.86	38.34	54	-15.66	V	AV
7236.000	52.62	1.1	53.72	74	-20.28	V	PK
7236.000	40.42	1.1	41.52	54	-12.48	V	AV
Middle Channel-2437MHz							
4874.000	60.81	-3.74	57.07	74	-16.93	H	PK
4874.000	41.2	-3.74	37.46	54	-16.54	H	AV
7311.000	53.26	1.47	54.73	74	-19.27	H	PK
7311.000	40.03	1.47	41.5	54	-12.5	H	AV
4874.000	61.05	-3.74	57.31	74	-16.69	V	PK
4874.000	42.2	-3.74	38.46	54	-15.54	V	AV
7311.000	54.75	1.47	56.22	74	-17.78	V	PK
7311.000	39.25	1.47	40.72	54	-13.28	V	AV
High Channel-2462MHz							
4924.000	60.55	-3.59	56.96	74	-17.04	H	PK
4924.000	41.3	-3.59	37.71	54	-16.29	H	AV
7386.000	54.92	1.79	56.71	74	-17.29	H	PK
7386.000	39.97	1.79	41.76	54	-12.24	H	AV
4924.000	60.37	-3.59	56.78	74	-17.22	V	PK
4924.000	43.69	-3.59	40.1	54	-13.9	V	AV
7386.000	53.33	1.79	55.12	74	-18.88	V	PK
7386.000	39.61	1.79	41.4	54	-12.6	V	AV

Test Mode: 802.11g

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	58.13	-3.87	54.26	74	-19.74	H	PK
4824.000	42.54	-3.87	38.67	54	-15.33	H	AV
7236.000	54.78	1.14	55.92	74	-18.08	H	PK
7236.000	38.35	1.19	39.54	54	-14.46	H	AV
4824.000	58.64	-3.86	54.78	74	-19.22	V	PK
4824.000	42.6	-3.86	38.74	54	-15.26	V	AV
7236.000	52.52	1.1	53.62	74	-20.38	V	PK
7236.000	38.26	1.1	39.36	54	-14.64	V	AV
Middle Channel-2437MHz							
4874.000	58.06	-3.74	54.32	74	-19.68	H	PK
4874.000	43.43	-3.74	39.69	54	-14.31	H	AV
7311.000	53.74	1.47	55.21	74	-18.79	H	PK
7311.000	39.23	1.47	40.7	54	-13.3	H	AV
4874.000	60.19	-3.74	56.45	74	-17.55	V	PK
4874.000	43.93	-3.74	40.19	54	-13.81	V	AV
7311.000	53.8	1.47	55.27	74	-18.73	V	PK
7311.000	39.94	1.47	41.41	54	-12.59	V	AV
High Channel-2462MHz							
4924.000	60.21	-3.59	56.62	74	-17.38	H	PK
4924.000	43.77	-3.59	40.18	54	-13.82	H	AV
7386.000	52.61	1.79	54.4	74	-19.6	H	PK
7386.000	40.63	1.79	42.42	54	-11.58	H	AV
4924.000	60.7	-3.59	57.11	74	-16.89	V	PK
4924.000	42.36	-3.59	38.77	54	-15.23	V	AV
7386.000	54.95	1.79	56.74	74	-17.26	V	PK
7386.000	40.86	1.79	42.65	54	-11.35	V	AV

Test Mode: 802.11n-HT20

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	60.42	-3.87	56.55	74	-17.45	H	PK
4824.000	42.52	-3.87	38.65	54	-15.35	H	AV
7236.000	55.63	1.14	56.77	74	-17.23	H	PK
7236.000	38.86	1.19	40.05	54	-13.95	H	AV
4824.000	60.58	-3.86	56.72	74	-17.28	V	PK
4824.000	43.74	-3.86	39.88	54	-14.12	V	AV
7236.000	54.49	1.1	55.59	74	-18.41	V	PK
7236.000	40.66	1.1	41.76	54	-12.24	V	AV
Middle Channel-2437MHz							
4874.000	58.64	-3.74	54.9	74	-19.1	H	PK
4874.000	41.25	-3.74	37.51	54	-16.49	H	AV
7311.000	52.17	1.47	53.64	74	-20.36	H	PK
7311.000	39.72	1.47	41.19	54	-12.81	H	AV
4874.000	60.89	-3.74	57.15	74	-16.85	V	PK
4874.000	42.74	-3.74	39	54	-15	V	AV
7311.000	53.94	1.47	55.41	74	-18.59	V	PK
7311.000	38.14	1.47	39.61	54	-14.39	V	AV
High Channel-2462MHz							
4924.000	59.68	-3.59	56.09	74	-17.91	H	PK
4924.000	42.48	-3.59	38.89	54	-15.11	H	AV
7386.000	54.11	1.79	55.9	74	-18.1	H	PK
7386.000	40.47	1.79	42.26	54	-11.74	H	AV
4924.000	59.75	-3.59	56.16	74	-17.84	V	PK
4924.000	43.44	-3.59	39.85	54	-14.15	V	AV
7386.000	52.73	1.79	54.52	74	-19.48	V	PK
7386.000	39.25	1.79	41.04	54	-12.96	V	AV

Spurious Emissions Above 18GHz

Test Mode: 802.11b (worst case)

Test for Centre Testing International Group Co., Ltd					
Frequency	Result	Limit	Margin	Polar	Detector
(GHz)	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz					
18.432	47.42	74	-26.58	H	PK
18.432	36.31	54	-17.69	H	AV
23.784	44.67	74	-29.33	H	PK
23.784	35.52	54	-18.48	H	AV
18.252	47.62	74	-26.38	V	PK
18.252	36.45	54	-17.55	V	AV
23.445	45.44	74	-28.56	V	PK
23.445	36.16	54	-17.84	V	AV
Middle Channel-2437MHz					
18.628	47.46	74	-26.54	H	PK
18.628	36.72	54	-17.28	H	AV
24.442	44.56	74	-29.44	H	PK
24.442	35.77	54	-18.23	H	AV
19.381	47.83	74	-26.17	V	PK
19.381	36.24	54	-17.76	V	AV
23.414	45.45	74	-28.55	V	PK
23.414	36.12	54	-17.88	V	AV
High Channel-2462MHz					
18.863	47.45	74	-26.55	H	PK
18.863	36.35	54	-17.65	H	AV
23.611	44.25	74	-29.75	H	PK
23.611	35.72	54	-18.28	H	AV
19.237	47.46	74	-26.54	V	PK
19.237	36.58	54	-17.42	V	AV
24.854	45.46	74	-28.54	V	PK
24.854	36.59	54	-17.41	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW $\geq$ 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.


9.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.4 Summary of Test Results/Plots

802.11b-Lowest Bandedge


Vertical (Worst case)

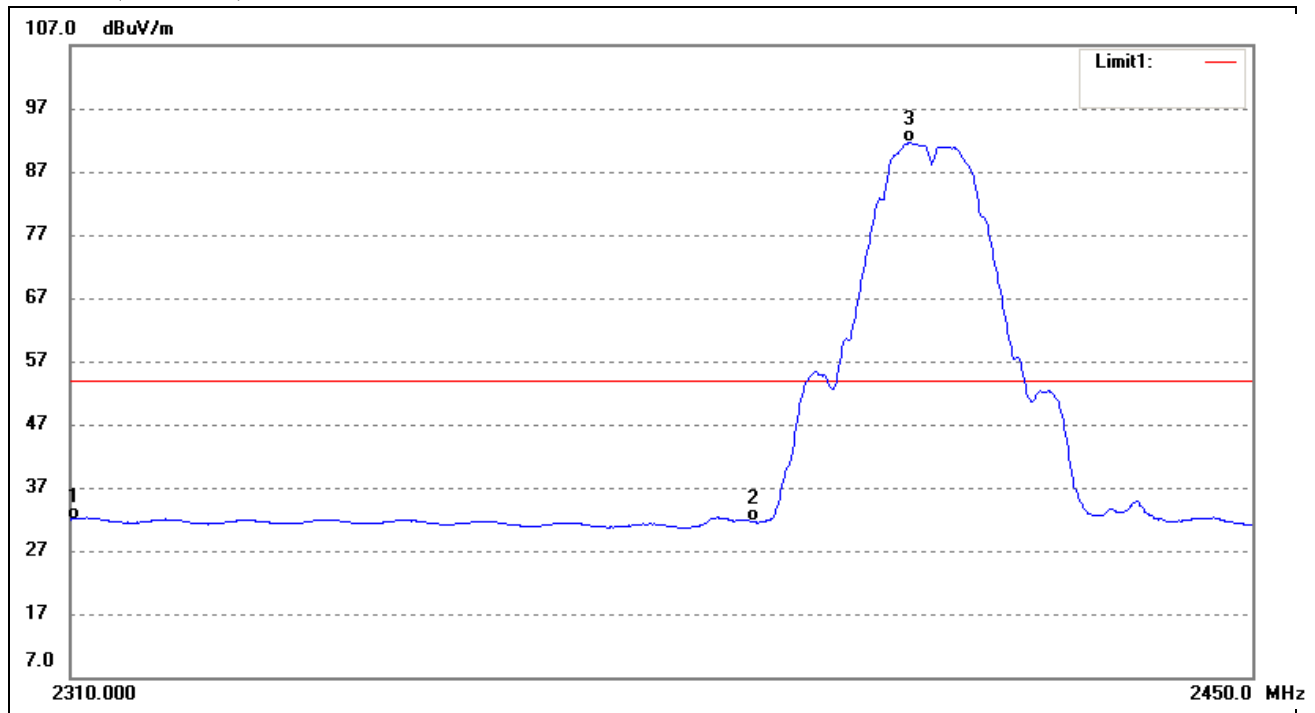

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	38.36	-6.38	31.98	54.00	-22.02	Average Detector
	2310.00	50.61	-6.38	44.23	74.00	-29.77	Peak Detector
2	2390.00	38.80	-7.26	31.54	54.00	-22.46	Average Detector
	2390.00	50.93	-7.26	43.67	74.00	-30.33	Peak Detector
3	2408.55	99.04	-7.42	91.62	/	/	Average Detector
	2409.82	103.30	-7.41	95.89	/	/	Peak Detector

802.11b-Highest Bandedge


Vertical (Worst case)

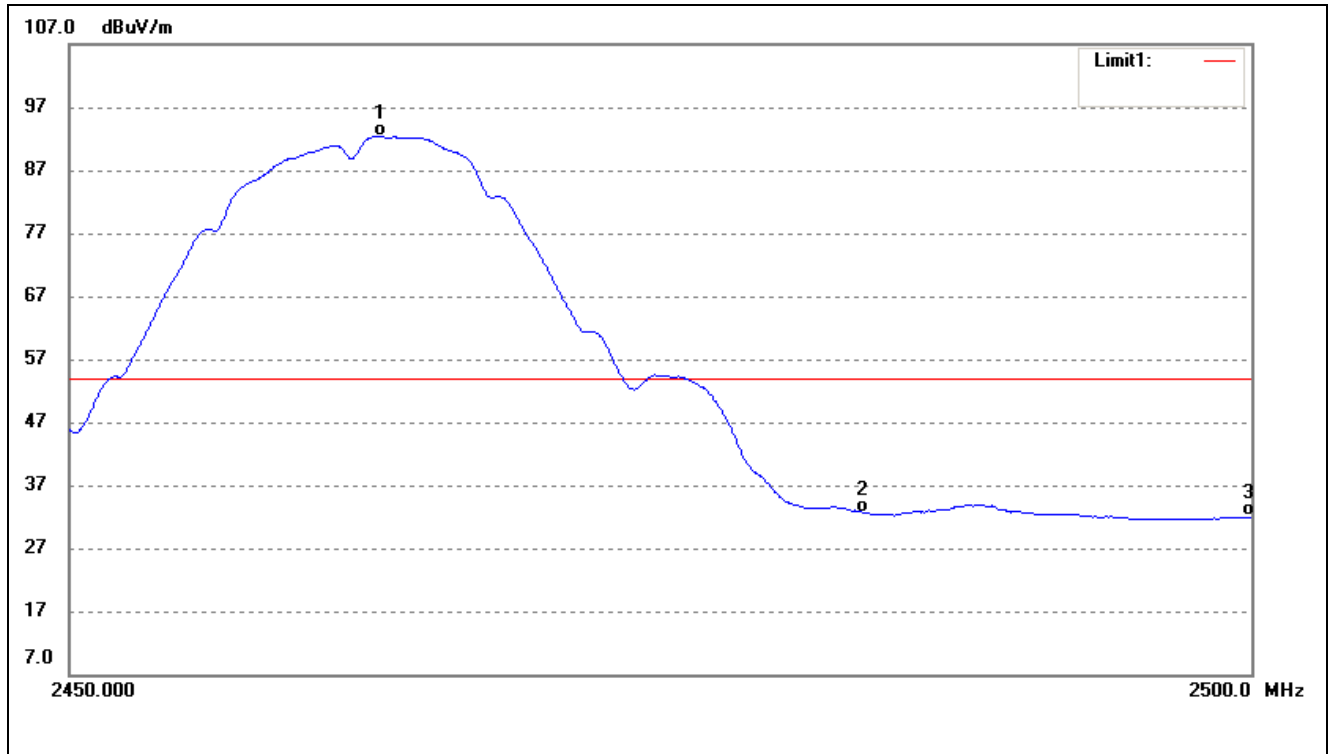

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.05	99.61	-7.31	92.30	/	/	Average Detector
	2463.30	104.17	-7.31	96.86	/	/	Peak Detector
2	2483.50	39.94	-7.28	32.66	54.00	-21.34	Average Detector
	2483.50	52.07	-7.28	44.79	74.00	-29.21	Peak Detector
3	2500.00	39.27	-7.25	32.02	54.00	-21.98	Average Detector
	2500.00	50.84	-7.25	43.59	74.00	-30.41	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

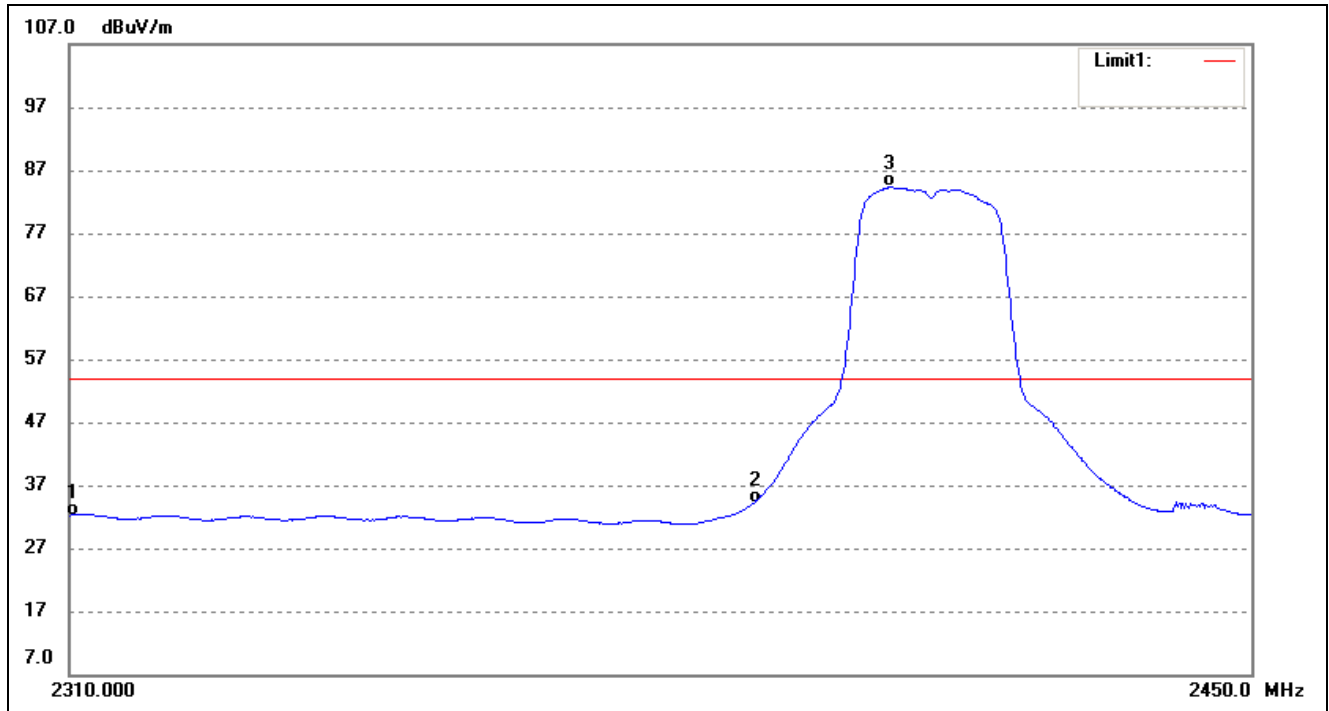

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	38.60	-6.38	32.22	54.00	-21.78	Average Detector
	2310.00	49.77	-6.38	43.39	74.00	-30.61	Peak Detector
2	2390.00	41.49	-7.26	34.23	54.00	-19.77	Average Detector
	2390.00	57.02	-7.26	49.76	74.00	-24.24	Peak Detector
3	2406.28	91.72	-7.42	84.30	/	/	Average Detector
	2406.42	101.38	-7.42	93.96	/	/	Peak Detector

802.11g-Highest Bandedge


Vertical (Worst case)

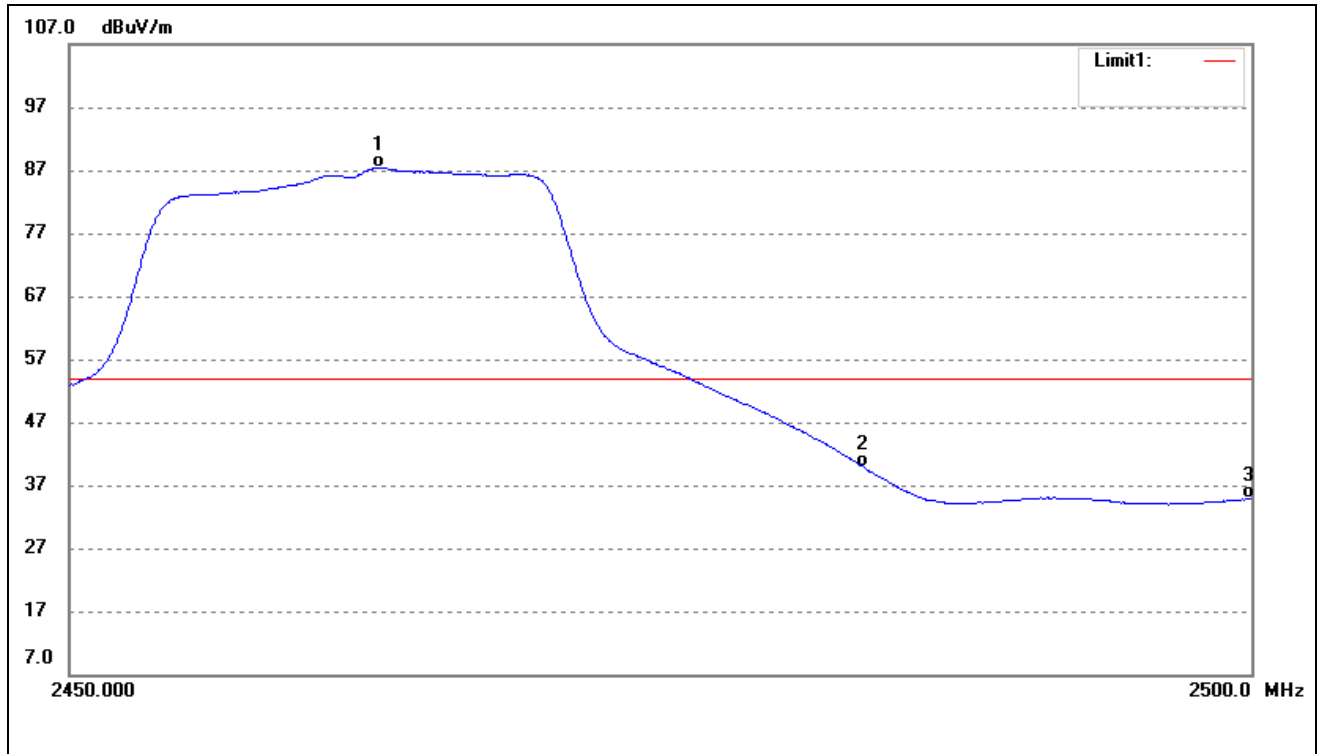

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.00	94.67	-7.31	87.36	/	/	Average Detector
	2462.90	105.45	-7.31	98.14	/	/	Peak Detector
2	2483.50	47.07	-7.28	39.79	54.00	-14.21	Average Detector
	2483.50	66.38	-7.28	59.10	74.00	-14.90	Peak Detector
3	2500.00	42.03	-7.25	34.78	54.00	-19.22	Average Detector
	2500.00	53.95	-7.25	46.70	74.00	-27.30	Peak Detector

802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

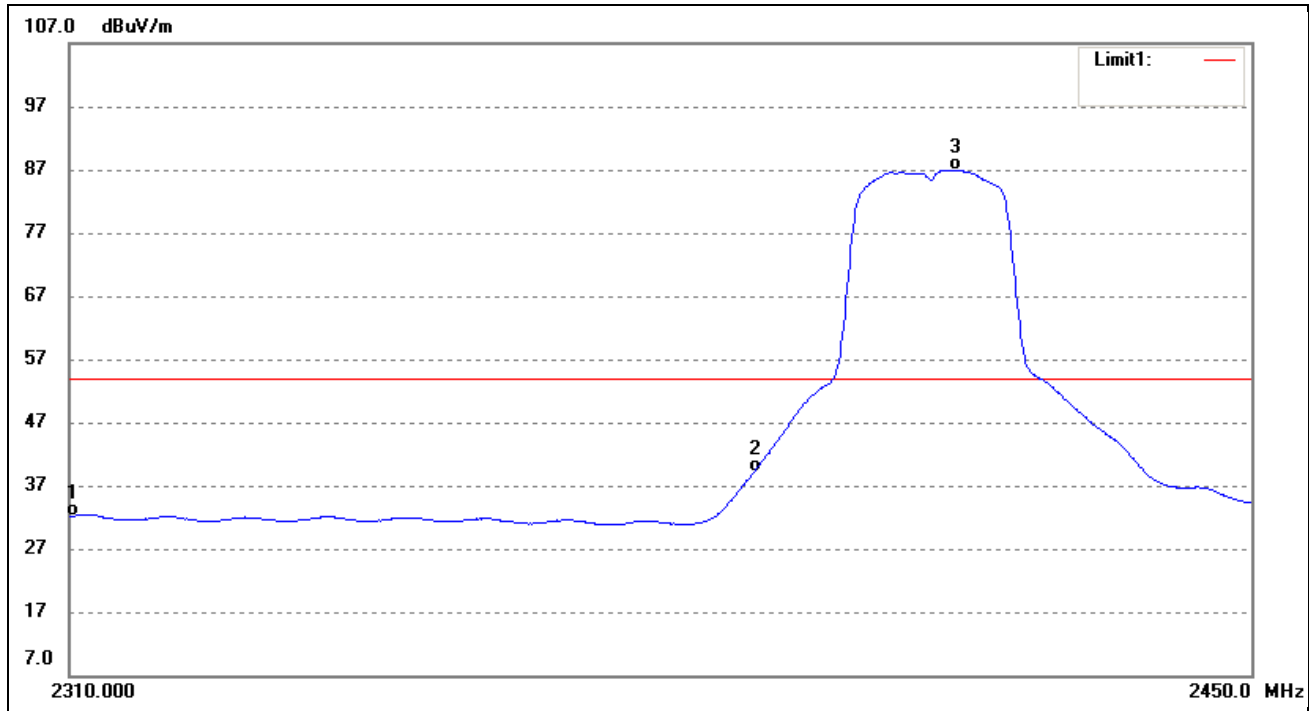

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	38.56	-6.38	32.18	54.00	-21.82	Average Detector
	2310.00	49.56	-6.38	43.18	74.00	-30.82	Peak Detector
2	2390.00	46.36	-7.26	39.10	54.00	-14.90	Average Detector
	2390.00	67.30	-7.26	60.04	74.00	-13.96	Peak Detector
3	2414.22	94.38	-7.40	86.98	/	/	Average Detector
	2414.37	105.18	-7.40	97.78	/	/	Peak Detector

802.11n-HT20-Highest Bandedge

Vertical (Worst case)


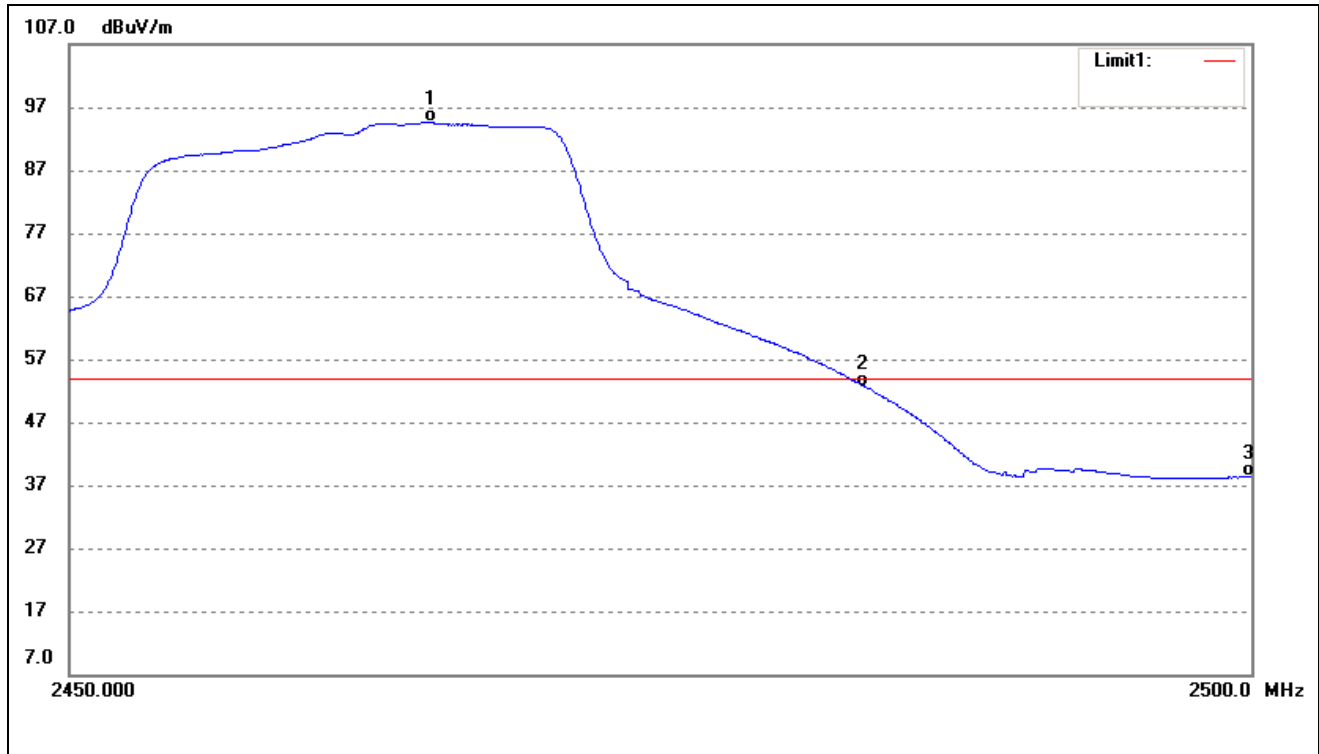



No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2465.19	101.84	-7.31	94.53	/	/	Average Detector
	2464.00	110.91	-7.31	103.60	/	/	Peak Detector
2	2483.50	59.97	-7.28	52.69	54.00	-1.31	Average Detector
	2483.50	74.74	-7.28	67.46	74.00	-6.54	Peak Detector
3	2500.00	45.63	-7.25	38.38	54.00	-15.62	Average Detector
	2500.00	58.03	-7.25	50.78	74.00	-23.22	Peak Detector

Spurious (Conducted)


802.11b



Lowest

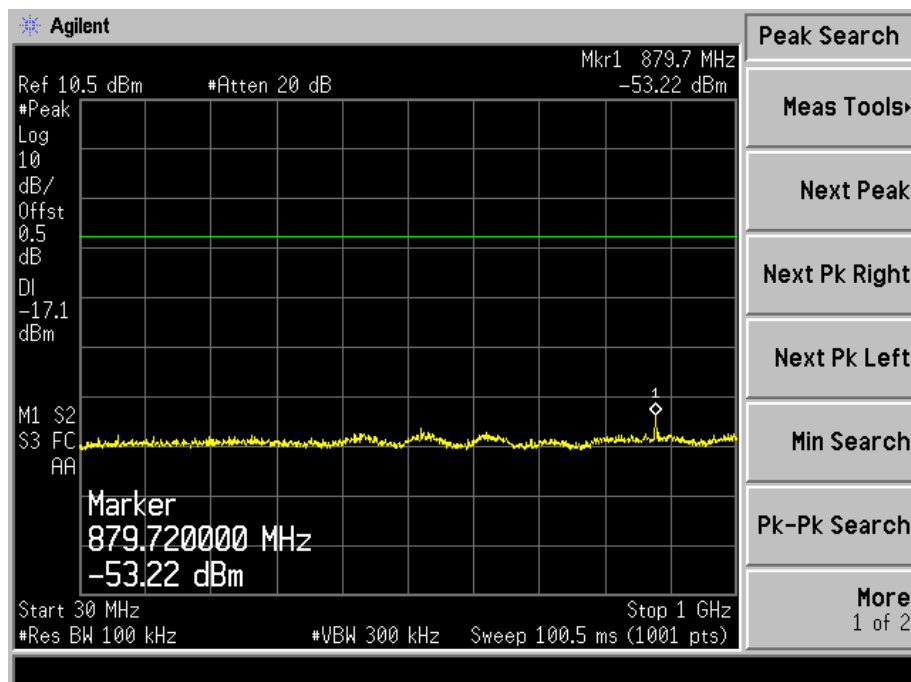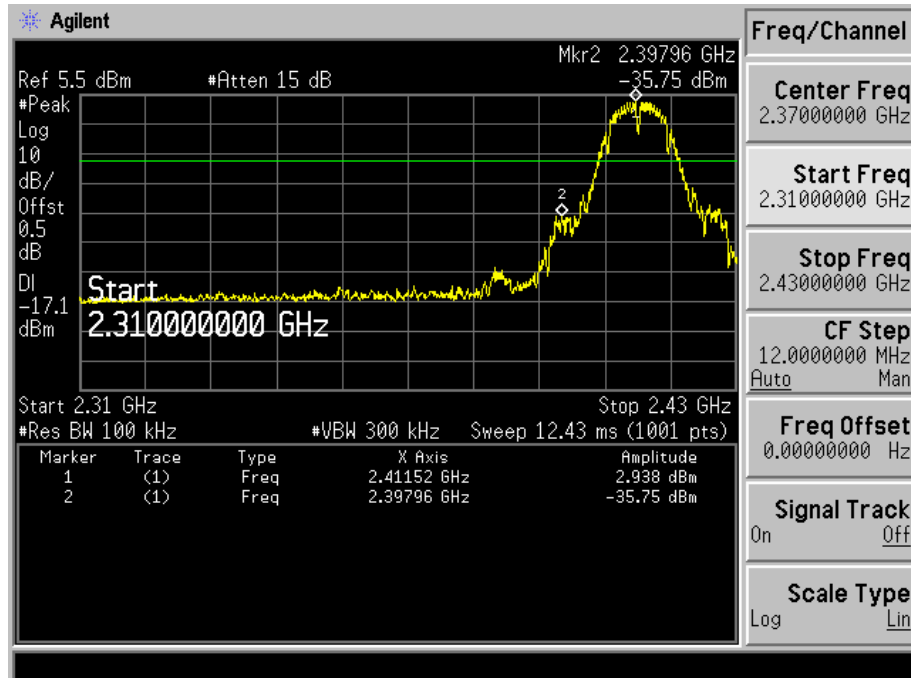

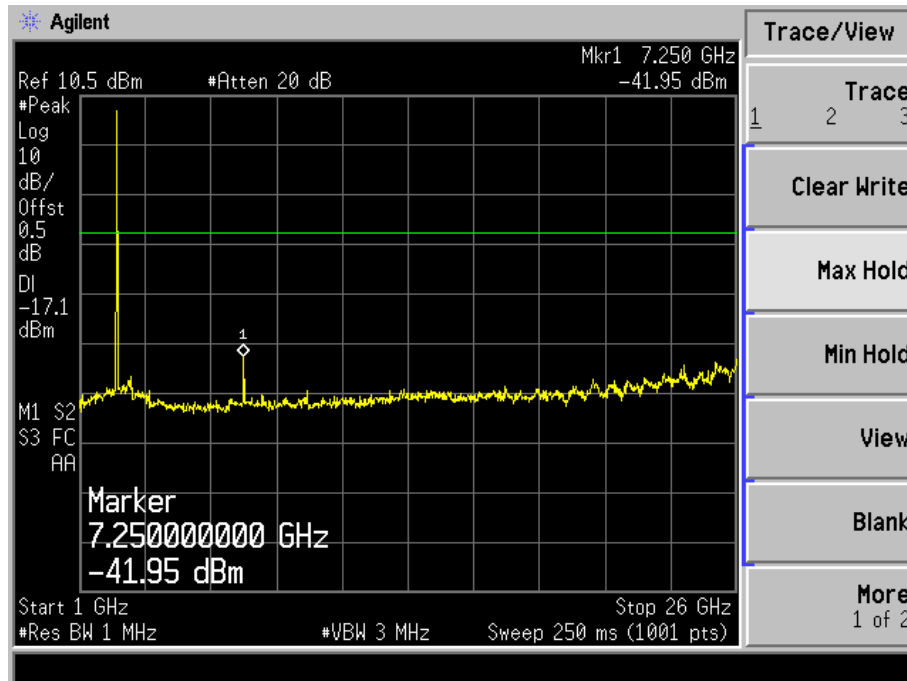

Highest


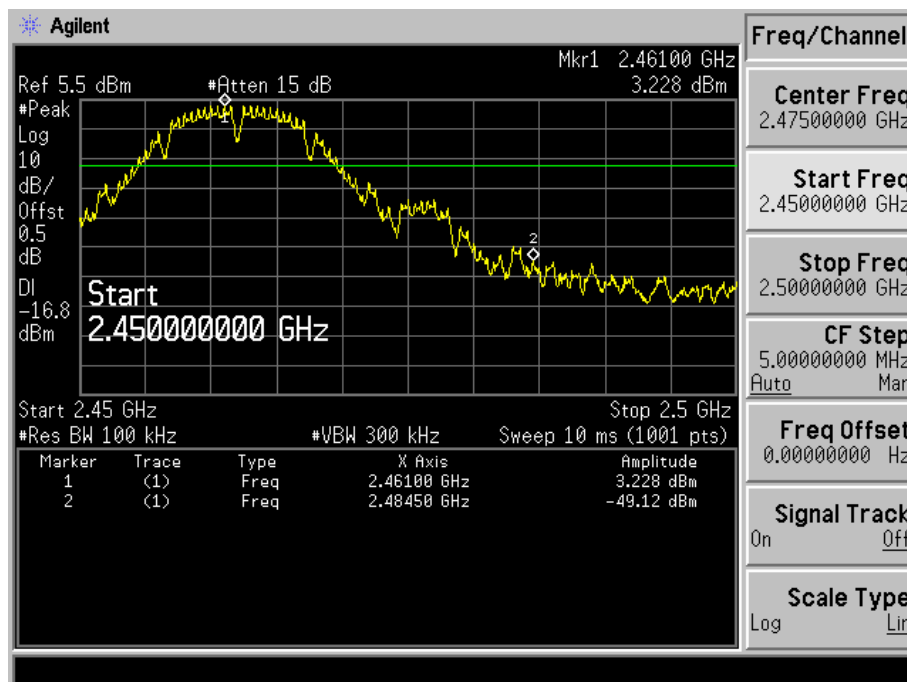


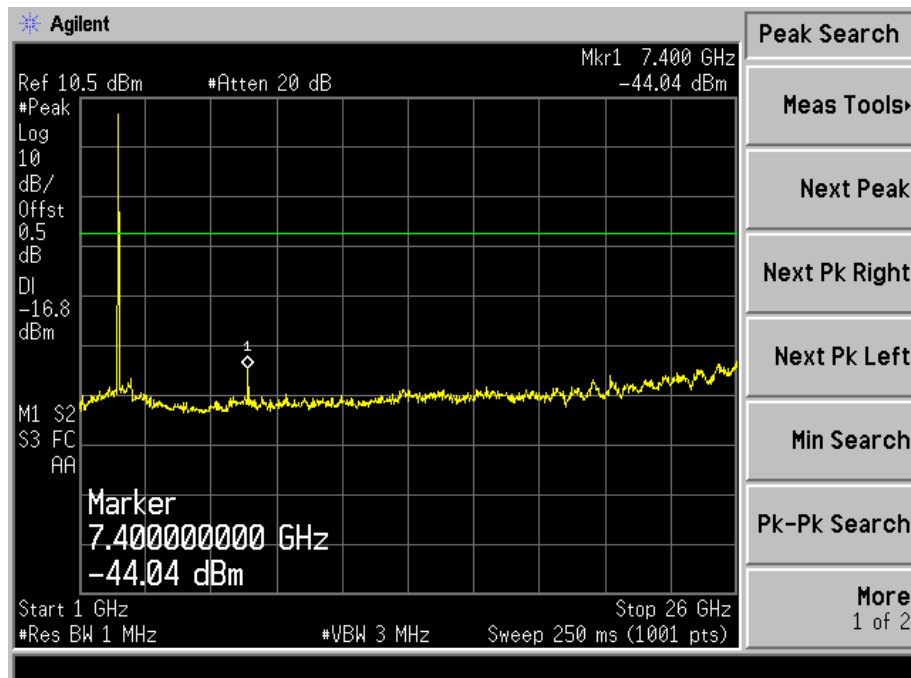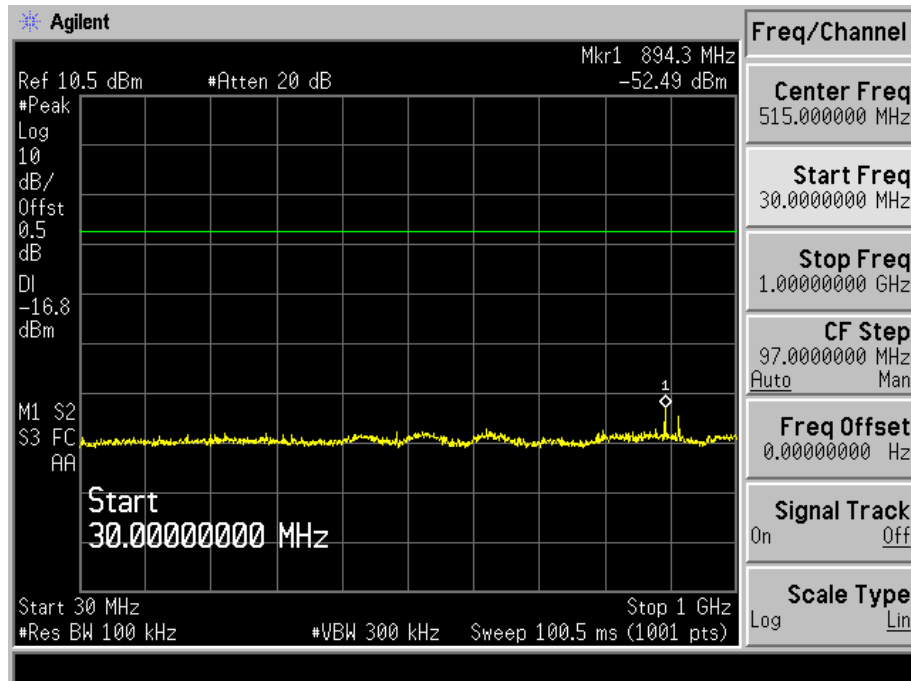


Spurious (Conducted)


802.11g



Lowest

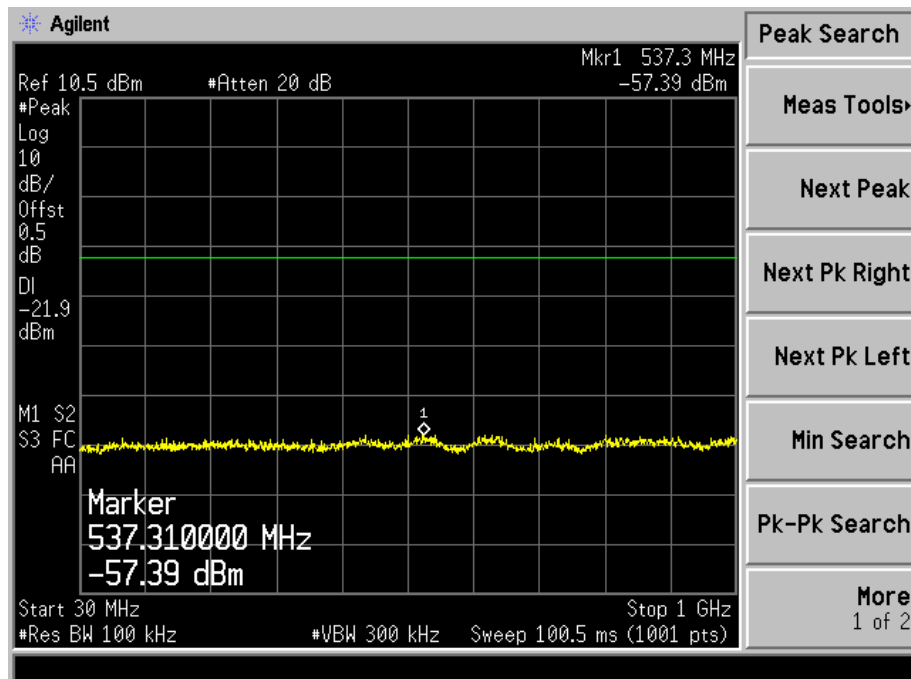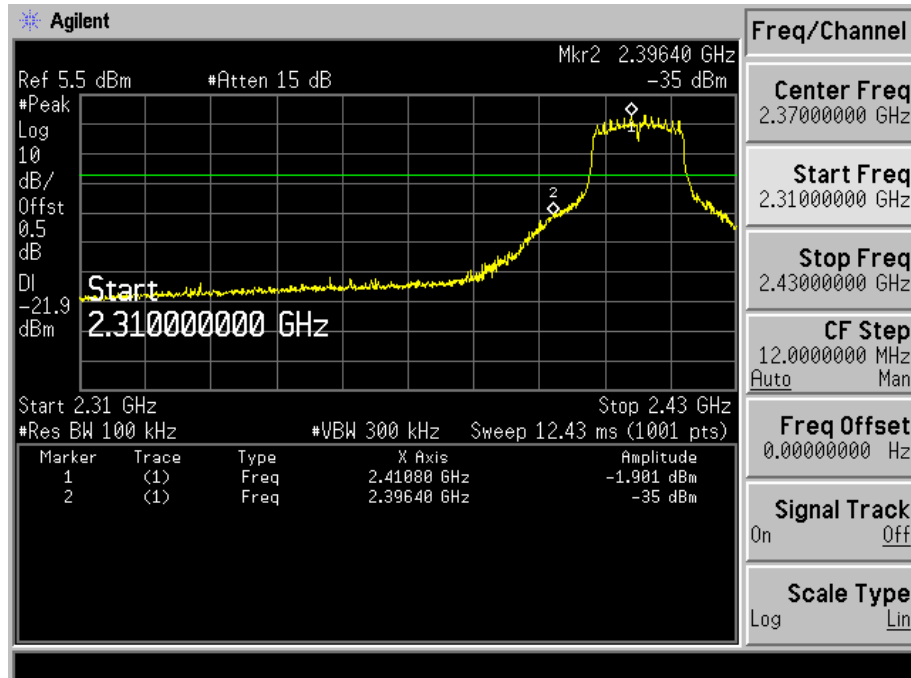

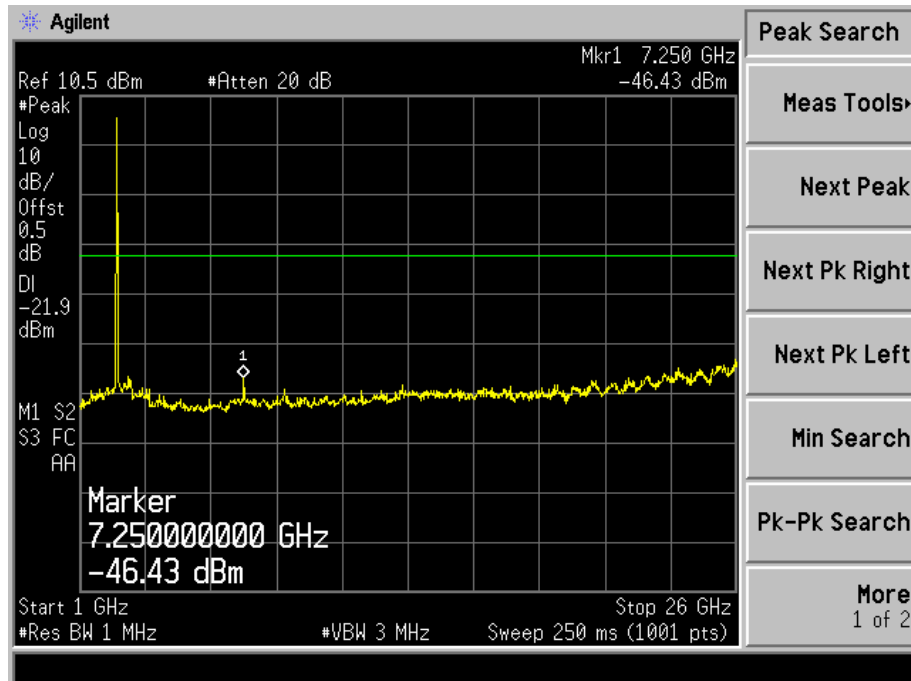

Highest


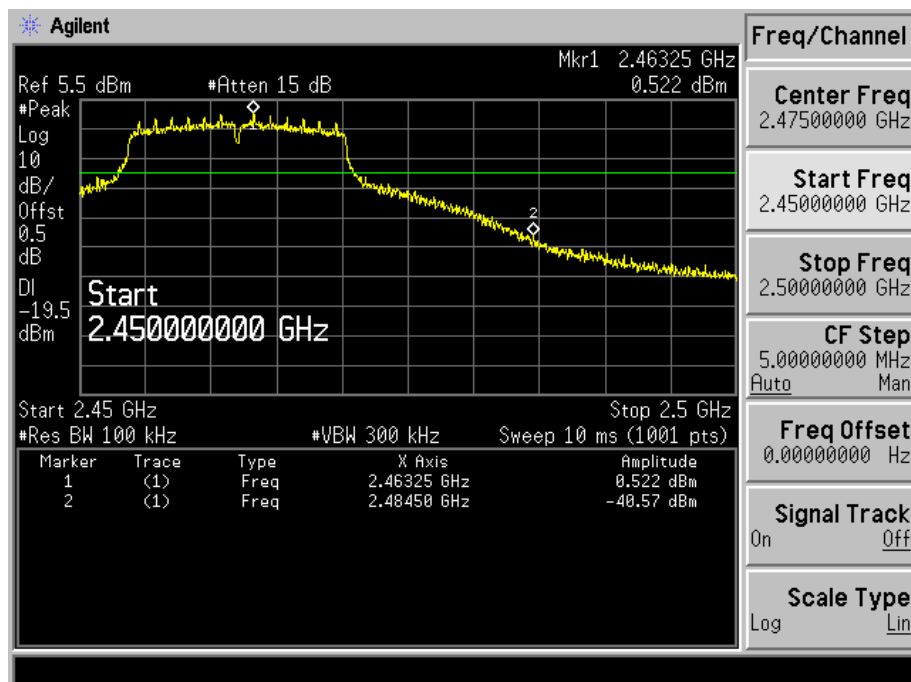


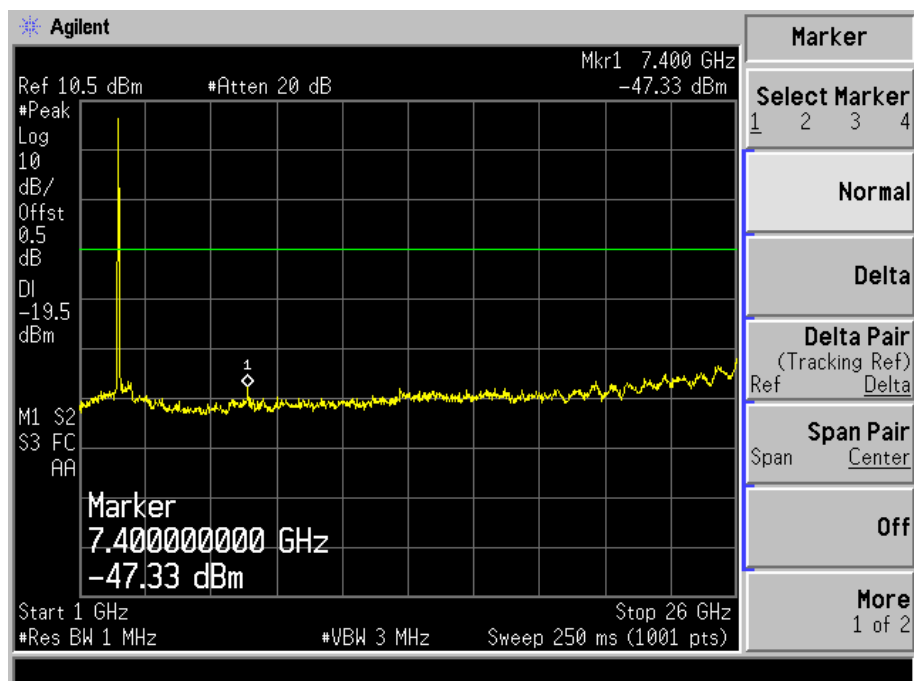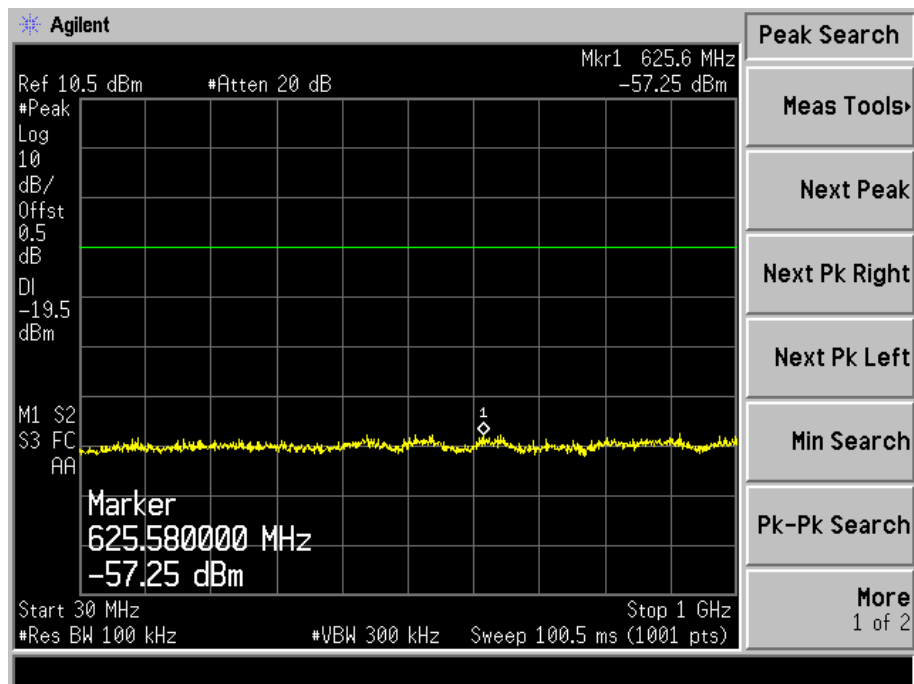


Spurious (Conducted)


802.11n-HT20



Lowest

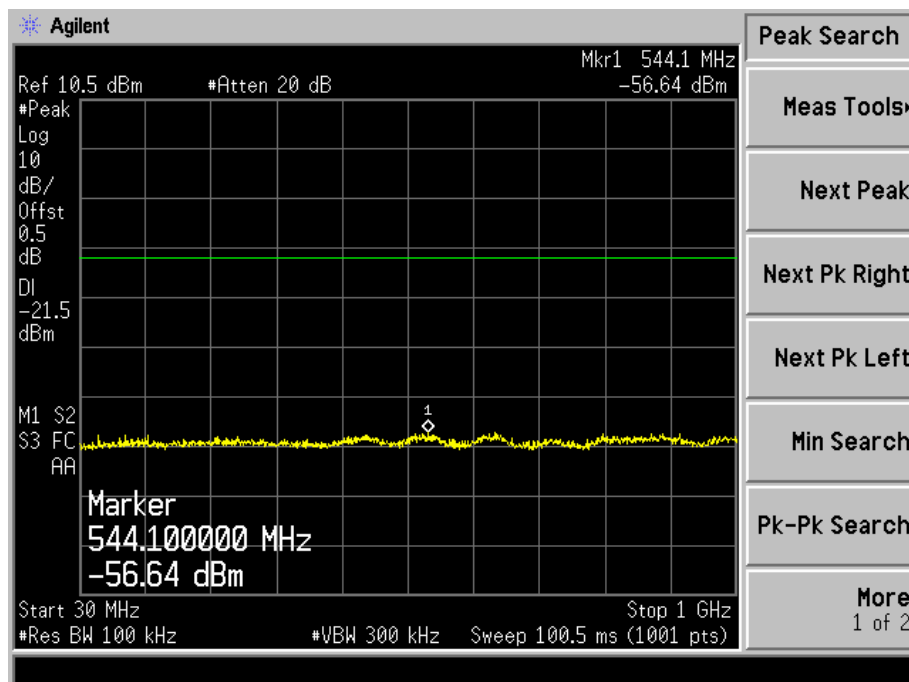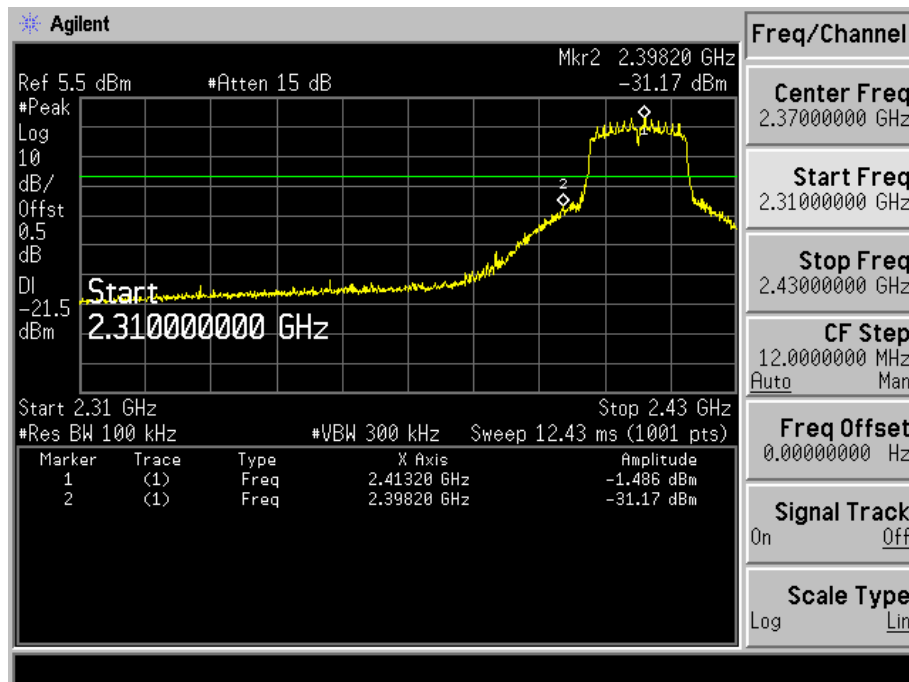

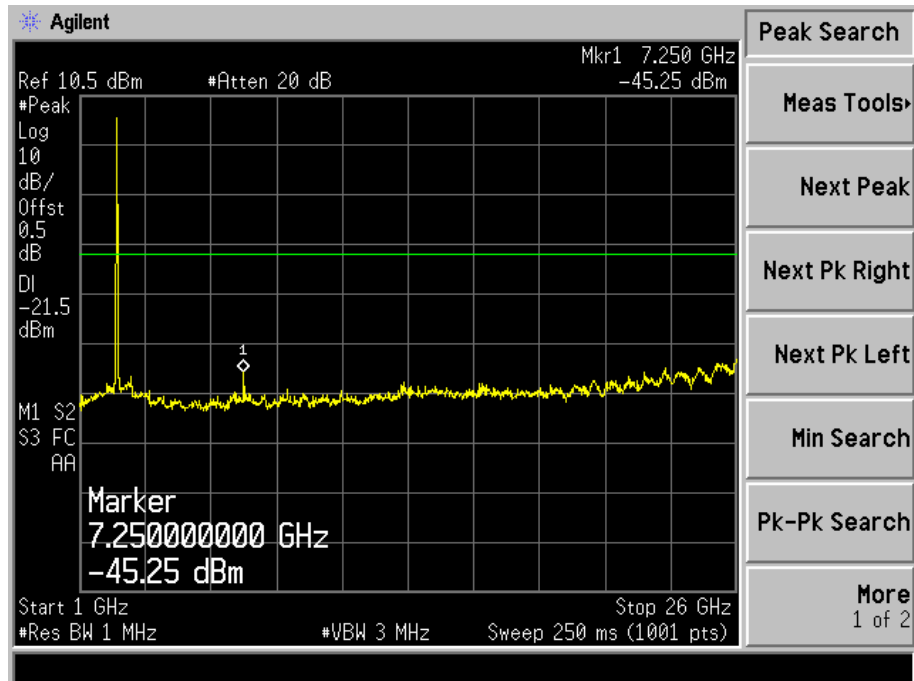

Highest

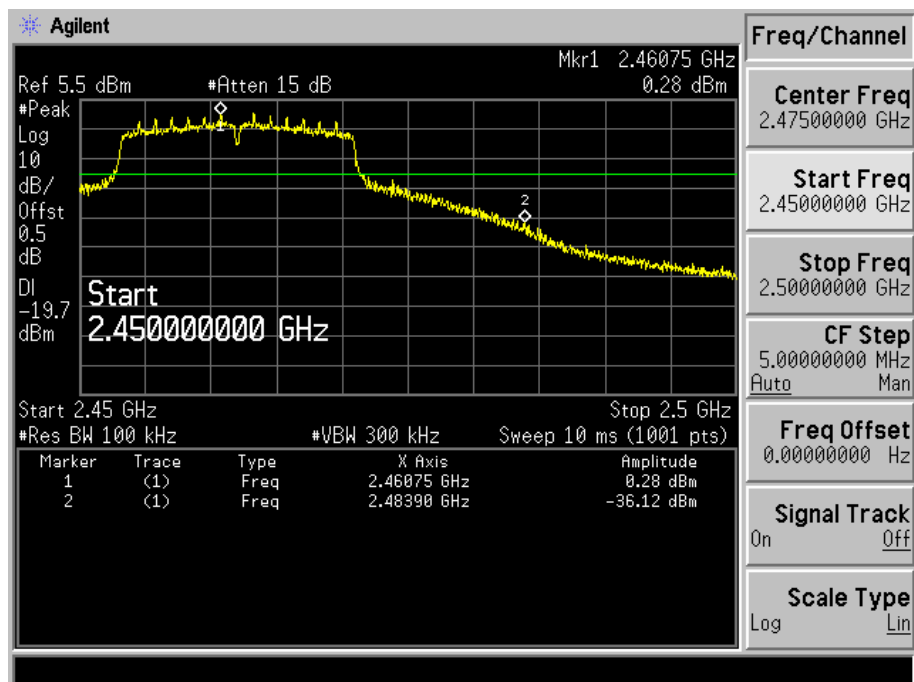

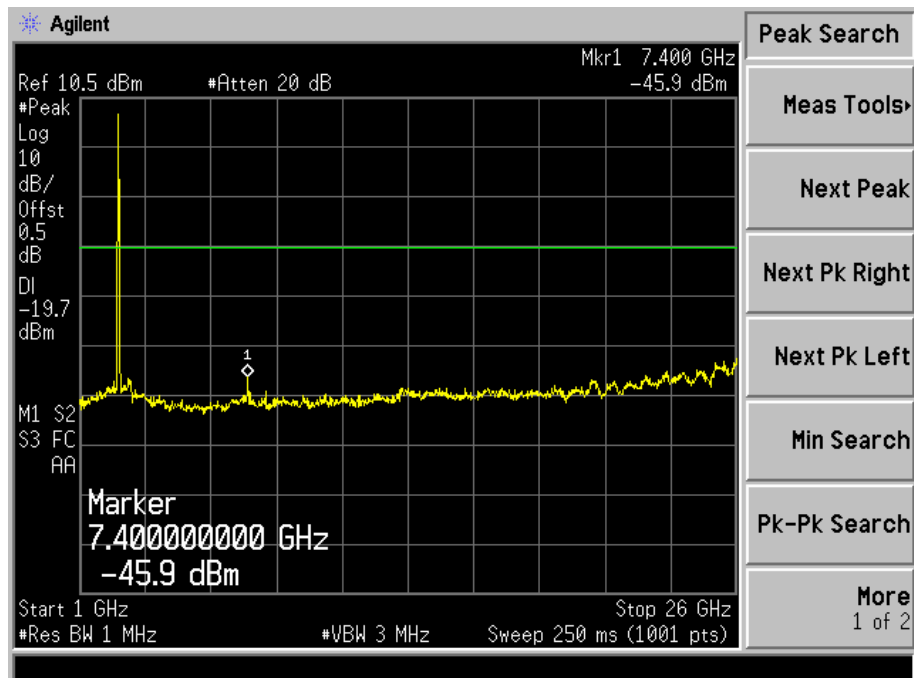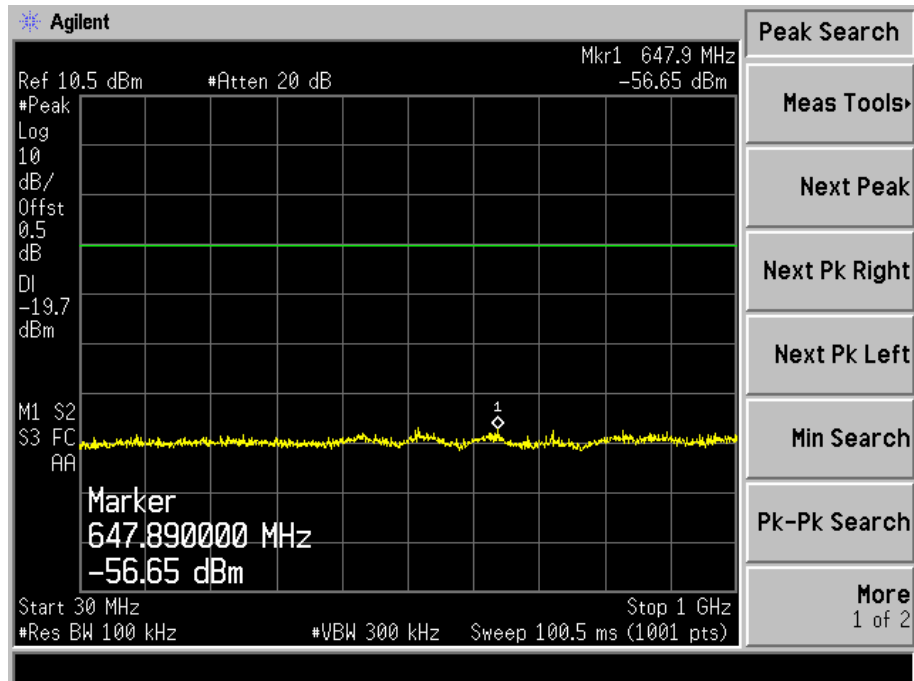


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

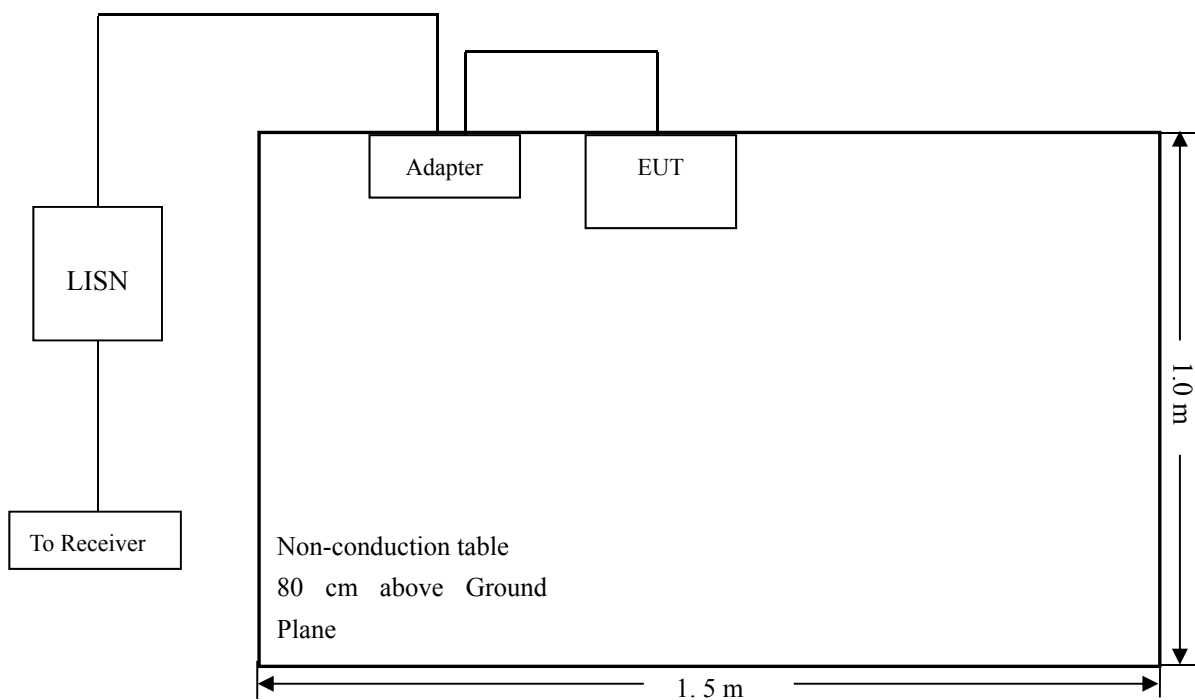

10.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

10.5 Summary of Test Results/Plots

According to the data in section 10.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


-17.27 dB at 0.4860 MHz in the Neutral mode, AVG detector, 0.15-30MHz

10.6 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data(9kHz to 30MHz)

EUT: Mobile phone
Tested Model: L4
Operating Condition: Transmitting(Wi-Fi)_worst case
Comment: Adapter DC 5V

Test Specification: Neutral

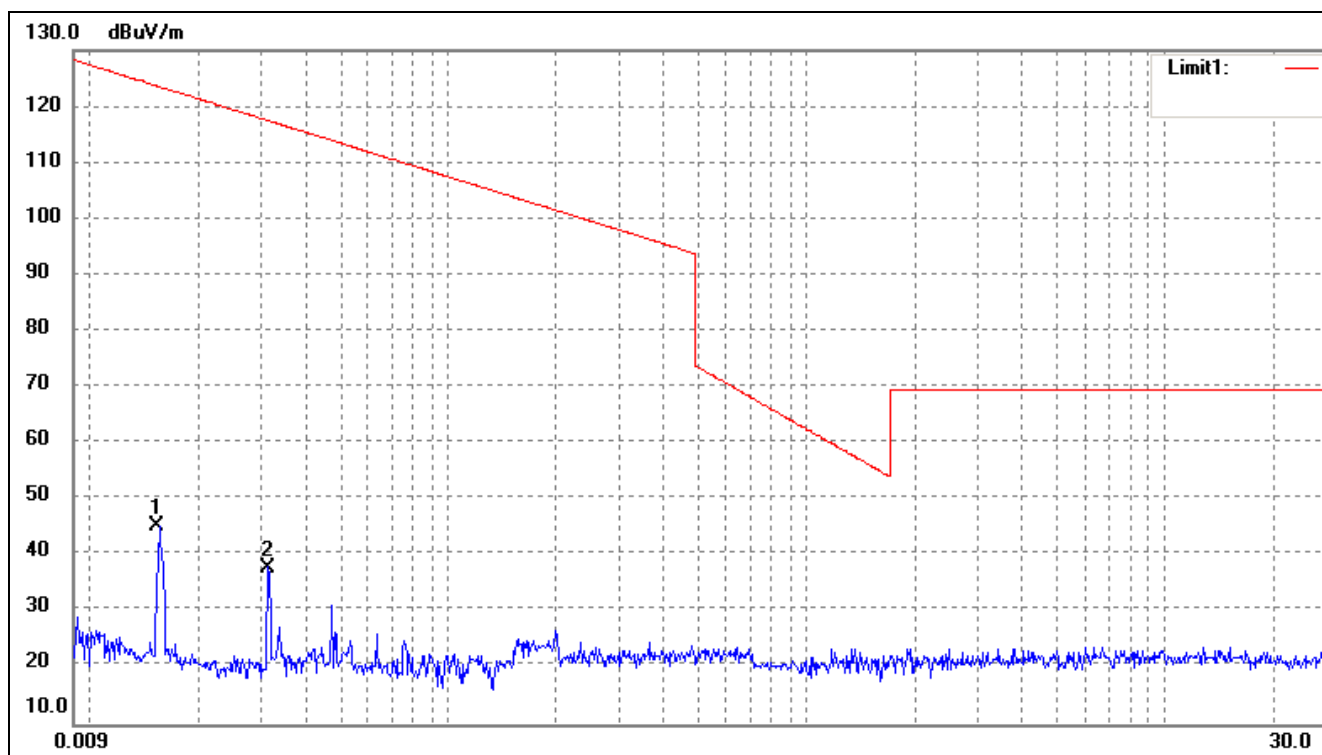


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	0.0154	45.11	0.00	45.11	123.67	-78.56	45	100	peak
2	0.0313	37.90	0.00	37.90	117.55	-79.65	52	100	peak

Plot of Conducted Emissions Test Data(30MHz to 1GHz)


EUT: Mobile phone
Tested Model: L4
Operating Condition: Transmitting(Wi-Fi)
Comment: Adapter 120V/60Hz_worst case

Test Specification: Neutral

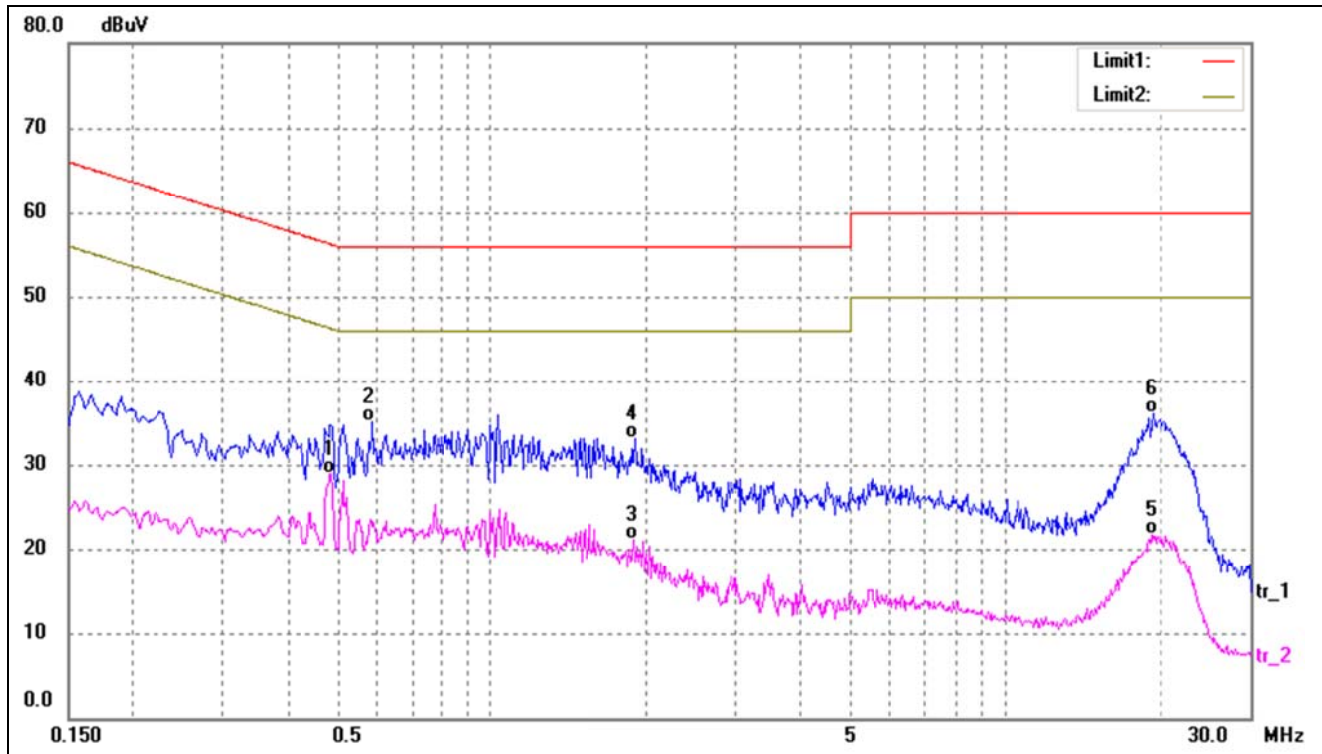

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.4860	19.17	9.80	28.97	46.24	-17.27	AVG
2	0.5860	25.32	9.79	35.11	56.00	-20.89	QP
3	1.8900	11.45	9.74	21.19	46.00	-24.81	AVG
4	1.9060	23.31	9.74	33.05	56.00	-22.95	QP
5	19.2420	11.97	9.67	21.64	50.00	-28.36	AVG
6	19.5100	26.37	9.67	36.04	60.00	-23.96	QP

Test Specification: Line

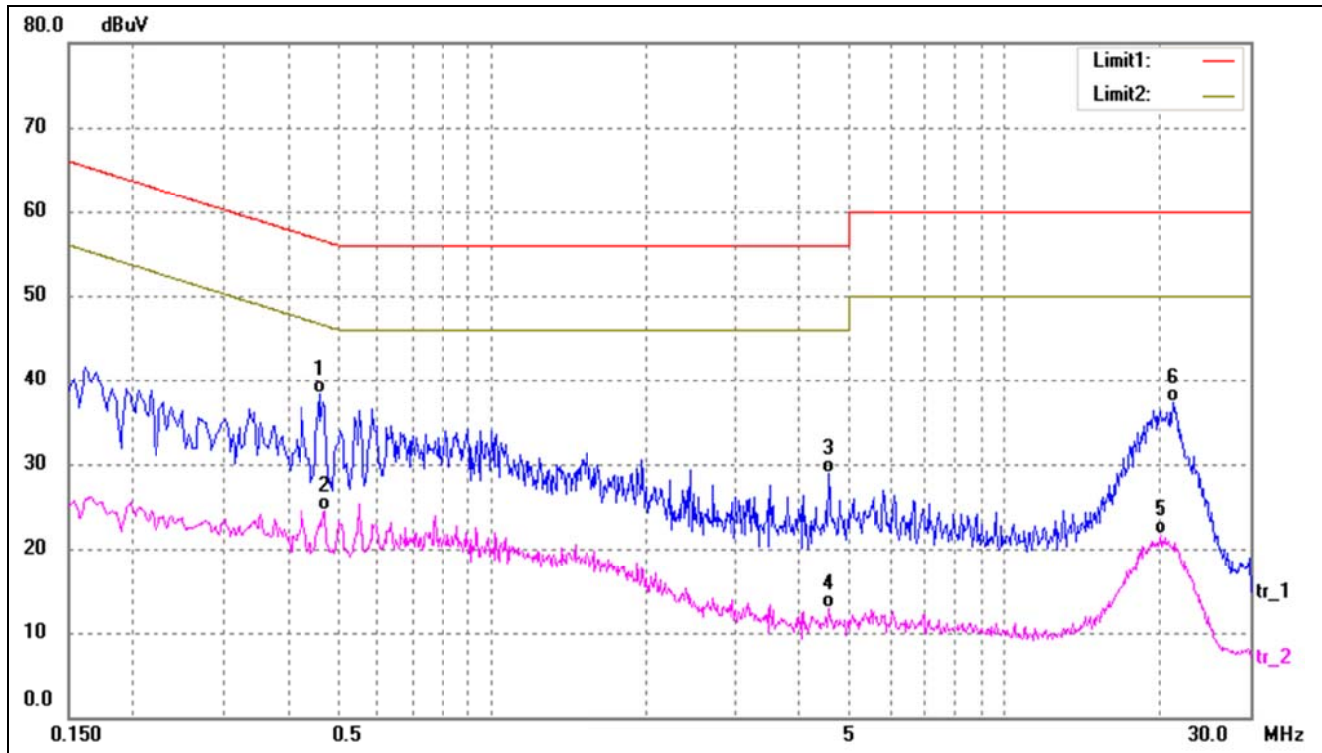

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.4620	28.56	9.80	38.36	56.66	-18.30	QP
2	0.4740	14.80	9.80	24.60	46.44	-21.84	AVG
3	4.5300	19.22	9.67	28.89	56.00	-27.11	QP
4	4.5300	3.23	9.67	12.90	46.00	-33.10	AVG
5	20.2340	12.12	9.68	21.80	50.00	-28.20	AVG
6	21.2620	27.63	9.68	37.31	60.00	-22.69	QP

***** END OF REPORT *****