




Testing Cert #1007.01

Atlas Compliance & Engineering, Inc.
1792 Little Orchard Street
San Jose, CA 95125
Phone 408.971.9743
Fax 408-971-9783
Web www.atlasce.com



Atlas Compliance & Engineering, Inc.

FCC Test Report

FCC CFR 47 Part 15.207, 15.209 and 15.247 COMPLIANCE

• • • • • • • • • •

*Stack Labs, Inc.
10054 Pasadena Ave.
Cupertino, CA 95014*

*Product:
Stack Downlight
Model:
BR3001E2626Z*

Contains FCC ID: 2AGFX-STACK001
Test Report Number: 1603STKmodule_247
Date of Report: January 20, 2016

This report contains 31 pages and may be reproduced in full only.
Partial reproduction may only be done with the written consent of
Atlas Compliance & Engineering, Inc.





Table of Contents


Table of Contents	2
General Information	4
Test Equipment.....	5
Test Configuration.....	6
BR3001E2626Z Oscillator Overview:	6
BR3001E2626Z Oscillator Block Diagram.....	6
BR3001E2626Z Pulsed Operation:	7
Testing:.....	8
EUT Description / Note:.....	9
EUT Support Program	9
EUT Modifications for Compliance	9
EUT Support Devices.....	10
I/O Ports and Cables.....	10
Equipment Under Test.....	11
Equipment Block Diagram	17
Test Setup (Radiated Emissions).....	18
Test Setup (Radiated Emissions).....	19
Test Setup (Radiated Emissions).....	20
Test Setup (Conducted Emissions).....	21
Test Methods for Emissions	22
Conducted Emission Testing	22
Temperature and Humidity	22
Sample Calculations	23
FCC Part 15 Subpart C 15.207 and 15.209 Limits	24
Report of Measurements Radiated Data	25
Report of Measurements Maximum Unwanted Emission Levels Data	26
Radiated Data	28
Conducted Data for 15.207 Line	29
Conducted Data for 15.207 Neutral.....	30
COMPLIANCE VERIFICATION REPORT	31
Table 1 – Support Equipment Used For Test	10
Table 2 – EUT Port Termination's	10
Table 3 – Host Port Termination's	10
Table 4 – Conducted Limits	24
Table 5 – Radiated Emission Limits, General Requirements	24
Table 7 – Radiated Data	28
Table 8 – Line Scan Data	29
Table 9 – Neutral Scan Data.....	30
Figure 1 – Test Setup Diagram.....	17
Figure 2 – Line Scan.....	29
Figure 3 – Neutral Scan.....	30



Change History


1603STKmodule_247

Rev.	Change Description	Reason/Application	Date	Appvd.
D	Report for review	Applies to BR3001E2626Z	January 20, 2016	MEB
C1	Release of report	Applies to BR3001E2626Z	January 27, 2016	MEB



General Information


Test Report Number:	1603STKmodule_247
Date Product Tested:	January 8-19, 2016
Date of Report:	January 20, 2016
Applicant:	Stack Labs, Inc. 10054 Pasadena Ave. Cupertino, CA 95014
Contact Person	Mr Kent S Whiting
Equipment Tested:	Stack Downlight
Trade Name:	Stack
Model:	BR3001E2626Z
Purpose of Test:	To demonstrate the compliance of the Stack Downlight, BR3001E2626Z, with the requirements of FCC CFR 47 Part 15 Rules and Regulations to the limits of Subpart C 15.207, 15.209 and 15.247 using the procedure stated in ANSI C63.10.
Frequency Range Investigated:	9 KHz to 24.835 GHz
Contains FCC ID:	2AGFX-STACK001
Test Site Locations:	Field Strength Measurement Facility: Atlas Compliance & Engineering, Inc. 726 Hidden Valley Road Royal Oaks, California 95076 Conducted Interference Measurement Facility: Atlas Compliance & Engineering, Inc. 1792 Little Orchard Street San Jose, California 95125
Test Personnel:	Bruce Smith EMC Engineer



Test Equipment

The following list contains the test equipment that was utilized in making the measurements in this report.

Description _ Model	Serial	Manufacturer	Calibration Due
BiLog Antenna _ CBL6112B	2783	Chase Electronics Ltd.	5/8/17
Active Loop Antenna _ 6502	9108-2669	EMCO	12/28/17
Double Ridge Guide Horn Antenna _ 3115	9003-3340	EMCO	12/14/17
LISN _ 4825/2	9808-1088	EMCO	12/2/16
Pre amp 9kHz-2GHz _ CPA9231A	3259	Schaffner	10/1/16
EMI Test Receiver 9 kHz - 2500 MHz _ ESPC	DE15934 845296/0024	Rohde & Schwarz	2/19/16
EMI Test Receiver 9 kHz - 2500 MHz _ ESPC (bat)	DE14459 843820/0015	Rohde & Schwarz	2/17/16
Pre amp 1Ghz-26.5GHz _ 8449B	3008A00910	HP	2/24/16
Spectrum Analyzer 100Hz-22GHz _ 8566B	2542A13058 (IF) 2637A03426 (RF)	HP	2/18/16
Quasi-Peak Adapter _ 85650A	2521A00716	HP	2/18/16
Temperature and humidity probe _ RH-20F	200-97-082591	Omega Engineering	3/31/16
Chamber – HPI160SCable 50 ft.	0002	Semflex	12/10/16
RF Cable 75 ft. _ BM95012.900	109	Bracke	4/27/16




Test Configuration


Customer: Stack Labs, Inc.
Test Date: January 8-19, 2016
Specification: FCC CRF 47 Part 15.247 Limits,
ANSI C63.10 Methods

BR3001E2626Z Oscillator Overview:

The Stack Downlight is a responsive LED lamp that adjusts to ambient light, movement, and its environment. It does this using built in sensors, mesh connections to other Stack lamps, connections to the cloud, and processing intelligence to couple this all together. In order to do all this it employs multiple oscillators. From the rectified and filtered line voltage (120VAC) a Buck Switch Mode Power Supply (SMPS), converter A, converts down to a DC rail voltage, this converter operates at 50 KHz or less depending on load. The Rail A is used to feed the LED Driver and Converter B. Converter B is another SMPS that also operates at 50 KHz. Converter B's rail feeds the MCU and transmitter that operate at 32MHz and 2.4GHz respectively. The MCU also controls the Driver which operates at 25 KHz.

BR3001E2626Z Oscillator Block Diagram

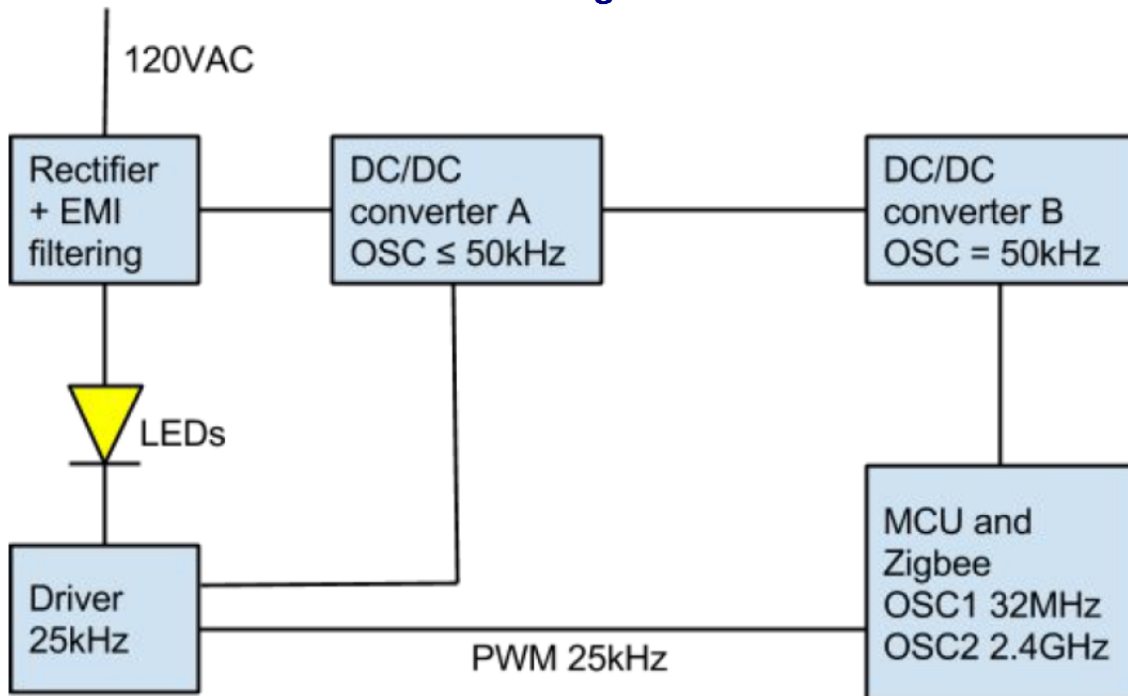



BR3001E2626Z Pulsed Operation:

§ 15.35(c)

Unless otherwise specified, e.g. §15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.


One of the main features of the ZigBee protocol is that it is designed for low power consumption so that battery operated devices can utilize it for communication without quickly draining their resources. With that in mind ZigBee transmitters are operated as pulsed transmitters only putting power out into the air when it is required for them to. This pulsed operation is thus used for getting a realistic average value of the signal being put out.

Our Worst case operation will be during our Over The Air (OTA) update procedure, where we utilize our biggest packets and continually transmit the data needed to update the software on the device. During this procedure we transmit one large packet (120 Bytes) followed by a smaller packet (50 Bytes) and then repeat this until all the data is sent. At the 250 KB/s data rate we operate at, each byte means 32us of transmission air time. Between sends it takes our processor an average of 32ms to process and queue up the next data to be sent.


To do this on a 100ms timescale the sequence of events as requested in 15.35(c) would look like this:

120 Bytes(3.84ms) 32ms ---- Processing 50 ---- Bytes (1.6ms) 32ms ---- Processing 120 ---- Bytes(3.84ms) ----

$$DutyCycle = \frac{T_{on}}{T_{on}+T_{off}} = \frac{3.84ms+1.6ms+3.84ms}{100ms} = 9.28\%$$




As can also be seen when capturing data on a spectrum analyzer:

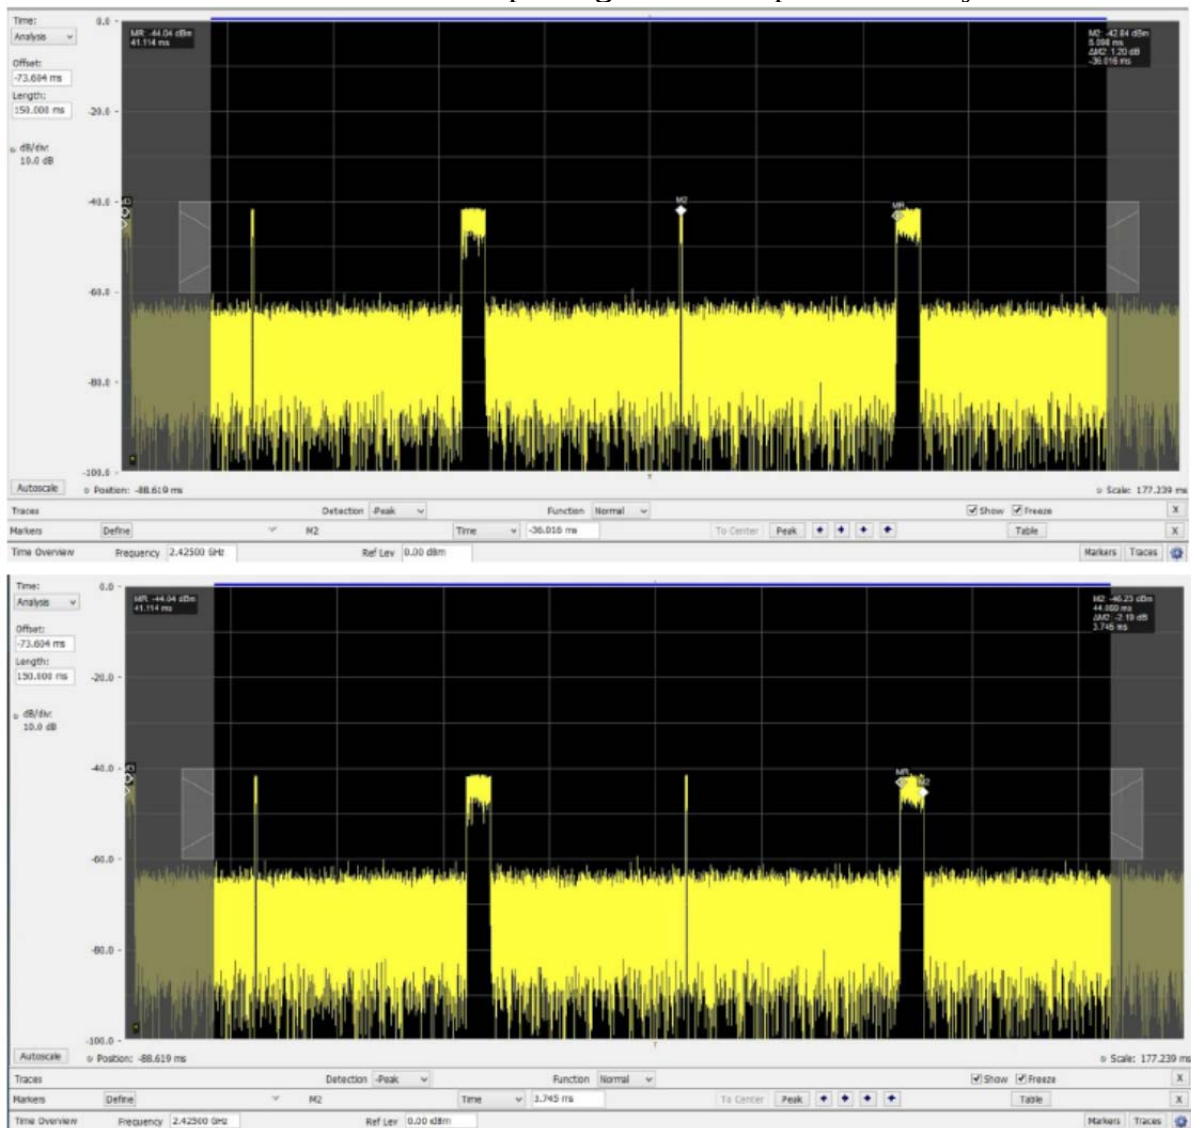

Testing:

In order to create this OTA scenario though another device must be present for communication. As the second device's output would corrupt the test results, we instead loop a data transmission at 10% duty cycle to replicate the same resulting average value. The setup specifics are 76 Byte Payload with a 22ms wait interval between packets.

$$DutyCycle = \frac{2.432ms}{2.432ms + 22ms} = 9.95\%$$



ANSI C63.10 section 7.5 Procedure for determining the average value of pulsed emissions

Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval. The following procedure is an example of how the average value may be determined. The average field strength may be found by measuring the peak pulse amplitude (in log equivalent units) and determining the duty cycle correction factor (in dB) associated with the pulse modulation as shown in Equation (10):

$$\delta(\text{dB}) = 20\log(\Delta) \quad (10)$$

where

δ is the duty cycle correction factor (dB)

Δ is the duty cycle (dimensionless)

Duty cycle correction factor therefore is $20\log(9.95) = 19.95\text{dB}$

EUT Description / Note:


The EUT, BR3001E2626Z, a Stack Downlight was powered up and in a continuous transmitting mode at full power for fundamental emissions measurements. The EUT contains a ZigBee module and interface was through the host circuits to send commands to place it in the different operating modes. The EUT was running at a 10% duty cycle for all other emission measurements to simulate a normal condition of operation. The power for the EUT was supplied by the AC mains.

EUT Support Program

The EUT was tested at lowest channel, 2405 MHz, mid channel, 2445 MHz, and highest channel, 2480 MHz in a continuous transmit mode. The transmitter was at full power and 100% modulation. The EUT was then operated in 10% duty cycle to find worst case levels of unwanted emissions. Preliminary radiated tests were performed to identify which operating mode produced the worst case (maximum) transmit level. Using this mode the module was tested to find maximum transmit level. Tests were performed with the measurement antenna in both horizontal and vertical orientations and the EUT in all three orthogonal orientations.

EUT Modifications for Compliance

There were no modifications performed on the EUT. The test results state the emission levels of the EUT in the condition as it was received on January 8, 2016.



EUT Support Devices

Table 1 – Support Equipment Used For Test

Model:	Description:	S/N	FCC ID#
NA	Light bulb clip mount socket	NA	NA


I/O Ports and Cables

Table 2 – EUT Port Termination's

I/O Port	Cable Type	Length	Connector	Termination
AC power	Unshielded twin lead	1.5 m	IEC	AC mains

Table 3 – Host Port Termination's



I/O Port	Cable Type	Length	Connector	Termination
NA				





Equipment Under Test


The photographs below show the condition of the EUT for test.




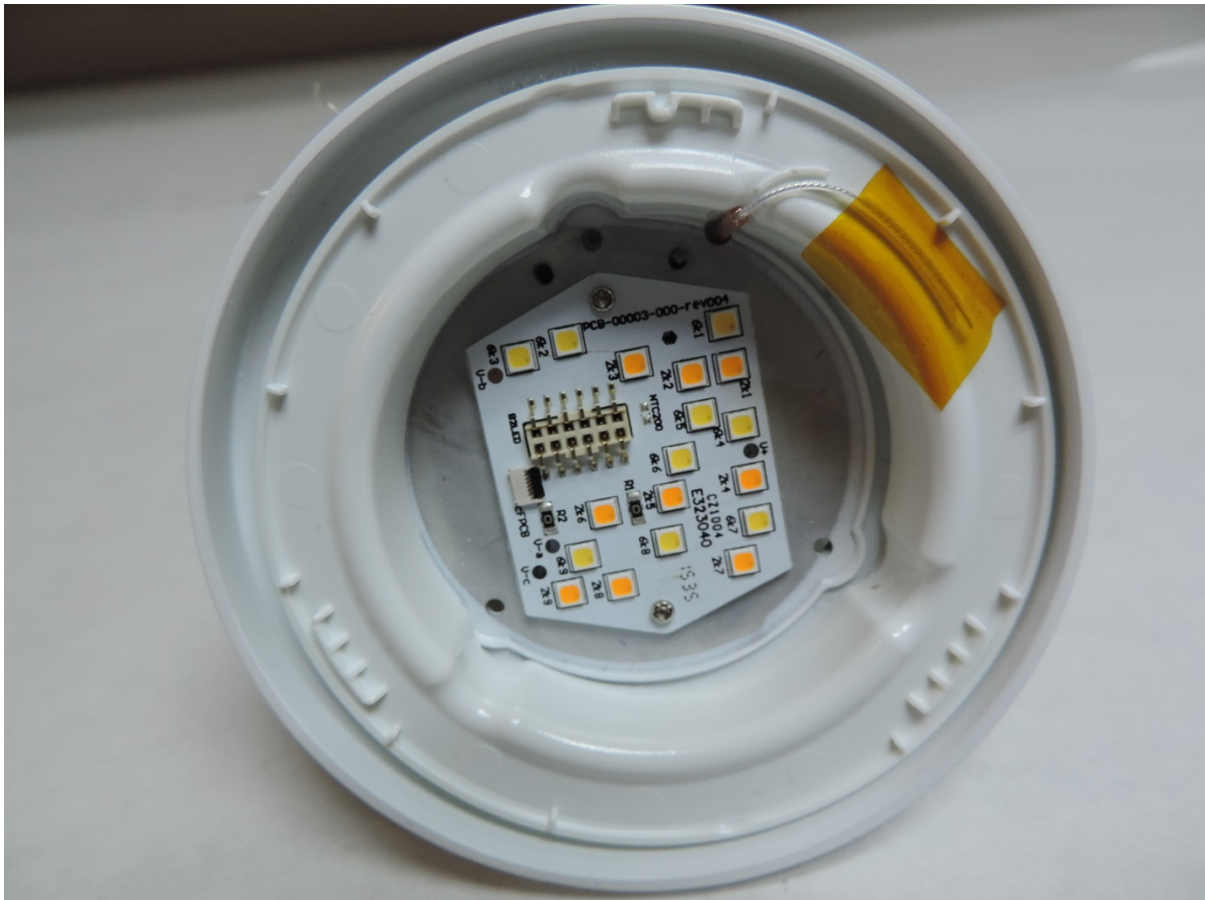


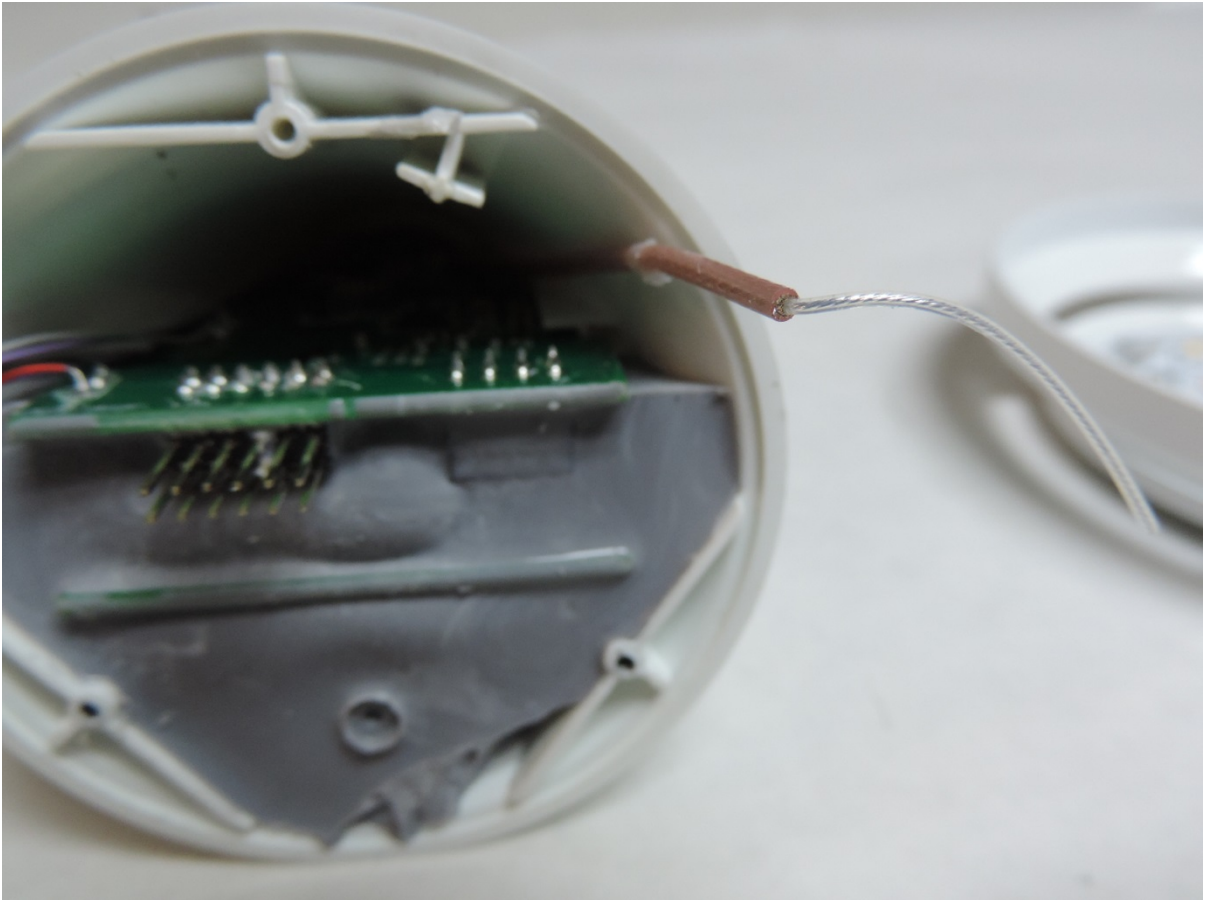

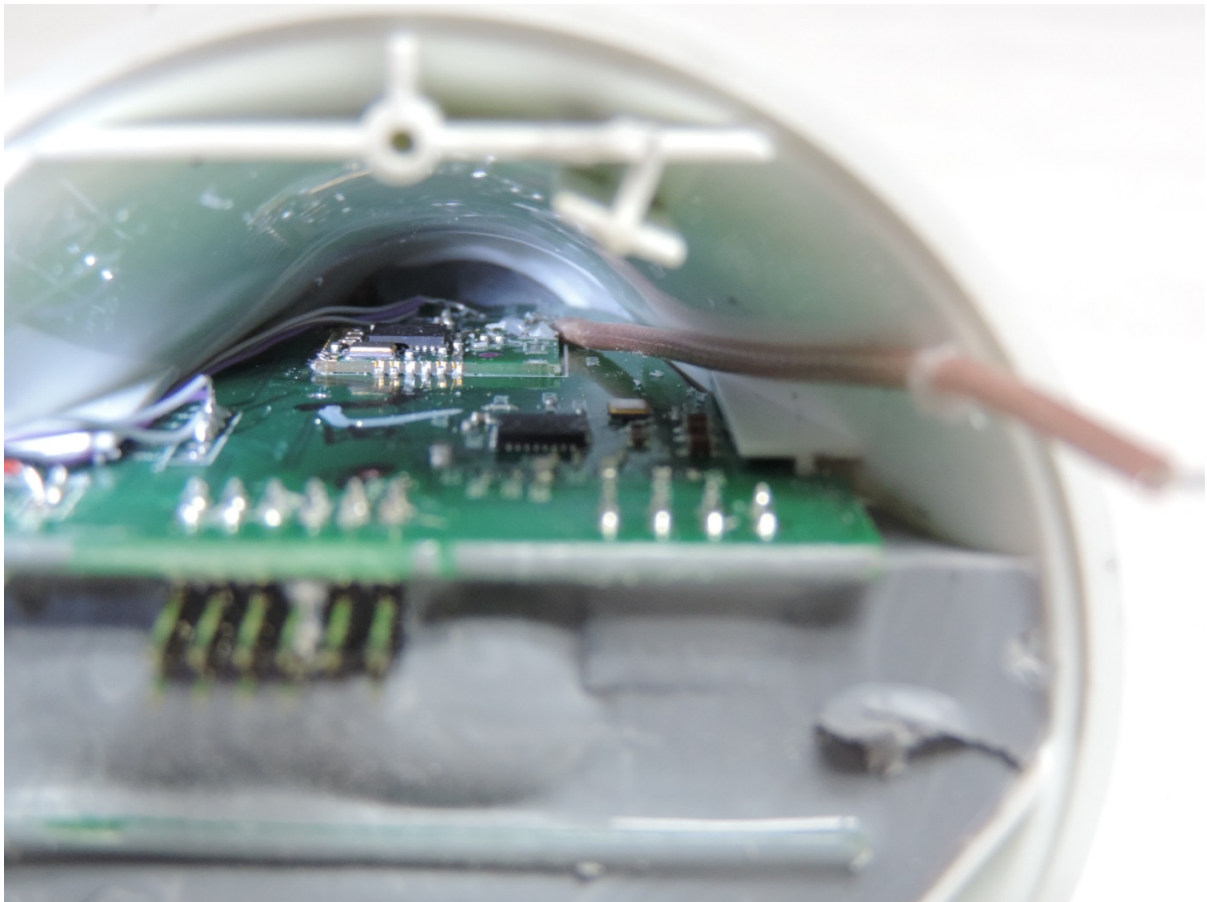

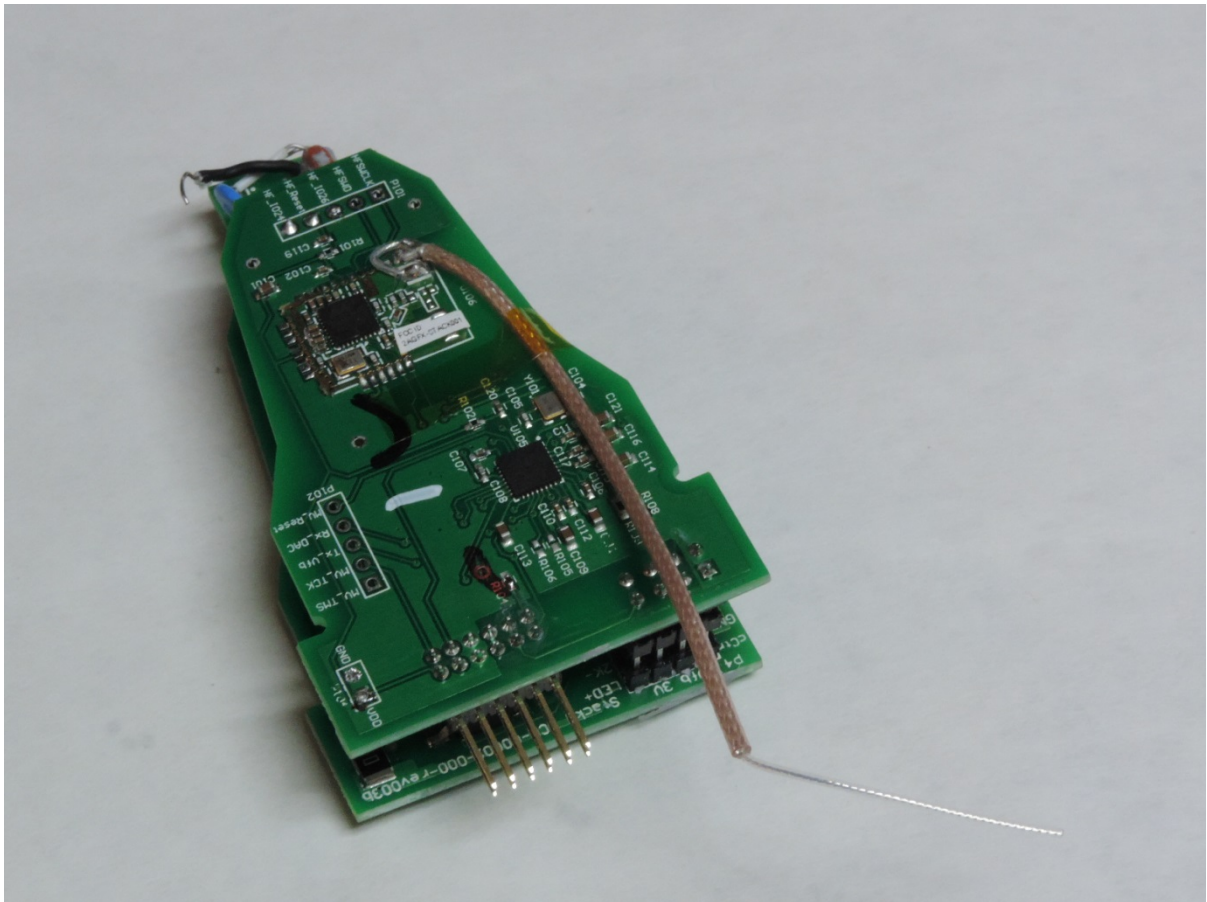

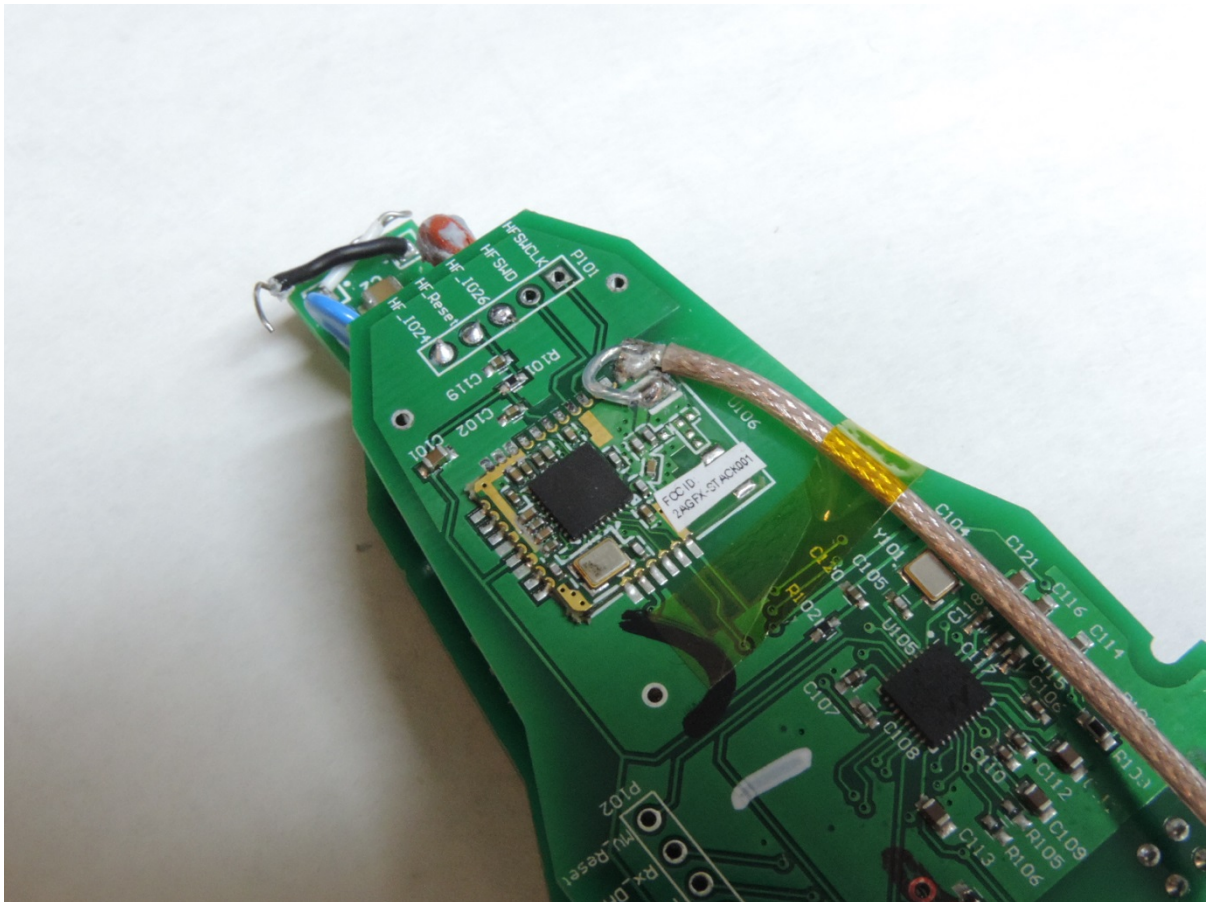




Equipment Block Diagram


Following is the block diagram of the test setup. Refer to TEST CONFIGURATION pages for port connections and information.

Figure 1 – Test Setup Diagram

AC Mains


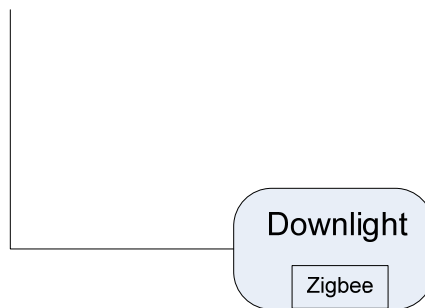



**EUT:
Downlight**



Test Setup (Radiated Emissions)


The photographs below show the test setup for radiated emission testing.

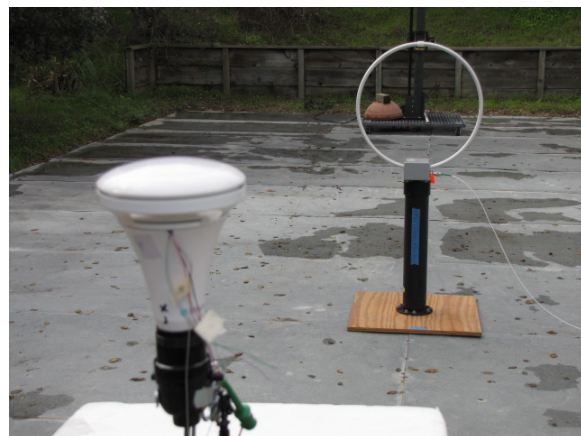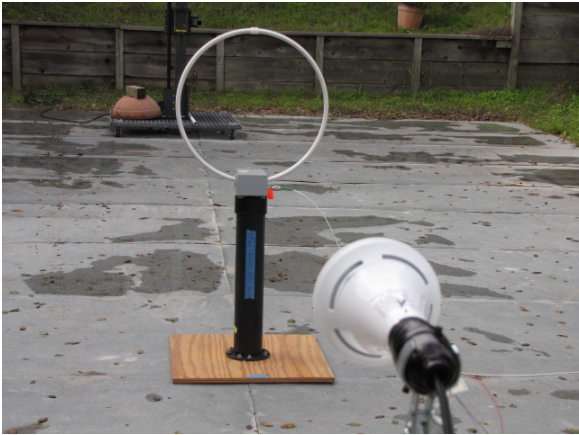




Test Setup (Radiated Emissions)


The photographs below show the test setup for radiated emission testing.

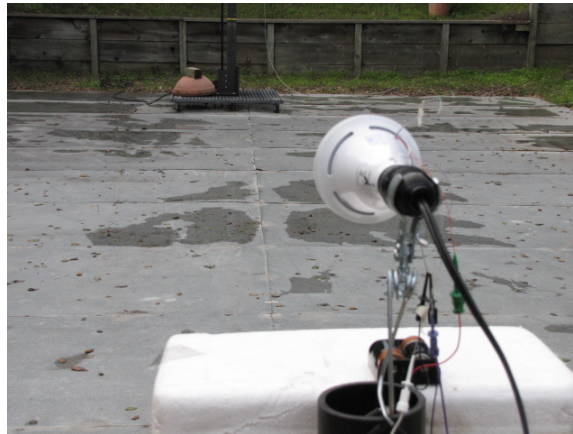




Test Setup (Radiated Emissions)



The photographs below show the test setup for radiated emission testing.

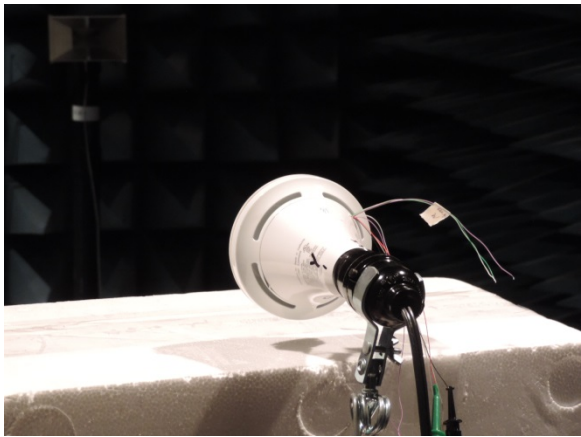




Test Setup (Conducted Emissions)

The photographs below show worst case setup for line conducted testing.

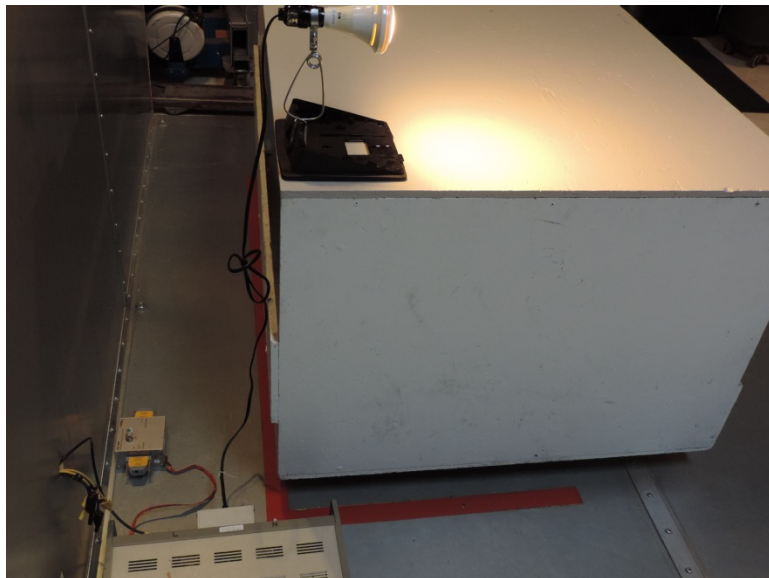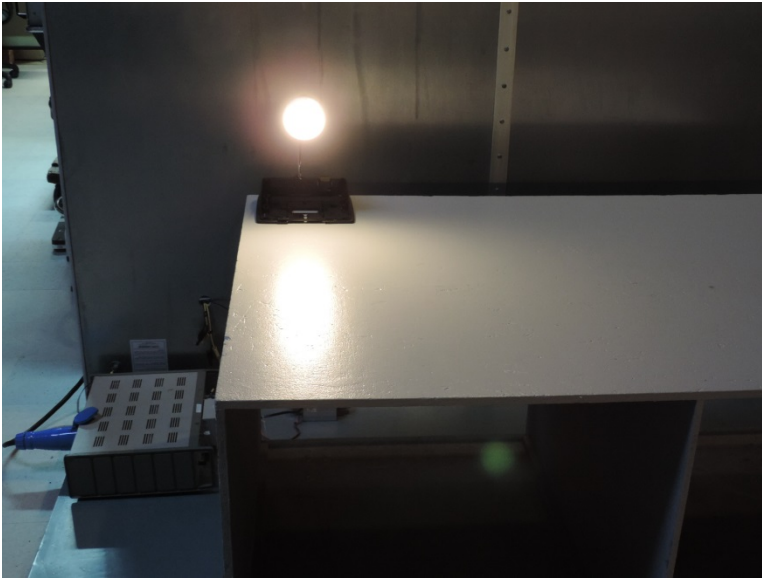



Test Methods for Emissions

The test procedure stated in ANSI C63.10-2013 and FCC KDB 558074 was used to collect the test data. The emission data of the EUT was taken with the Rohde & Schwarz EMI Test Receiver and HP 8566B. Incorporating the application of correction factors programmed into the Test Receiver and verified for distance, antenna, cable loss, and amplifier gain, the data was reduced as shown in the Sample Calculations. These correction factors are available upon request. The corrected data was then compared to the emission limits to determine compliance.

During radiated emission testing, the EUT was placed on a nonconductive rotating table 0.8 meter above the conductive grid. The nonconductive table dimensions were 1 meter deep by 1.5 meters wide at 0.8 meter high. The EUT is centered on the tabletop and the measurement antenna was placed 10 or 3 meters from the EUT as noted in the test data.

For emissions testing, scans in the frequency range of 9 kHz to 24.835 GHz were made. Measurement bandwidths and detectors stated in ANSI C63.4 were used.

Measurements were made at a distance of 3 or 10 meters.

Conducted Emission Testing


For the conducted emissions testing, the EMCO LISN, Model No. 4825/2, was used for the EUT. During conducted emission testing the EUT was located on a wooden test bench measuring 0.8 meter high, 1 meter deep, and 1.5 meters in width. The vertical conducting surface was 0.4 meter from the back of the test bench. The LISNs were placed on the ground plane of the test area in accordance with ANSI C63.4-2014.

The metal plane used for conducted emission testing was grounded to the earth by a heavy gage braided wire attached to the plane. All other objects were kept a minimum of 1 meter away from the EUT during the conducted test.

For conducted emissions testing a scan of the frequency band 150 kHz to 30 MHz was made stepping every 5 kHz. Each frequency was measured at a bandwidth of 10 kHz for 20 msec. All readings within 25 dB of the limits were recorded, and those emissions were then measured using the CISPR quasi-peak and average detectors at a bandwidth of 10 kHz for a 2 second measurement time. All emissions within 6 dB of the limit were examined with additional measurements to ensure compliance with the FCC 15.207 limits. The results of the conducted emissions test are shown in test tables below.

Temperature and Humidity

The ambient temperature of the actual EUT was within the range of 10° to 40° C (50° to 104° F) unless the particular equipment requirements specify testing over a different temperature range. The humidity levels were within the range of 10% to 90% relative humidity unless the EUT operating requirements call for a different level.




Sample Calculations

An example of how the EMI Test Receiver reading is converted using correction factors is given for the emissions recorded in Table 6. These correction factors are programmed into the EMI Test Receiver and verified. For radiated emissions in dB μ V/m, the EMI Test Receiver reading in dB μ V is corrected by using the following formula:

33.90	Meter Reading (dB μ V/m)
34.01	- Pre amp Gain (dB)
12.48	+ Cable Loss (dB)
33.12	+ Antenna Factor (dB)
45.49	= Corrected Reading (dB μ V/m)

This reading is then compared to the applicable specification limits and the difference will determine compliance.



FCC Part 15 Subpart C 15.207 and 15.209 Limits

Table 4 – Conducted Limits

Frequency MHz	Limit Quasi-Peak dBμV	Limit Average dBμV
0.15-0.50	66-56	56-46
0.50-5	56	46
5-30	60	50

NOTE:


1. The lower limit shall apply at the transition frequencies.
2. Both Quasi-Peak and Average limits for power line conducted testing must be met.
3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

Table 5 – Radiated Emission Limits, General Requirements

Frequency MHz	Field Strength μV/m	Measurement Distance Meters
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.
3. The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission.
4. The emission limits shown are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.




Report of Measurements Radiated Data

Radiated emissions measurements were performed from 9 kHz to 30 MHz at 3-meter distance. The loop antenna was placed at 1-meter height and was rotated about its vertical axis. The EUT was also rotated 360 degrees in front of the measurement antenna. No emissions were observed from the EUT in this frequency range.

Measurements were performed in the frequency range of 30 MHz to 1 GHz at 10-meter distance. The Bilog antenna was searched from 1 to 4 meters in height in both horizontal and vertical orientation. The EUT was also rotated 360 degrees in front of the measurement antenna. The EUT was tested in all three orthogonal orientations.

Measurements were performed in the frequency range of 1 GHz to 24.835 GHz at 3-meter distance. The Horn antenna was in both horizontal and vertical orientation. The EUT was also rotated 360 degrees in front of the measurement antenna. Only the second harmonics of the transmitter was observed, all others were baseline of the noise floor measurements. Measurements above 18 GHz were performed as exploratory at a much closer distance with the standard gain horn. No emissions were observed above the second harmonic of the fundamental frequency.

Exploratory radiated emissions measurements of the transmitter frequencies were made to determine the maximum transmit level of the EUT. All frequencies were searched for any emissions from the Zigbee module and EUT. No other emissions were observed. The transmit frequency of 2480 MHz was determined to be the highest level. With the EUT in the X orientation and the measurement antenna in Horizontal orientation the highest level was recorded.



Report of Measurements Maximum Unwanted Emission Levels Data

The following tables report the results of the Maximum Unwanted Emission Level measurements for the Stack Downlight, BR3001E2626Z. These measurements were taken and compared to the general emission limits of 15.209 and the radiated emission requirements of 15.247. Final testing of the low, middle and high channels was performed to find worst case levels in all three orientations of the EUT. The EUT was operating in the worst case condition at 2480MHz with the EUT orientation in the X axis and the receive measurement antenna in horizontal orientation.


All emissions within the restricted bands of operation were below the limits of FCC part 15.209(a).

The EUT was operated at maximum transmit power and 100% duty cycle for fundamental transmitter frequencies. The EUT was operated in a maximum transmit power and 10% duty cycle for all other emissions measurements.

The frequency range of 30 MHz to 1 GHz was scanned at a distance of 10 meters to find all emissions from the EUT. The frequency range from 1 GHz to 18 GHz was scanned at a distance of 3 meters. Higher frequencies were scanned at a much closer distance to identify any emissions from the EUT. No emissions were observed between 9 kHz and 30 MHz and also above 5 GHz. Reported measurements above 5 GHz were the baseline levels of the measurement system.

Polarization, Orientation	Fundamental Frequency MHz	PK Level dBμV/m
Low CH H X	2405	100.36
Low CH V X	2405	91.06
Low CH H Y	2405	95.06
Low CH V Y	2405	94.26
Low CH H Z	2405	91.66
Low CH V Z	2405	93.96
Mid CH H X	2440	101.13
Mid CH V X	2440	90.83
Mid CH H Y	2440	96.23
Mid CH V Y	2440	96.43
Mid CH H Z	2440	88.83
Mid CH V Z	2440	94.13
Hi CH H X	2480	101.34
Hi CH V X	2480	91.14
Hi CH H Y	2480	97.74
Hi CH V Y	2480	96.24
Hi CH H Z	2480	90.44
Hi CH V Z	2480	93.24


After finding the maximum transmitter level operating in low, mid and high transmit channels and in horizontal and vertical receive antenna orientations and all



three EUT orientations (X, Y and Z), unwanted emissions measurements were made using this configuration of the transmitter as it is the worst case condition.

Using the duty cycle averaging factor based on 9.95% duty cycle.

Duty Cycle Correction Factor = 19.95dB



Radiated Data

Stack Labs, Inc.


Product - Stack Downlight

Model - BR3001E2626Z

Table 6 – Radiated Data


Frequency MHz	QP Level dBμV/m	QP Limit dBμV/m	Margin dB	Azimuth, Height	Antenna, Polarization	
The data below was taken at 10 meter distance.						
46.25	13.31	30.00	16.69	112, 4	BiLog, H	
127.45	20.75	30.00	9.25	180, 4	BiLog, H	
166.0	9.34	30.00	20.66	180, 4	BiLog, H	
186.45	13.72	30.00	16.28	247, 4	BiLog, H	
37.7	19.72	30.00	10.28	270, 1.2	BiLog, V	
42.65	16.84	30.00	13.16	337, 1.1	BiLog, V	
76.85	15.28	30.00	14.72	0, 1.1	BiLog, V	
170.55	17.86	30.00	12.14	67, 1	BiLog, V	
177.5	17.50	30.00	12.50	67, 1	BiLog, V	
The data below was taken at 3 meter distance						
Emission Frequency MHz	PK Level dBμV/m	PK Limit dBμV/m	AV Level dBμV/m	AV Limit dBμV/m	PK Margin dB	AV Margin dB
Lowest Channel						
4810	65.87	74	45.92	54	-8.13	-8.08
7215	59.28	74	39.33	54	-14.72	-14.67
9620	60.42	74	40.47	54	-13.58	-13.53
12025	61.88	74	41.93	54	-12.12	-12.07
Middle Channel						
4880	63.91	74	43.96	54	-10.09	-10.04
7320	60.83	74	40.88	54	-13.17	-13.12
9760	61.82	74	41.87	54	-12.18	-12.13
12200	62.3	74	42.35	54	-11.7	-11.65
Highest Channel						
4960	66.8	74	46.85	54	-7.2	-7.15
7440	66.91	74	46.96	54	-7.09	-7.04
9920	59.77	74	39.82	54	-14.23	-14.18
12400	63.31	74	43.36	54	-10.69	-10.64
No other emissions were observed						

Operating mode of the transmitter was 802.15.4. Only baseline noise floor was observed after the second harmonic. Note: PK – peak readings, AV – average readings using duty cycle correction factor. Duty Cycle Correction Factor = 19.95dB



Conducted Data for 15.207 Line


Figure 2 – Line Scan

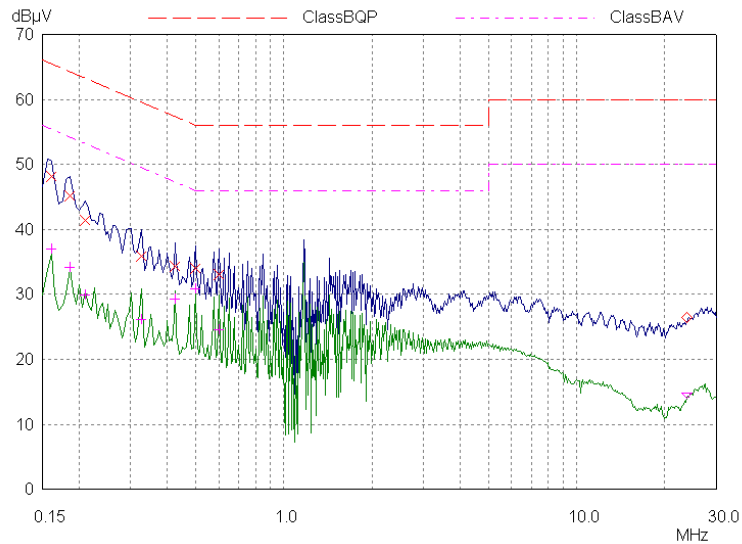

Blue Trace: Peak Measurement Green Trace: Average Measurement
 Final Measurement: x = QP / + = AV at 2 second measurement time.


Table 7 – Line Scan Data

Frequency MHz	Level dBμV	Detector	Limit dBμV	Margin dB	Phase	PE
0.16	48.06	QP	65.46	17.40	L1	fl
0.185	45.22	QP	64.26	19.04	L1	fl
0.21	41.38	QP	63.21	21.83	L1	fl
0.325	35.86	QP	59.58	23.72	L1	fl
0.425	34.25	QP	57.35	23.10	L1	fl
0.5	33.94	QP	56.00	22.06	L1	fl
0.6	33.12	QP	56.00	22.88	L1	fl
0.16	36.91	AV	55.46	18.55	L1	fl
0.185	34.15	AV	54.26	20.11	L1	fl
0.21	29.94	AV	53.21	23.27	L1	fl
0.325	26.09	AV	49.58	23.49	L1	fl
0.425	29.34	AV	47.35	18.01	L1	fl
0.5	30.87	AV	46.00	15.13	L1	fl
0.6	24.57	AV	46.00	21.43	L1	fl



Conducted Data for 15.207 Neutral

Figure 3 – Neutral Scan

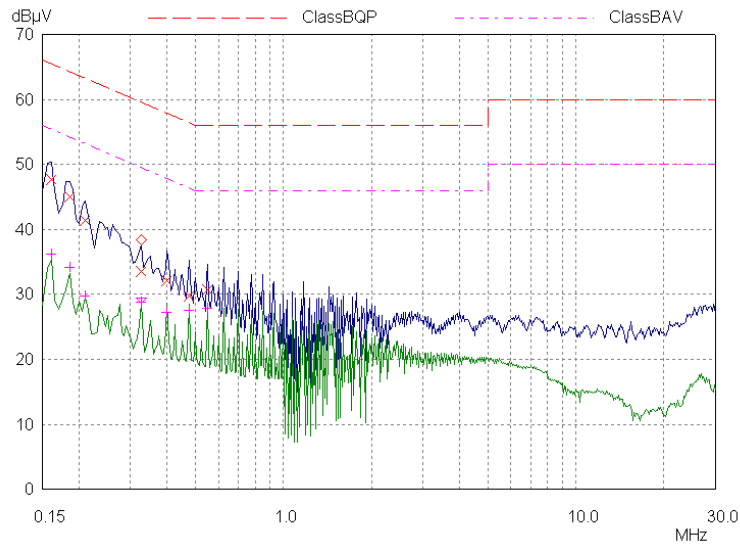

Blue Trace: Peak Measurement Green Trace: Average Measurement
 Final Measurement: x = QP / + = AV at 2 second measurement time.


Table 8 – Neutral Scan Data

Frequency MHz	Level dBμV	Detector	Limit dBμV	Margin dB	Phase	PE
0.16	47.73	QP	65.46	17.73	N	fl
0.185	44.98	QP	64.26	19.28	N	fl
0.21	41.40	QP	63.21	21.81	N	fl
0.325	33.45	QP	59.58	26.13	N	fl
0.4	32.10	QP	57.85	25.75	N	fl
0.475	29.77	QP	56.43	26.66	N	fl
0.55	30.67	QP	56.00	25.33	N	fl
0.16	36.16	AV	55.46	19.30	N	fl
0.185	34.15	AV	54.26	20.11	N	fl
0.21	29.82	AV	53.21	23.39	N	fl
0.325	28.74	AV	49.58	20.84	N	fl
0.4	27.27	AV	47.85	20.58	N	fl
0.475	27.58	AV	46.43	18.85	N	fl
0.55	27.83	AV	46.00	18.17	N	fl



Testing Cert #1007.01

Atlas Compliance & Engineering, Inc.
1792 Little Orchard Street
San Jose, CA 95125
Phone 408.971.9743
Fax 408-971-9783
Web www.atlasce.com



COMPLIANCE VERIFICATION REPORT

TEST CERTIFICATE

APPLICANT: Stack Labs, Inc.
10054 Pasadena Ave.
Cupertino, CA 95014

Trade Name: Stack

Model: BR3001E2626Z

I HEREBY CERTIFY THAT:

The measurements shown in this report were made in accordance with the procedures indicated and that the energy emitted by this equipment, as received, was found to be within the FCC CFR 47 Part 15 Subpart C requirements. Additionally, it should be noted that the results in this report apply only to the items tested, as identified herein.

I FURTHER CERTIFY THAT:

On the basis of the measurements taken at the test site, the equipment tested is capable of operation in compliance with the requirements set forth in FCC CFR 47 Part 15.207, 15.209 and 15.247 Rules and Regulations.

On this Date: January 20, 2016

Bruce Smith

Atlas Compliance & Engineering, Inc.