






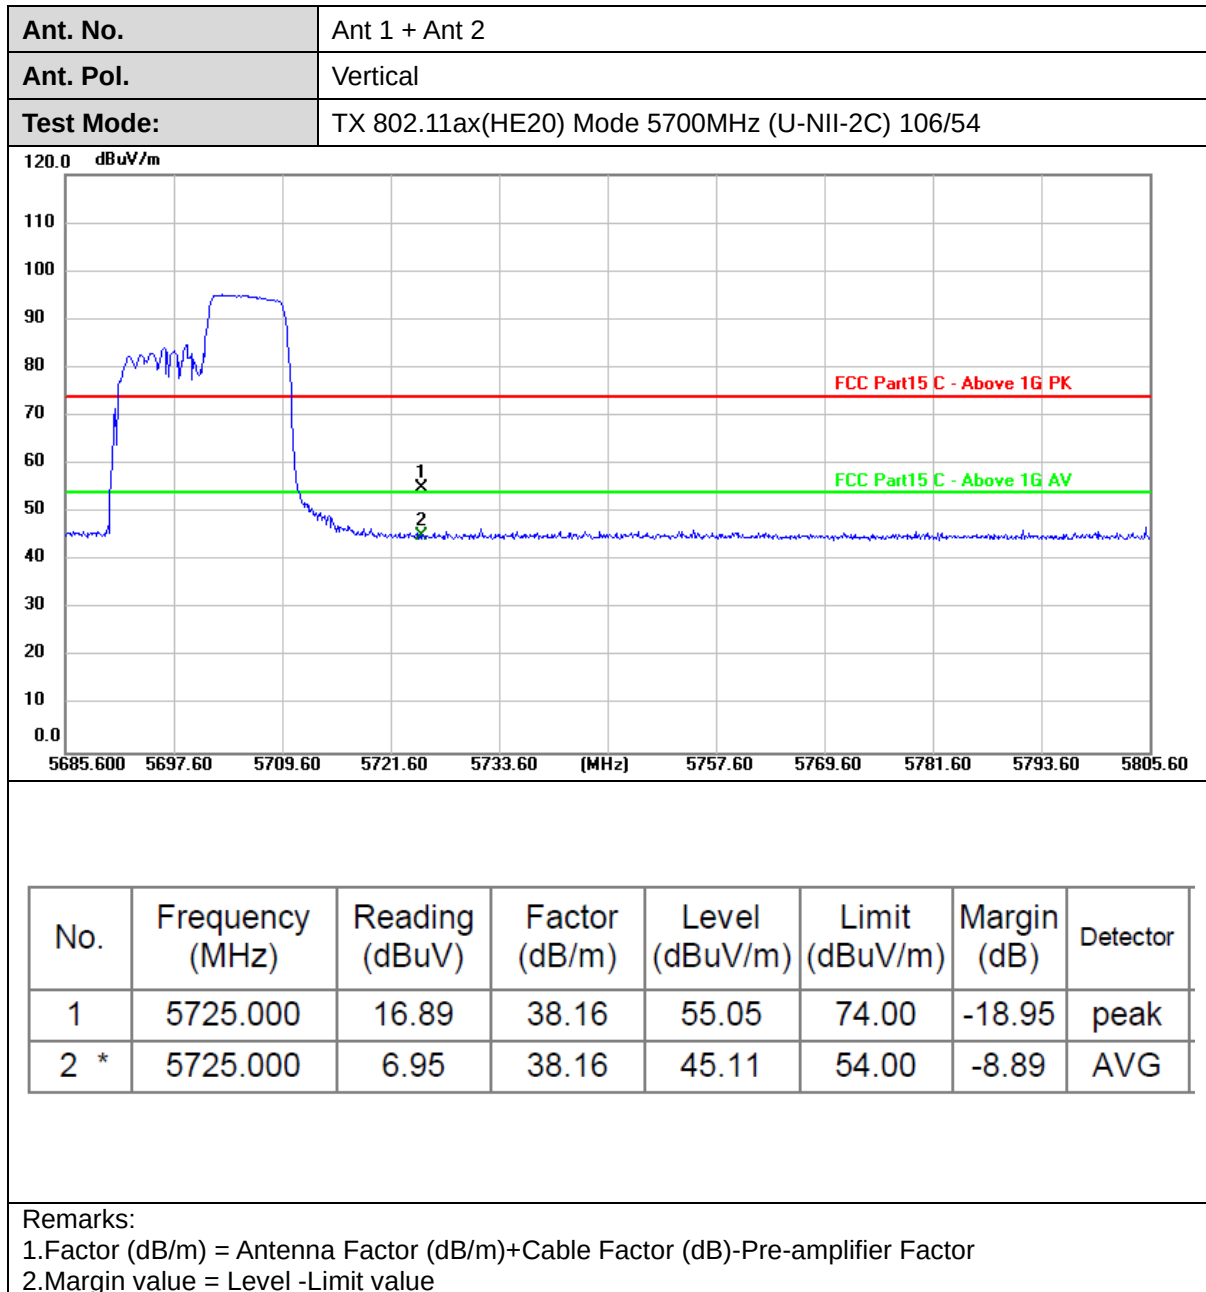


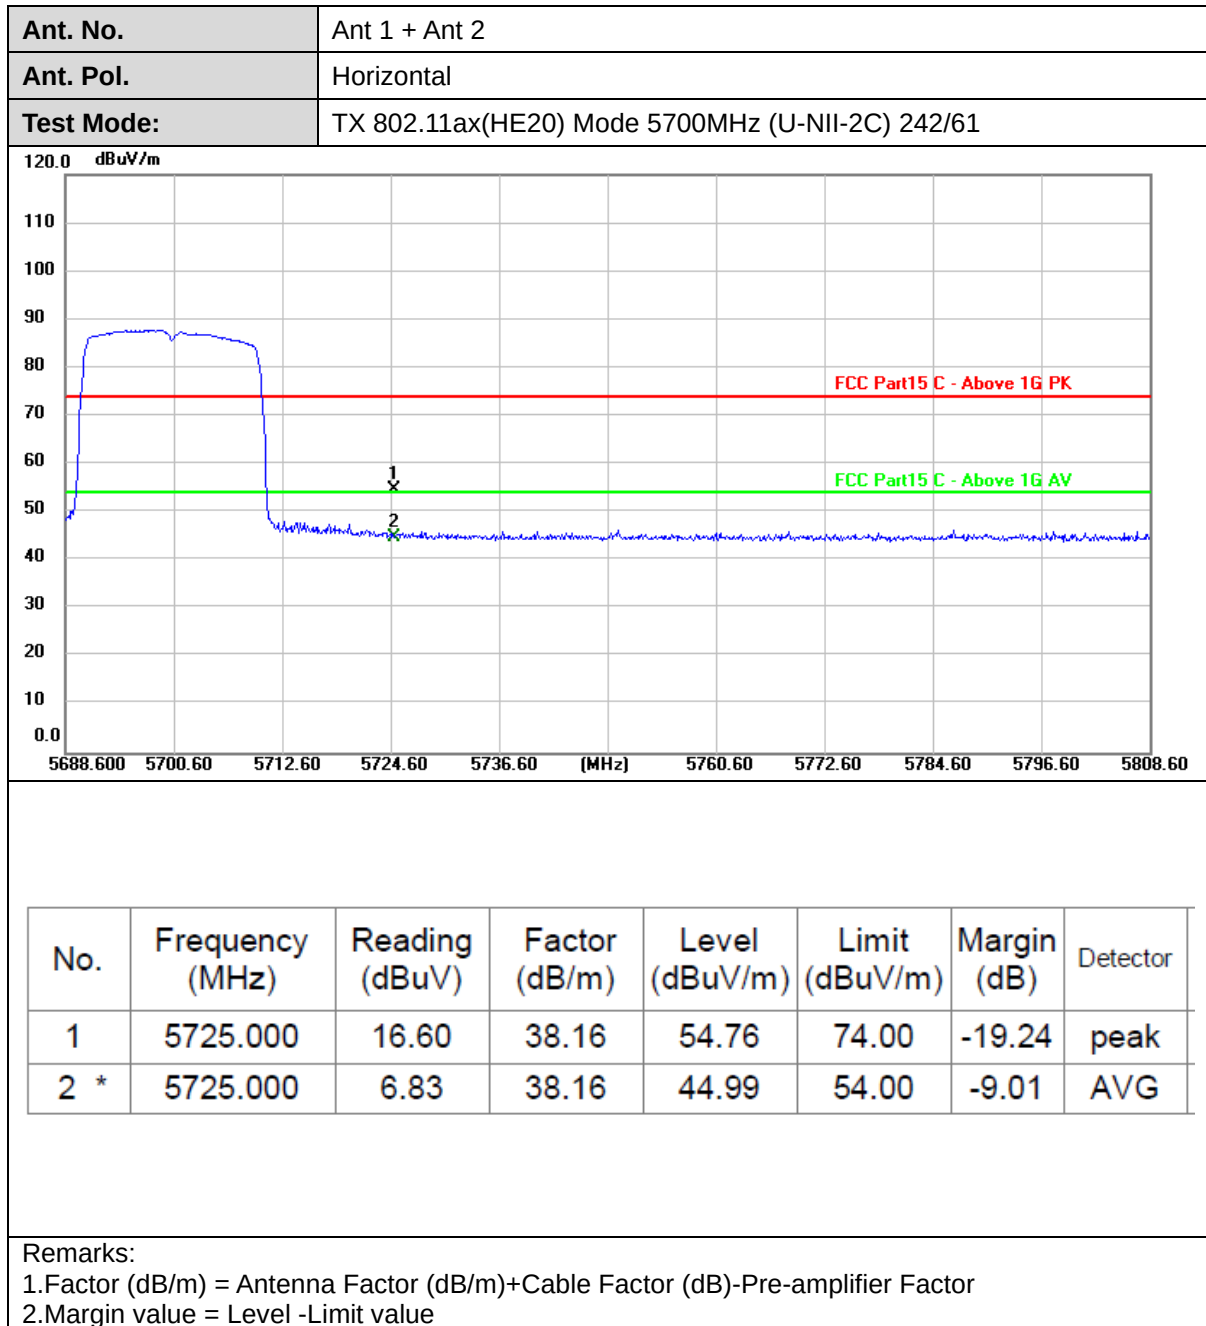


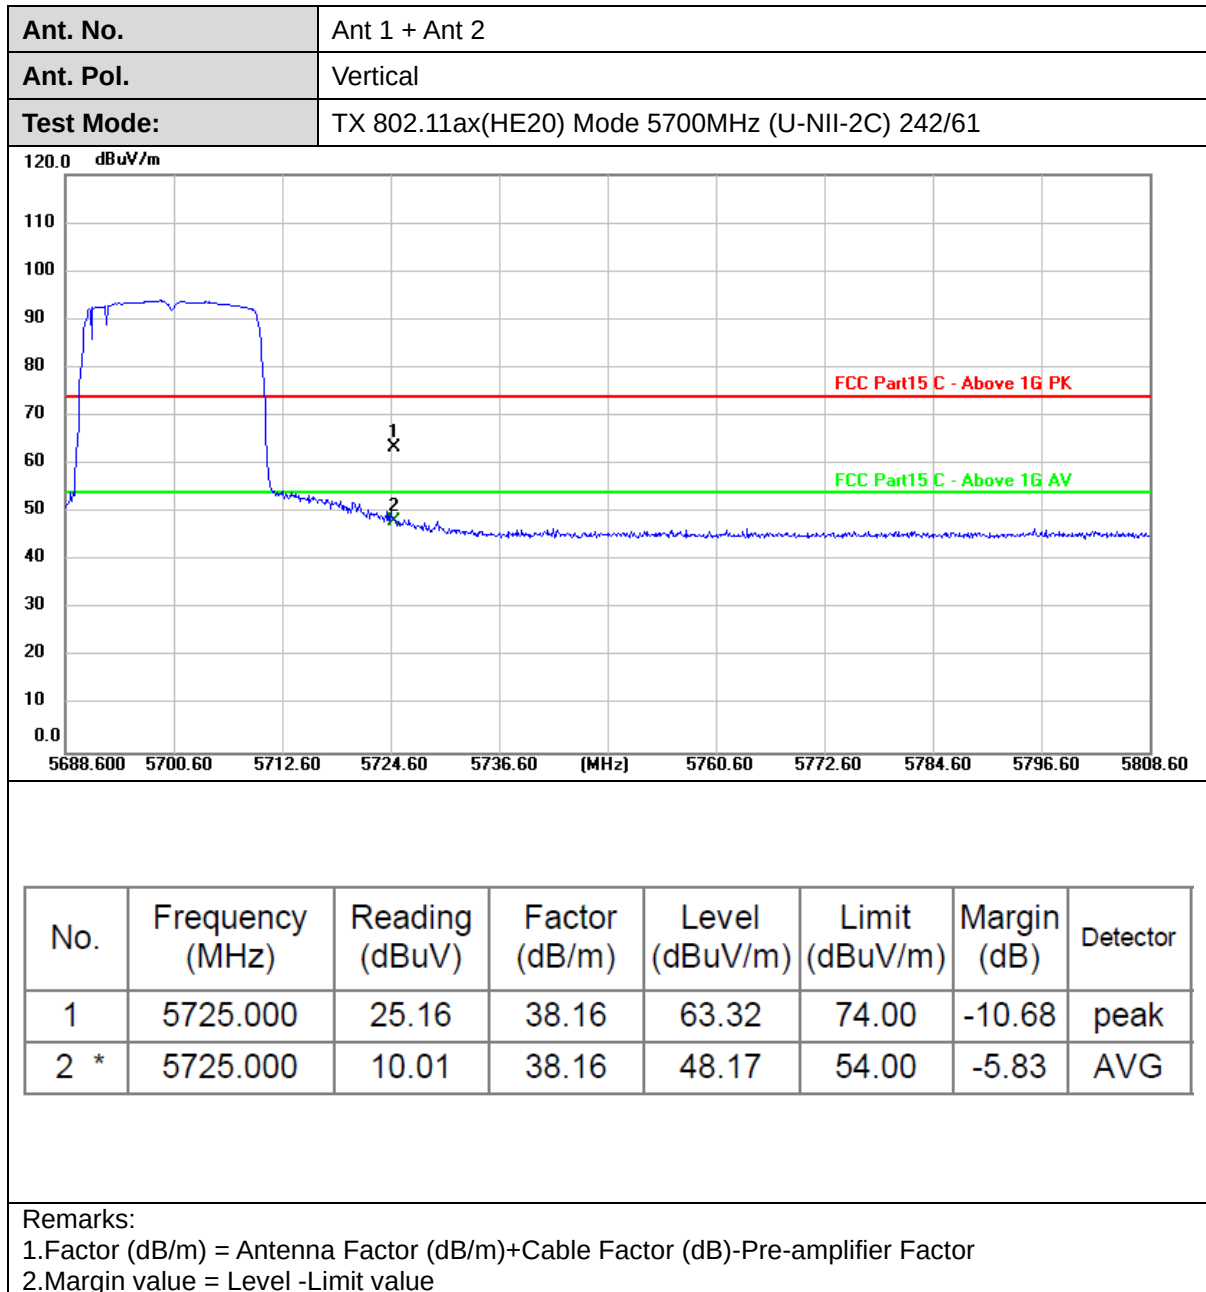


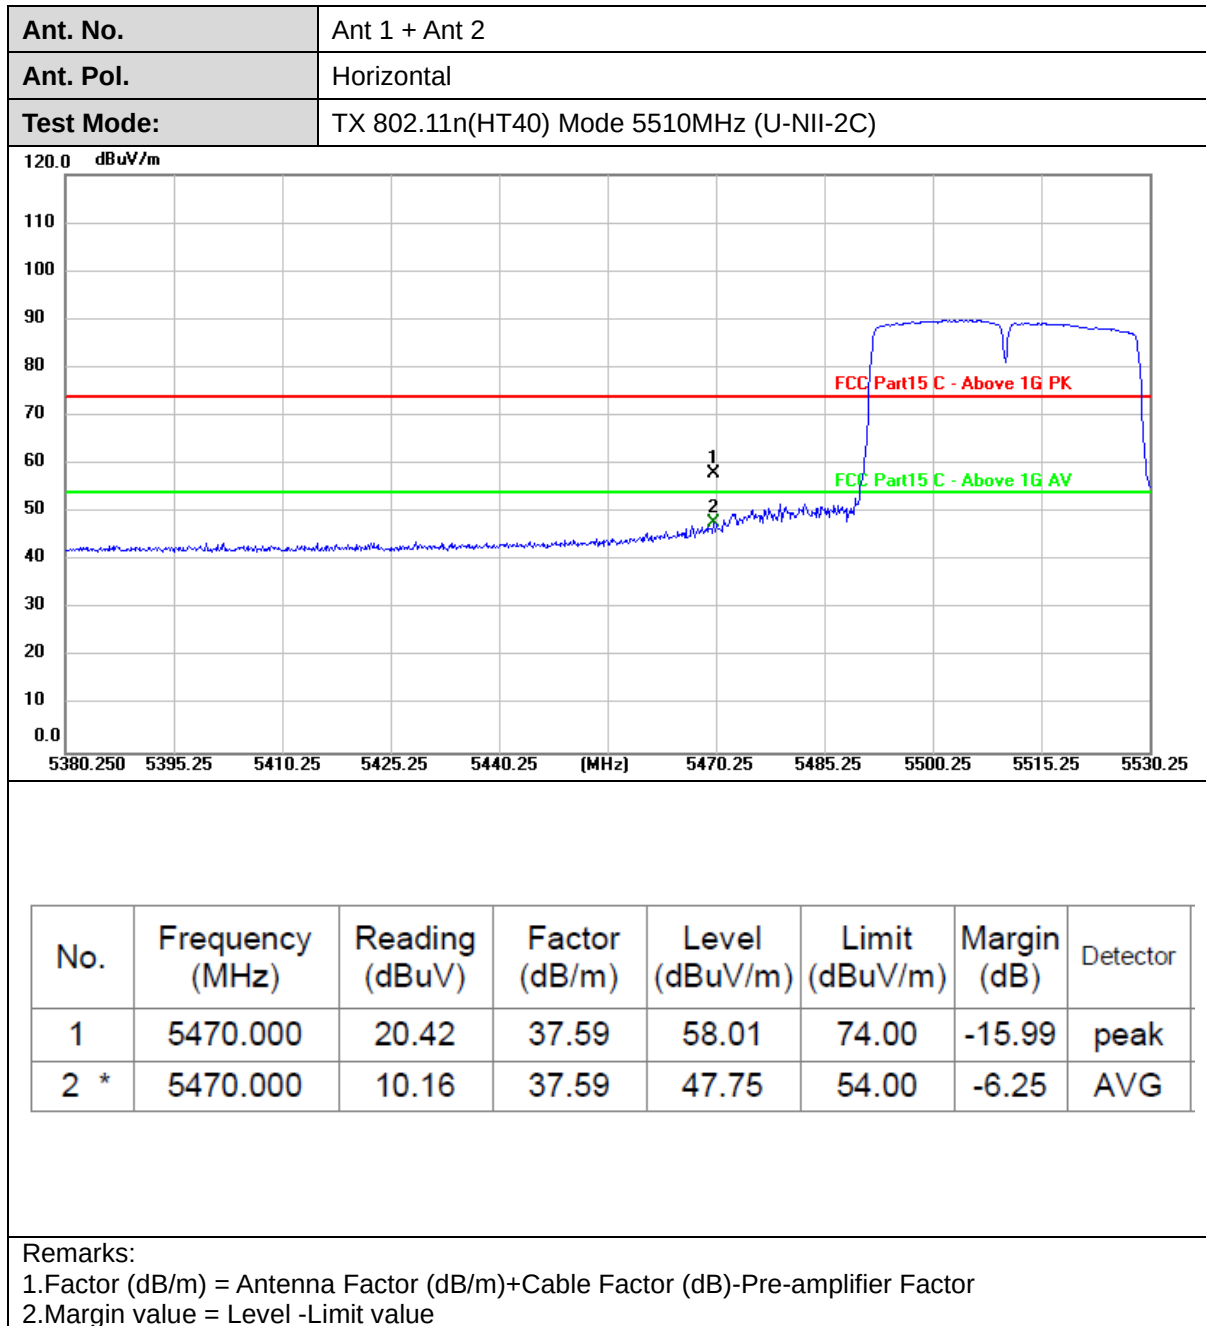


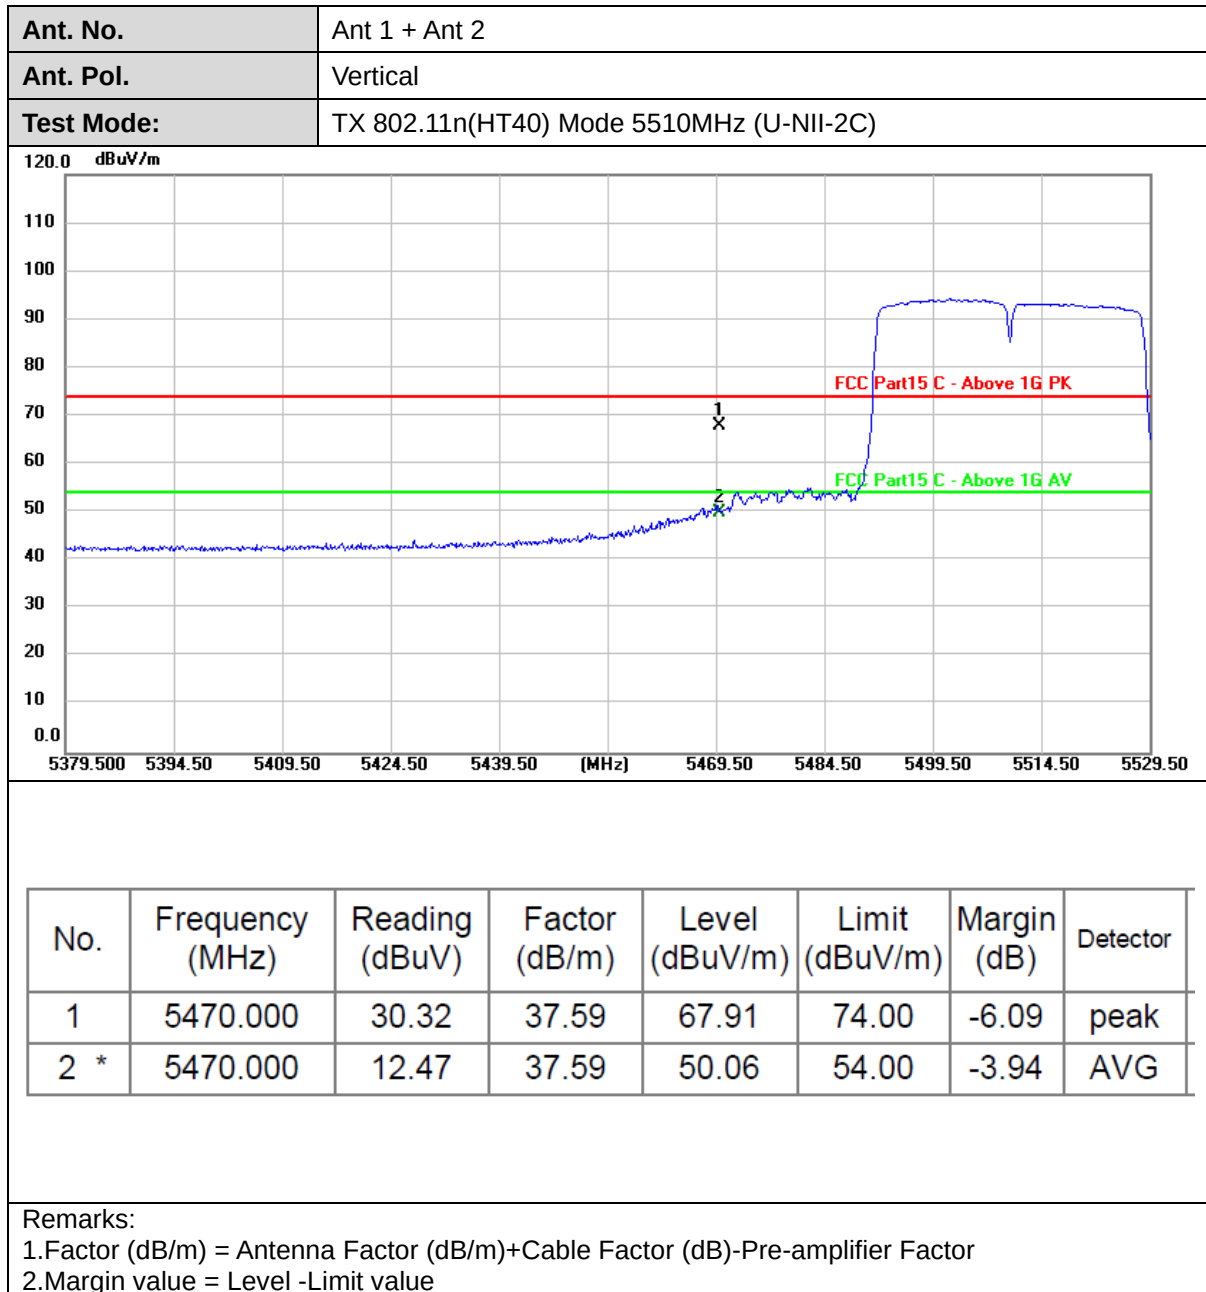

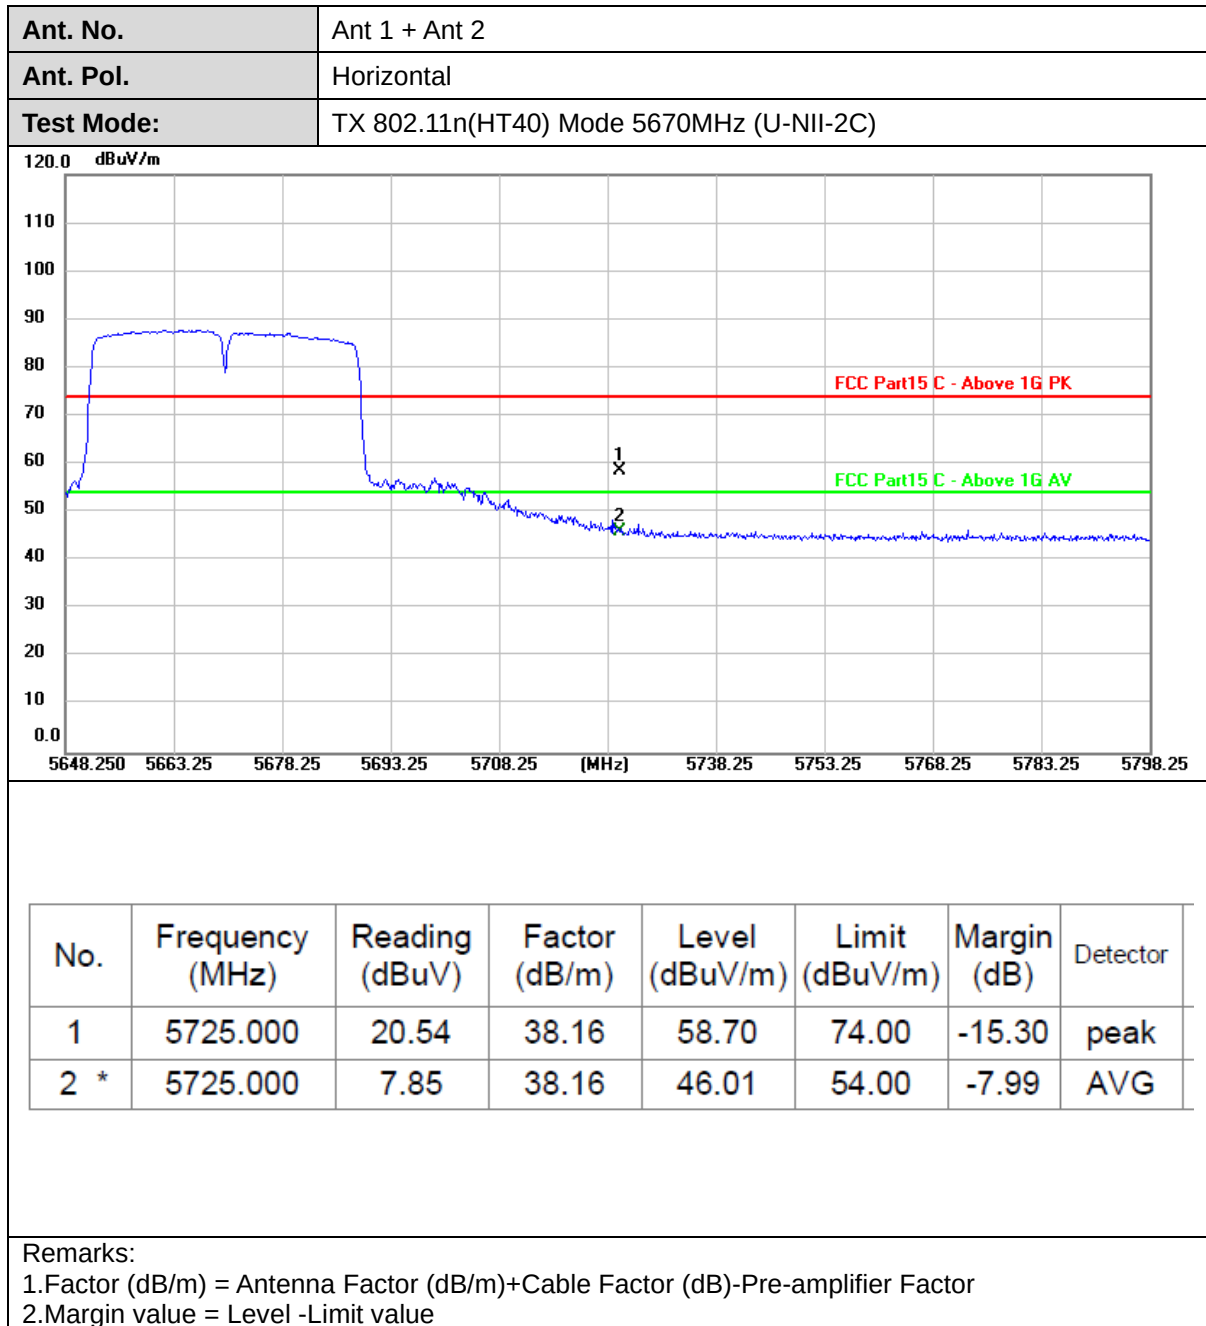

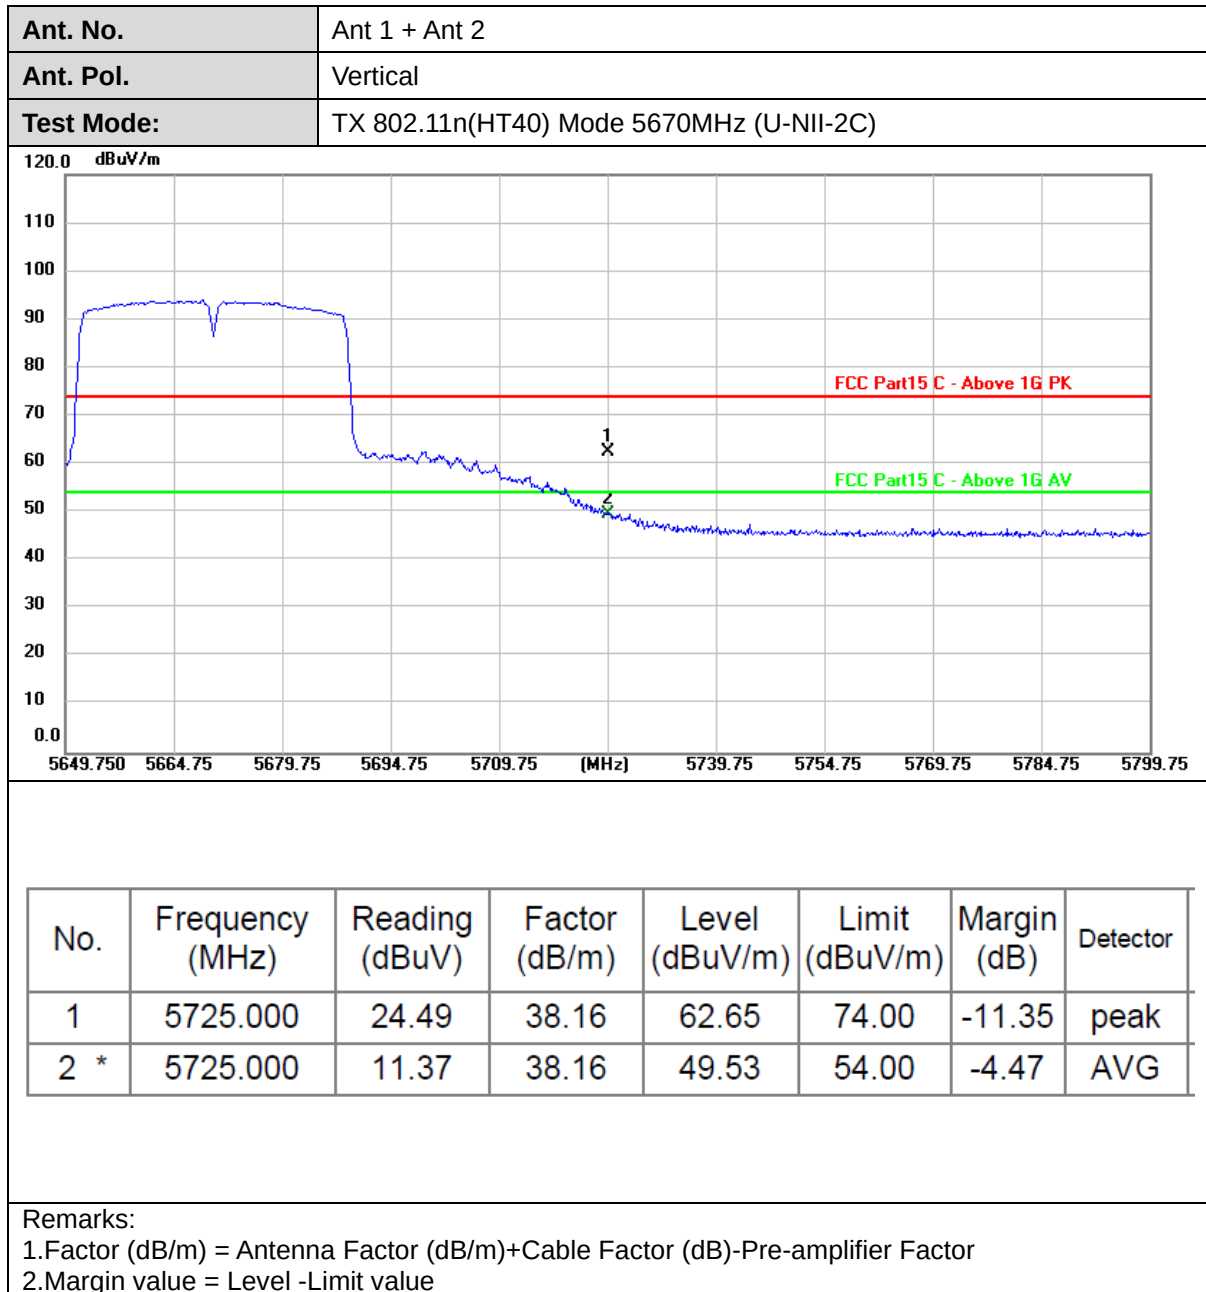

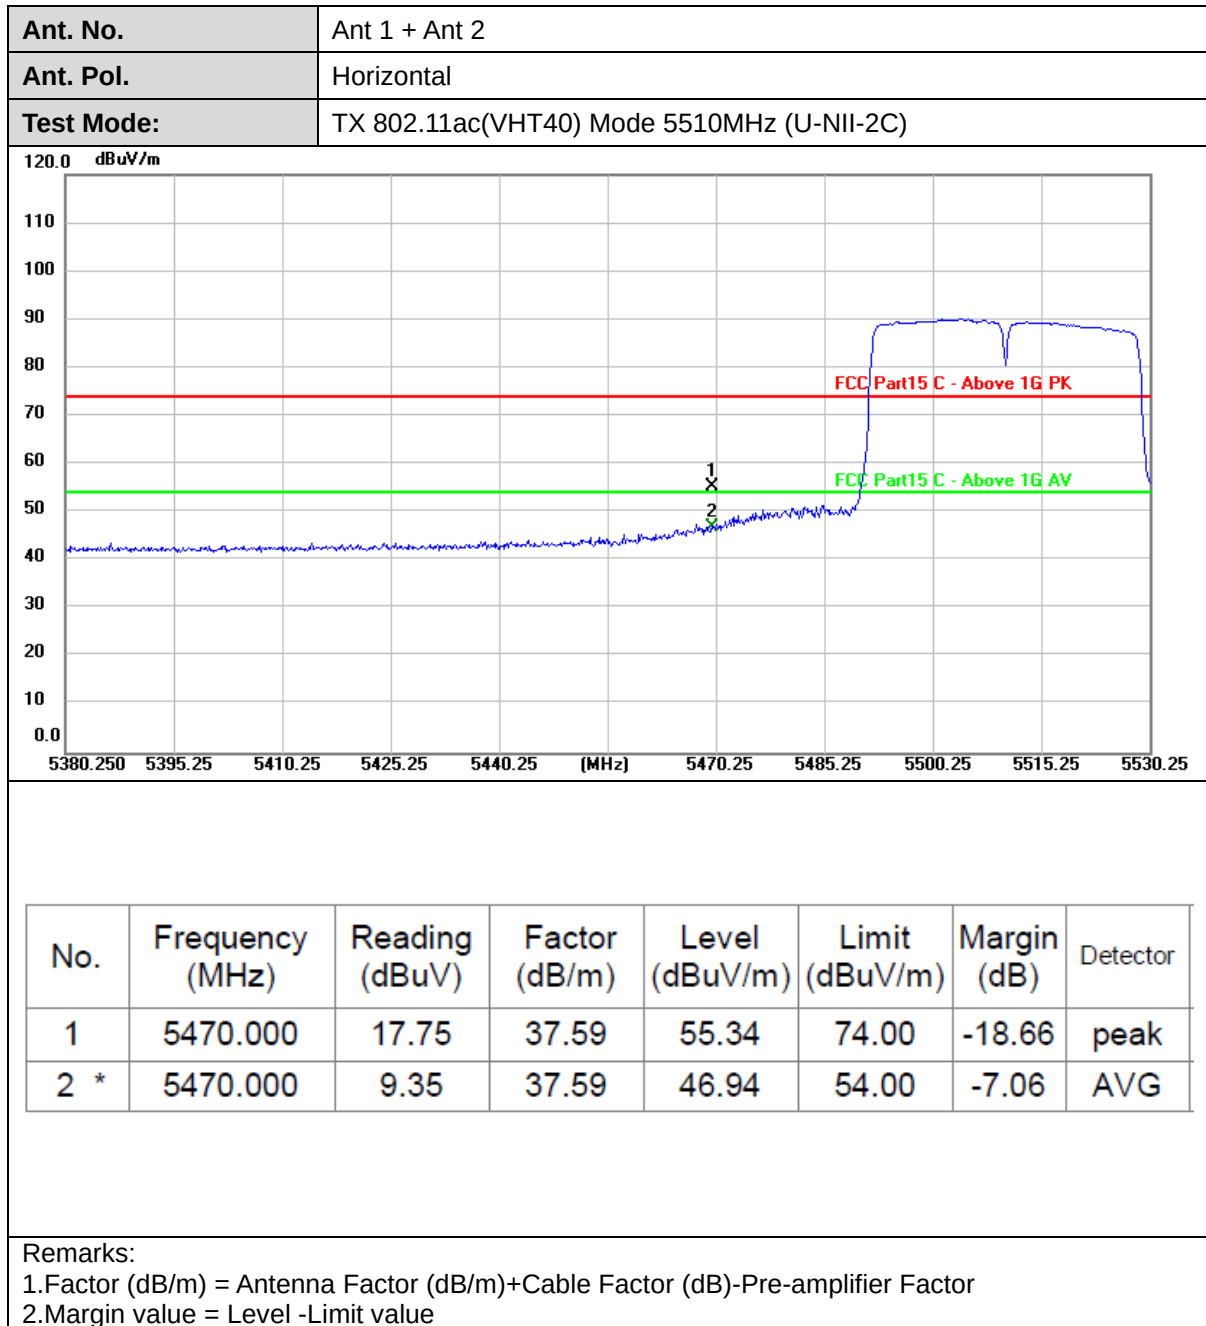

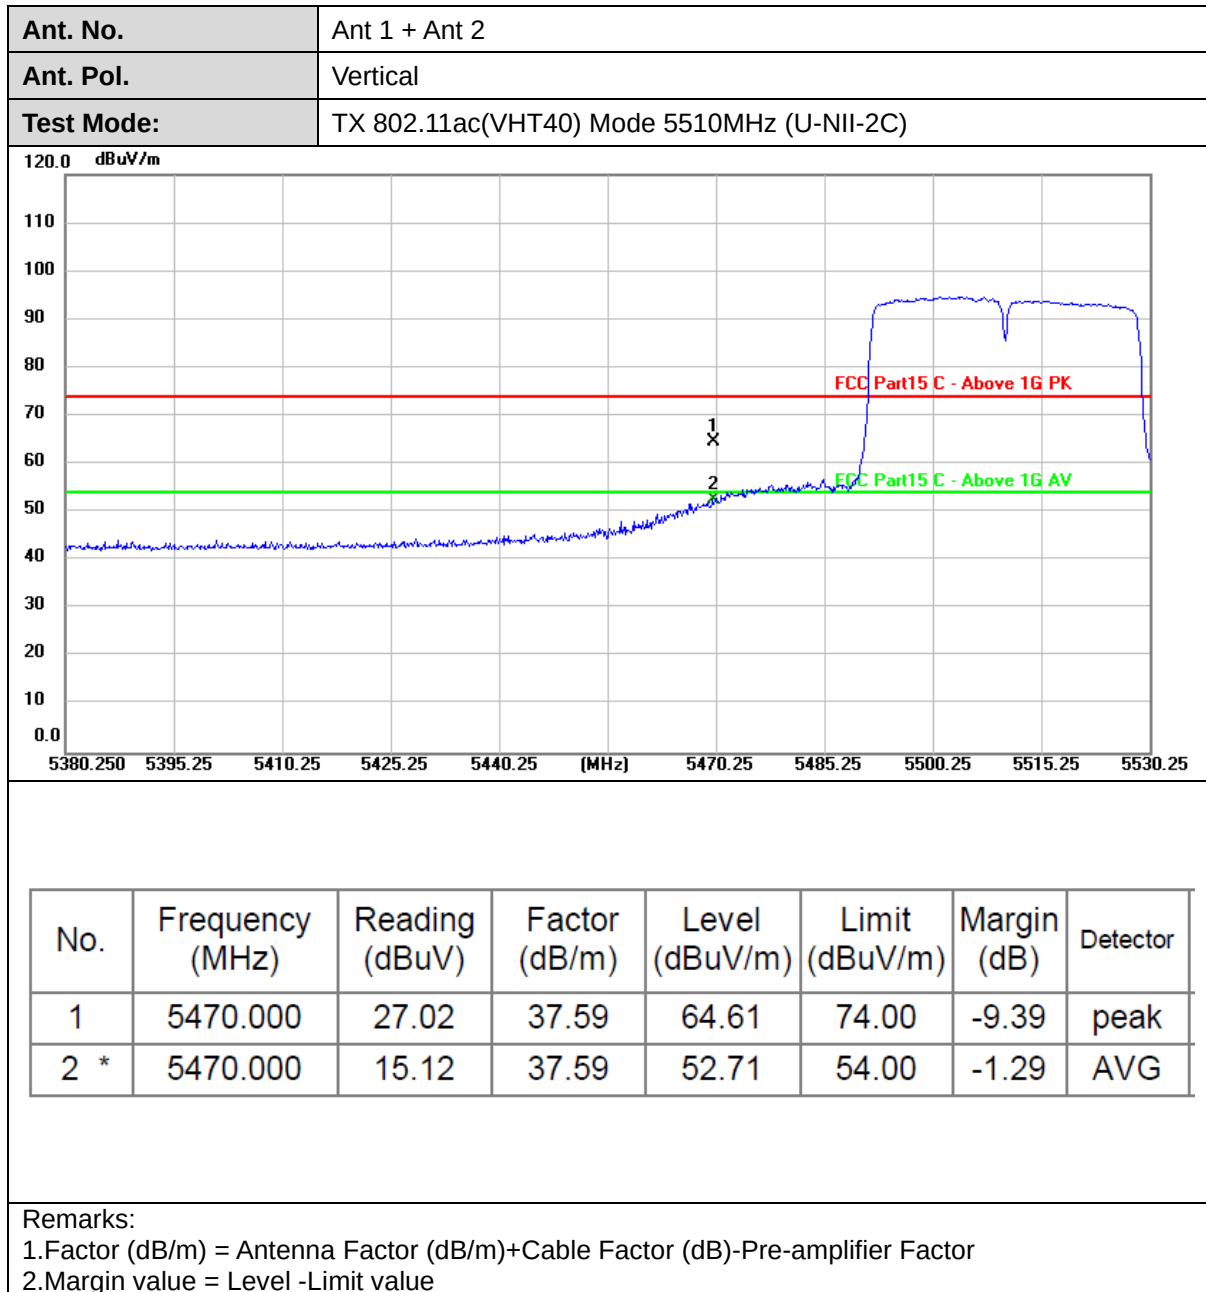


Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C)


120.0
dBuV/m


5649.000 5664.00 5679.00 5694.00 5709.00 (MHz) 5739.00 5754.00 5769.00 5784.00 5799.00


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	17.17	38.16	55.33	74.00	-18.67	peak
2 *	5725.000	7.19	38.16	45.35	54.00	-8.65	AVG


Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

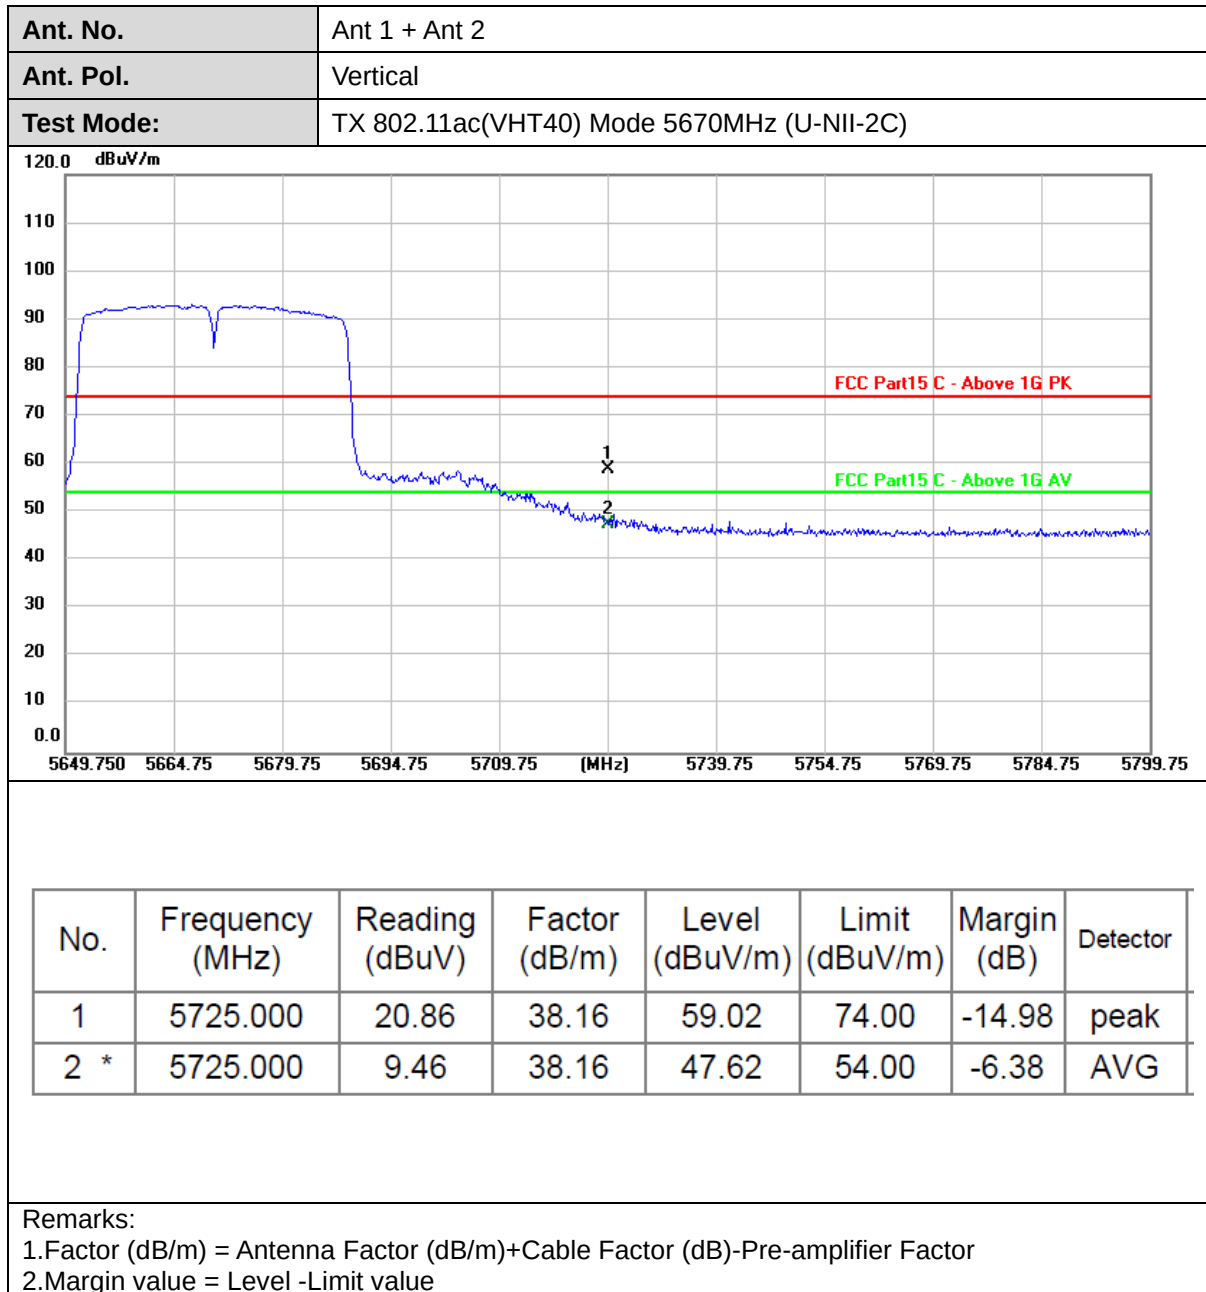

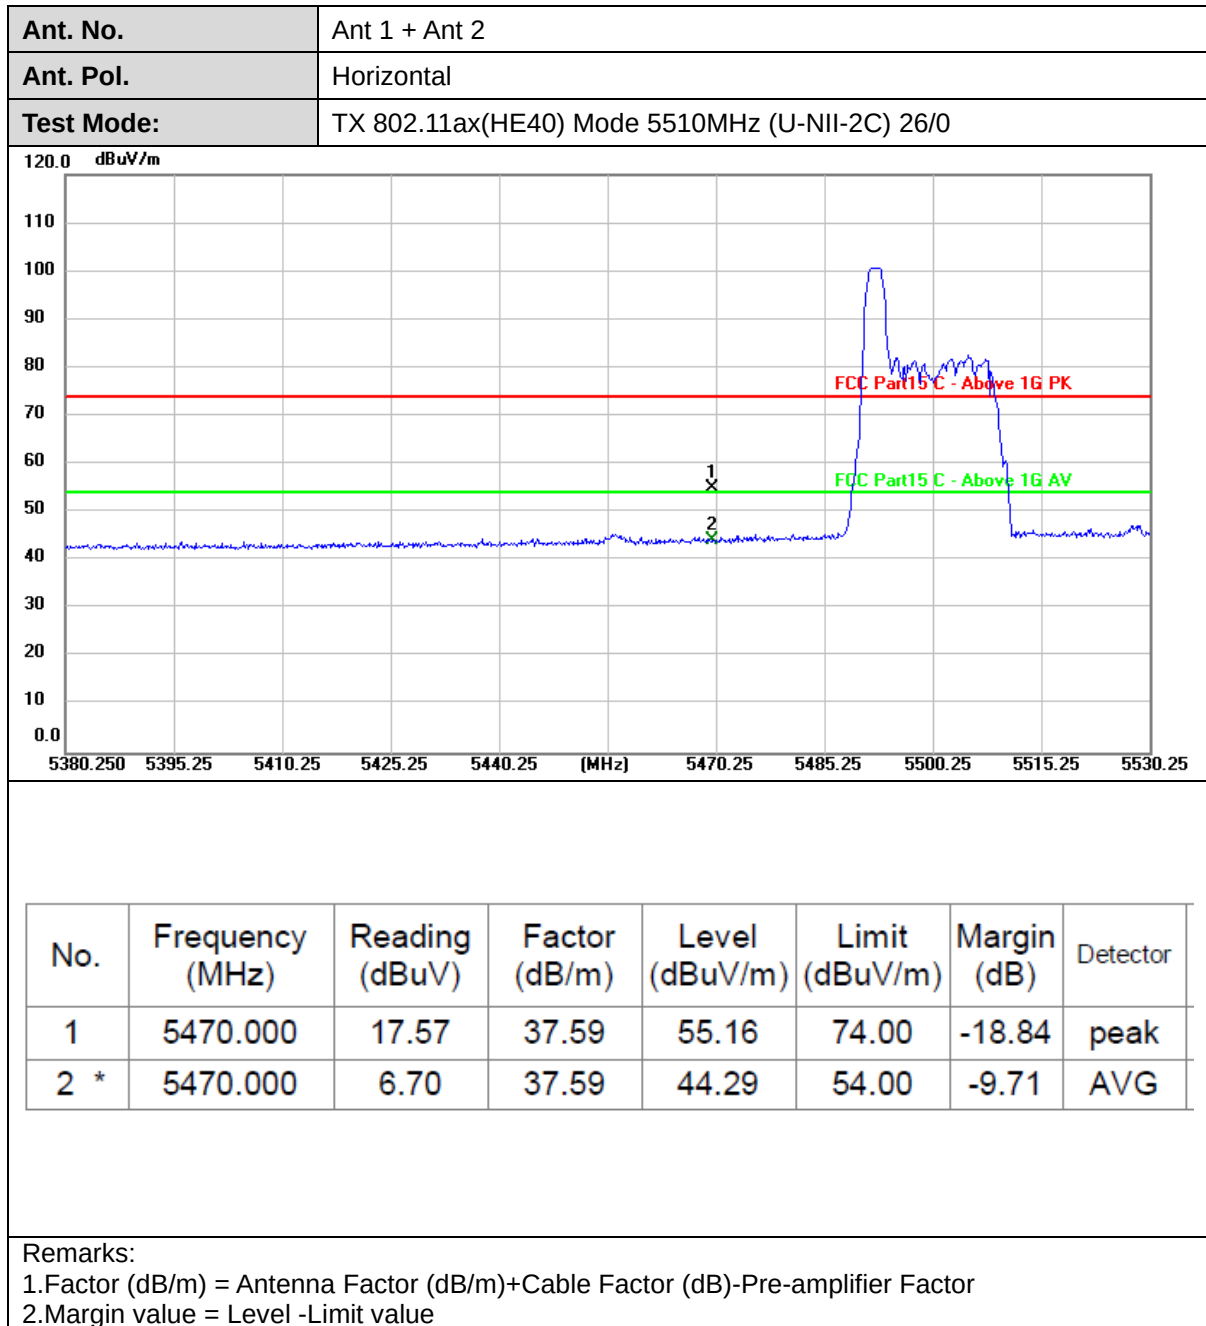

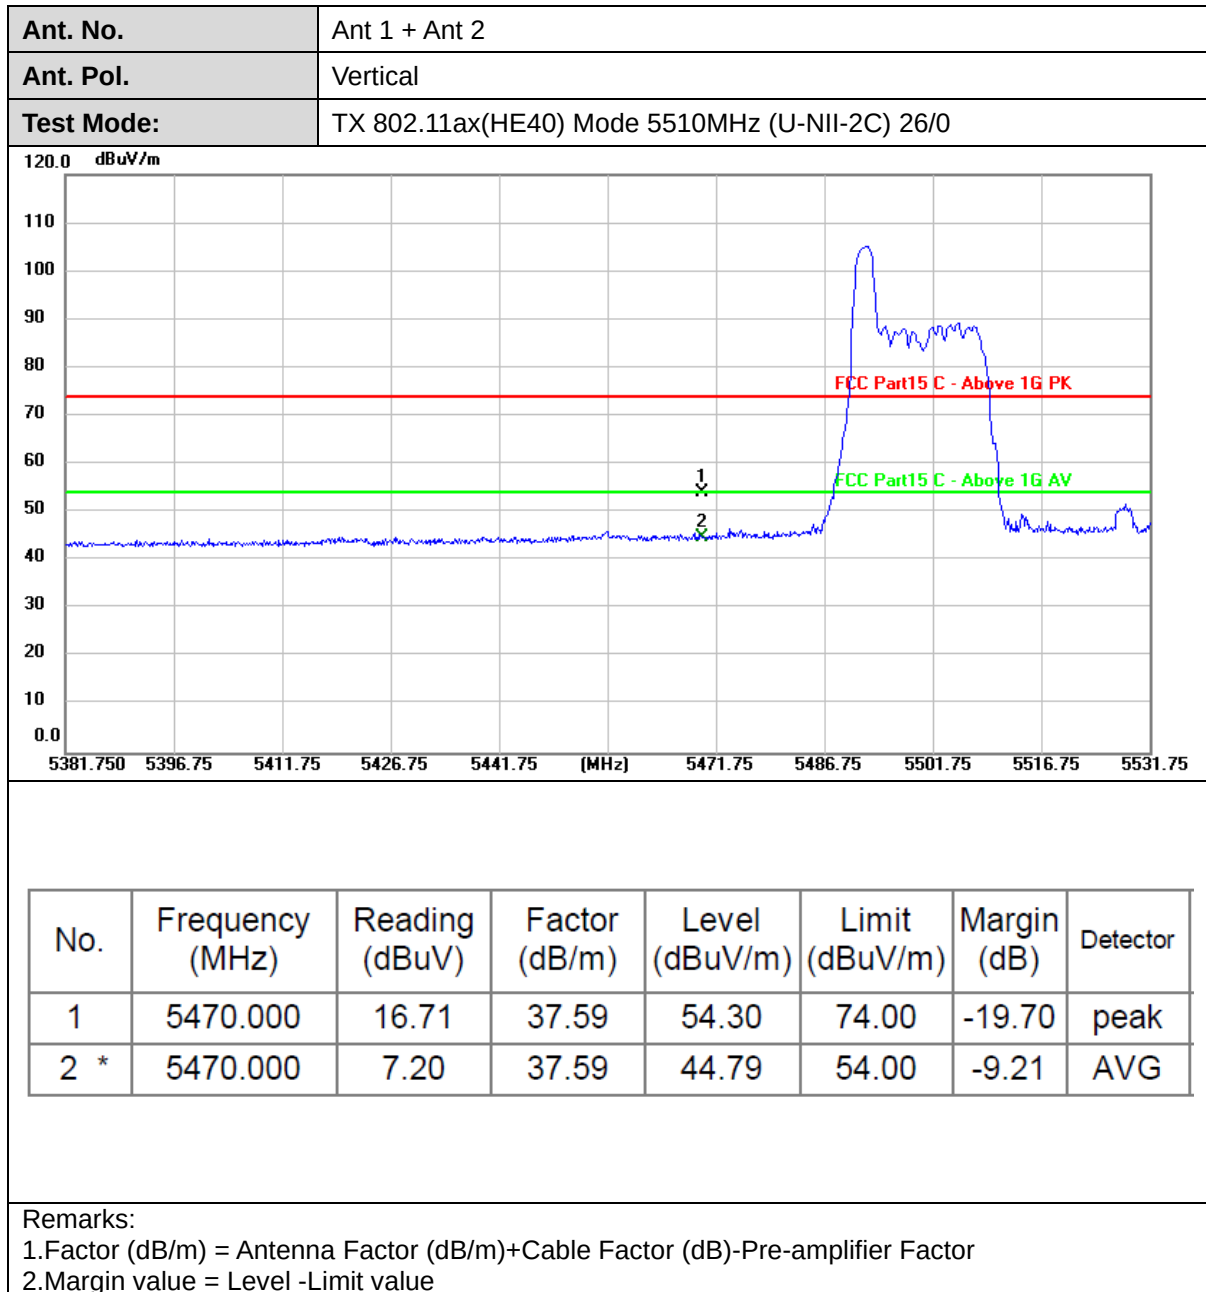

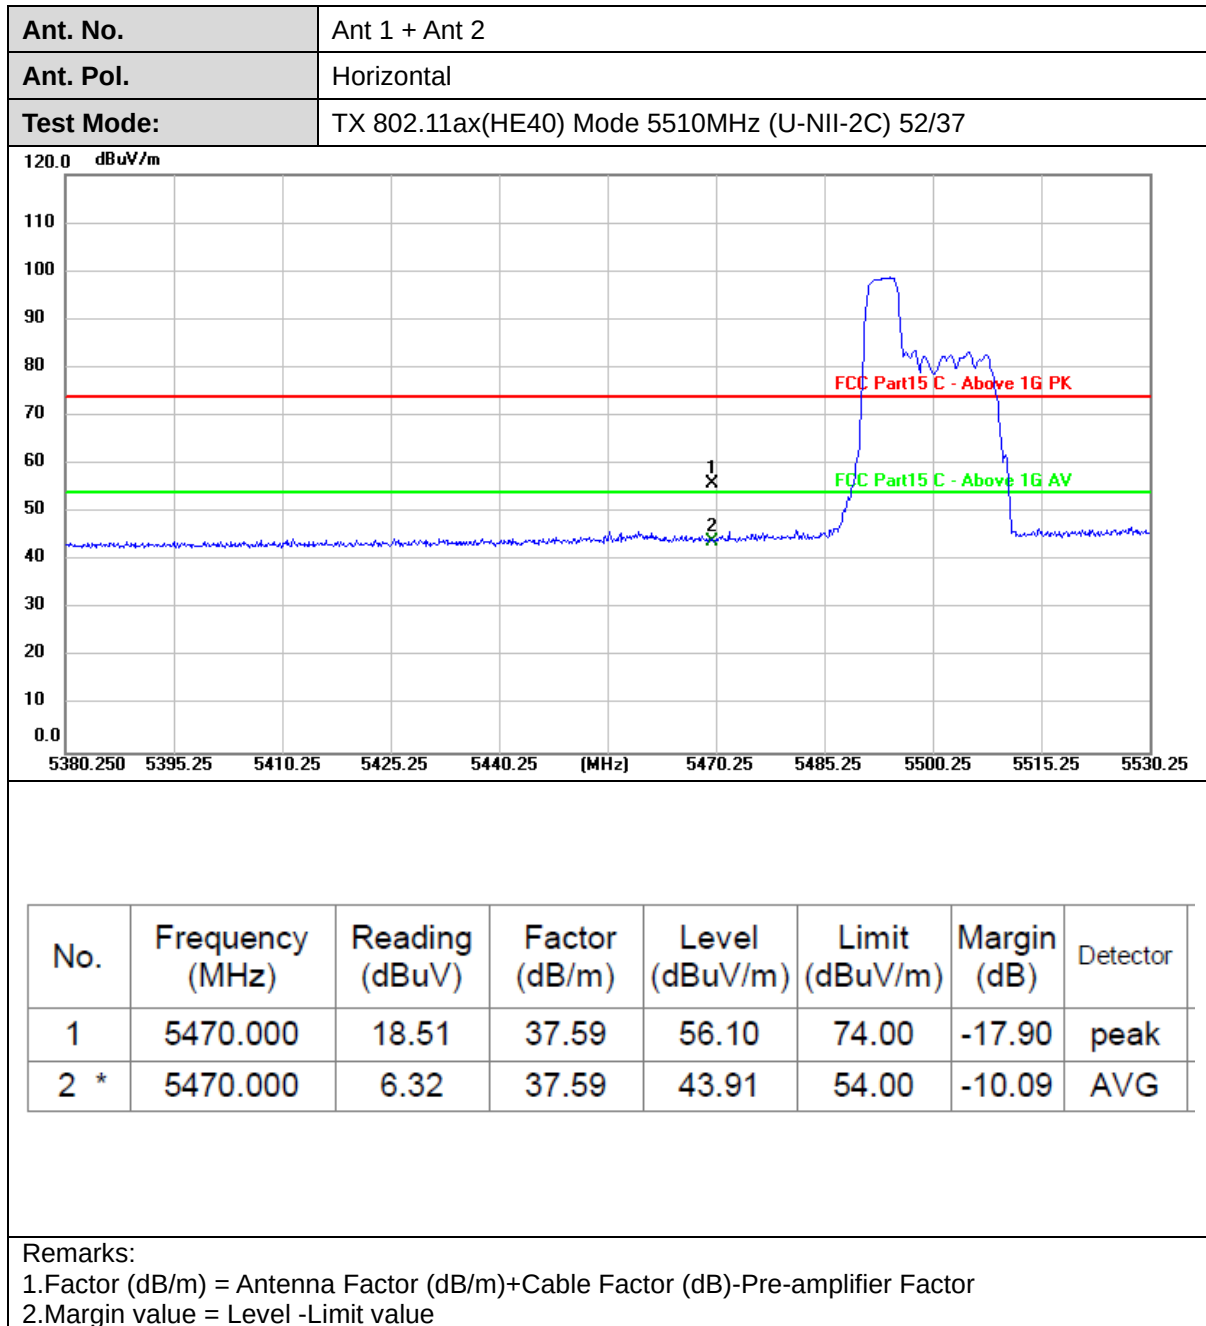

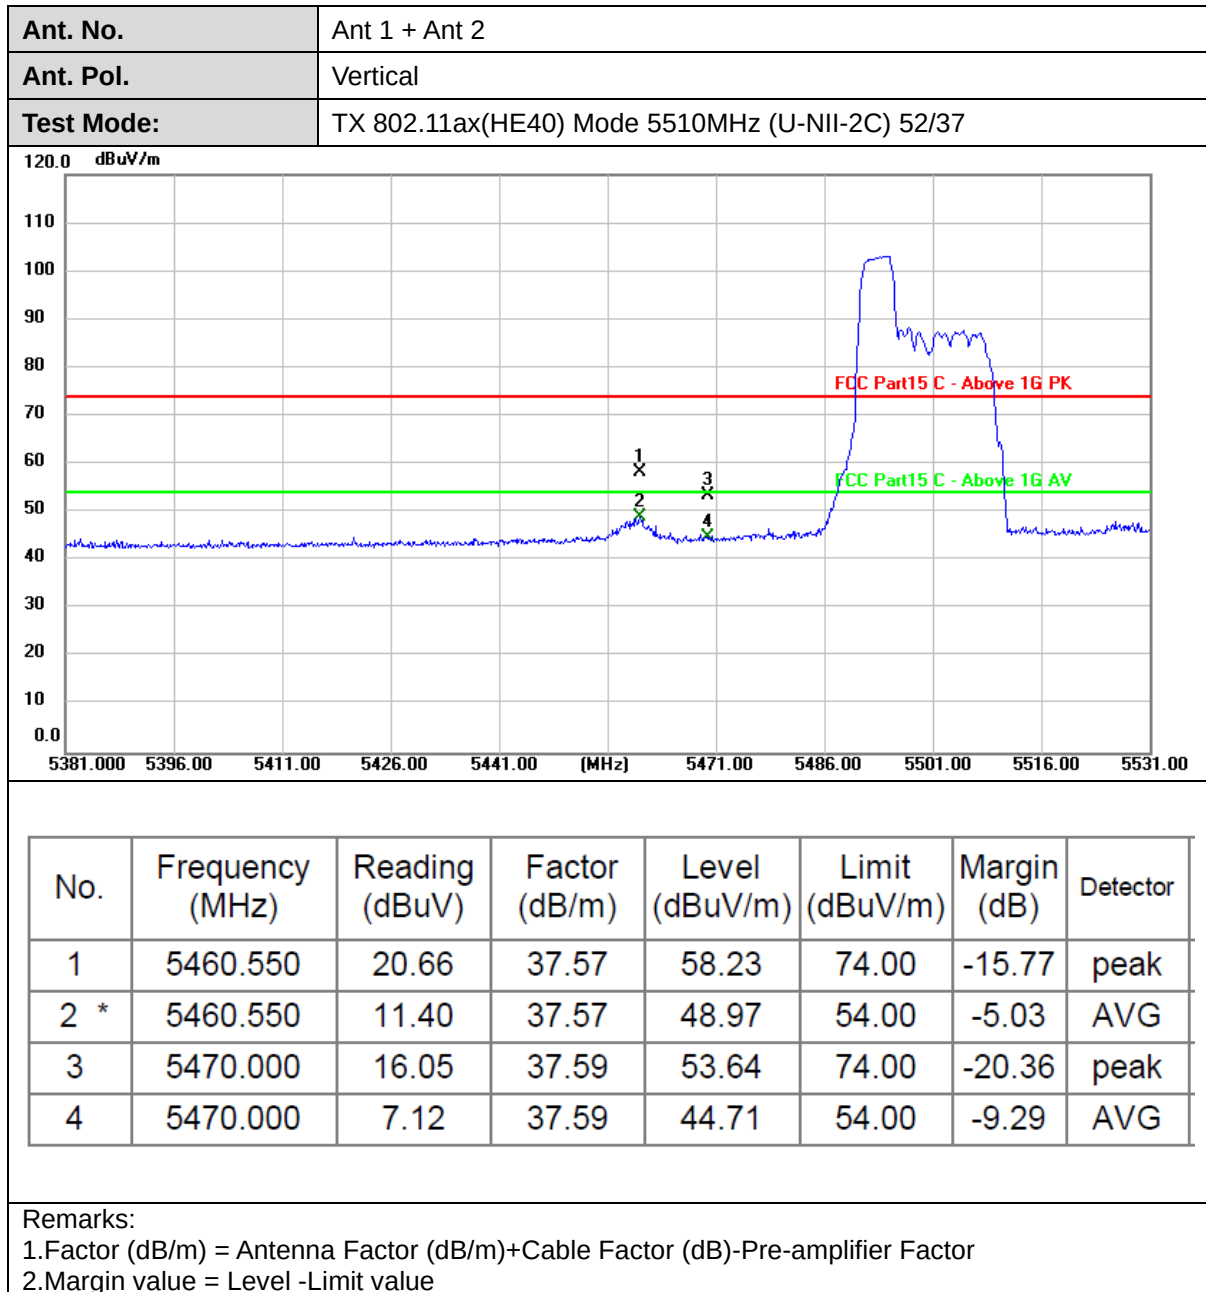


Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5510MHz (U-NII-2C) 106/53						


120.0
dBuV/m


5380.250 5395.25 5410.25 5425.25 5440.25 (MHz) 5470.25 5485.25 5500.25 5515.25 5530.25


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	15.26	37.59	52.85	74.00	-21.15	peak
2 *	5470.000	6.72	37.59	44.31	54.00	-9.69	AVG


Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

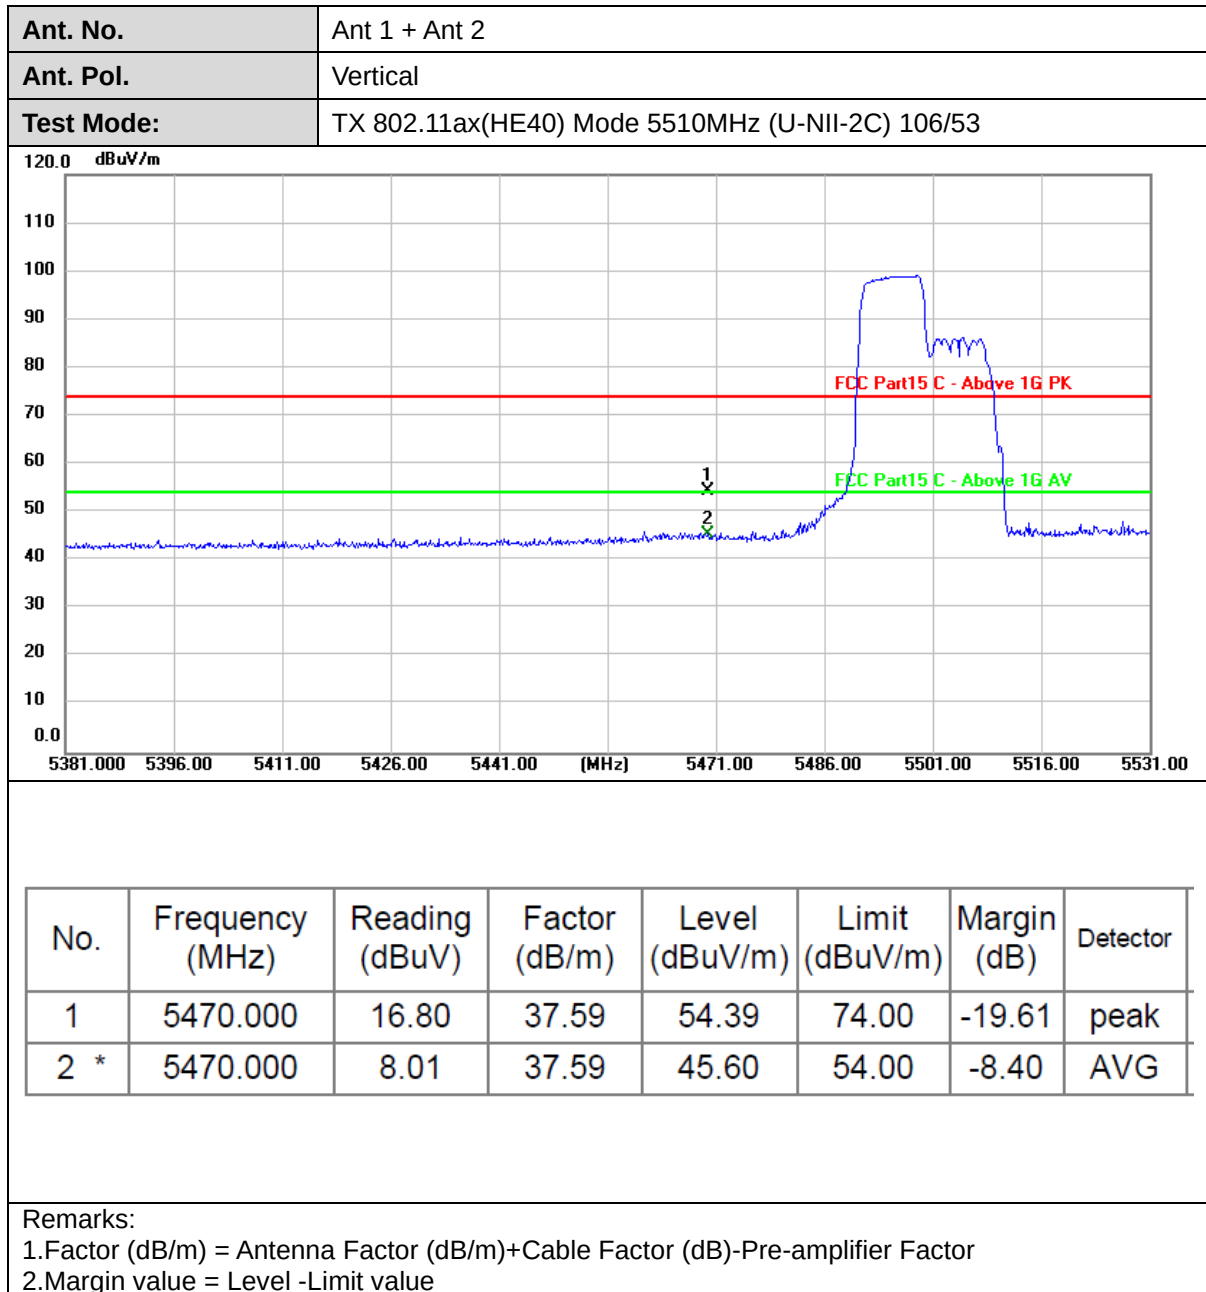

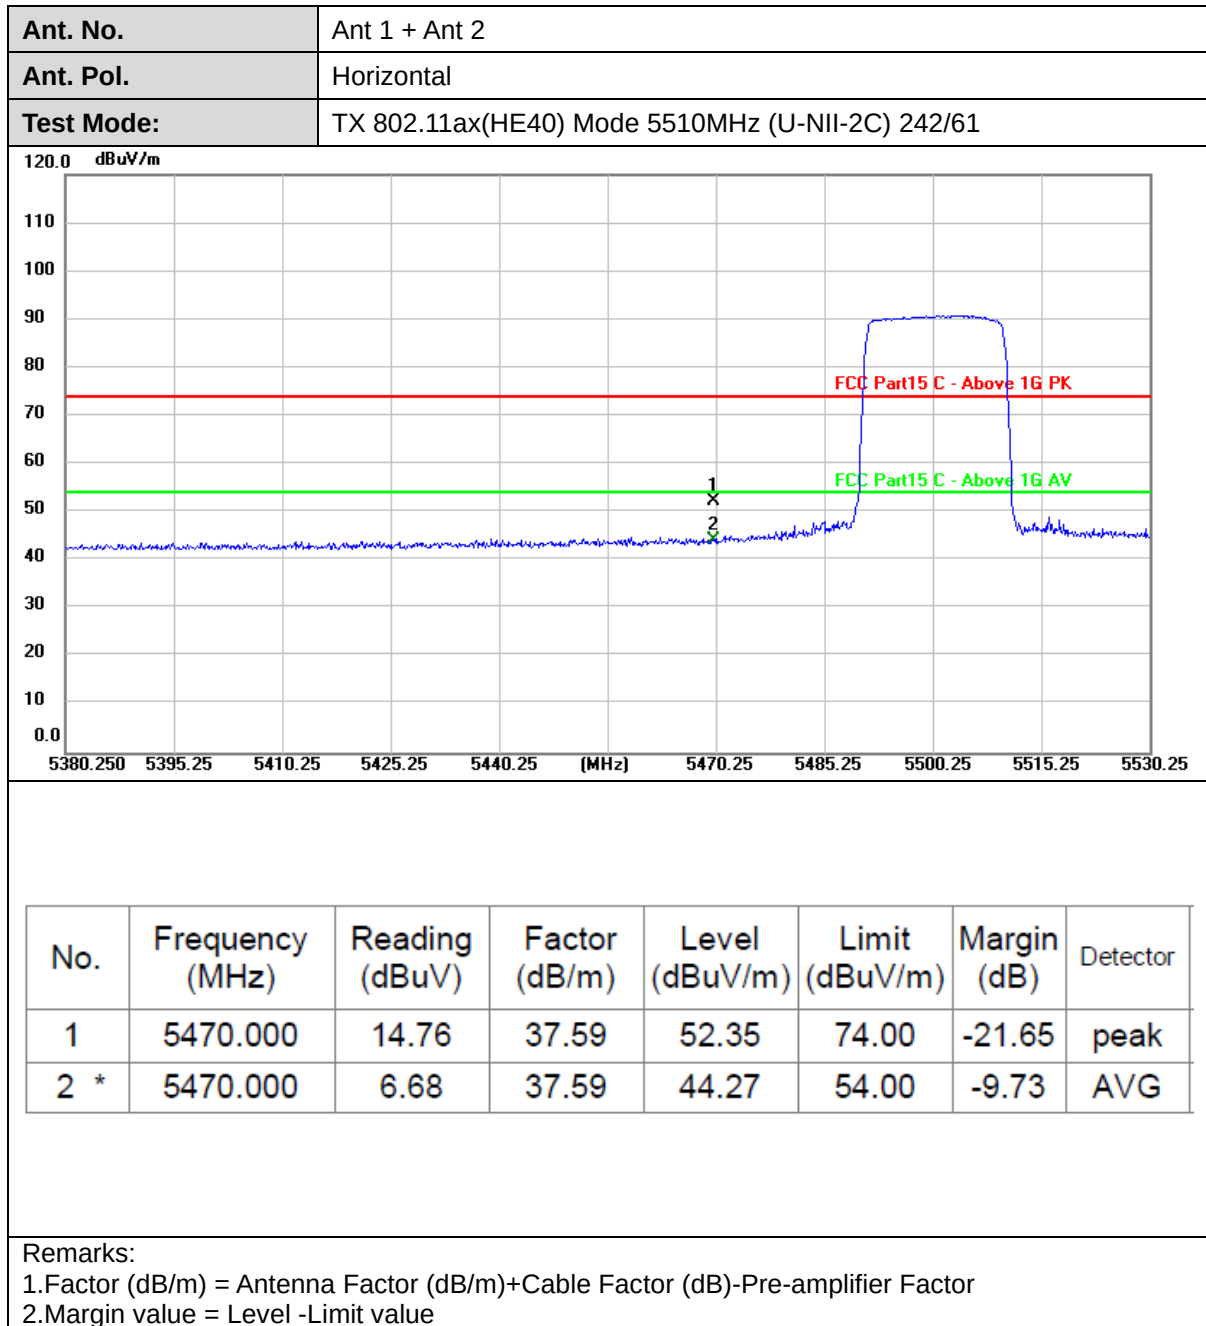

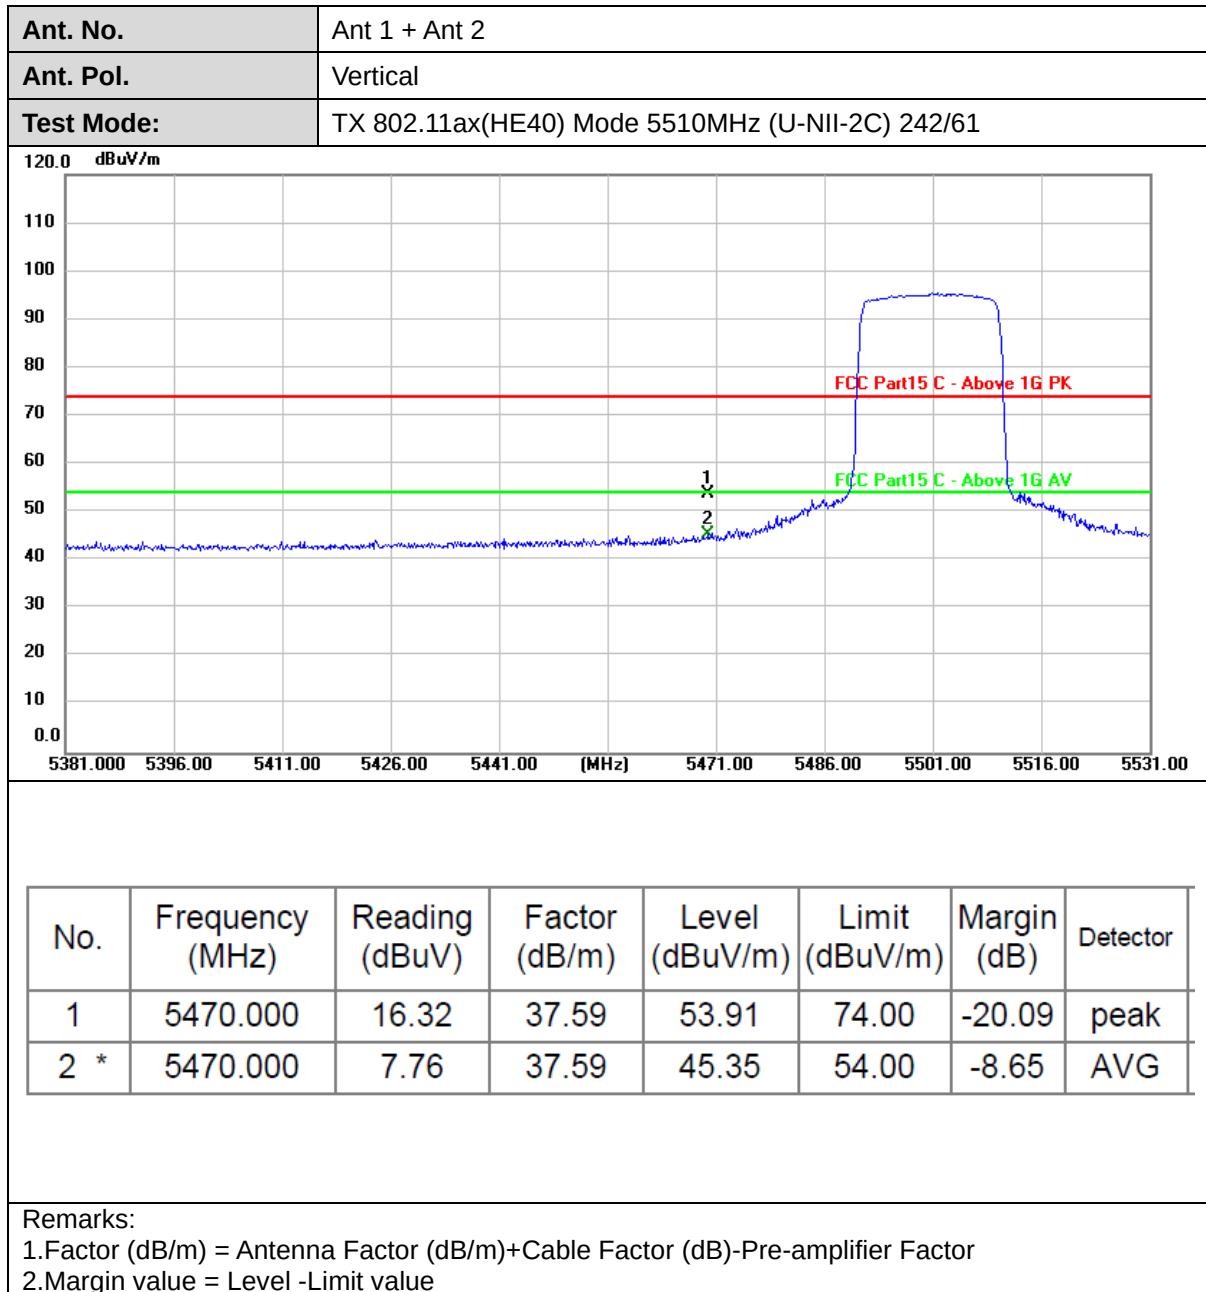

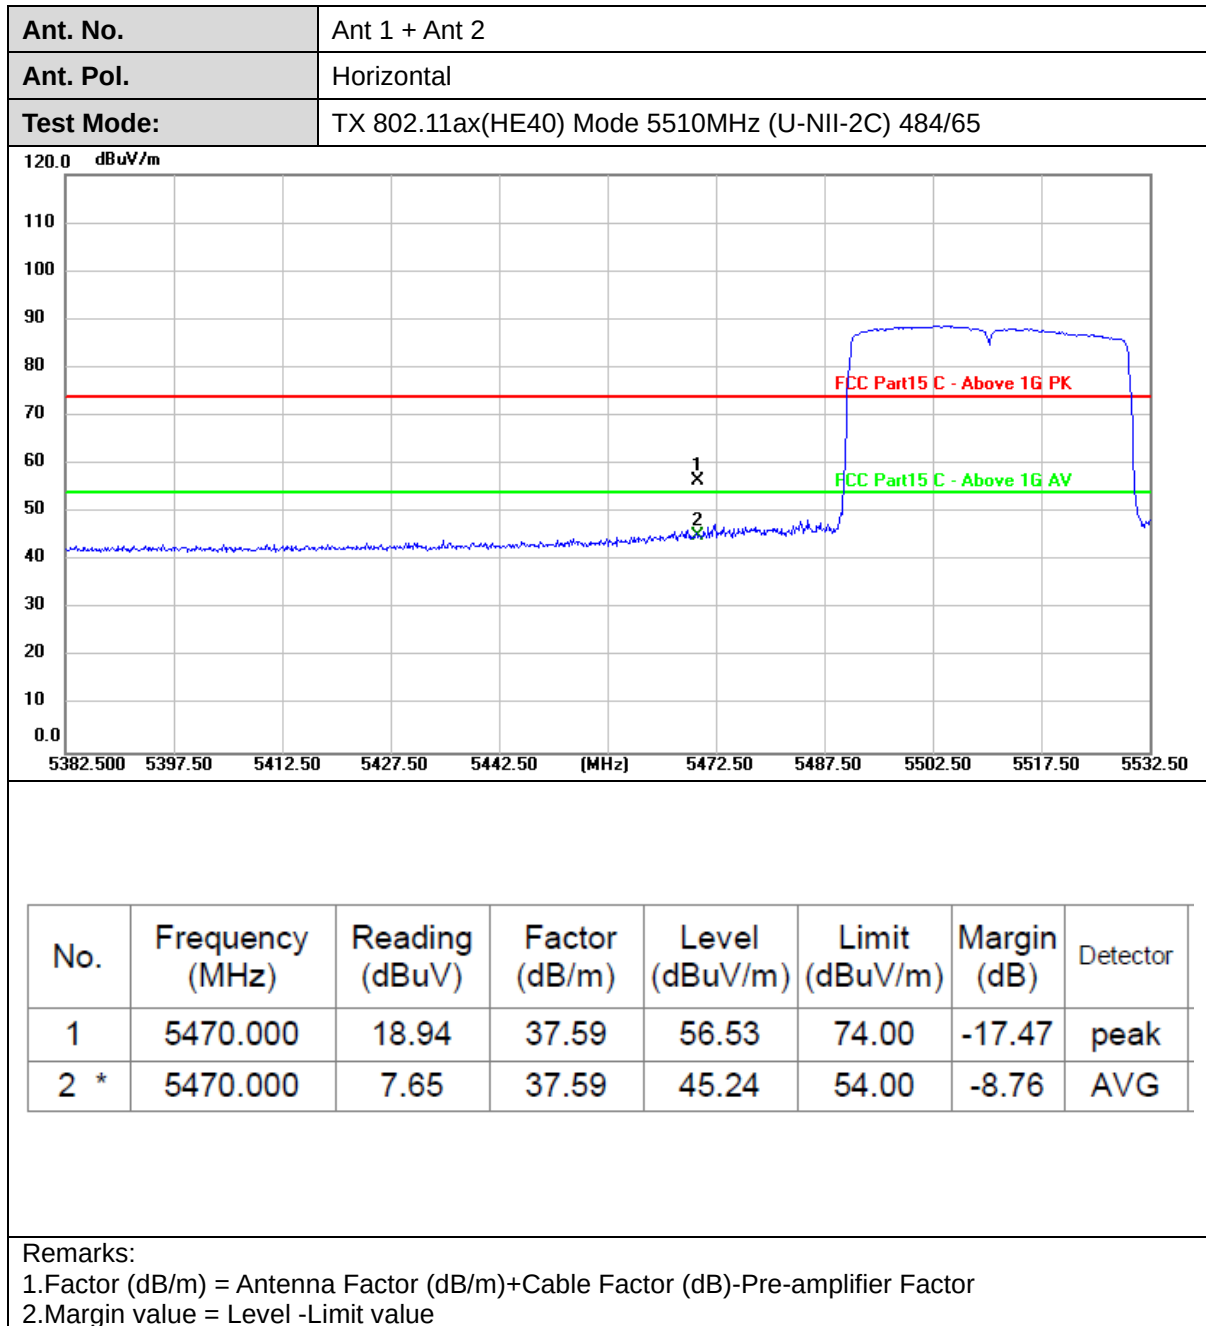

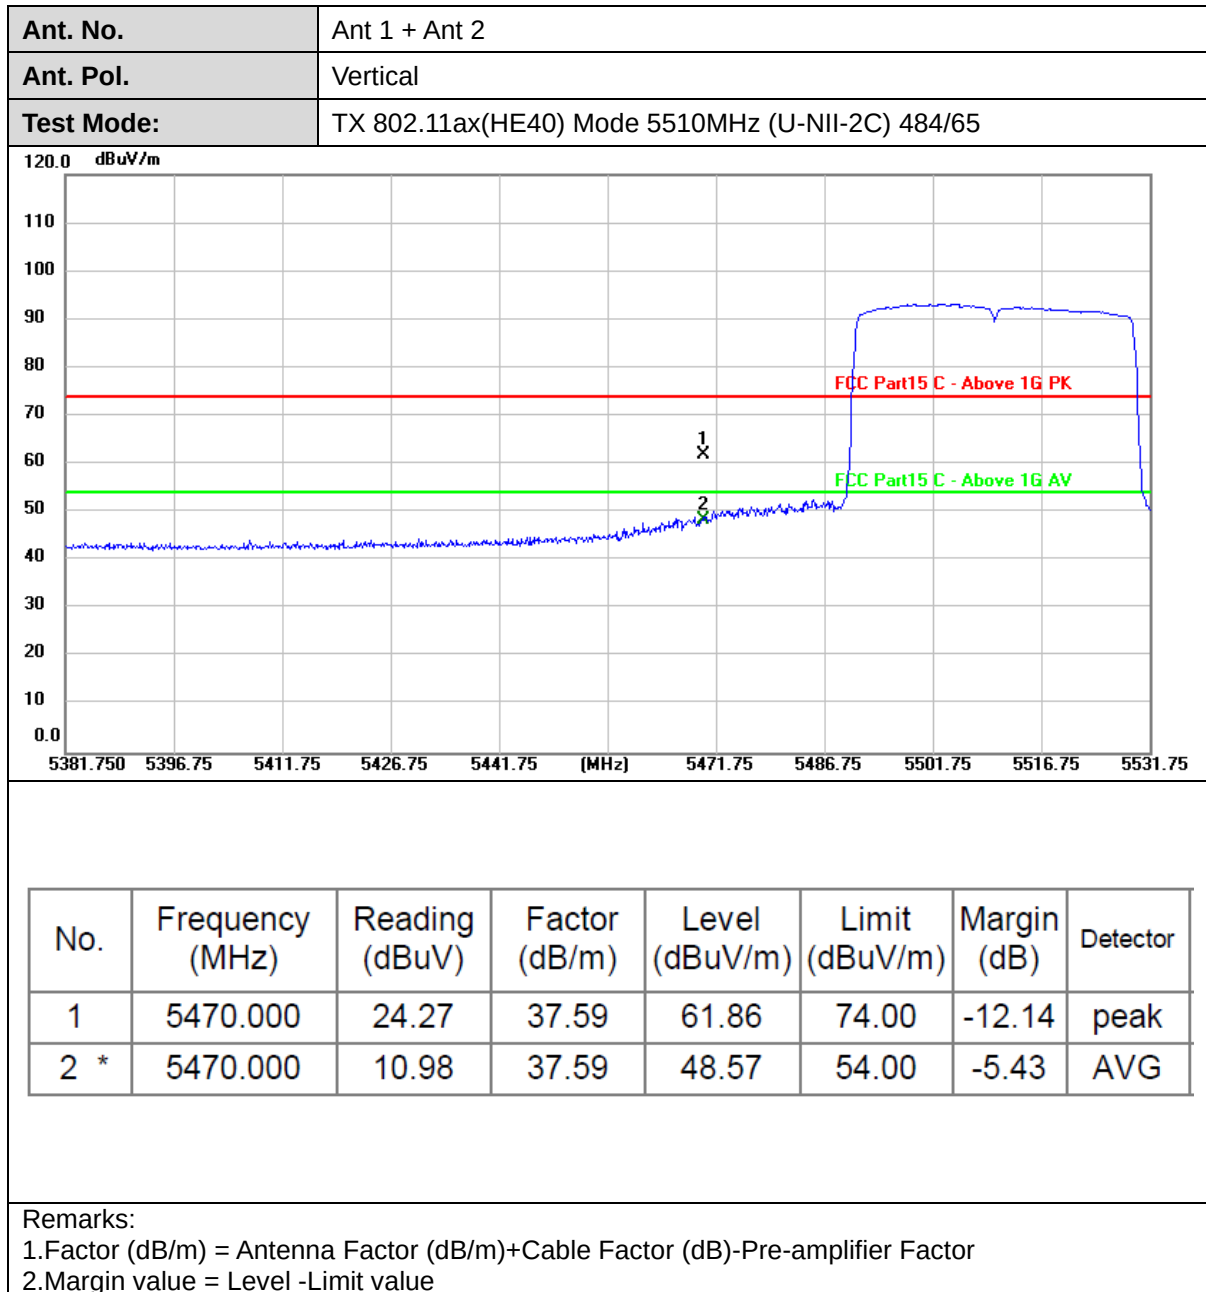


Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5670MHz (U-NII-2C) 26/17


120.0
dBuV/m

5650.500 5665.50 5680.50 5695.50 5710.50 (MHz) 5740.50 5755.50 5770.50 5785.50 5800.50

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	17.34	38.16	55.50	74.00	-18.50	peak
2 *	5725.000	7.44	38.16	45.60	54.00	-8.40	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

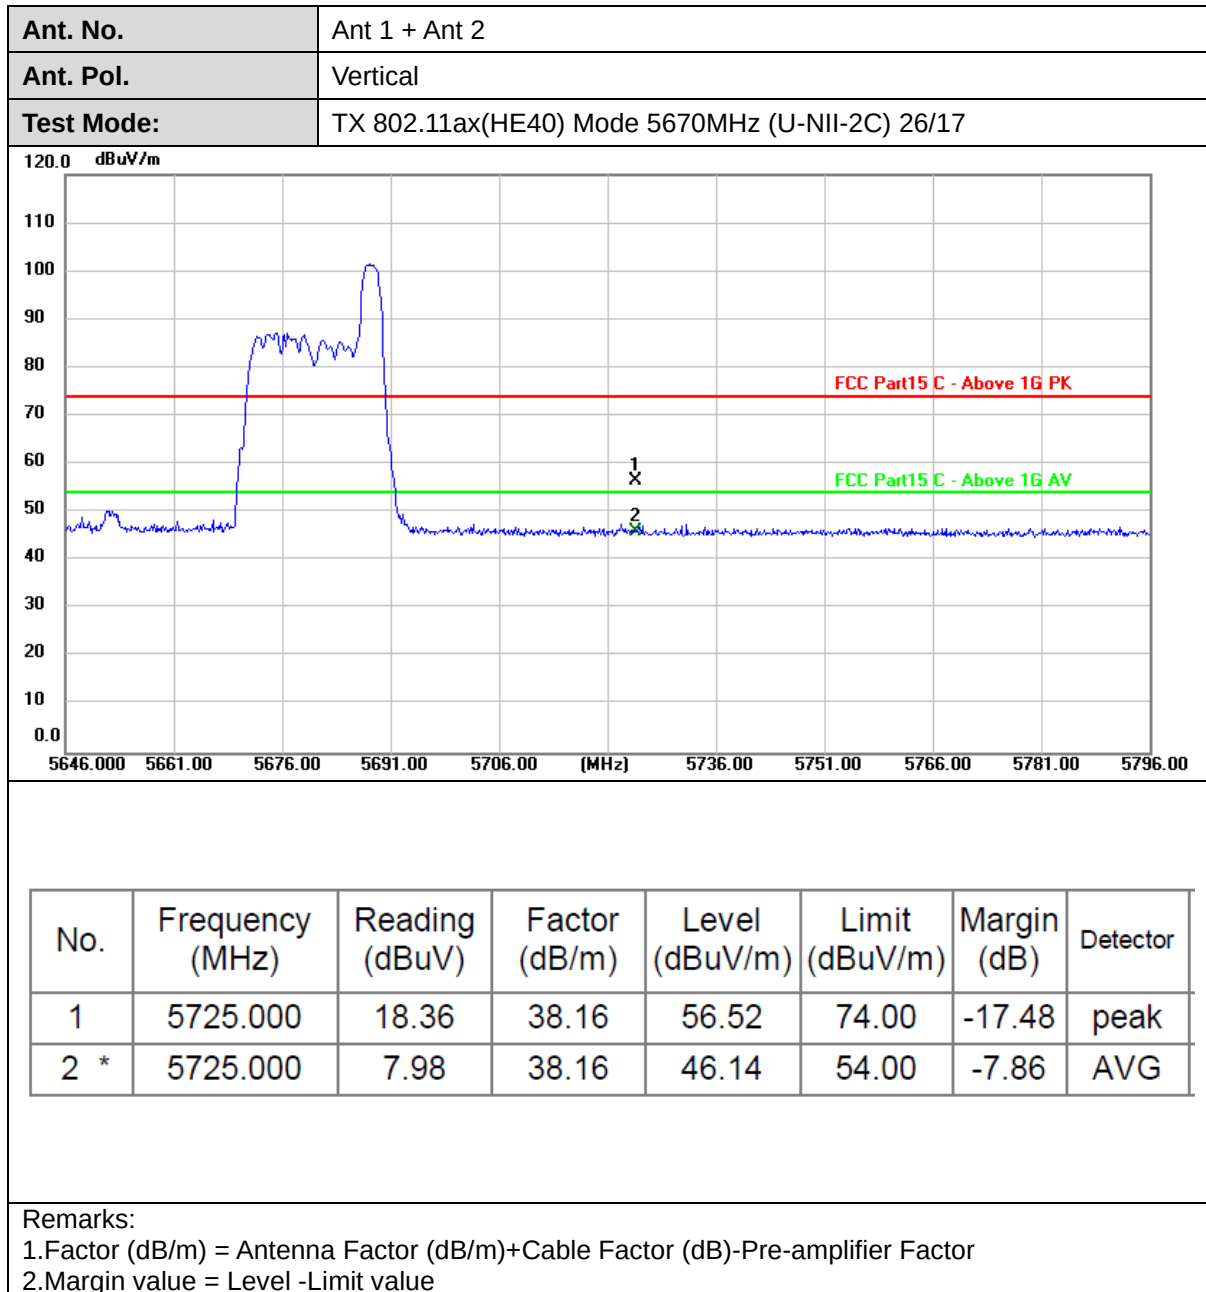


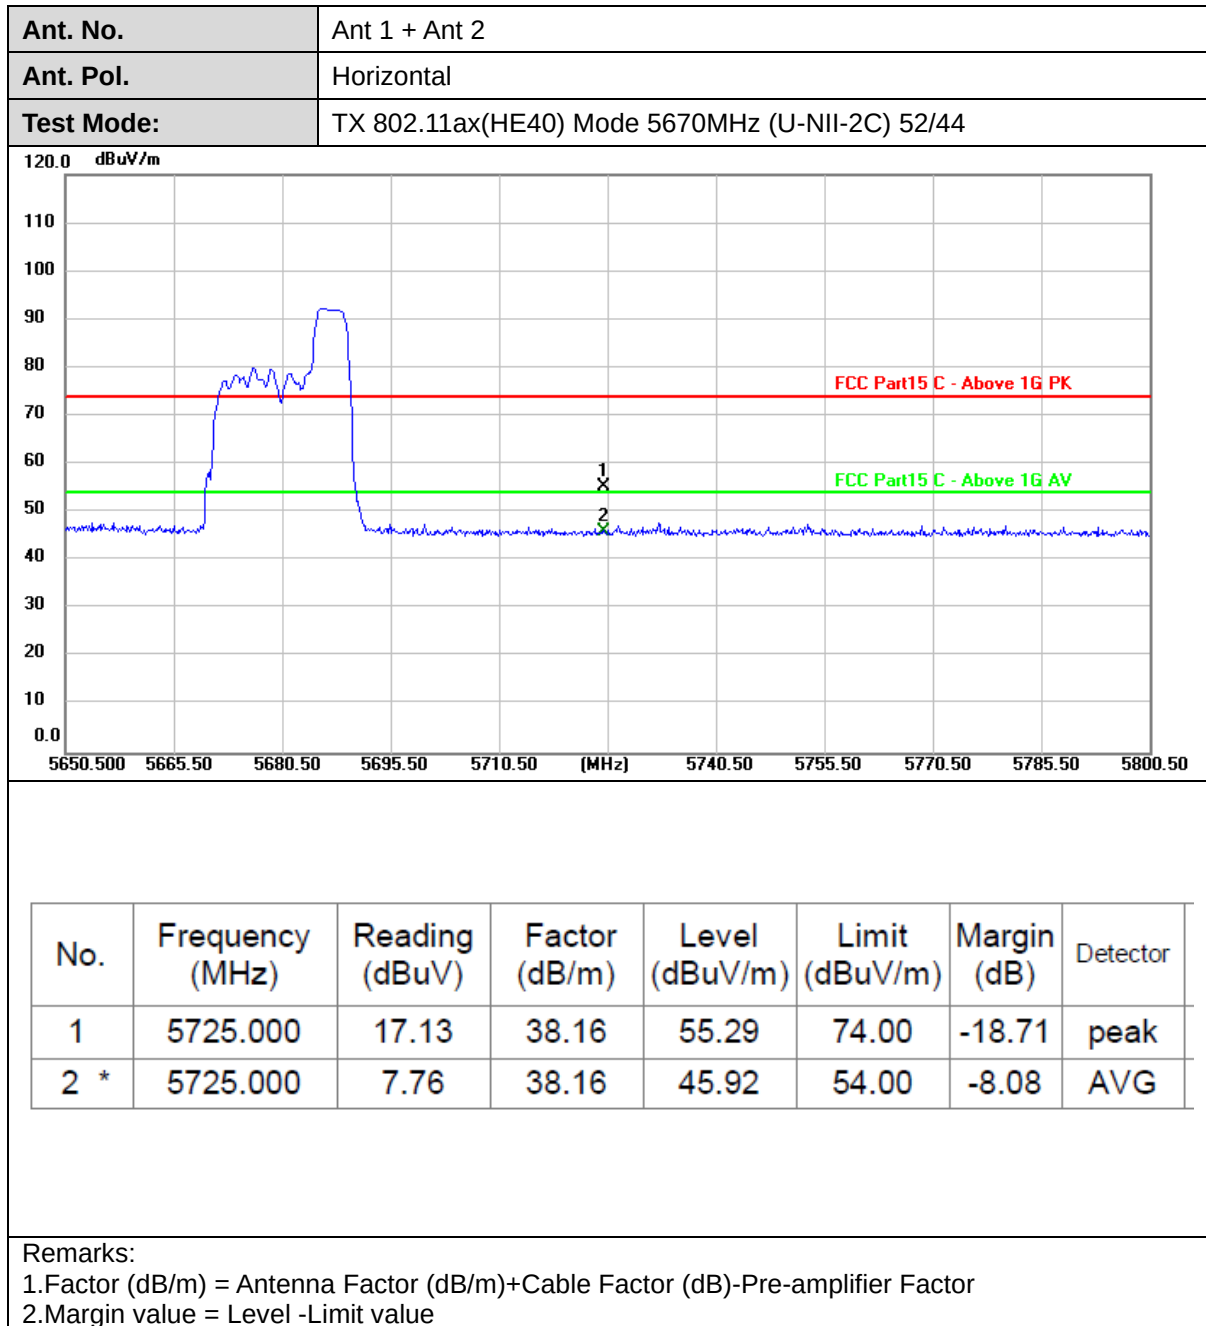

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5670MHz (U-NII-2C) 52/44

120.0


dBuV/m

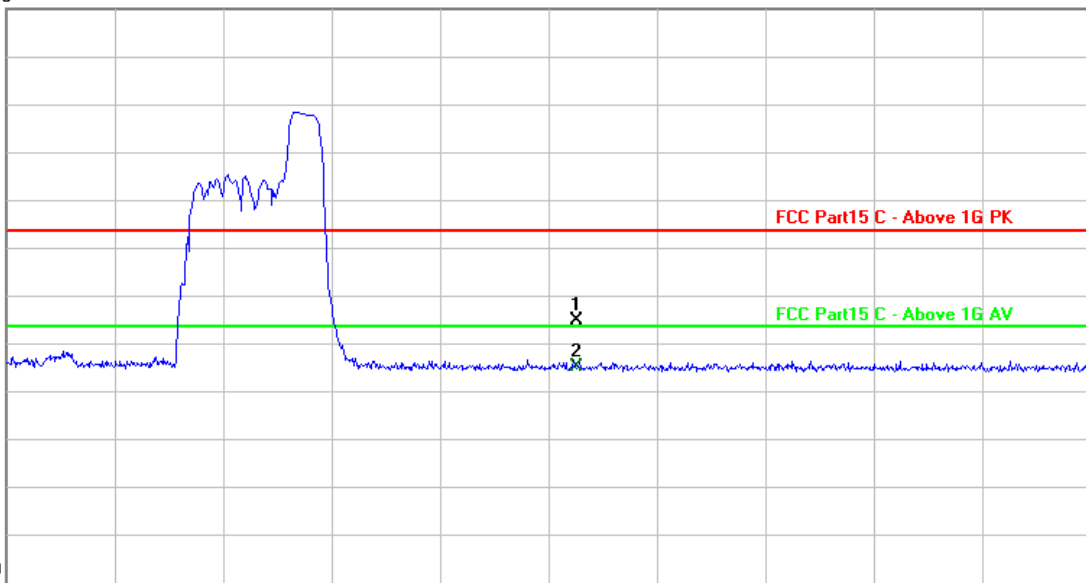

5646.000 5661.00 5676.00 5691.00 5706.00 (MHz) 5736.00 5751.00 5766.00 5781.00 5796.00

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	17.22	38.16	55.38	74.00	-18.62	peak
2 *	5725.000	7.63	38.16	45.79	54.00	-8.21	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

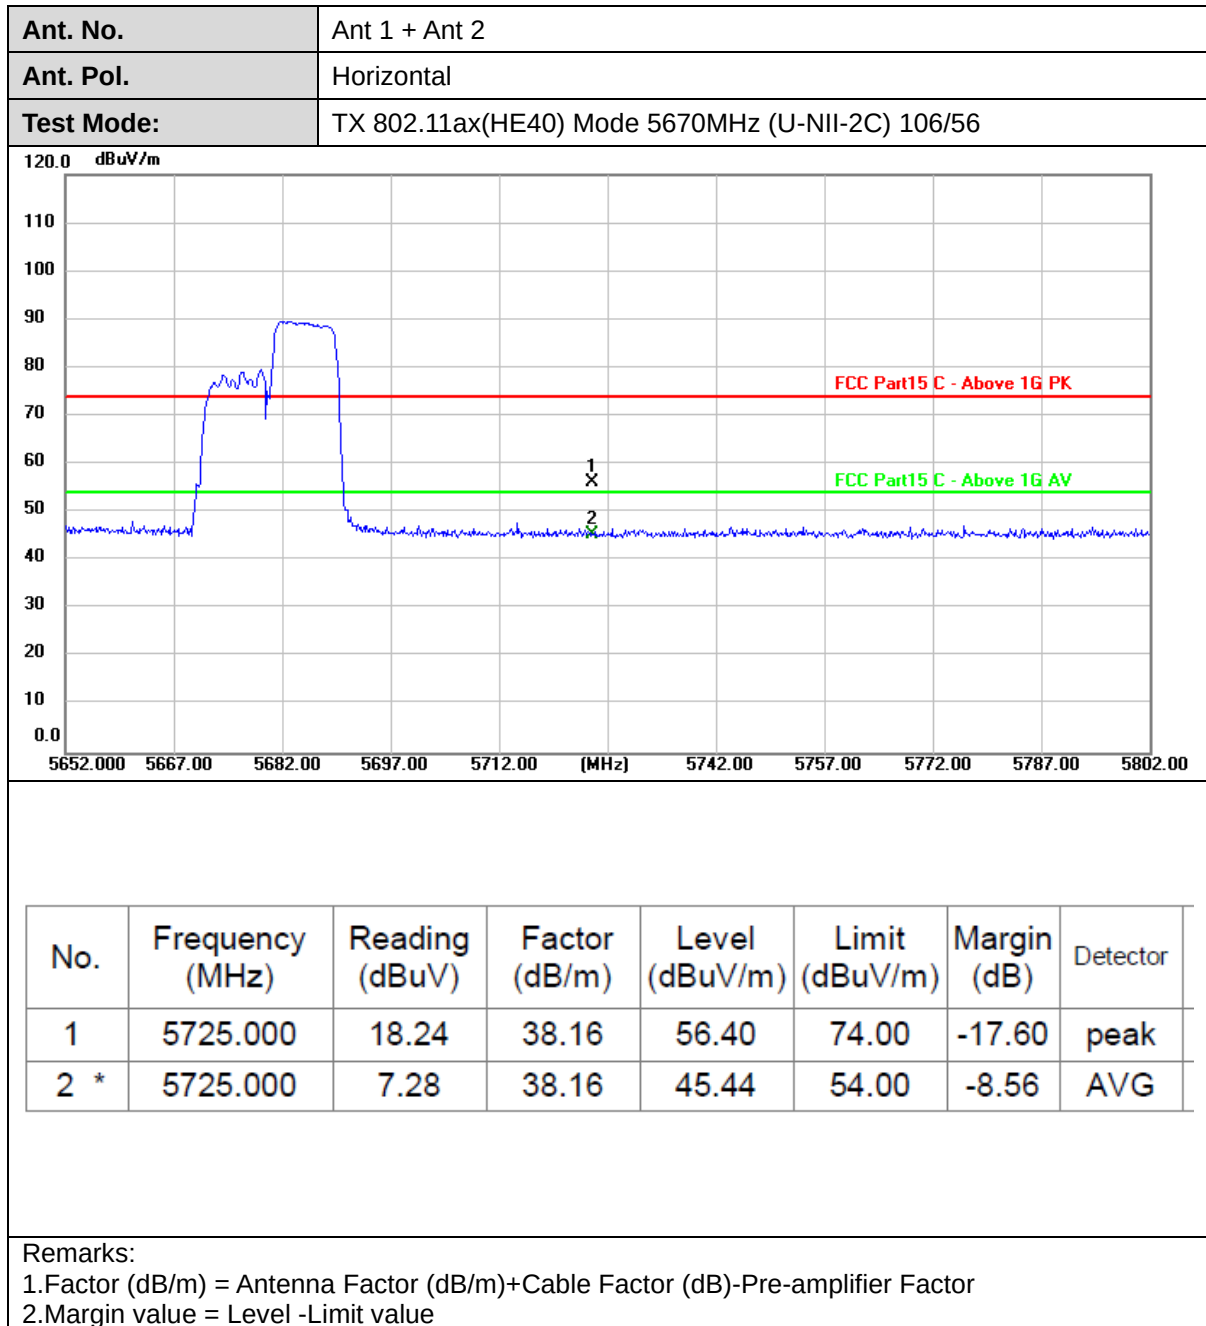

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5670MHz (U-NII-2C) 106/56

120.0 dBuV/m

5646.000 5661.00 5676.00 5691.00 5706.00 (MHz) 5736.00 5751.00 5766.00 5781.00 5796.00

FCC Part15 C - Above 1G PK

FCC Part15 C - Above 1G AV

1 X


2

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	17.02	38.16	55.18	74.00	-18.82	peak
2 *	5725.000	7.05	38.16	45.21	54.00	-8.79	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5670MHz (U-NII-2C) 242/62


120.0
dBuV/m

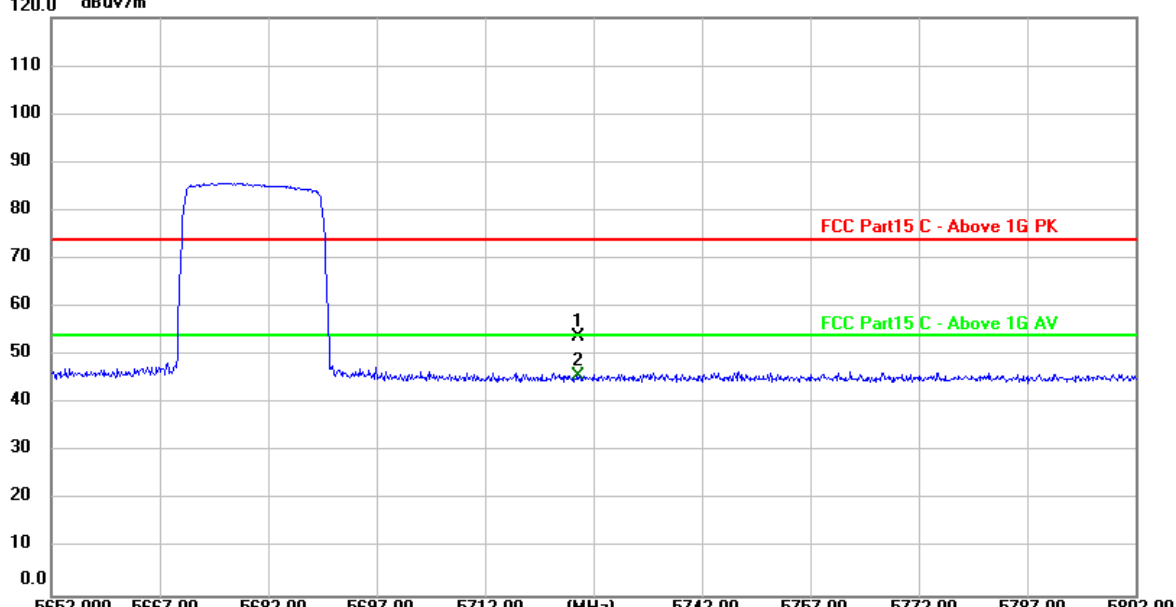



5652.000 5667.00 5682.00 5697.00 5712.00 [MHz] 5742.00 5757.00 5772.00 5787.00 5802.00


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	15.79	38.16	53.95	74.00	-20.05	peak
2 *	5725.000	7.53	38.16	45.69	54.00	-8.31	AVG


Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

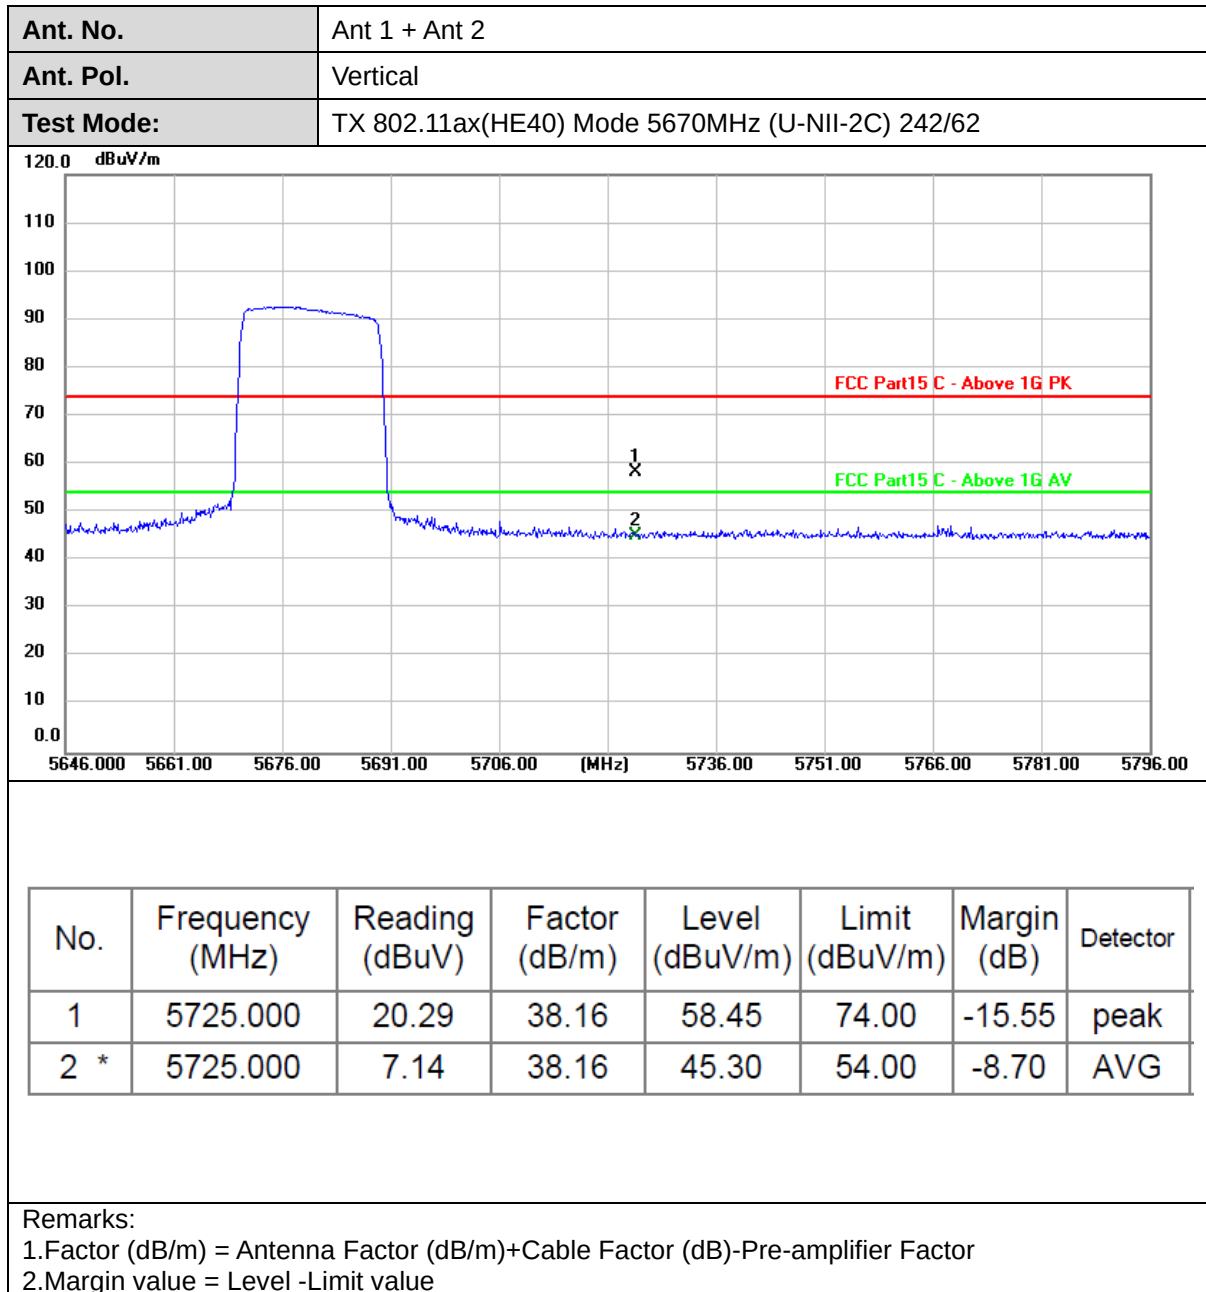


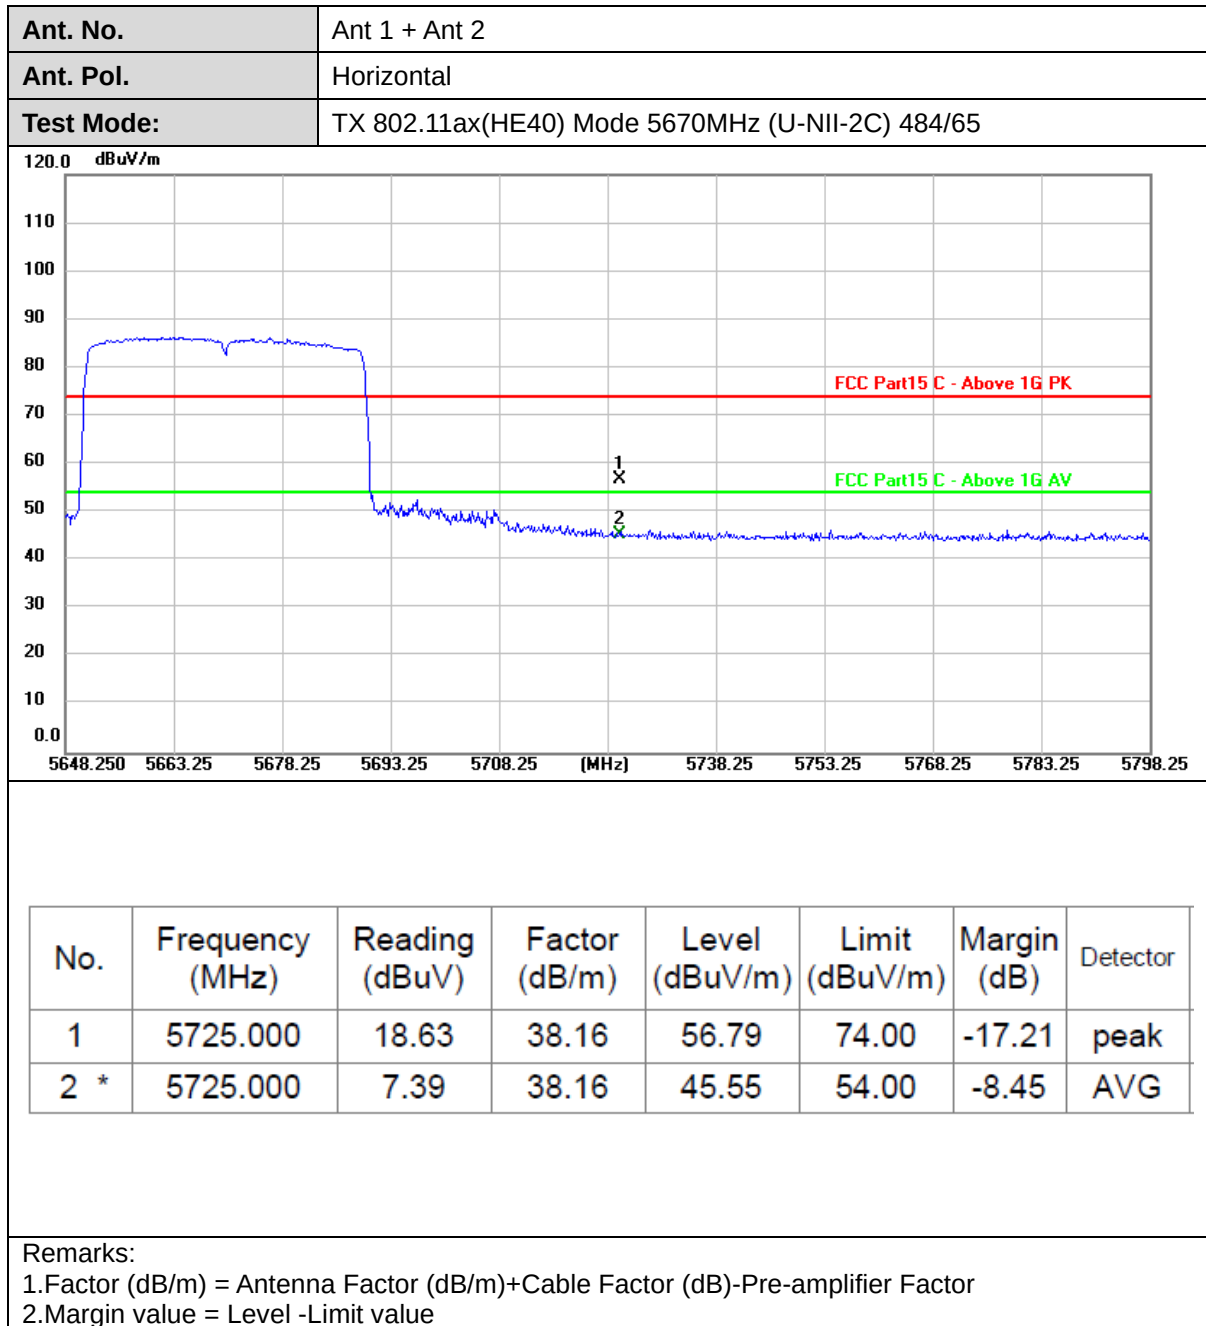


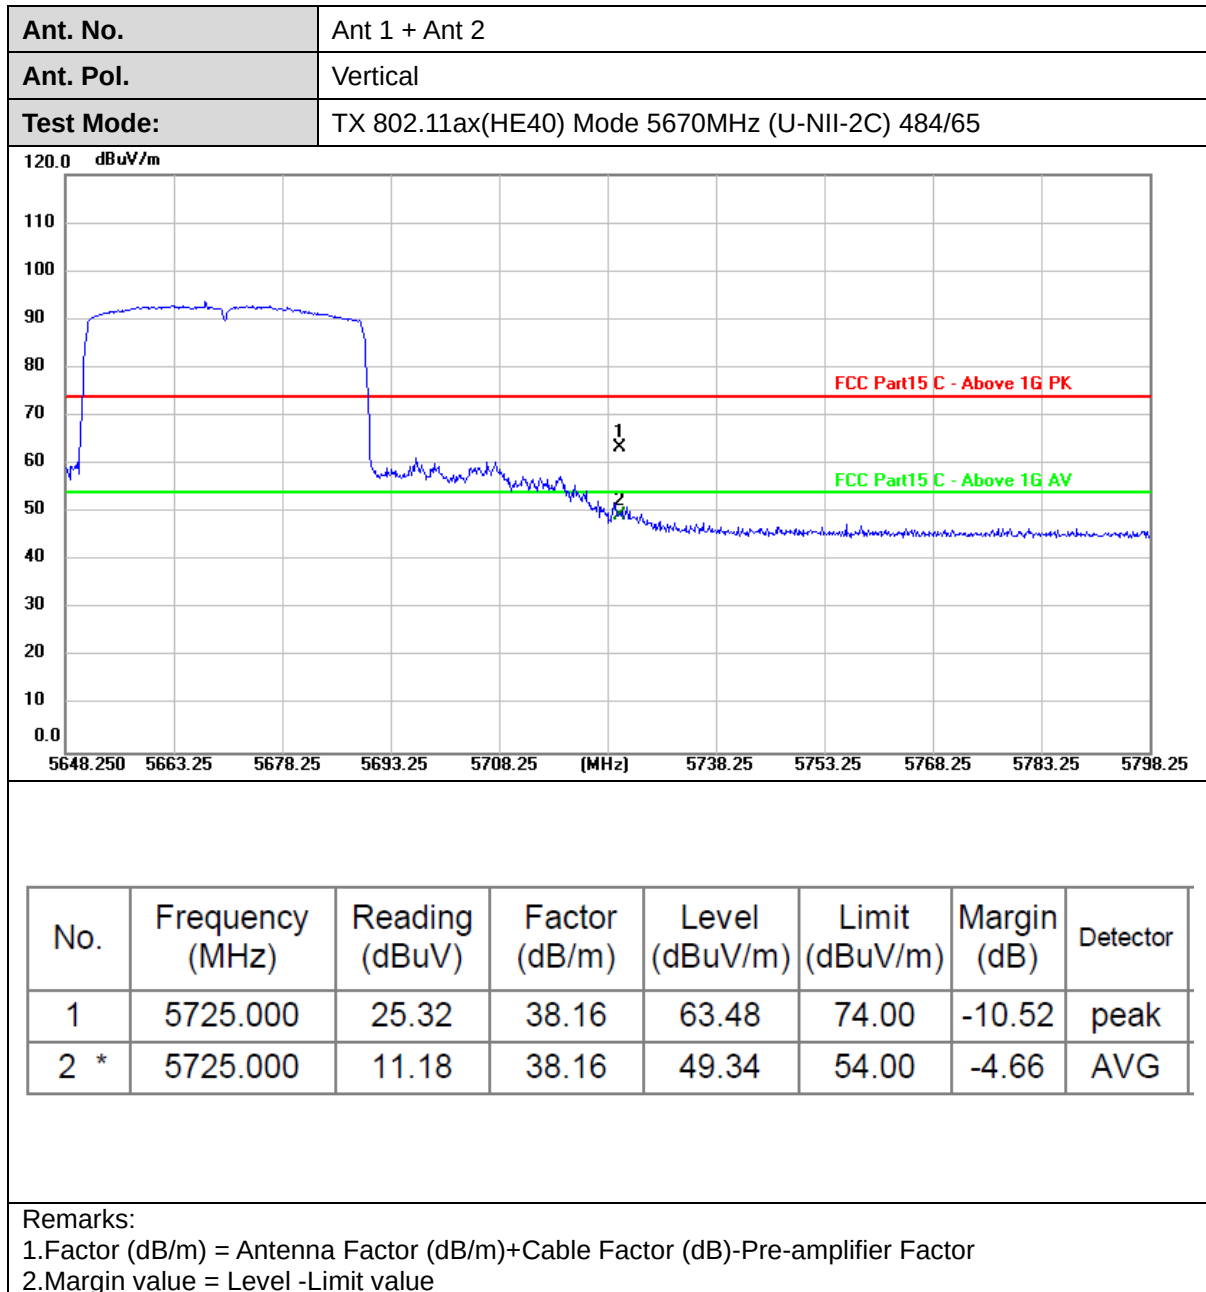


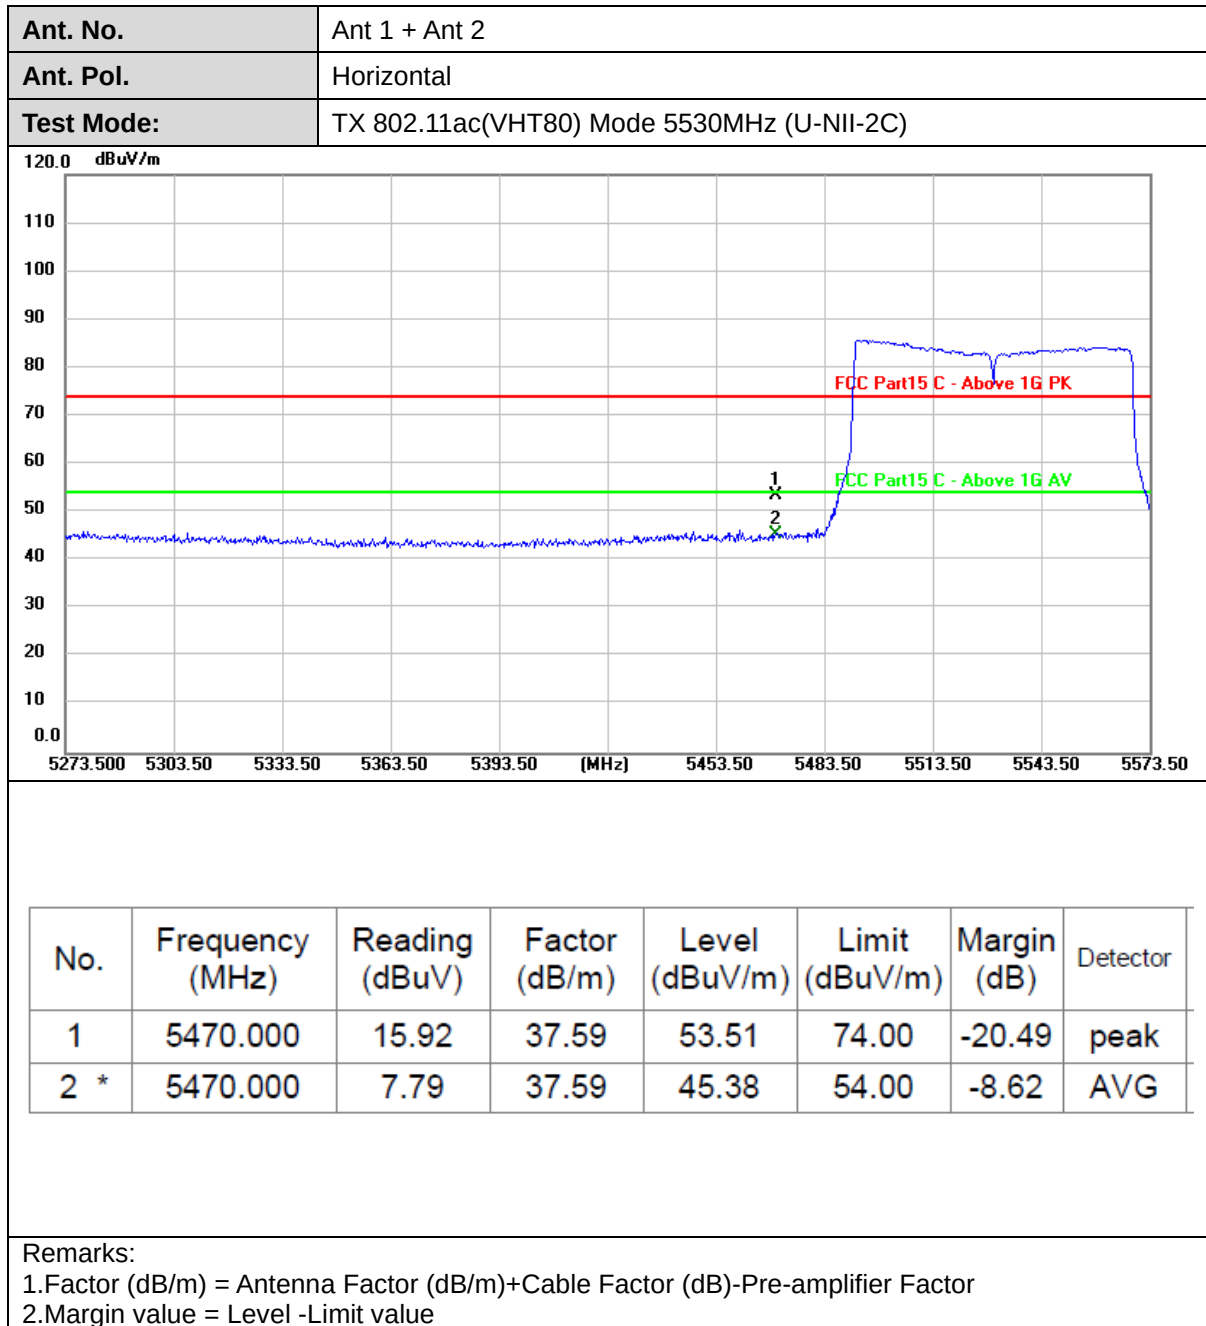


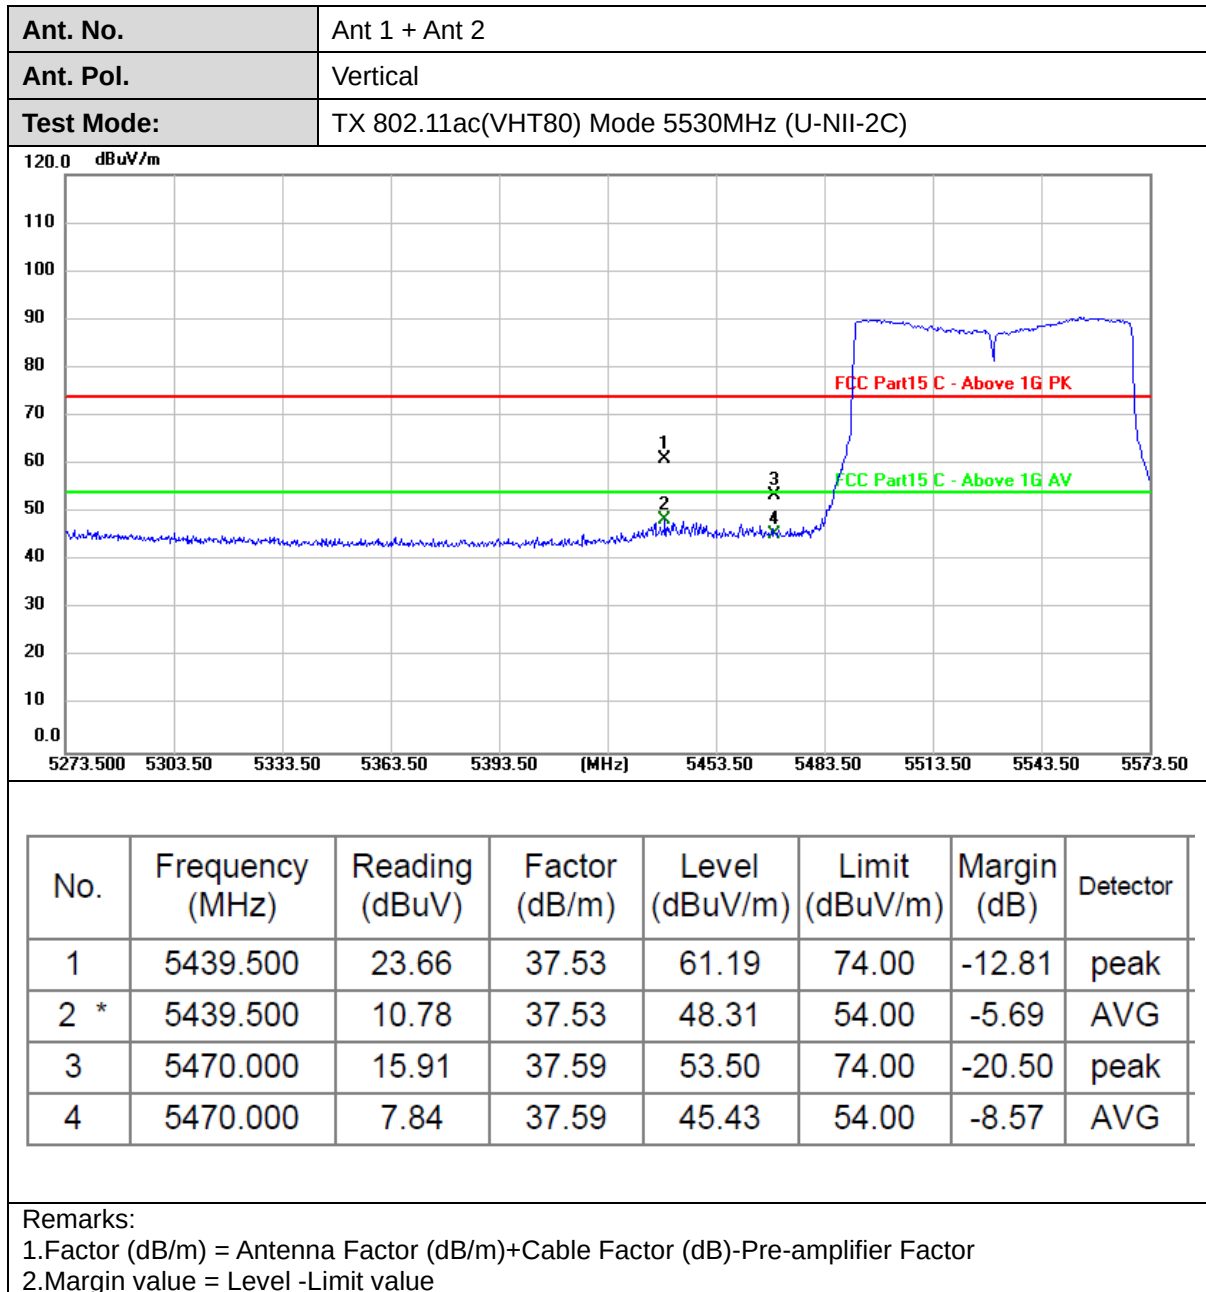


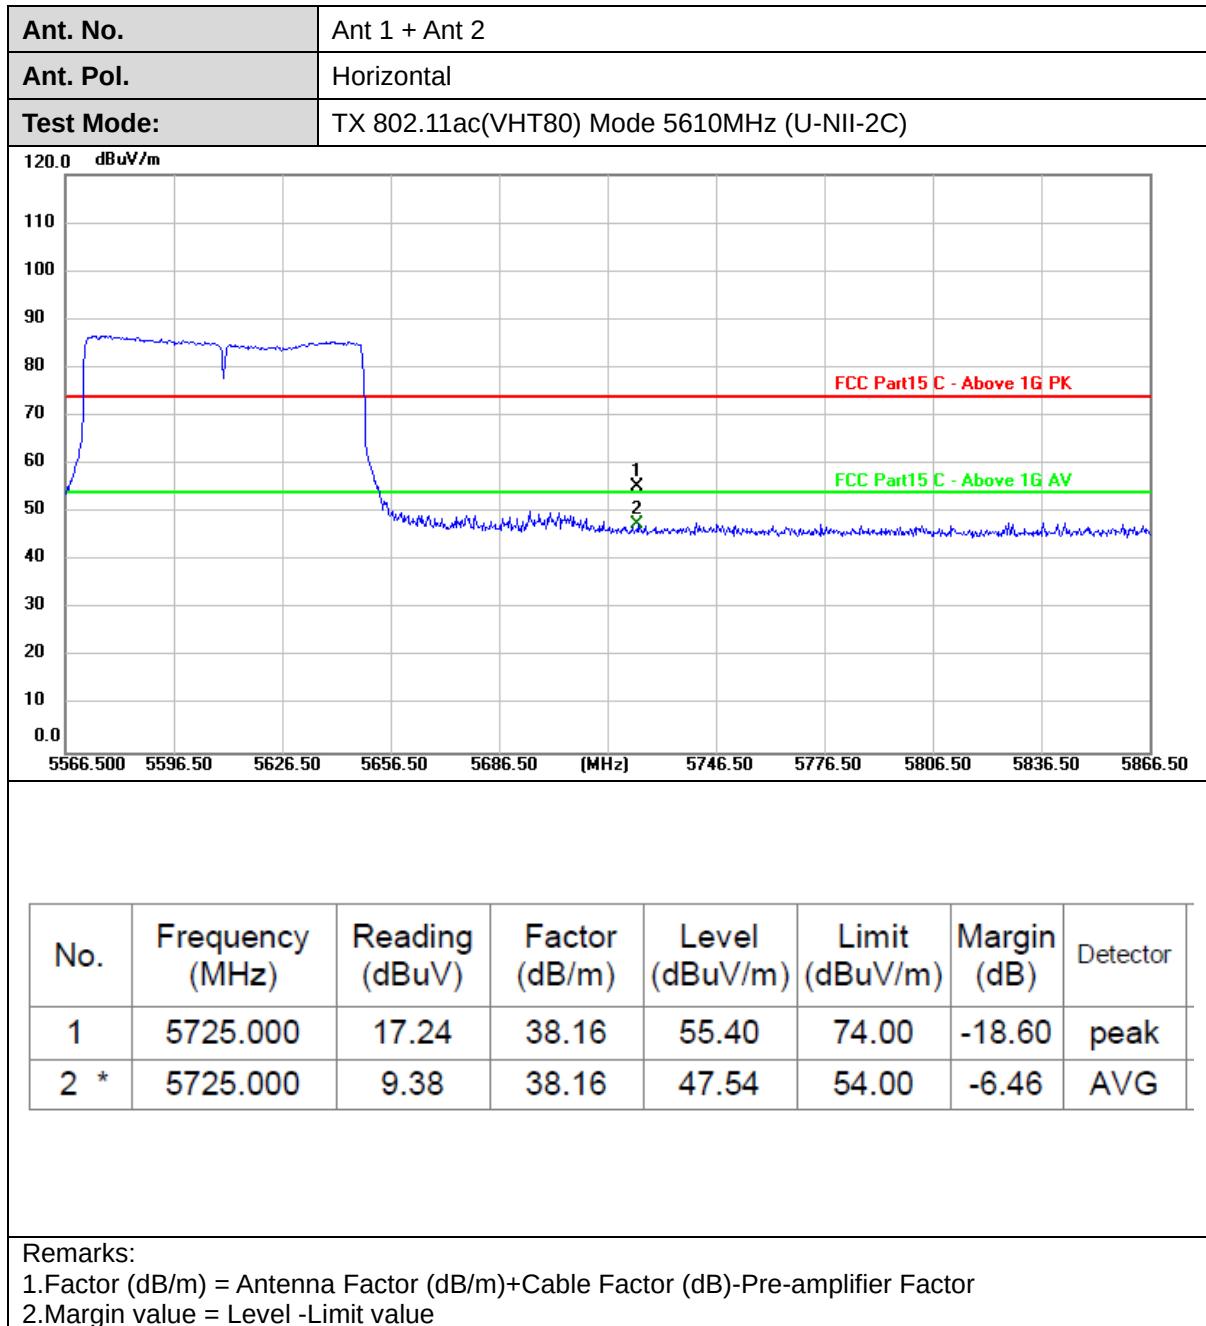


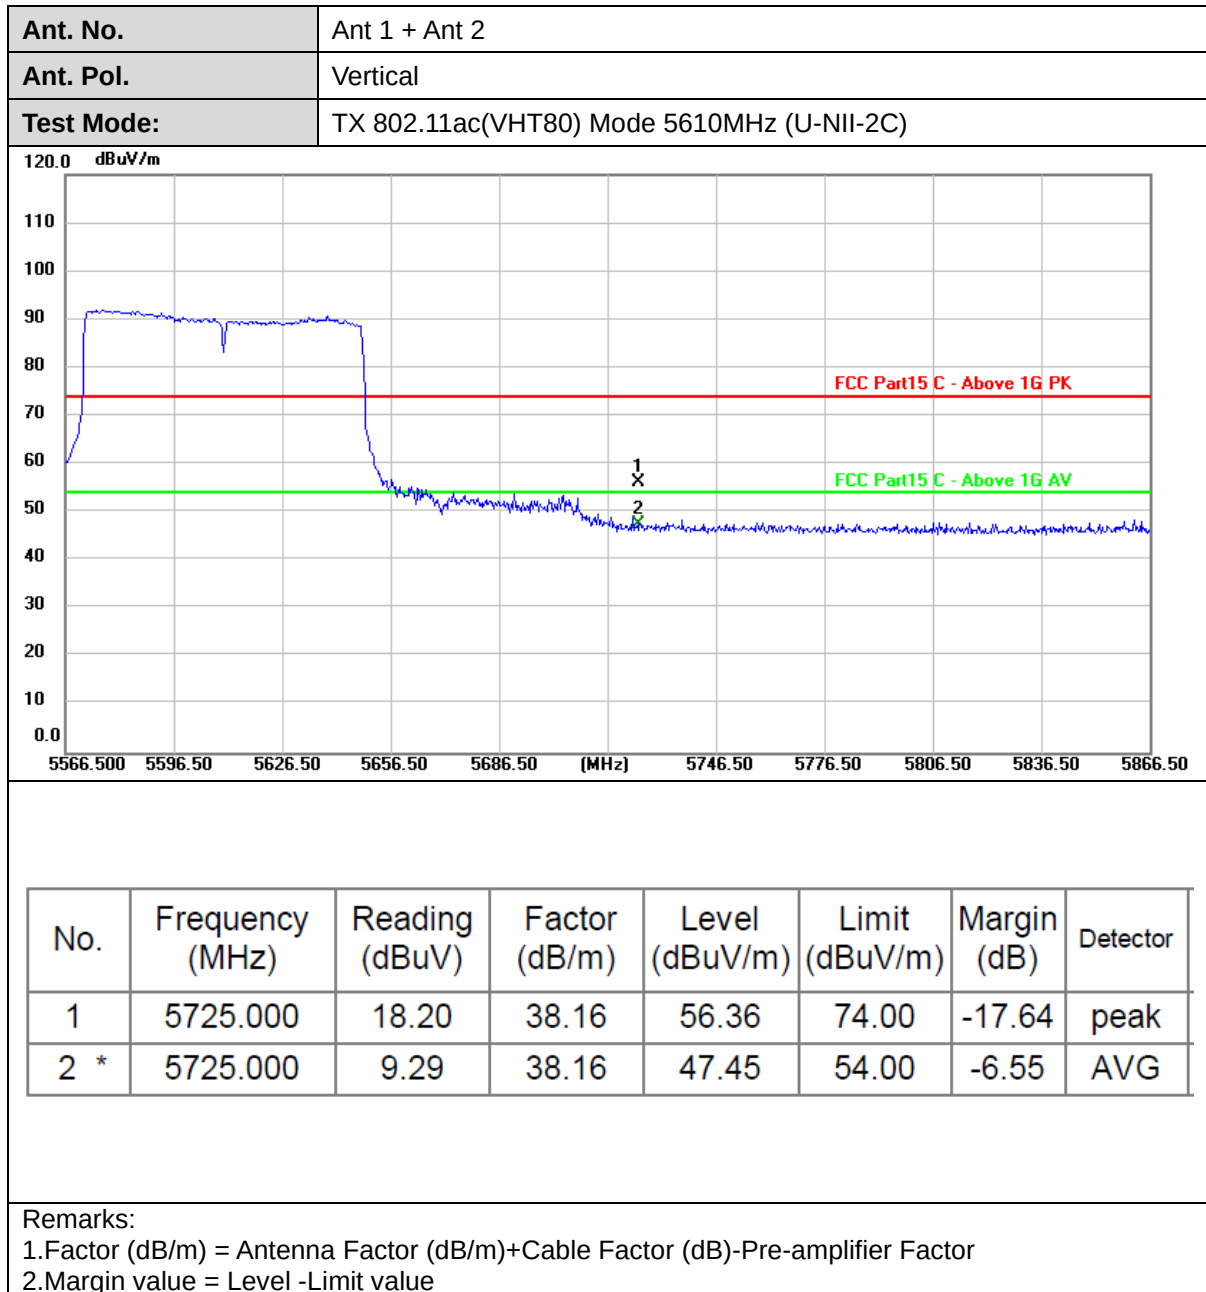


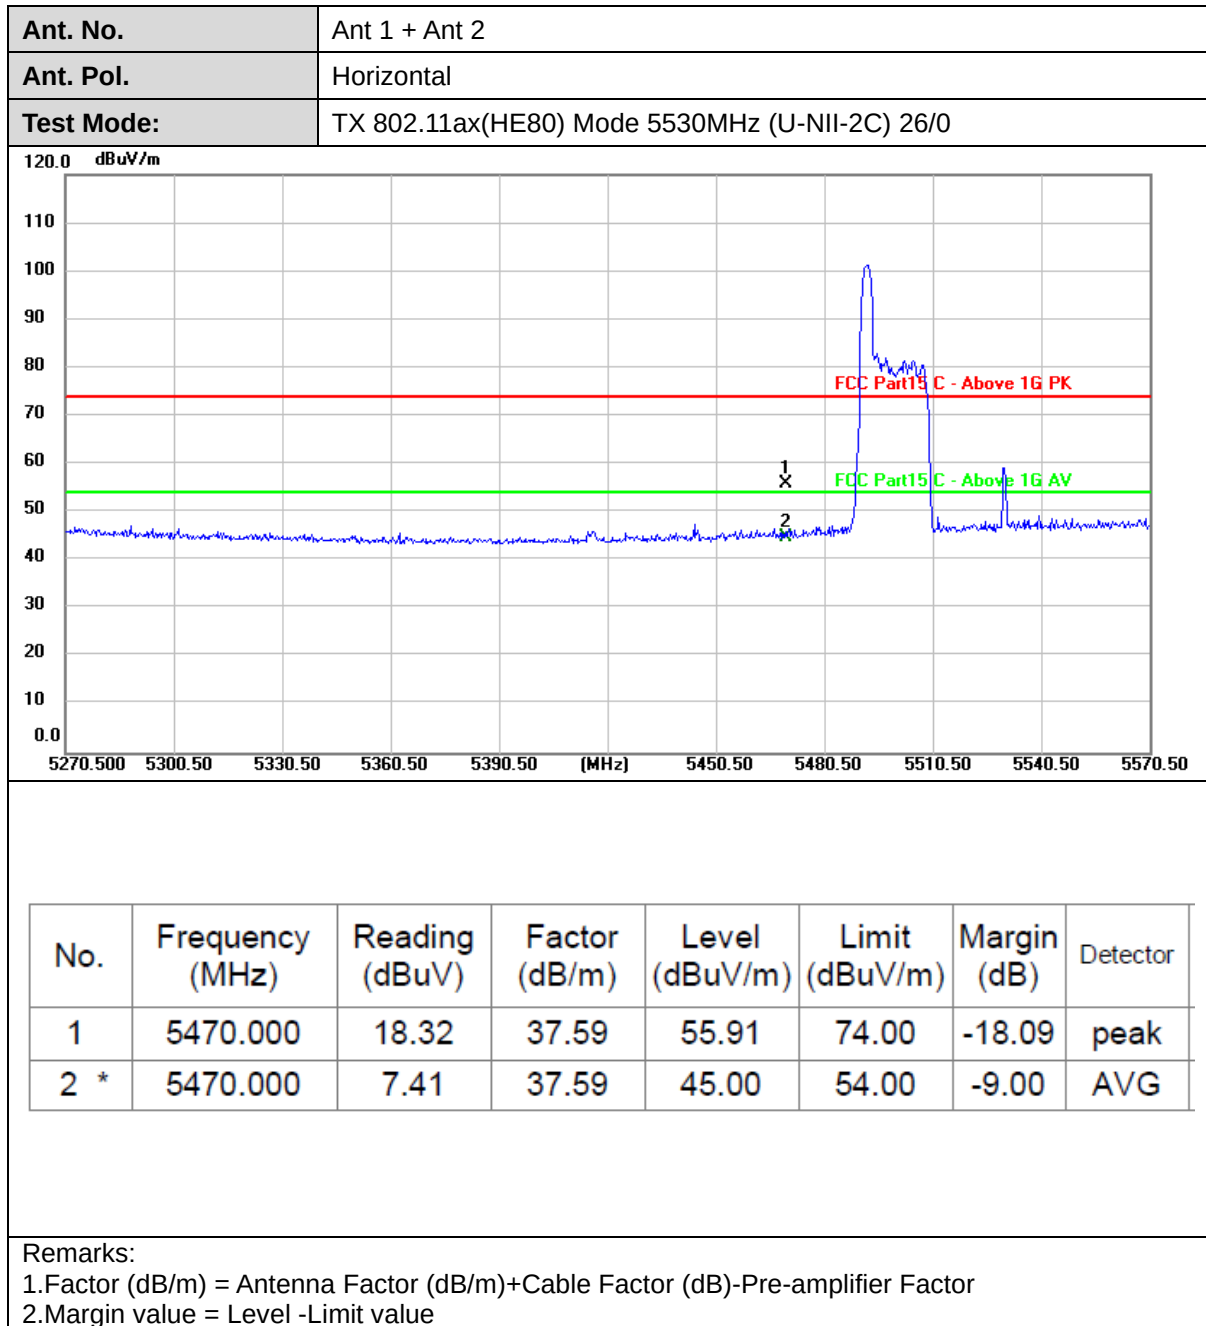


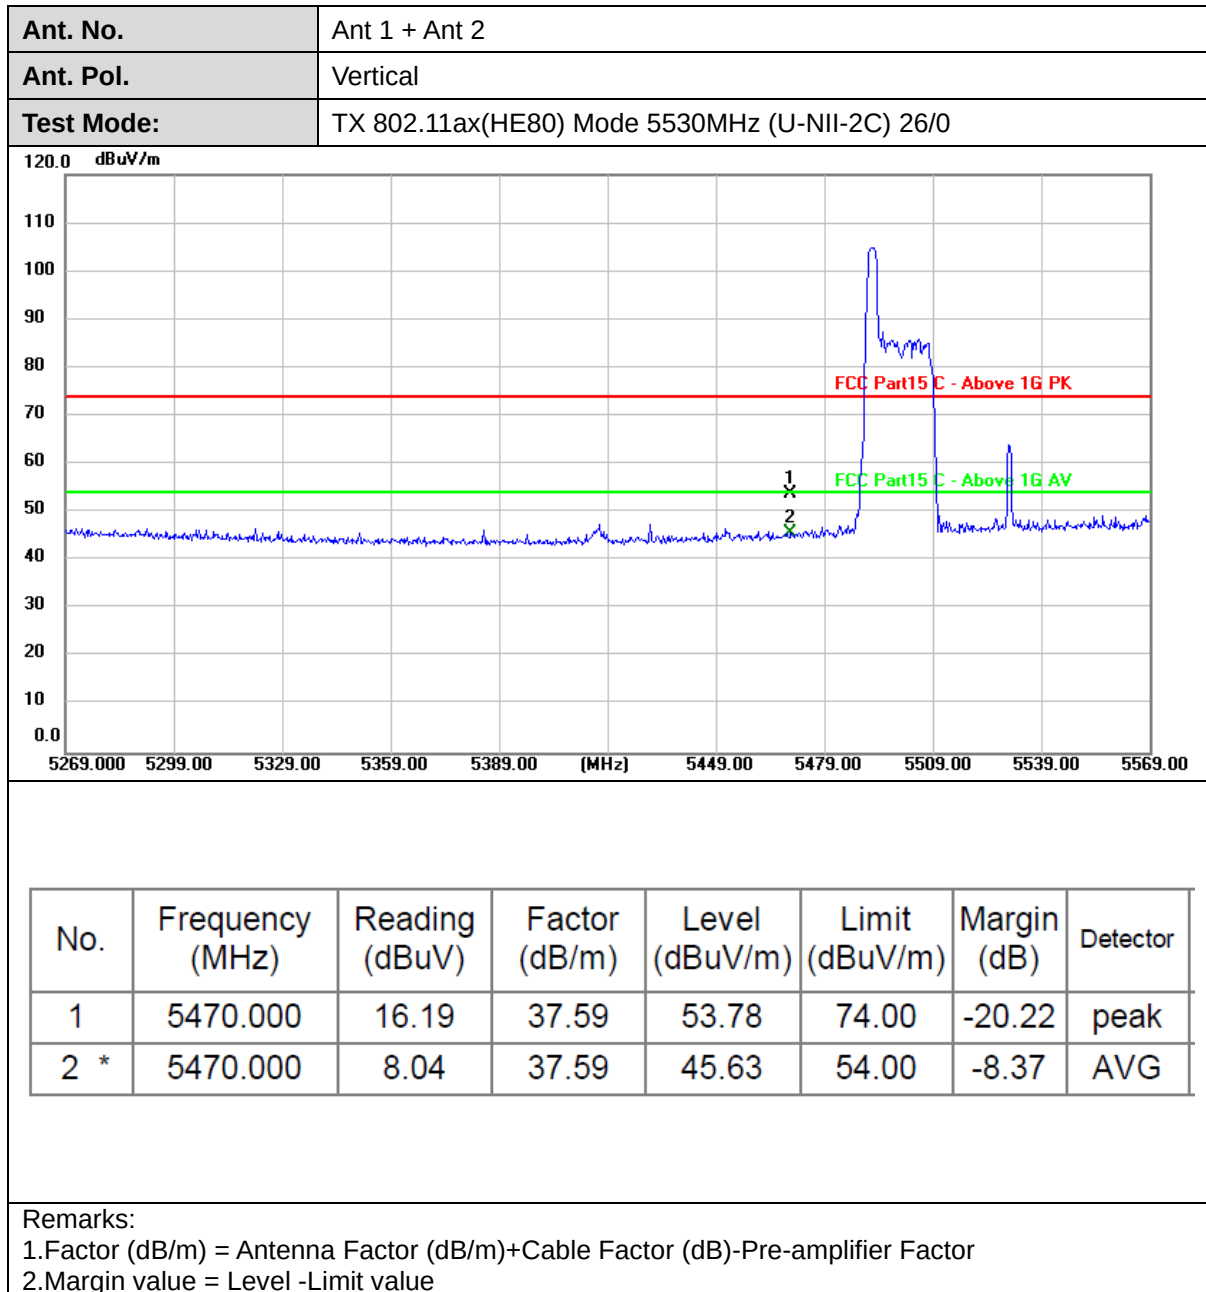

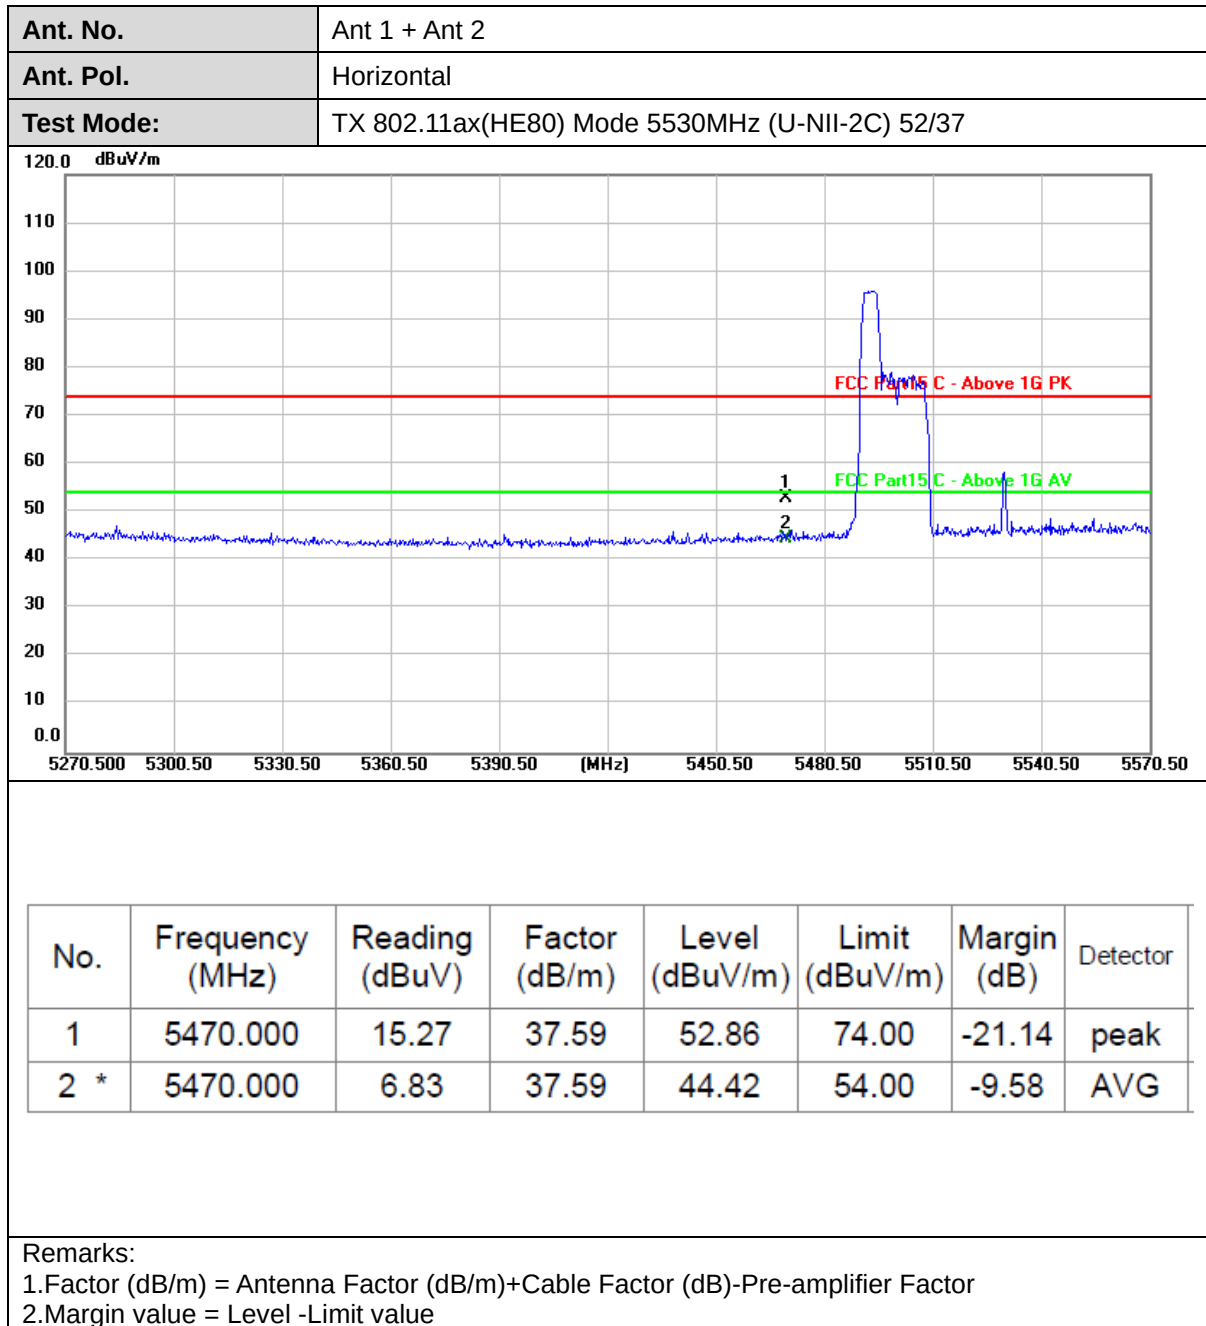

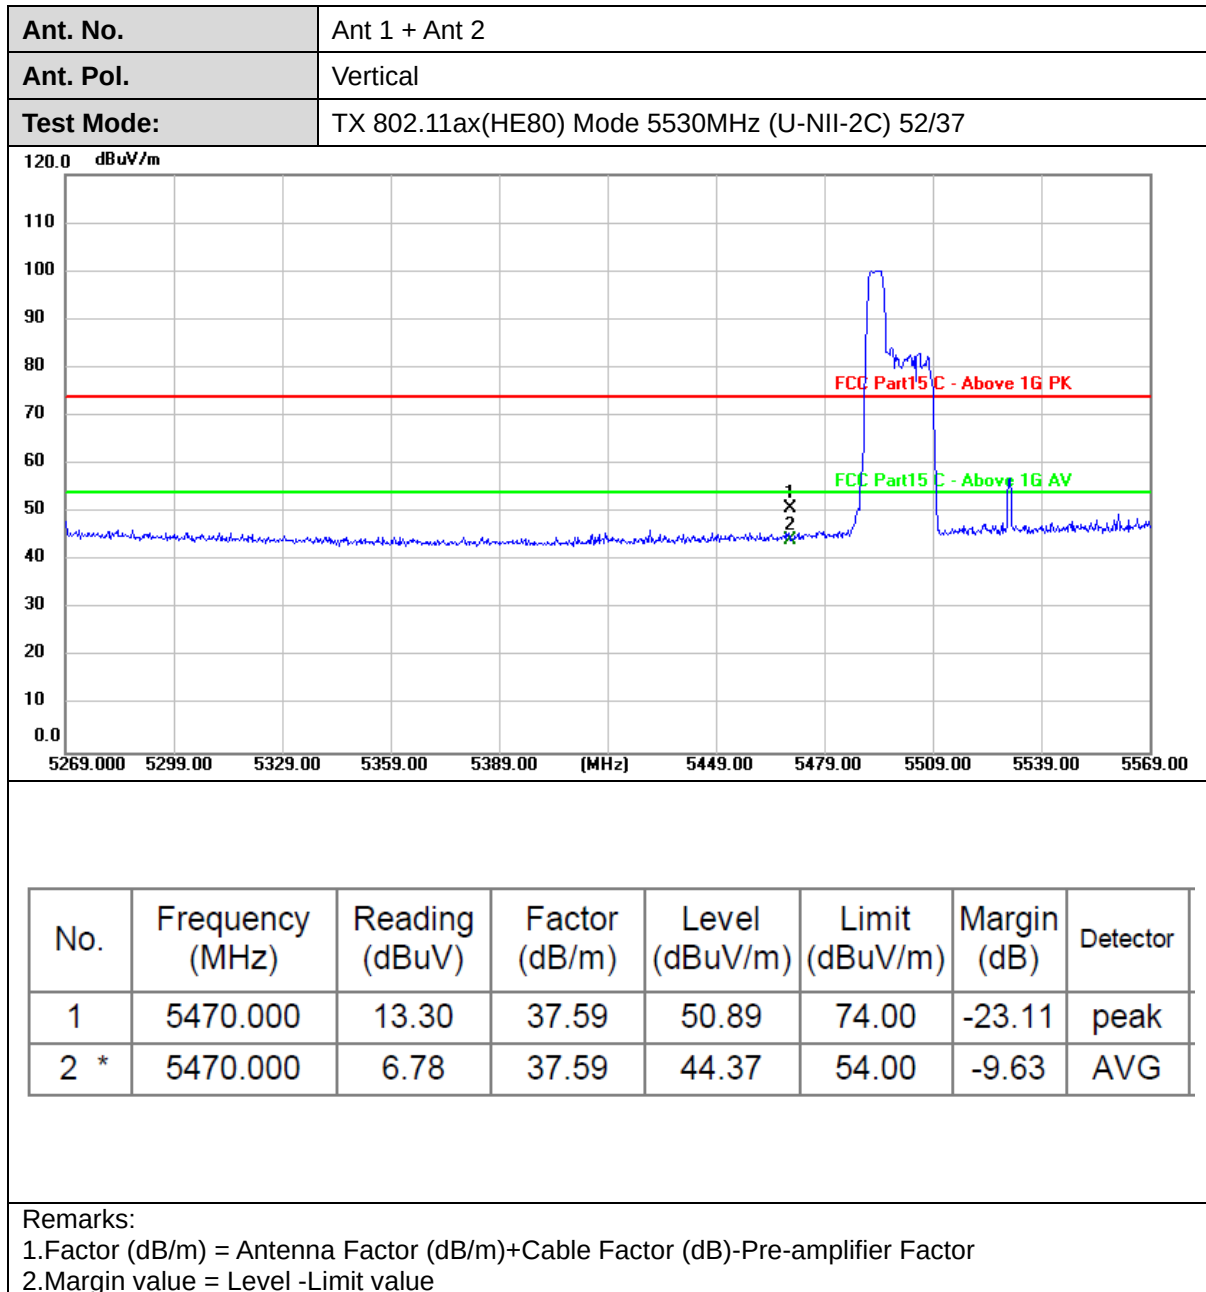

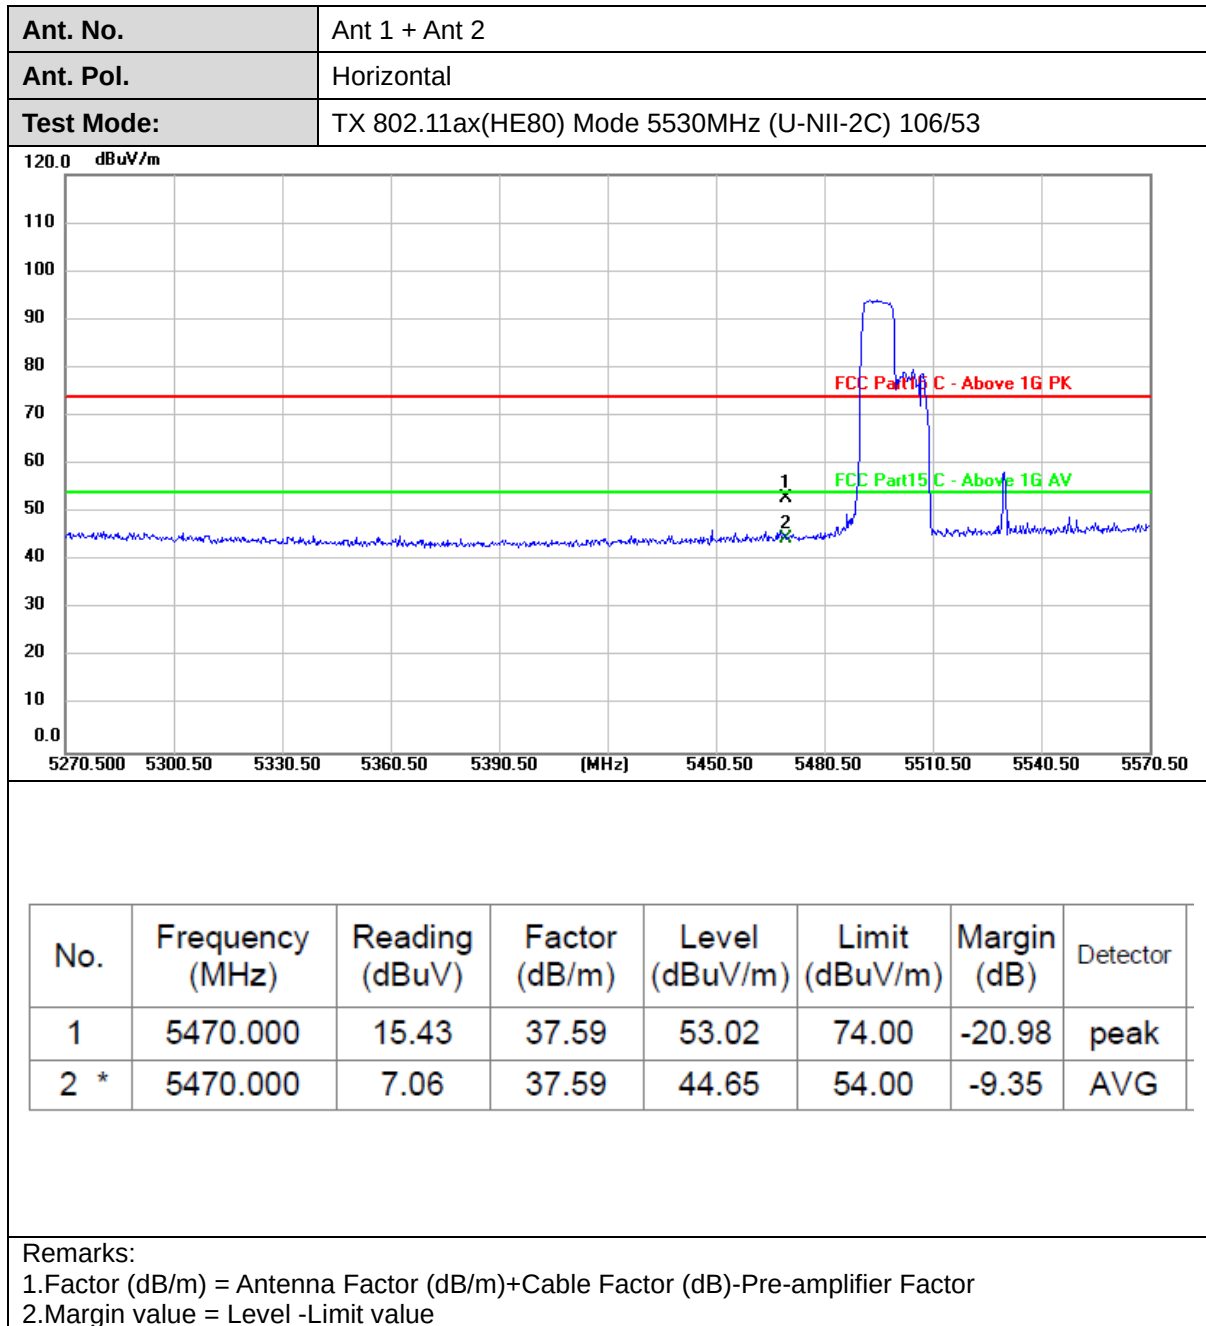

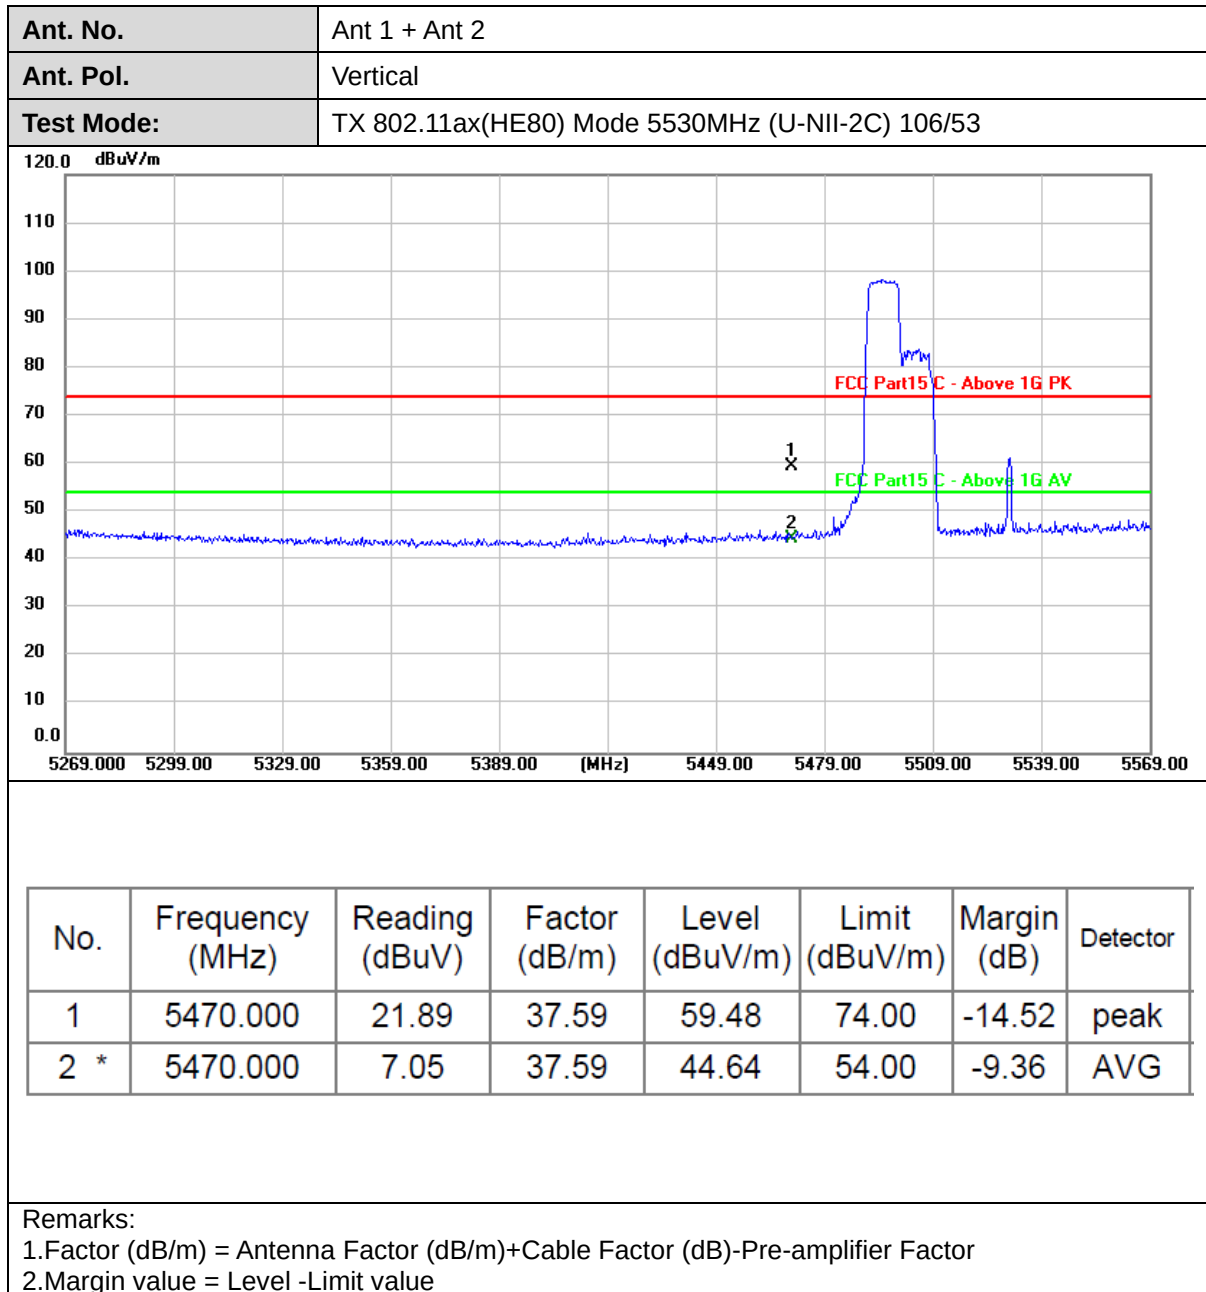


Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) 242/61


120.0
dBuV/m


5270.500 5300.50 5330.50 5360.50 5390.50 (MHz) 5450.50 5480.50 5510.50 5540.50 5570.50


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	16.33	37.59	53.92	74.00	-20.08	peak
2 *	5470.000	6.34	37.59	43.93	54.00	-10.07	AVG


Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

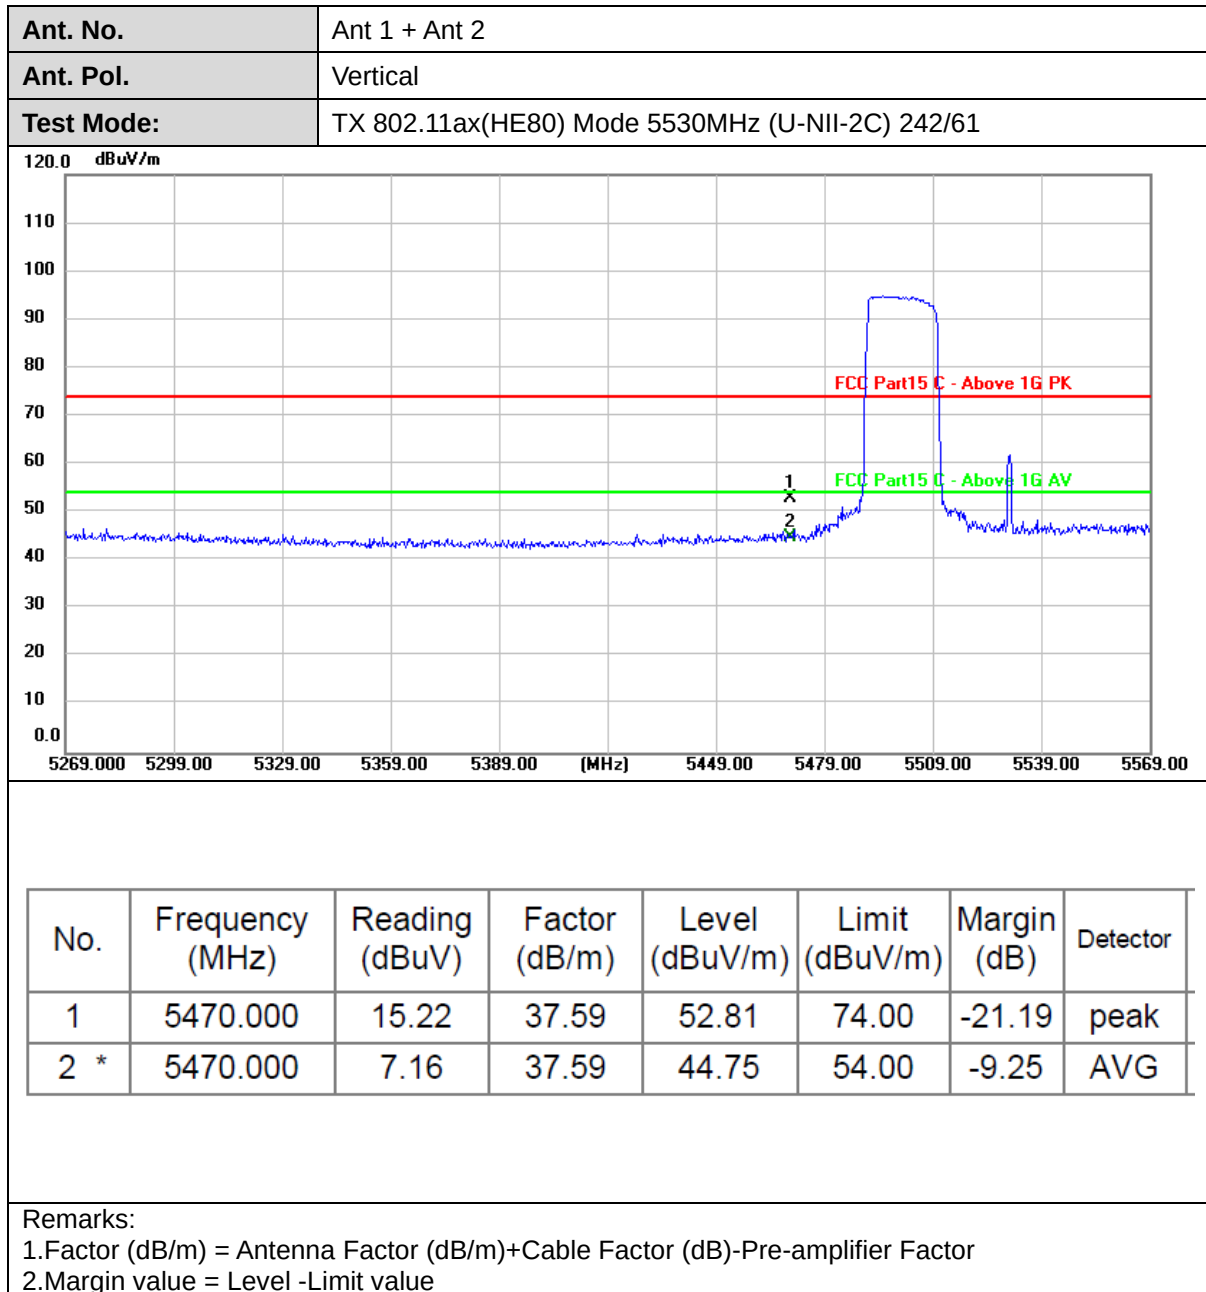

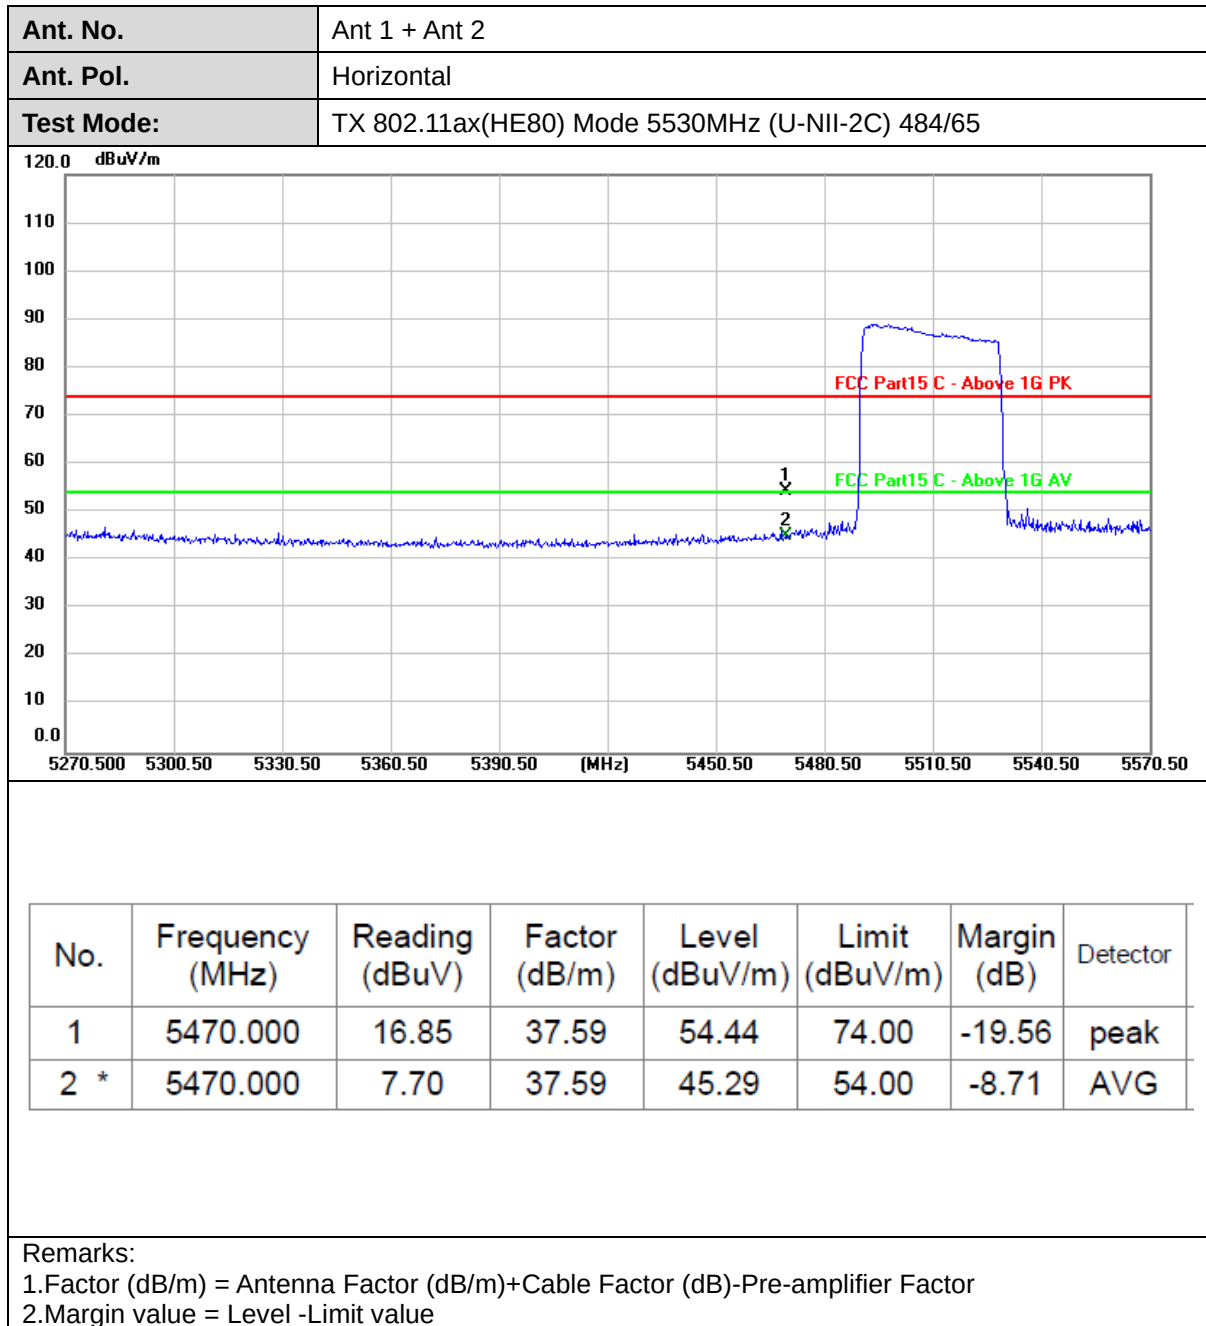

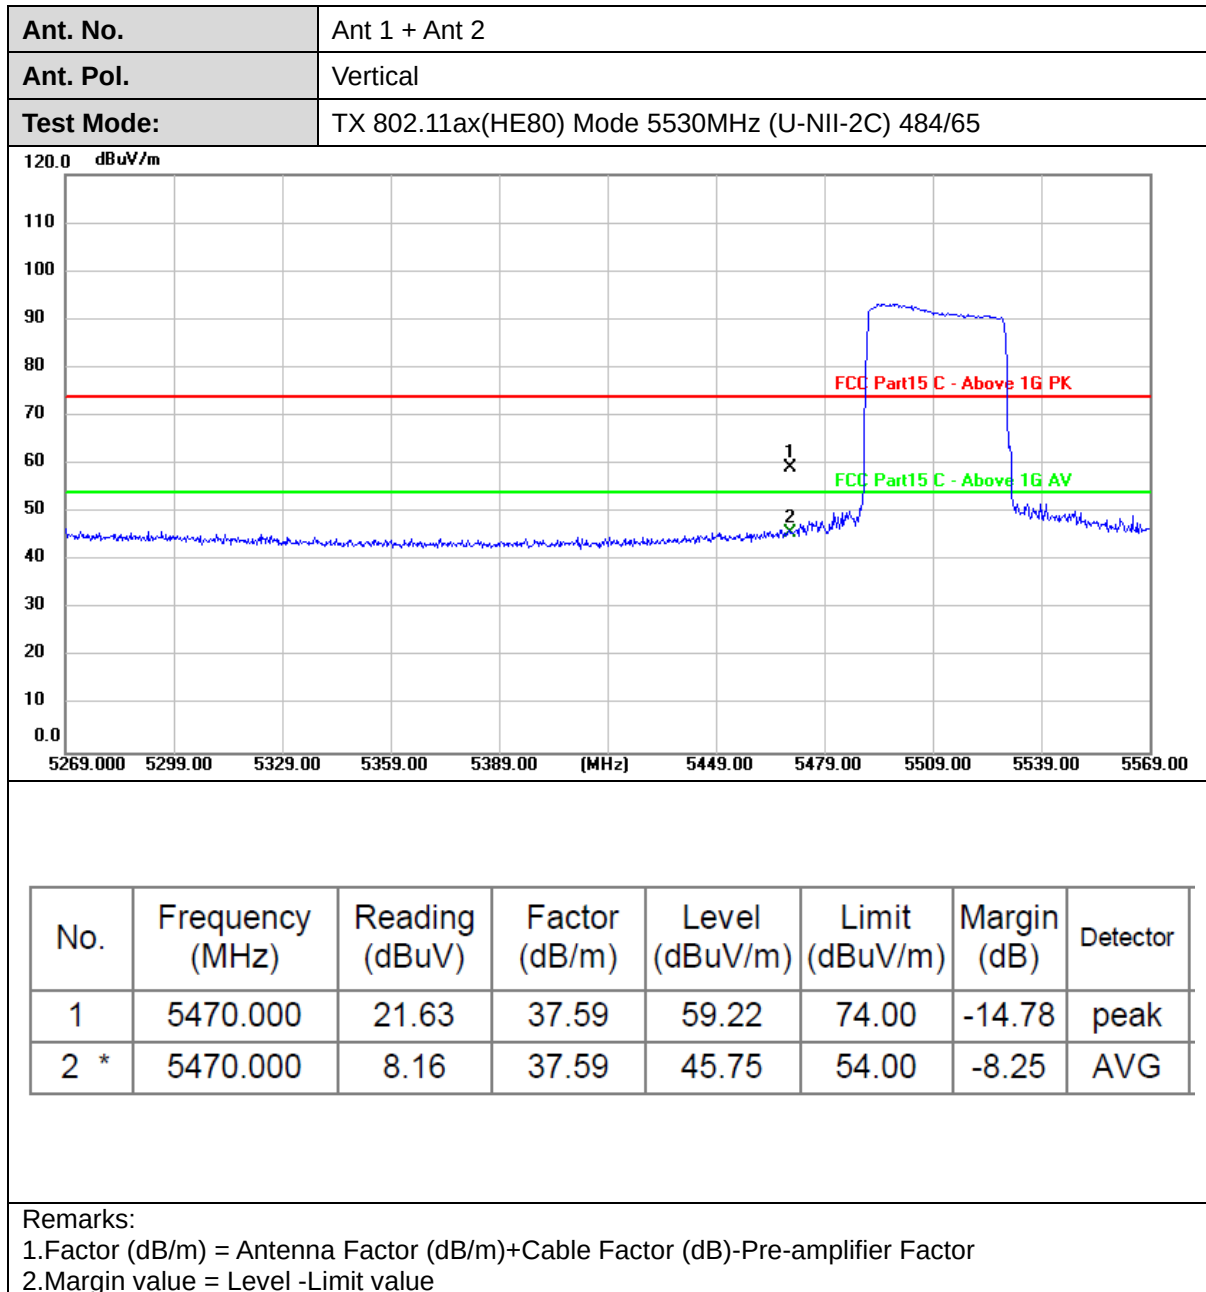

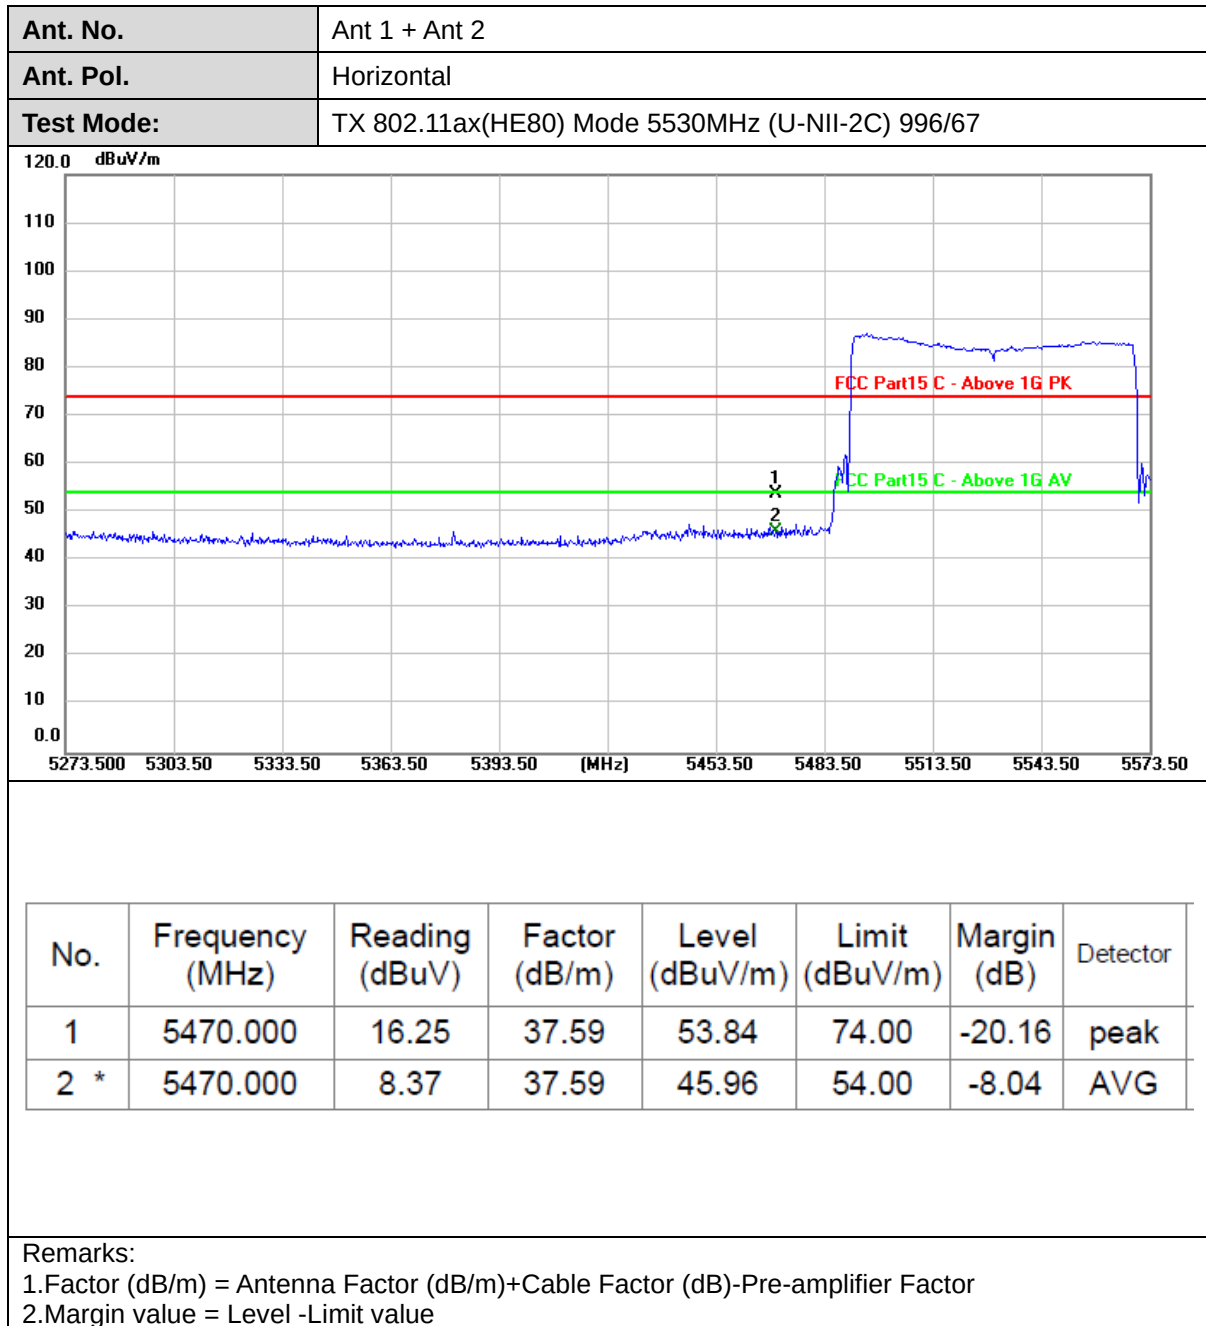

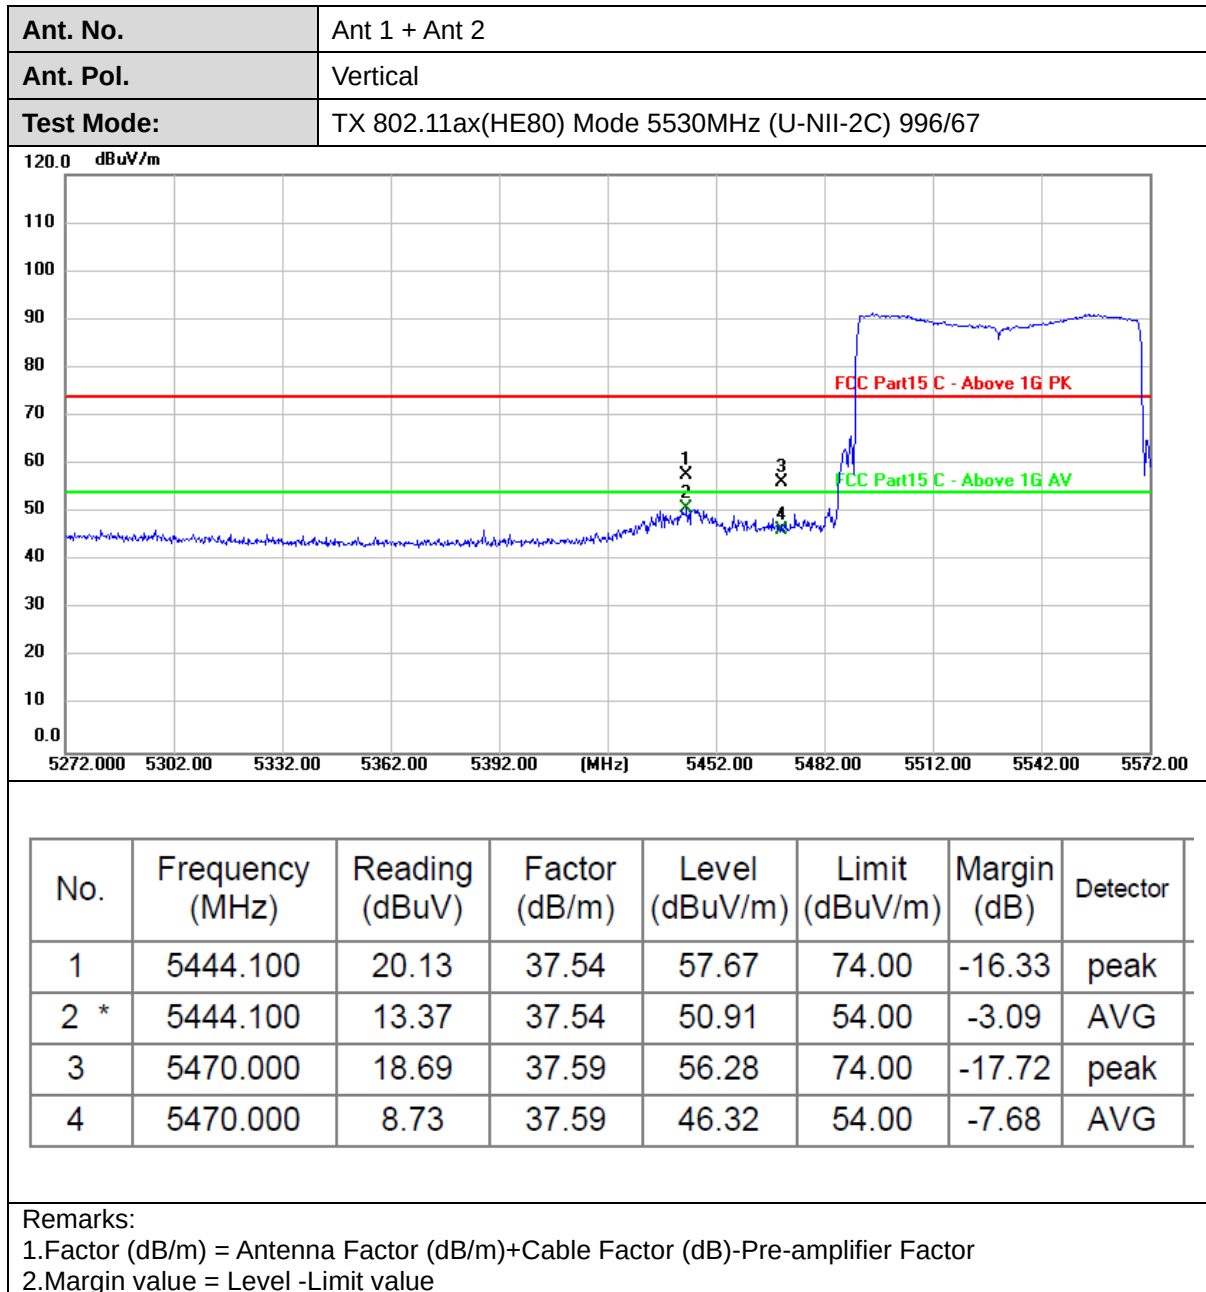


Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 26/36


120.0
dBuV/m


5580.000 5610.00 5640.00 5670.00 5700.00 (MHz) 5760.00 5790.00 5820.00 5850.00 5880.00

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	16.61	38.16	54.77	74.00	-19.23	peak
2 *	5725.000	8.97	38.16	47.13	54.00	-6.87	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

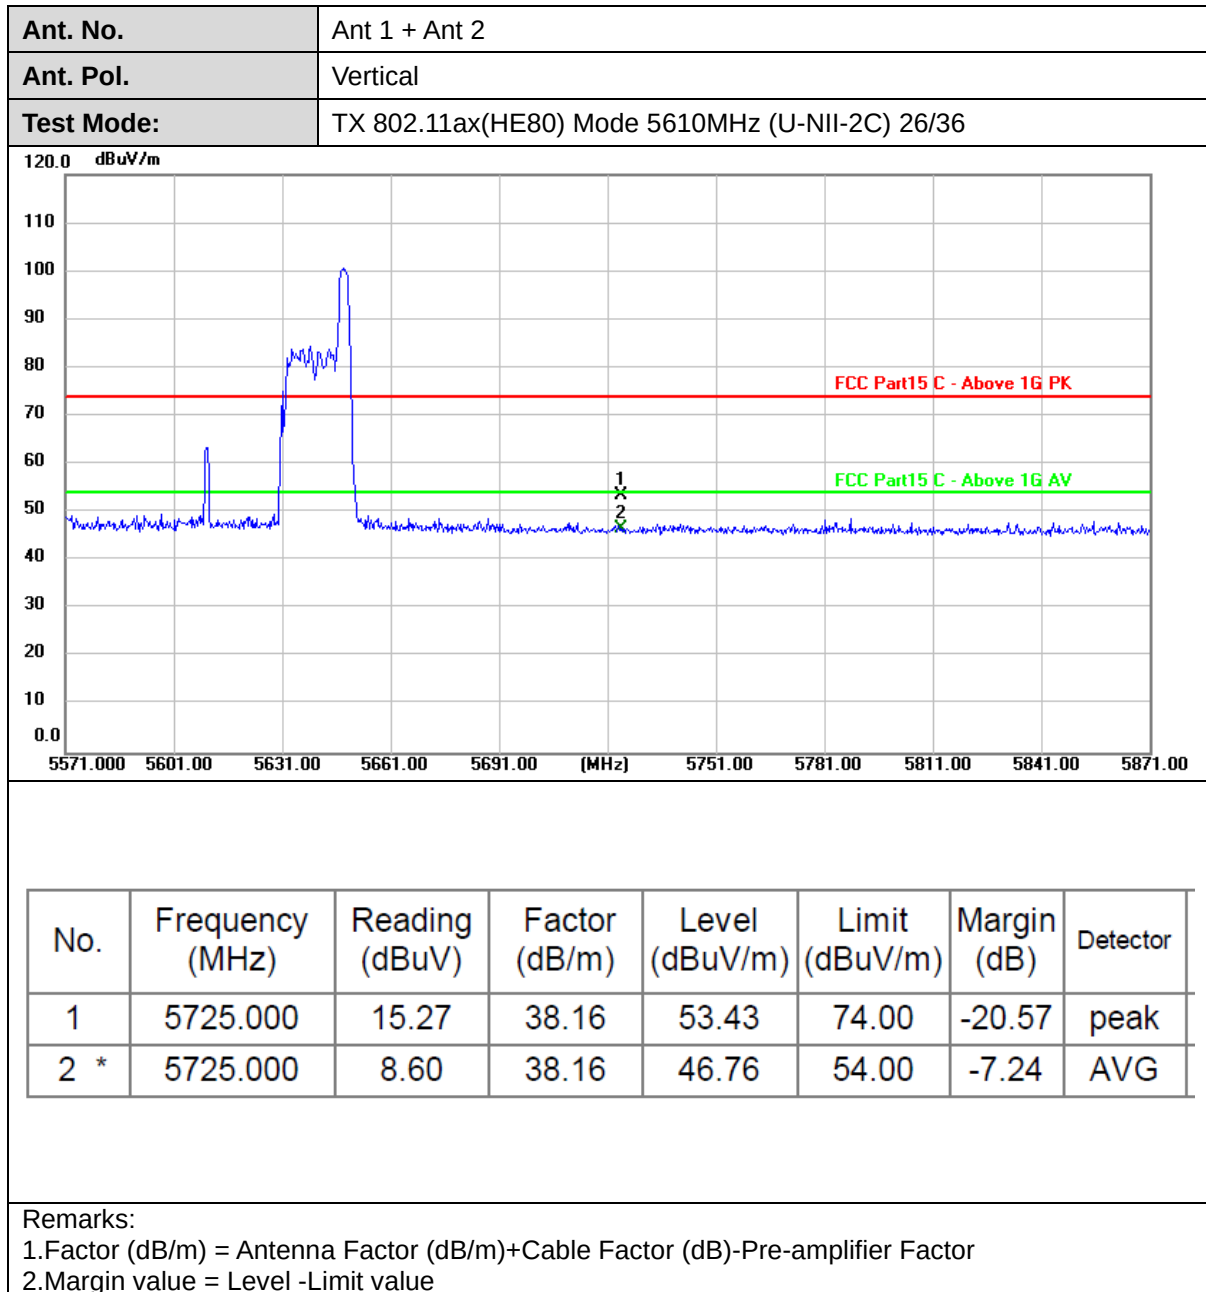


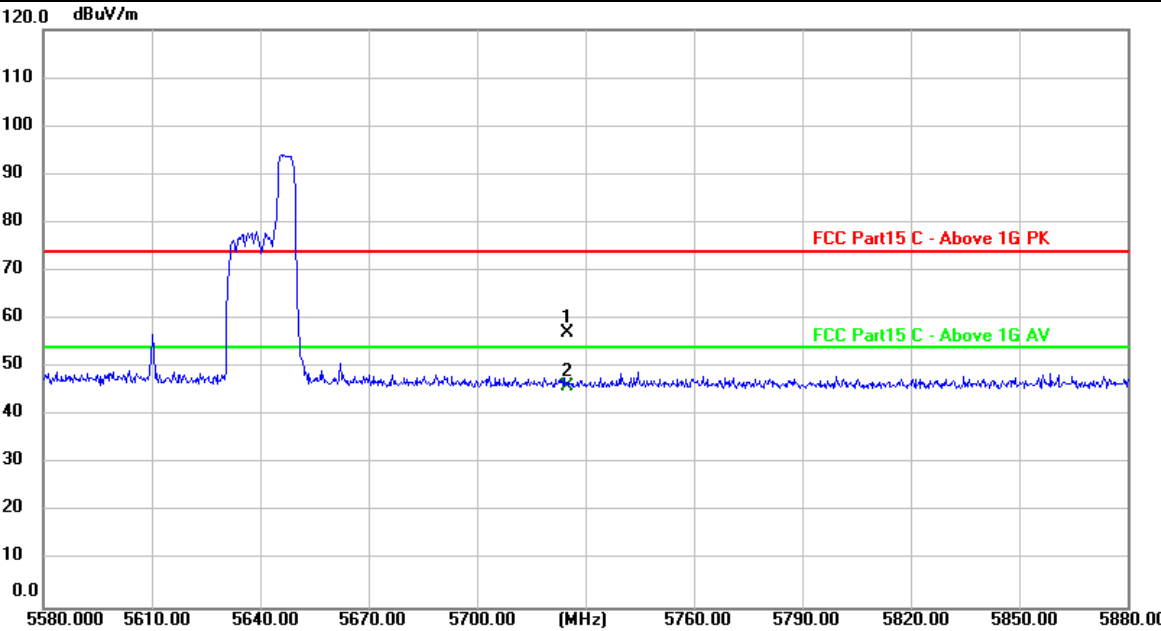Ant. No.	Ant 1 + Ant 2																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 52/52																														
																															
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1</td><td>5725.000</td><td>19.06</td><td>38.16</td><td>57.22</td><td>74.00</td><td>-16.78</td><td>peak</td></tr><tr><td>2 *</td><td>5725.000</td><td>7.95</td><td>38.16</td><td>46.11</td><td>54.00</td><td>-7.89</td><td>AVG</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	5725.000	19.06	38.16	57.22	74.00	-16.78	peak	2 *	5725.000	7.95	38.16	46.11	54.00	-7.89	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	5725.000	19.06	38.16	57.22	74.00	-16.78	peak																								
2 *	5725.000	7.95	38.16	46.11	54.00	-7.89	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

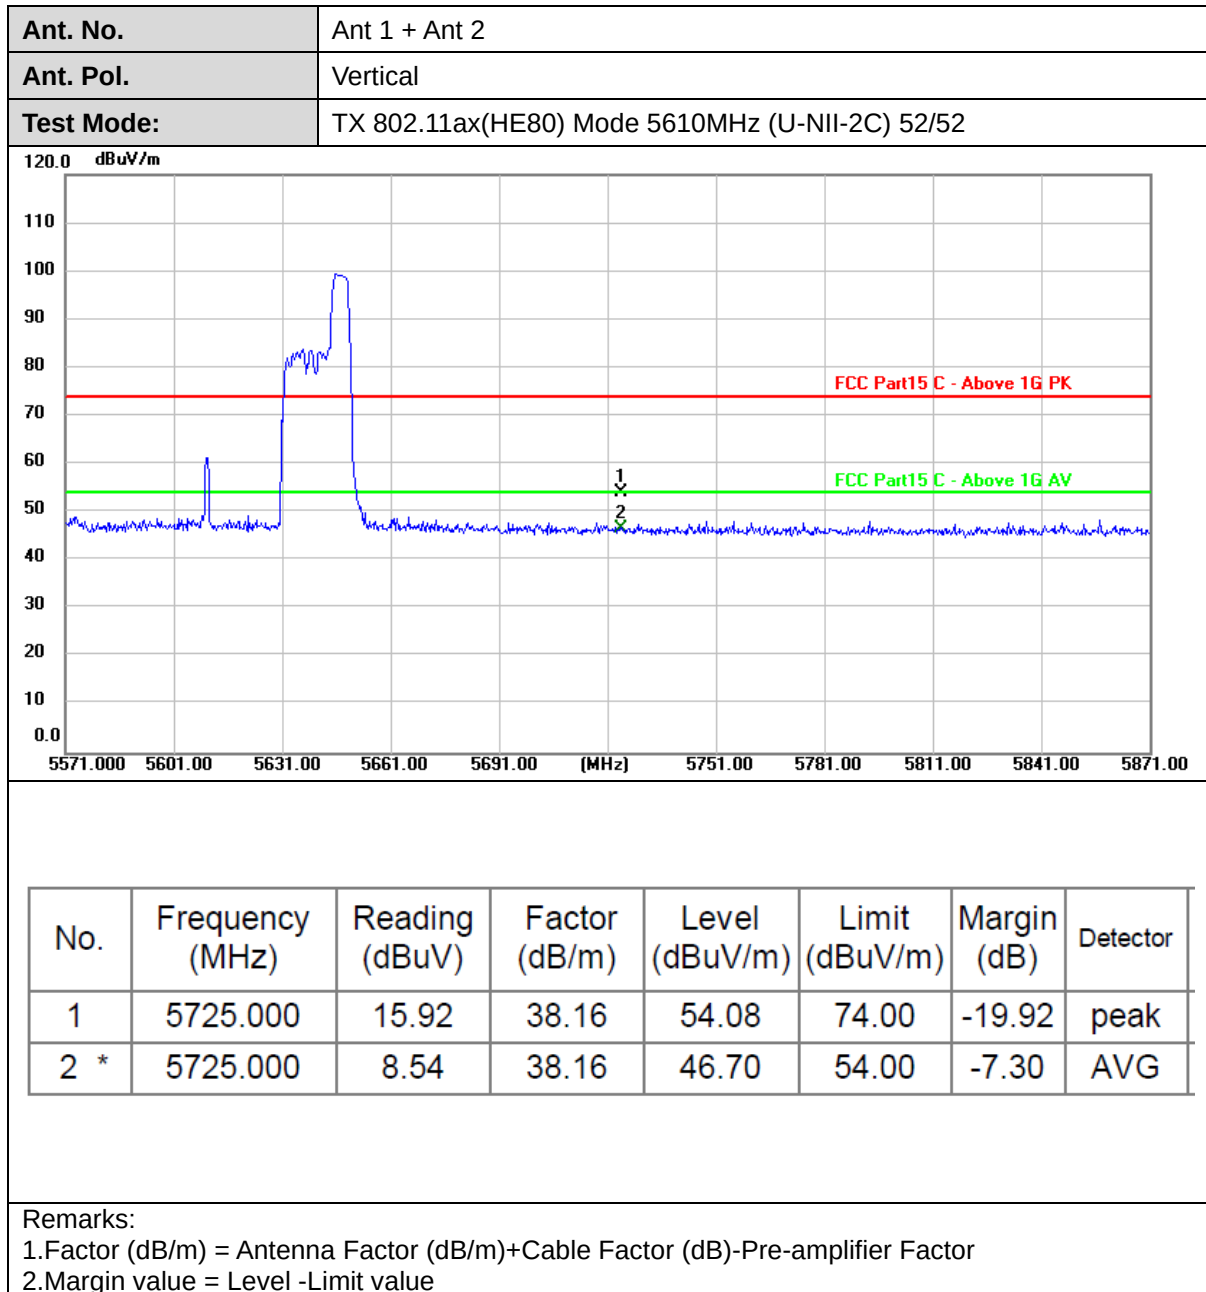

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 106/60

120.0 dBuV/m

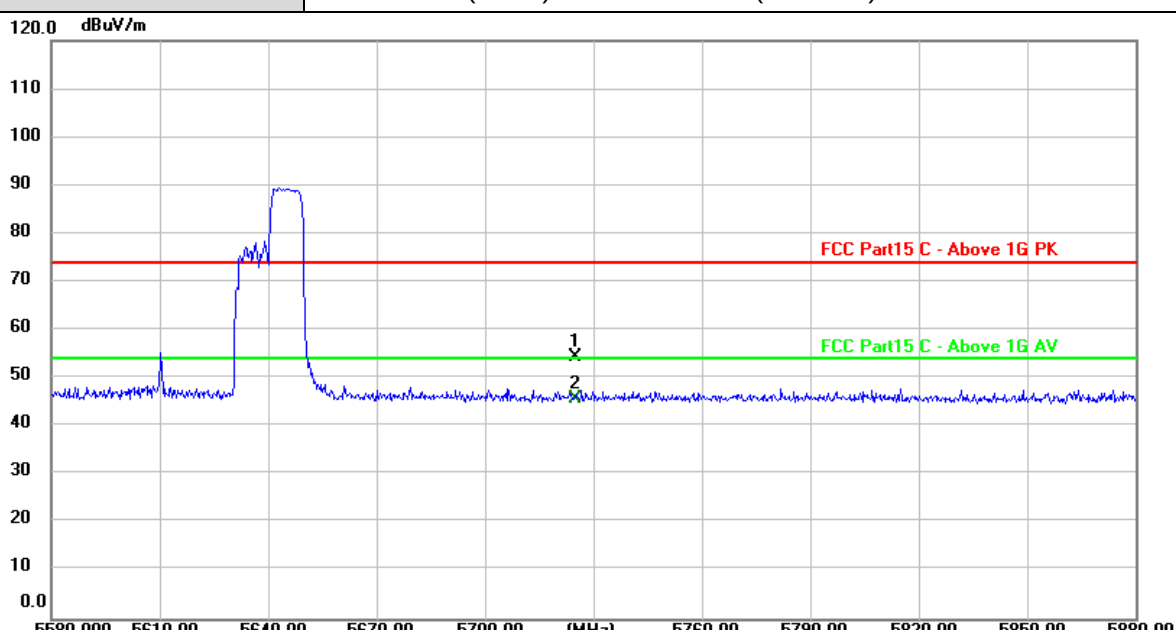

5580.00 5610.00 5640.00 5670.00 5700.00 (MHz) 5760.00 5790.00 5820.00 5850.00 5880.00

FCC Part15 C - Above 1G PK

FCC Part15 C - Above 1G AV

1


2

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	16.31	38.16	54.47	74.00	-19.53	peak
2 *	5725.000	7.74	38.16	45.90	54.00	-8.10	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 106/60

120.0
dBuV/m

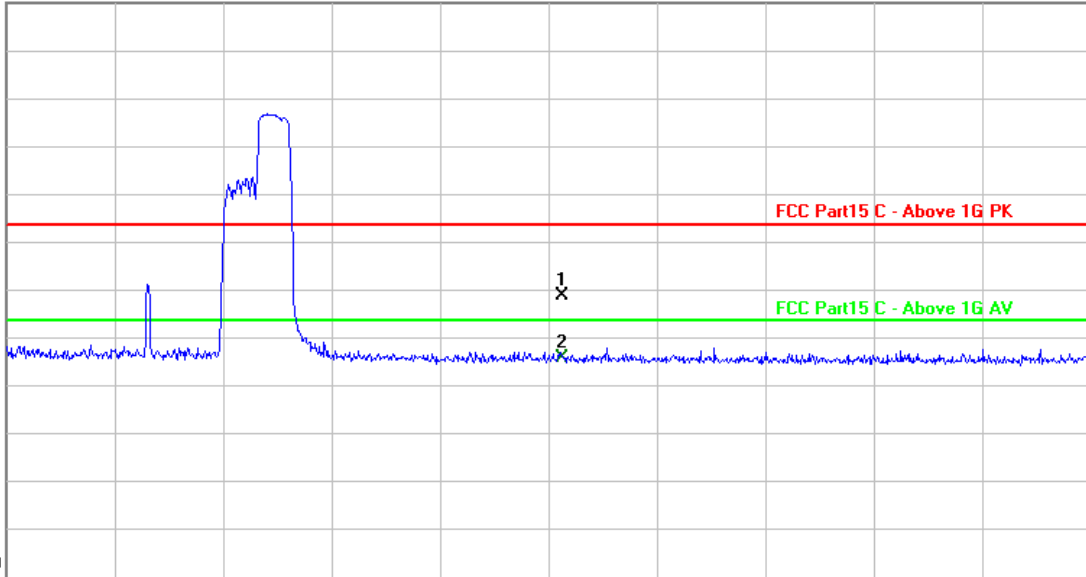

1
X

2
Σ


FCC Part15 C - Above 1G PK


FCC Part15 C - Above 1G AV

5571.000 5601.00 5631.00 5661.00 5691.00 (MHz) 5725.00 5751.00 5781.00 5811.00 5841.00 5871.00

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	21.02	38.16	59.18	74.00	-14.82	peak
2 *	5725.000	8.30	38.16	46.46	54.00	-7.54	AVG


Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

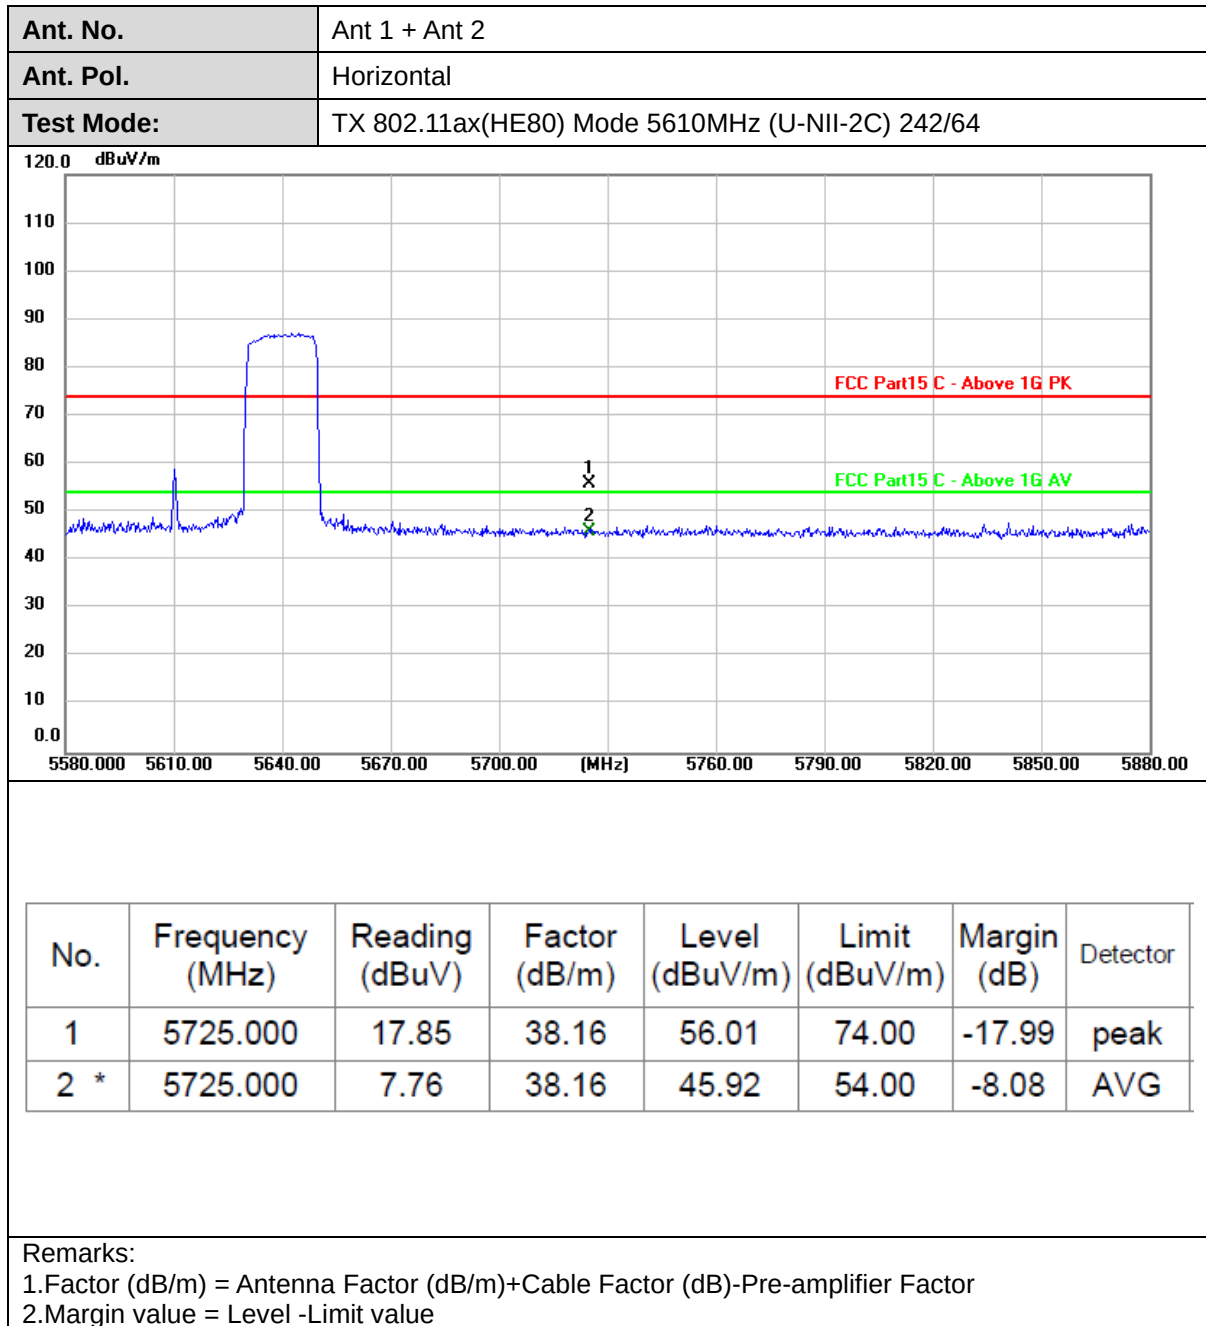

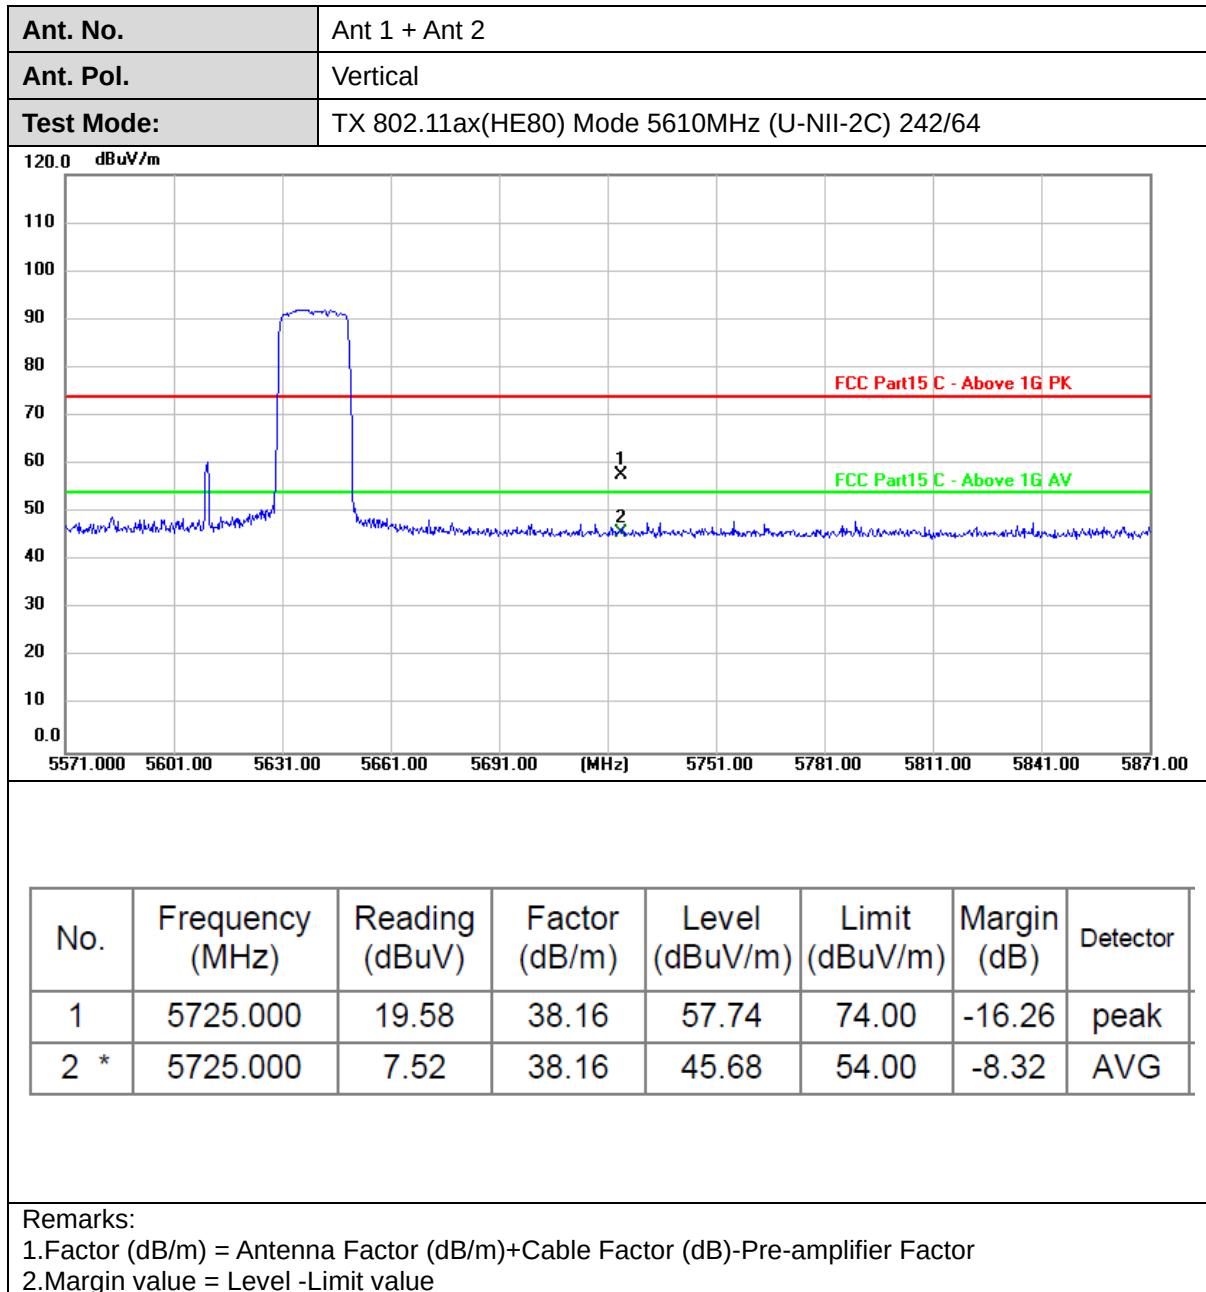

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 484/66

120.0 dBuV/m

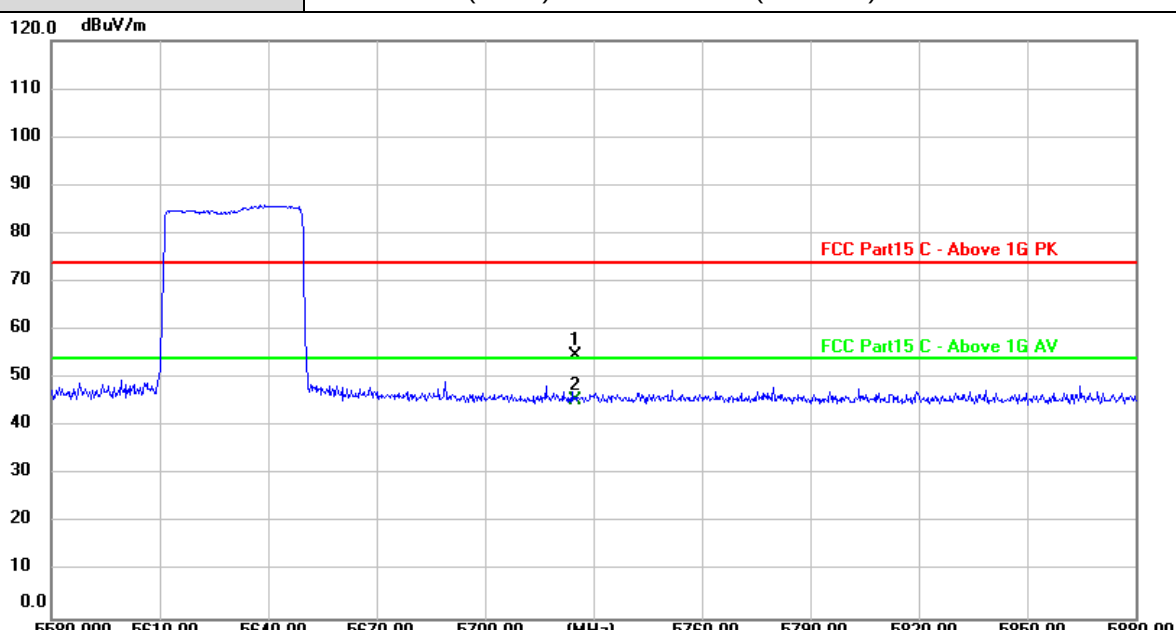

5580.000 5610.00 5640.00 5670.00 5700.00 (MHz) 5760.00 5790.00 5820.00 5850.00 5880.00

FCC Part15 C - Above 1G PK

FCC Part15 C - Above 1G AV

1

2

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	16.72	38.16	54.88	74.00	-19.12	peak
2 *	5725.000	7.38	38.16	45.54	54.00	-8.46	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

