

AJV4 ANTENNAS


- BLE ANTENNA

Electrical specifications

Emission Class for BLE emitter:	F1D
Frequency range:	2400 MHz to 2500 MHz
Peak gain:	0.5 dBi
Wavelength:	¼ wave
Impedance:	50 Ohm
Polarization:	Linear
Radiation:	Omnidirectional

Antenna Manufacturer

Manufacturer	Part Number
JOHANSON TECHNOLOGY	2450AT18B0100001E



High Frequency Ceramic Solutions

2.4GHz Mini Antenna, SMT


P/N 2450AT18B100

Detail Specification: 11/5/2018

Page 1 of 5

Let us help you with the antenna design, optimization, and tuning!

General Specifications

Part Number	2450AT18B100		
Frequency (MHz)	2400 - 2500		
Avg. Rad Efficiency*	76%		
Peak Gain (dBi typ.)	0.5		
Average Gain (dBi typ.)	-0.5		
Return Loss (dB)	9.5 min.	Storage Temperature	-45 to +125°C
Impedance	50 Ω	Operating Temperature	-45 to +125°C
Input Power	2 Watts max. (CW)	Recommended Storage Conditions of unused product on T&R and period.	+5 to +35°C Humidity 45~75%RH 18 months max.
		Reel Quantity	3000pcs


*Efficiency based on Johanson's standard evaluation board

Part Number Explanation

P/N Suffix	Packing Style	Bulk (loose)	Suffix = S	e.g. 2450AT18B100S
		T & R	Suffix = E	e.g. 2450AT18B100E
		100% Tin	Suffix = E or S	e.g. 2450AT18B100(E or S)
	Evaluation Board	2450AT18B100-EB1SMA (see page 2&3 for details)		

Mechanical Dimensions

	In	mm
L	0.126 ± 0.008	3.20 ± 0.2
W	0.063 ± 0.008	1.60 ± 0.2
T	0.051 +.004/-0.008	1.30 +0.1/-0.2
a	0.020 ± 0.008	0.50 ± 0.2

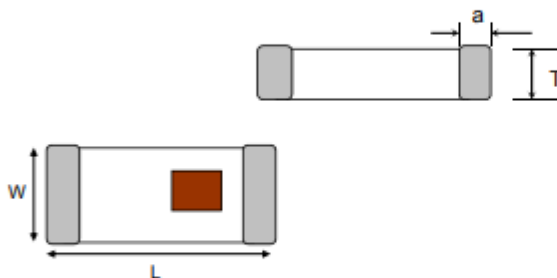Want the layout file? Request it at: <https://www.johansontechnology.com/ask-a-question>

Terminal Configuration

No.	Function
1	FEED
2	NC



Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 4.0

<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2018 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions



2.4GHz Mini Antenna, SMT

Detail Specification: 11/5/2018

P/N 2450AT18B100

Page 2 of 5

Mounting Considerations 1: Evaluation Board

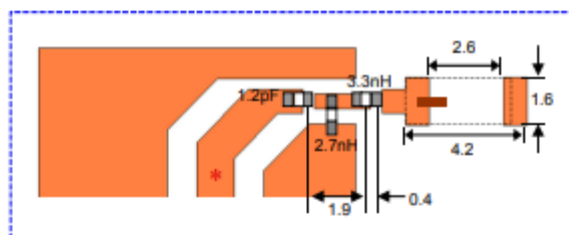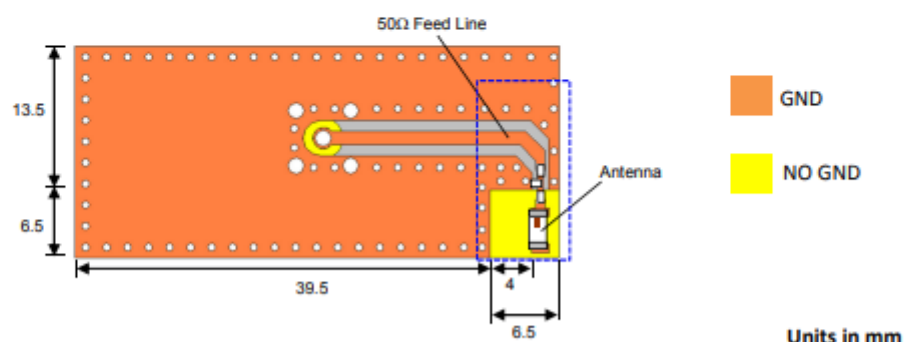

JTI P/N for Matching Circuit:
 Capacitor (1.2pF): 500R07S1R2BV4T
 Inductor (2.7nH): L-07C2N7SV6T
 Inductor (3.3nH): L-07C3N3SV6T

* Line width should be designed to provide 50Ω impedance

To order a pre-tuned 50Ω EVB with a female SMA connector click
 here: <https://www.johansontechnology.com/request-a-sample>
 Reference p/n: 2450AT18B100-EB1SMA

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.

JOHANSON
TECHNOLOGY

<https://www.johansontechnology.com>
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
 Ver. 4.0 2018 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


2.4GHz Mini Antenna, SMT

P/N 2450AT18B100

Detail Specification: 11/5/2018

Page 3 of 5

Mounting Considerations 1: Typical Electrical Performance (T=25°C)

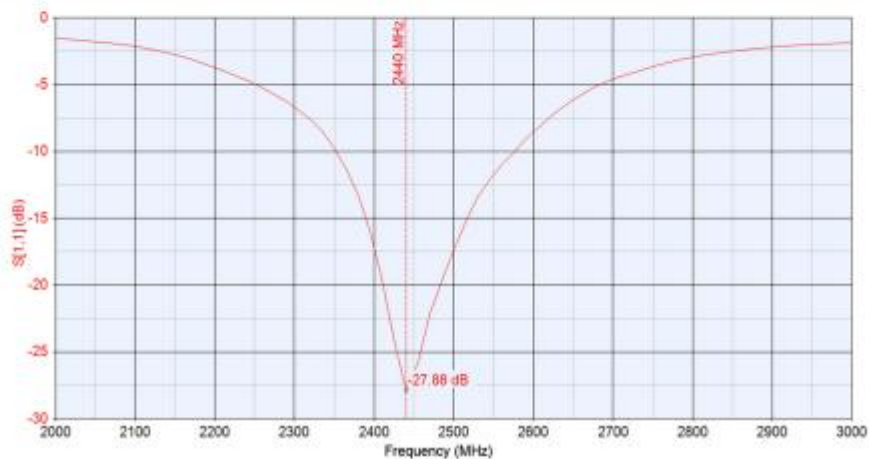

Would you like the antenna layout? Have antenna tuning issues?
Please contact us if you have any questions regarding the
implementation of this antenna in your PCB's layout. We'll be happy to
guide you to maximize the antenna's performance.

Contact our applications engineers at:

<https://www.johansontechnology.com/ask-a-question>

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 4.0

2018 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4GHz Mini Antenna, SMT


P/N 2450AT18B100

Detail Specification: 11/5/2018

Page 4 of 5

Mounting Considerations 1: Antenna Performance

Typical 2D radiation patterns @ 2.44GHz

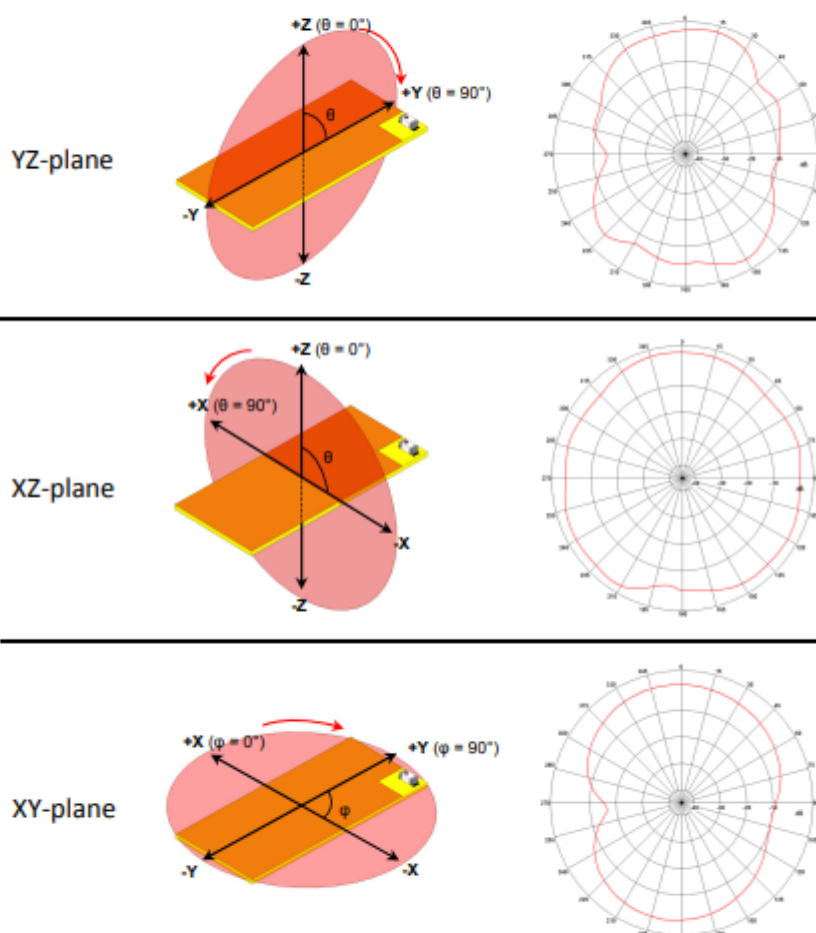

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 4.0 2018 Johanson Technology, Inc. All Rights Reserved

telecom design _	AJV4	Ver. / Rev. 0
Title:	AJV4 ANTENNAS DATASHEET	Date: 2026/02/02
		Page: 6 / 7

High Frequency Ceramic Solutions

2.4GHz Mini Antenna, SMT

P/N 2450AT18B100

Detail Specification: 11/5/2018

Page 5 of 5

Antenna tuning, optimization, and validation services:

<https://www.johansontechnology.com/pc-antenna-services>

For more antennas and to download measured S-parameters, go to:

<https://www.johansontechnology.com/antennas>

Soldering Information

<https://www.johansontechnology.com/pcsoldering-profile>

MSL Info

<https://www.johansontechnology.com/msl-rating>

Packaging information

<https://www.johansontechnology.com/tape-reel-packaging>

For layout review contact our Applications Team at:

<https://www.johansontechnology.com/ask-a-question>

RoHS Compliance

<https://www.johansontechnology.com/rohs-compliance>

Need help designing the antenna in? Use our antenna design services!

<https://www.johansontechnology.com/pc-antenna-services>

We provide 2 free layout reviews and if you need us to tune and characterize the antenna on your product (inside our anechoic chamber) we can do that too. Small lab fee may apply.

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.0

2018 Johanson Technology, Inc. All Rights Reserved

- IoT ANTENNA

Electrical specifications

Emission Class for LTEM-NBIOT Emitter:	W7D
Emission Class for LoRa/SideWalk	F1D
Frequency range:	700 MHz to 2.2GHz
Peak gain:	0 dBi
Wavelength:	¼ wave
Impedance:	50 Ohm
Polarization:	Linear
Radiation:	Omnidirectional

Confer to operational description for details