Annex 4: Test Setup Photographs to
T E S T R E P O R T
No.: 6-0776-15-1-2a-C1

According to:
FCC Regulations
Part 15.225

for
Océ-Technologies B.V

PBA,RFID_READER
Océ 01085

FCC-ID: 2AGNMOCE1085

Laboratory Accreditation and Listings			
DAkkS Deutsche Akkreditierungsstelle D-PL-12047-01-01	MRA US-EU 0003	Industry Canada Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3	Voluntary Controls for Electromagnetic Emissions Reg. No.: R-2666 C-2914, T-1967, G-301
WiFi ALLIANCE AUTHORIZED RF LABORATORY	CTIA Authorized Test Lab LAB CODE 20011130-00		
accredited according to DIN EN ISO/IEC 17025			

CETECOM GmbH
Laboratory Radio Communications & Electromagnetic Compatibility
Im Teelbruch 116 • 45219 Essen • Germany
Registered in Essen, Germany, Reg. No.: HRB Essen 8984
Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964
E-mail: info@cetecom.com • Internet: www.cetecom.com

The test results relate only to the individual items which have been tested. This report shall not be reproduced in parts without the written approval of the testing laboratory © Copyright: All rights reserved by CETECOM

Table of contents

1. TEST SET-UP PHOTOGRAPHS 3

1.1. Radiated field strength emissions below 30 MHz in Semi Anechoic Chamber.....3
1.2. Radiated field strength emissions 30 MHz – 1 GHz in Semi Anechoic Chamber.....5
1.3. Frequency Tolerance of the Carrier Signal 6

1. Test set-up photographs

1.1. Radiated field strength emissions below 30 MHz in Semi Anechoic Chamber

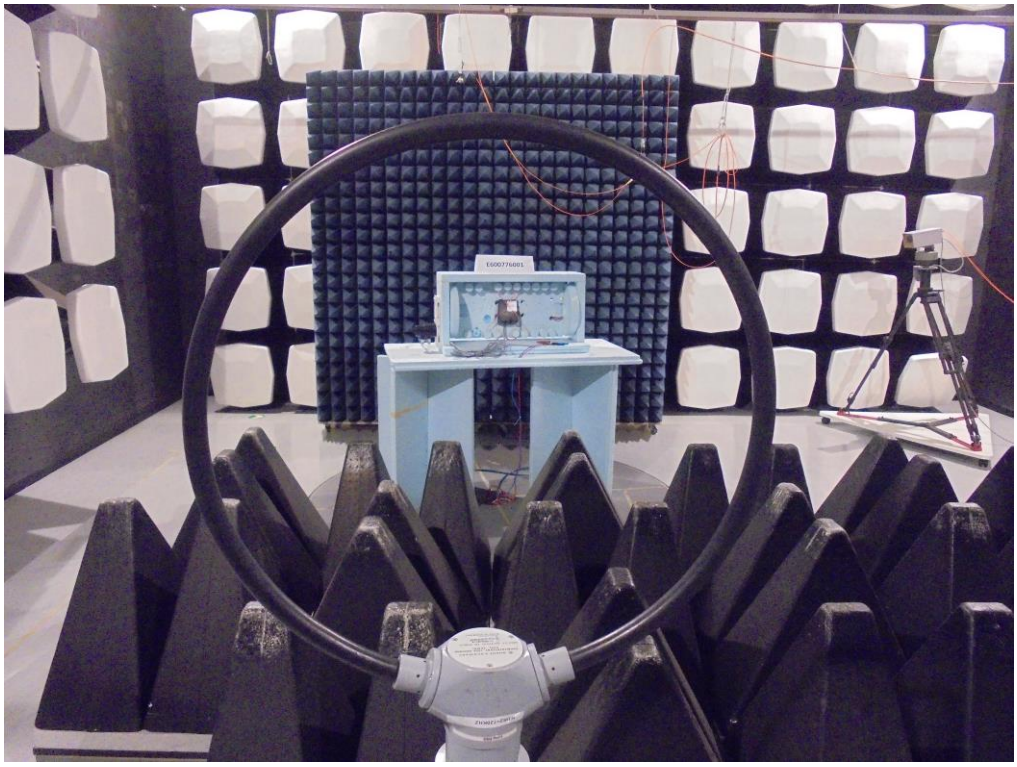

Test setup 1 EUTA + AE1 long shot view Antenna 0º

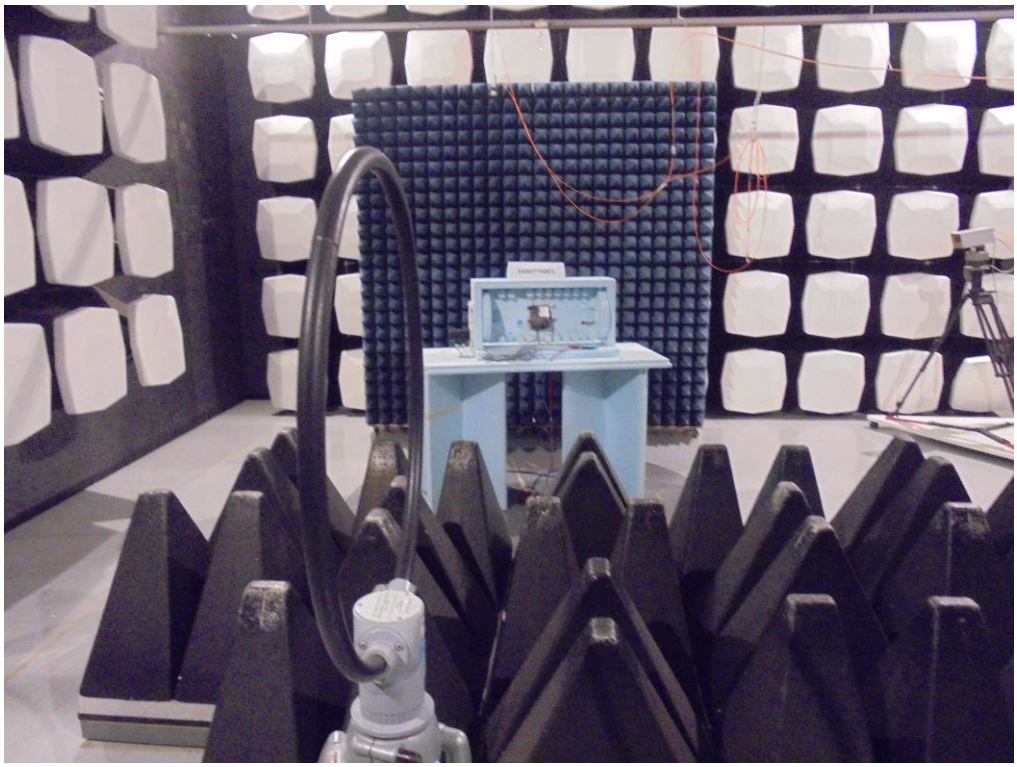

Test setup 1 EUTA + AE1 long shot view Antenna 90º

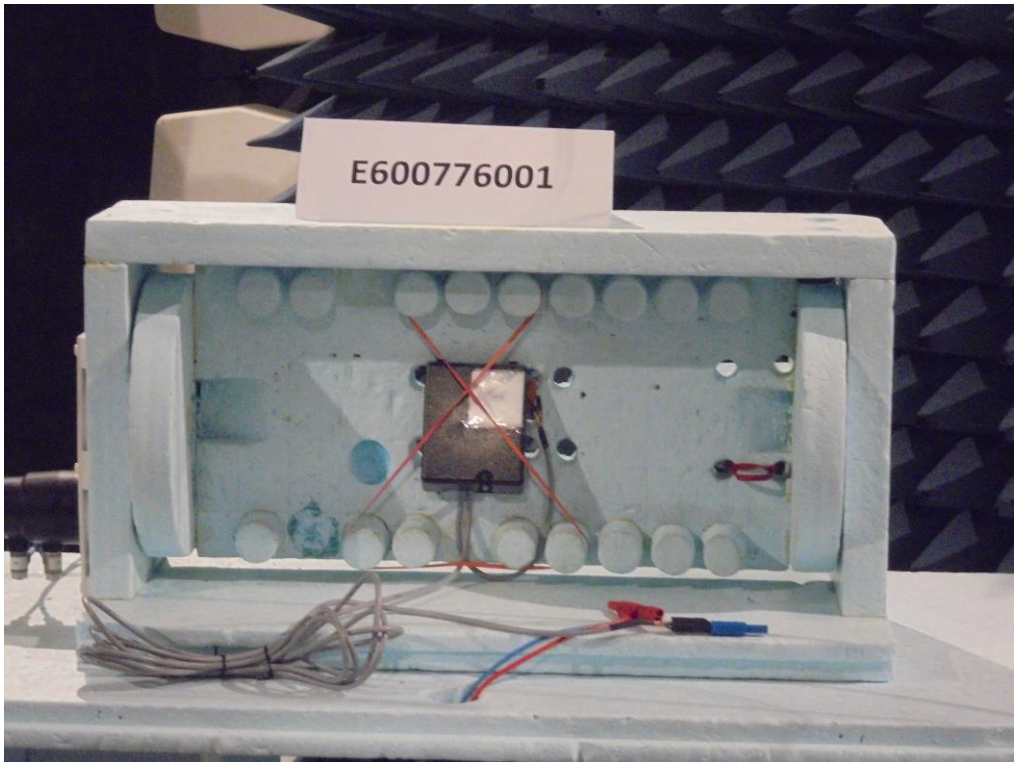

Test setup 1 EUTA + AE1 , close-up view

1.2. Radiated field strength emissions 30 MHz – 1 GHz in Semi Anechoic Chamber

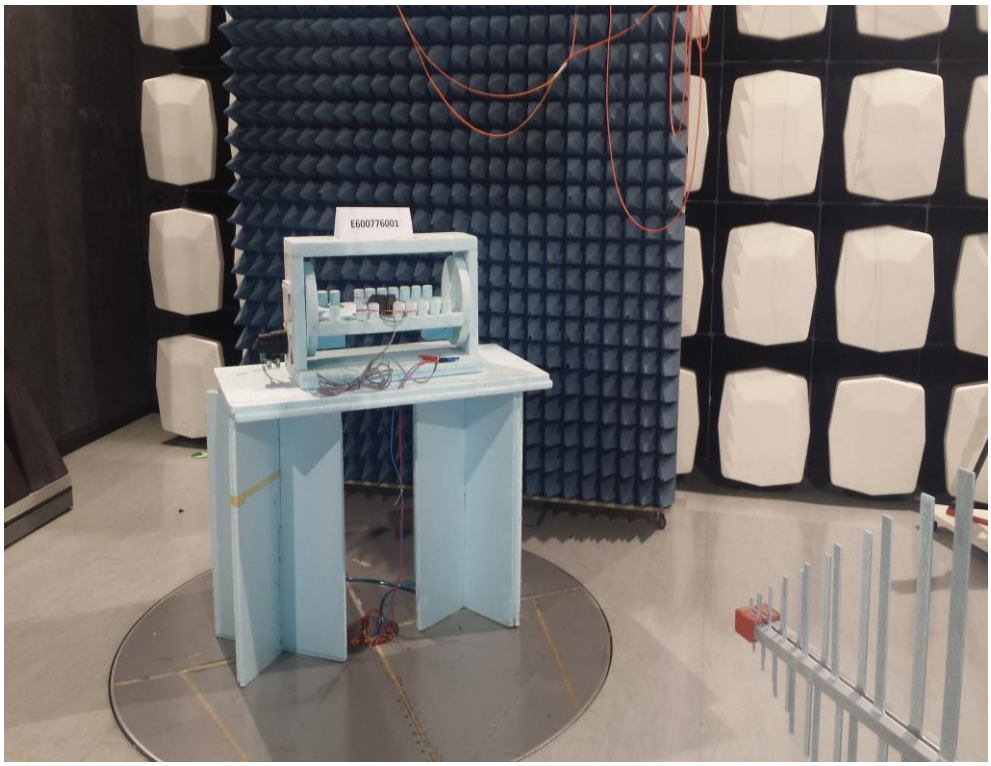

Test setup 1 EUTA + AE1 , long shot view

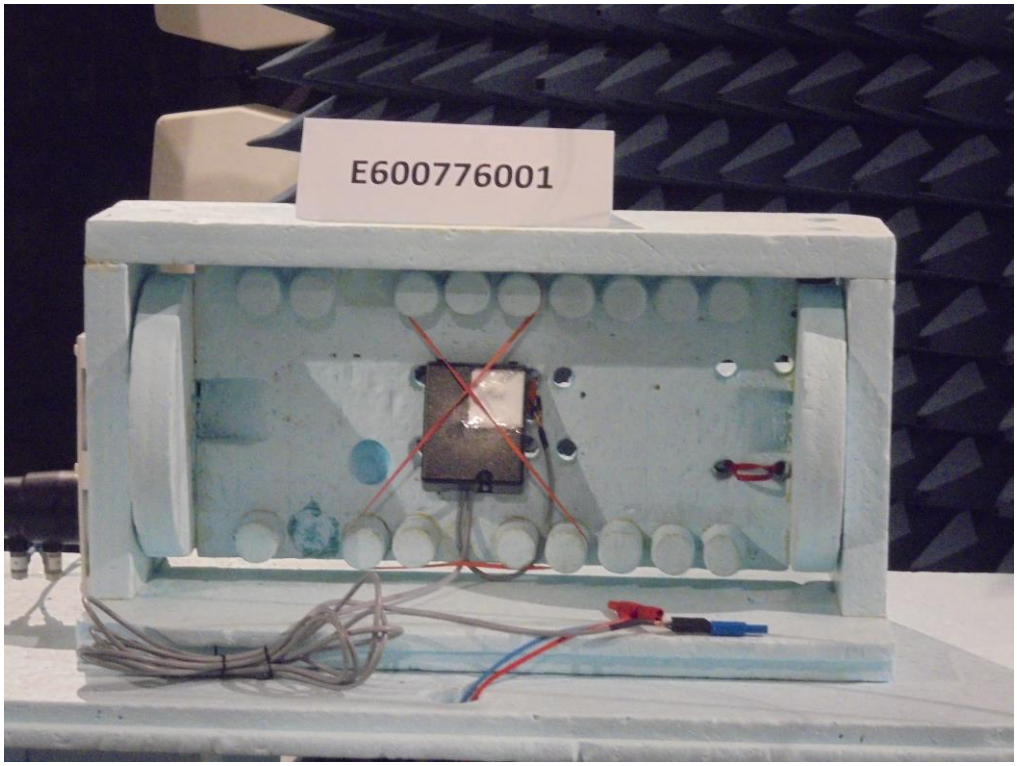

Test setup 1 EUTA + AE1 , close-up view

1.3. Frequency Tolerance of the Carrier Signal

Test setup 2 EUTA Complete setup with Temperature Chamber

Test setup 2 EUTA inside view Temperature Chamber

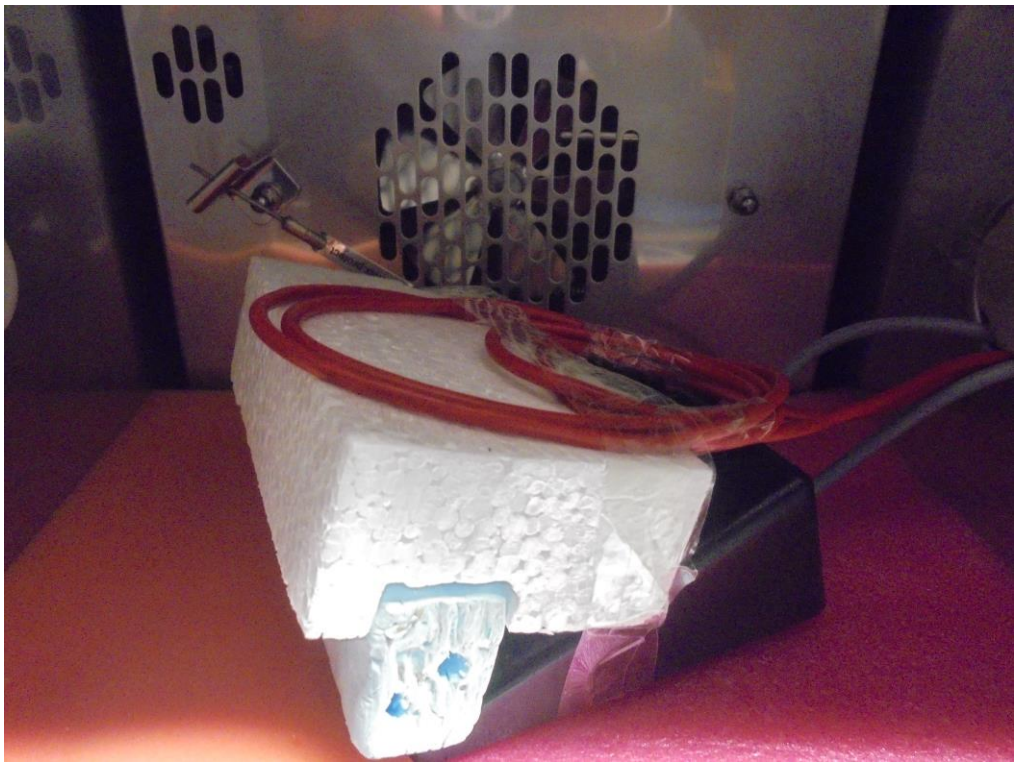

Test setup 2 EUTA with Coupling Antenna inside Temperature Chamber