



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5) Date : 30 Jun 2016

Application No. : LU015484(0)

Applicant : Marathon Watch Company Limited
30 Mural Street #10, Richmond Hill,
Ontario, Canada, L4B 1B5

Sample Description : One(1) item of submitted sample stated to be Remote Temperature Sensor of
Model No. CL030027A
Sample registration No. : RU021870-006
Radio Frequency : 433.95 MHz Transmitter
Rating : 2 x 1.5V AA size batteries
No. of submitted sample : Three (3) set (s)

Date Received : 11 May 2016

Test Period : 12 May 2016 to 21 May 2016.

Test Requested : FCC Part 15 Certificate (15.231)
Industry Canada Interference Causing Equipment Standard RSS-210

Test Method : 47 CFR Part 15 (10-1-15 Edition), ANSI C63.10 – 2013
Industry Canada RSS-Gen Issue 4

Test Engineer : Mr. LEUNG Shu-kan, Ken

Test Result : See attached sheet(s) from page 2 to 30.

Conclusion : The submitted sample was found to comply with requirement of FCC Part 15
Subpart C and Industry Canada RSS-210 Issue 8.

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____


Mr. WONG Lap-pong, Andrew
Manager
Electrical Division

Page 1 of 30

FCC ID: 2AGNSCL030027
IC: 20921-CL030027



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

Table of Contents

1	General Information	3
1.1	General Description	3
1.2	Location of the test site	4
1.3	List of measuring equipment.....	5
1.4	Measurement Uncertainty.....	6
2	Description of the radiated emission test	7
2.1	Test Procedure	7
2.2	Test Result	8
2.3	Radiated Emission Measurement Data	9
3	Description of the Line-conducted Test	11
3.1	Test Procedure	11
3.2	Test Result	11
3.3	Graph and Table of Conducted Emission Measurement Data	11
4	Photograph	12
4.1	Photographs of the Test Setup for Radiated Emission and Conducted Emission.....	12
4.2	Photographs of the External and Internal Configurations of the EUT	12
5	Supplementary document.....	13
5.1	Bandwidth.....	13
5.2	Duty cycle Calculation.....	13
5.3	Transmission Time.....	13
5.4	Antenna requirement.....	14
6	Appendices.....	15



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

1 General Information

1.1 General Description

The equipment under test (EUT) is a remote temperature sensor. It operates at 433.95MHz and the oscillation of MCU is generated by a crystal. The EUT is power by 2 x 1.5V AA sizes batteries. The MCU will measure the temperature and humidity. It will transmit the measured data to receiver wirelessly.

The brief circuit description is listed as follows:

- U1 and its associated circuit act as MCU
- X1 and its associated circuit act as oscillator
- LCD1 and its associated circuit act as display
- RT1 and its associated circuit act as thermistor



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

1.2 Location of the test site

FCC Registered Test Site Number: 552221

Industry Canada Registered Test Site Number: 4093A

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	R&S	ESCI	100152	27 Sep 2016	1Year
Spectrum Analyzer	R&S	FSV40	100628	09 Feb 2017	1Year
Broadband Antenna	Schaffner	CBL6112B	2718	15 Mar 2017	2Years
Loop Antenna	EMCO	6502	00056620	25 Jan 2018	2Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	24 Nov 2016	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	24 Nov 2016	2Years
Coaxial Cable	Schaffner	RG 213/U	N/A	18 May 2016	1Years
Coaxial Cable	Suhner	RG 214/U	N/A	18 May 2016	1Years
Coaxial Cable	Suhner	Sucoflex_104	N/A	13 Dec 2016	1Years



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.83dB
30MHz ~ 200MHz (Vertical)	4.84dB
200MHz ~ 1000MHz (Horizontal)	4.87dB
200MHz ~ 1000MHz (Vertical)	5.94dB
1GHz ~ 6GHz	4.41dB
6GHz ~ 18GHz	4.64dB

Conducted emissions

Frequency	Uncertainty (U_{lab})
150kHz~30MHz	2.64dB



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground for below 1GHz measurement and 1.5m high above the ground for above 1GHz measurement. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

For 30MHz to 1GHz, broadband antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. And the reference point of antenna shall be 1 m above the ground.

For above 1GHz, horn antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. Preamplifier and High Pass filter was used for measurements. The reference point of antenna shall be 1 m above the ground.

The device was rotated through three orthogonal to determine which attitude and configuration produce the highest emission during measurement for Radiated Emission measurement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

2.2 Test Result

Peak Detector data were measured unless otherwise stated.

“#” means emissions appear within the restricted bands shall follow the requirement of section 15.205 and RSS-Gen 8.10.

The frequencies from fundamental up to that tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next page (section 2.3).

It was found that the EUT meet the FCC and RSS requirement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

2.3 Radiated Emission Measurement Data

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C and RSS

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	25	° C
Relative humidity:	60	%

Measurement: Peak

Operation mode: Transmission

RBW: 9kHz (below 30MHz), 120kHz (30MHz-1GHz), 1MHz (above 1GHz)

VBW: 30kHz (below 30MHz), 300kHz (30MHz-1GHz), 3MHz (above 1GHz)

Testing frequency range: 9kHz to 5GHz

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
433.953	H	59.9	22.0	81.9	100.8	- 18.9
867.905	H	25.9	24.6	50.5	80.8	- 30.3
#1301.876	H	58.8	- 7.7	51.1	74.0	- 22.9
1735.843	H	61.4	- 7.8	53.6	80.8	- 27.2
2169.761	H	62.4	- 6.6	55.8	80.8	- 25.0
2603.679	V	51.3	- 4.2	47.1	80.8	- 33.7
3037.661	V	57.1	- 2.9	54.2	80.8	- 26.6
3471.626	V	58.2	- 2.9	55.3	80.8	- 25.5
#3905.582	V	50.1	- 1.8	48.3	74.0	- 25.7
#4339.395	V	42.7	- 0.7	42.0	74.0	- 32.0

Remark: Other emissions more than 20dB below the limit are not reported.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

2.3 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C and RSS

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	25	° C
Relative humidity:	60	%

Measurement: Average

Operation mode: Transmission

Testing frequency range: 9kHz to 5GHz

Frequency (MHz)	Polarity (H/V)	Peak Field Strength at 3m (dBμV/m)	Average Factor (dB/m)	Average Value at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
433.953	H	81.9	- 6.1	75.8	80.8	- 5.0
867.905	H	50.5	- 6.1	44.4	60.8	- 16.4
#1301.876	H	51.1	- 6.1	45.0	54.0	- 9.0
1735.843	H	53.6	- 6.1	47.5	60.8	- 13.3
2169.761	H	55.8	- 6.1	49.7	60.8	- 11.1
2603.679	V	47.1	- 6.1	41.0	60.8	- 19.8
3037.661	V	54.2	- 6.1	48.1	60.8	- 12.7
3471.626	V	55.3	- 6.1	49.2	60.8	- 11.6
#3905.582	V	48.3	- 6.1	42.2	54.0	- 11.8
#4339.395	V	42.0	- 6.1	35.9	54.0	- 18.1

Remark: Other emissions more than 20dB below the limit are not reported.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

3 Description of the Line-conducted Test

3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

3.3 Graph and Table of Conducted Emission Measurement Data

Not Applicable



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

4 Photograph

4.1 Photographs of the Test Setup for Radiated Emission and Conducted Emission

For electronic filing, the photos are saved with filename 2AGNSCL030027 TSup.pdf.

4.2 Photographs of the External and Internal Configurations of the EUT

For electronic filing, the photos are saved with filename 2AGNSCL030027 ExPho.pdf and 2AGNSCL030027 InPho.pdf.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

5 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename
ID Label/Location	LabelSmp.jpg
Block Diagram	BlkDia.pdf
Schematic Diagram	Schem.pdf
Users Manual	UserMan.pdf
Operational Description	OpDes.pdf

5.1 Bandwidth

The plot saved in Appendices A6 and A7 shows the fundamental emission is confined in the specified band. The bandwidth requirement is $0.25\% \times 433.95 = 1.085\text{MHz}$

5.2 Duty cycle Calculation

Appendices A8 shows the plots of duty cycle

The pulse train is over 100ms, therefore need to find the 100ms period with most 'ON' time.

There are 2 different pulses in the pulse train

Time of pulse one: 5.8ms

Time of pulse two: 1.8ms

Number of pulse on in 100ms: 7

Number of pulse two in 100ms: 5

Duty cycle = $(7 \times 5.8\text{ms} + 5 \times 1.8\text{ms}) / 100\text{ms} = 0.496$

Average factor = $20 \times \log(0.496) = -6.1$

5.3 Transmission Time

During of each transmission = 920 ms.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

The during of each transmission is confined with 1 second, and the required silent period is at least 10 second or 30 times of the during of transmission according to section 15.231(e) and RSS-210 A1.1.5. The plot saved Appendices A9 shows the EUT has at least 30-second silent period and thus met the FCC and RSS requirement.

5.4 Antenna requirement

Appendices A4 shows the antenna is permanently attached and cannot be changed. Therefore it fulfils the section 15.203 requirement



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

6 Appendices

A1	Photos of the set-up of Radiated Emissions	3	pages
A2	Photos of External Configurations	2	pages
A3	Photos of Internal Configurations	4	pages
A4	ID Label/Location	1	page
A5	20dB Bandwidth Plot	1	page
A6	99% Bandwidth Plot	1	page
A7	Average Factor	2	pages
A8	Transmission Time	1	page



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AU0037755(5)

Date : 30 Jun 2016

A1. Photos of the set-up of Radiated Emissions

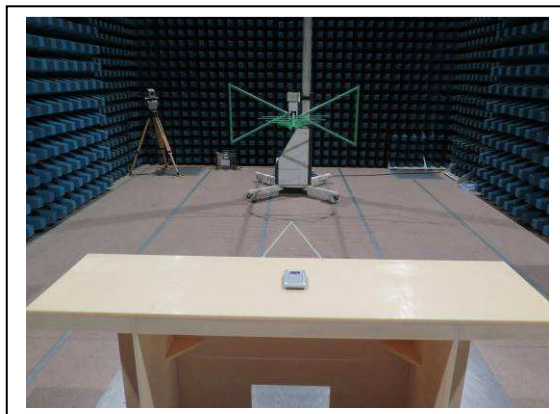

(Front view, 30Hz – 1GHz)

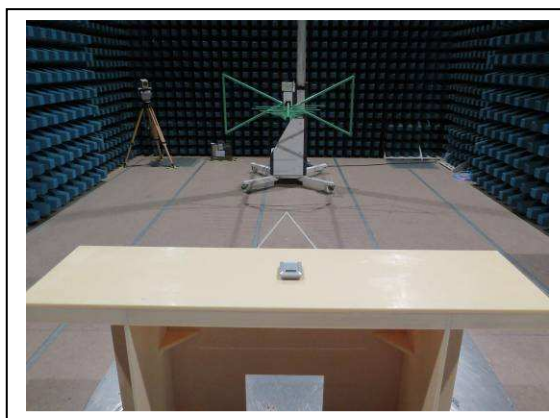

(Back view, 30MHz – 1GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AU0037755(5)

Date : 30 Jun 2016

A1. Photos of the set-up of Radiated Emissions

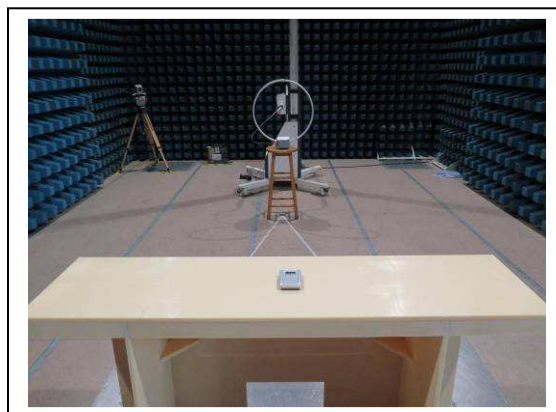

(Front view, 9kHz – 30MHz)

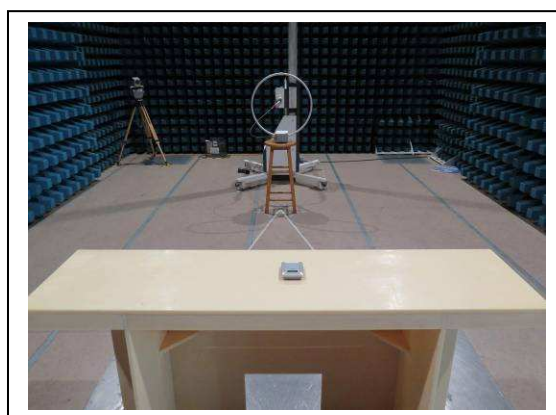

(Back view, 9kHz – 30MHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AU0037755(5)

Date : 30 Jun 2016

A1. Photos of the set-up of Radiated Emissions

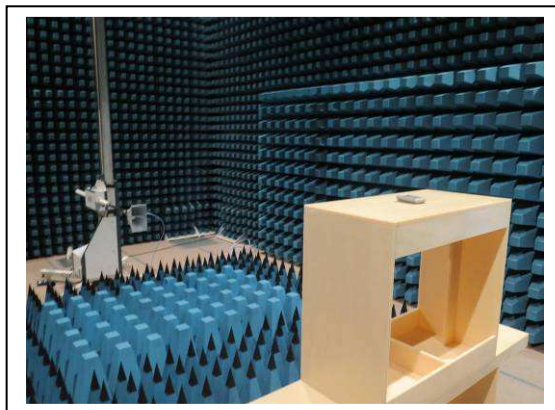

(Front view, above 1GHz)

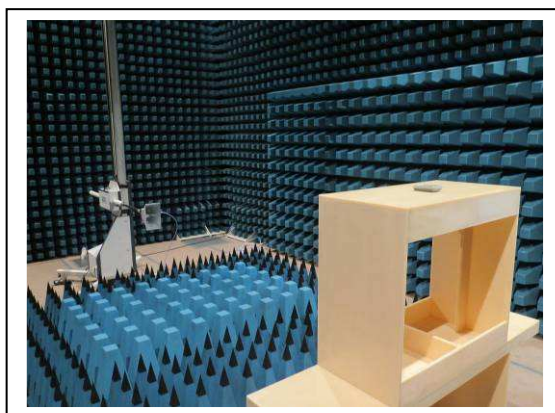

(Back view, above 1GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

A2 Photos of External Configurations



External Configuration 1



External Configuration 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

A2 Photos of External Configurations



External Configuration 3

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AU0037755(5)

Date : 30 Jun 2016

A3 Photos of Internal Configurations

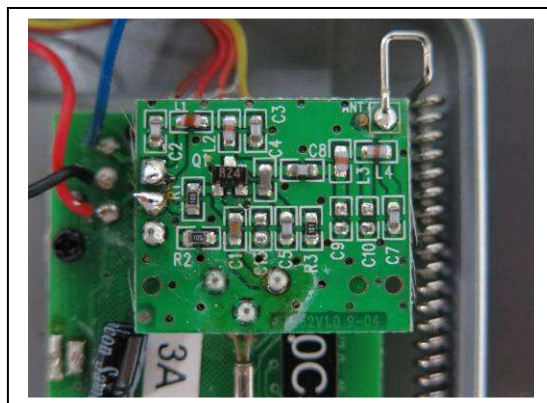

Internal Configuration 1

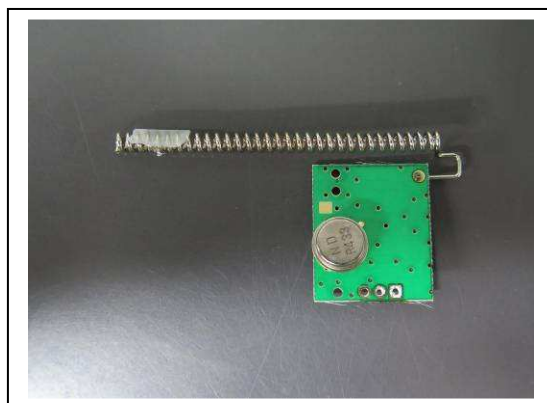

Internal Configuration 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AU0037755(5)

Date : 30 Jun 2016

A3 Photos of Internal Configurations



Internal Configuration 3

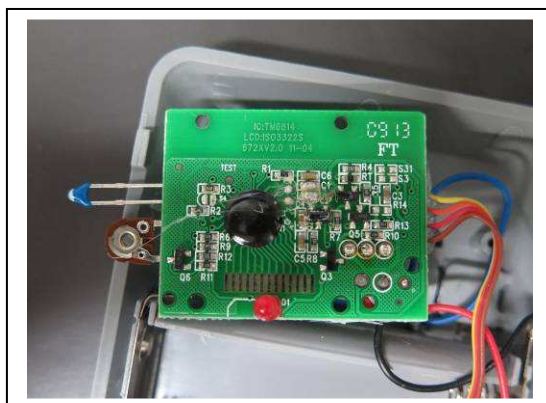

Internal Configuration 4

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: 2AGNSCL030027

IC: 20921-CL030027

Page 22 of 30

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AU0037755(5)

Date : 30 Jun 2016

A3 Photos of Internal Configurations

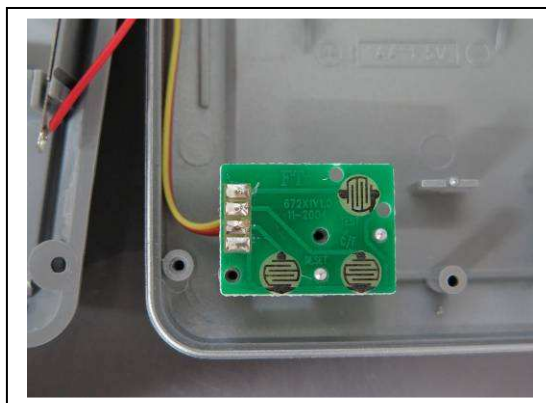

Internal Configuration 5

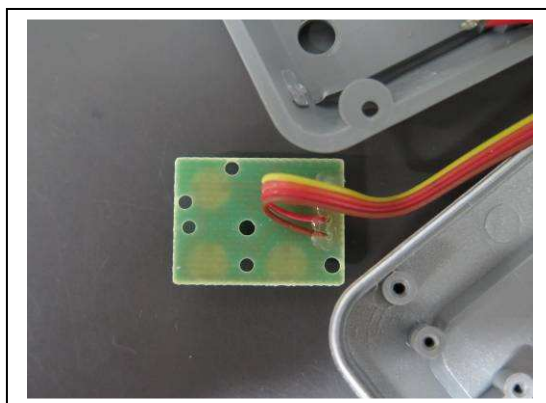

Internal Configuration 6

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

A3 Photos of Internal Configurations



EUT Antenna

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

A4. ID Label / Location

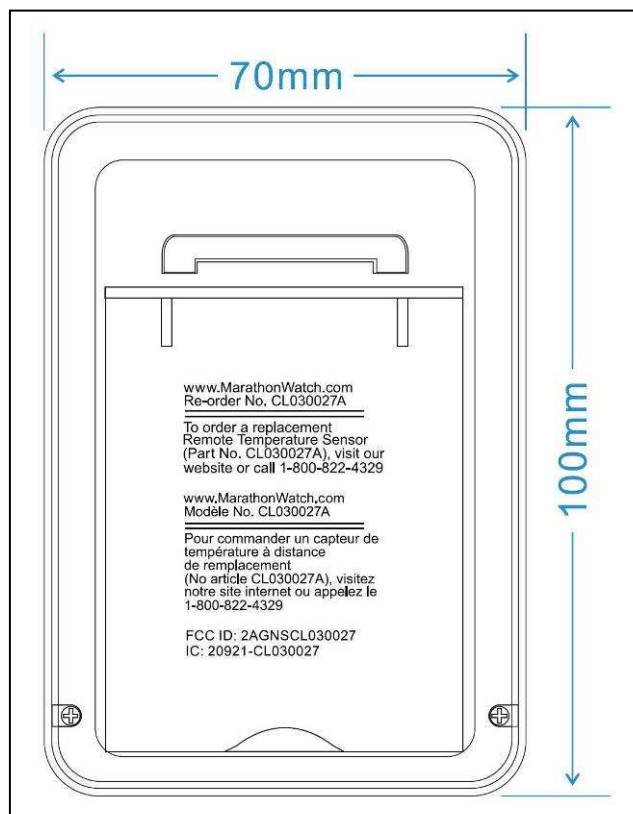

ID Label

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

A5. 20dB Bandwidth Plot

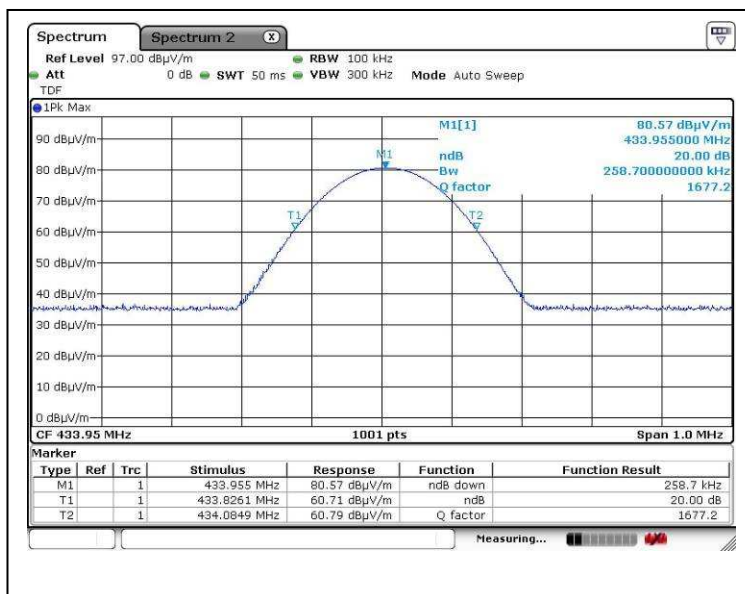

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: 2AGNSCL030027

IC: 20921-CL030027



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

A6. 99% Bandwidth Plot

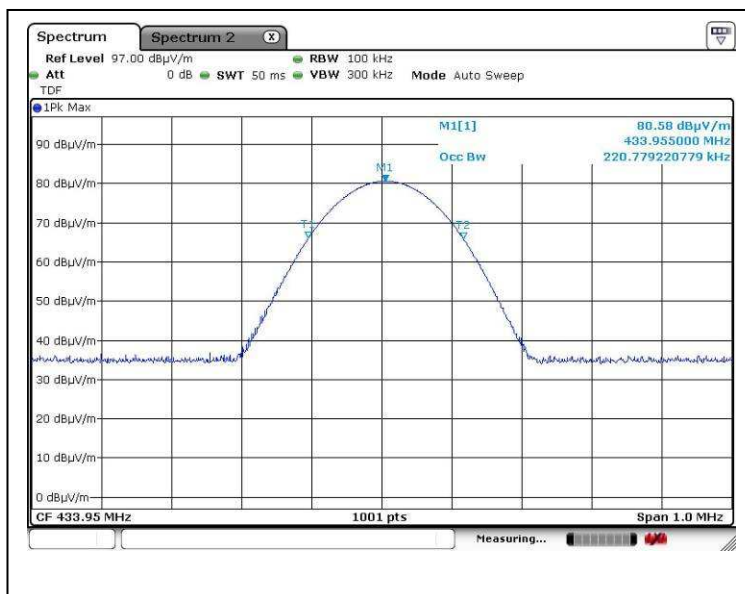

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: 2AGNSCL030027

IC: 20921-CL030027



CMA Testing and Certification Laboratories



廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

A7. Average Factor

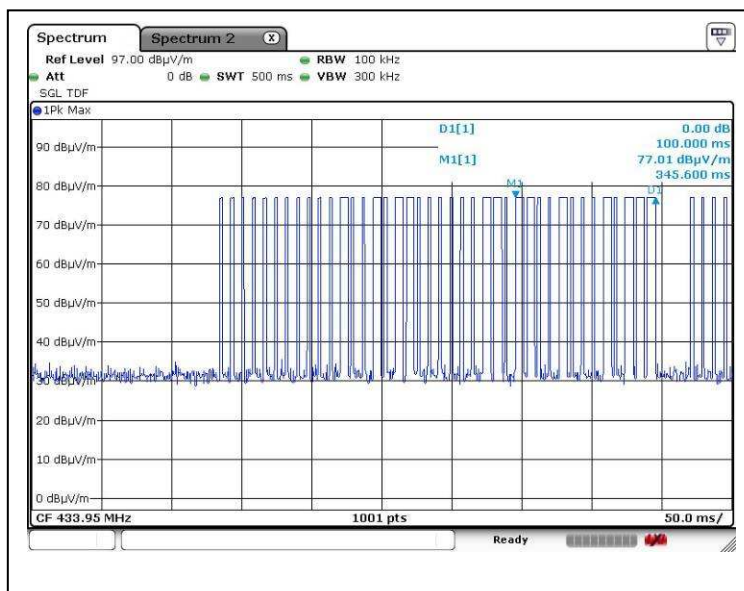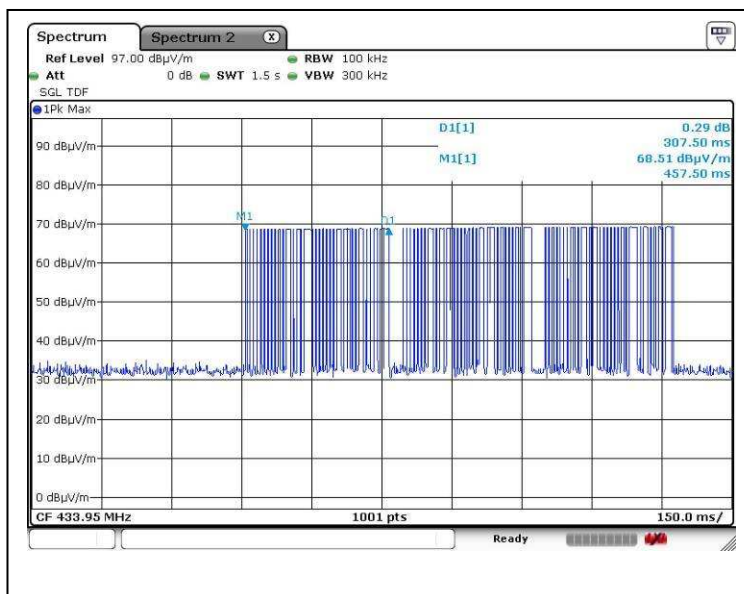

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: 2AGNSCL030027

IC: 20921-CL030027



CMA Testing and Certification Laboratories



廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

A7. Average Factor

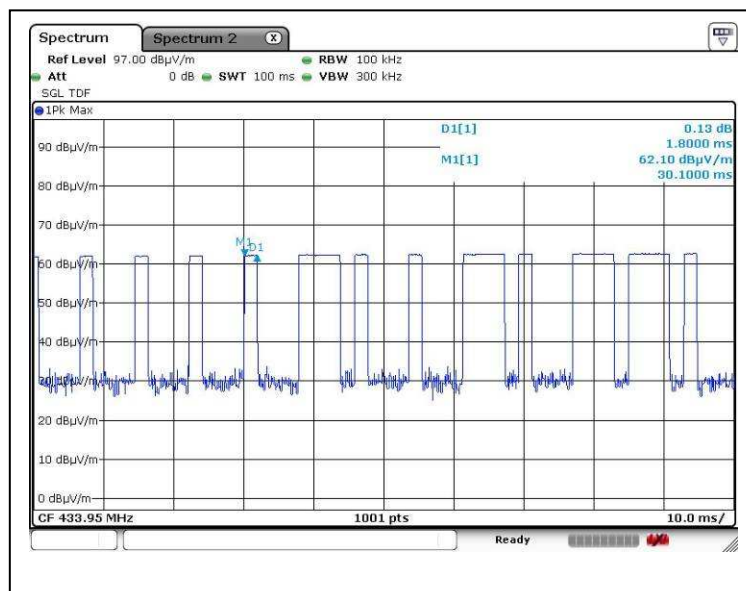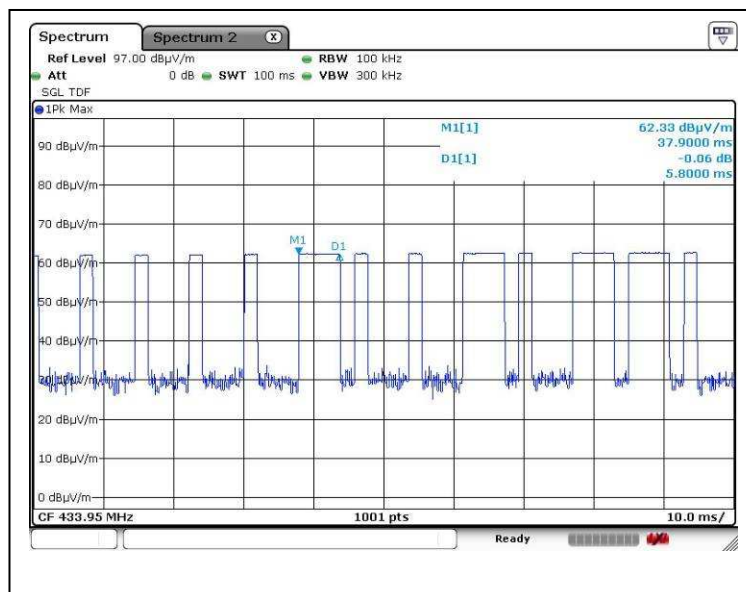

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories



廠商會檢定中心

TEST REPORT

Report No. : AU0037755(5)

Date : 30 Jun 2016

A8. Transmission Time

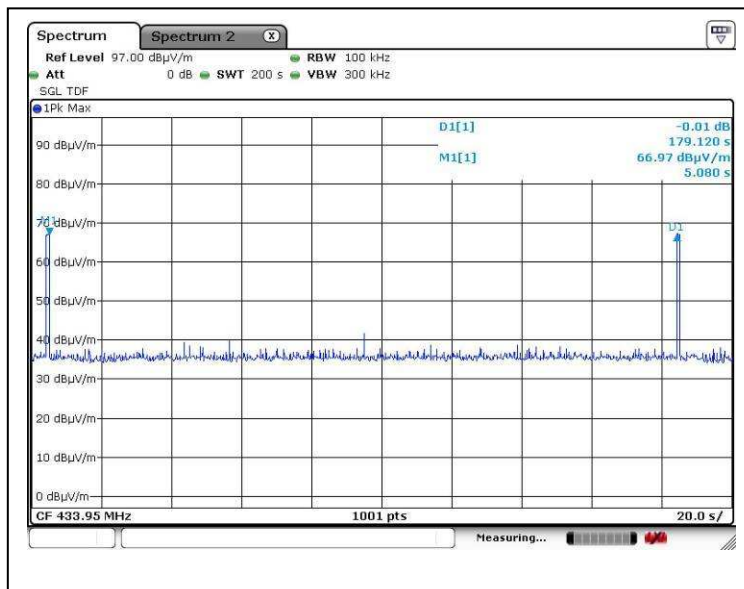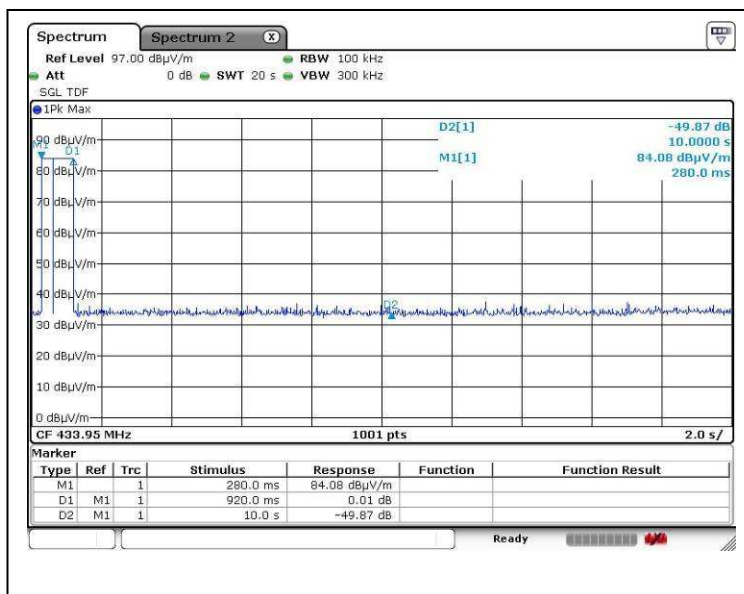

***** End of Report *****

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew