

01_Bluetooth_DH5 1Mbps_On the Front of the Face_Ch0

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	158.2 x 77.9 x 8.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-	2402.000, 0	7.87	1.78	40.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	100.0 x 50.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
Measurement Software		17.0.4.7034
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-05-24	2026-05-24
psSAR1g [W/Kg]	0.099	0.110
psSAR10g [W/Kg]	0.044	0.048
Power Drift [dB]	0.09	0.04
M2/M1 [%]		83.7
Dist 3dB Peak [mm]		8.0

SAR Pattern

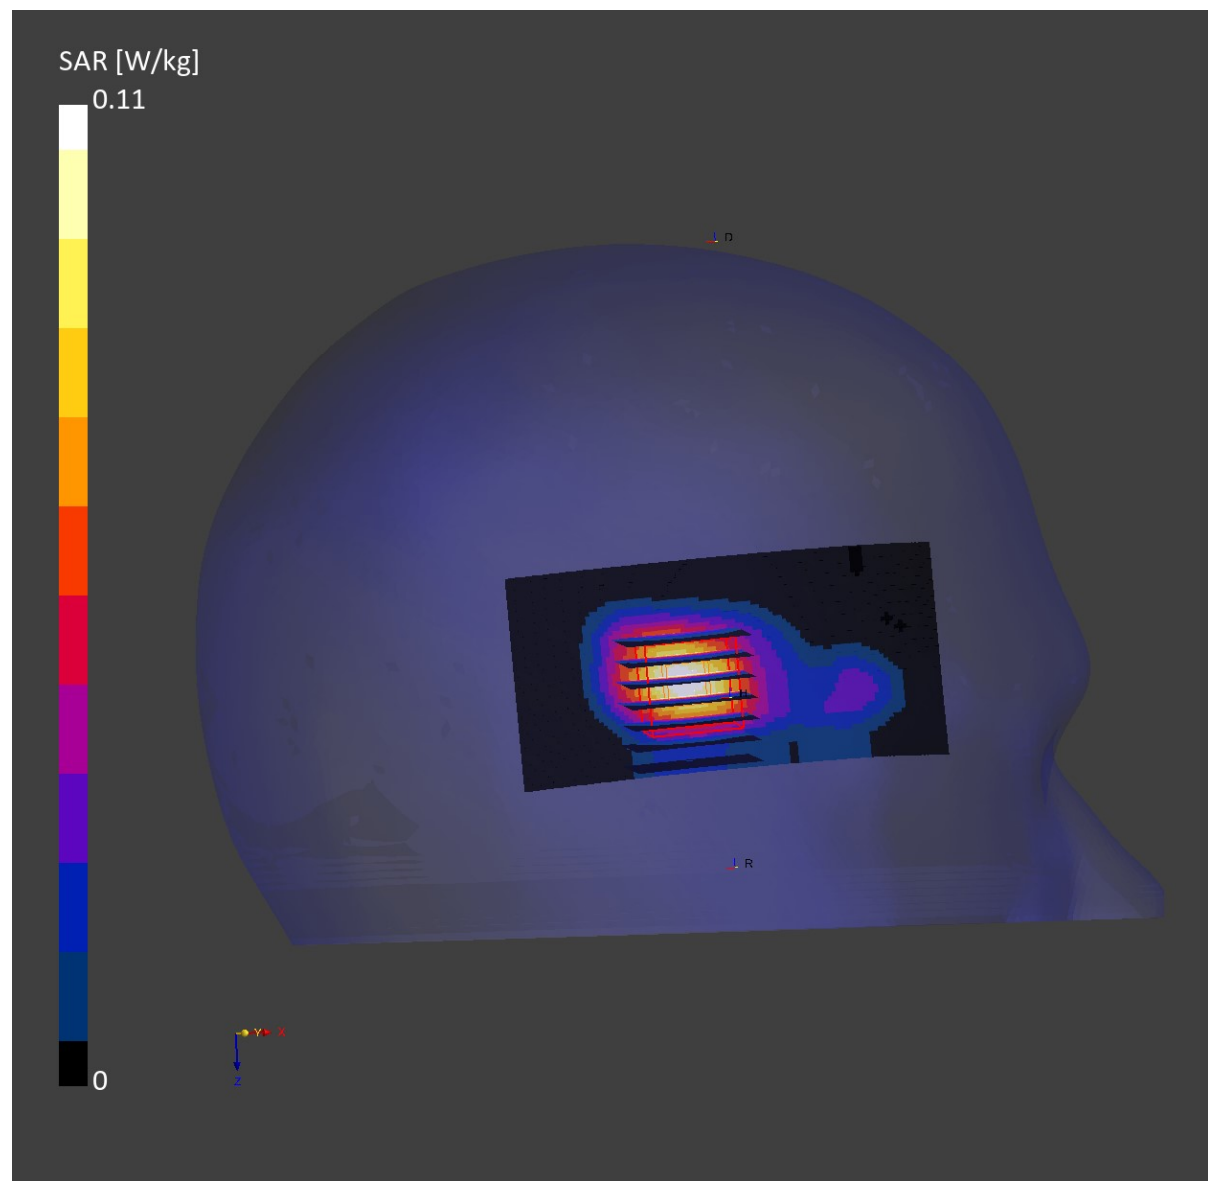

02_WLAN2.4GHz_802.11b 1Mbps_On the Front of the Face_Ch13

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	158.2 x 77.9 x 8.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	2.4 GHz	WiFi (802.11b), 10415-	2472.000, 13	7.87	1.84	40.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	140.0 x 70.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
Measurement Software		17.0.4.7034
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-05-24	2026-05-24
psSAR1g [W/Kg]	0.326	0.387
psSAR10g [W/Kg]	0.136	0.167
Power Drift [dB]	-0.01	0.11
M2/M1 [%]		83.4
Dist 3dB Peak [mm]		8.3
SAR Pattern		

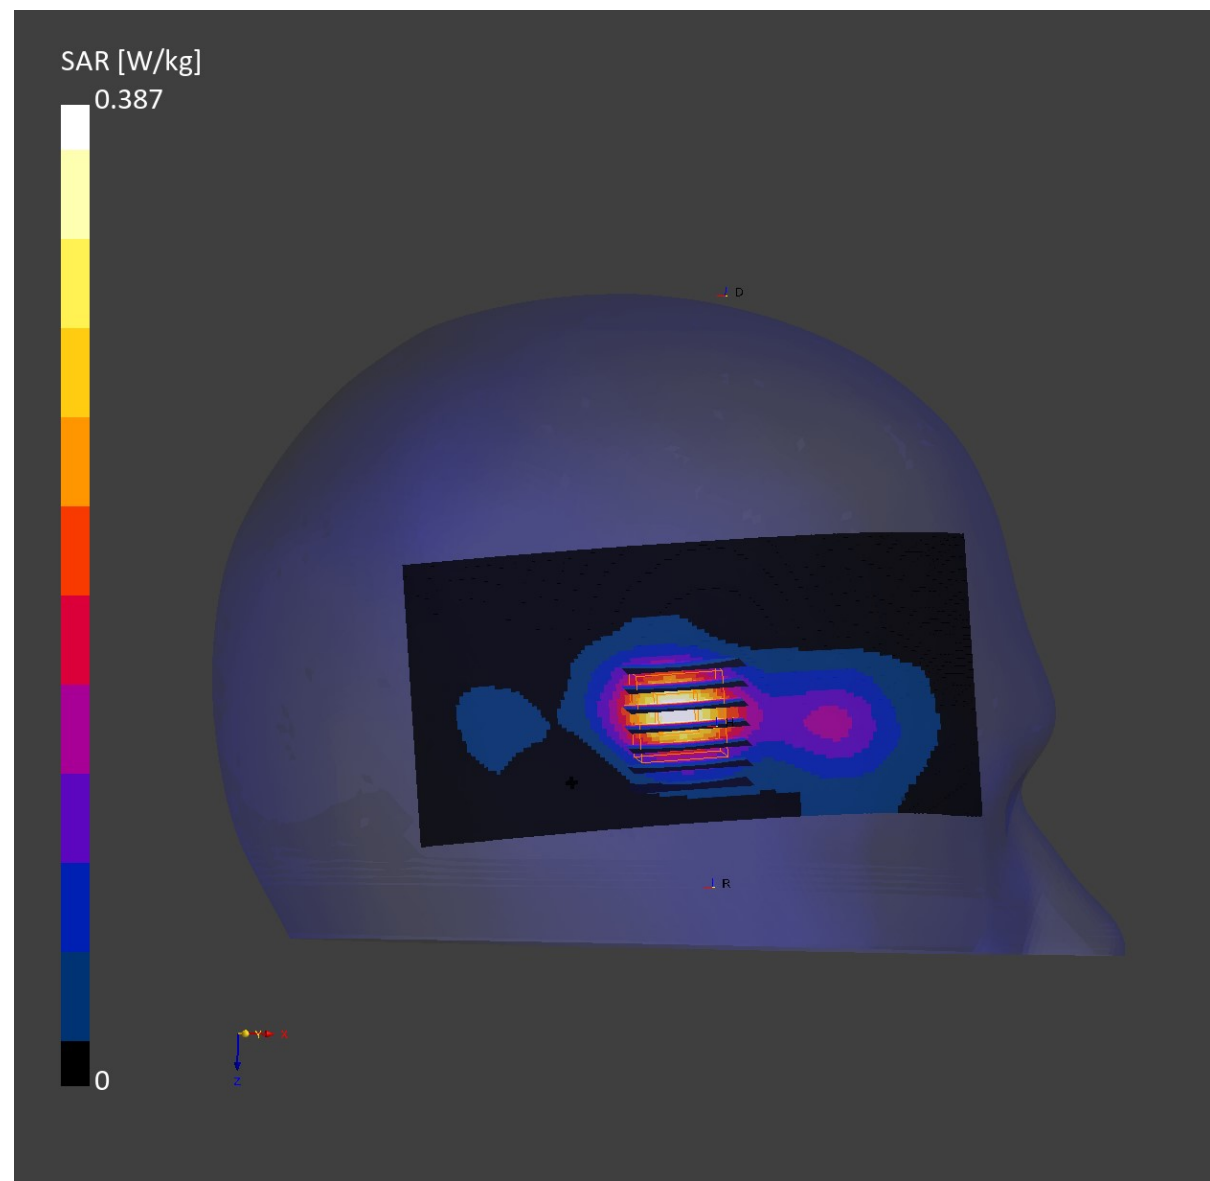

03_WLAN5GHz_802.11ac-VHT160 MCS0_On the Front of the Face_Ch50

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	158.2 x 77.9 x 8.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	U-NII 1 / 2A	WiFi (802.11ac), 10554-	5250.000, 50	6.08	4.59	37.0

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	105.0 x 60.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Measurement Software		17.0.4.7034
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-06-03	2026-06-03
psSAR1g [W/Kg]	0.331	0.303
psSAR10g [W/Kg]	0.107	0.092
Power Drift [dB]	0.03	0.08
M2/M1 [%]		71.8
Dist 3dB Peak [mm]		6.5

SAR Pattern

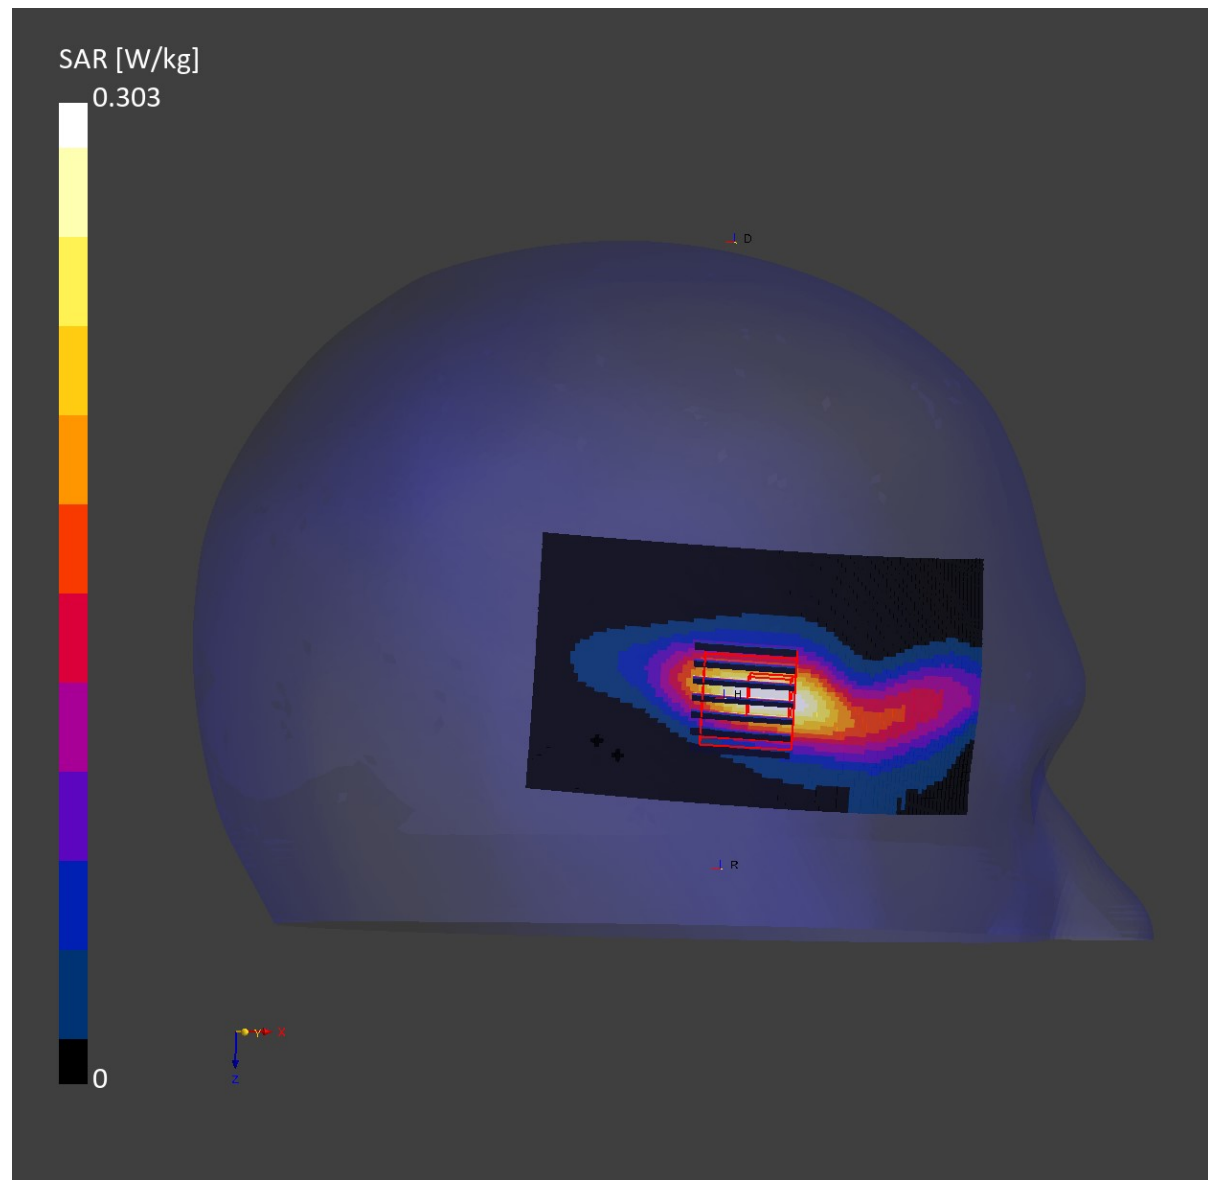

04_WLAN5GHz_802.11ac-VHT160 MCS0_On the Front of the Face_Ch114

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	158.2 x 77.9 x 8.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	U-NII 2C	WiFi (802.11ac), 10554-	5570.000, 114	5.54	4.97	36.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	105.0 x 55.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Measurement Software		17.0.4.7034
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-06-03	2026-06-03
psSAR1g [W/Kg]	0.394	0.386
psSAR10g [W/Kg]	0.116	0.109
Power Drift [dB]	0.01	0.02
M2/M1 [%]		72.0
Dist 3dB Peak [mm]		6.4

SAR Pattern

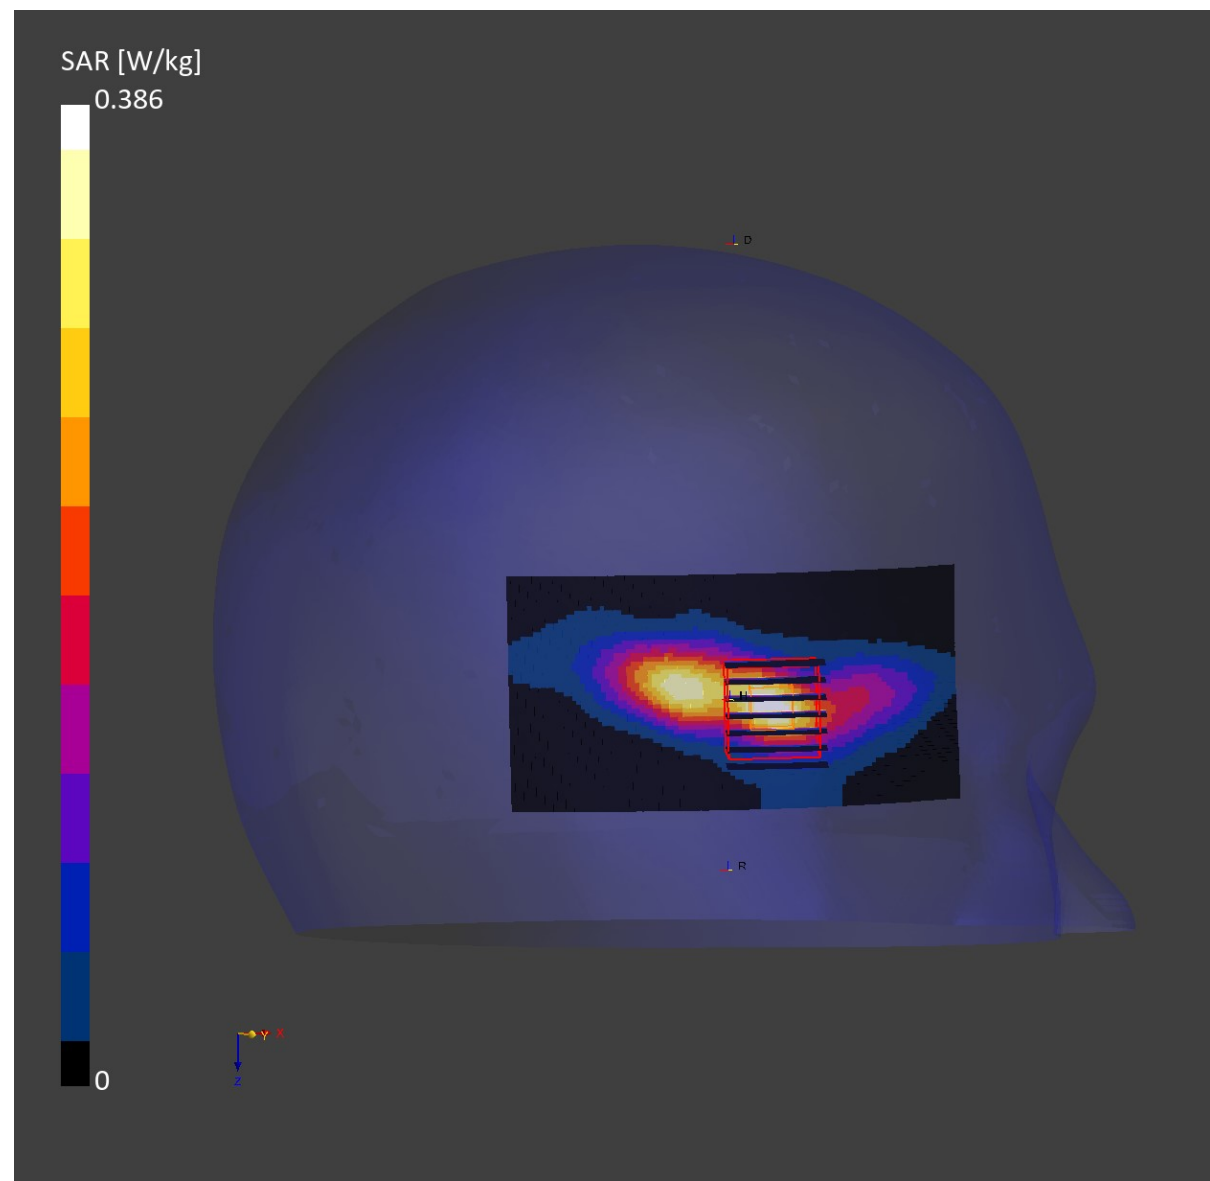

05_WLAN5GHz_802.11ac-VHT80 MCS0_On the Front of the Face_Ch155

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	158.2 x 77.9 x 8.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	U-NII 3	WiFi (802.11ac), 10544-	5775.000, 155	5.52	5.31	36.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	115.0 x 70.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Measurement Software		17.0.4.7034
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-06-03	2026-06-03
psSAR1g [W/Kg]	0.350	0.347
psSAR10g [W/Kg]	0.104	0.092
Power Drift [dB]	-0.03	-0.11
M2/M1 [%]		72.7
Dist 3dB Peak [mm]		6.1

SAR Pattern

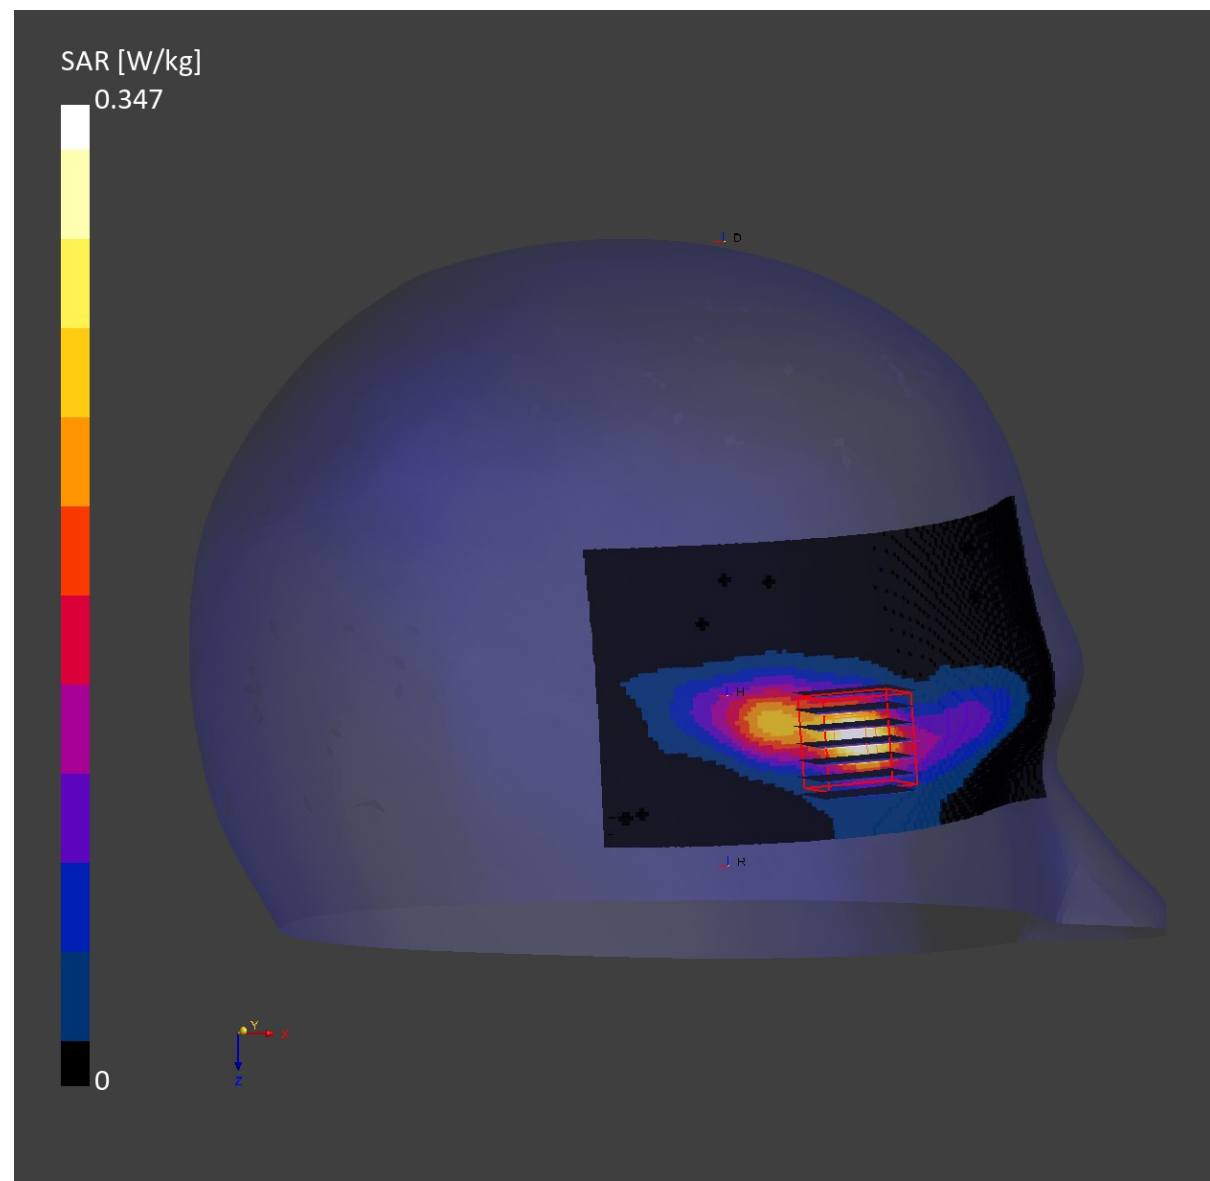

07_Bluetooth_DH5 1Mbps_On of the head_Ch0

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	158.2 x 77.9 x 8.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-	2402.000, 0	7.87	1.77	40.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	80.0 x 70.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
Measurement Software		17.0.4.7034
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-05-29	2026-05-29
psSAR1g [W/Kg]	0.088	0.103
psSAR10g [W/Kg]	0.038	0.045
Power Drift [dB]	-0.13	0.02
M2/M1 [%]		84.6
Dist 3dB Peak [mm]		7.9

SAR Pattern

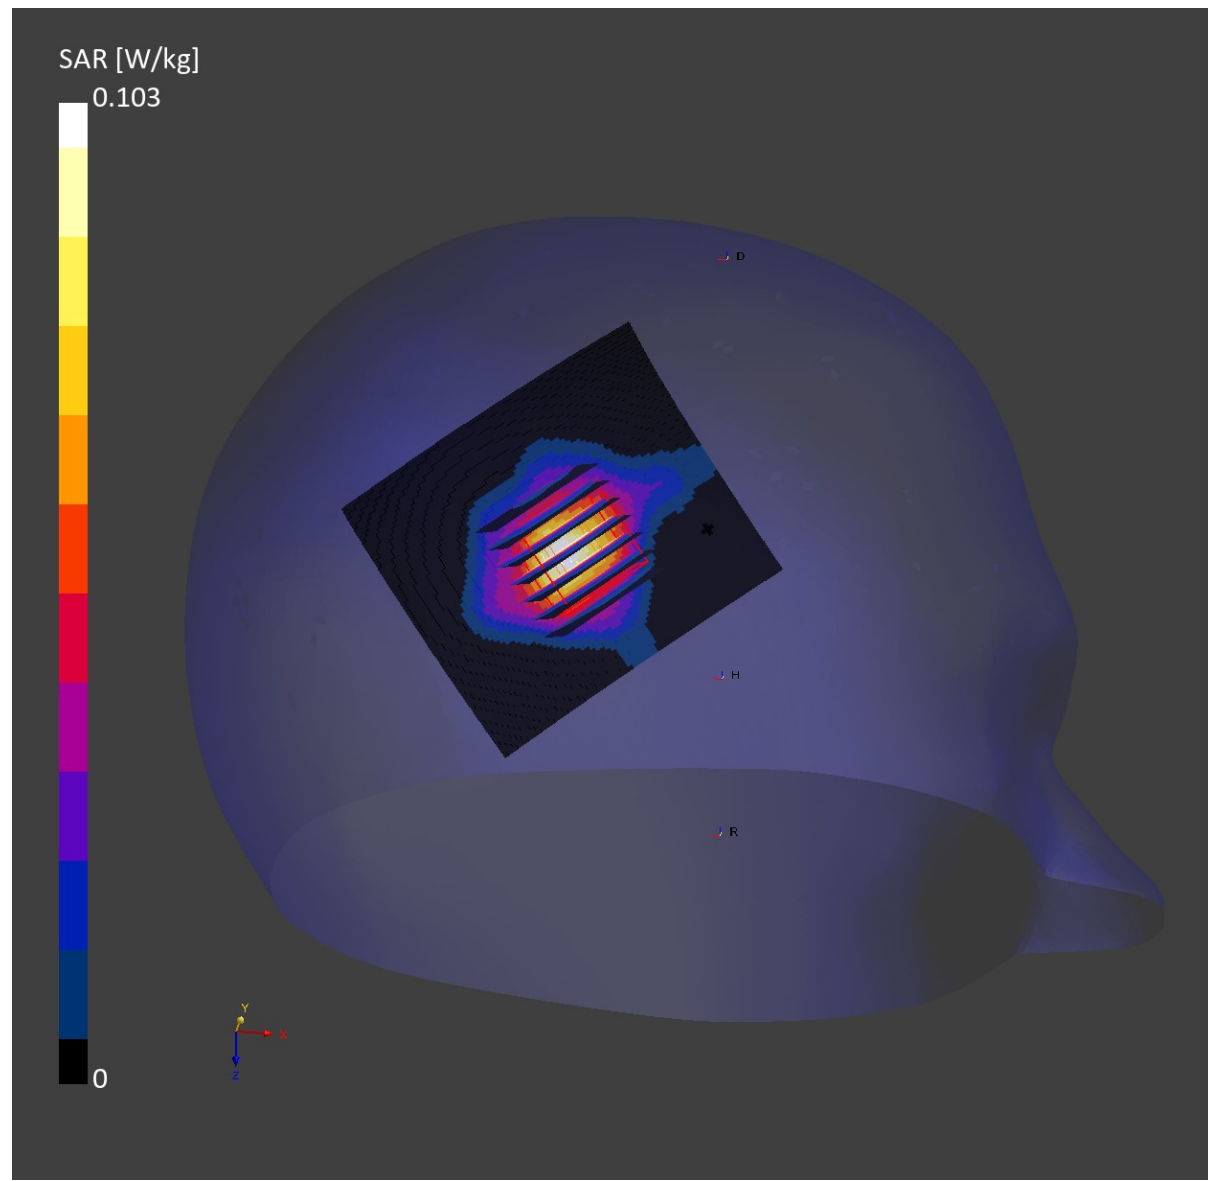

08_WLAN2.4GHz_802.11b 1Mbps_On of the head_Ch1

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	158.2 x 77.9 x 8.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	2.4 GHz	WiFi (802.11b), 10415-	2412.000, 1	7.87	1.78	40.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	80.0 x 70.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
Measurement Software		17.0.4.7034
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-05-29	2026-05-29
psSAR1g [W/Kg]	0.288	0.355
psSAR10g [W/Kg]	0.123	0.151
Power Drift [dB]	0.08	0.02
M2/M1 [%]		84.2
Dist 3dB Peak [mm]		7.9

SAR Pattern

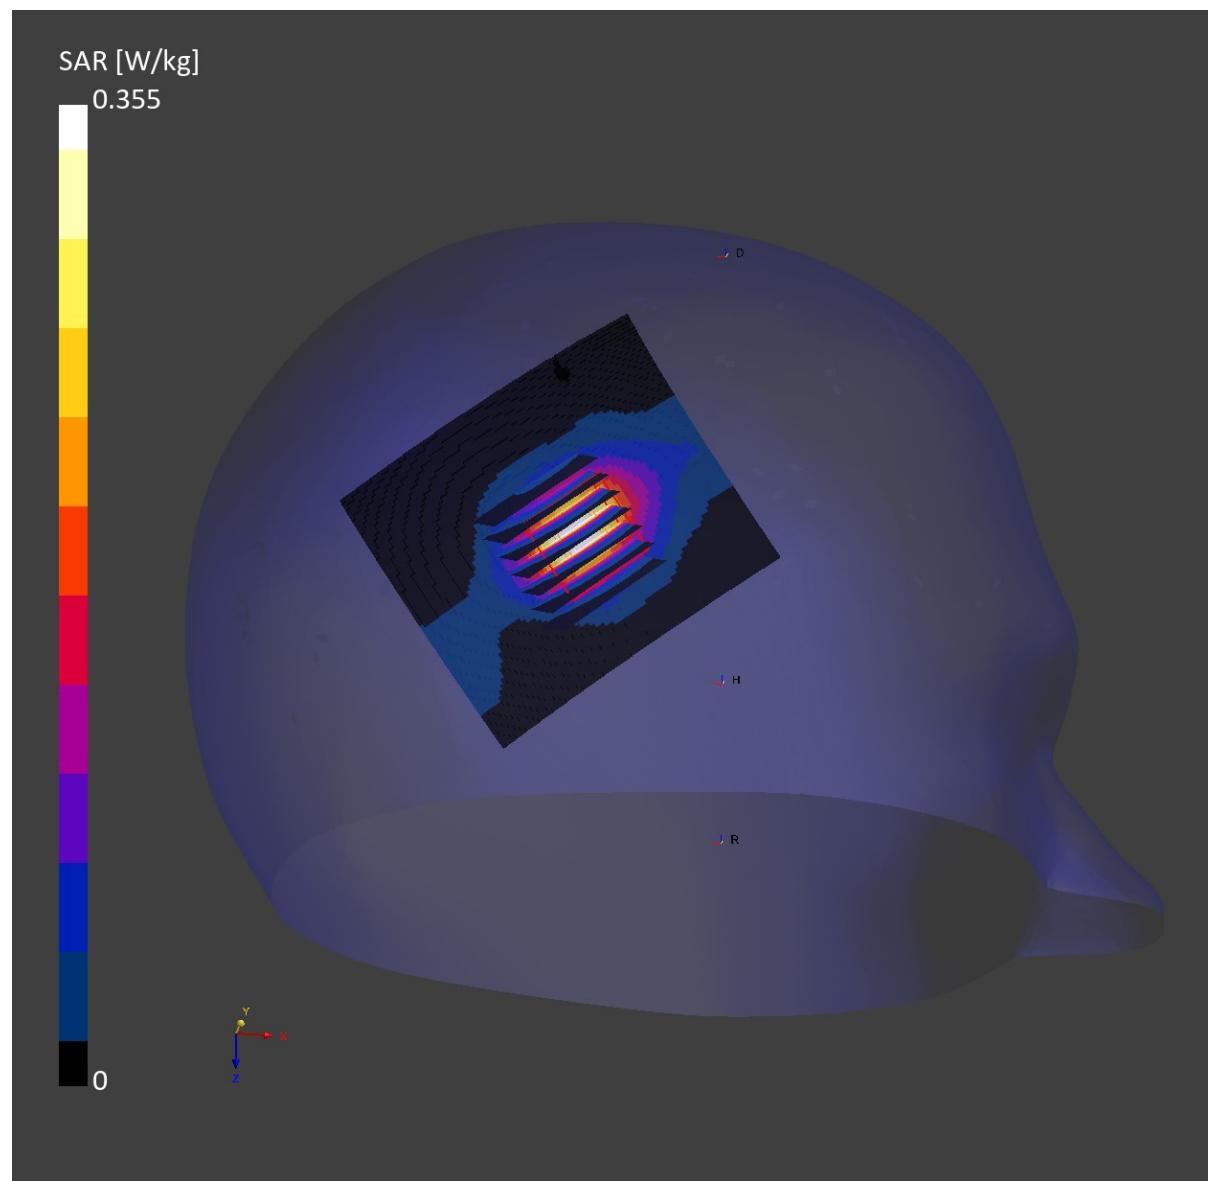

09_WLAN5GHz_802.11ac-VHT160 MCS0_On of the head_Ch50

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	158.2 x 77.9 x 8.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	U-NII 1 / 2A	WiFi (802.11ac), 10554-	5250.000, 50	6.08	4.59	37.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	125.0 x 50.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Measurement Software		17.0.4.7034
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-06-03	2026-06-03
psSAR1g [W/Kg]	0.244	0.221
psSAR10g [W/Kg]	0.073	0.069
Power Drift [dB]	0.12	-0.15
M2/M1 [%]		76.9
Dist 3dB Peak [mm]		6.5
SAR Pattern		

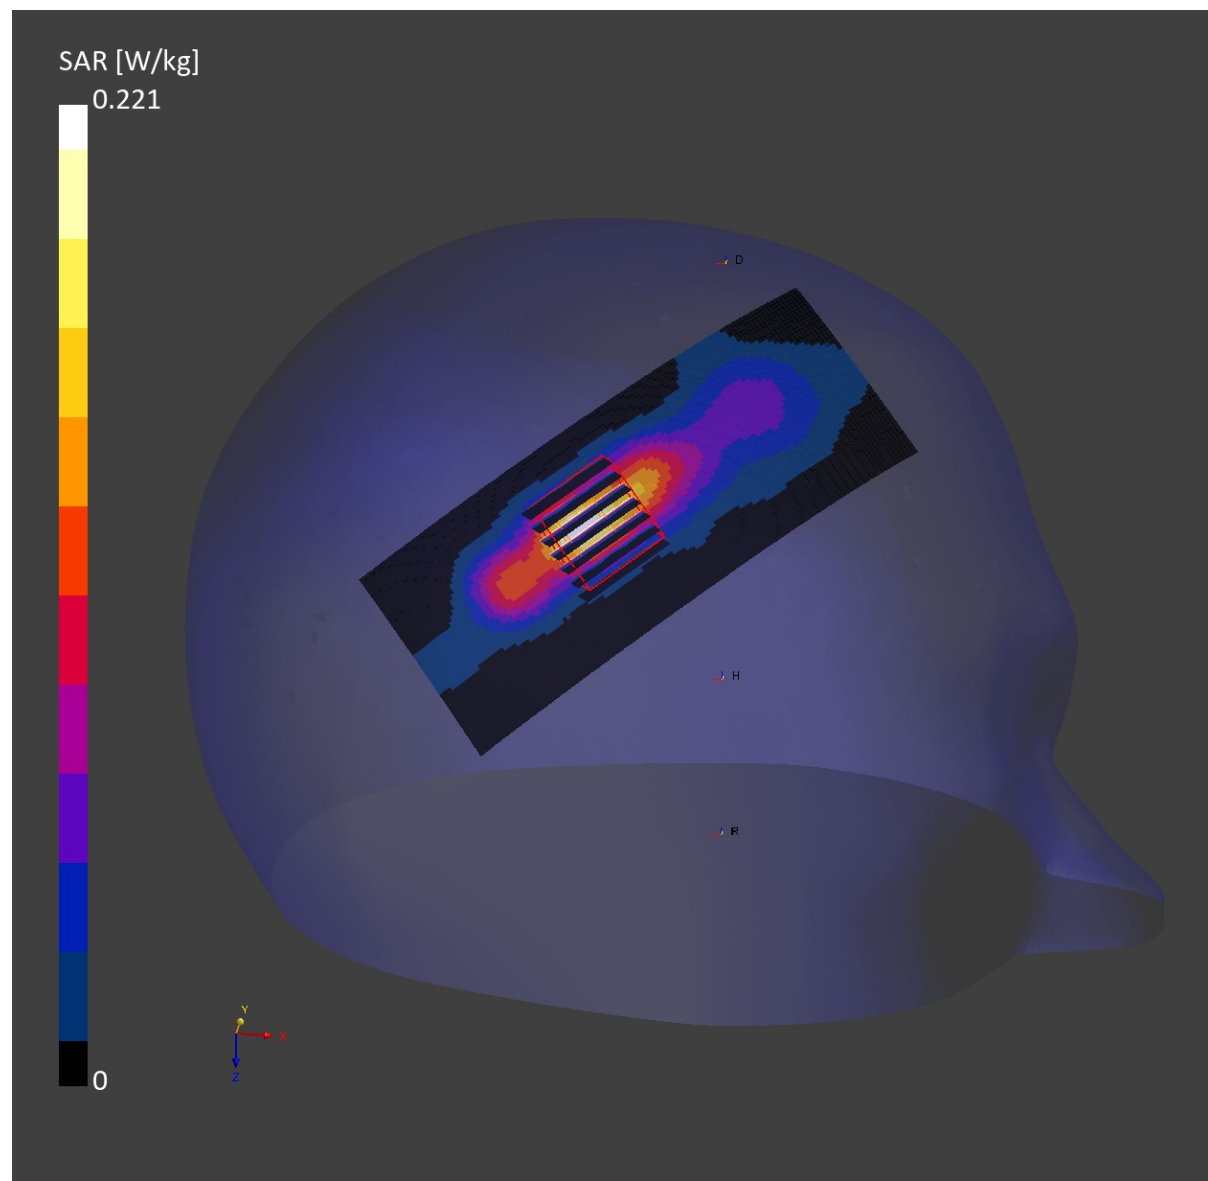

10_WLAN5GHz_802.11ac-VHT160 MCS0_On of the head_Ch114

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	158.2 x 77.9 x 8.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	U-NII 2C	WiFi (802.11ac), 10554-	5570.000, 114	5.54	4.97	36.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	125.0 x 50.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Measurement Software		17.0.4.7034
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-06-03	2026-06-03
psSAR1g [W/Kg]	0.251	0.249
psSAR10g [W/Kg]	0.075	0.072
Power Drift [dB]	0.04	0.12
M2/M1 [%]		75.8
Dist 3dB Peak [mm]		6.6

SAR Pattern

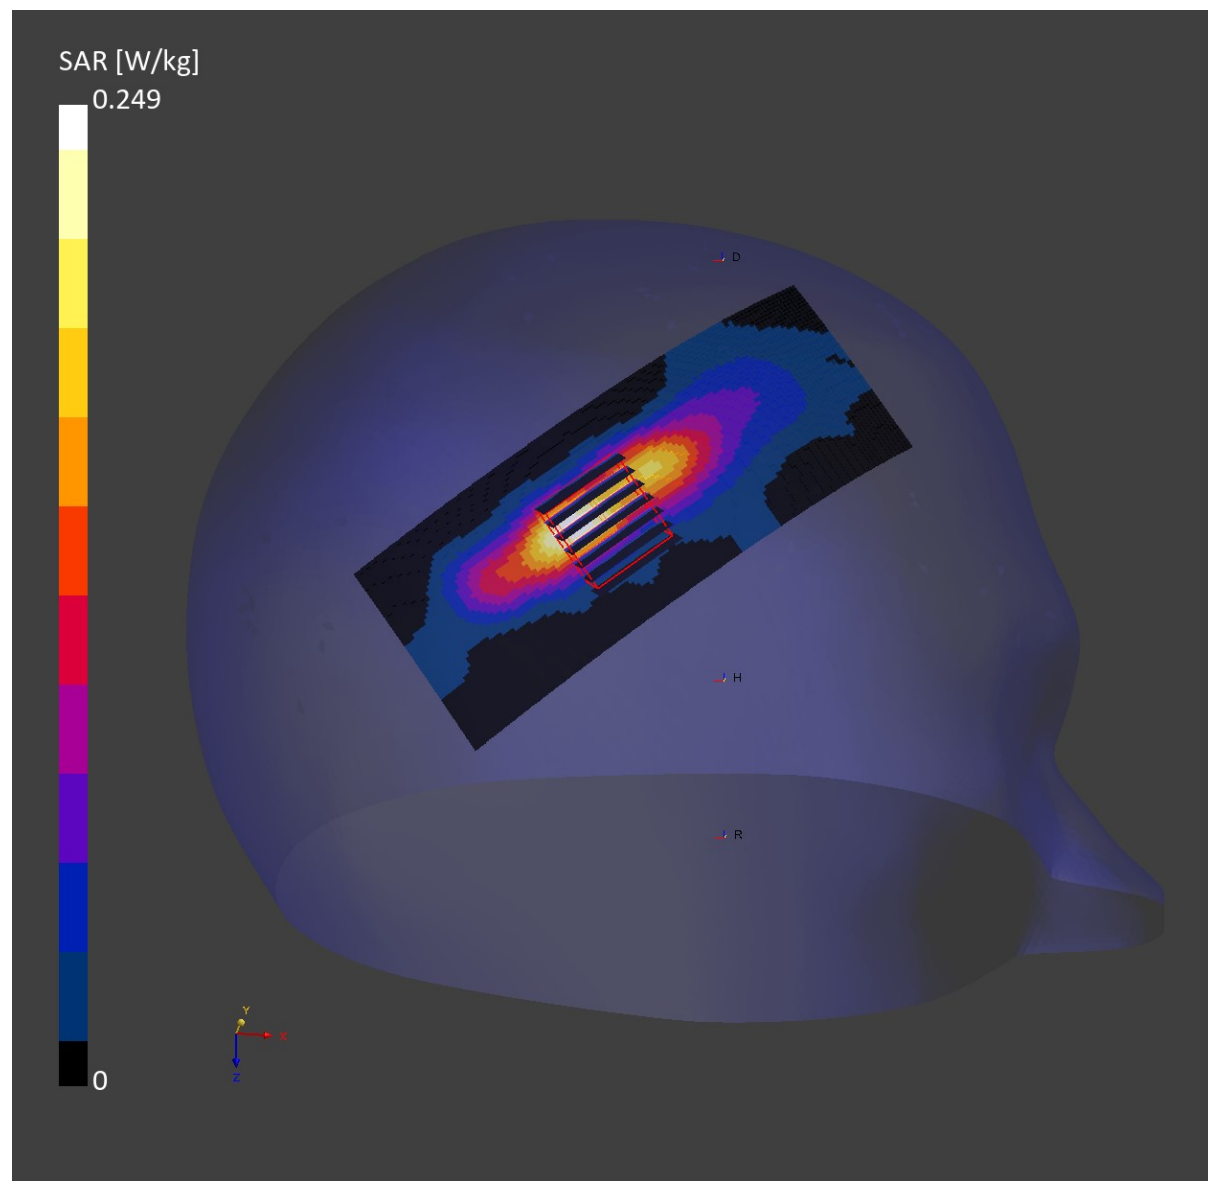

11_WLAN5GHz_802.11ac-VHT80 MCS0_On of the head_Ch155

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	158.2 x 77.9 x 8.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	U-NII 3	WiFi (802.11ac), 10544-	5775.000, 155	5.52	5.31	36.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	120.0 x 60.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Measurement Software		17.0.4.7034
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-06-03	2026-06-03
psSAR1g [W/Kg]	0.161	0.151
psSAR10g [W/Kg]	0.056	0.045
Power Drift [dB]	0.05	0.05
M2/M1 [%]		76.9
Dist 3dB Peak [mm]		6.8

SAR Pattern

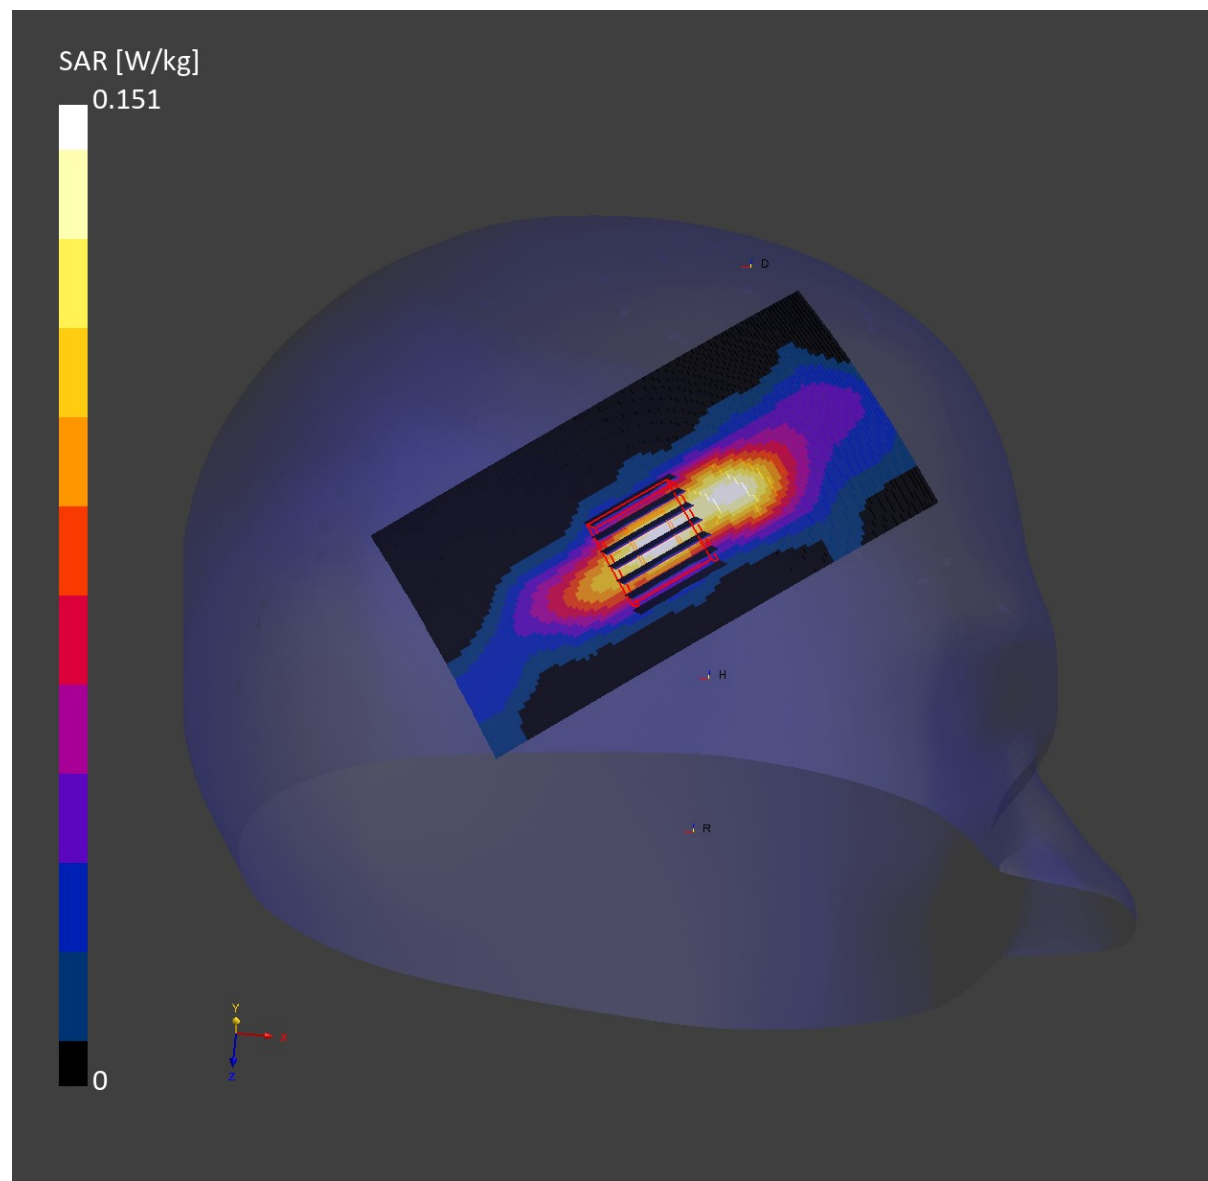

Date: 2026-05-28

13_Bluetooth_DH5 1Mbps_Left Temple Arm Outer Edge Touching Phantom_0mm_Ch0


Communication System: Bluetooth: BR, DH5, GFSK; Frequency: 2402.000 MHz Duty Cycle:1:1.304
 Medium: Head Simulating Liquid Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.69$ S/m; $\epsilon_r = 40.8$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: Bluetooth, 10032-

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.266 W/kg; SAR (10g) = 0.102 W/kg;

Zoom Scan (33.6 mm x 33.6 mm x 31.2 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.5 mm
 Power Drift = -0.05 dB
 SAR (1g) = 0.319 W/kg; SAR (10g) = 0.108 W/kg
 Smallest distance from peaks to all points 3 dB below = 5.9 mm
 Ratio of SAR at M2 to SAR at M1 = 75.3 %

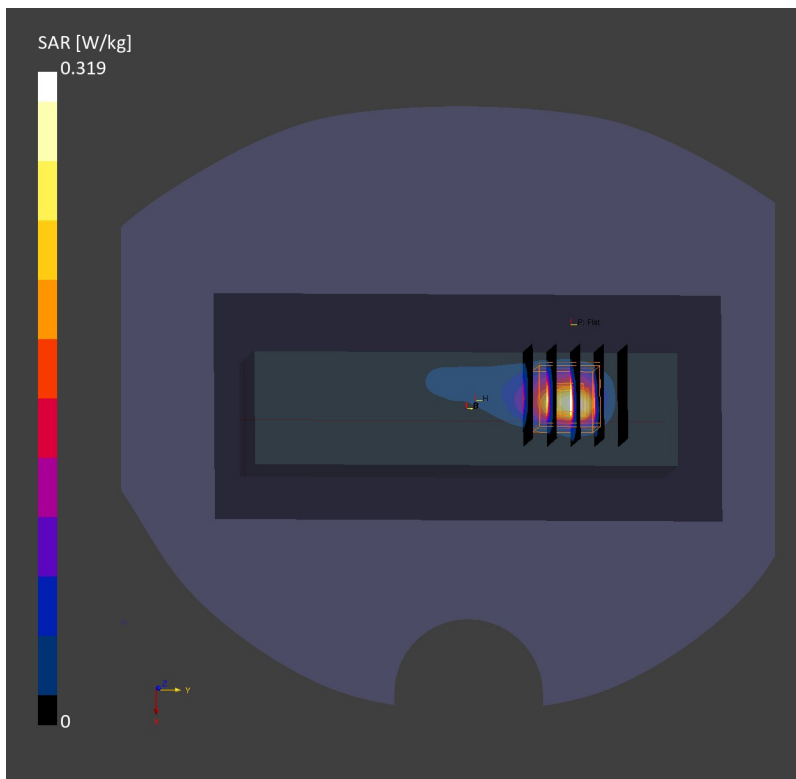

Date: 2026-05-21

14_WLAN2.4GHz_802.11b 1Mbps_Left Temple Arm Outer Edge Touching Phantom_0mm_Ch13

Communication System: WiFi; Frequency: 2472.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 2472.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11b), 10415-

Area Scan (80.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.487 W/kg; SAR (10g) = 0.179 W/kg;


Zoom Scan (32.9 mm x 32.9 mm x 31.2 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.510 W/kg; SAR (10g) = 0.172 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

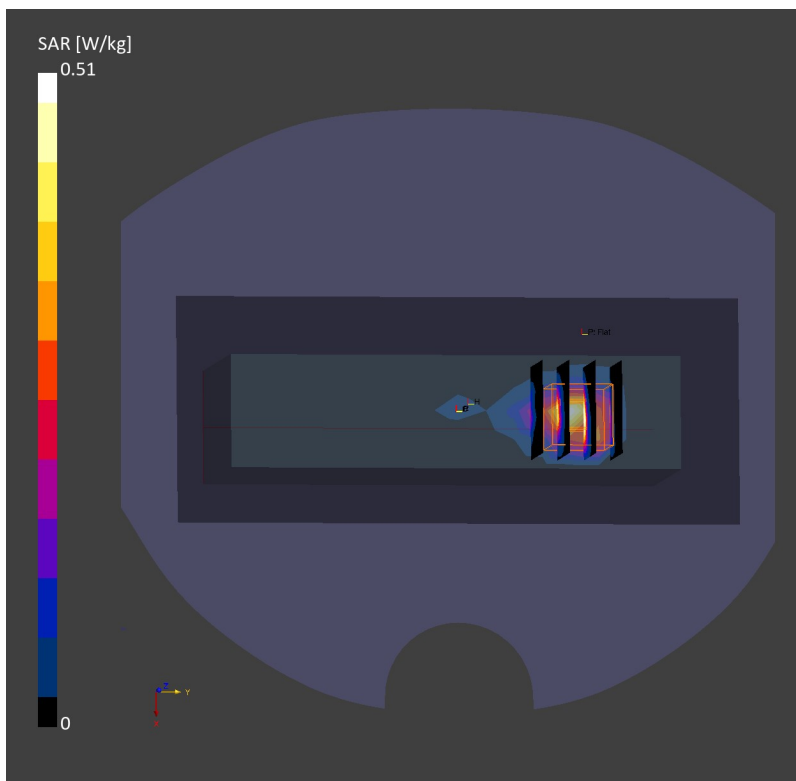

Date: 2026-05-22

15_WLAN5GHz_802.11ac-VHT160 MCS0_Left Temple Arm Outer Edge Touching Phantom_0mm_Ch50

Communication System: WiFi; Frequency: 5250.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.56$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.80, 5.57, 5.56); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10554-

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.187 W/kg; SAR (10g) = 0.050 W/kg;


Zoom Scan (33.8 mm x 31.2 mm x 25.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = -0.19 dB

SAR (1g) = 0.313 W/kg; SAR (10g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.7 %

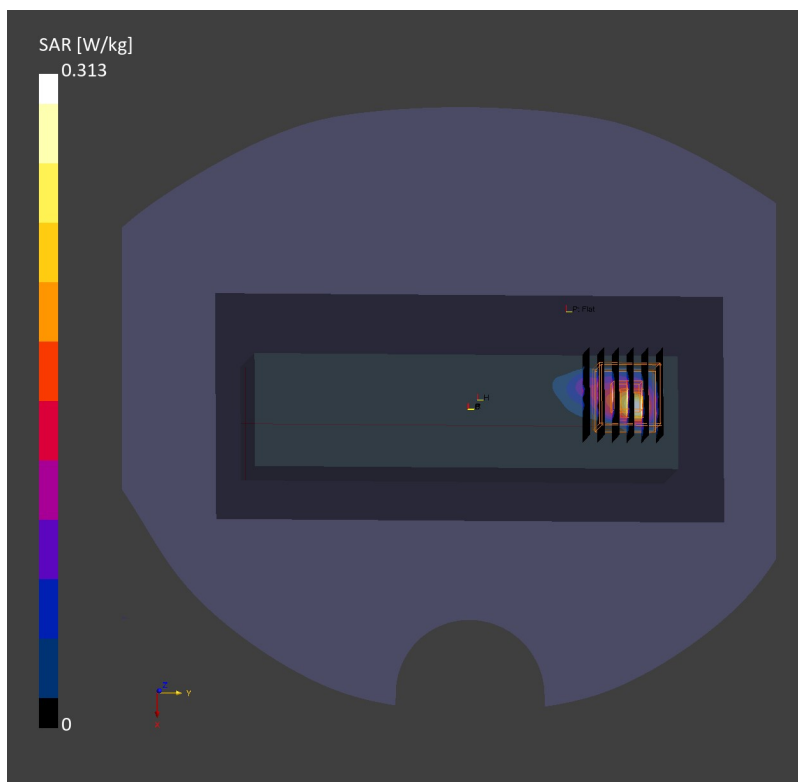

Date: 2026-05-26

16_WLAN5GHz_802.11ac-VHT160 MCS0_Left Temple Arm Outer Edge Touching Phantom_0mm_Ch114

Communication System: WiFi; Frequency: 5570.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5570.000$ MHz; $\sigma = 5.01$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.27, 5.06, 5.05); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10554-

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.109 W/kg; SAR (10g) = 0.025 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 25.0 mm): Measurement Grid: 2.0 mm x 2.0 mm x 1.2 mm

Power Drift = -0.14 dB

SAR (1g) = 0.142 W/kg; SAR (10g) = 0.020 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 71.7 %

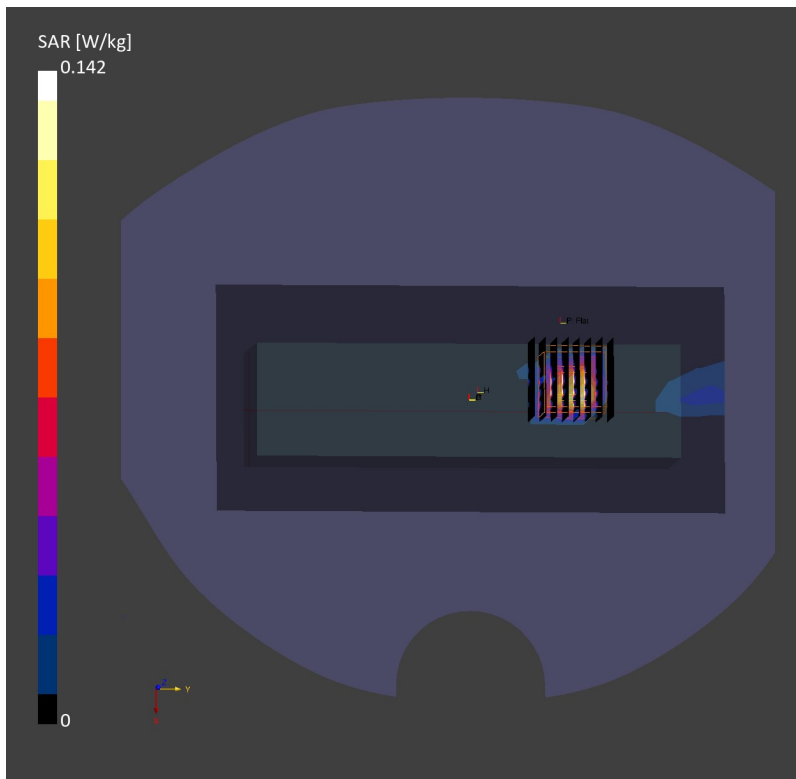

Date: 2026-06-02

17_WLAN5GHz_802.11ac-VHT80 MCS0_Left Temple Arm Outer Edge Touching Phantom_0mm_Ch155

Communication System: WiFi; Frequency: 5775.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.22, 5.02, 5.01); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10544-

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.094 W/kg; SAR (10g) = 0.022 W/kg;


Zoom Scan (25.5 mm x 27.0 mm x 25.0 mm): Measurement Grid: 1.5 mm x 1.5 mm x 1.2 mm

Power Drift = -0.15 dB

SAR (1g) = 0.116 W/kg; SAR (10g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 71.7 %

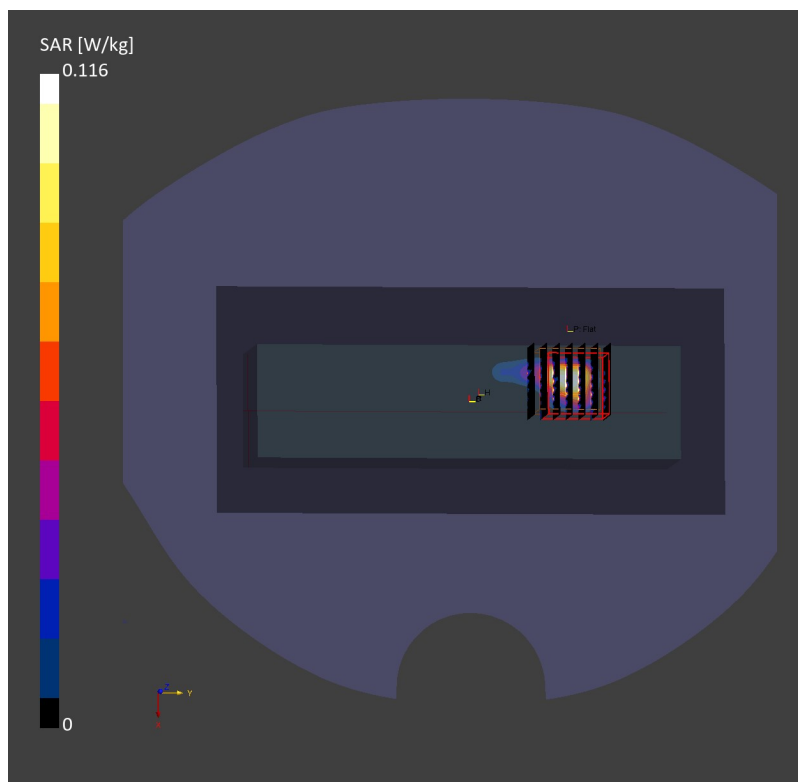

Date: 2026-05-21

19_Bluetooth_DH5 1Mbps_Left Lens Kept 5mm Distance from Phantom_5mm_Ch0


Communication System: Bluetooth: BR, DH5, GFSK; Frequency: 2402.000 MHz Duty Cycle:1:1.304
 Medium: Head Simulating Liquid Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 40.8$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: Bluetooth, 10032-

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.009 W/kg; SAR (10g) = 0.005 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
 Power Drift = 0.09 dB
 SAR (1g) = 0.010 W/kg; SAR (10g) = 0.005 W/kg
 Smallest distance from peaks to all points 3 dB below = 9.0 mm
 Ratio of SAR at M2 to SAR at M1 = 83.3 %

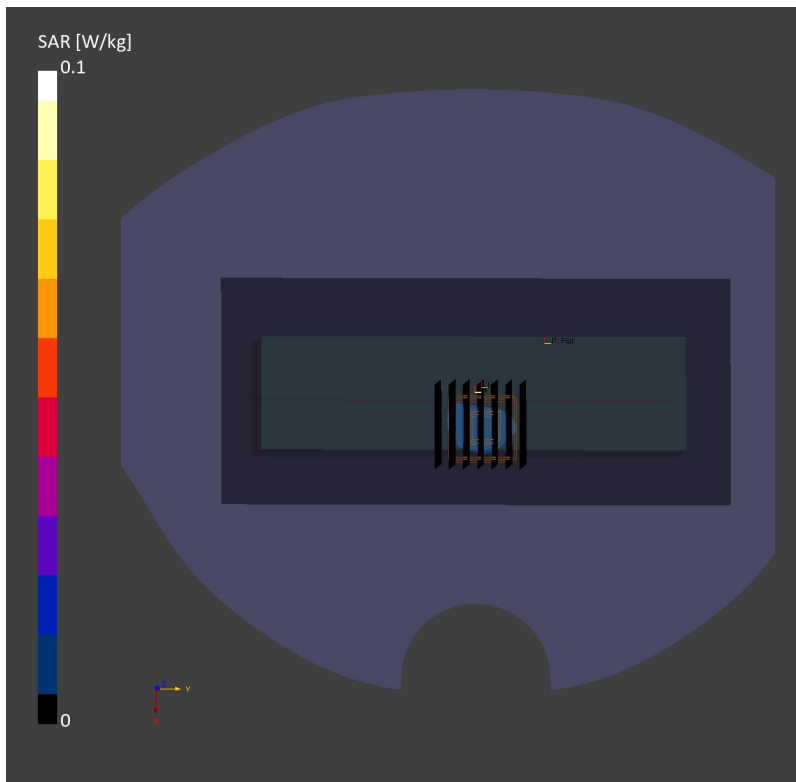

Date: 2026-05-25

20_WLAN2.4GHz_802.11b 1Mbps_Left Lens Kept 5mm Distance from Phantom_5mm_Ch1

Communication System: WiFi; Frequency: 2412.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11b), 10415-

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.019 W/kg; SAR (10g) = 0.01 W/kg;


Zoom Scan (40.0 mm x 45.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.18 dB

SAR (1g) = 0.018 W/kg; SAR (10g) = 0.009 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 85.6 %

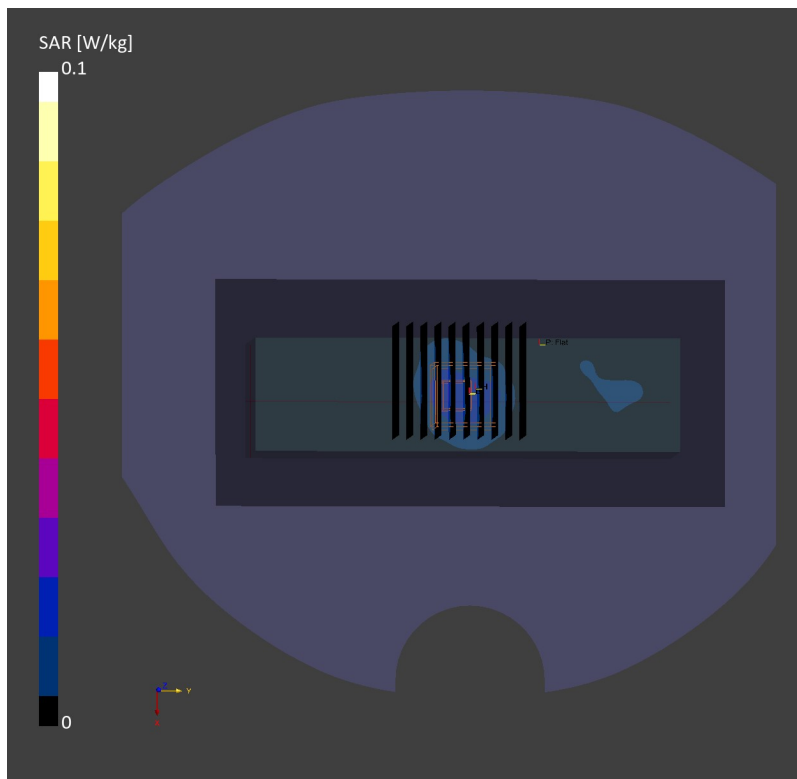

Date: 2026-05-22

21_WLAN5GHz_802.11ac-VHT160 MCS0_Left Lens Kept 5mm Distance from Phantom_5mm_Ch50

Communication System: WiFi; Frequency: 5250.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.56$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.80, 5.57, 5.56); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10554-

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.011 W/kg; SAR (10g) = 0.005 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.009 W/kg; SAR (10g) = 0.003 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 71.1 %

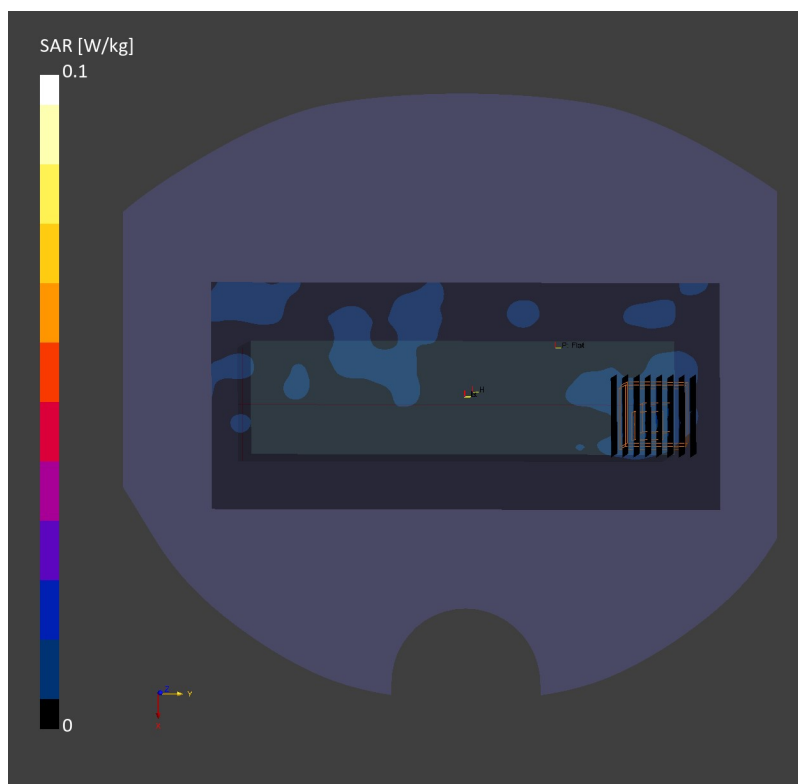

Date: 2026-05-24

22_WLAN5GHz_802.11ac-VHT160 MCS0_Left Lens Kept 5mm Distance from Phantom_5mm_Ch114

Communication System: WiFi; Frequency: 5570.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.92$ S/m; $\epsilon_r = 35.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.27, 5.06, 5.05); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10554-

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.004 W/kg; SAR (10g) = 0.001 W/kg;


Zoom Scan (32.2 mm x 32.2 mm x 25.0 mm): Measurement Grid: 2.3 mm x 2.3 mm x 1.2 mm

Power Drift = 0.08 dB

SAR (1g) = 0.005 W/kg; SAR (10g) = 0.001 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

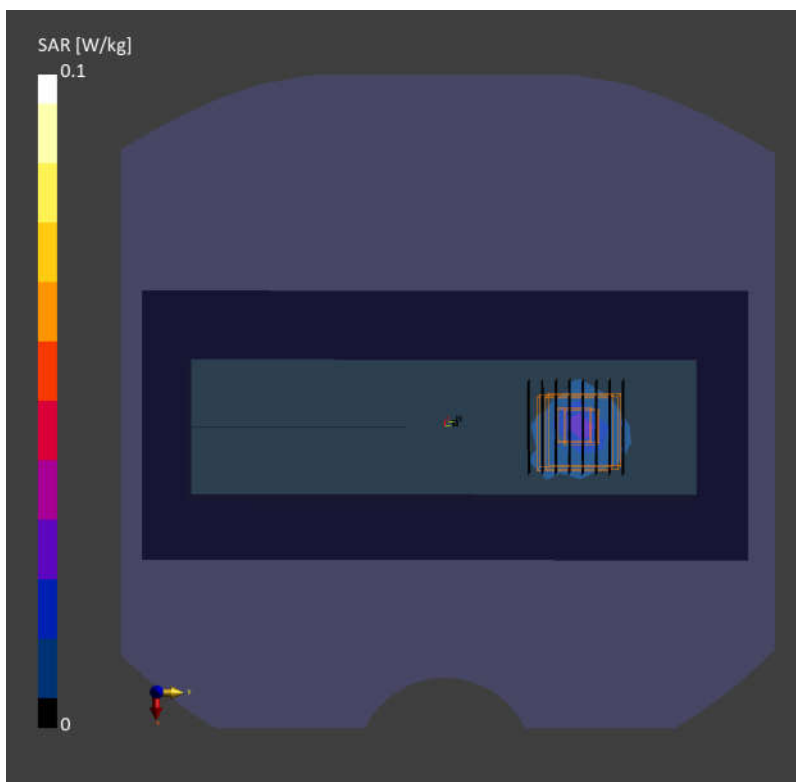

Date: 2026-05-26

23_WLAN5GHz_802.11ac-VHT80 MCS0_Left Lens Kept 5mm Distance from Phantom_5mm_Ch155

Communication System: WiFi; Frequency: 5775.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 34.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.22, 5.02, 5.01); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10544-

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.007 W/kg; SAR (10g) = 0.001 W/kg;


Zoom Scan (37.4 mm x 37.4 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 0.007 W/kg; SAR (10g) = 0.001 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.0 %

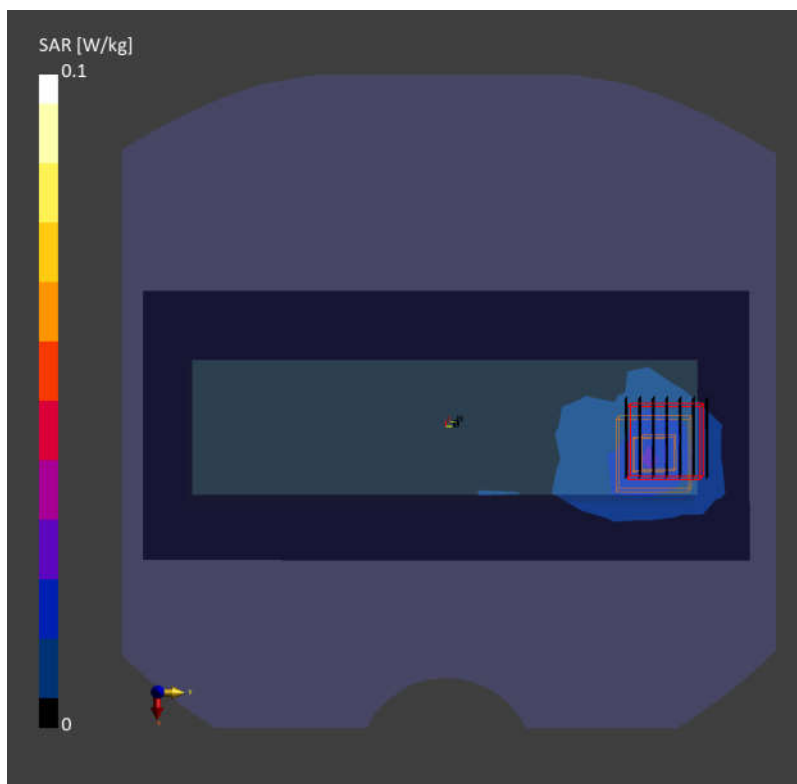

Date: 2026-05-28

25_Bluetooth_DH5 1Mbps_Right Side_5mm_Ch0

Communication System: Bluetooth: BR, DH5, GFSK; Frequency: 2402.000 MHz Duty Cycle:1:1.304
 Medium: Head Simulating Liquid Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.69$ S/m; $\epsilon_r = 40.8$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: Bluetooth, 10032-

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.041 W/kg; SAR (10g) = 0.018 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.041 W/kg; SAR (10g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.8 %

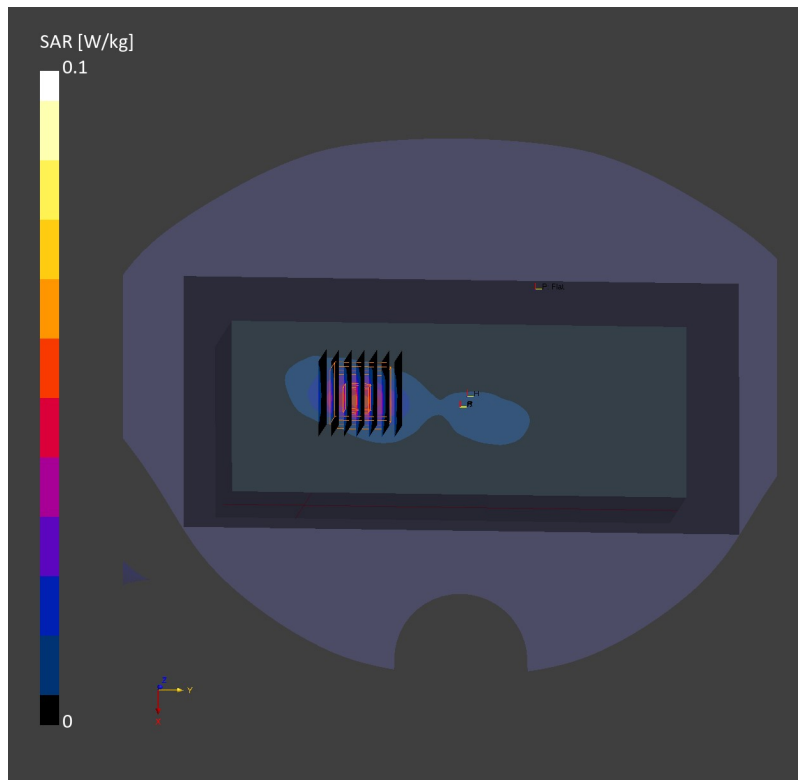

Date: 2026-05-28

26_WLAN2.4GHz_802.11b 1Mbps_Right Side_5mm_Ch6

Communication System: WiFi; Frequency: 2437.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11b), 10415-

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.283 W/kg; SAR (10g) = 0.122 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.297 W/kg; SAR (10g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

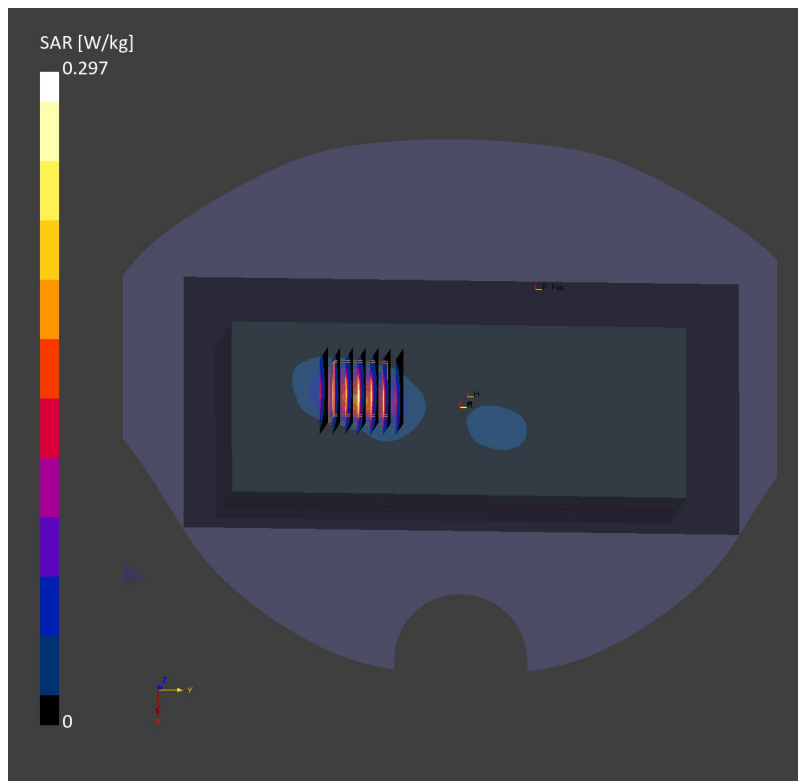

Date: 2026-05-22

27_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_5mm_Ch58

Communication System: WiFi; Frequency: 5290.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5290.000$ MHz; $\sigma = 4.62$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.80, 5.57, 5.56); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10544-

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.231 W/kg; SAR (10g) = 0.095 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.258 W/kg; SAR (10g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.9 %

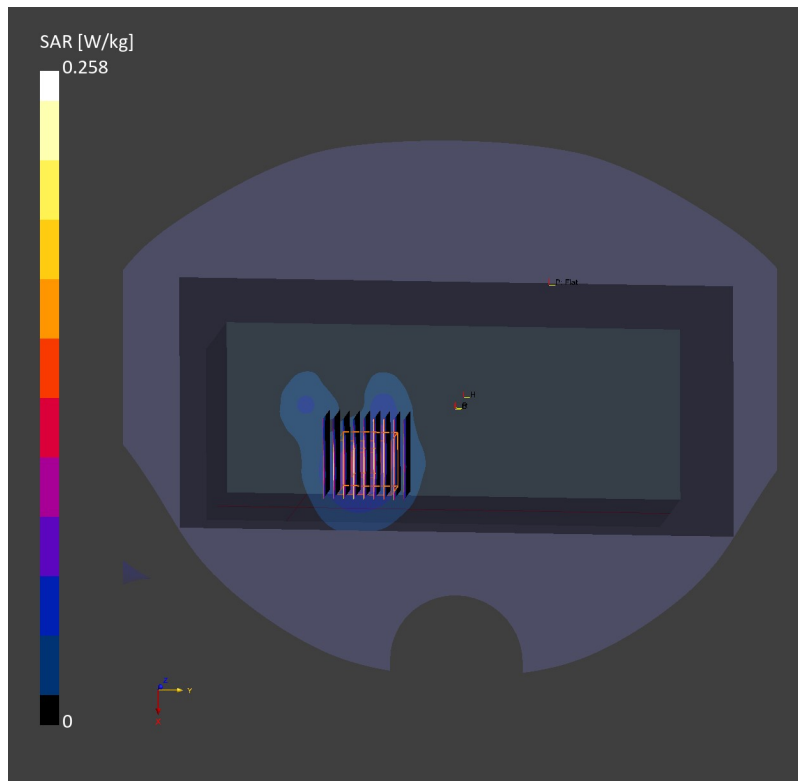

Date: 2026-05-26

28_WLAN5GHz_802.11ac-VHT160 MCS0_Right Side_5mm_Ch114

Communication System: WiFi; Frequency: 5570.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5570.000$ MHz; $\sigma = 5.01$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.27, 5.06, 5.05); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10554-

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.179 W/kg; SAR (10g) = 0.074 W/kg;


Zoom Scan (40.0 mm x 40.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.177 W/kg; SAR (10g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.1 %

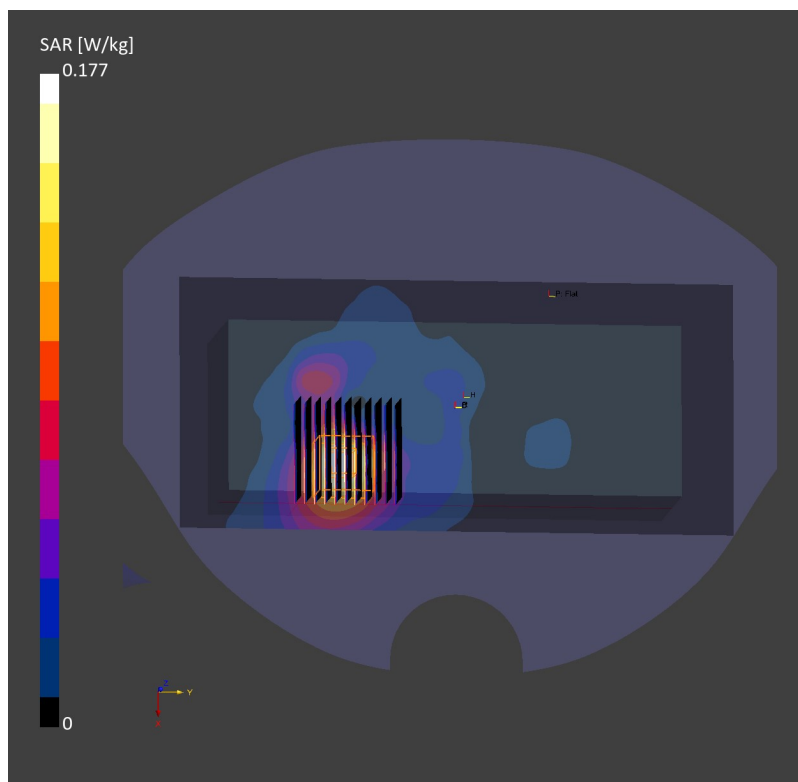

Date: 2026-06-02

29_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_5mm_Ch155

Communication System: WiFi; Frequency: 5775.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.22, 5.02, 5.01); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10544-

Area Scan (100.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.176 W/kg; SAR (10g) = 0.073 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.182 W/kg; SAR (10g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 58.9 %

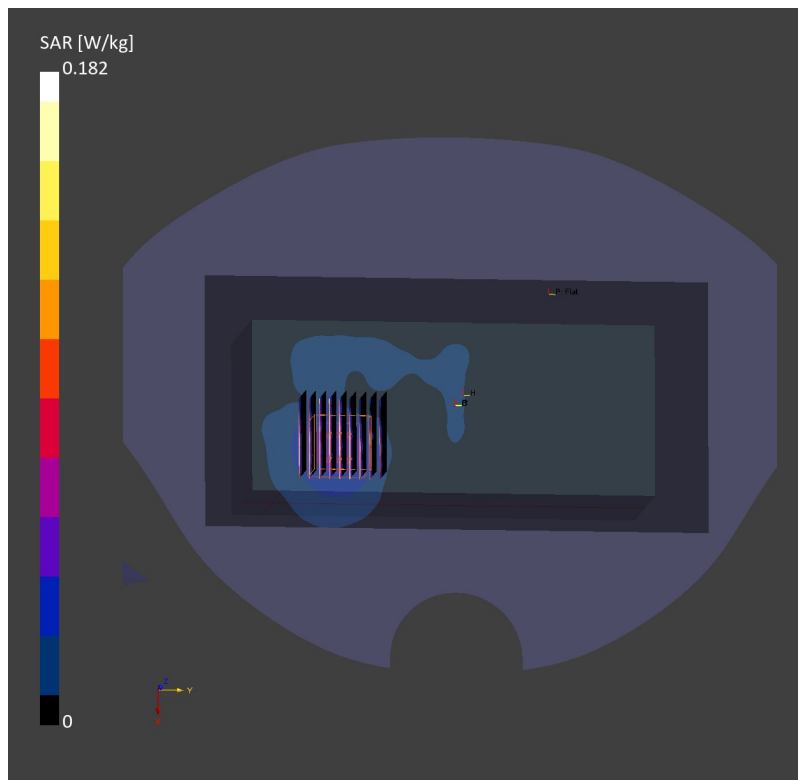

Date: 2026-05-28

31_Bluetooth_DH5 1Mbps_Right Side_0mm_Ch0

Communication System: Bluetooth: BR, DH5, GFSK; Frequency: 2402.000 MHz Duty Cycle:1:1.304
 Medium: Head Simulating Liquid Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.69$ S/m; $\epsilon_r = 40.8$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: Bluetooth, 10032-

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.142 W/kg; SAR (10g) = 0.052 W/kg;


Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.149 W/kg; SAR (10g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 77.3 %

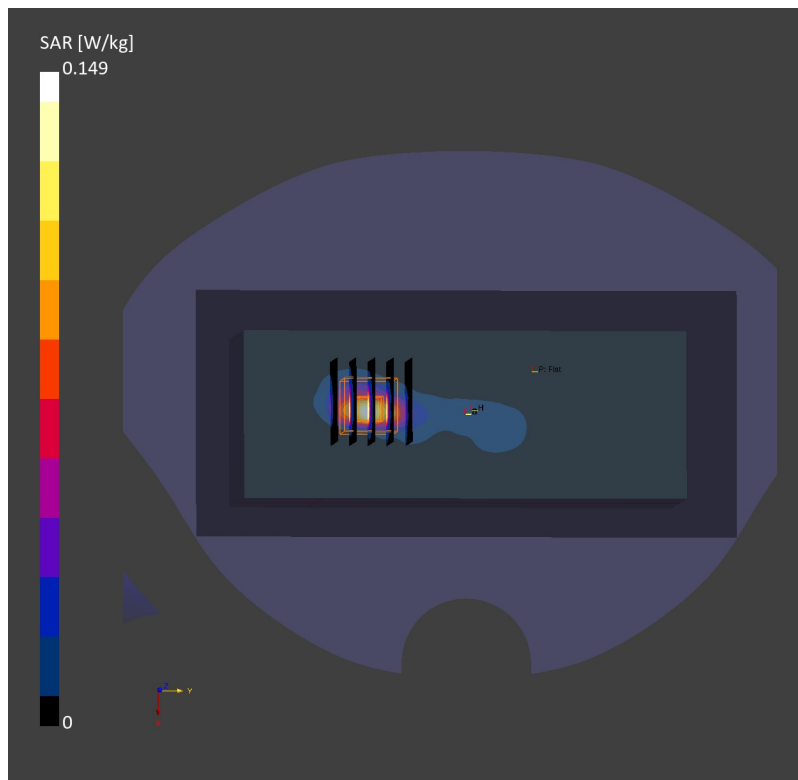

Date: 2026-05-25

32_WLAN2.4GHz_802.11b 1Mbps_Right Side_0mm_Ch11

Communication System: WiFi; Frequency: 2462.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11b), 10415-

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.987 W/kg; SAR (10g) = 0.357 W/kg;


Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.6 %

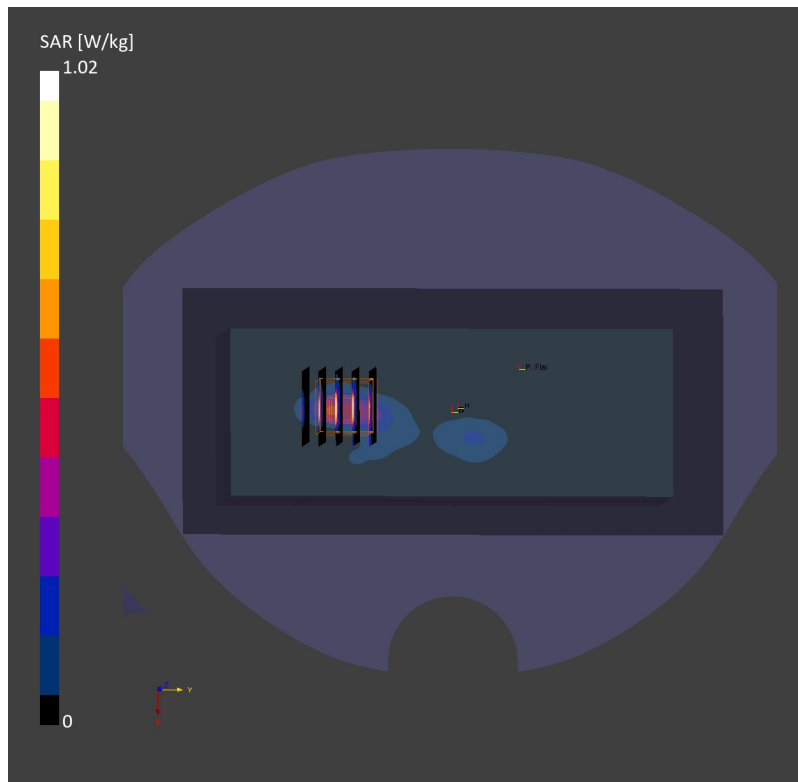

Date: 2026-05-22

33_WLAN5GHz_802.11ac-VHT80 MCS0_Back_0mm_Ch58

Communication System: WiFi; Frequency: 5290.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5290.000$ MHz; $\sigma = 4.62$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.80, 5.57, 5.56); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10544-

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.602 W/kg; SAR (10g) = 0.219 W/kg;


Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.16 dB

SAR (1g) = 0.548 W/kg; SAR (10g) = 0.187 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 65.2 %

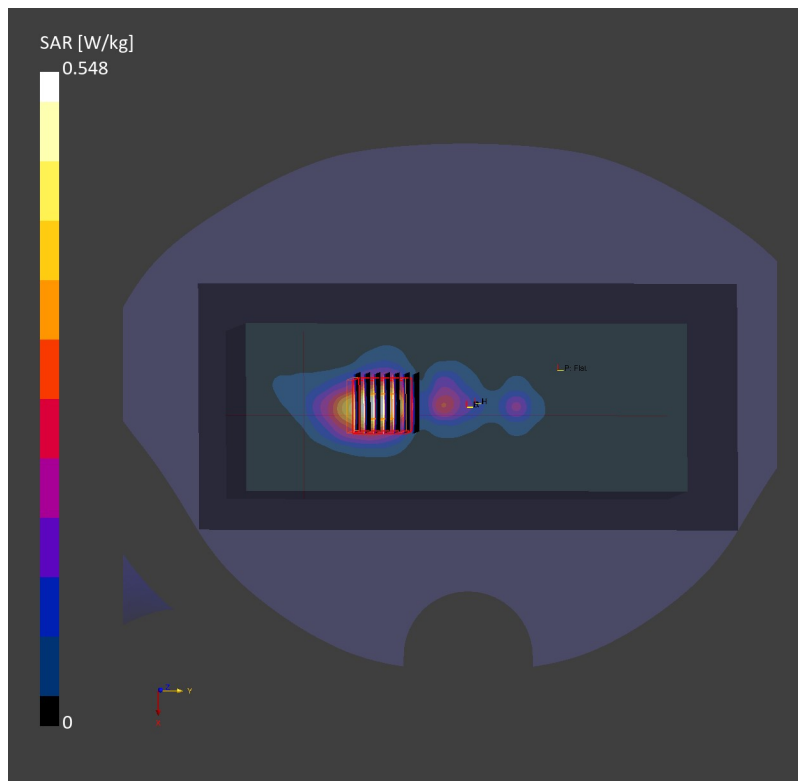

Date: 2026-05-26

34_WLAN5GHz_802.11ac-VHT160 MCS0_Back_0mm_Ch114

Communication System: WiFi; Frequency: 5570.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5570.000$ MHz; $\sigma = 5.01$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.27, 5.06, 5.05); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10554-

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.309 W/kg;


Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.9 %

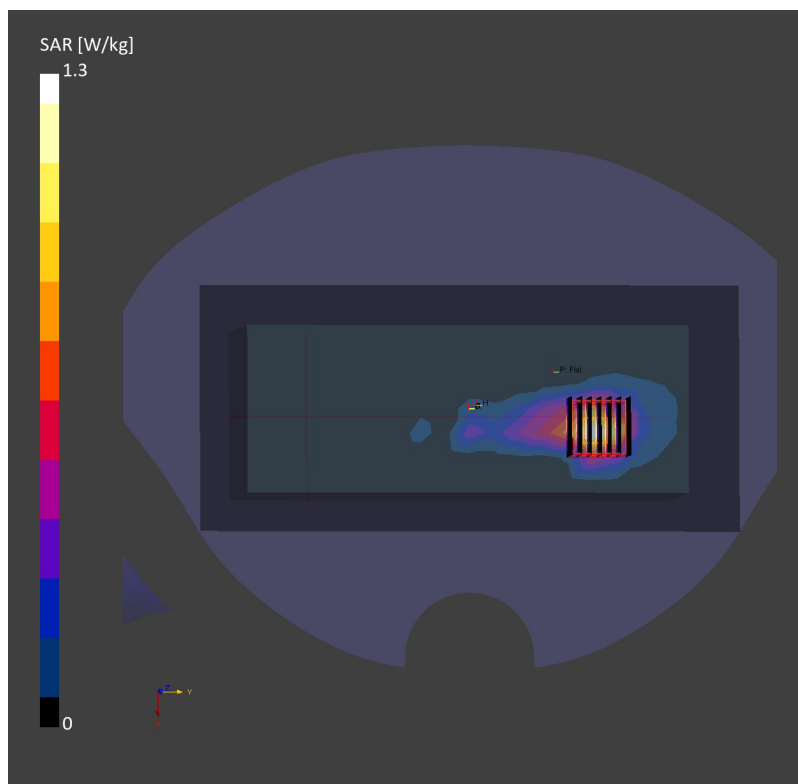

Date: 2026-06-03

35_WLAN5GHz_802.11ac-VHT80 MCS0_Back_0mm_Ch155

Communication System: WiFi; Frequency: 5775.000 MHz Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.22, 5.02, 5.01); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 17.0.4.7034
- UID: WiFi (802.11ac), 10544-

Area Scan (100.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.406 W/kg; SAR (10g) = 0.158 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.446 W/kg; SAR (10g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.0 %

