


K-2 Difference statement

K-2 modify:

1. Appearance change:

There are no changes in the material, only the appearance changes: as shown below


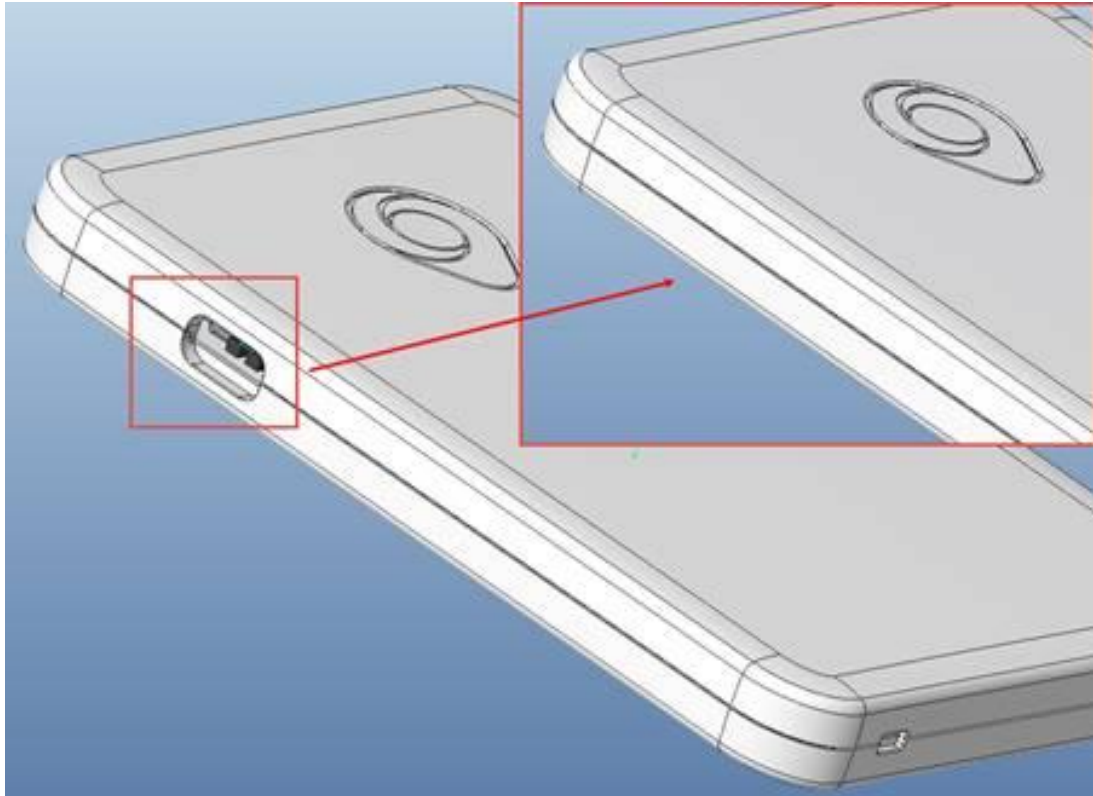


2. Modify PCBA(Modify K-2 For 0.2C PCB)



The following modifications and RF signals have no effect, that is, U6 (motion sensing chip) is removed, R18 is removed, D3 is removed, R32 & R24 is $0\,\Omega$, and R35, R36, R37, R38 are added, and R31, R33, R34, R6, R25 are added. , R27 to confirm the hardware version

1. Added 3 resistors to confirm the version,R31,R33,R34,



1	WT2N	Hardware Ver. Control	Add pull low resistance to check HW Ver. MTK U402 I2S3_WS(G25), I2S3_BCK(F24),I2S3_DO(D25), PCB version,PULL HIGH100K Ω,VIO18_PMU, with PULL LOW 100K Ω to GND Actually the pieces are: U402_I2S3_WS(G25),PULL LOW U402_I2S3_BCK(F24),PULL LOW U402_I2S3_DO(D25),PULL LOW
---	------	-----------------------	--

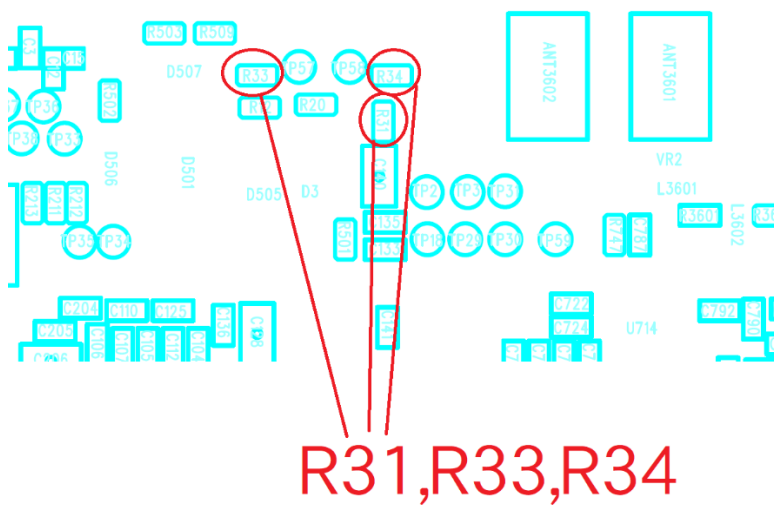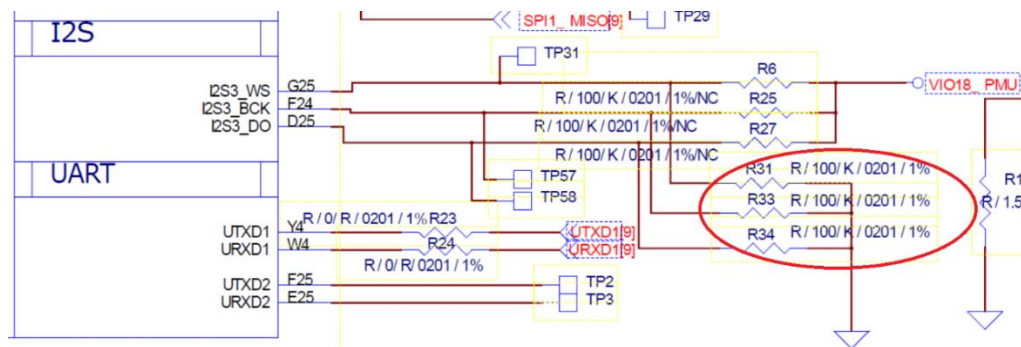

2	WT2N	Power Leakage When Off Siwitch	Add pull low resistance to shut down VBATT power Because it cannot be completely shut down, it must be 1.Q3' s G PIN parallel $10K\Omega$ to GND 2.Q160' s G PIN parallel $10K\Omega$ to GND 3.Q5' s G PIN parallel $10K\Omega$ to GND 4.Q7' s G PIN parallel $10K\Omega$ to GND
---	------	-----------------------------------	--

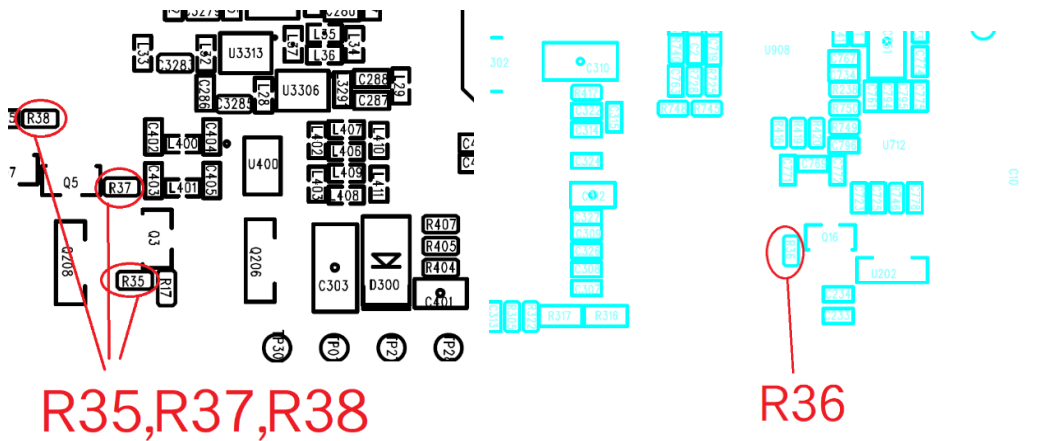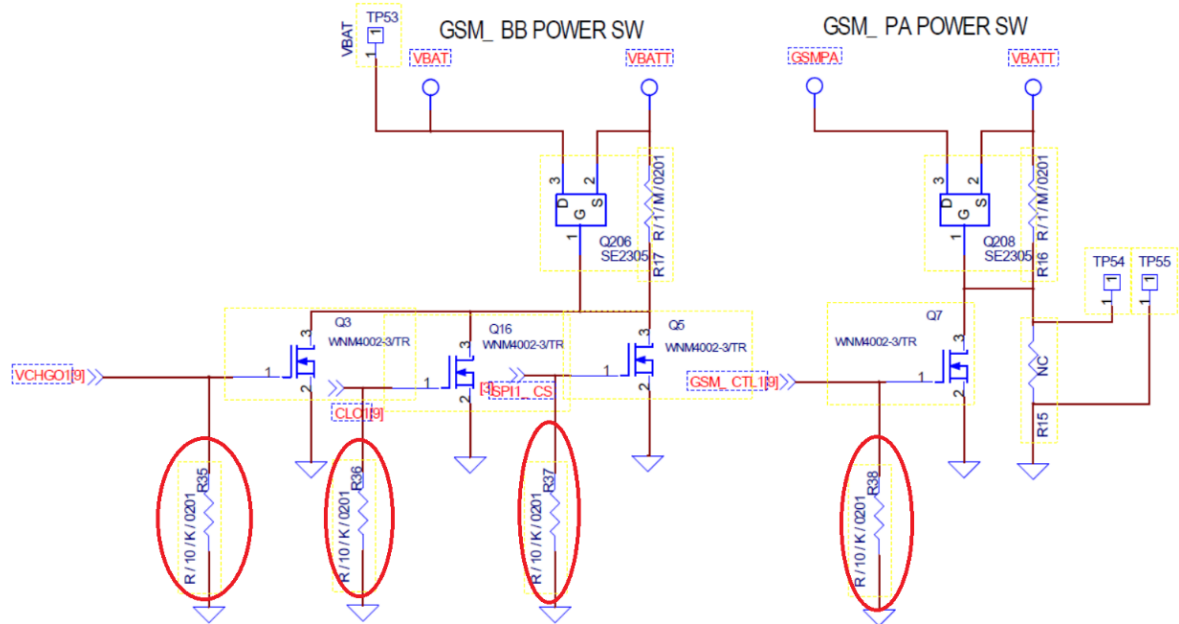


3	WT2N	UART Slew Rate	Resistance value change to 0Ω For UART R23 and R24 Change the resistance to 0Ω
---	------	----------------	---

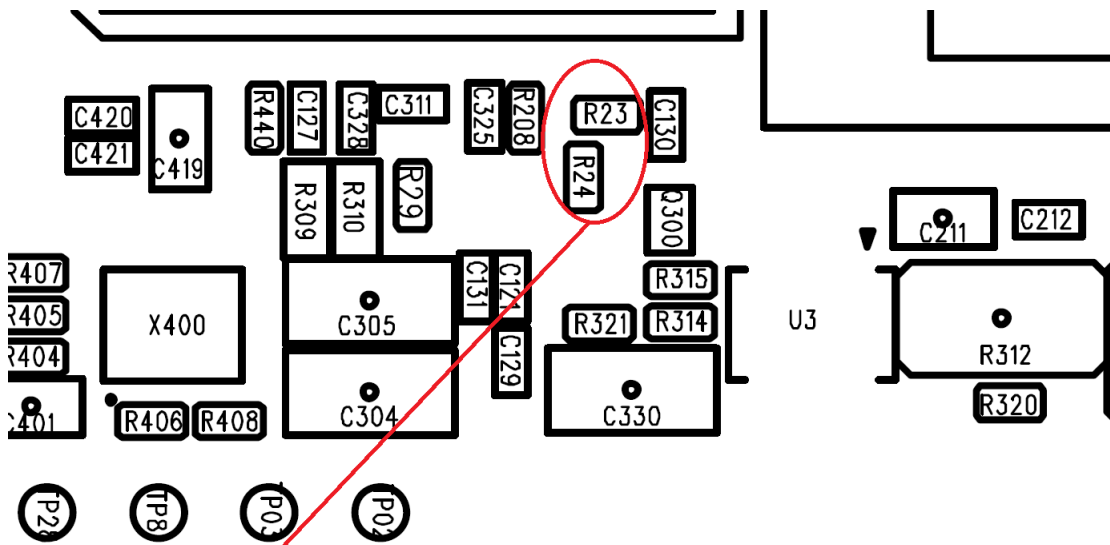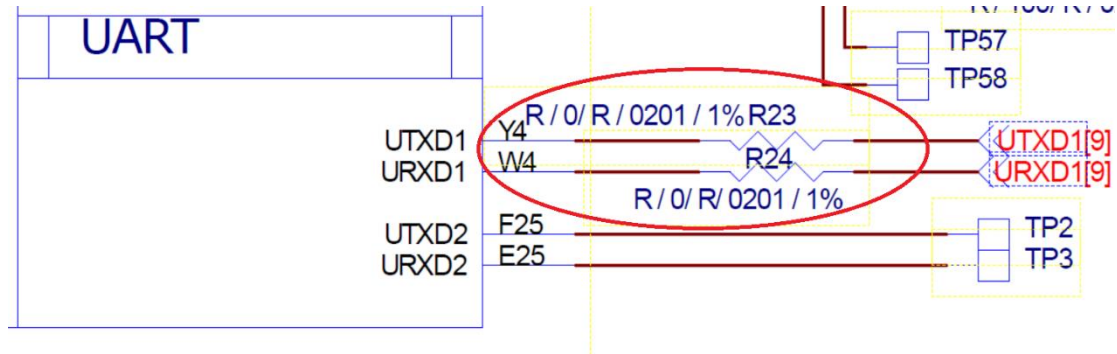


$R23=0\Omega, R24=0\Omega$

5	WT2N	4th LED removed	Take off D3
---	------	-----------------	-------------

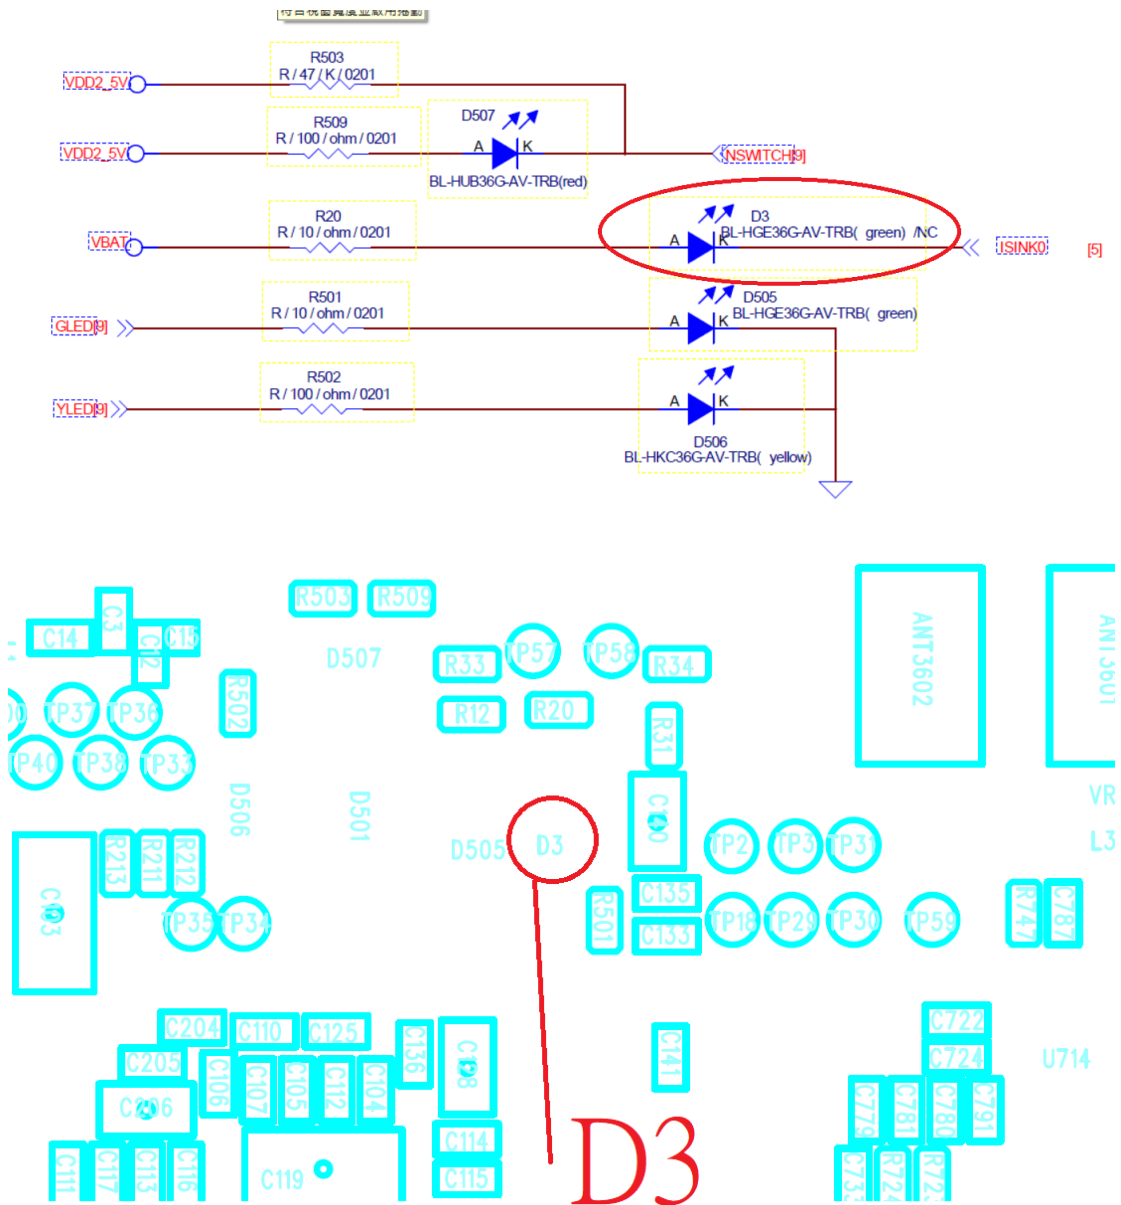

6	WT2N	Accelerometer removed	Take off U6
---	------	-----------------------	-------------

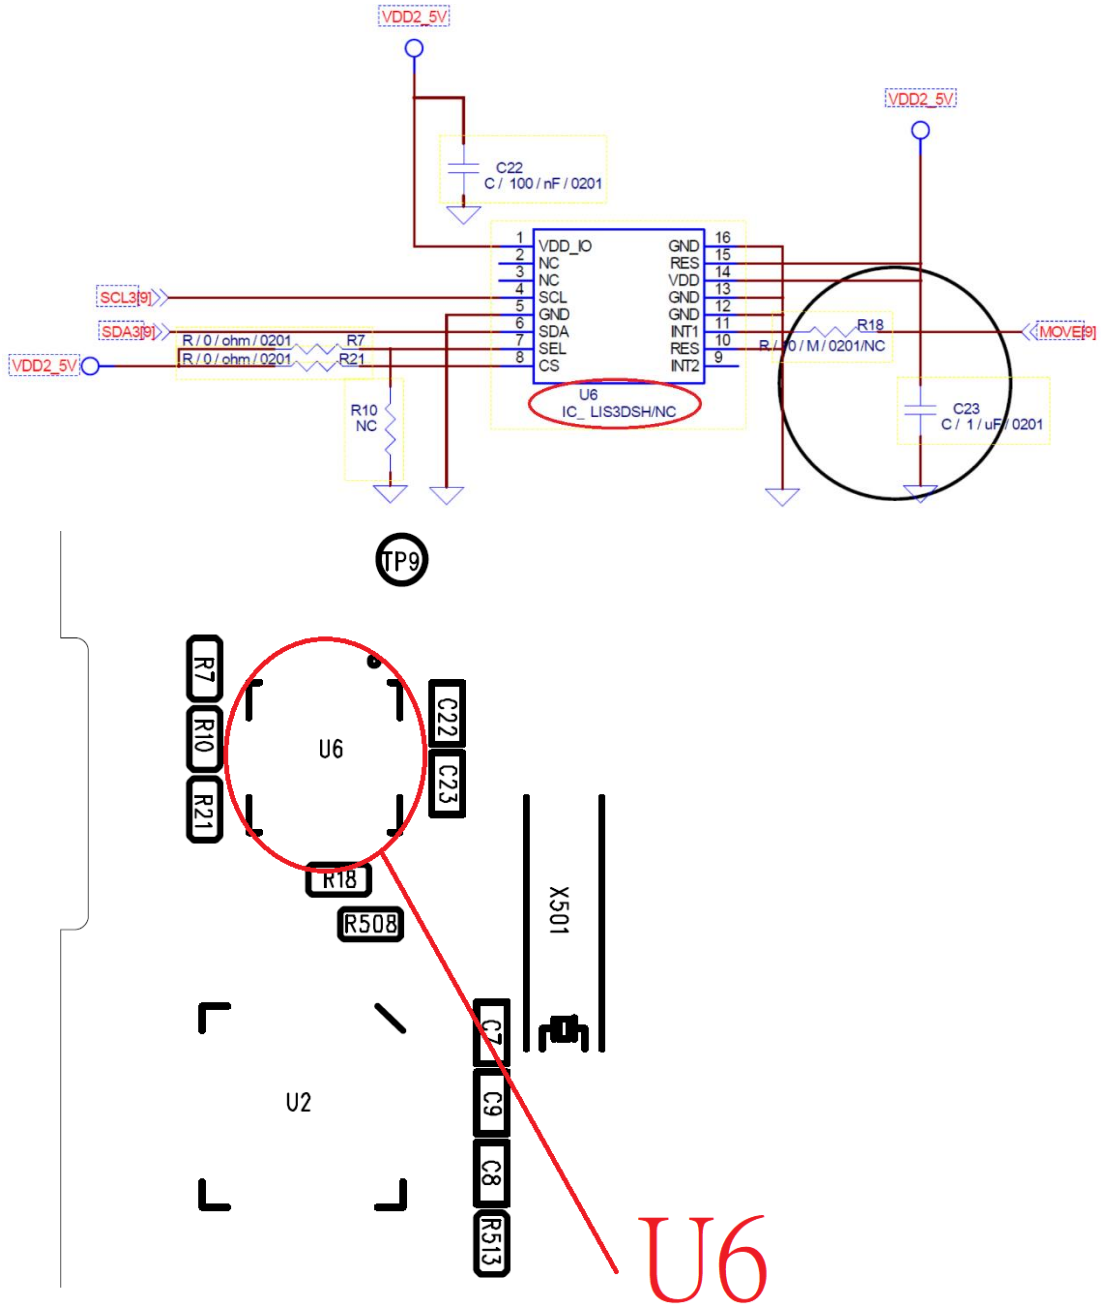

Kizy Tracking SA

rue de la Maladière 71C, 2000 Neuchatel, Switzerland

RF: No Change

HW: 6 items As above

SW: No Change

Company Name: Kizy Tracking SA

Signature: *Bell Chang*

Date: 2019/03/22