

FCC Part 15, Subpart B, Class B(sDoC)

TEST REPORT

The Gem Group, Inc.

PRISM 4 IN 1 USB TYPE C HUB

Test Model: 100501-001B

Prepared for : The Gem Group, Inc.
Address : 9 International Way, Lawrence, MA 01843, USA

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Shajing Street, Baoan District, Shenzhen, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com


Date of receipt of test sample : March 27, 2020
Number of tested samples : 1
Serial number : Prototype
Date of Test : March 27, 2020 ~ March 30, 2020
Date of Report : April 01, 2020

FCC TEST REPORT


FCC Part 15, Subpart B, Class B(sDoC)

Report Reference No. : LCS200319022AEA**Date Of Issue : April 01, 2020****Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.****Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China****Testing Location/ Procedure... : Full application of Harmonised standards ■**
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name..... : The Gem Group, Inc.****Address : 9 International Way, Lawrence, MA 01843, USA****Test Specification****Standard : FCC Part 15, Subpart B, Class B(sDoC), ANSI C63.4 -2014****Test Report Form No..... : LCSEMC-1.0****TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.****Master TRF..... : Dated 2011-03****SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.**


This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : PRISM 4 IN 1 USB TYPE C HUB**Trade Mark : Gemline****Test Model..... : 100501-001B****Ratings : Input: DC 5V, 0.9A****Result : Positive****Compiled by:**

Ray Yang / File administrators

Supervised by:

Jin Wang / Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT**Test Report No. : LCS200319022AEA**April 01, 2020

Date of issue

Test Model : 100501-001B

EUT..... : PRISM 4 IN 1 USB TYPE C HUB

Applicant..... : The Gem Group, Inc.

Address..... : 9 International Way, Lawrence, MA 01843, USA

Telephone..... : /

Fax..... : /

Manufacturer..... : Dongguan Harmony Electronic Technology Co., LtdAddress..... : Shuibe industrial Zone,Hongyun Road,shuibe Industrial
Park,Shipai Town,Dongguan

Telephone..... : /

Fax..... : /

Factory..... : /

Address..... : /

Telephone..... : /

Fax..... : /

Test Result according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	April 01, 2020	Initial Issue	Gavin Liang

TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results	6
2. GENERAL INFORMATION	7
2.1. Description of Device (EUT)	7
2.2. Support Equipment List.....	7
2.3. Description of Test Facility	7
2.4. Statement of the Measurement Uncertainty	8
2.5. Measurement Uncertainty.....	8
3. TEST RESULTS	9
3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT	9
3.2. Radiated emission Measurement	13
4. TEST SETUP PHOTOGRAPHS OF EUT	17
5. EXTERIOR PHOTOGRAPHS OF THE EUT	18
6. INTERIOR PHOTOGRAPHS OF THE EUT.....	19

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC Part 15, Subpart B, Class B(sDoC), ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC Part 15, Subpart B, Class B(sDoC), ANSI C63.4 -2014	Class B	PASS
N/A is an abbreviation for Not Applicable.			

Test mode:

Mode 1	Data Transmission	Record
--------	-------------------	--------

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : PRISM 4 IN 1 USB TYPE C HUB

Trade Mark : Gemline

Test Model : 100501-001B

Power Supply : Input: DC 5V, 0.9A

Highest internal frequency (Fx)	Highest measured frequency
Fx ≤ 108 MHz	1 GHz
108 MHz < Fx ≤ 500 MHz	2 GHz
500 MHz < Fx ≤ 1 GHz	5 GHz
Fx > 1 GHz	5 × Fx up to a maximum of 6 GHz
NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies. Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz.	

2.2. Support Equipment List

Name	Manufacturers	M/N	S/N
ADAPTER for Notebook	dell	ADLX65YCC3A	--
Notebook	dell	Optiplex 380 MT	2YK643X

2.3. Description of Test Facility

Site Description

EMC Lab. : FCC Registration Number is 254912.

Industry Canada Registration Number is 9642A.

ESMD Registration Number is ARCB0108.

UL Registration Number is 100571-492.

TUV SUD Registration Number is SCN1081.

TUV RH Registration Number is UA 50296516-001.

NVLAP Registration Code is 600167-0.

2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.5. Measurement Uncertainty

Test	Parameters	Expanded Uncertainty (U _{lab})	Expanded Uncertainty (U _{cispr})
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB

☐1 ☐Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

☐2 ☐The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

3. TEST RESULTS


3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Software	EZ	EZ-EMC	/	N/A
2	EMI Test Receiver	R&S	ESPI	101840	2019-06-11
3	Artificial Mains	R&S	ENV216	101288	2019-06-12
4	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2019-06-11

3.1.2. Block Diagram of Test Setup

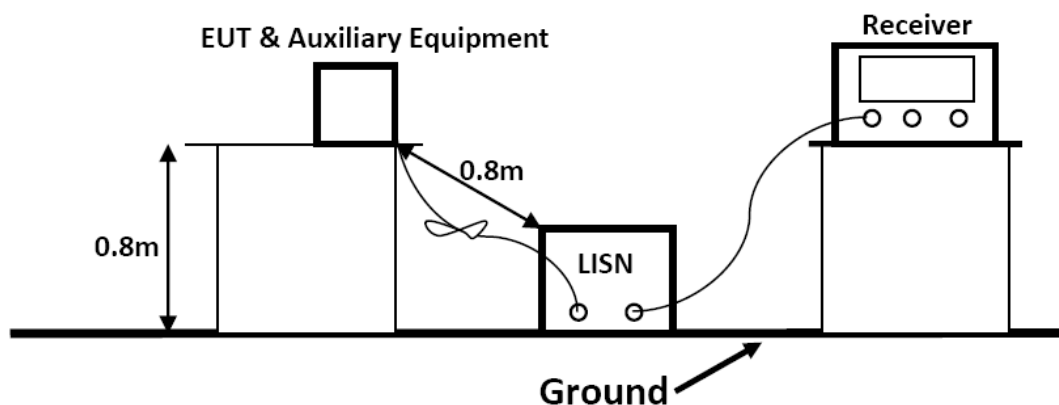

3.1.3. Test Standard

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dB μ V)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.1.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

3.1.5.Operating Condition of EUT

3.1.5.1.Setup the EUT as shown on Section 3.1.2

3.1.5.2.Turn on the power of all equipments.

3.1.5.3.Let the EUT work in measuring Mode 1 and measure it.

3.1.6.Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.


The frequency range from 150kHz to 30MHz is investigated

3.1.7.Test Results

PASS.

The test result please refer to the next page.

Test Model	100501-001B	Test Mode	Mode 1
Environmental Conditions	23.5℃, 53.1% RH	Test Engineer	David Luo
Pol	Line	Test Voltage	AC 120V/60Hz

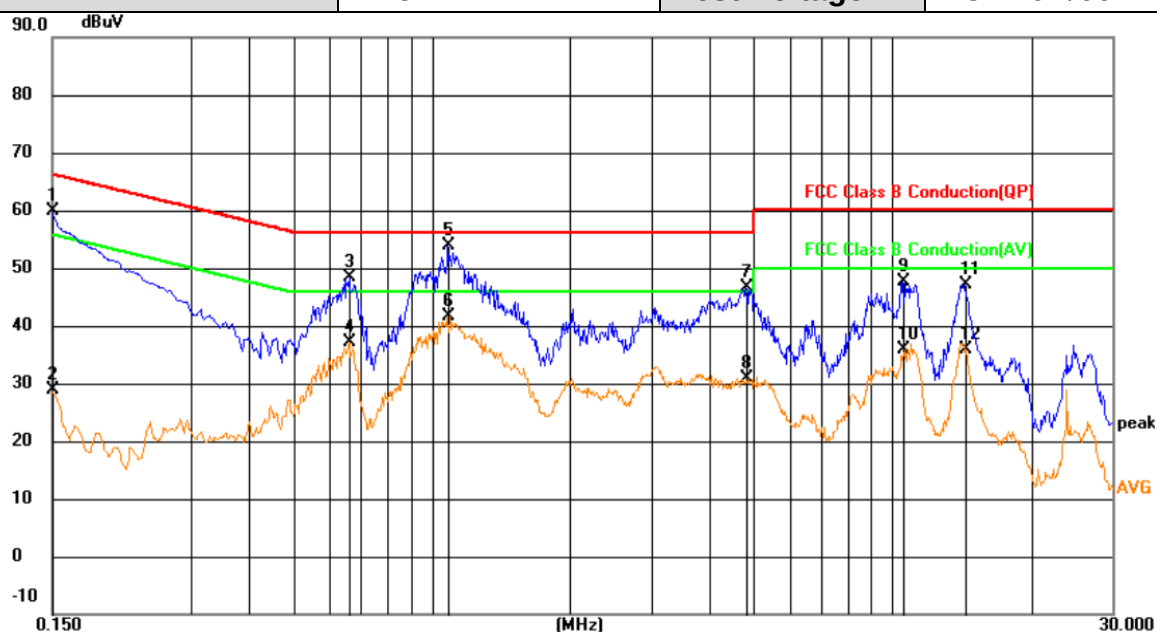

Site LAB

Phase: L1

Temperature: 23.5


Limit: FCC Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 53.1 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	40.72	19.14	59.86	66.00	-6.14	QP	
2		0.1500	9.75	19.14	28.89	56.00	-27.11	AVG	
3		0.6630	29.12	19.24	48.36	56.00	-7.64	QP	
4		0.6630	17.82	19.24	37.06	46.00	-8.94	AVG	
5	*	1.0859	34.50	19.26	53.76	56.00	-2.24	QP	
6		1.0859	22.27	19.26	41.53	46.00	-4.47	AVG	
7		4.8165	27.10	19.49	46.59	56.00	-9.41	QP	
8		4.8165	11.43	19.49	30.92	46.00	-15.08	AVG	
9		10.5450	27.90	19.74	47.64	60.00	-12.36	QP	
10		10.5450	16.20	19.74	35.94	50.00	-14.06	AVG	
11		14.4375	27.12	20.09	47.21	60.00	-12.79	QP	
12		14.4375	15.85	20.09	35.94	50.00	-14.06	AVG	

Test Model	100501-001B	Test Mode	Mode 1
Environmental Conditions	23.5℃, 53.1% RH	Test Engineer	David Luo
Pol	Neutral	Test Voltage	AC 120V/60Hz

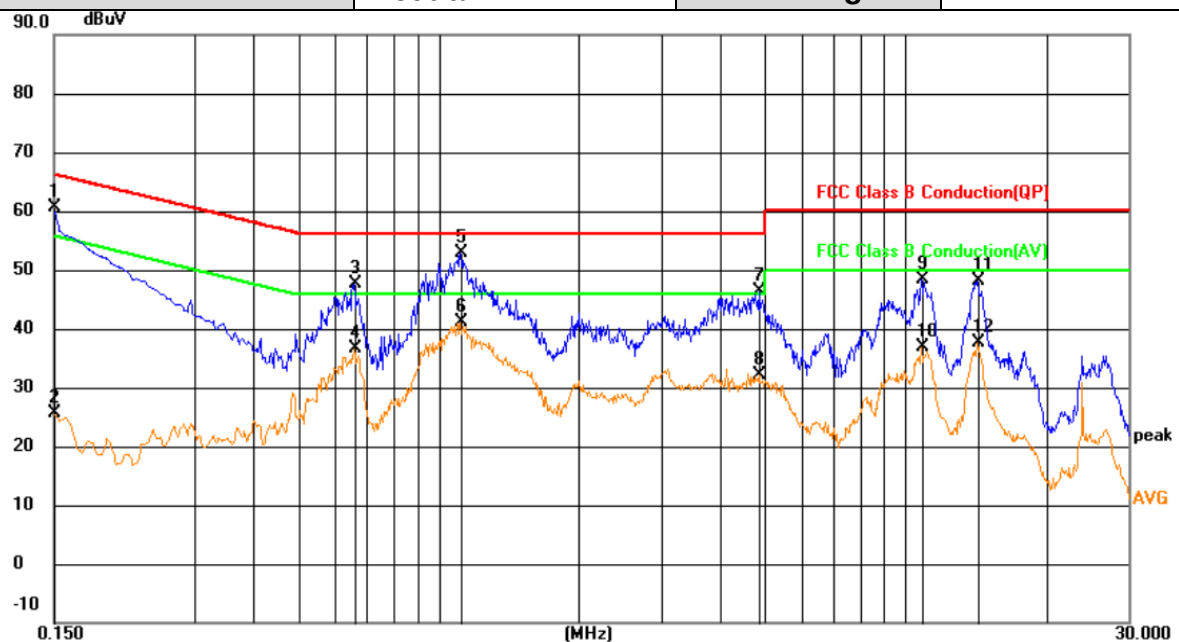

Site LAB

Phase: N

Temperature: 23.5

Limit: FCC Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 53.1 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	41.44	19.14	60.58	66.00	-5.42	QP	
2		0.1500	6.41	19.14	25.55	56.00	-30.45	AVG	
3		0.6585	28.39	19.24	47.63	56.00	-8.37	QP	
4		0.6585	17.34	19.24	36.58	46.00	-9.42	AVG	
5	*	1.1130	33.52	19.27	52.79	56.00	-3.21	QP	
6		1.1130	21.84	19.27	41.11	46.00	-4.89	AVG	
7		4.8705	26.95	19.49	46.44	56.00	-9.56	QP	
8		4.8705	12.75	19.49	32.24	46.00	-13.76	AVG	
9		10.8060	28.50	19.76	48.26	60.00	-11.74	QP	
10		10.8060	17.23	19.76	36.99	50.00	-13.01	AVG	
11		14.2530	28.17	20.06	48.23	60.00	-11.77	QP	
12		14.2530	17.50	20.06	37.56	50.00	-12.44	AVG	

Note: Pre-Scan all mode, Thus record worse case mode result in this report.



3.2. Radiated emission Measurement

3.2.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Software	EZ	EZ-EMC	/	N/A
2	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2019-06-12
3	Positioning Controller	MF	MF-7082	/	2019-06-12
4	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2019-07-25
5	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2019-07-01
6	EMI Test Receiver	R&S	ESR 7	101181	2019-06-12
7	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2019-11-14
8	Broadband Preamplifier	/	BP-01M18G	P190501	2019-07-01
9	RF Cable-R03m	Jye Bao	RG142	CB021	2019-06-12
10	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2019-06-12

3.2.2. Block Diagram of Test Setup

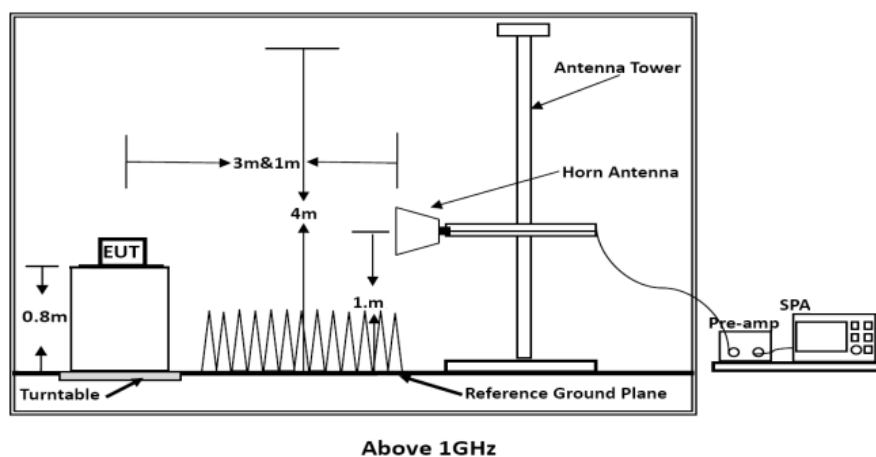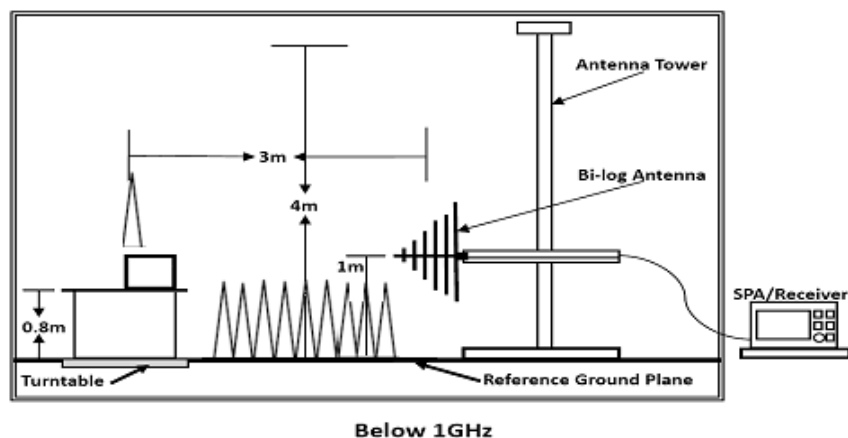

3.2.3. Radiated Emission Limit (Class B)

Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54
Remark□(1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$ (2) The smaller limit shall apply at the cross point between two frequency bands. (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.			
Limits for Radiated Emission Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit ($\text{dB}\mu\text{V/m}$)	Average Limit ($\text{dB}\mu\text{V/m}$)
1000 ~ 3000	3	70	42~35
3000 ~ 6000	3	74	42
***Note: The lower limit applies at the transition frequency.			

3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Mode 1 and measure it.

3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

The bandwidth of the EMI test receiver is set at 120kHz, 300kHz.


The frequency range from 30MHz to 1000MHz is checked.

3.2.7. Radiated Emission Noise Measurement Result

PASS.

The scanning waveforms please refer to the next page.

Test Model	100501-001B	Test Mode	Mode 1
Environmental Conditions	24.3°C, 53.3% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	David Luo	Test Voltage	DC 5V

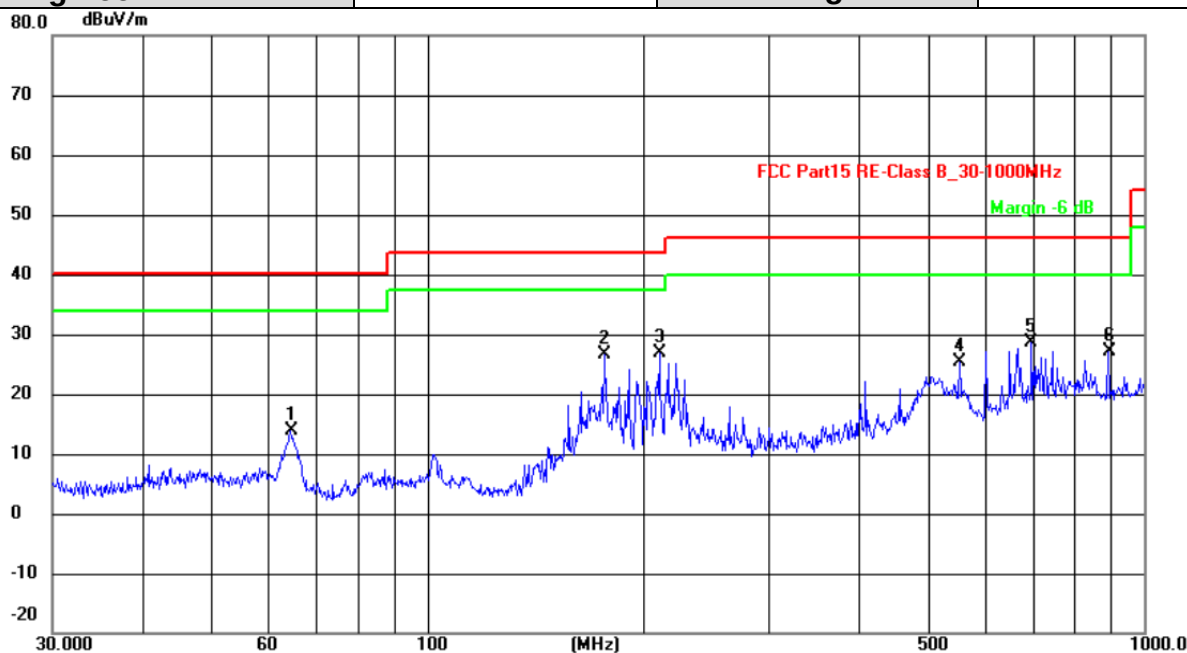

Site 966 chamber #1

Polarization: **Vertical**

Temperature: 24.3 (C)


Limit: FCC Part15 RE-Class B_30-1000MHz

Power: DC

Humidity: 53.3 %RH

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	64.4331	32.99	-19.09	13.90	40.00	-26.10	QP
2	176.8878	46.93	-20.33	26.60	43.50	-16.90	QP
3	210.7860	44.63	-17.87	26.76	43.50	-16.74	QP
4	552.8832	35.68	-10.31	25.37	46.00	-20.63	QP
5	696.8567	36.90	-8.37	28.53	46.00	-17.47	QP
6	890.7278	32.81	-5.79	27.02	46.00	-18.98	QP

Test Model	100501-001B	Test Mode	Mode 1
Environmental Conditions	24.3°C, 53.3% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	David Luo	Test Voltage	DC 5V

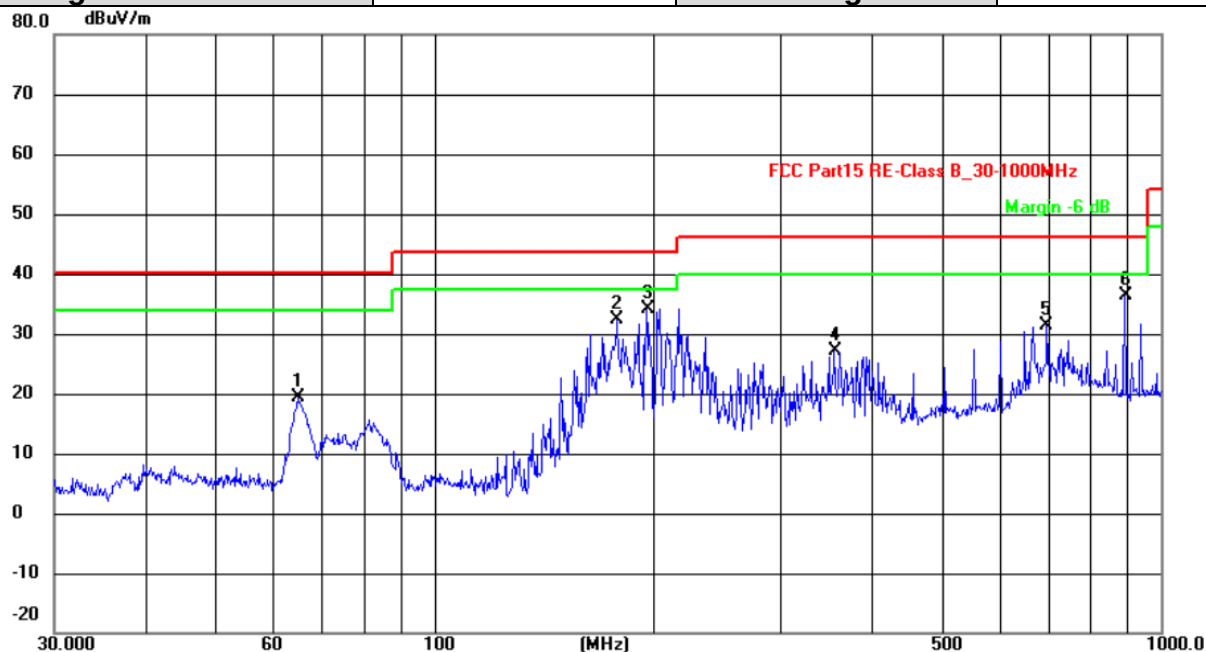

Site 966 chamber #1

Polarization: **Horizontal**

Temperature: 24.3 (C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: DC

Humidity: 53.3 %RH

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	64.8865	38.49	-19.20	19.29	40.00	-20.71	QP
2	178.7584	52.59	-20.23	32.36	43.50	-11.14	QP
3	195.8220	52.74	-18.55	34.19	43.50	-9.31	QP
4	355.4273	41.49	-14.30	27.19	46.00	-18.81	QP
5	696.8567	39.76	-8.37	31.39	46.00	-14.61	QP
6	890.7278	42.15	-5.79	36.36	46.00	-9.64	QP

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

4. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

5. Exterior Photographs of the EUT

Please refer to separated files for External Photos of the EUT.

6. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----