Shenzhen Huatongwei International Inspection Co., Ltd.
1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China
Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn

TEST REPORT

Report Reference No. ..... :	**TRE1511016202**	R/C…….: 87232
FCC ID ..... :	**2AGRP-G716**	
Applicant's name ..... :	**Distribuidora Bridge Comm, C.A.**	
Address.....:	4ta transversal de Boleita Sur, Galpon 14-34. Municipio Sucre. Caracas. Venezuela	
Manufacturer.....:	SINTAVE TECHNOLOGY（GROUP）CO.,LTD	
Address.....:	Sang Tai Technology Park,Liuxiandong,Xili,NanShan District,ShenZhen City,Guangdong Province,China	
Test item description ..... :	**3G Mobile Phone**	
Trade Mark .....:	Digitel	
Model/Type reference.....:	G716	
Listed Model(s) .....:	--	
Standard ..... :	**FCC CFR Title 47 Part 15 Subpart C Section 15.247**	
Date of receipt of test sample……..:	Nov 26,2015	
Date of testing……:	Nov 27,2015- Dec 06,2015	
Date of issue……...:	Dec 07,2015	
Result..... ……..:	**PASS**	

Compiled by (position+printedname+signature)...:	File administrators Candy Liu	Candy Liu
Supervised by (position+printedname+signature)....:	Project Engineer Lion Cai	Lion Cai
Approved by (position+printedname+signature)....:	RF Manager Hans Hu	Hans Hu

Testing Laboratory Name ..... :	**Shenzhen Huatongwei International Inspection Co., Ltd**
Address.....:	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Contents

1.	**APPLICABLE STANDARDS ANDTEST DESCRIPTION**	**3**
1.1.	**Applicable Standards**	**3**
1.2.	**Test Description**	**3**
2.	**SUMMARY**	**4**
2.1.	**Client Information**	**4**
2.2.	**Product Description**	**4**
2.3.	**Operation state**	**5**
2.4.	**EUT configuration**	**5**
2.5.	**Modifications**	**5**
3.	**TEST ENVIRONMENT**	**6**
3.1.	**Address of the test laboratory**	**6**
3.2.	**Test Facility**	**6**
3.3.	**Equipments Used during the Test**	**7**
3.4.	**Environmental conditions**	**8**
3.5.	**Statement of the measurement uncertainty**	**8**
4.	**TEST CONDITIONS AND RESULTS**	**9**
4.1.	**Antenna requirement**	**9**
4.2.	**Conducted Emission (AC Main)**	**10**
4.3.	**Conducted Peak Output Power**	**13**
4.4.	**Power Spectral Density**	**14**
4.5.	**6dB bandwidth**	**17**
4.6.	**Restricted band (Conducted)**	**20**
4.7.	**Band edge and Spurious Emission (conducted)**	**25**
4.8.	**Spurious Emission (radiated)**	**38**
5.	**TEST SETUP PHOTOS OF THE EUT**	**44**
6.	**EXTERNAL AND INTERNAL PHOTOS OF THE EUT**	**45**

1. APPLICABLE STANDARDS ANDTEST DESCRIPTION

1.1. Applicable Standards

The tests were performed according to following standards:
FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2013:AmericanNationalStandardforTestingUnlicensedWirelessDevices

KDB558074 D01 V03R02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS)

1.2. Test Description

ReportSection	Test Item	FCC Rule	Result
4.1	Antenna requirement	15.203/15.247 (c)	Pass
4.2	Line Conducted Emission (AC Main)	15.207	Pass
4.3	Conducted Peak Output Power	15.247 (b)(3)	Pass
4.4	Power Spectral Density	15.247 (e)	Pass
4.5	6dB Bandwidth	15.247 (a)(2)	Pass
4.6	Restricted band	15.247(d)/15.205	Pass
4.7/4.8	Spurious Emission	15.247(d)/15.209	Pass

Remark: The measurement uncertainty is not included in the test result.

2. SUMMARY

2.1. Client Information

Applicant:	Distribuidora Bridge Comm, C.A.
Address:	4ta transversal de Boleita Sur, Galpon 14-34. Municipio Sucre. Caracas. Venezuela
Manufacturer:	SINTAVE TECHNOLOGY（GROUP）CO.,LTD
Address:	Sang Tai Technology Park,Liuxiandong,Xili,NanShan District,ShenZhen City,Guangdong Province,China

2.2. Product Description

Name of EUT	3G Mobile Phone
Trade Mark:	Digitel
Model No.:	G716
Listed Model(s):	--
Power supply:	DC 3.7V From internal battery
Adapter information:	Model:G716 Input:AC 100-240V 50/60Hz 1.0A Output:5Vd.c., 500mA
WIFI	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)
Modulation:	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n(H20)/n(H40): OFDM (BPSK / QPSK / 16QAM / 64QAM)
Operation frequency:	802.11b/g/n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/g/n(H20): 11 802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	Internal Antenna
Antenna gain:	0.5dBi

2.3. Operation state

◆ **Test frequency list**

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

802.11b/g/n(H20)		802.11n(H40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	01	--
02	2417	02	--
03	2422	03	2422
⋮	⋮	⋮	⋮
06	2437	06	2442
⋮	⋮	⋮	⋮
09	2452	09	2452
10	2457	10	--
11	2462	11	--

◆ **Data Rated**

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Mode	datarate (worst mode)
802.11b	11Mbps
802.11g	54Mbps
802.11n(H20)	150Mbps (MCS7)
802.11n(H40)	150Mbps (MCS7)

◆ **Test mode**

For RF test items:

The engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions:

the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

○		Length (m) :	/
		Shield :	/
		Detachable :	/
○		Manufacturer :	/
		Model No. :	/

2.5. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Laboratory:Shenzhen Huatongwei International Inspection Co., Ltd.
Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China
Phone: 86-755-26748019 Fax: 86-755-26748089

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225
Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories
(identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Labo ratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

A2LA-Lab Cert. No. 3902.01
Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for tec hnical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional progra m requirements in the identified field of testing. Valid time is until December 31, 2016.

FCC-Registration No.: 317478
Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully descri bed in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FC C is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

IC-Registration No.: 5377A&5377B
The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.
Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

ACA
Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Aust ralian C-Tick mark as a result of our A2LA accreditation.

VCCI
The 3m Semi-
anechoic chamber (12.2m×7.95m×6.7m) of Shenzhen Huatongwei International Inspection Co., Ltd.
has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 29, 2015.
Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. h as been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.
Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.
Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspe ction Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with R egistration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

DNV
Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of D NV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Di rectives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-
ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the D NV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

3.3. Equipments Used during the Test

Conducted Emission (AC Main)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2015/11/02
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2015/11/02
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2015/11/02
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2015/11/02
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2015/11/02
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	2015/11/02
8	Amplifer	Sonoma	310N	E009-13	2015/11/02
9	JS amplifer	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2015/11/02
10	High pass filter	Compliance Direction systems	BSU-6	34202	2015/11/02
11	HORNANTENNA	ShwarzBeck	9120D	1012	2015/11/02
12	Amplifer	Compliance Direction systems	PAP1-4060	120	2015/11/02
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2015/11/02
14	TURNTABLE	MATURO	TT2.0	----	N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2015/11/02
17	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2015/11/02

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2015/11/02
2	Power Meter	Anritsu	ML2480B	100798	2015/11/02
3	Power Sensor	Anritsu	MA2411B	100258	2015/11/02

The Cal.Interval was one year

3.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
lative Humidity:	30~60 %
Air Pressure:	950~1050mba

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01"Electromagnetic compatibilityand Radio spectrum Matters (ERM);Uncertainties in the measurementof mobile radio equipment characteristics;Part 1"and TR-100028-02 "Electromagnetic compatibilityand Radio spectrum Matters (ERM);Uncertainties in the measurementof mobile radio equipment characteristics;Part 2 " and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	MeasurementUncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	---------	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4. TEST CONDITIONS AND RESULTS

4.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of anantenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The antenna is integral antenna, the best case gain of the antenna is0.5dBi.

4.2. Conducted Emission (AC Main)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

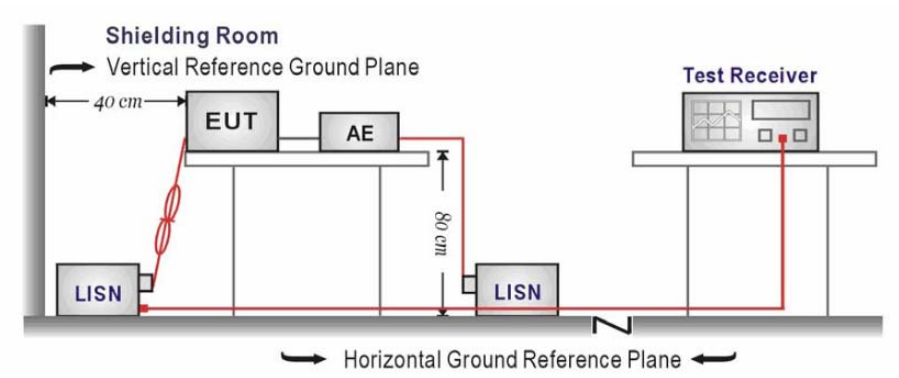

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above theconducting ground plane. The vertical conducting plane was located 40 cm to the rear of theEUT. All other surfaces of EUT were at least 80 cm from any other grounded conductingsurface.
3. The EUT and simulators are connected to the main power through a line impedancestabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for themeasuring equipment.
4. The peripheral devices are also connected to the main power through aLISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor,was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were foldedback and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHzusing a receiver bandwidth of 9 kHz.

TEST RESULTS

Test mode:AC 120V	WIFI	Polarization	L

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

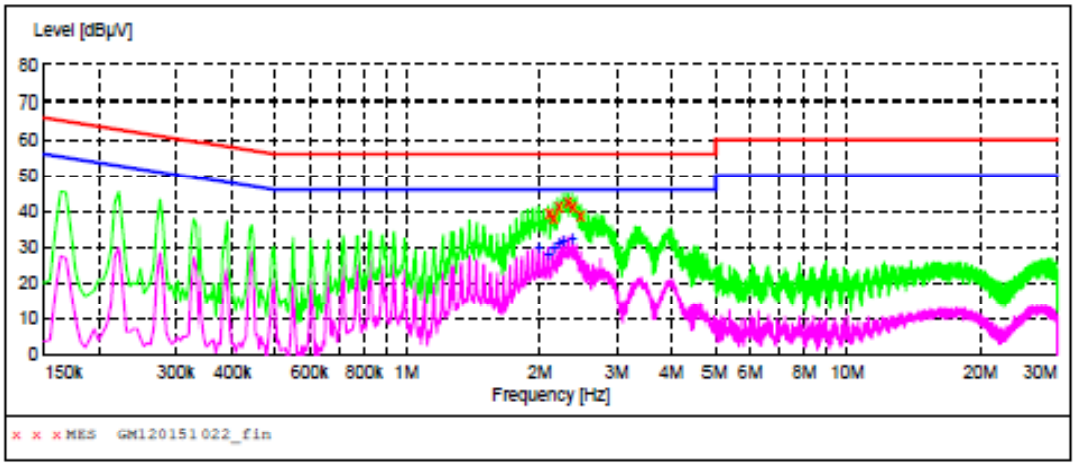

MEASUREMENT RESULT: "GM120151022_fin"

12/2/2015 2:14PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
2.098500	39.30	10.2	56	16.7	QP	L1	GND
2.148000	37.90	10.2	56	18.1	QP	L1	GND
2.206500	41.40	10.2	56	14.6	QP	L1	GND
2.314500	42.10	10.3	56	13.9	QP	L1	GND
2.377500	41.40	10.3	56	14.6	QP	L1	GND
2.481000	38.70	10.3	56	17.3	QP	L1	GND

MEASUREMENT RESULT: "GM120151022_fin2"

12/2/2015 2:14PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
1.986000	29.70	10.2	46	16.3	AV	L1	GND
2.094000	28.30	10.2	46	17.7	AV	L1	GND
2.152500	29.90	10.2	46	16.1	AV	L1	GND
2.206500	31.30	10.2	46	14.7	AV	L1	GND
2.260500	32.10	10.2	46	13.9	AV	L1	GND
2.373000	32.70	10.3	46	13.3	AV	L1	GND

Test mode: AC 120V	WIFI	Polarization	N

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

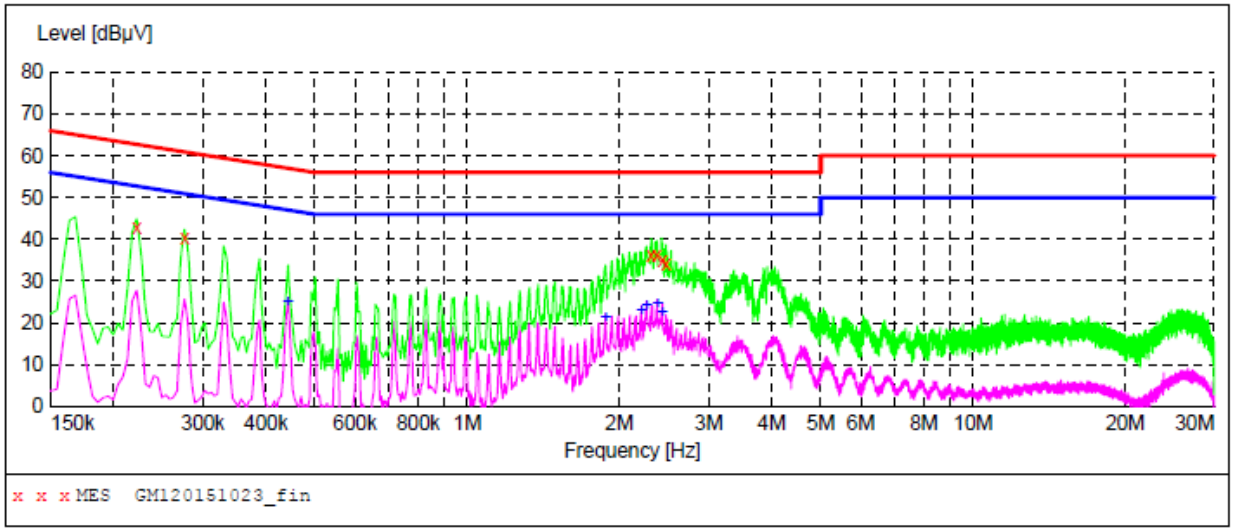

MEASUREMENT RESULT: "GM120151023_fin"

12/2/2015 2:17PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.222000	42.90	10.2	63	19.8	QP	N	GND
0.276000	40.30	10.2	61	20.6	QP	N	GND
2.310000	36.10	10.3	56	19.9	QP	N	GND
2.368500	36.10	10.3	56	19.9	QP	N	GND
2.431500	34.90	10.3	56	21.1	QP	N	GND
2.472000	33.90	10.3	56	22.1	QP	N	GND

MEASUREMENT RESULT: "GM120151023_fin2"

12/2/2015 2:17PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.442500	24.80	10.2	47	22.2	AV	N	GND
1.878000	21.40	10.2	46	24.6	AV	N	GND
2.211000	23.00	10.2	46	23.0	AV	N	GND
2.265000	24.20	10.2	46	21.8	AV	N	GND
2.377500	24.40	10.3	46	21.6	AV	N	GND
2.427000	22.50	10.3	46	23.5	AV	N	GND

4.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): **30dBm**

TEST CONFIGURATION

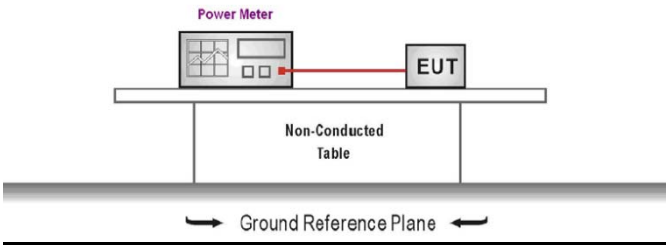

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10: 2013 for compliance to FCC 47CFR 15.247requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
4. Record the measurement data.

TEST RESULTS

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11b	01	16.73	30.00	Pass
	06	16.70		
	11	16.47		
802.11g	01	15.47	30.00	Pass
	06	15.41		
	11	15.43		
802.11n(H20)	01	14.91	30.00	Pass
	06	14.78		
	11	13.46		
802.11n(H40)	03	13.46	30.00	Pass
	06	13.34		
	09	13.50		

4.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e): **8dBm/3KHz**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

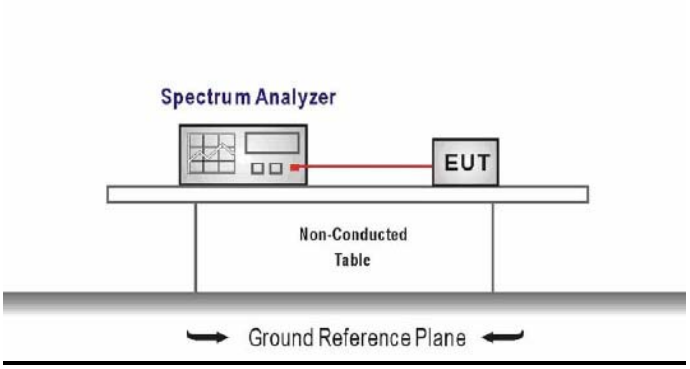

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configurethe spectrum analyzer as shown below:
   Center frequency=DTS channel center frequency
   Span =1.5 times the DTS bandwidth
   RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW
   Sweep time = auto couple
   Detector = peak
   Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Type	Channel	Power Spectral Density(dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-14.97	8.00	Pass
	06	-15.04		
	11	-15.07		
802.11g	01	-17.19	8.00	Pass
	06	-16.95		
	11	-16.98		
802.11n(H20)	01	-18.74	8.00	Pass
	06	-17.91		
	11	-18.09		
802.11n(H40)	03	-18.72	8.00	Pass
	06	-19.38		
	09	-22.62		

Test plot as follows:

802.11b

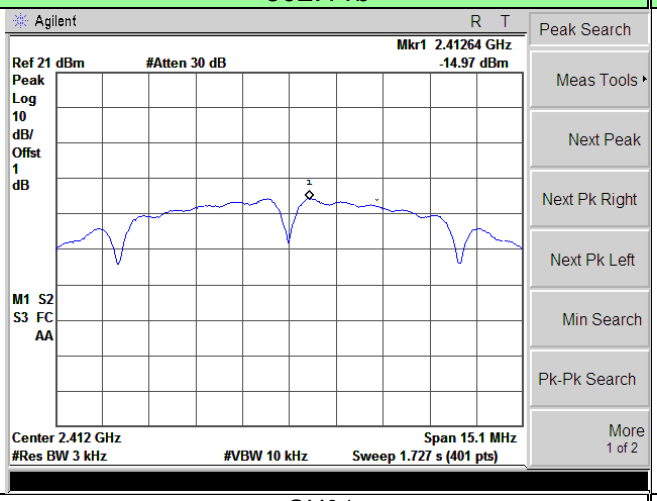

CH01

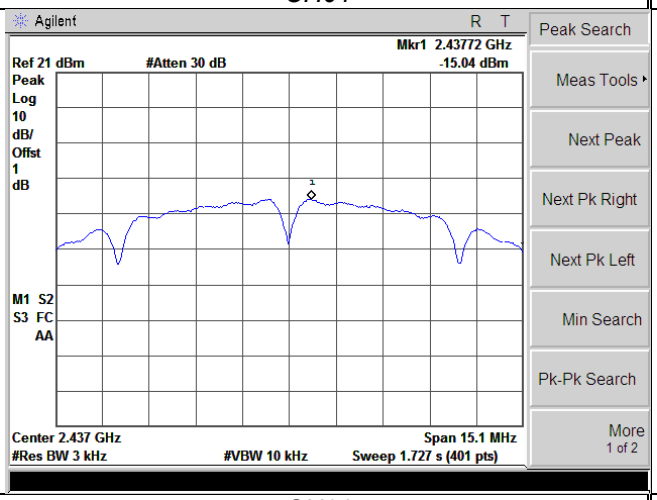

CH06

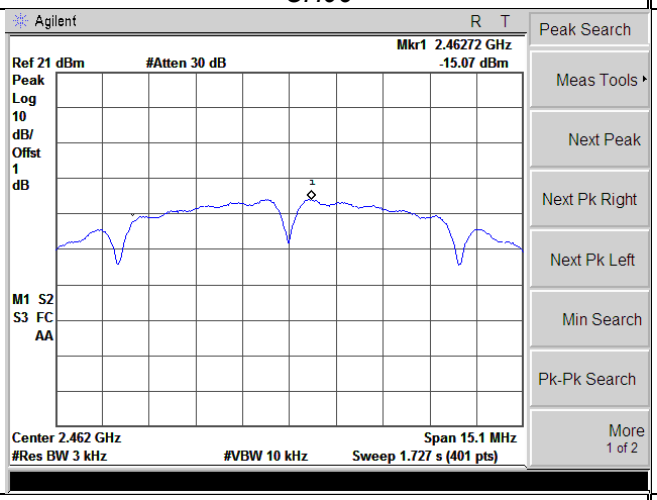

CH11

802.11g

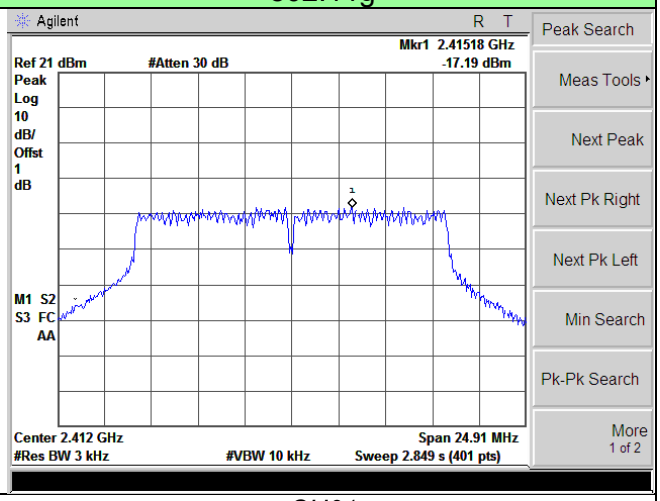

CH01

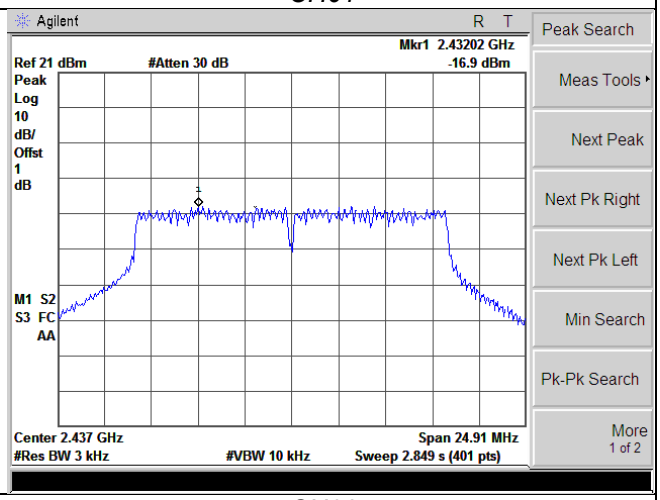

CH06

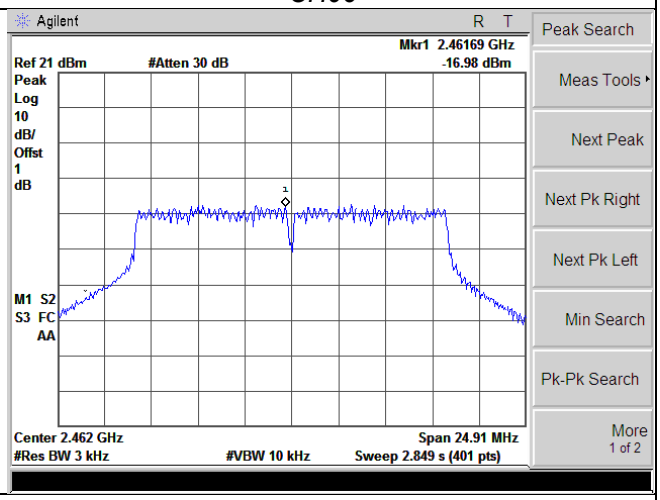

CH11

802.11n(H20)

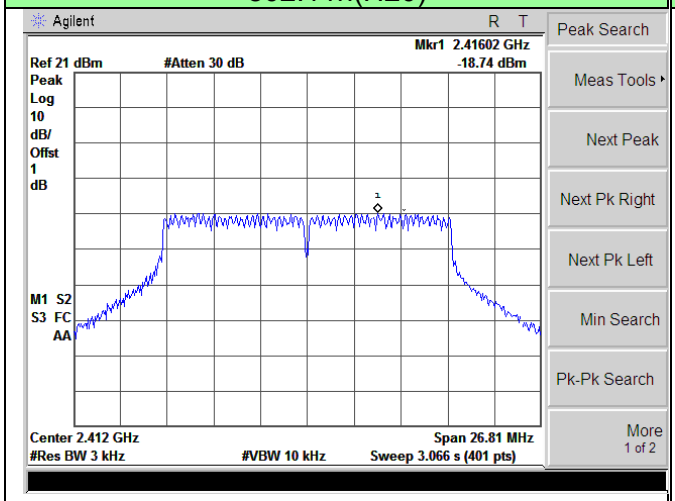

CH01

802.11n(H40)

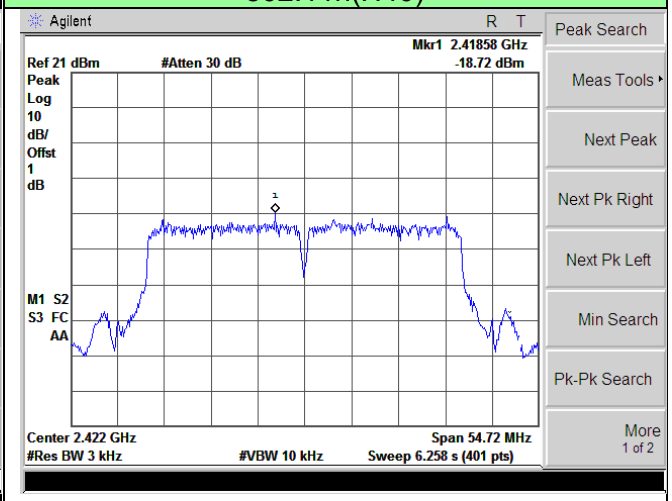

CH03

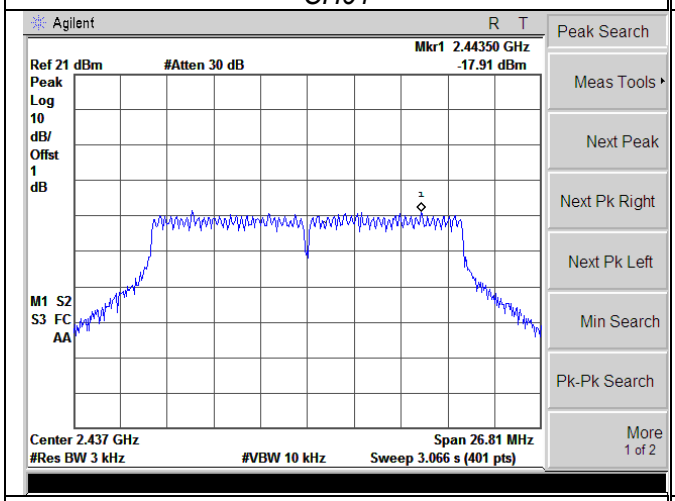

CH06

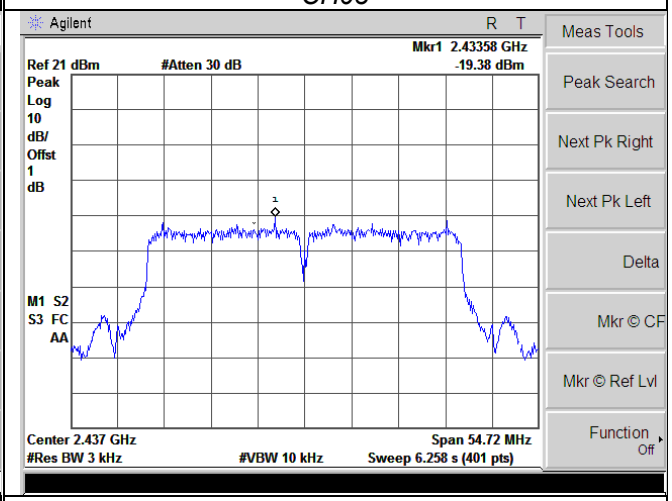

CH06

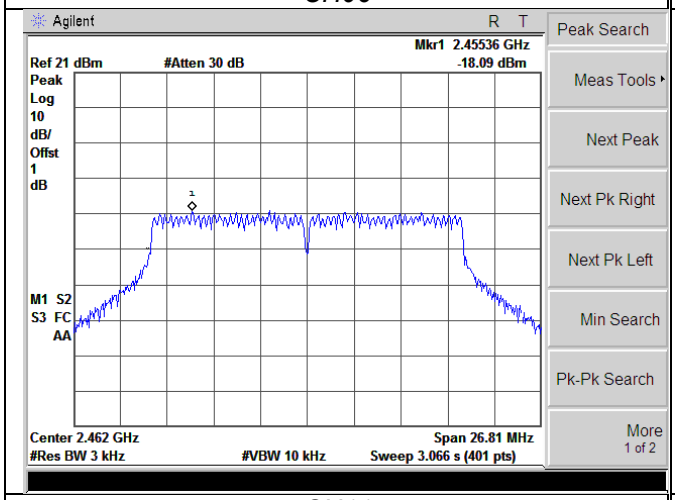

CH11

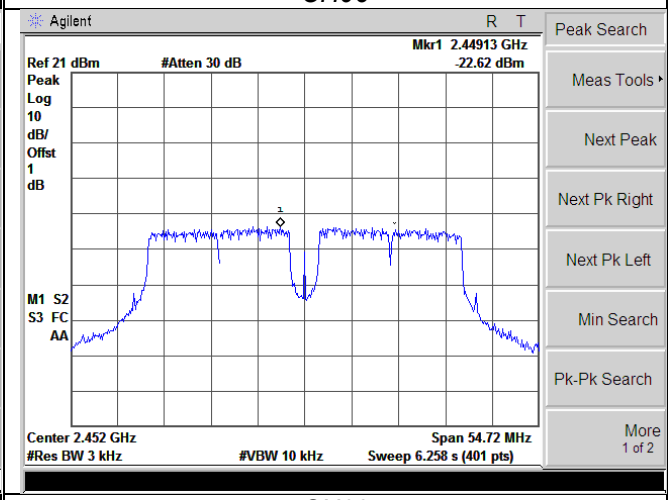

CH09

4.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2): **at least 500KHz**

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

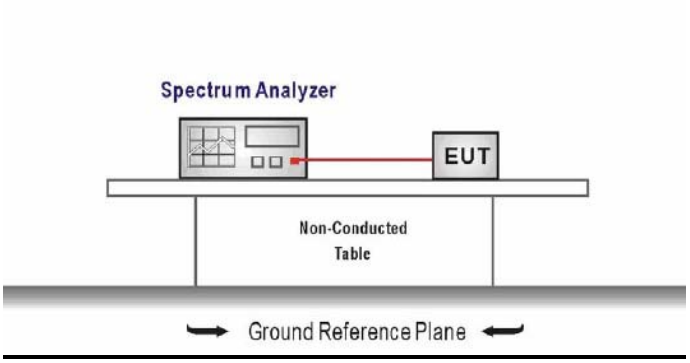

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output andthe spectrum analyzer).
   Center Frequency =DTS channel center frequency
   Span=2 x DTS bandwidth
   RBW = 100 kHz, VBW ≥ 3 × RBW
   Sweep time= auto couple
   Detector = Peak
   Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, andrecord the pertinent measurements.

TEST RESULTS

Type	Channel	6dB Bandwidth(MHz)	Limit (KHz)	Result
802.11b	01	10.09	⩾500	Pass
	06	10.04		
	11	10.05		
802.11g	01	16.58	⩾500	Pass
	06	16.60		
	11	16.60		
802.11n(H20)	01	17.80	⩾500	Pass
	06	17.87		
	11	17.84		
802.11n(H40)	03	36.51	⩾500	Pass
	06	36.47		
	09	36.48		

Test plot as follows:

802.11b

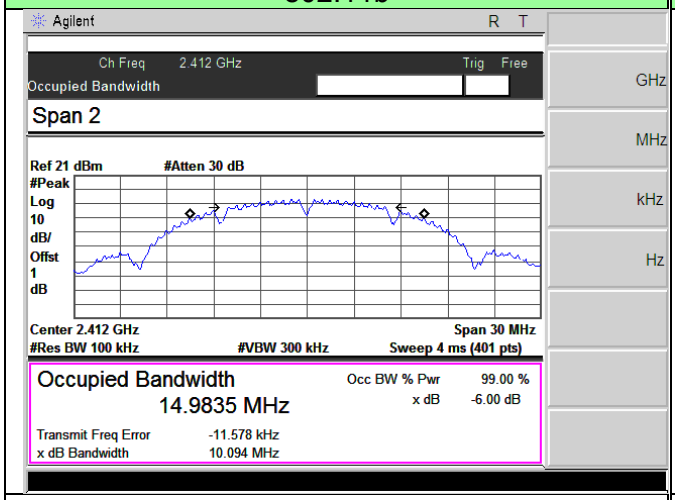

CH01

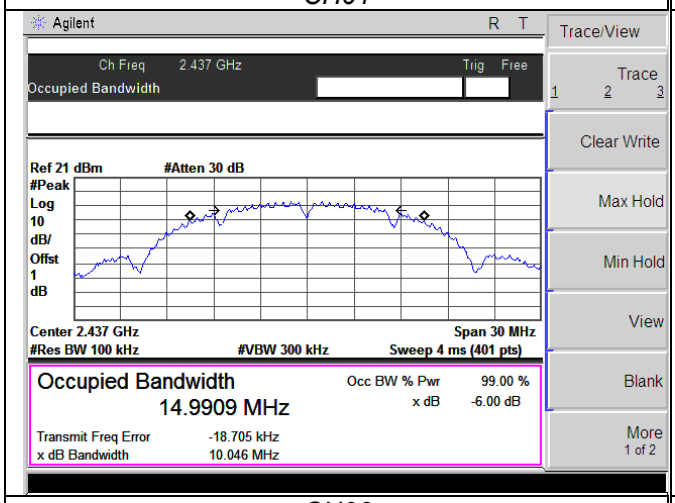

CH06

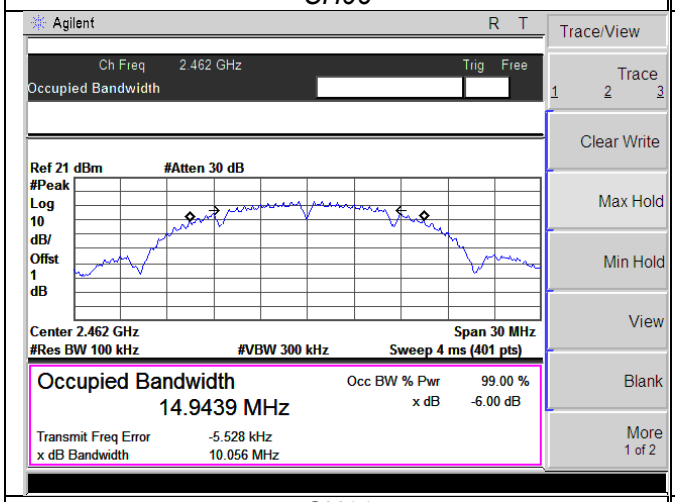

CH11

802.11g

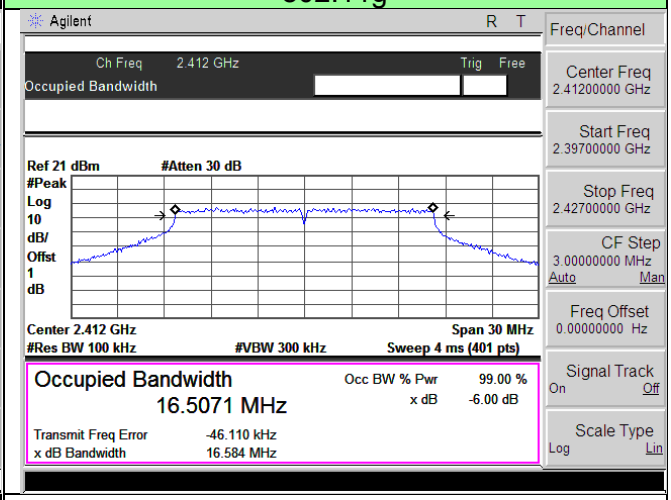

CH01

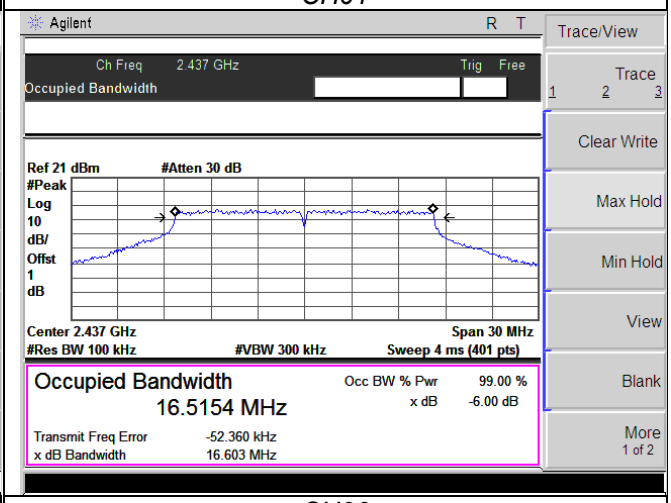

CH06

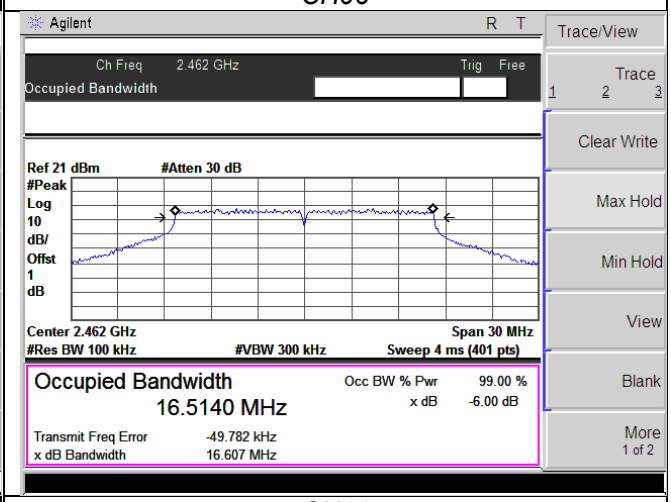

CH11

802.11n(H20)

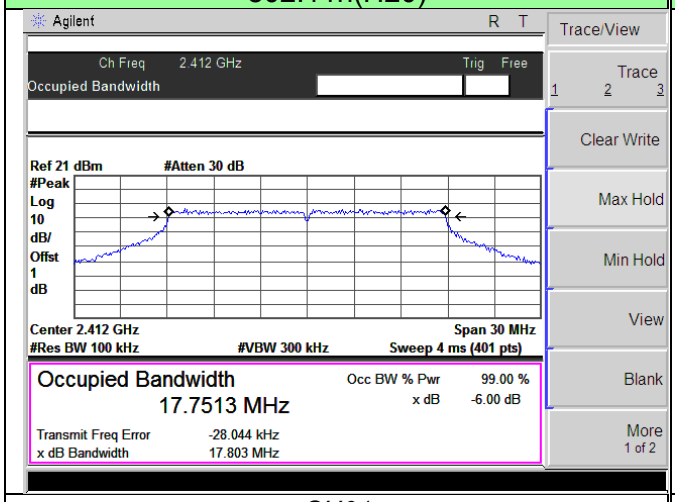

CH01

802.11n(H40)

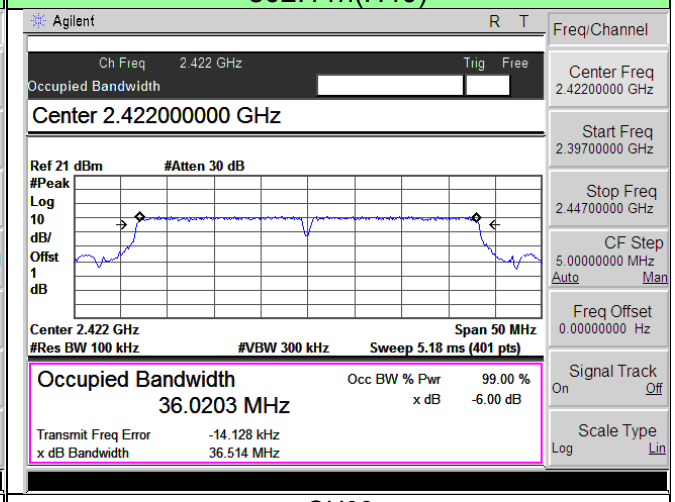

CH03

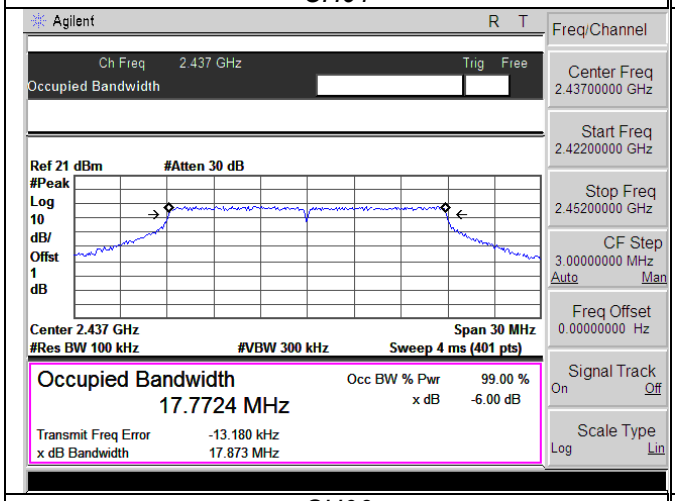

CH06

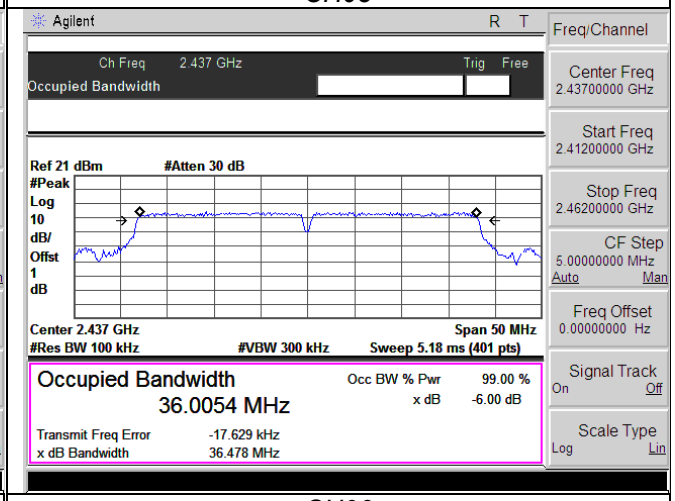

CH06

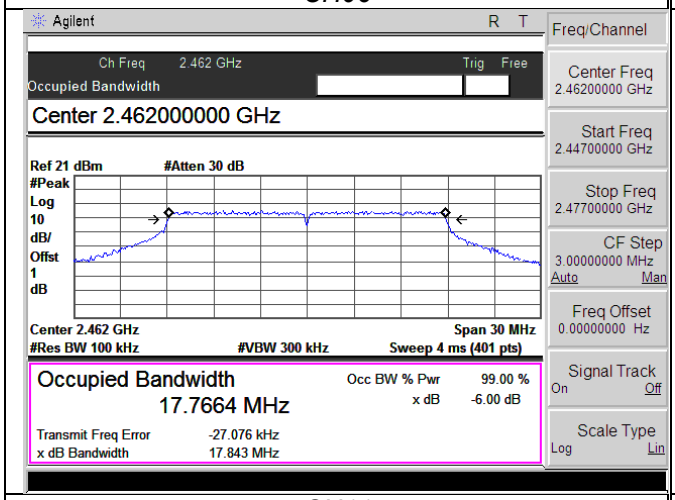

CH11

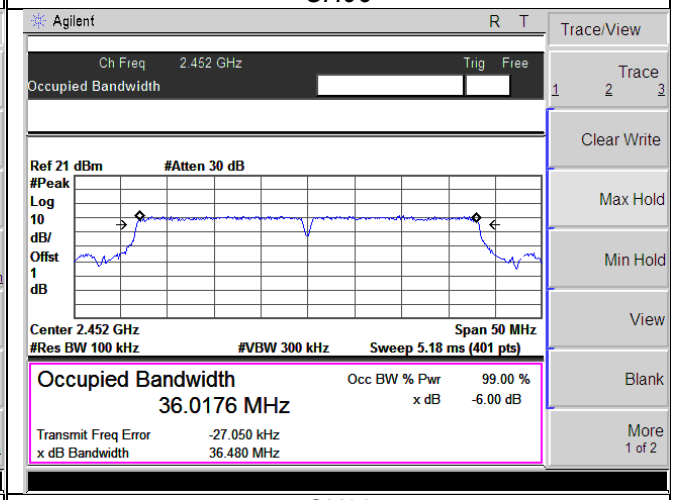

CH09

4.6. Restricted band (Conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

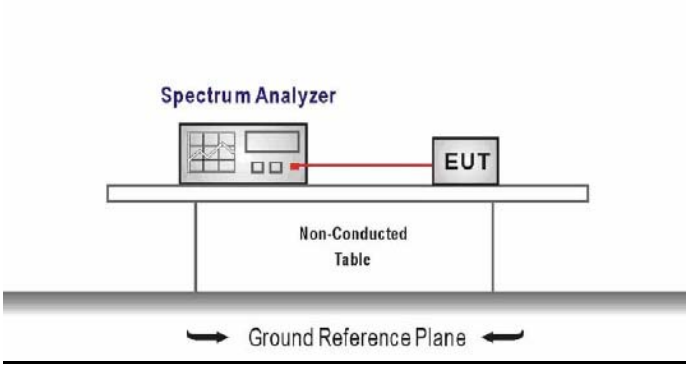

TEST PROCEDURE

1. According to KDB 558074 D01 V03R02 for Antenna-port conducted measurement.
   Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands.
   1) Measure the conducted output power (in dBm) using the Peak /averagedetector
   2) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level
   3) Add the appropriate maximum ground reflection factor to the EIRP level
      6 dB for frequencies ≤ 30 MHz
      4.7 dB for frequencies between 30 MHz and 1000 MHz
      0 dB for frequencies > 1000 MHz
   4) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms
   5) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
      E = EIRP – 20log D + 104.8
      where:
      E = electric field strength in dBμV/m,
      EIRP = equivalent isotropic radiated power in dBm
      D = specified measurement distance in meters.
   6) Compare the resultant electric field strength level to the applicable limit
2. **Peak power measurement procedure**
   Peak emission levels are measured by setting the instrument as follows
   RBW = 1MHz, VBW ≥ 3 x RBW
   Detector = Peak, Sweep time = auto
   Trace mode = max hold
   Allow sweeps to continue until the trace stabilizes.
   If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement
3. **Average power measurement procedure**
   Duty cycle <98 percent, but the duty cycle is not constant
   a) RBW = 1 MHz, VBW ≥ 1/T.
   b) Video bandwidth mode or display mode
      1) The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).
      2) As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode.
   c) Detector = Peak, Sweep time = auto.
   d) Trace mode = max hold.
   e) Allow max hold to run for at least 50 times (1/duty cycle) traces.

TEST RESULTS

802.11b

CH01

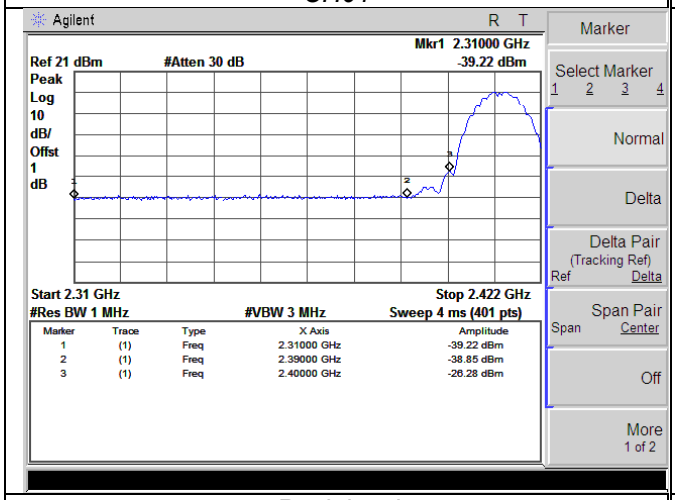

Peak level

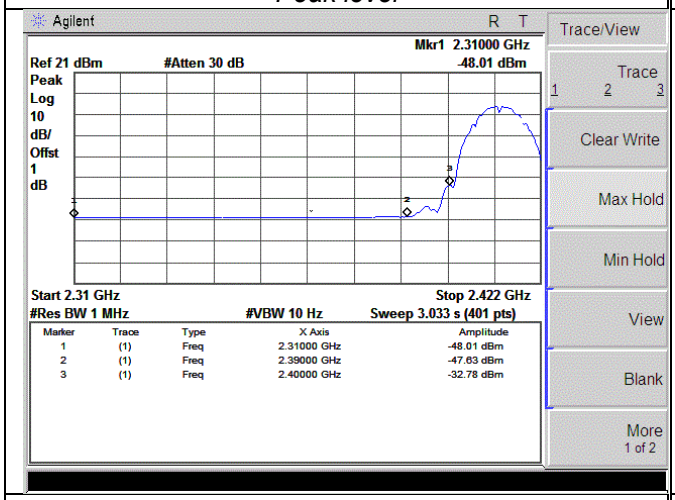

Average level

CH11

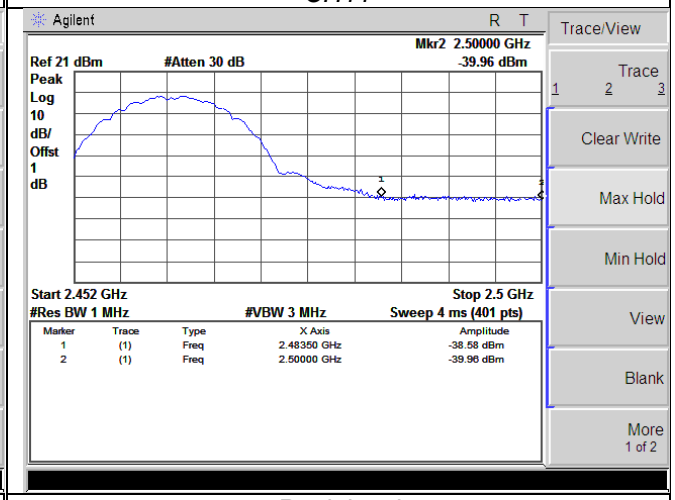

Peak level

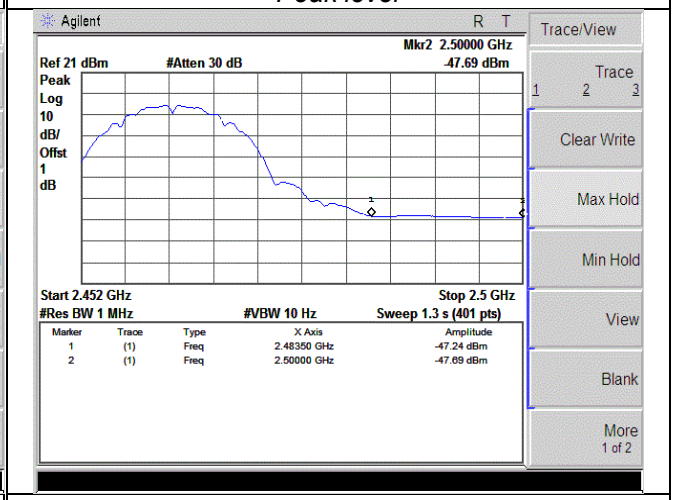

Average level

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level at 3m (dBuV/m)	Limit (dBuV/m)	Result	Test Value
2310.00	-39.22	0.50	0.00	56.54	74.00	Pass	Peak
2390.00	-38.85	0.50	0.00	56.91	74.00	Pass	
2483.50	-38.58	0.50	0.00	57.18	74.00	Pass	
2500.00	-39.96	0.50	0.00	55.80	74.00	Pass	
2310.00	-48.01	0.50	0.00	47.75	54.00	Pass	Average
2390.00	-47.63	0.50	0.00	48.13	54.00	Pass	
2483.50	-47.24	0.50	0.00	48.52	54.00	Pass	
2500.00	-47.69	0.50	0.00	48.07	54.00	Pass	

Note:
EIRP=Conducted Power + Antenna Gain + Ground Reflection factor
E = EIRP – 20log D + 104.8

802.11g

CH01

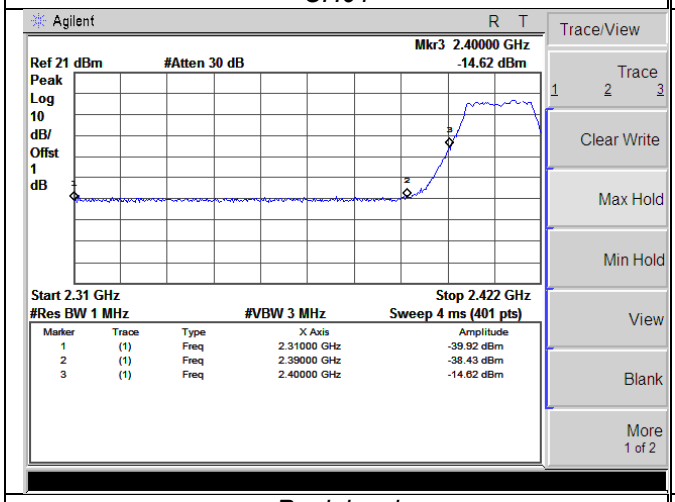

Peak level

CH11

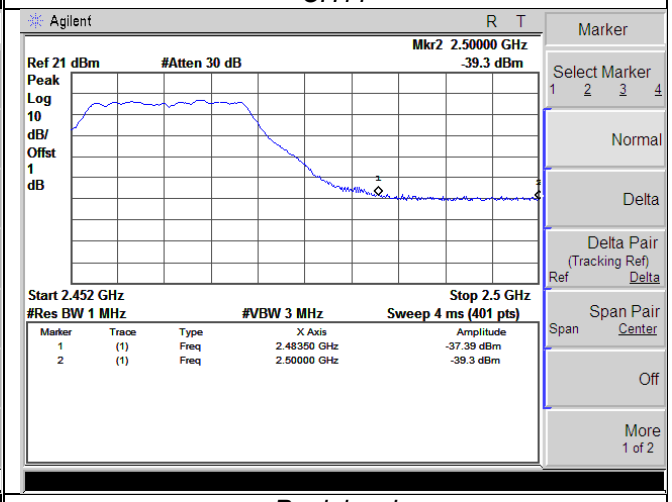

Peak level

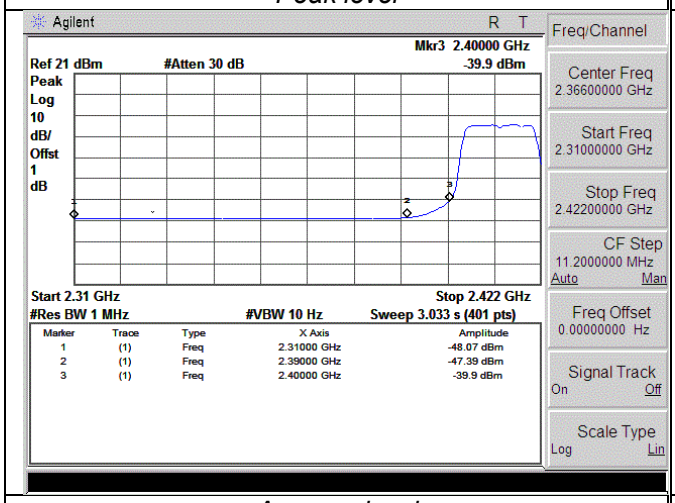

Average level

Peak level

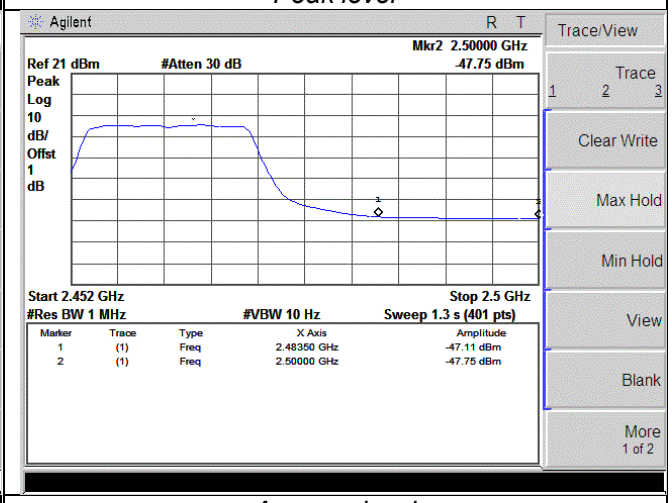

Average level

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level at 3m (dBuV/m)	Limit (dBuV/m)	Result	Test Value
2310.00	-39.92	0.50	0.00	55.84	74.00	Pass	Peak
2390.00	-38.43	0.50	0.00	57.33	74.00	Pass	
2483.50	-37.39	0.50	0.00	58.37	74.00	Pass	
2500.00	-39.30	0.50	0.00	56.46	74.00	Pass	
2310.00	-48.07	0.50	0.00	47.69	54.00	Pass	Average
2390.00	-47.39	0.50	0.00	48.37	54.00	Pass	
2483.50	-47.11	0.50	0.00	48.65	54.00	Pass	
2500.00	-47.75	0.50	0.00	48.01	54.00	Pass	

Note:
EIRP=Conducted Power + Antenna Gain + Ground Reflection factor
E = EIRP – 20log D + 104.8

802.11n(H20)

CH01

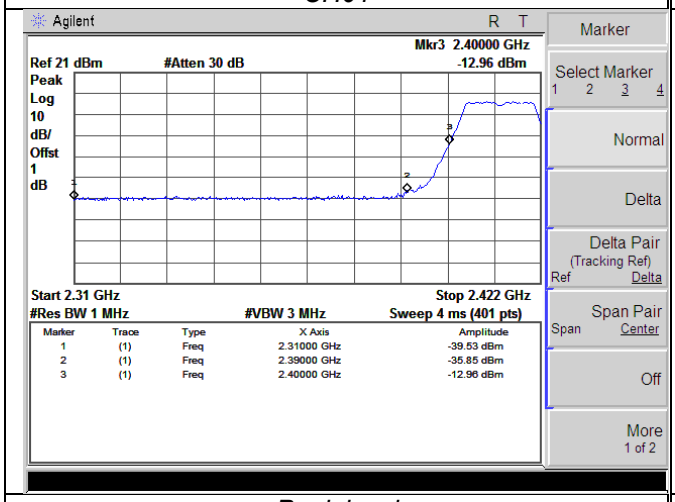

Peak level

CH11

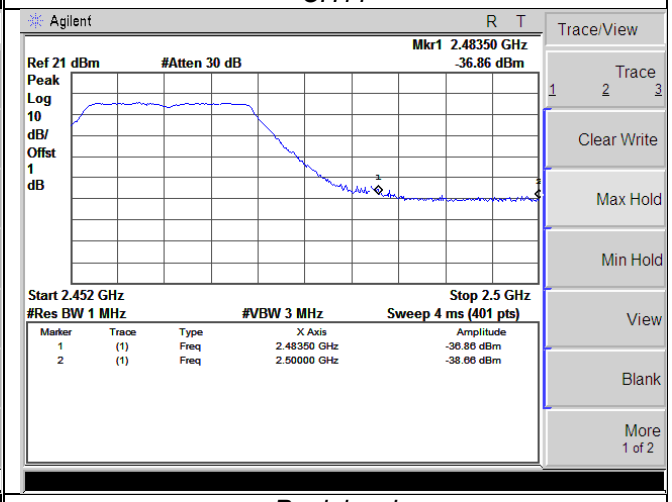

Peak level

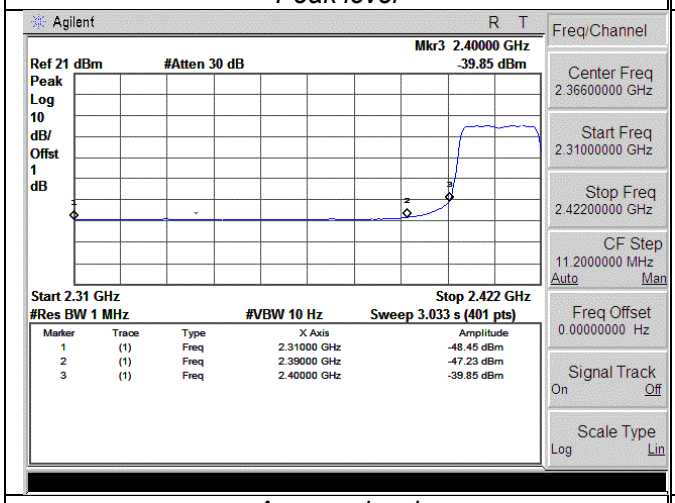

Average level

Peak level

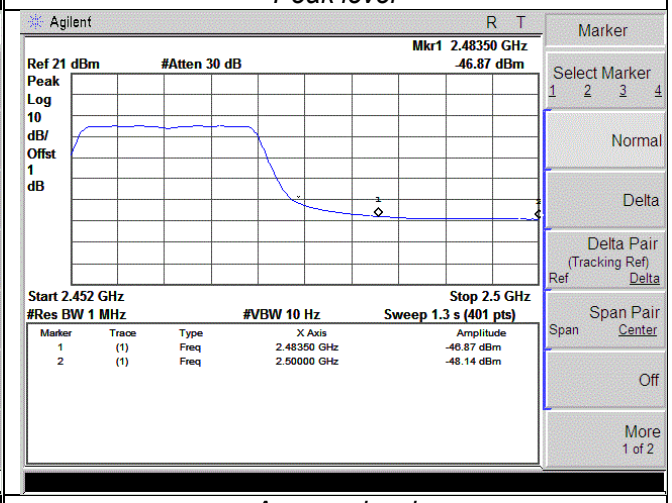

Average level

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level at 3m (dBuV/m)	Limit (dBuV/m)	Result	Test Value
2310.00	-39.53	0.50	0.00	56.23	74.00	Pass	Peak
2390.00	-35.85	0.50	0.00	59.91	74.00	Pass	
2483.50	-36.86	0.50	0.00	58.90	74.00	Pass	
2500.00	-38.66	0.50	0.00	57.10	74.00	Pass	
2310.00	-48.45	0.50	0.00	47.31	54.00	Pass	Average
2390.00	-47.23	0.50	0.00	48.53	54.00	Pass	
2483.50	-46.87	0.50	0.00	48.89	54.00	Pass	
2500.00	-48.14	0.50	0.00	47.62	54.00	Pass	

Note:
EIRP=Conducted Power + Antenna Gain + Ground Reflection factor
E = EIRP – 20log D + 104.8

802.11n(H40)

CH03

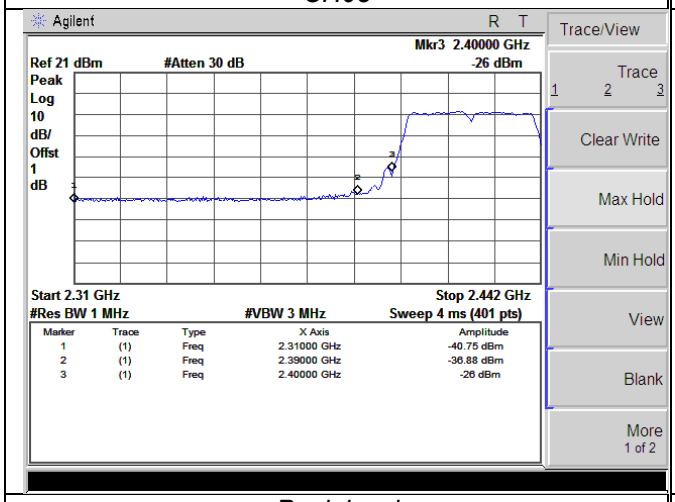

Peak level

CH09

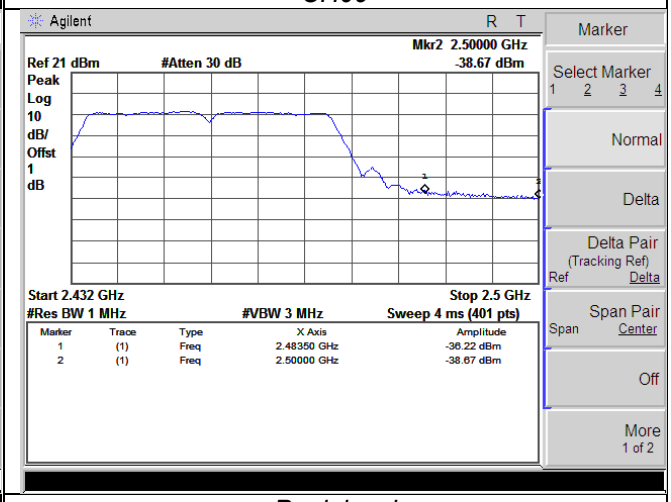

Peak level

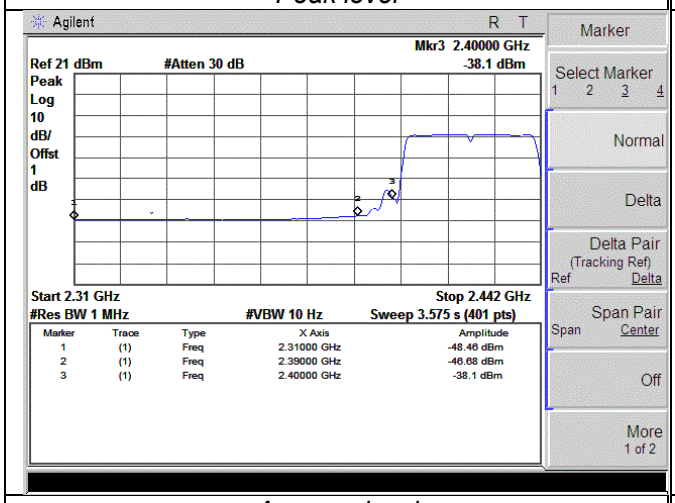

Average level

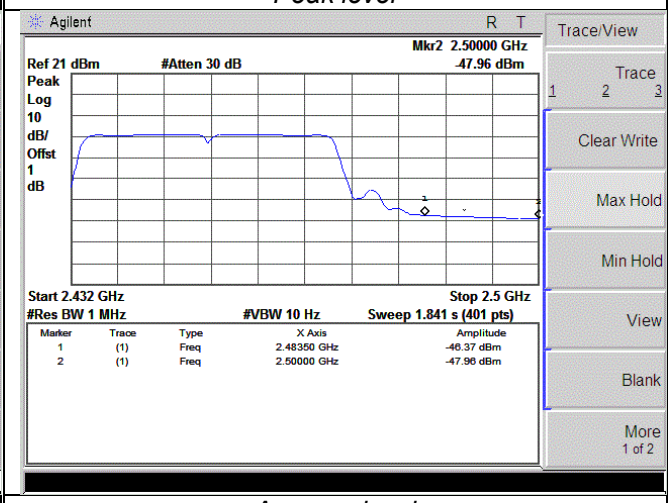

Average level

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level at 3m (dBuV/m)	Limit (dBuV/m)	Result	Test Value
2310.00	-40.75	0.50	0.00	55.01	74.00	Pass	Peak
2390.00	-36.88	0.50	0.00	58.88	74.00	Pass	
2483.50	-36.22	0.50	0.00	59.54	74.00	Pass	
2500.00	-38.67	0.50	0.00	57.09	74.00	Pass	
2310.00	-48.46	0.50	0.00	47.30	54.00	Pass	Average
2390.00	-48.68	0.50	0.00	47.08	54.00	Pass	
2483.50	-46.37	0.50	0.00	49.39	54.00	Pass	
2500.00	-47.96	0.50	0.00	47.80	54.00	Pass	

Note:
EIRP=Conducted Power + Antenna Gain + Ground Reflection factor
E = EIRP – 20log D + 104.8

4.7. Band edge and Spurious Emission (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

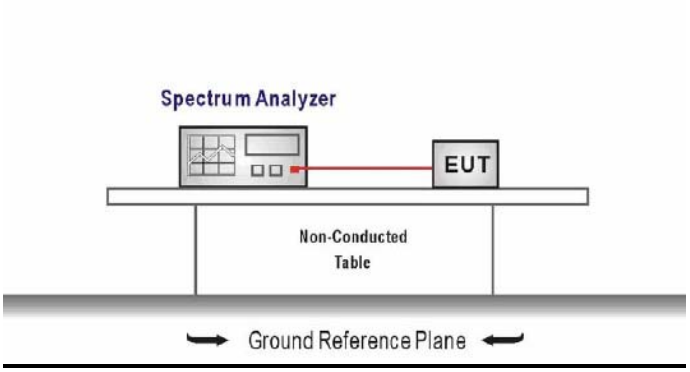

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. **Establish a reference level by using the following procedure**
   Center frequency=DTS channel center frequency
   The span = 1.5 times the DTS bandwidth.
   RBW = 100 kHz, VBW ≥ 3 x RBW
   Detector = peak, Sweep time = auto couple, Trace mode = max hold
   Allow trace to fully stabilize
   Use the peak marker function to determine the maximum PSD level

   Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. **Emission level measurement**
   Set the center frequency and span to encompass frequency range to be measured
   RBW = 100 kHz, VBW ≥ 3 x RBW
   Detector = peak, Sweep time = auto couple, Trace mode = max hold
   Allow trace to fully stabilize
   Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emissions relative to the limit.

TEST RESULTS

Test plot as follows:

Mode:	802.11b	Test channel:	01

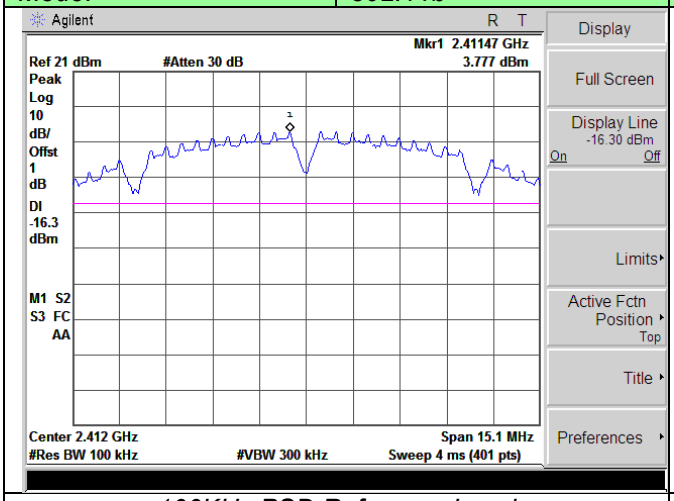

100KHz PSD Reference Level

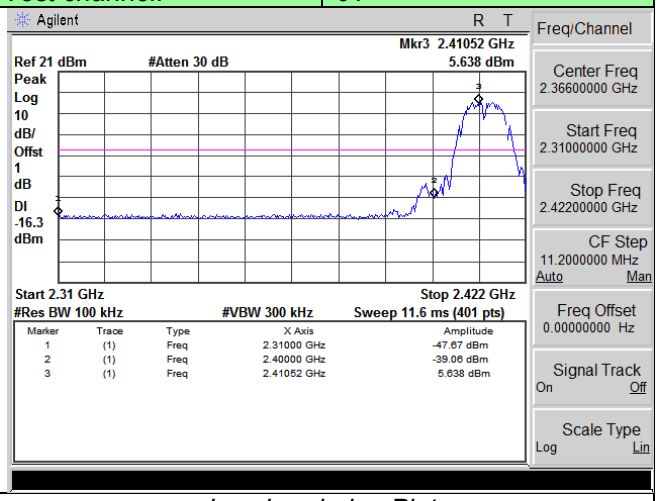

Low bandedge Plot

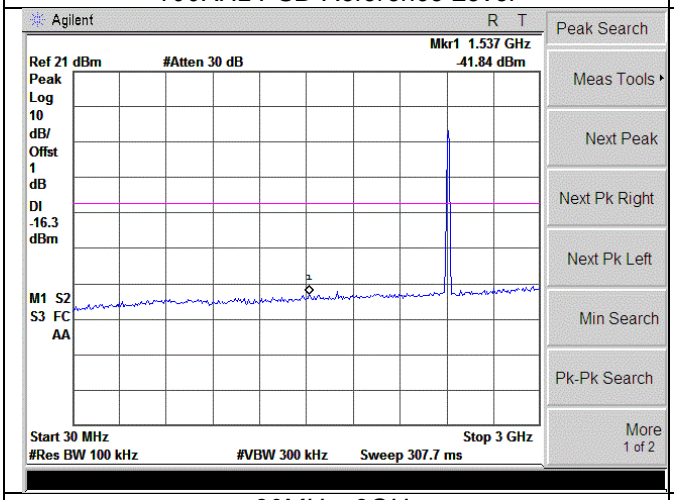

30MHz~3GHz

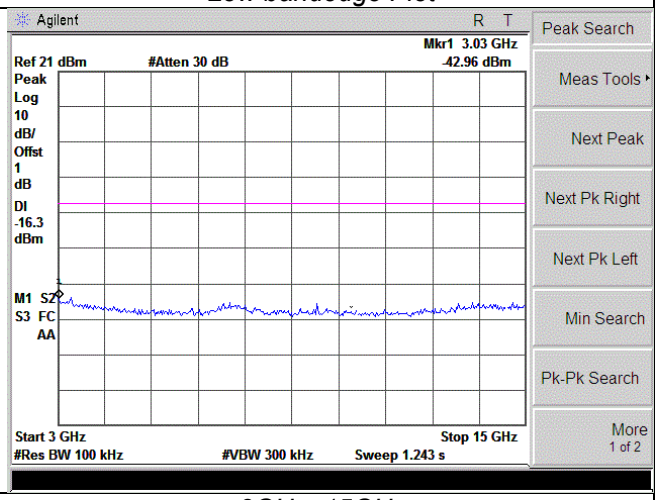

3GHz~15GHz

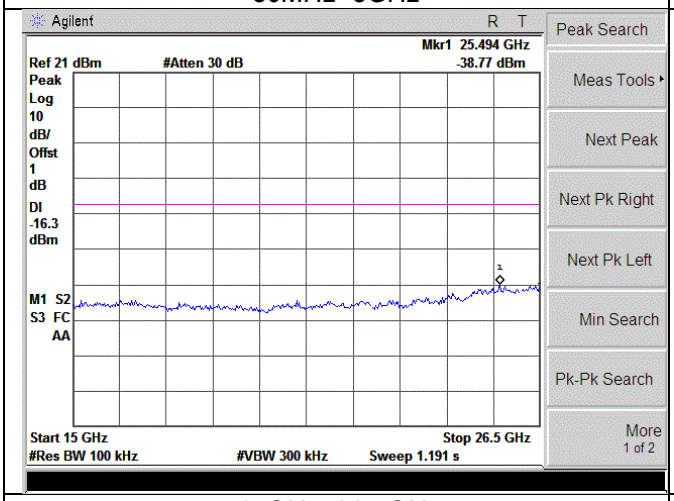

15GHz~26.5GHz

Mode:	802.11b	Test channel:	06

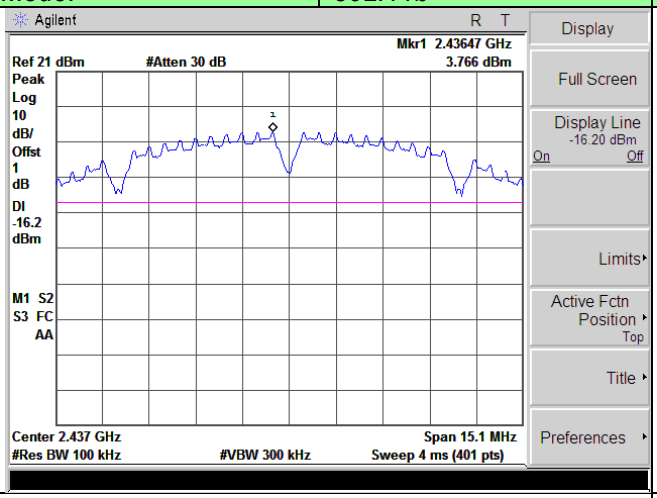

100KHz PSD Reference Level

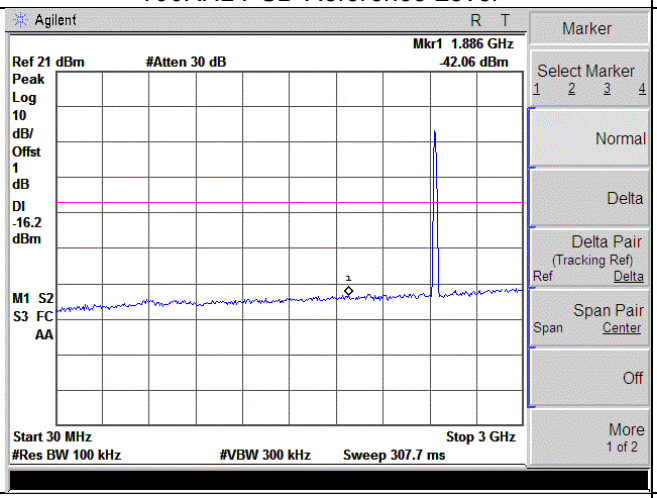

30MHz~3GHz

Low bandedge Plot

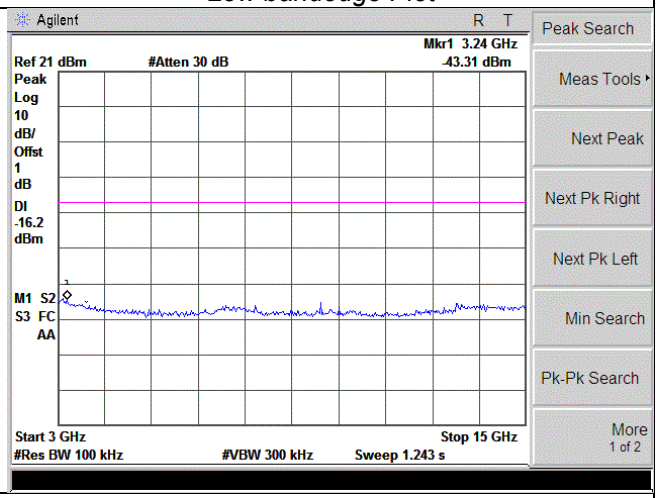

3GHz~15GHz

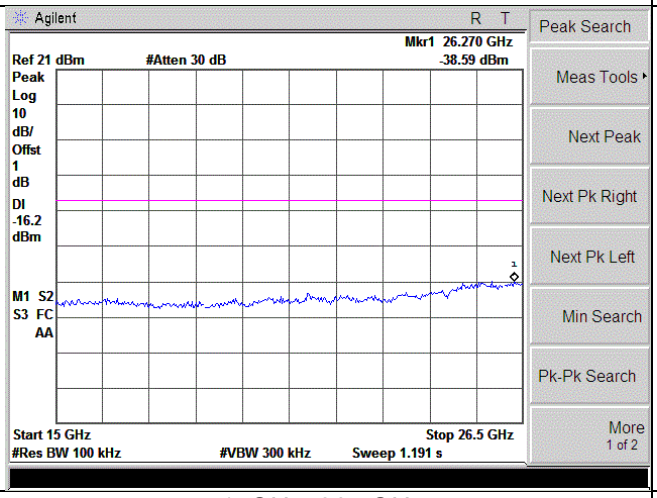

15GHz~26.5GHz

Mode:	802.11b	Test channel:	11

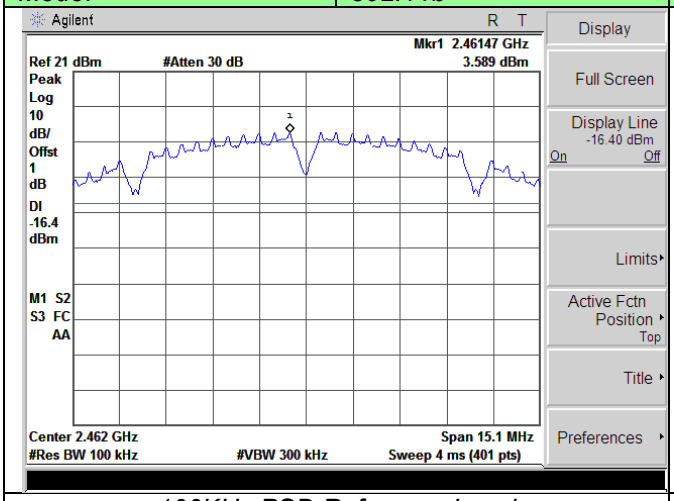

100KHz PSD Reference Level

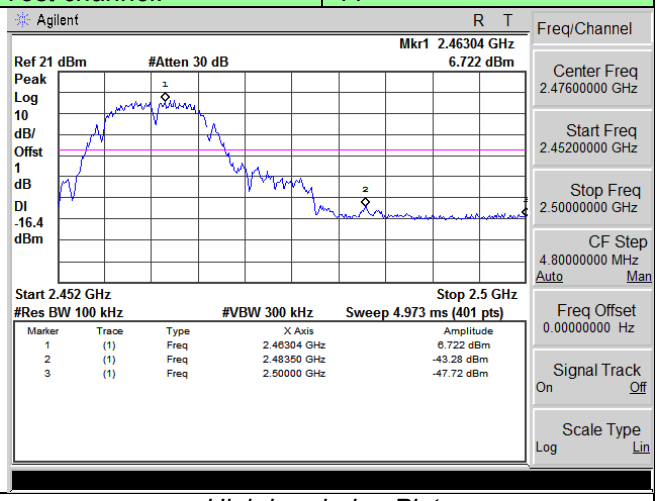

High bandedge Plot

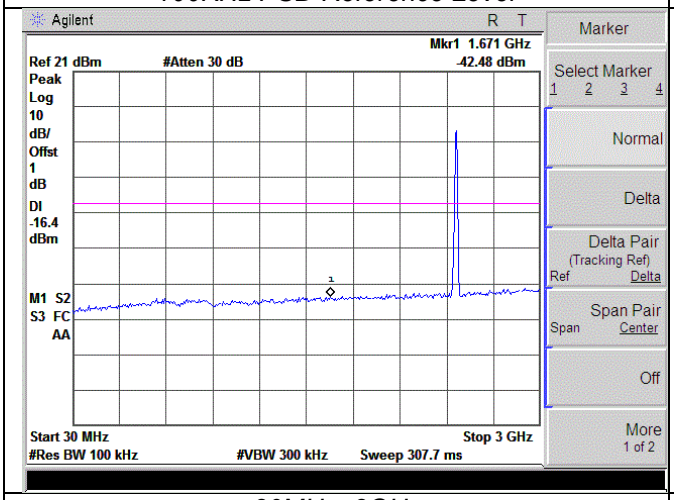

30MHz~3GHz

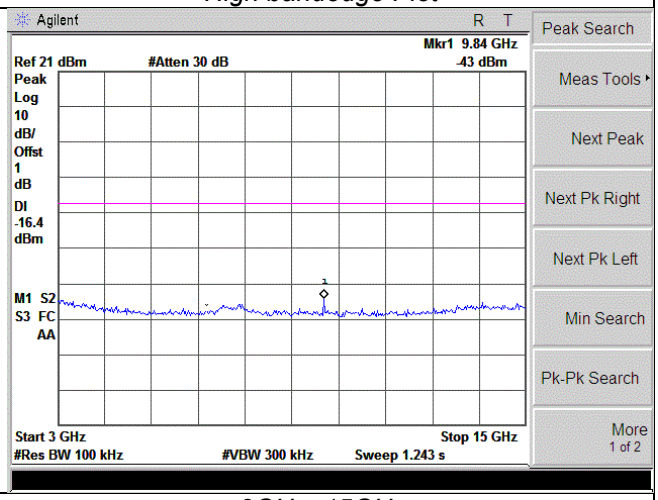

3GHz~15GHz

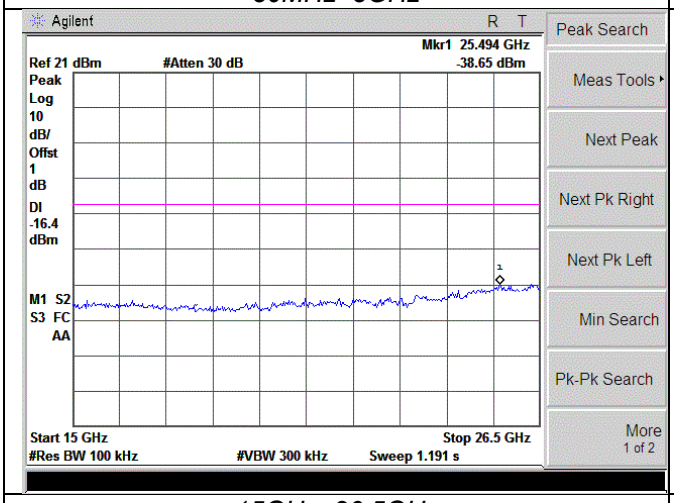

15GHz~26.5GHz

Mode:	802.11g	Test channel:	01

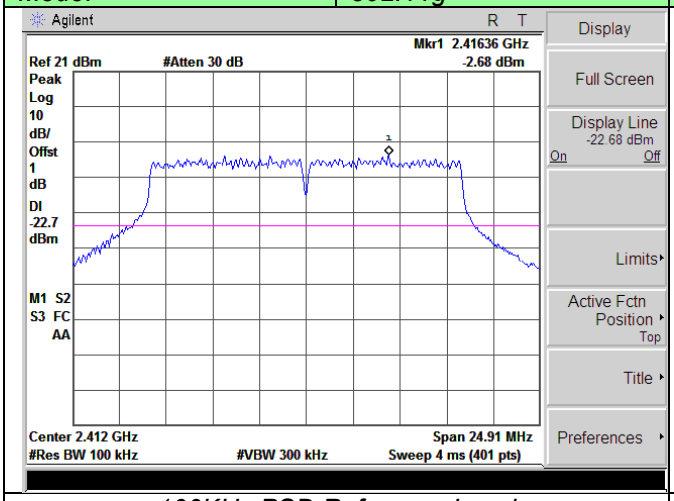

100KHz PSD Reference Level

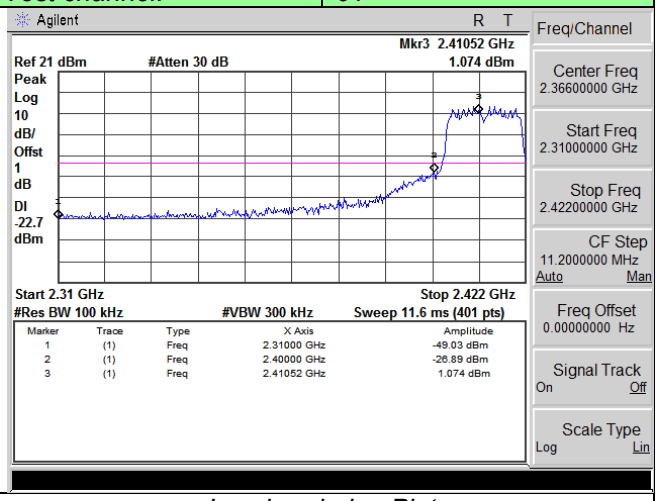

Low bandedge Plot

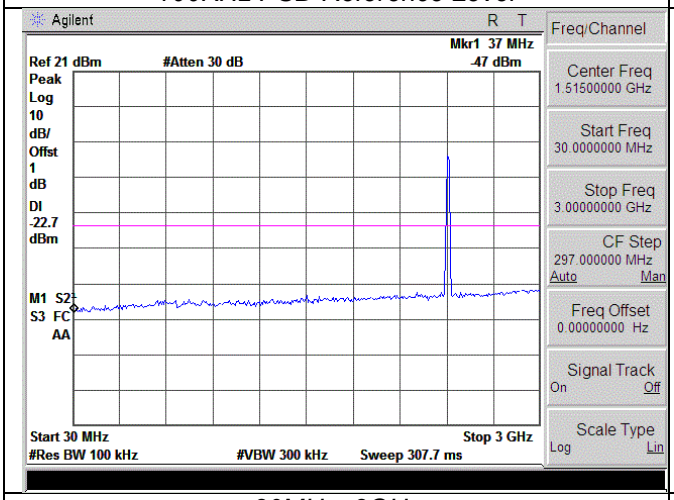

30MHz~3GHz

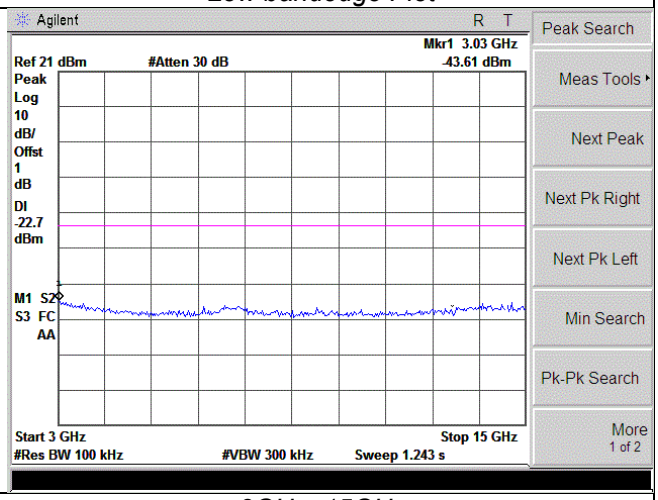

3GHz~15GHz

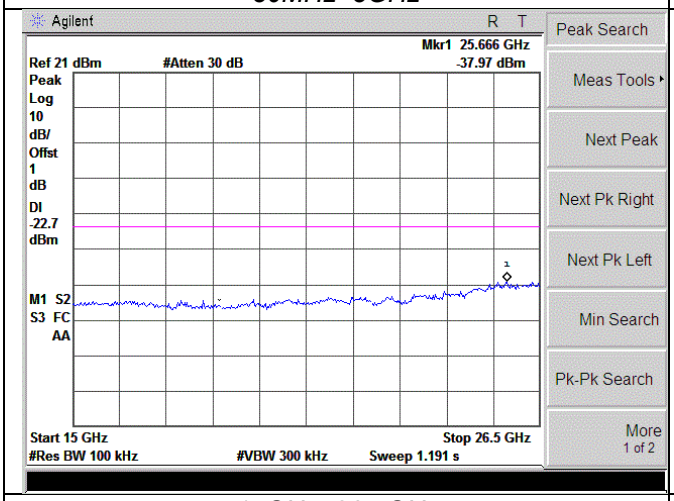

15GHz~26.5GHz

Mode:	802.11g	Test channel:	06

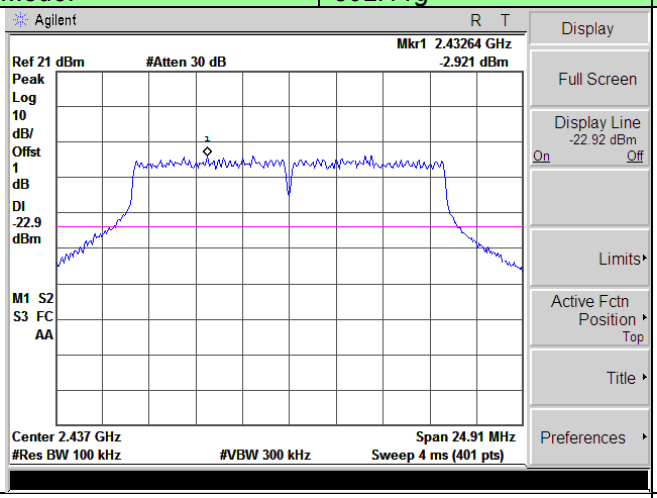

100KHz PSD Reference Level

/

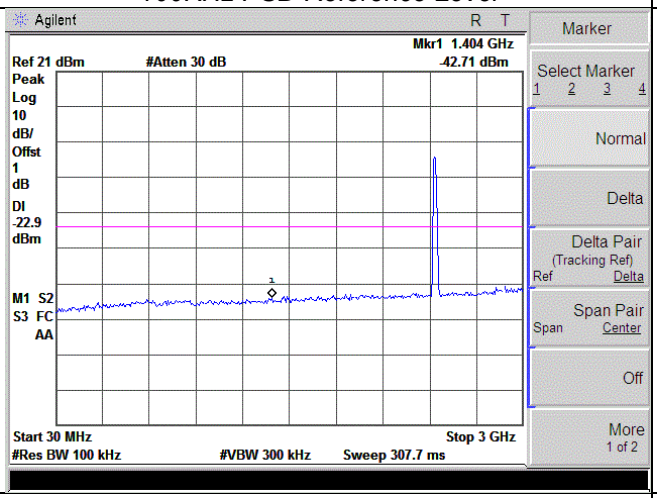

30MHz~3GHz

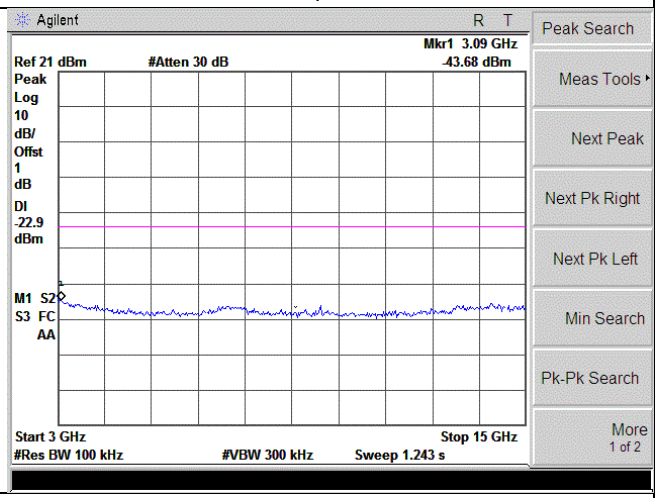

3GHz~15GHz

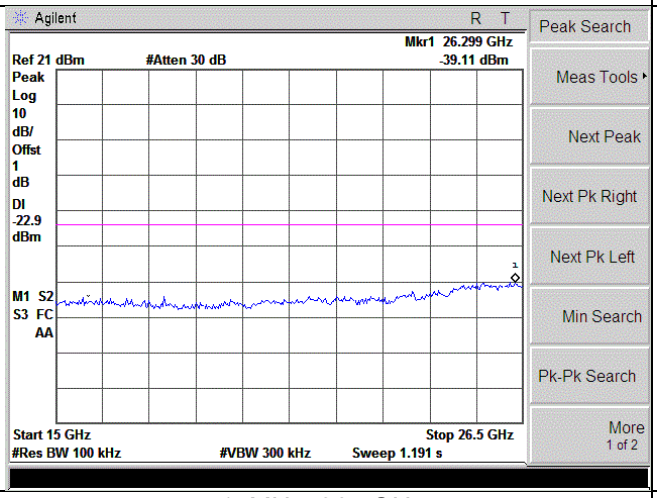

15MHz~26.5GHz

Mode:	802.11g	Test channel:	11

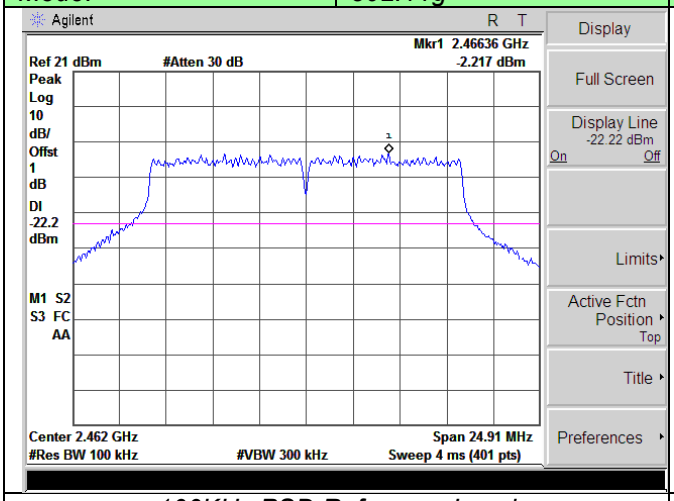

100KHz PSD Reference Level

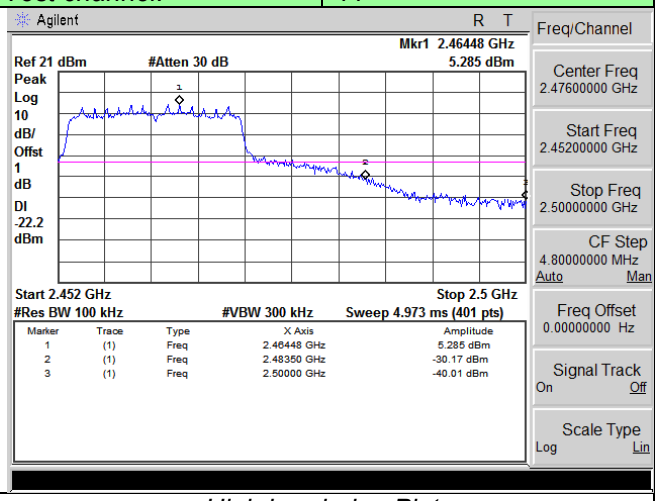

High bandedge Plot

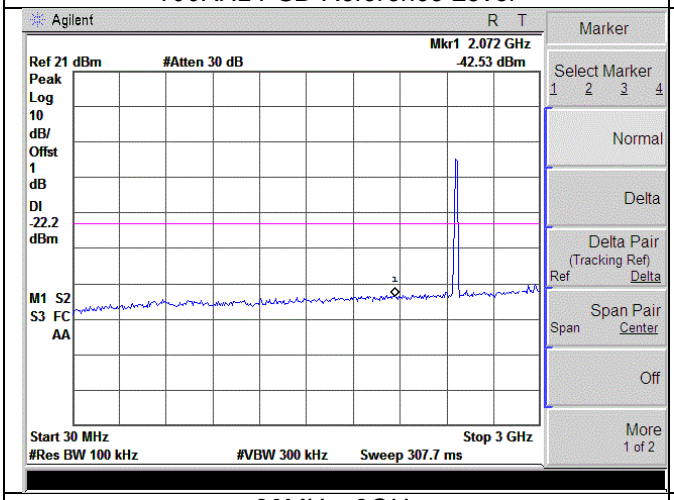

30MHz~3GHz

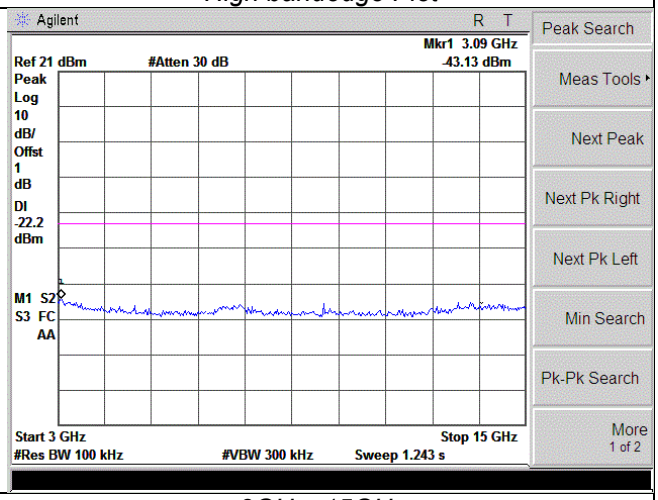

3GHz~15GHz

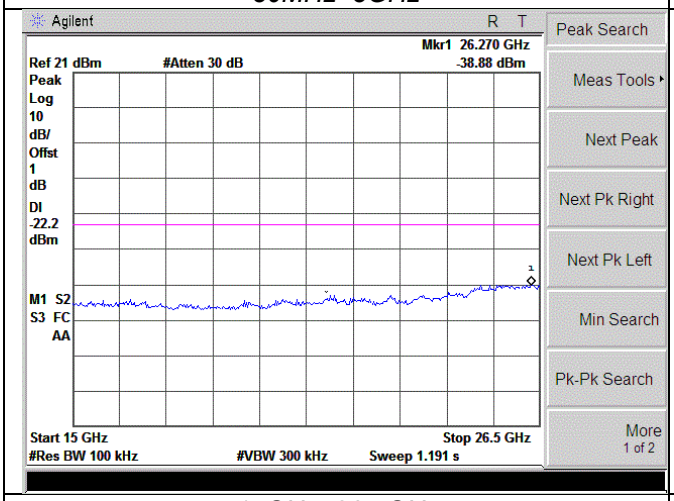

15GHz~26.5GHz

Mode:	802.11n(H20)	Test channel:	01

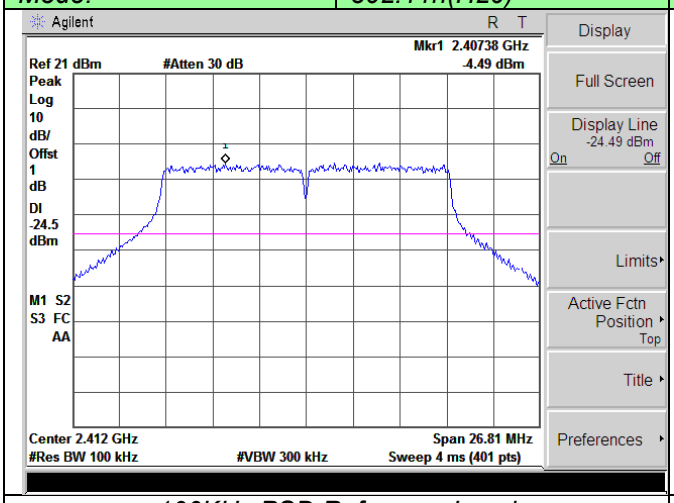

100KHz PSD Reference Level

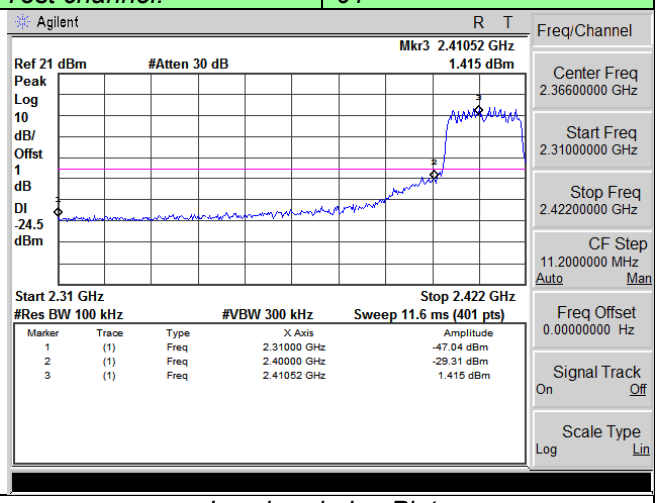

Low bandedge Plot

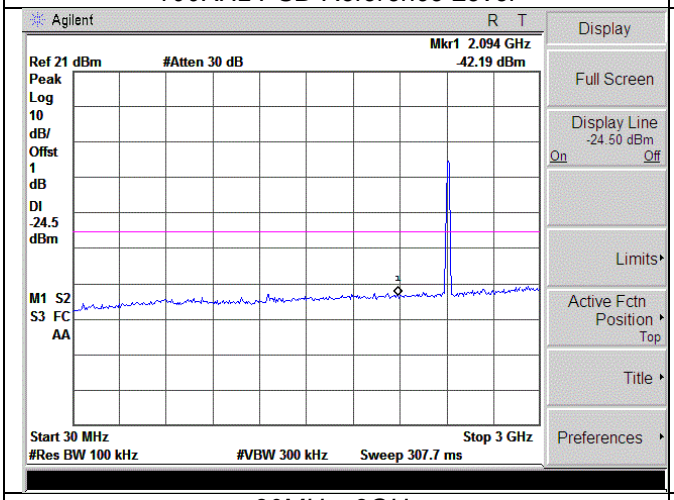

30MHz~3GHz

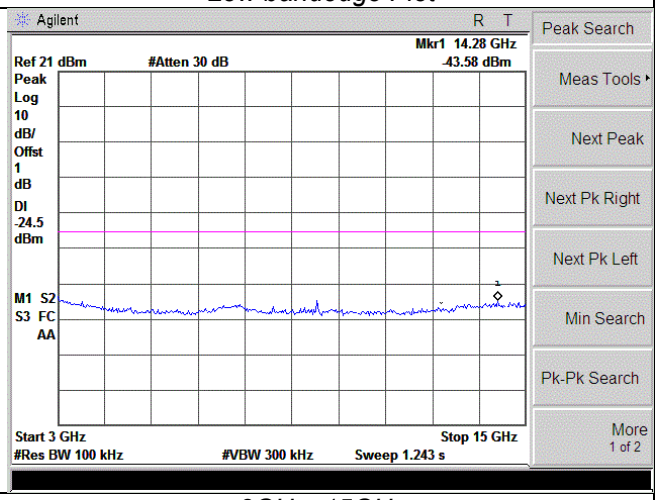

3GHz~15GHz

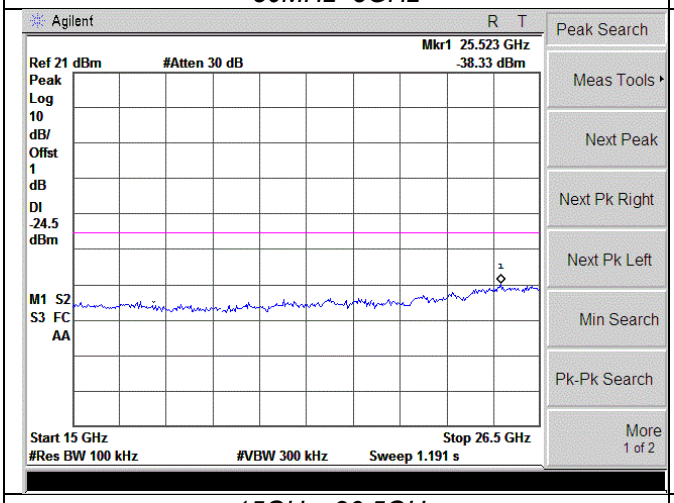

15GHz~26.5GHz

Mode:	802.11n(H20)	Test channel:	06

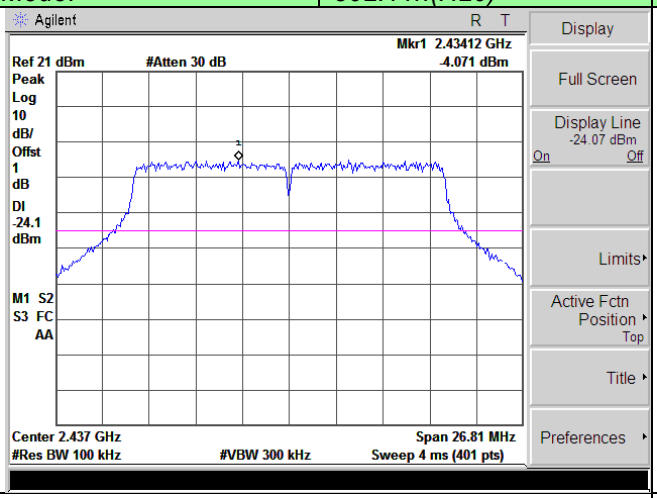

100KHz PSD Reference Level

/

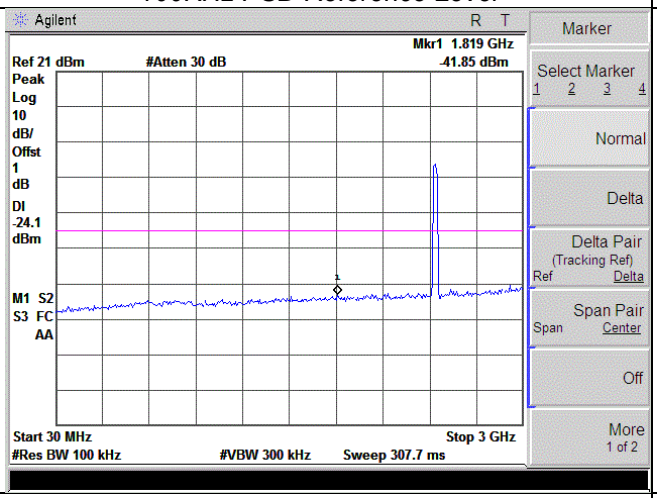

30MHz~10GHz

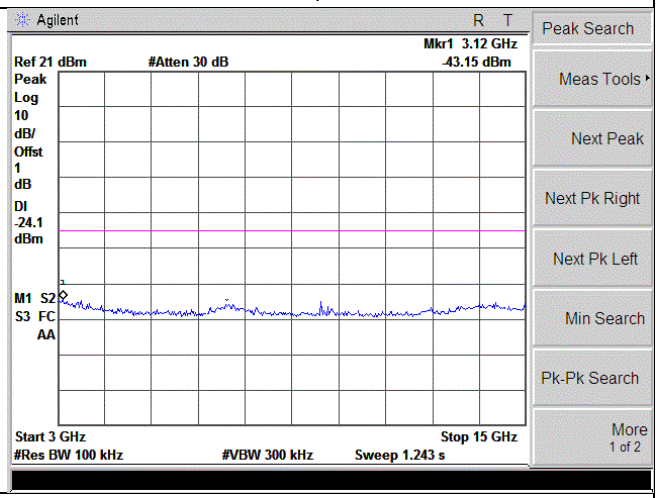

10GHz~25GHz

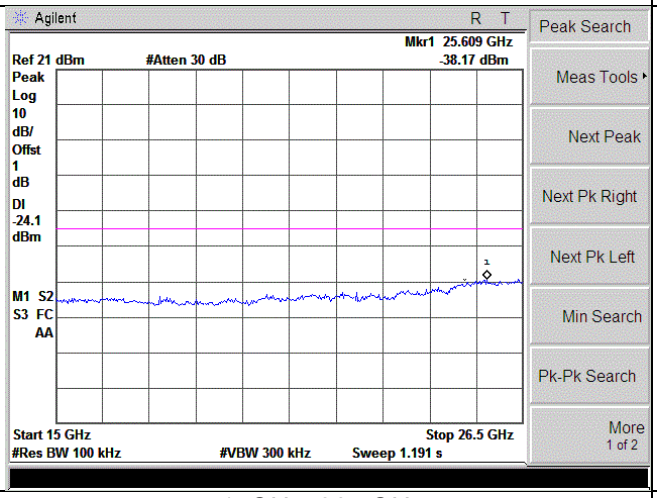

15GHz~26.5GHz

Mode:	802.11n(H20)	Test channel:	11

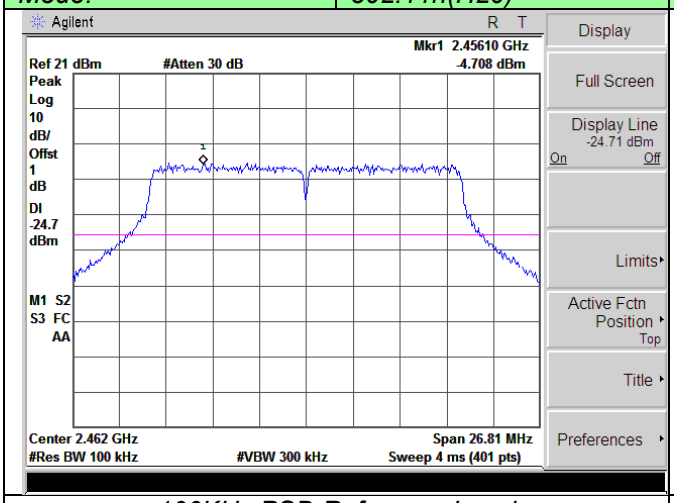

100KHz PSD Reference Level

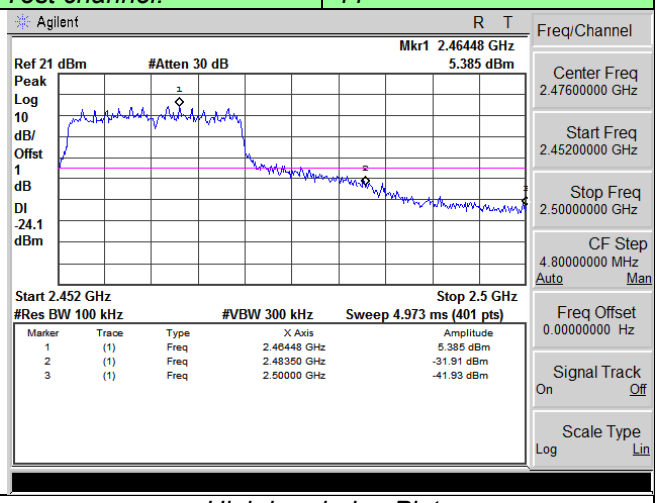

High bandedge Plot

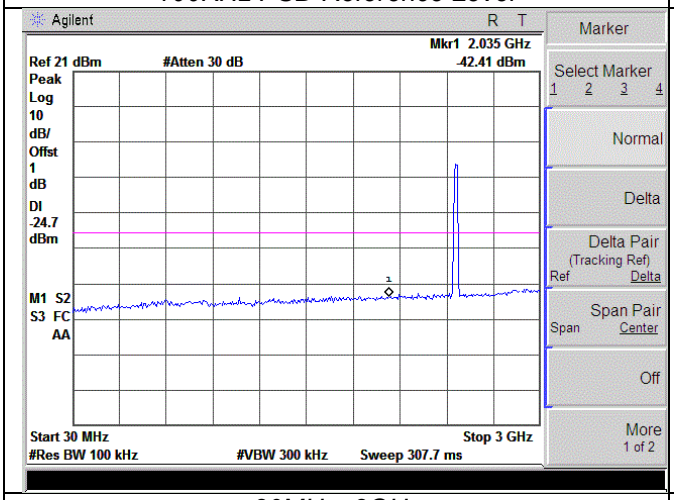

30MHz~3GHz

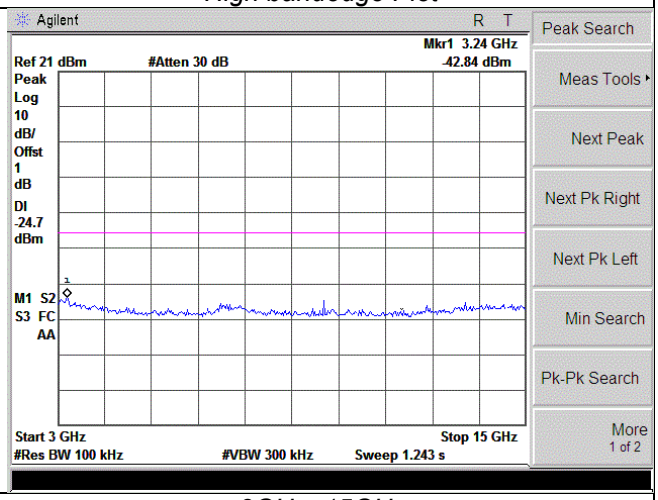

3GHz~15GHz

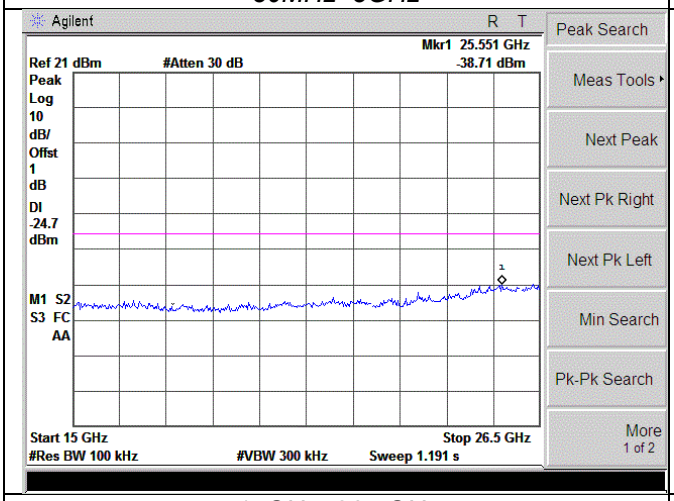

15GHz~26.5GHz

Mode:	802.11n(H40)	Test channel:	01

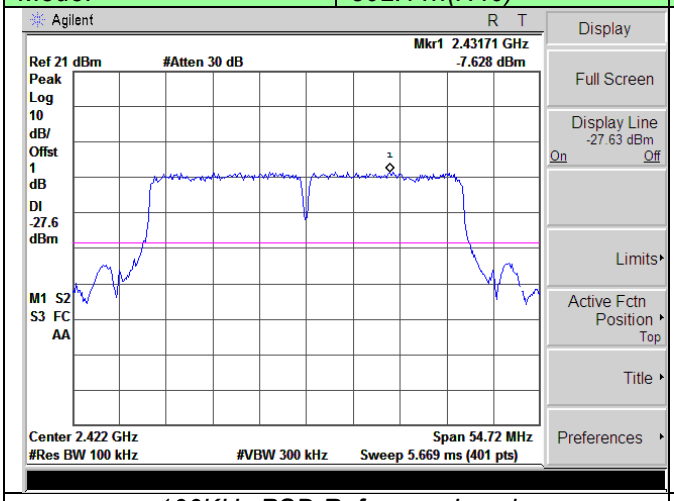

100KHz PSD Reference Level

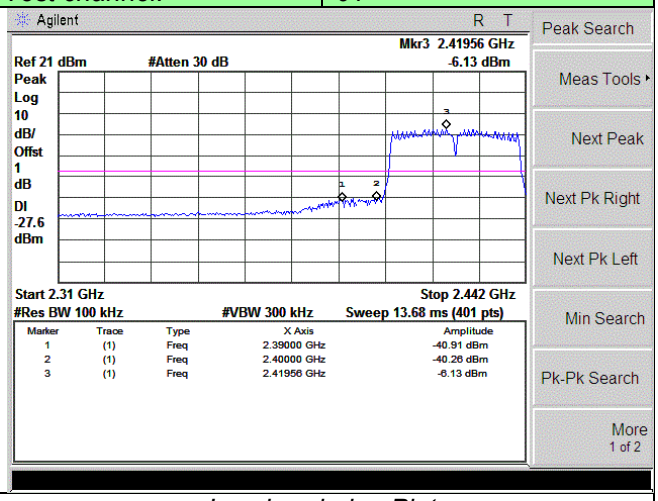

Low bandedge Plot

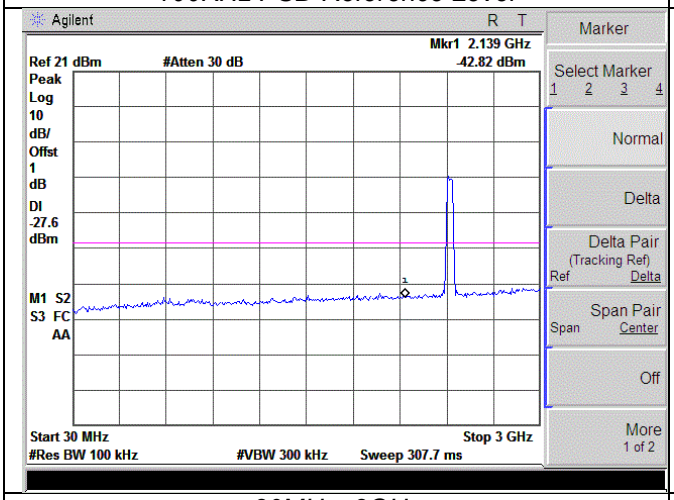

30MHz~3GHz

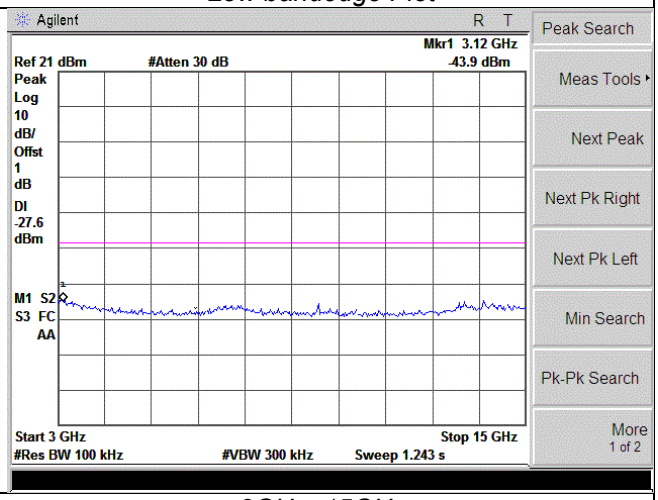

3GHz~15GHz

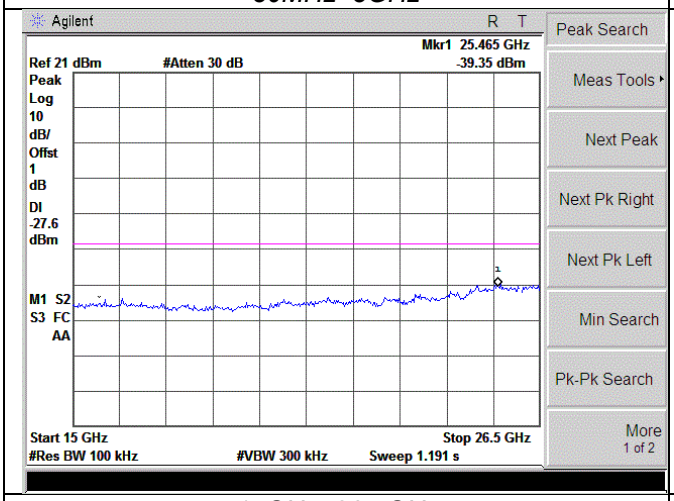

15GHz~26.5GHz

Mode:	802.11n(H40)	Test channel:	06

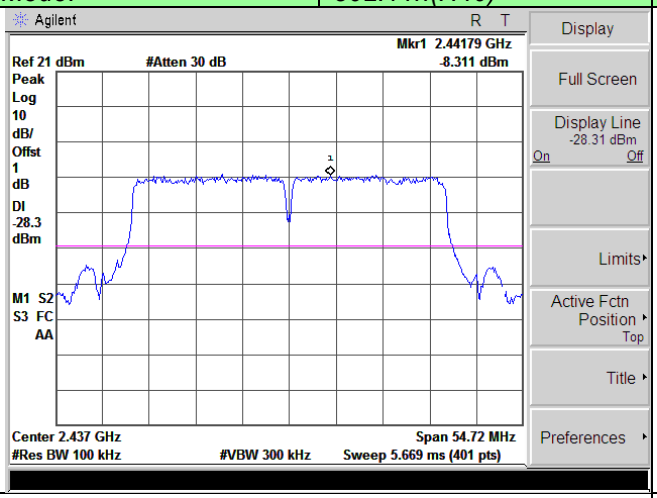

100KHz PSD Reference Level

/

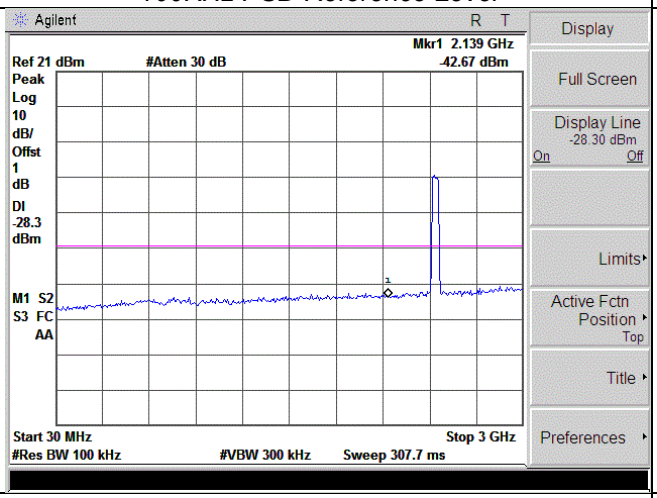

30MHz~3GHz

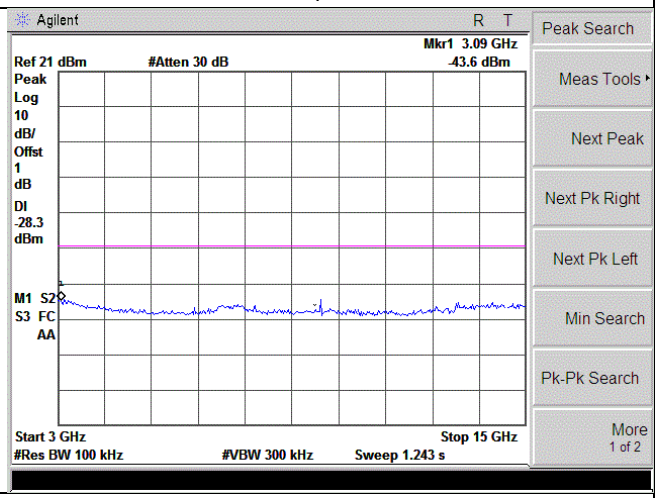

3GHz~15GHz

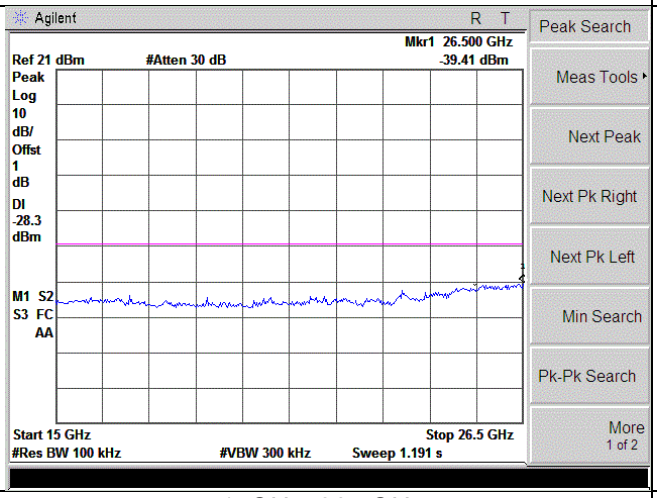

15GHz~26.5GHz

Mode:	802.11n(H40)	Test channel:	11

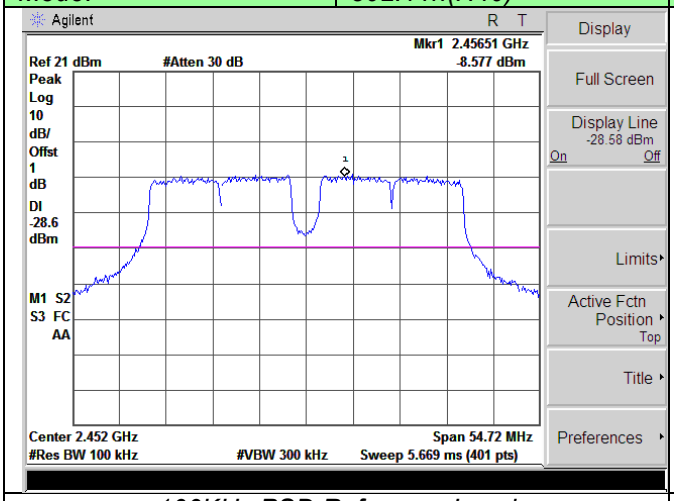

100KHz PSD Reference Level

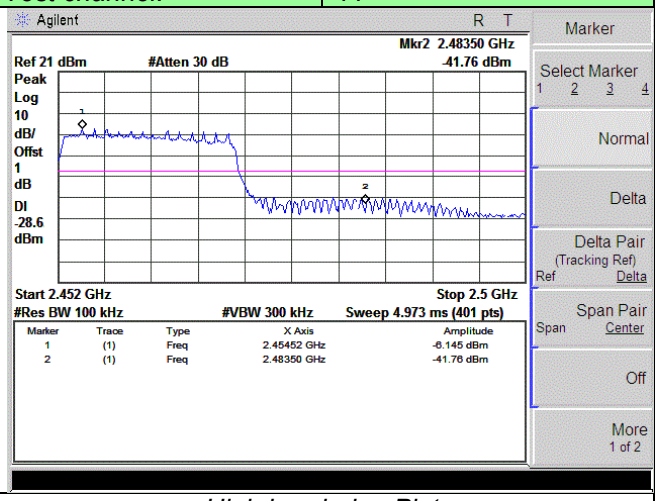

High bandedge Plot

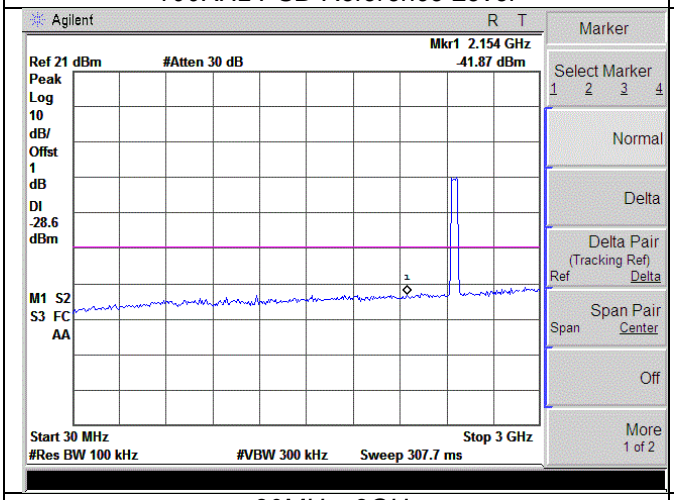

30MHz~3GHz

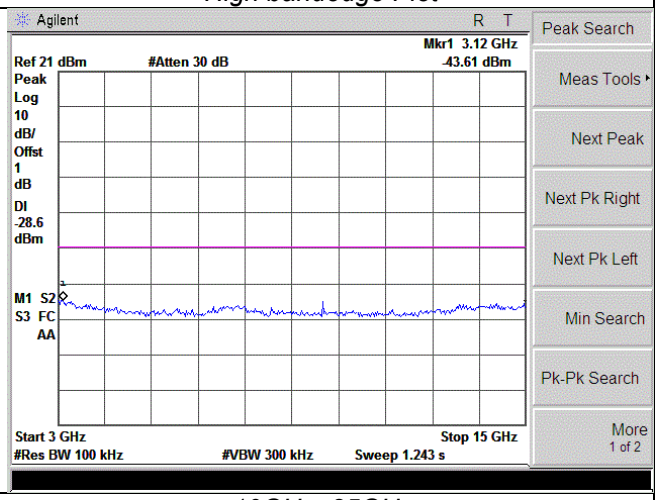

10GHz~25GHz

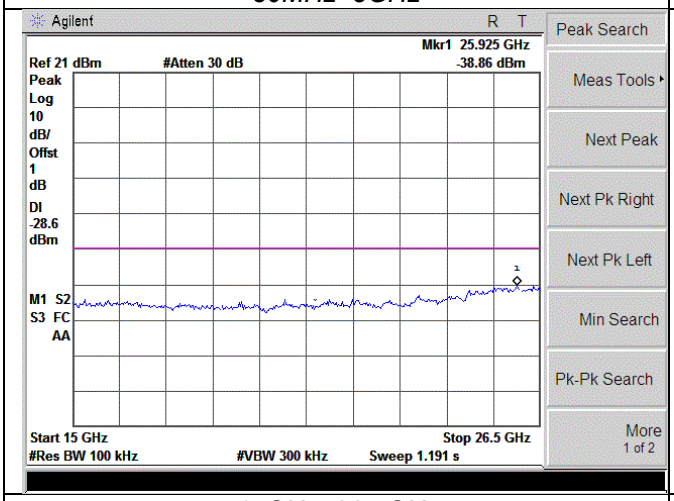

15GHz~26.5GHz

4.8. Spurious Emission (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

- 9KHz ~30MHz

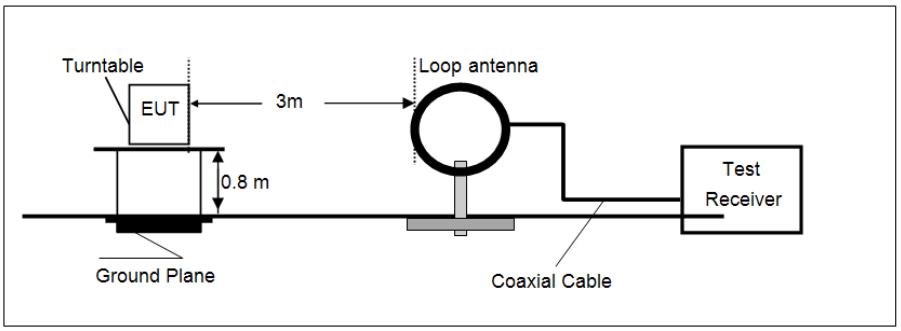

- 30MHz ~ 1GHz

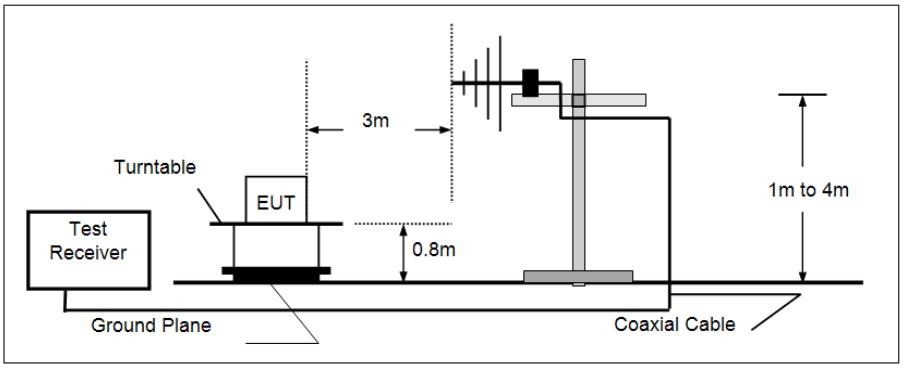

- Above 1GHz

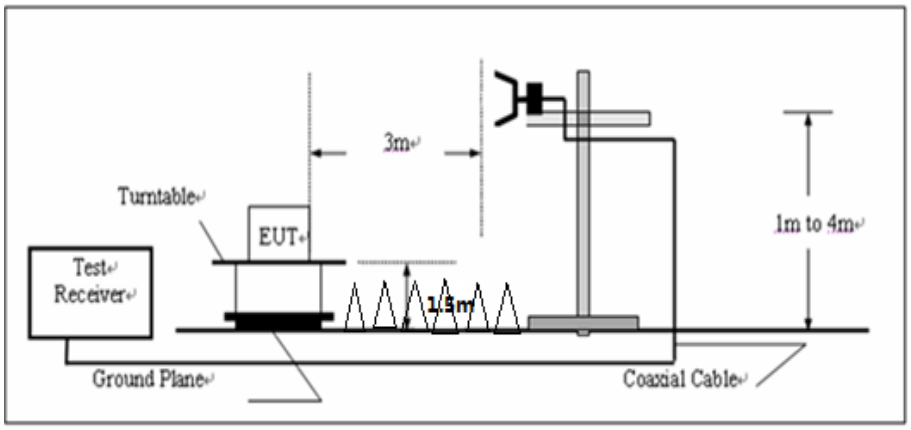

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated360 degrees to determine the position of the maximum emission level.
3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna. In order to find themaximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. Use the following spectrum analyzer settings
   (1) Span shall wide enough to fully capture the emission being measured;
   (2) Below 1GHz, RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold; *If the emission level of the EUT measured by the peak detectoris 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, theemission measurement will be repeated using the quasi-peak detector and reported.*
   (3) Above 1GHz, RBW=1MHz, VBW=3MHz for Peak value
   RBW=1MHz, VBW=10Hz for Average value.

TEST RESULTS

Noted:
Have pre-scan all modulation mode, found the 802.11b mode which it was worst case, so only the worst case's data on the test report.

Measurement data:

- **9kHz ~ 30MHz**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

- **30MHz ~ 1GHz**

SWEEP TABLE: "test (30M-1G)"

Short Description:			Field Strength		
Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.2 GHz	MaxPeak	Coupled	120 kHz	VULB9163 2014

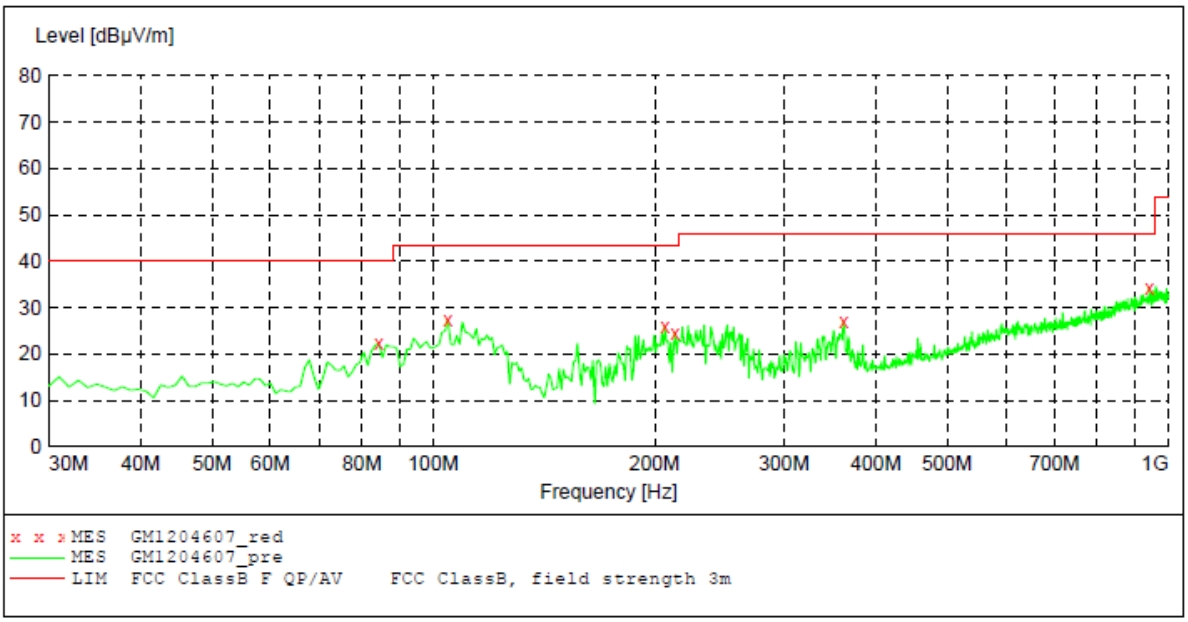

MEASUREMENT RESULT: "GM1204607_red"

12/4/2015 9:12AM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
84.320000	22.20	-17.6	40.0	17.8	QP	100.0	174.00	HORIZONTAL
104.690000	27.20	-14.7	43.5	16.3	QP	100.0	174.00	HORIZONTAL
206.540000	25.90	-13.9	43.5	17.6	QP	100.0	290.00	HORIZONTAL
213.330000	24.50	-14.1	43.5	19.0	QP	100.0	272.00	HORIZONTAL
361.740000	26.80	-11.8	46.0	19.2	QP	100.0	82.00	HORIZONTAL
941.800000	34.30	3.5	46.0	11.7	QP	100.0	198.00	HORIZONTAL

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.2 GHz	MaxPeak	Coupled	120 kHz	VULB9163 2014

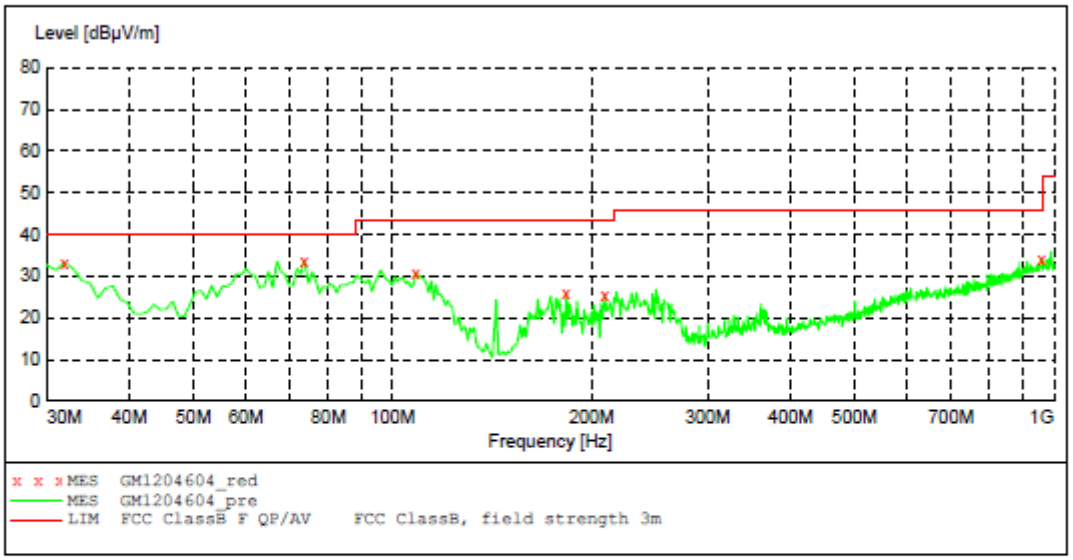

MEASUREMENT RESULT: "GM1204604_red"

12/4/2015 9:05AM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	33.30	-16.5	40.0	6.7	QP	100.0	335.00	VERTICAL
73.650000	33.80	-17.6	40.0	6.2	QP	100.0	214.00	VERTICAL
108.570000	30.80	-15.0	43.5	12.7	QP	100.0	122.00	VERTICAL
183.260000	25.90	-15.5	43.5	17.6	QP	100.0	0.00	VERTICAL
209.450000	25.60	-14.0	43.5	17.9	QP	100.0	254.00	VERTICAL
957.320000	34.10	3.8	46.0	11.9	QP	100.0	29.00	VERTICAL

■ **Above 1GHz**

CH01 for 802.11b									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
4824.00	40.3	29.18	8.61	37.99	50.46	74.00	-23.54	Vertical	Peak
7236.00	35.53	36.17	10.95	38.15	43.84	74.00	-30.16	Vertical	
9648.00	37.42	38.2	12.17	38.08	47.79	74.00	-26.21	Vertical	
12060.00	*					74.00		Vertical	
4824.00	38.68	32	9.53	38.39	50.67	74.00	-23.33	Horizontal	
7236.00	38.16	35.92	6.94	35.18	44.87	74	-28.16	Horizontal	
9648.00	40.83	38.2	12.17	38.08	48.02	74.00	-25.98	Horizontal	
12060.00	*					74.00		Horizontal	
4824.00	40.3	29.18	8.61	37.99	44.95	54.00	-9.05	Vertical	Average
7236.00	28.89	36.17	10.95	38.15	37.86	54.00	-16.14	Vertical	
9648.00	27.17	38.2	12.17	38.08	39.46	54.00	-14.54	Vertical	
12060.00	*					54.00		Vertical	
4824.00	40.88	32	9.53	38.39	44.02	54.00	-9.98	Horizontal	
7236.00	30.27	35.92	6.94	35.18	37.95	54.00	-16.05	Horizontal	
9648.00	27.96	38.2	12.17	38.08	40.25	54.00	-13.75	Horizontal	
12060.00	*					54.00		Horizontal	

CH06 for 802.11b									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
4874.00	39.42	30.91	8.99	38.34	50.28	74.00	-23.72	Vertical	Peak
7311.00	35.61	35.44	10.53	38.02	44.32	74.00	-29.68	Vertical	
9748.00	37.67	38.02	12.17	38.08	47.65	74.00	-26.35	Vertical	
12185.00	*					74.00		Vertical	
4874.00	38.61	30.24	8.81	38.17	49.68	74.00	-24.32	Horizontal	
7311.00	36.96	35.44	10.53	38.02	45.25	74.00	-28.75	Horizontal	
9748.00	37.54	38.2	12.17	38.08	47.06	74.00	-26.94	Horizontal	
12185.00	*					74.00		Horizontal	
4874.00	42.52	30.91	8.99	38.34	44.08	54.00	-9.92	Vertical	Average
7311.00	29.99	35.44	10.53	38.02	37.94	54.00	-16.06	Vertical	
9748.00	27.57	38.02	12.17	38.08	39.68	54.00	-14.32	Vertical	
12185.00	*					54.00		Vertical	
4874.00	43.37	30.24	8.81	38.17	44.25	54.00	-9.75	Horizontal	
7311.00	29.3	35.44	10.53	38.02	37.25	54.00	-16.75	Horizontal	
9748.00	27.55	38.2	12.17	38.08	39.84	54.00	-14.16	Horizontal	
12185.00	*					54.00		Horizontal	

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

CH11 for 802.11b									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
4924.00	45.36	31.17	9.31	38.62	49.52	74.00	-24.48	Vertical	Peak
7386.00	35.45	36.72	11.24	38.24	43.58	74.00	-30.42	Vertical	
9848.00	37.16	38.33	12.39	38.12	48.42	74.00	-25.58	Vertical	
12310.00	*					74.00		Vertical	
4924.00	49.00	31.17	9.31	38.62	50.64	74.00	-23.36	Horizontal	
7386.00	39.42	36.13	10.93	38.14	44.36	74.00	-29.64	Horizontal	
9848.00	41.02	38.33	12.39	38.12	47.95	74.00	-26.05	Horizontal	
12310.00	*					74.00		Horizontal	
4924.00	42.51	31.17	9.31	38.62	44.37	54.00	-9.63	Vertical	Average
7386.00	27.92	36.72	11.24	38.24	37.64	54.00	-16.36	Vertical	
9848.00	26.76	38.33	12.39	38.12	39.36	54.00	-14.64	Vertical	
12310.00	*					54.00		Vertical	
4924.00	42.39	31.17	9.31	38.62	44.25	54.00	-9.75	Horizontal	
7386.00	29.14	36.13	10.93	38.14	38.06	54.00	-15.94	Horizontal	
9848.00	26.83	38.33	12.39	38.12	39.43	54.00	-14.57	Horizontal	
12310.00	*					54.00		Horizontal	

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

5. Test Setup Photos of the EUT

Radiated Emission

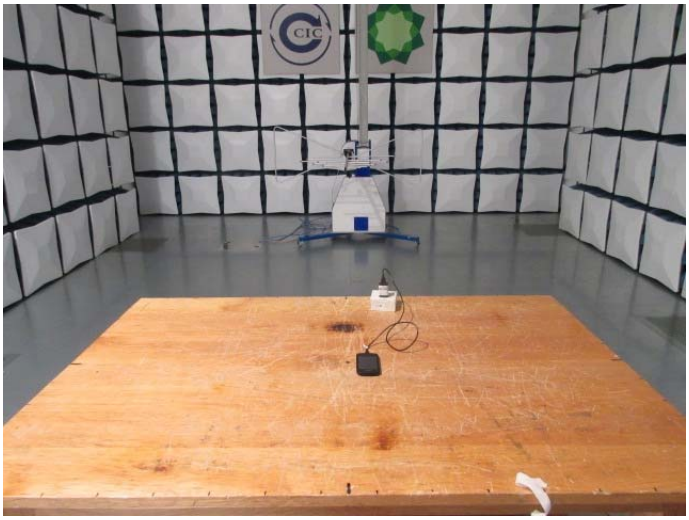

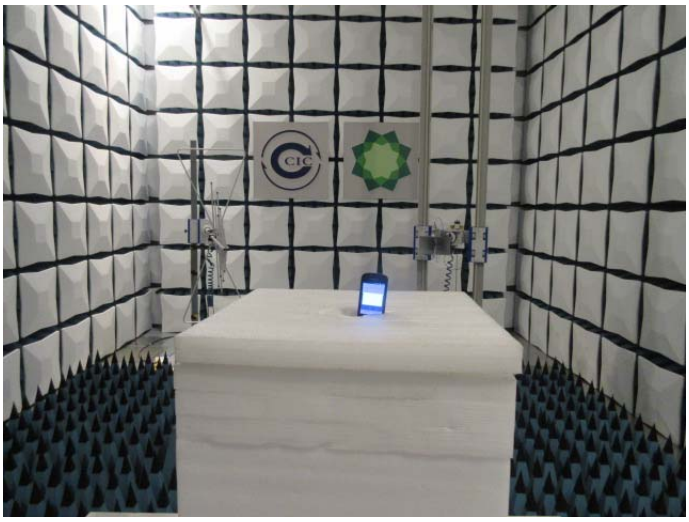

Conducted Emission (AC Mains)

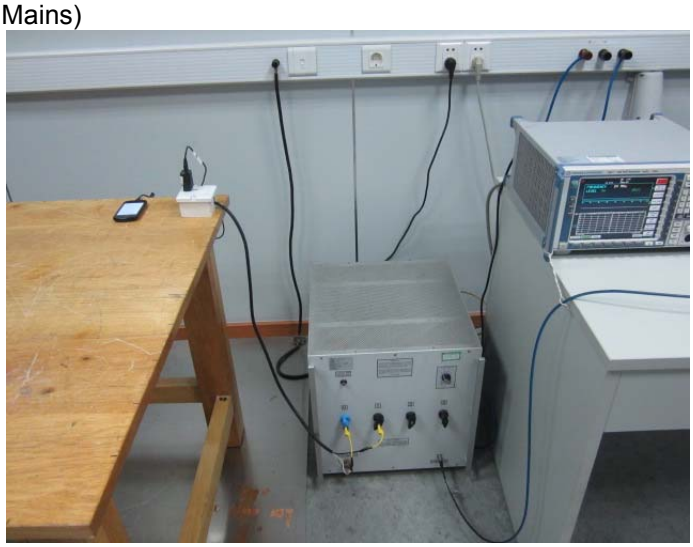

6. External and Internal Photos of the EUT

Reference to the test report No. TRE1511016201

.....End of Report.....