**CETECOM™****CETECOM ICT Services**
consulting - testing - certification >>>

TEST REPORT

Test report no.: 1-0660/15-01-02-C

Deutsche
Akkreditierungsstelle
D-PL-12076-01-00

Testing laboratory

CETECOM ICT Services GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>e-mail: ict@cetecom.com**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-00

Applicant

Verity Studios AG

Sonneggstrasse 3

8006 Zurich / Switzerland

Phone: +41 44 586 5588

Fax: +41 44 632 1139

Contact: Markus Hehn

mailto: mhehn@veritystudios.com

Phone: +41 44 632 9272

Manufacturer

Verity Studios AG

Sonneggstrasse 3

8006 Zurich / Switzerland

Test standard/s

CFR47 Part 15F

Ultra-Wideband Operation

RSS-220

Devices Using Ultra-Wideband (UWB) Technology

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Custom UWB Transceiver**Model name:** 6 Band UWB Transceiver**FCC ID:** 2AGUC-KDGXVA**IC:** 20830-KDGXVA**Frequency:** 3.17 GHz – 7.01 GHz (FCC)
5.97 GHz – 7.01 GHz (IC)**Technology tested:** UWB**Antenna:** Integrated antenna**Power supply:** 12-24 V DC by power supply**Temperature range:** 0°C to +50°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

cn=Meheza Walla, o=CETECOM ICT
Services GmbH, ou=WAL-151005,
email=Meheza.Walla@cetecom.com, c=DE
2016.02.10 10:14:16 +01'00'

Meheza Walla
Lab Manager
Radio Communications & EMC

Test performed:

Benedikt Gerber
cn=Benedikt Gerber, o=CETECOM ICT Services
GmbH, ou=Radio Communications & EMC,
email=benedikt.gerber@cetecom.com, c=DE
2016.02.09 15:45:42 +01'00'

Benedikt Gerber
Testing Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
3	Test standard/s	3
4	Test environment	4
5	Test item	4
5.1	General description	4
5.2	Operating conditions	5
5.3	Additional information	5
6	Test laboratories sub-contracted	5
7	Description of the test setup	6
7.1	Shielded semi anechoic chamber	7
7.2	Shielded fully anechoic chamber	9
7.3	Radiated measurements > 12.75 GHz	10
7.4	AC conducted	11
8	Summary of measurement results	12
9	Additional comments	13
10	Measurement results	14
10.1	UWB Bandwidth	14
10.2	TX Radiated Emissions	31
10.3	RX spurious emissions AC line conducted < 30 MHz	75
10.4	RX spurious emissions radiated	78
Annex A	Document history	79
Annex B	Further information	79
Annex C	Accreditation Certificate	80
Annex D	Attestation statement	81

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-0660/15-01-02-B and dated 2016-02-04.

2.2 Application details

Date of receipt of order:	2015-10-30
Date of receipt of test item:	2015-11-11
Start of test:	2015-11-11
End of test:	2016-02-04
Person(s) present during the test:	Markus Hehn Piotr Roszak

3 Test standard/s

Test standard	Date	Test standard description
CFR47 Part 15F	2012/10	Ultra-Wideband Operation
RSS-220	2009/03	Devices Using Ultra-Wideband (UWB) Technology

4 Test environment

Temperature	:	T_{nom} T_{max} T_{min}	+22 °C during room temperature tests -/- °C during high temperature tests -/- °C during low temperature tests
Relative humidity content	:		55 %
Barometric pressure	:		not relevant for this kind of testing
Power supply	:	V_{nom} V_{max} V_{min}	24 V DC by power supply -/- V -/- V

5 Test item

5.1 General description

Kind of test item	:	Custom UWB Transceiver
Type identification	:	6 Band UWB Transceiver
HMN	:	-/-
PMN	:	Kedge XV
HVIN	:	Kedge XV
FVIN	:	-/-
S/N serial number	:	PROTO1, PROTO2, PROTO3, PROTO4
HW hardware status	:	Rev. 1
SW software status	:	V0.5C
Frequency band	:	3.17 GHz to 7.01 GHz for FCC Part 15F 5.97 GHz to 7.01 GHz for RSS-220
Type of radio transmission	:	UWB
Use of frequency spectrum	:	
Type of modulation	:	BPSK/BPM
Number of channels	:	6 channels tested (only two channels applicable for RSS-220, see also 5.2)
Antenna	:	Integrated antenna
Power supply	:	12-24 V DC by power supply
Temperature range	:	0°C to +50°C

5.2 Operating conditions

Condition	Channel no.	Nominal center frequency [MHz]	approx. Nominal bandwidth [MHz]	Pulse Repetition Frequency [MHz]	Transmitter gain in final measurements [dB]	Pulse Generator Delay in final measurements [register value]
1	1	3494,4	500	16	23,0	0xB5
2	1	3494,4	500	64	16,0	0xB5
3	2	3993,6	500	16	19,5	0xC0
4	2	3993,6	500	64	13,5	0xC0
5	3	4492,8	500	16	15,0	0xC5
6	3	4492,8	500	64	9,0	0xC5
7	4	3993,6	1300	16	24,0	0x95
8	4	3993,6	1300	64	19,0	0x95
9*	5	6489,6	500	16	20,0	0xB4
10*	5	6489,6	500	64	15,0	0xB4
11*	7	6489,6	1000	16	18,5	0x93
12*	7	6489,6	1000	64	11,5	0x93

For each Channel, two data rates are available (110kBps, 850kBps)

* only operating conditions 9-12 are applicable for RSS220 other operating conditions **do not** fulfill the requirements of RSS220 (5.2.1) (indoor UWB Device)

5.3 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report: 1-0660/15-01-02_AnnexE
1-0660/15-01-02_AnnexF

6 Test laboratories sub-contracted

None

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
v/k!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

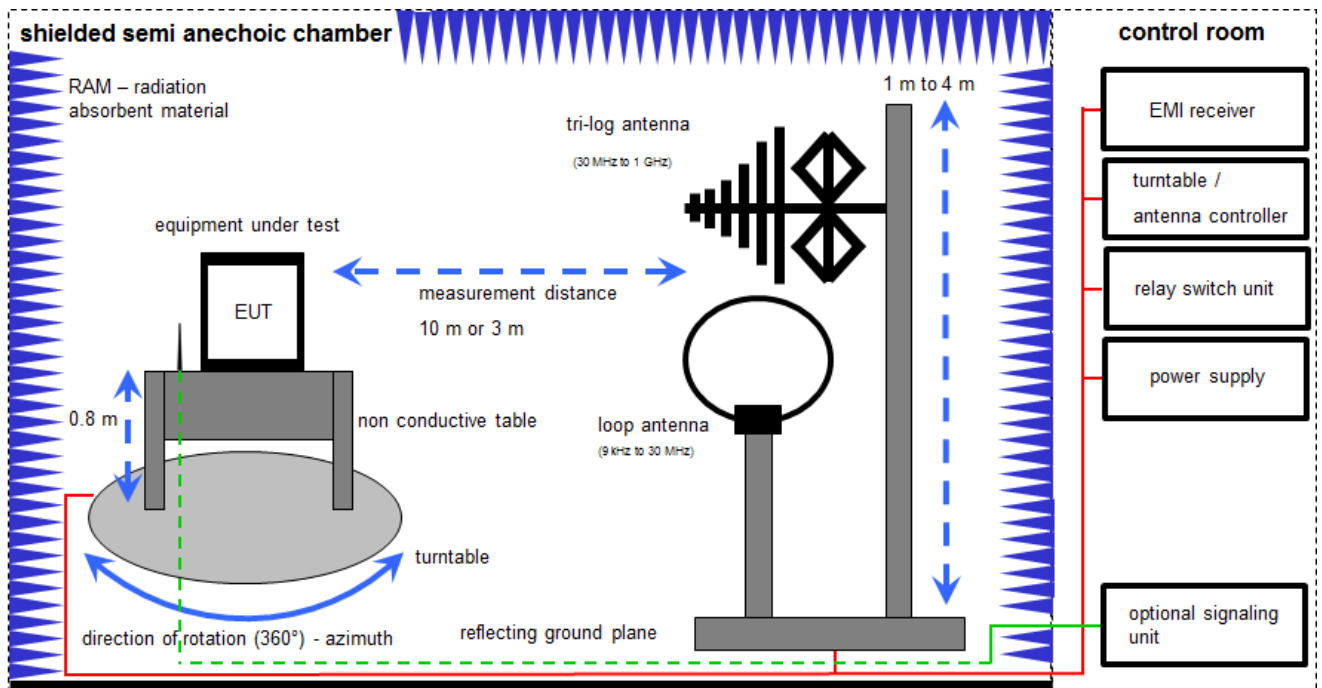

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	1	45	Switch-Unit	3488A	HP	2719A14505	300000368	ev	
2	2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2920A04466	300000580	ne	
3	3	n. a.	software	SPS_PHE 1.4f	Spitzenberger & Spiess	B5981; 5D1081; B5979	300000210	ne	
4	4	n. a.	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	26.01.2015
5	5	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	Ve	11.02.2014
6	6	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev	
7	7	n. a.	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	
8	8	n. a.	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	
9	9	n. a.	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	
10	10	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	22.04.2014
11	11	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	26.01.2015

7.2 Shielded fully anechoic chamber

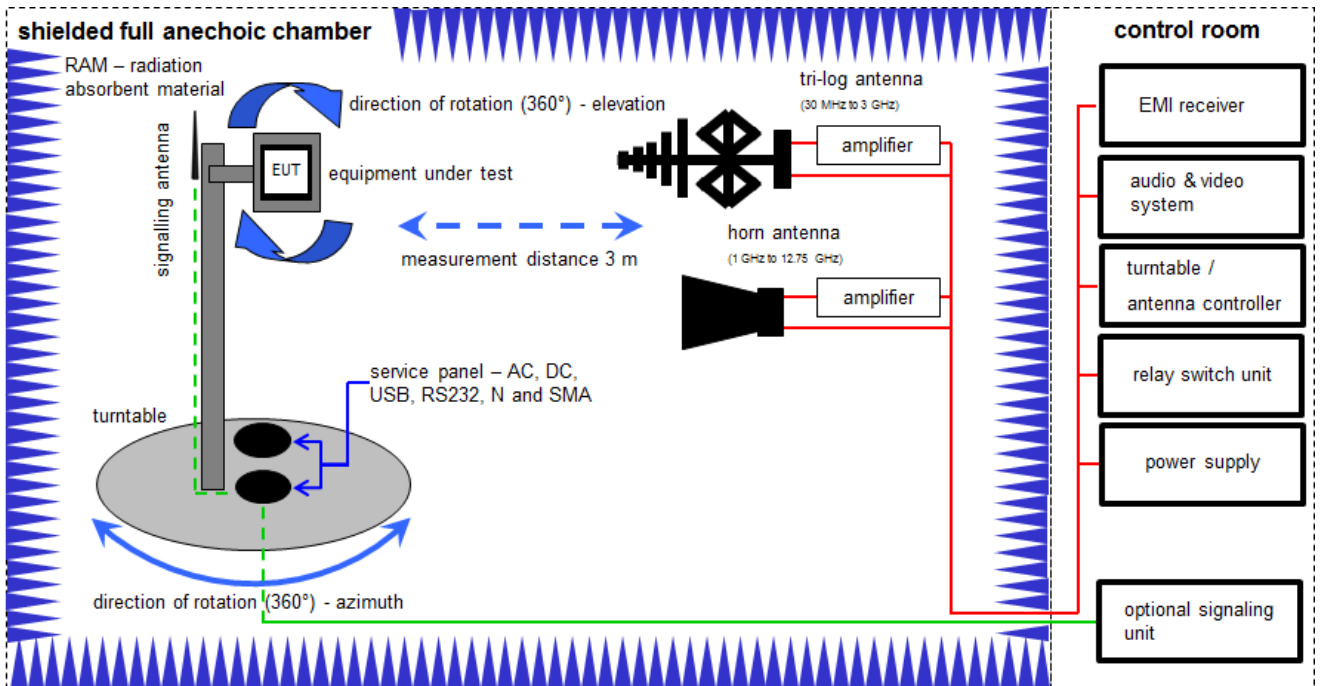

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)


Example calculation:

$$OP \text{ [dBm]} = -65.0 \text{ [dBm]} + 50 \text{ [dB]} - 20 \text{ [dBi]} + 5 \text{ [dB]} = -30 \text{ [dBm]} (1 \mu\text{W})$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Ultra Stable Notch Filter	WRCD1887.82/1889.55-5EE	Wainwright	1	300000115	ne		
2	n. a.	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	22.01.2015	22.01.2016
3	n. a.	Tunable Band Reject (FDD I)	WRCT1850/2170-5/40-10EEK	Wainwright	7	300003386	ne		
4	n. a.	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
5	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	318	300003696	k	22.04.2014	22.04.2017
6	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	26.01.2015	26.01.2016
7	n. a.	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22050	300004482	ev		
8	n. a.	Broadband Amplifier 5-13 GHz	CBLU5135235	CERNEX	22011	300004492	ev		
9	n. a.	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne		
10	n. a.	Messrechner und Monitor	Intel Core i3 3220/3,3 GHz, Prozessor	Agilent Technologies	2V2403033A5421	300004591	ne		
11	n. a.	NEXIO EMV-Software	BAT EMC	EMCO	2V2403033A5421	300004682	ne		

7.3 Radiated measurements > 12.75 GHz

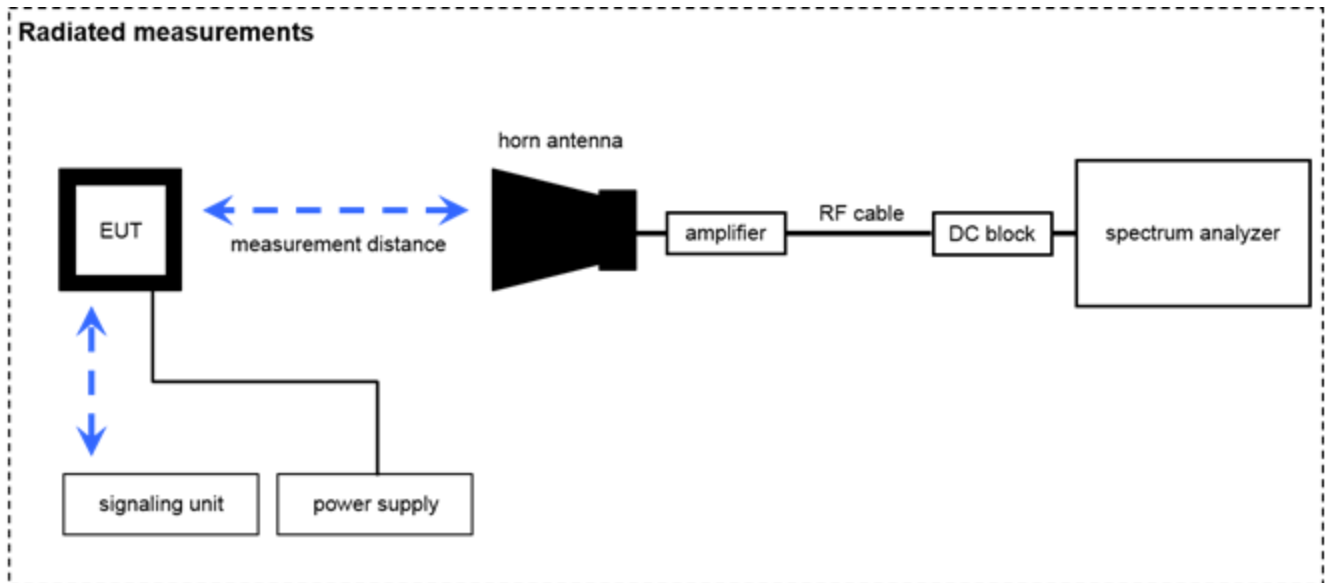

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)


Example calculation:

$$OP [dBm] = -59.0 [dBm] + 44.0 [dB] - 20.0 [dBi] + 5.0 [dB] = -30 [dBm] (1 \mu W)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	CR 79	Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	7911	300001751	ne		
2	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev		
3		Microwave System Amplifier, 0.1-26.5 GHz	83006A	HP	00499	300000211	ev		
4	C101	Cable SMA	ST18/SMAM/SMAM/72	Huber&Suhner	Order:84004007 Batch:699714		ev		
5	C2019	Cable K-Type	KPS-1533-390-KPS	Insulated Wire Inc	101995	300002288	ev		
6	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787	NK!		
7	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8205	300002442	NK!		
8	A029	Power Supply	LA30/5GA	Zentro	2046	300000711	NK!		
9	A037	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3089	300000307	Ve	02.10.2014	02.10.2016
10	n. a.	Broadband LNA 18-50 GHz	CBL18503070PN	CERNEX	25240	300004948	ev		
11		Spectrum Analyser (2 Hz – 26.5 GHz)	FSW 26	R&S	101455	300004528	Ve	28.01.2017	
12		Spectrum Analyser (20 Hz – 50 GHz)	FSU 50	R&S	200012	300003443	Ve	02.10.2014	02.10.2016

7.4 AC conducted

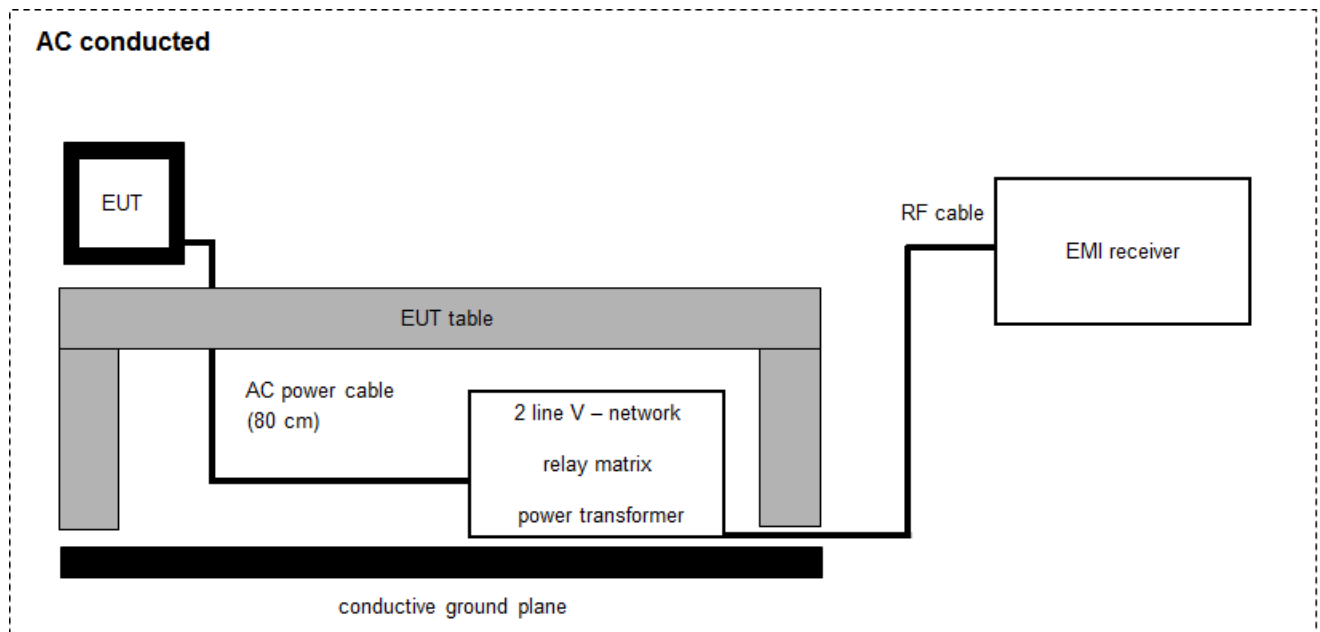

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:

$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] \quad (244.06 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Netznachbildung	ESH3-Z5	R&S	892475/017	300002209	k	17.06.2014	17.06.2016
2	68	EMI-Receiver	8542E	HP	3617A00170	300000568	k	28.01.2015	28.01.2016
3	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	Ve	11.02.2014	11.02.2016

8 Summary of measurement results

☒	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☐	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR47 Part 15 RSS-220, Issue 1	see table	2016-02-09	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Pass	Fail	NA	NP	Remark
§15.503(d) / RSS-220(5.1)	UWB Bandwidth (10dB Bandwidth)	Nominal	Nominal	☒	☐	☐	☐	complies
§15.517(c)(e) §15.209 RSS220 (5.2.1)	TX Radiated Emissions	Nominal	Nominal	☒	☐	☐	☐	see Note on page 34 and Annex D
§15.109 / RSS-Gen	RX Radiated Emissions	Nominal	Nominal	☒	☐	☐	☐	complies

Note: NA = Not Applicable; NP = Not Performed

9 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:

☐ No test mode available.

☒ Special software is used.
EUT is in a continuous transmission mode

10 Measurement results

10.1 UWB Bandwidth

Description:

§15.503 (a): For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as abased on complete transmission system including antenna.

Measurement:

Measurement parameter	
Detector:	Peak
Video bandwidth:	1 MHz
Resolution bandwidth:	3 MHz
Trace-Mode:	Max Hold

Test Setup: 7.3

Limits:

§15.503 (d): *Ultra-wideband (UWB) transmitter*. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

RSS220 (5.1a) The -10 dB bandwidth of the device shall be totally contained in the band 3.1-10.6 GHz.

Results:


Operating Condition	Data rate [kBps]	Lower -10 dB point [GHz]	Higher -10 dB point [GHz]	UWB bandwidth [MHz]	Plot
1	110	3.22988	3.75542	525.54	1
	850	3.17077	3.80800	637.23	2
2	110	3.24049	3.75272	512.23	3
	850	3.23528	3.74580	510.52	4
3	110	3.74191	4.27587	533.96	5
4	110	3.74581	4.26744	521.63	6
5	110	4.23709	4.73942	502.33	7
6	110	4.23200	4.74190	503.90	8
7	110	3.48557	4.49519	1009.62	9
8	110	3.48473	4.50396	1019.23	10
9	110	6.23410	6.74550	511.40	11
10	110	6.23890	6.80621	567.31	12
11	110	5.98320	6.99762	1014.42	13
	850	5.97838	7.01023	1031.85	14
12	110	5.98320	7.00062	1017.42	15

Time domain measurements:

Operating Condition	Data rate [kBps]	Plot
1	110	16
	850	17
2	110	18
	850	19
3	110	20
4	110	21
5	110	22
6	110	23
7	110	24
8	110	25
9	110	26
10	110	27
11	110	28
	850	29
12	110	30


Verdict: Compliant

Plot 1:

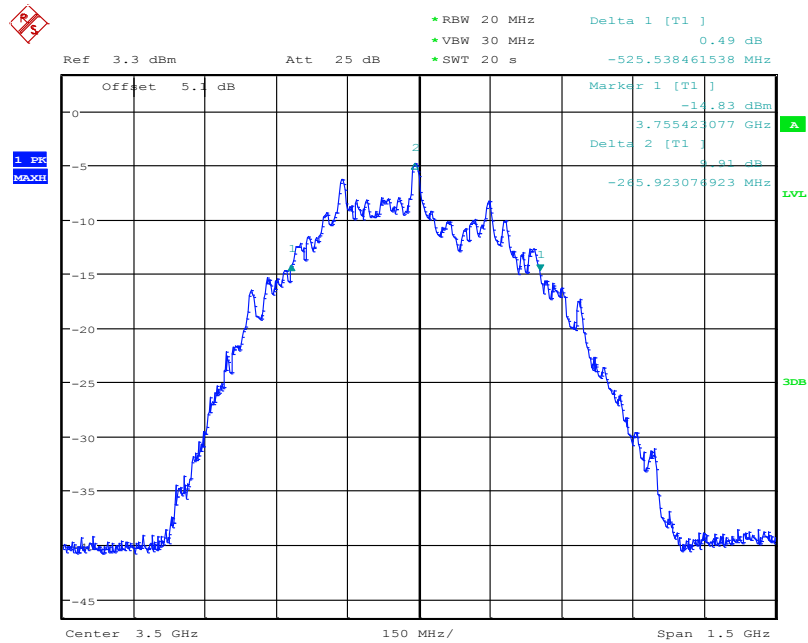


Date: 11.NOV.2015 18:09:48

Plot 2:

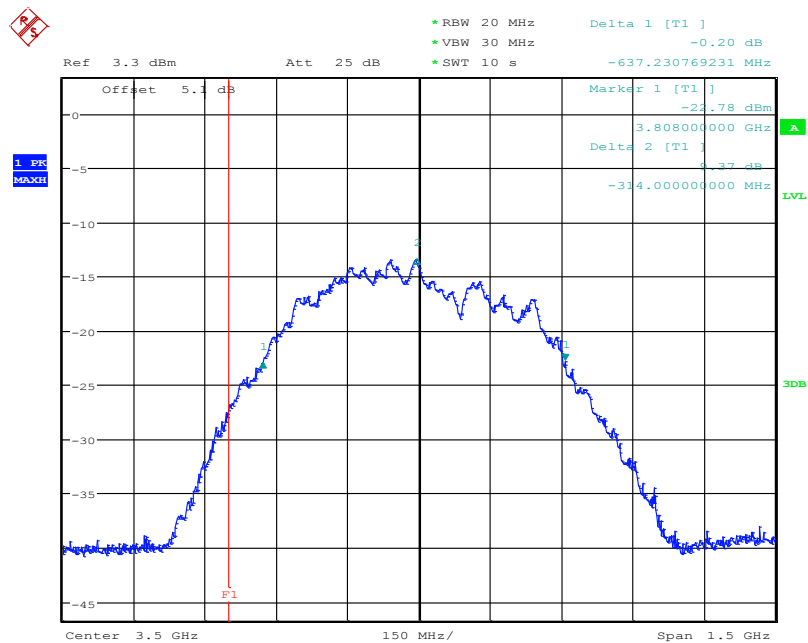


Date: 11.NOV.2015 18:15:07

Plot 3:

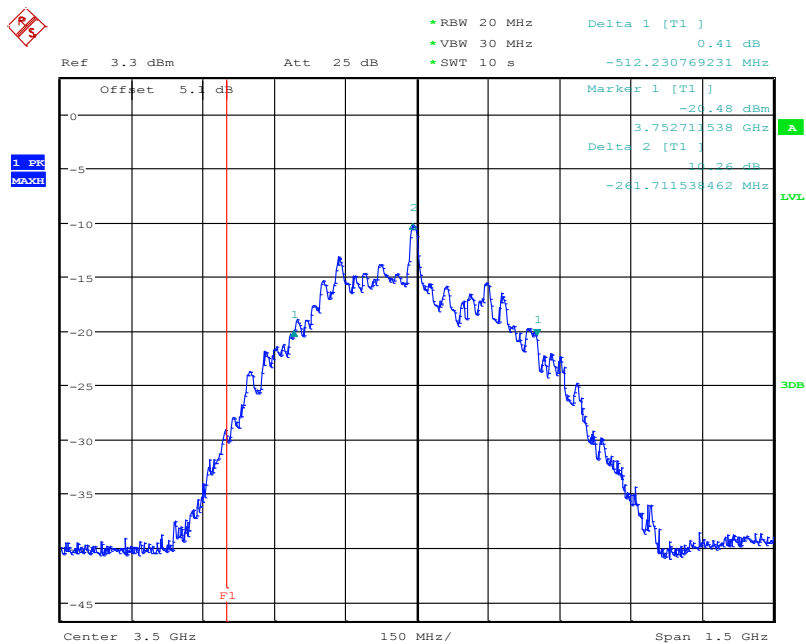


Date: 11.NOV.2015 18:17:31

Plot 4:

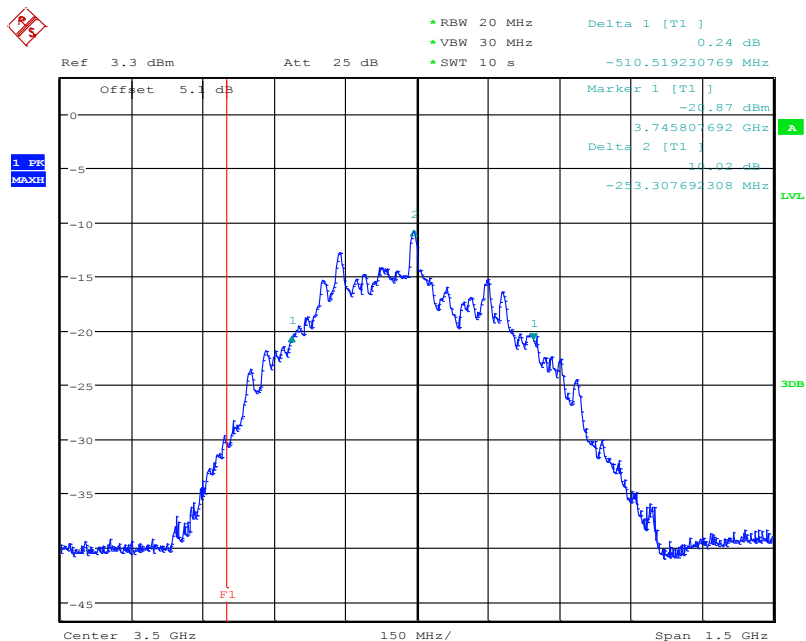


Date: 11.NOV.2015 18:26:37

Plot 5:

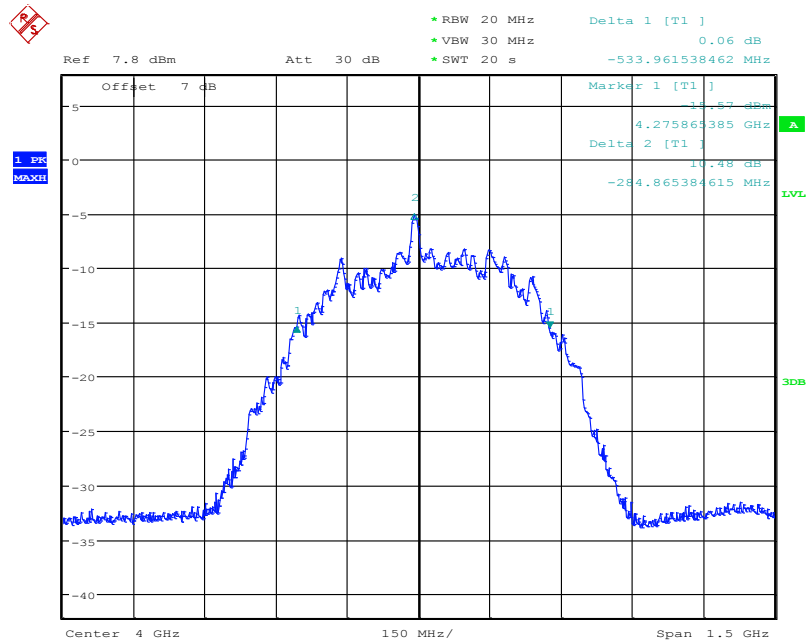


Date: 11.NOV.2015 17:13:29

Plot 6:

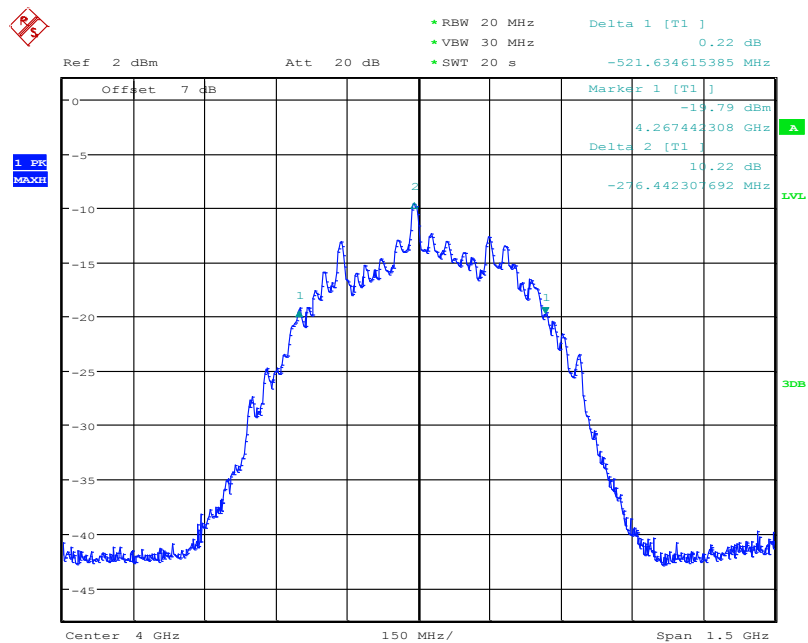


Date: 12.NOV.2015 08:54:49

Plot 7:

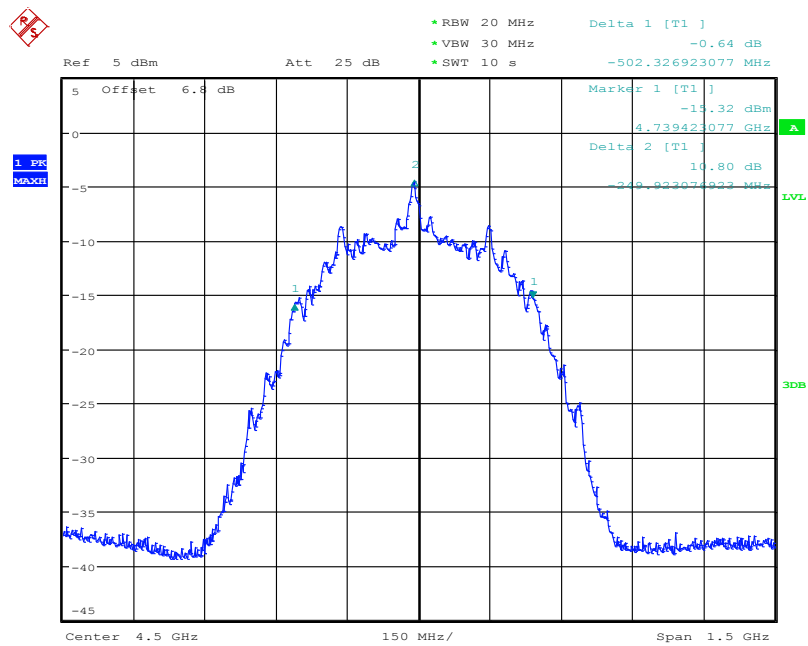


Date: 11.NOV.2015 17:58:44

Plot 8:

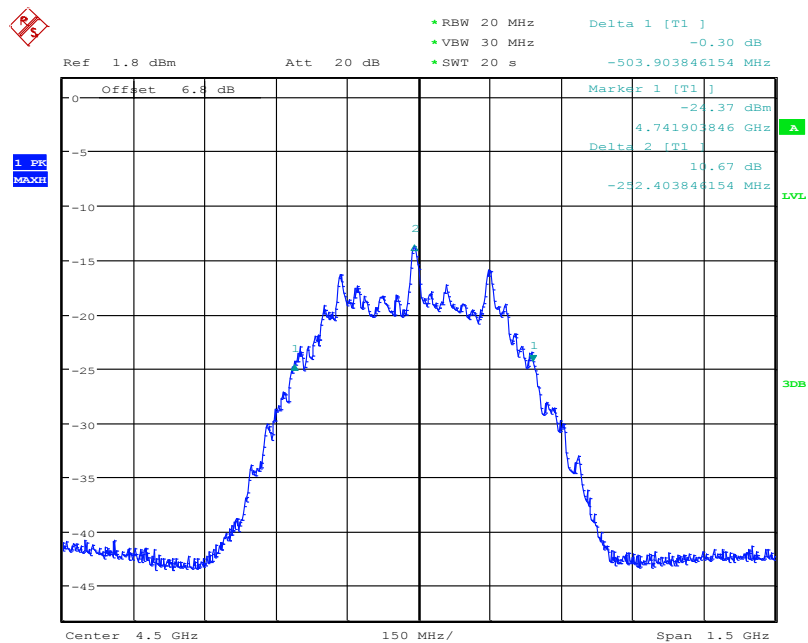


Date: 12.NOV.2015 08:50:58

Plot 9:

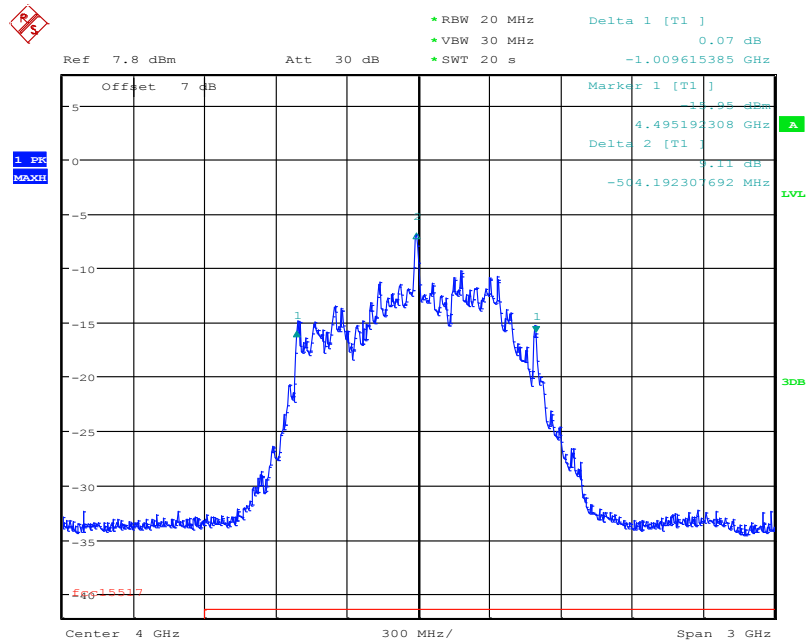


Date: 11.NOV.2015 16:59:50

Plot 10:

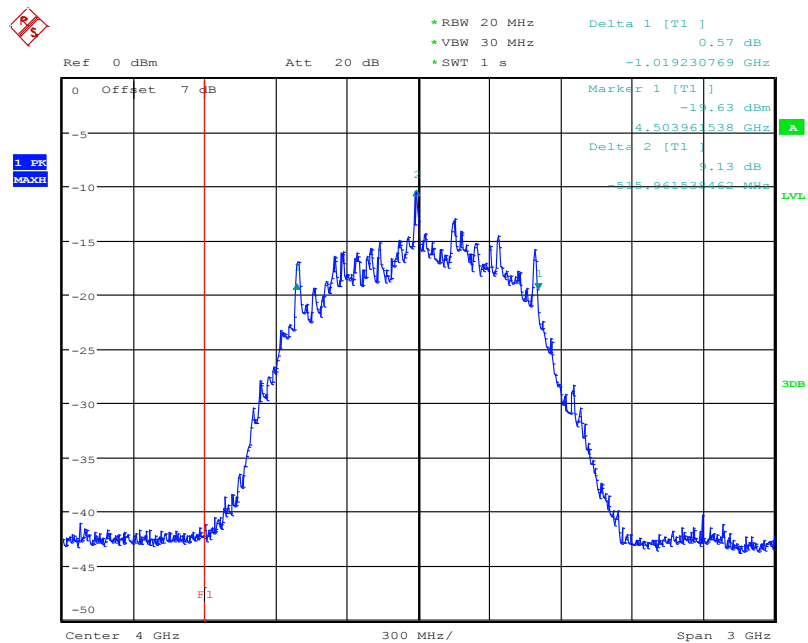


Date: 12.NOV.2015 08:27:23

Plot 11:

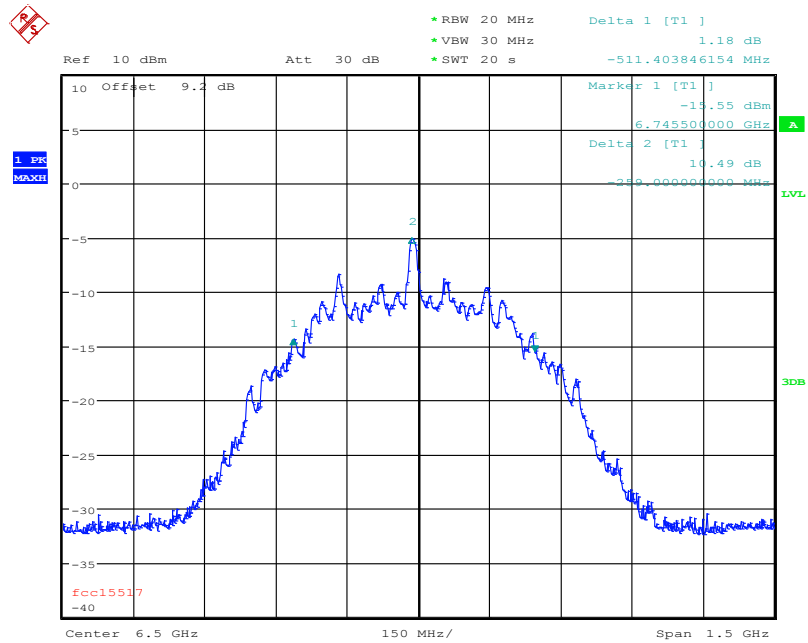


Date: 11.NOV.2015 16:54:45

Plot 12:

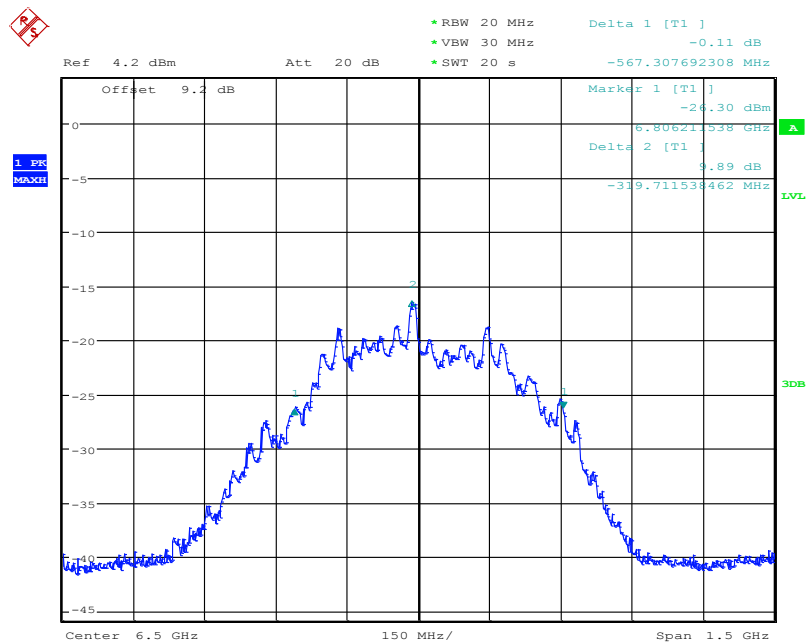


Date: 12.NOV.2015 08:58:51

Plot 13:

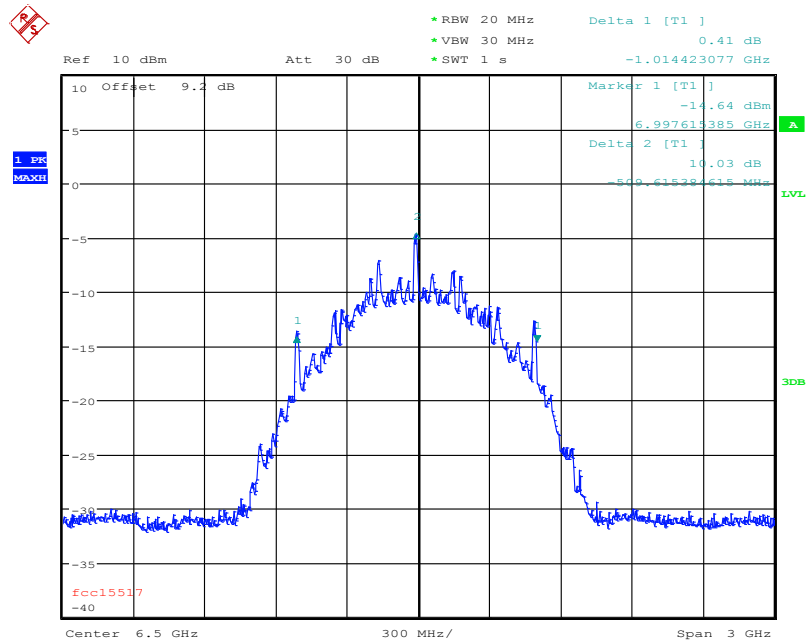


Date: 11.NOV.2015 16:35:36

Plot 14:

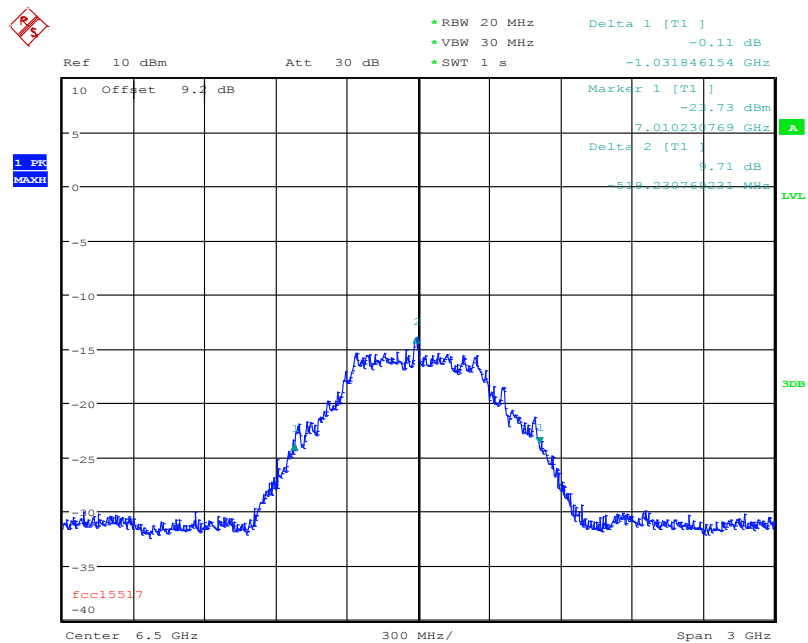


Date: 11.NOV.2015 16:47:19

Plot 15:

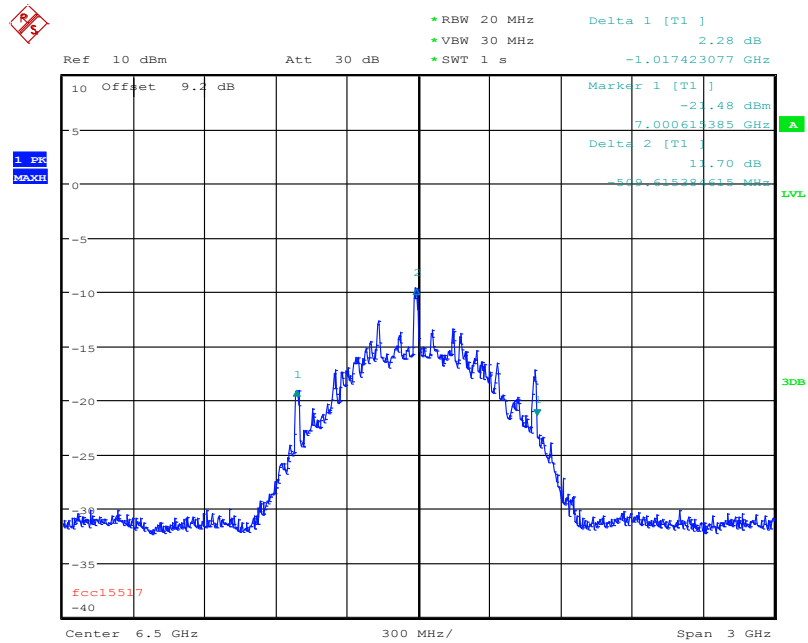


Date: 11.NOV.2015 16:43:24

Plot 16:

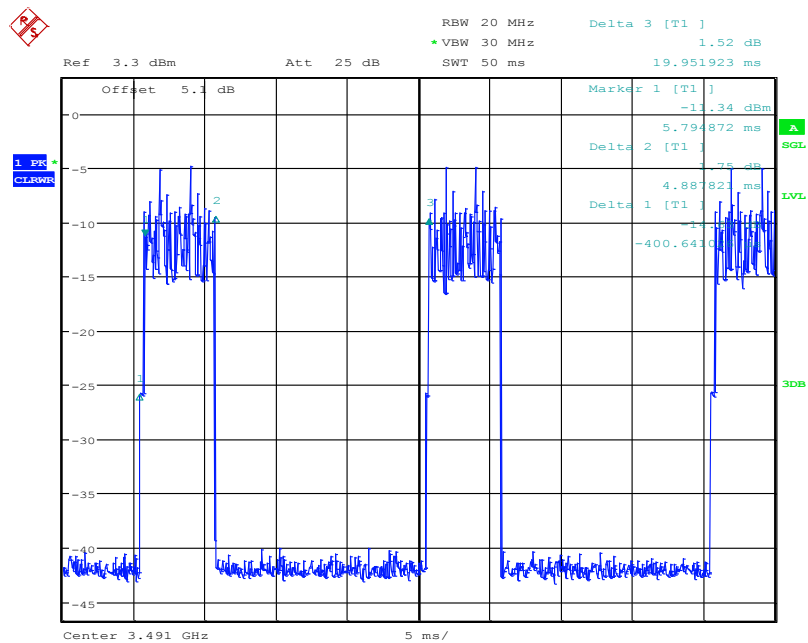


Date: 11.NOV.2015 18:11:02

Plot 17:

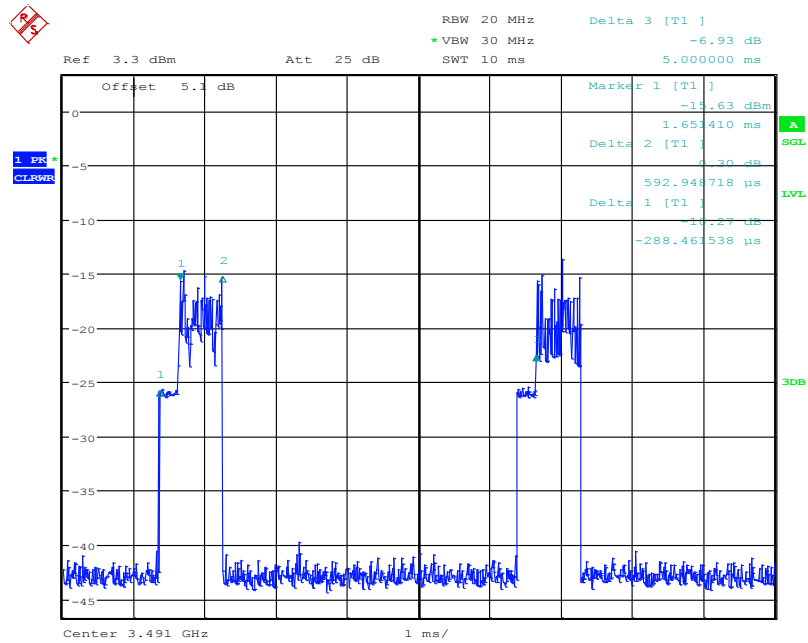


Date: 11.NOV.2015 18:12:41

Plot 18:

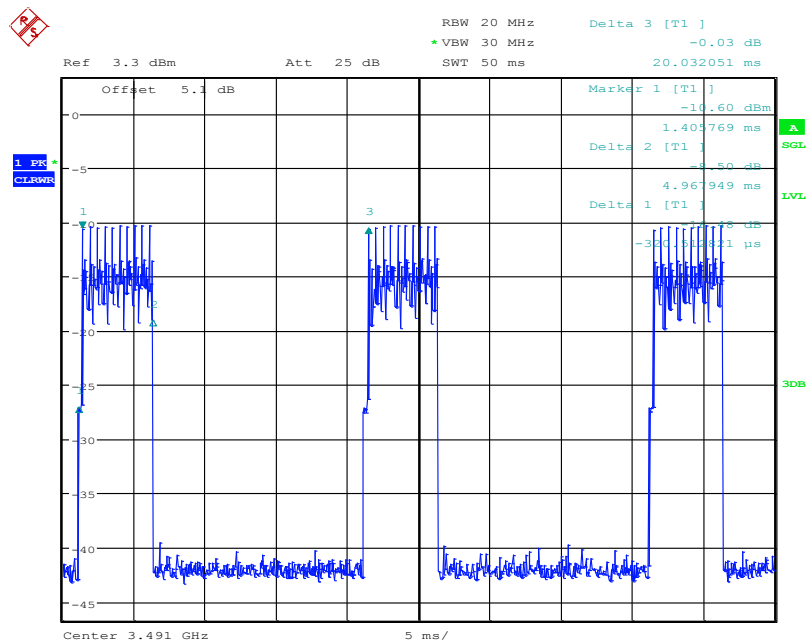


Date: 11.NOV.2015 18:23:21

Plot 19:

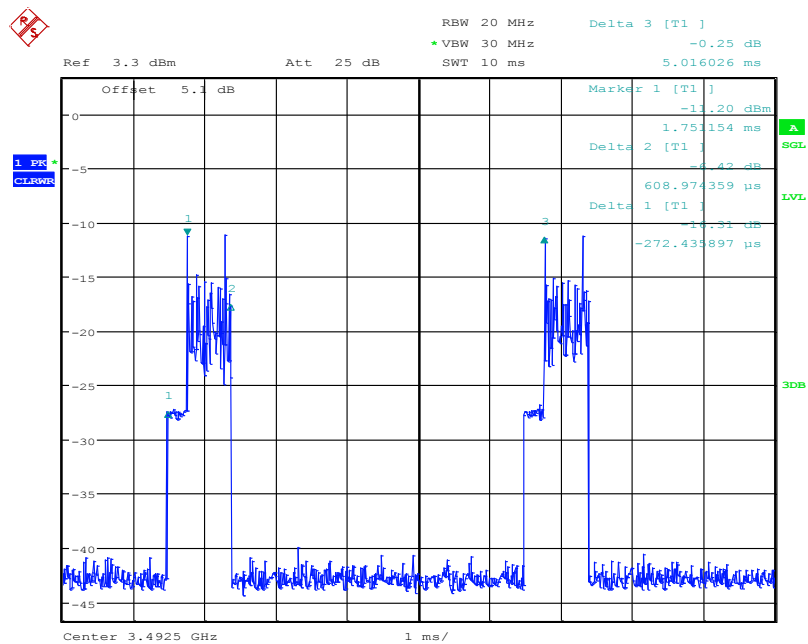


Date: 11.NOV.2015 18:28:04

Plot 20:

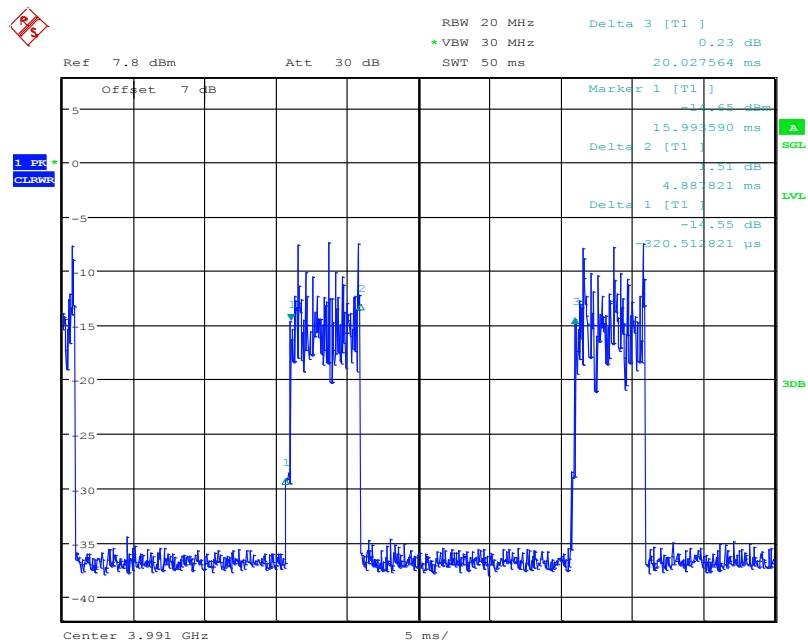


Date: 11.NOV.2015 17:07:36

Plot 21:

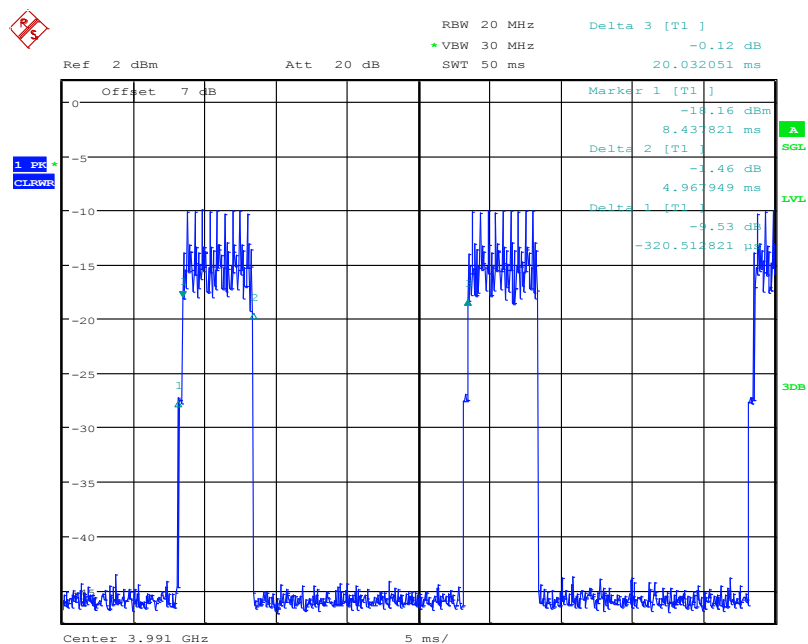


Date: 12.NOV.2015 08:55:52

Plot 22:

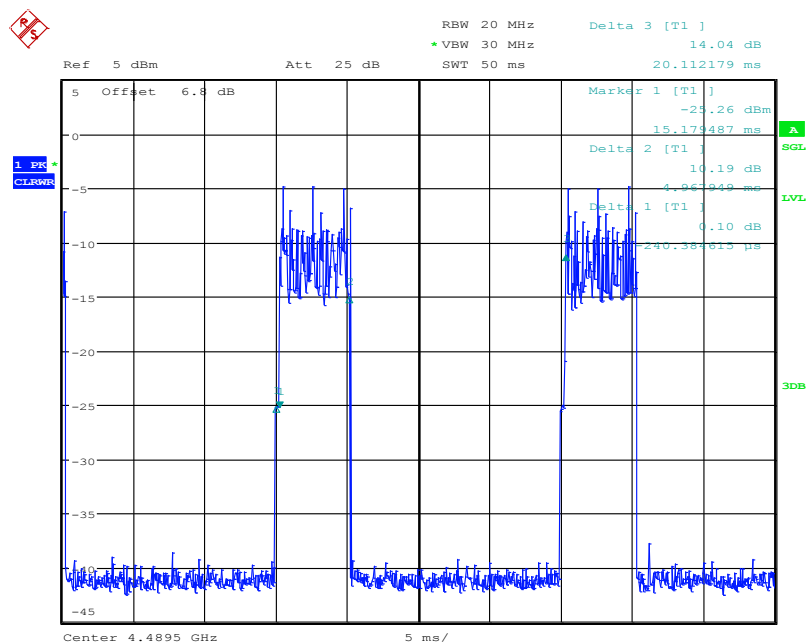


Date: 11.NOV.2015 18:00:50

Plot 23:

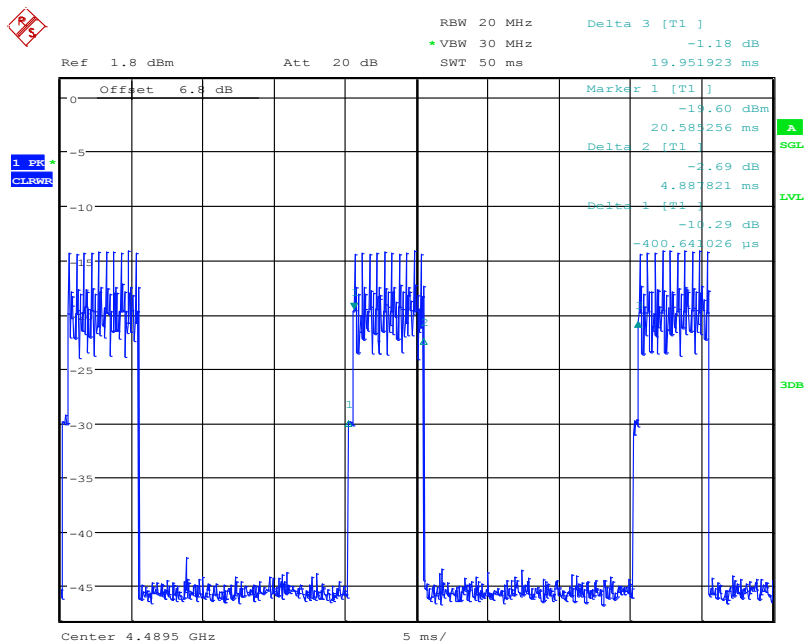


Date: 12.NOV.2015 08:52:32

Plot 24:

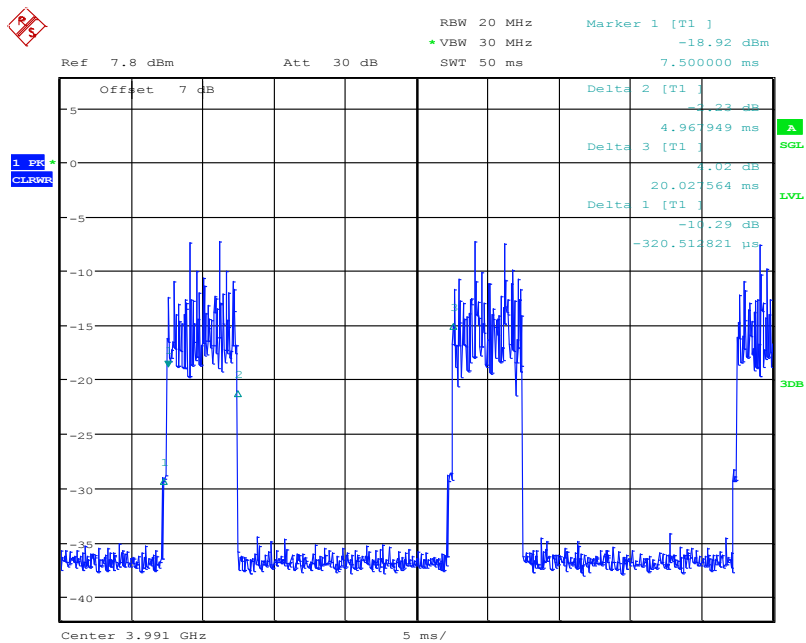


Date: 11.NOV.2015 17:02:35

Plot 25:

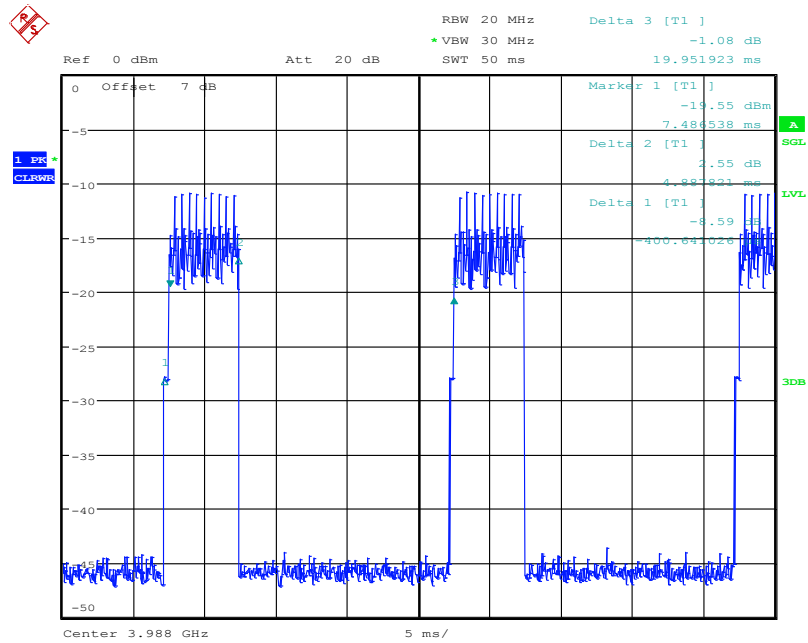


Date: 12.NOV.2015 08:28:30

Plot 26:

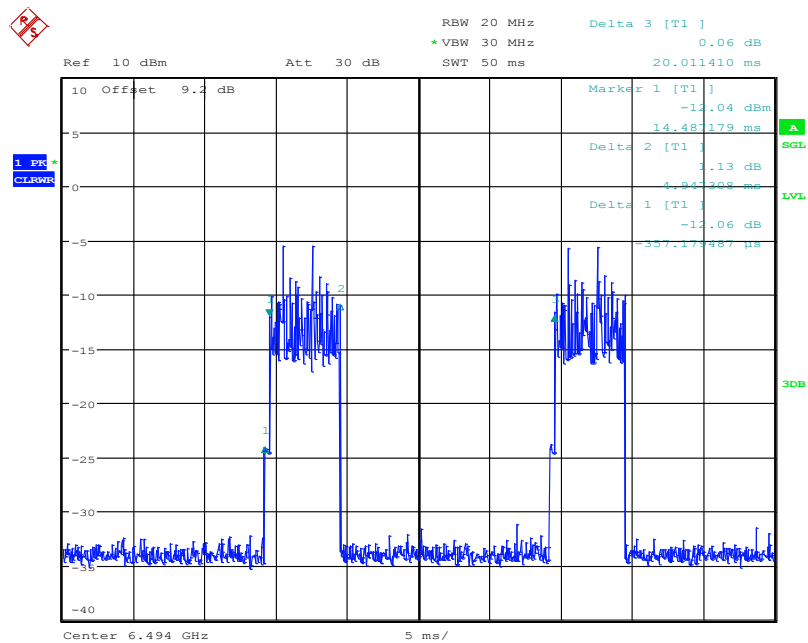


Date: 11.NOV.2015 16:52:38

Plot 27:

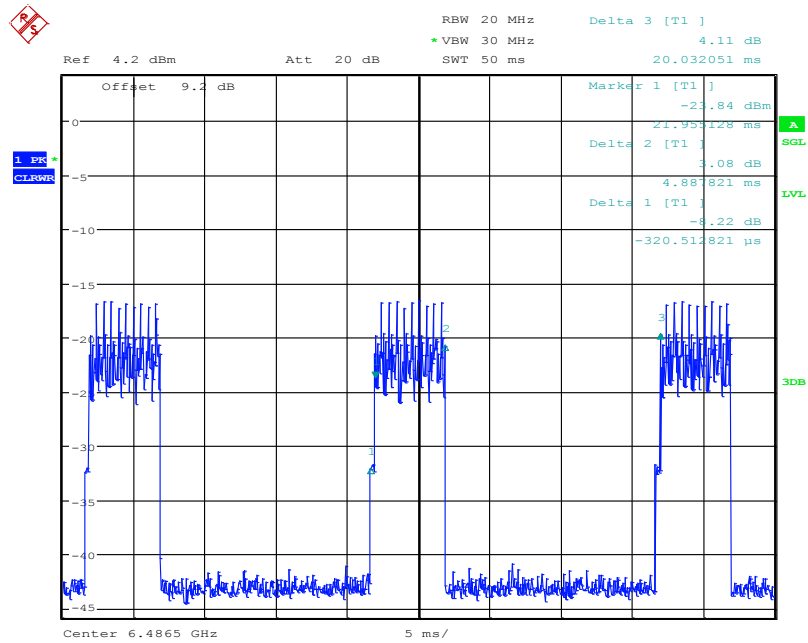


Date: 12.NOV.2015 08:59:45

Plot 28:

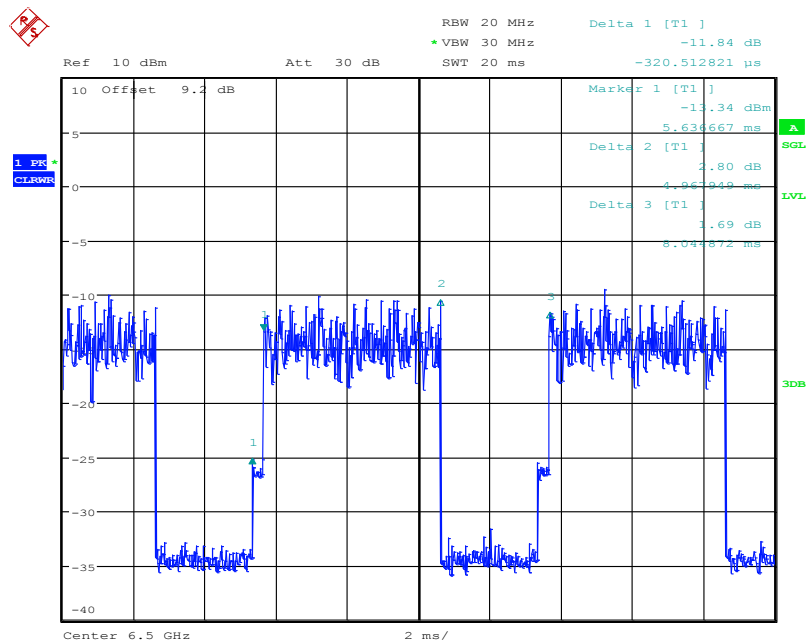


Date: 11.NOV.2015 16:37:21

Plot 29:

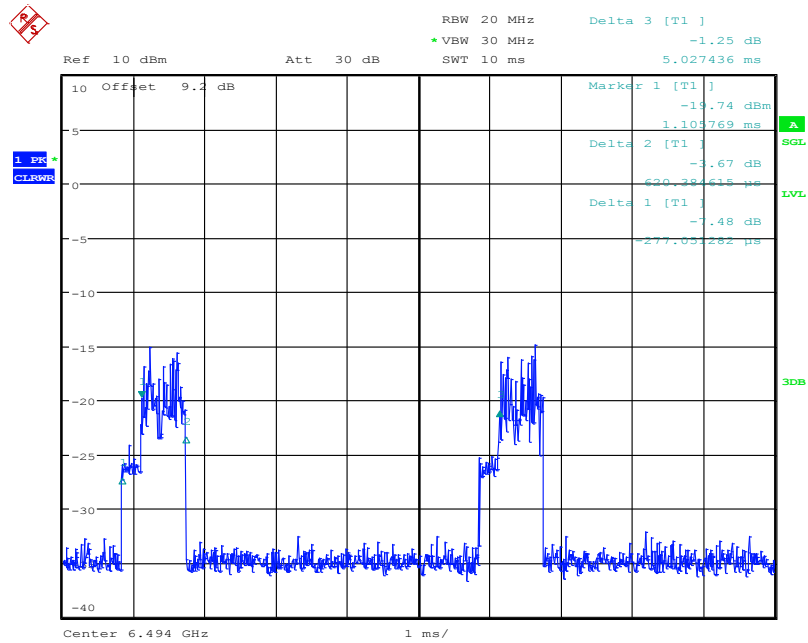

Date: 11.NOV.2015 16:48:56

Plot 30:

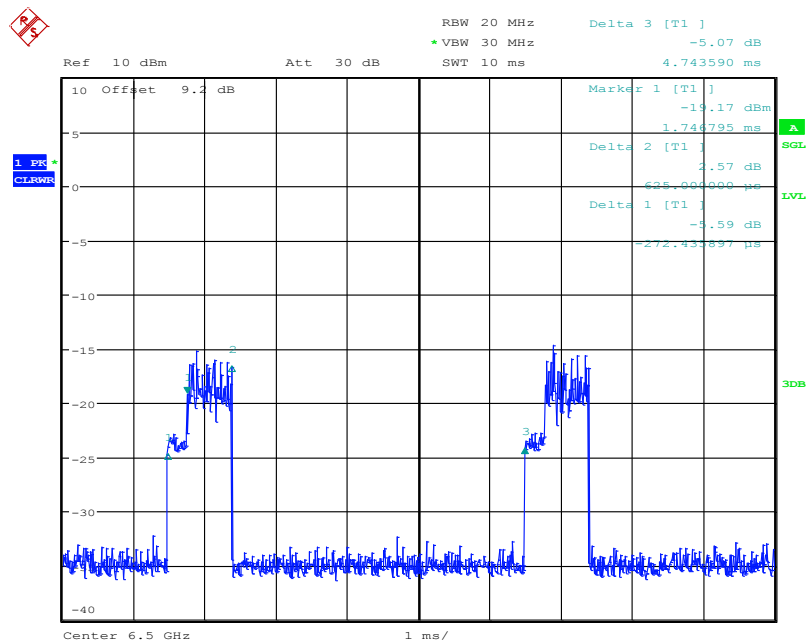

Date: 11.NOV.2015 16:41:16

10.2 TX Radiated Emissions

Description:

Measurement of the radiated spurious emissions in transmit mode.

For RSS-220, only the channels with a center frequency of 6.5 GHz are applicable.

Measurement:

§15.517 (c) / RSS220 (5.2.1d):

Average Measurement parameter	
Detector:	RMS
Sweep time:	1 ms/pts
Number of points	1001/10001
Video bandwidth:	1 MHz
Resolution bandwidth:	3 MHz
Trace-Mode:	Max Hold

§15.517 (e) / RSS220 (5.2.1g):

Peak Measurement parameter	
Detector:	Max Peak
Sweep time:	1 s
Video bandwidth:	20 MHz / 50 MHz
Resolution bandwidth:	30 MHz / 50 MHz
Span:	Zero span
Trace-Mode:	Max Hold

§15.517 (d) / RSS220 (5.2.1e):

Average Measurement parameter	
Detector:	RMS
Sweep time:	1 ms/pts
Number of points	10001
Video bandwidth:	1 kHz
Resolution bandwidth:	3 kHz
Trace-Mode:	Max Hold

Limits:

§15.517 (c): The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.217. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
960 to 1610	-75.3
1610 to 1990	-53.3
1990 to 3100	-51.3
3100 to 10600	-41.3
Above 10600	-51.3

RSS220 (5.2.1d):

Frequency in MHz	EIRP in dBm
960 to 1610	-75.3
1610 to 4750	-70.0
4750 to 10600	-41.3
Above 10600	-51.3

§15.517 (d) / RSS220 (5.2.1e):

In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164 to 1240	-85.3
1559 to 1610	-85.3

§15.509 (e) / RSS220 (5.2.1g): There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, fM. That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and correspondingly different peak emission limit, following the procedures described in §15.521.

Bandwidth correction factor for peak measurements with 20MHz RBW: $20 \cdot \log(50/20) = -7.96 \text{ dB}$

Result:

	Operating cond.	Data rate	Frequency /GHz	Max e.i.r.p. / dBm		Plot
				average value	peak value*	
Max E.I.R.P	1	110 kBps	3.5010	-41.9	-3.6	31, 55
		850 kBps	3.4980	-42.9	-13.5*	32, 56
	2	110 kBps	3.4950	-42.0	-10.2*	33, 57
		850 kBps	3.4950	-42.6	-11.0*	34, 58
	3	110 kBps	4.0940	-42.0	-8.3*	35, 59
		850 kBps	4.0940	-43.3	-13.5*	36, 60
	4	110 kBps	4.0970	-41.4	-13.7*	37, 61
		850 kBps	4.0980	-42.4	-13.3*	38, 62
	5	110 kBps	4.4820	-43.4	-2.7	39, 63
		850 kBps	4.4790	-43.2	-12.9*	40, 64
	6	110 kBps	4.4930	-42.2	-9.8*	41, 65
		850 kBps	4.4750	-43.3	-13.3*	42, 66
	7	110 kBps	4.1880	-41.3	-8.0*	43, 67
		850 kBps	4.2640	-42.9	-13.6*	44, 68
	8	110 kBps	4.1800	-41.5	-13.0*	45, 69
		850 kBps	4.1840	-42.2	-13.0*	46, 70
	9	110 kBps	6.4910	-44.0	-5.5	47, 71
		850 kBps	6.4900	-44.0	-14.4*	48, 72
	10	110 kBps	6.4910	-41.8	-9.3*	49, 73
		850 kBps	6.4900	-42.1	-10.6*	50, 74
	11	110 kBps	6.4900	-42.7	-2.7	51, 75
		850 kBps	6.4900	-43.9	-13.6*	52, 76
	12	110 kBps	6.4900	-41.9	-9.5*	53, 77
		850 kBps	6.4900	-42.5	-9.4*	54, 78
Measurement uncertainty					± 3 dB	

* with BW correction

Emissions outside the bands:


Spurious Emission Level (dBm)			
Frequency (MHz)	RBW	Detector	Level (dBm)
1497.577	1MHz	RMS	-61.4
1075.091	1MHz	RMS	-63.8
1574.397	1 kHz	RMS	-75.9
1036.783	1MHz	RMS	-65.3
1497.699	1MHz	RMS	-58.0
1574.437	1 kHz	RMS	-74.3*
1075.274	1MHz	RMS	-65.486
1459.269	1MHz	RMS	-61.728
1574.437	1 kHz	RMS	-74.023*
Measurement uncertainty			± 3dB

Note:

The peaks, measured in the 960 MHz to 1610 MHz frequency range exceed the limits for TX spurious (see also plots 89 to 92). The same measurements in RX mode show similar results. The spacing of these peaks is approx. 38.4 MHz, which can also be seen in the RX measurement in, plot 102. The manufacturer declares that these peaks are part of the digital circuitry (see Attestation statement in Annex D), not of the transmitter. In this case the limits in §15.209 apply (§15.521 (c)). Plot 102 shows the RX measurement with §15.209 limits.


Verdict: **complies**

Plot 31:

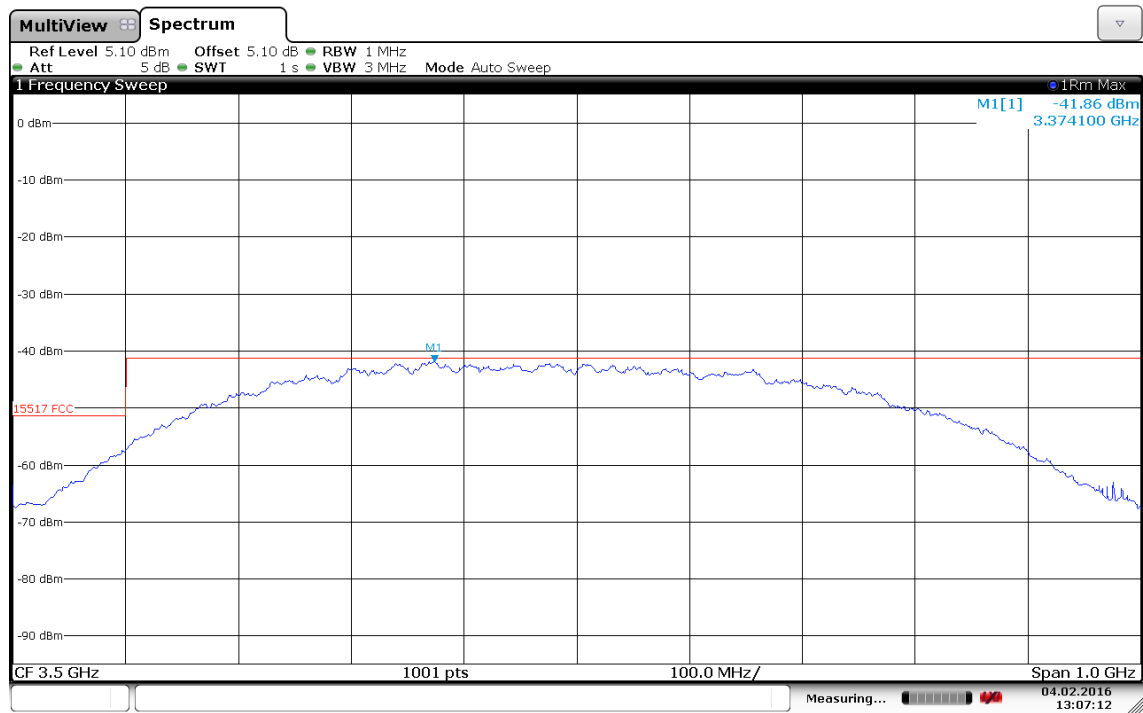


Date: 4.FEB.2016 13:07:12

Plot 32:

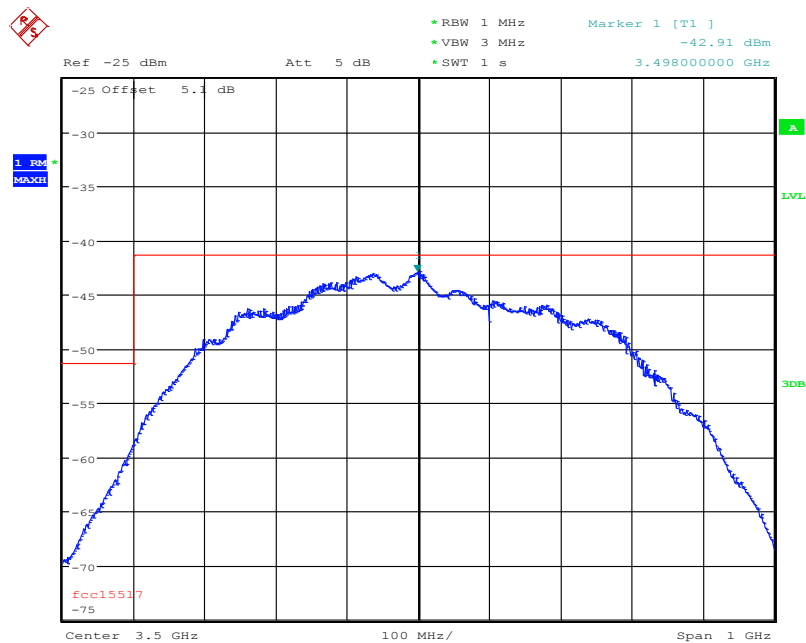


Date: 11.NOV.2015 13:28:37

Plot 33:

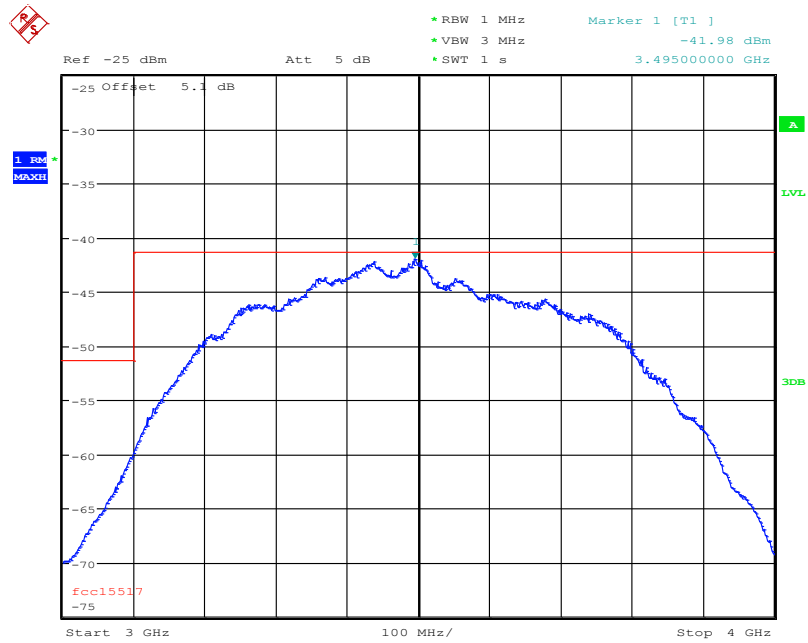


Date: 11.NOV.2015 13:02:43

Plot 34:

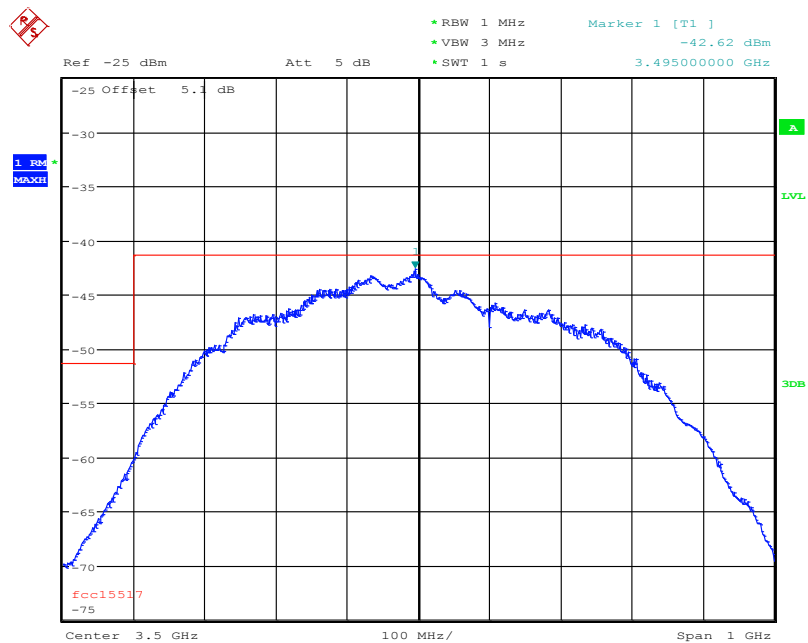


Date: 11.NOV.2015 13:08:33

Plot 35:

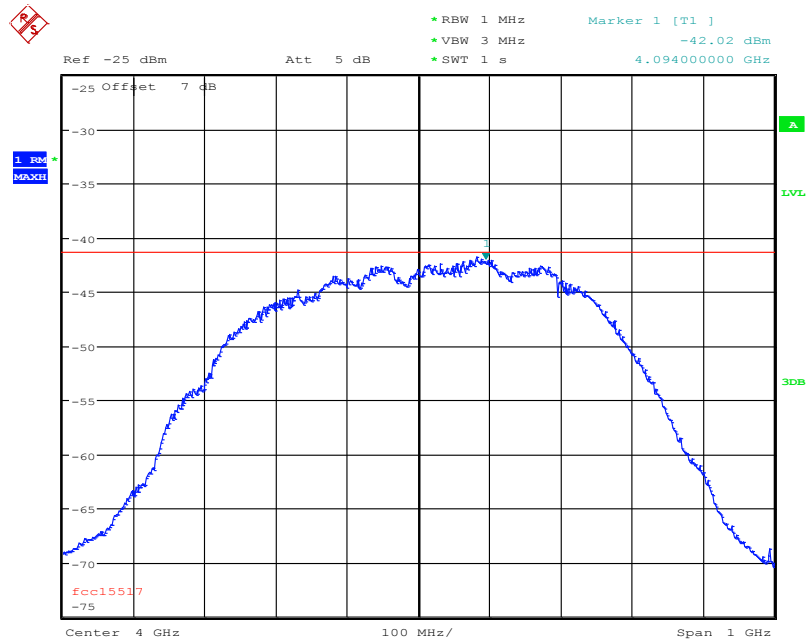


Date: 11.NOV.2015 14:04:01

Plot 36:

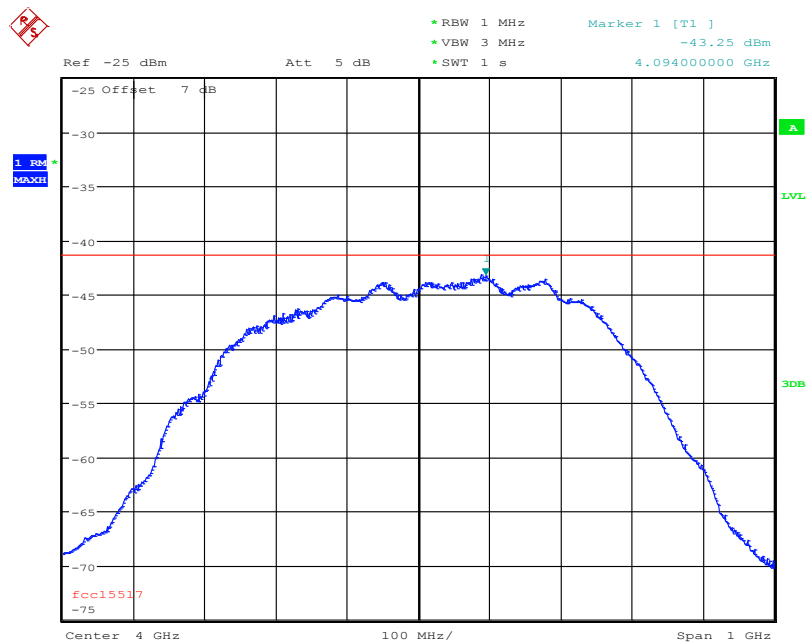


Date: 11.NOV.2015 14:11:48

Plot 37:

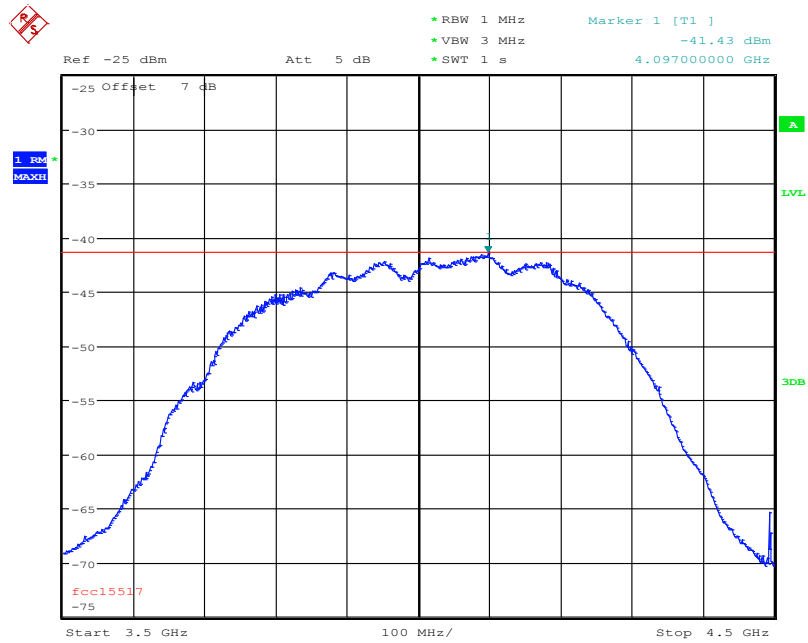


Date: 11.NOV.2015 13:54:03

Plot 38:

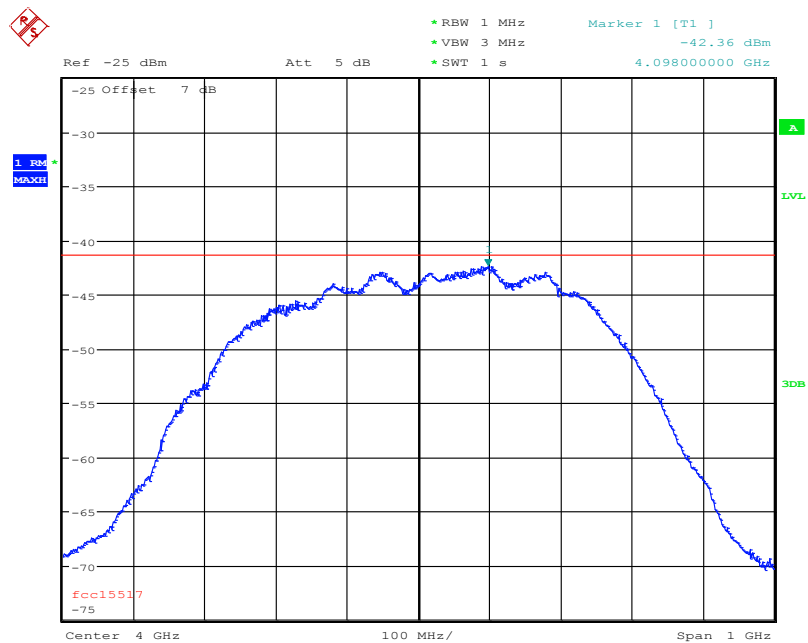


Date: 11.NOV.2015 13:59:18

Plot 39:

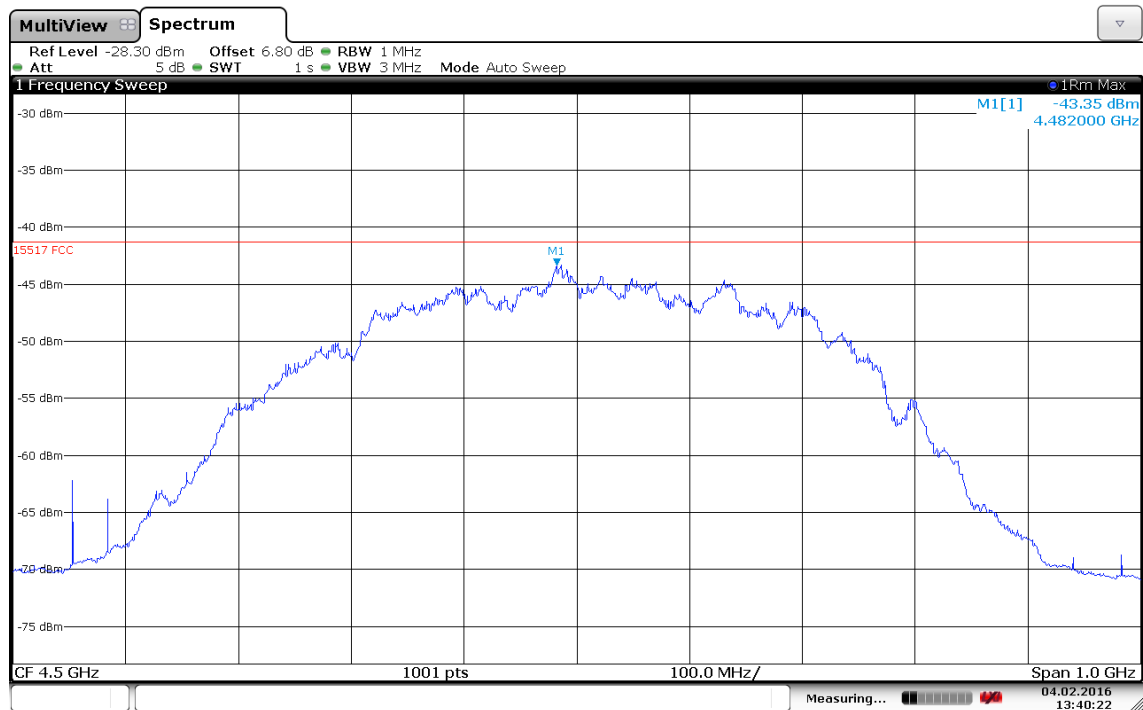


Date: 4.FEB.2016 13:40:22

Plot 40:

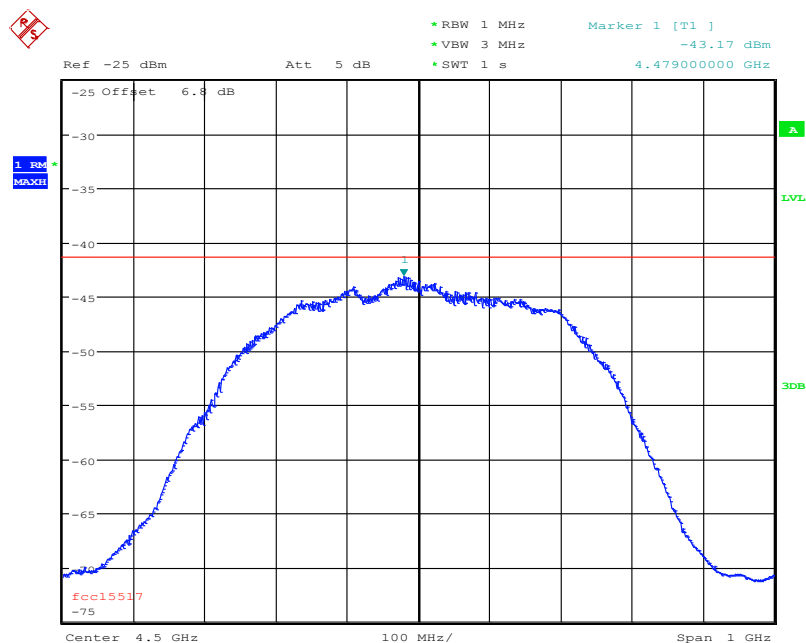


Date: 11.NOV.2015 17:42:27

Plot 41:

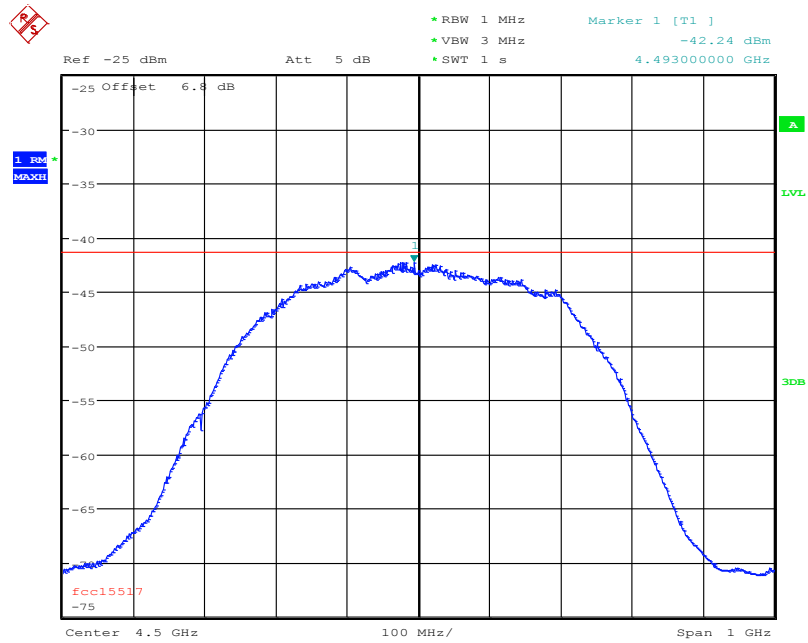


Date: 11.NOV.2015 17:47:41

Plot 42:

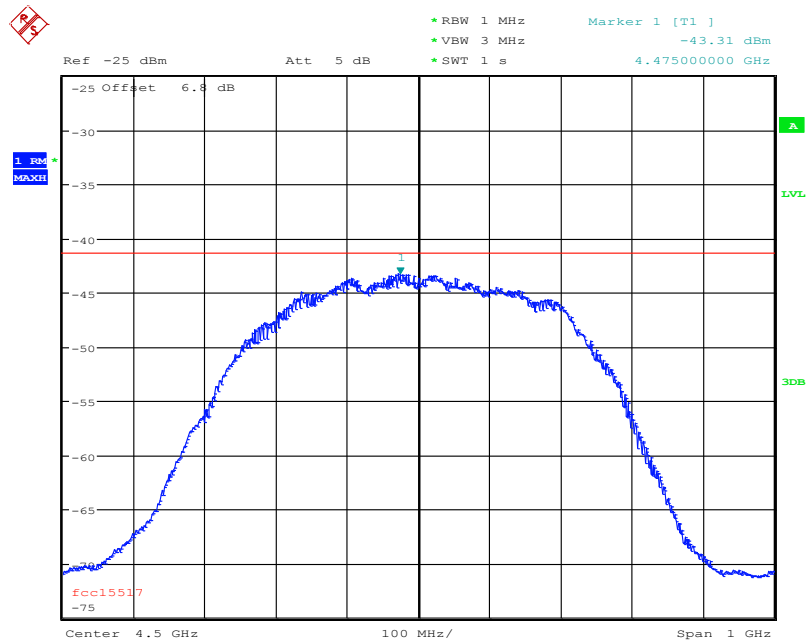


Date: 11.NOV.2015 17:50:11

Plot 43:

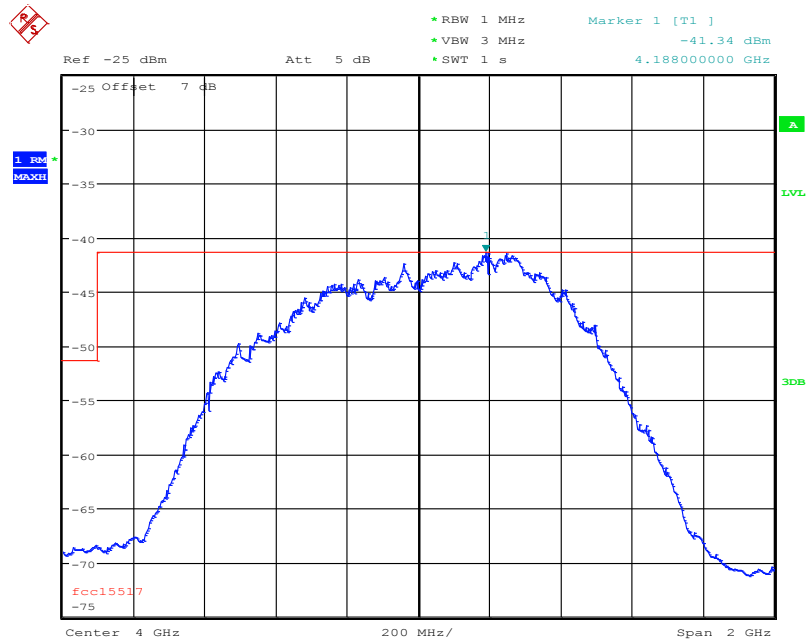


Date: 11.NOV.2015 14:53:19

Plot 44:

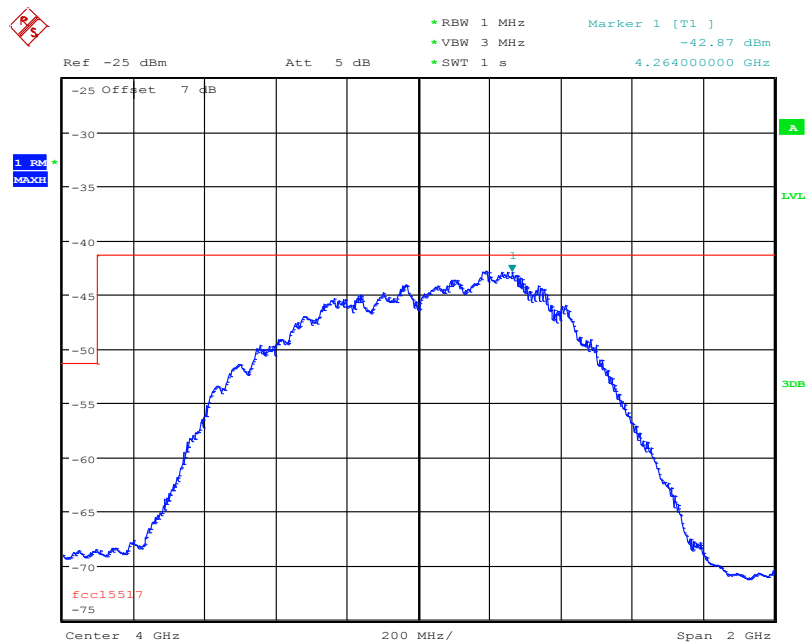


Date: 11.NOV.2015 14:57:08

Plot 45:

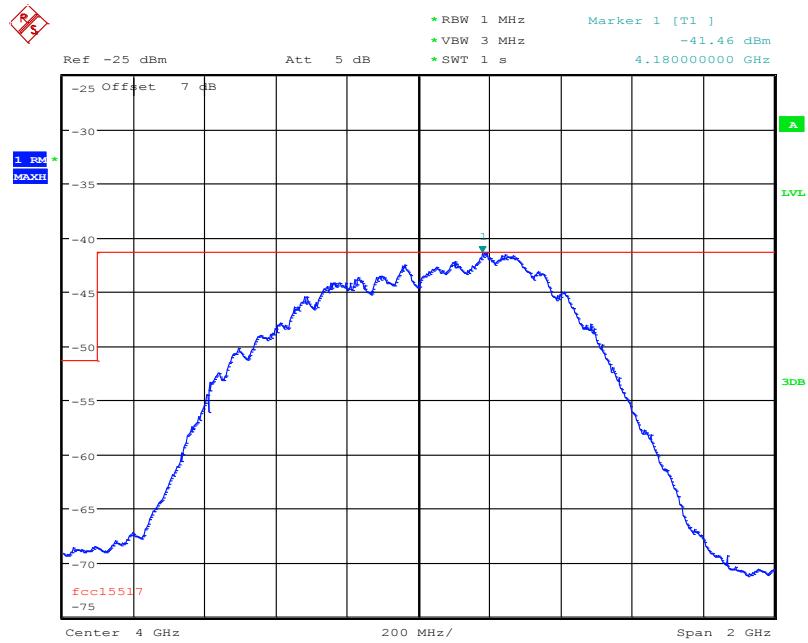


Date: 11.NOV.2015 14:44:52

Plot 46:

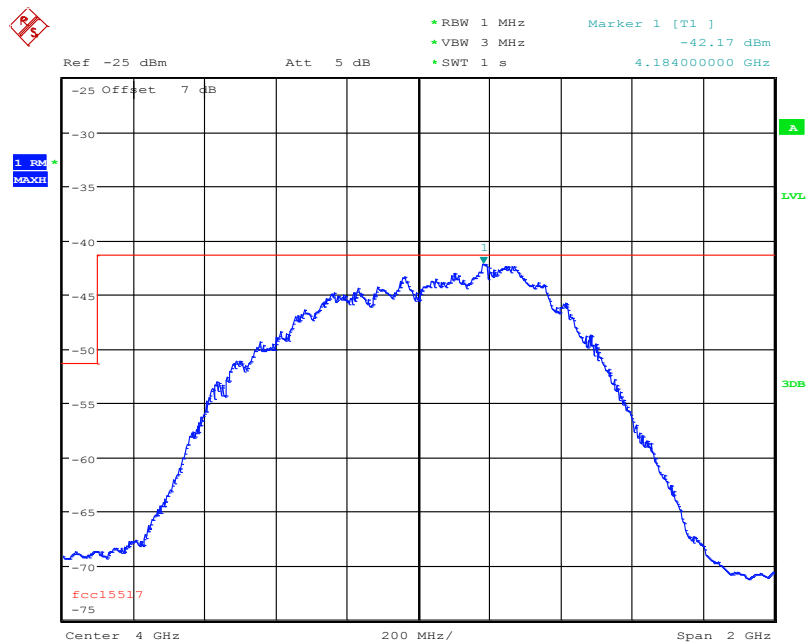


Date: 11.NOV.2015 14:48:01

Plot 47:

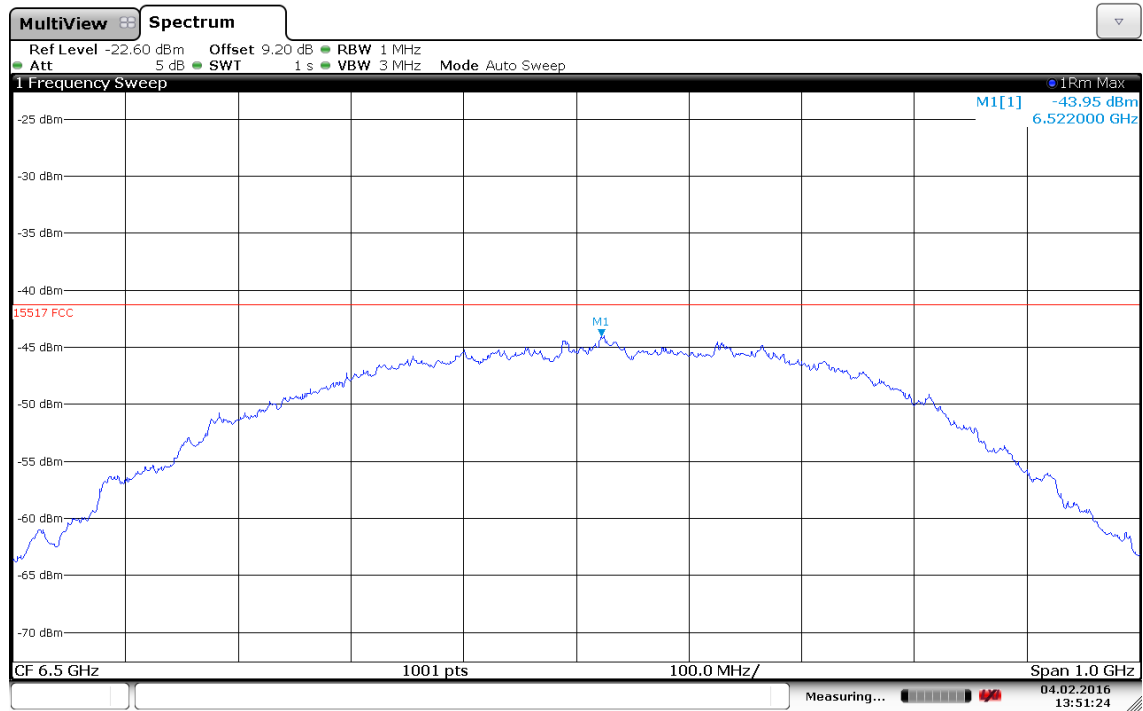


Date: 4.FEB.2016 13:51:24

Plot 48:

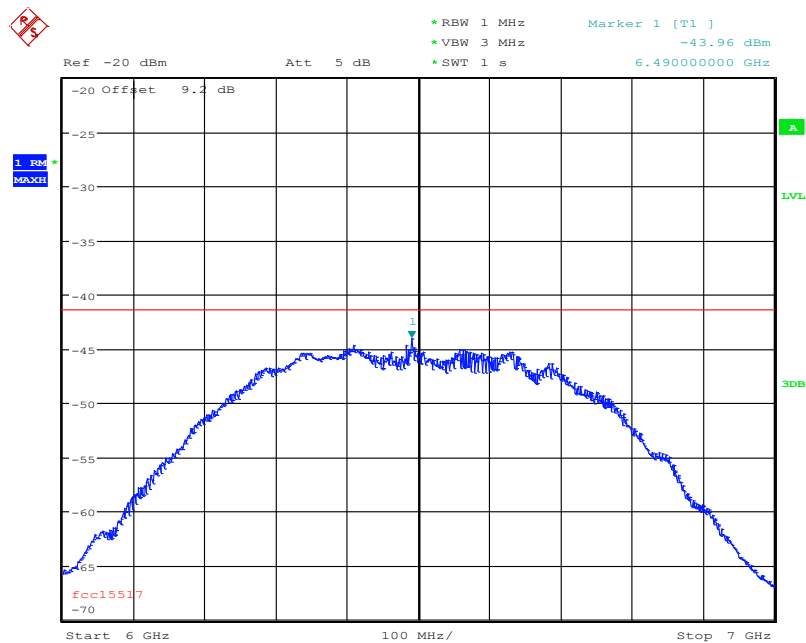


Date: 11.NOV.2015 15:38:28

Plot 49:

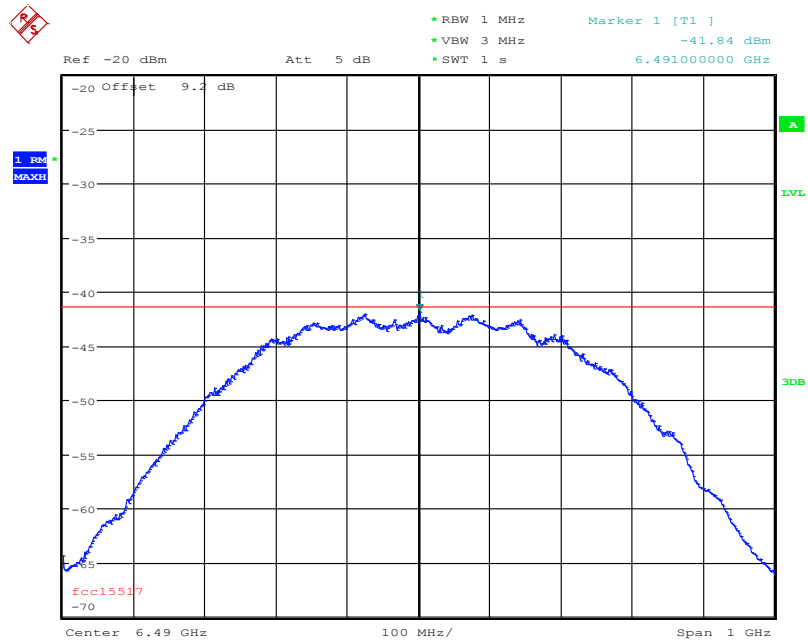


Date: 11.NOV.2015 15:09:41

Plot 50:

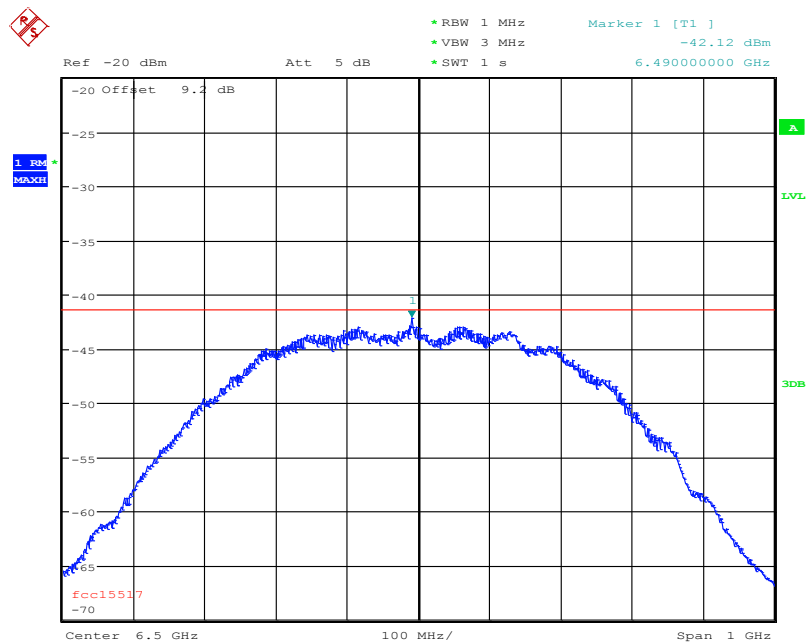


Date: 11.NOV.2015 15:24:06

Plot 51:

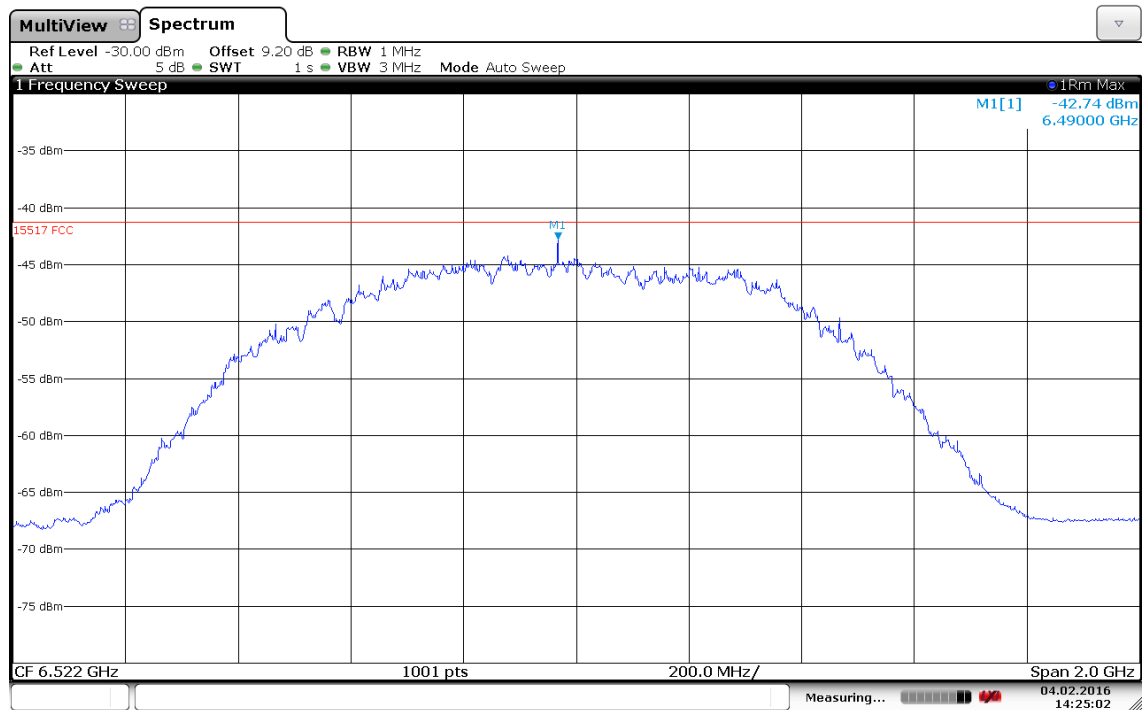


Date: 4.FEB.2016 14:25:03

Plot 52:

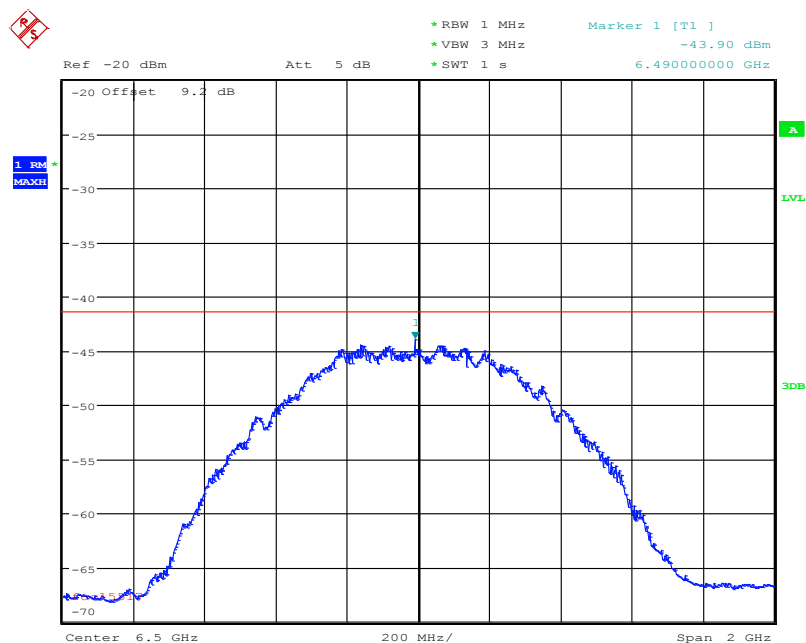


Date: 11.NOV.2015 16:04:33

Plot 53:

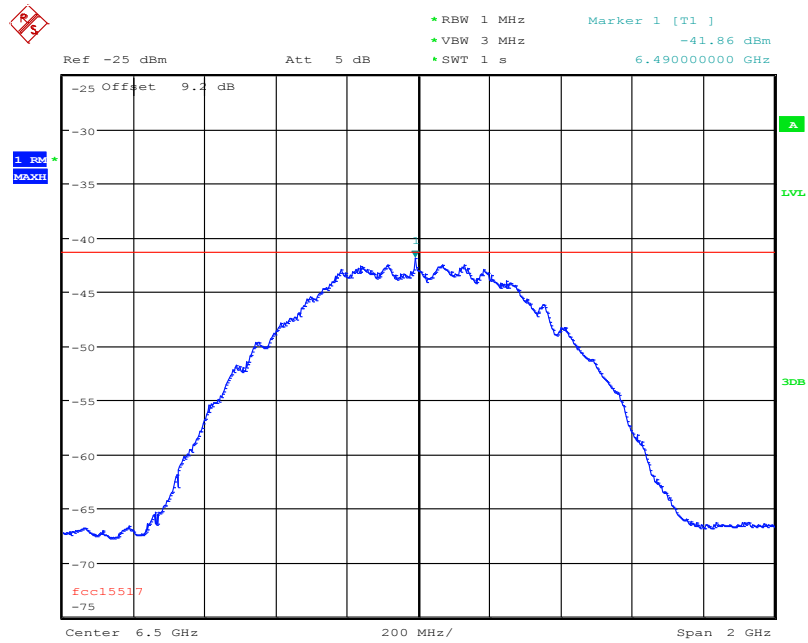


Date: 11.NOV.2015 15:44:29

Plot 54:

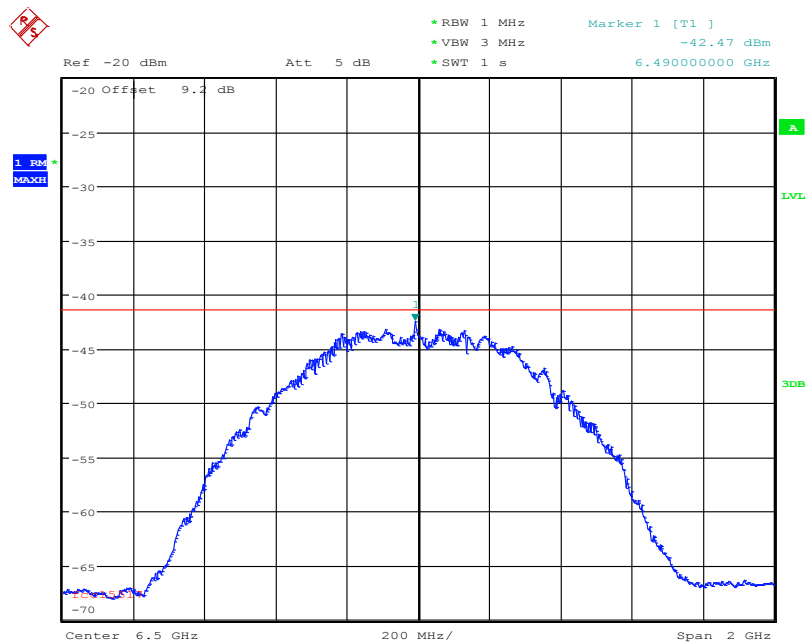


Date: 11.NOV.2015 15:47:25

Plot 55:

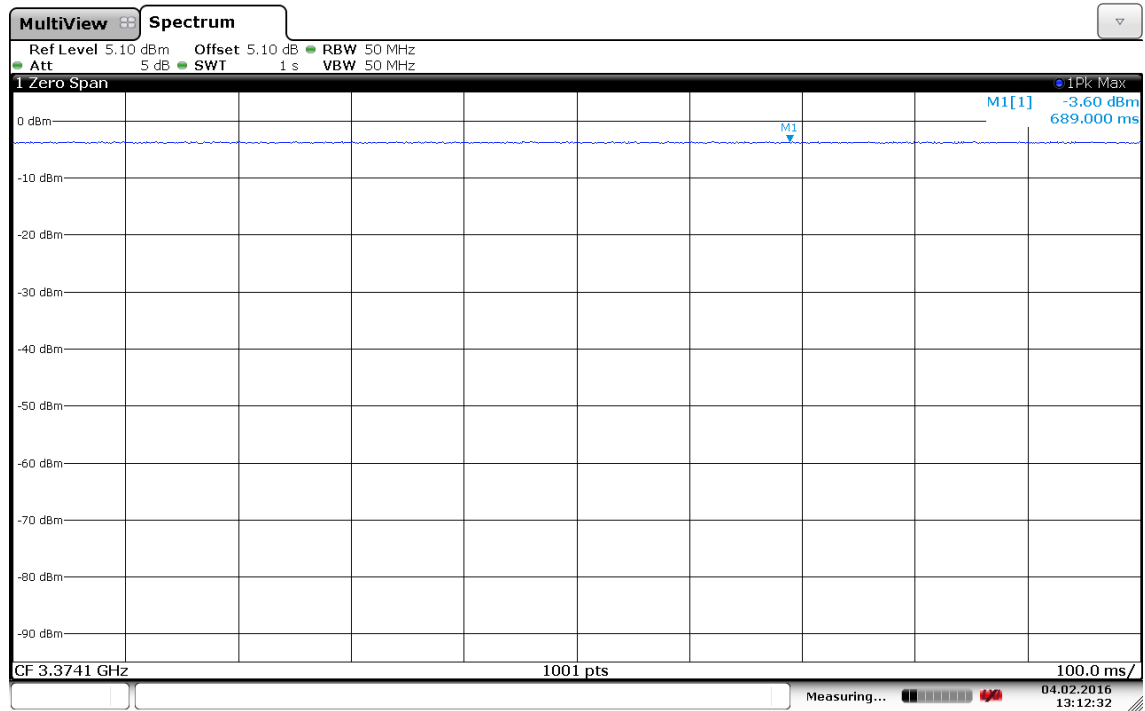


Plot 56:

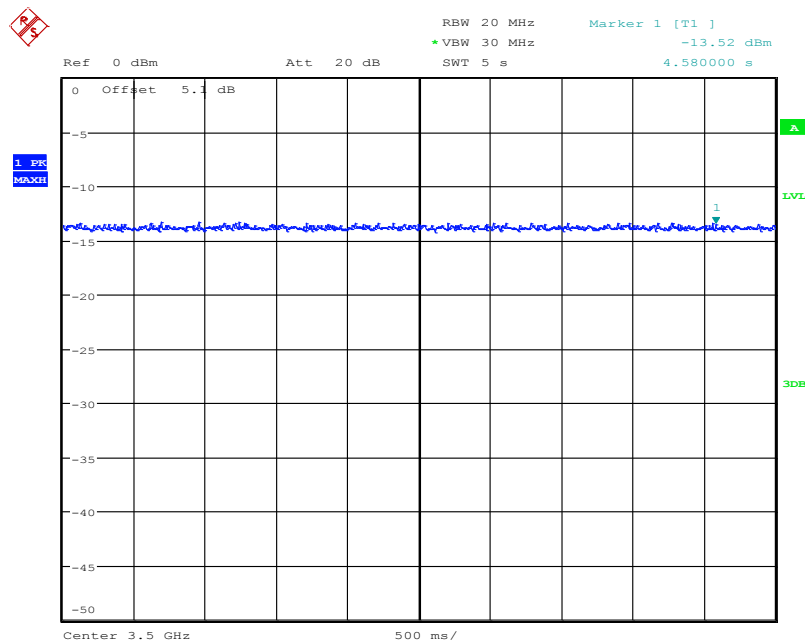


Date: 11.NOV.2015 13:29:57

Plot 57:

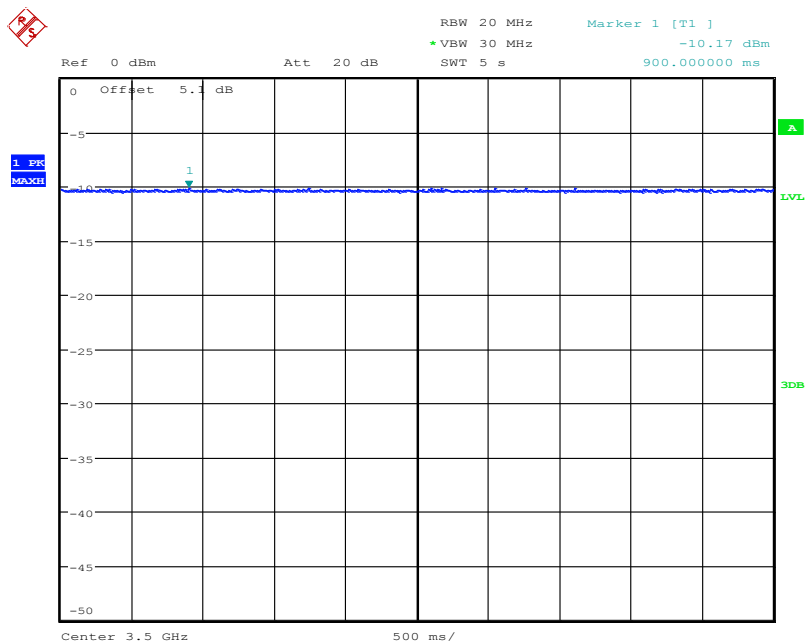


Date: 11.NOV.2015 13:35:53

Plot 58:

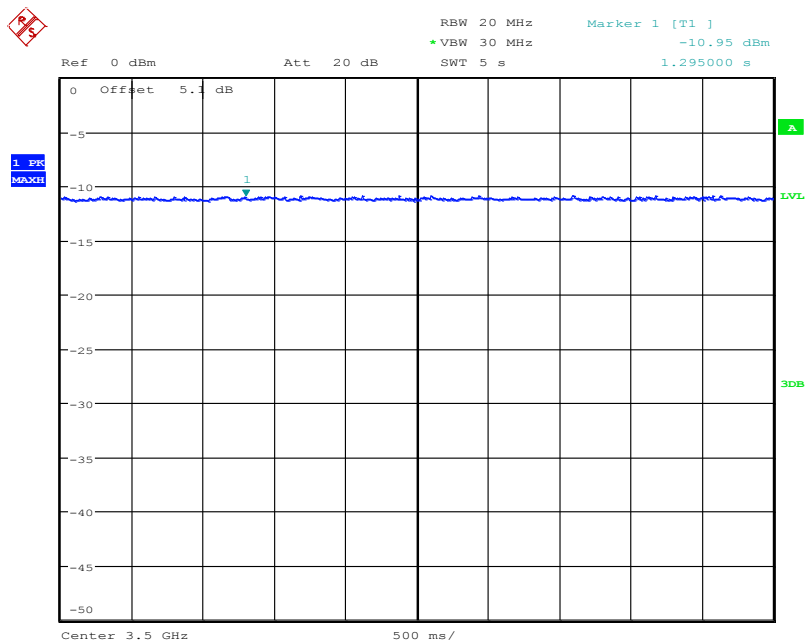


Date: 11.NOV.2015 13:33:18

Plot 59:

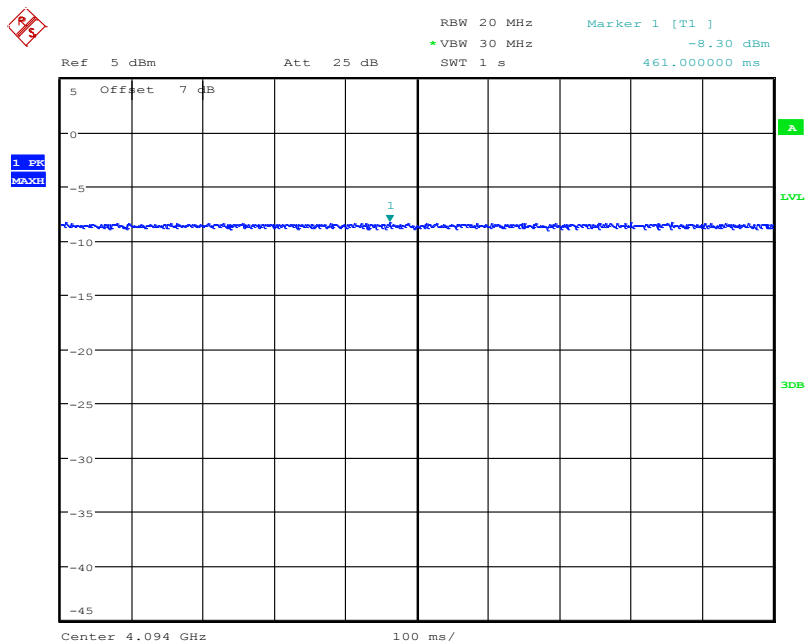


Date: 11.NOV.2015 14:05:48

Plot 60:

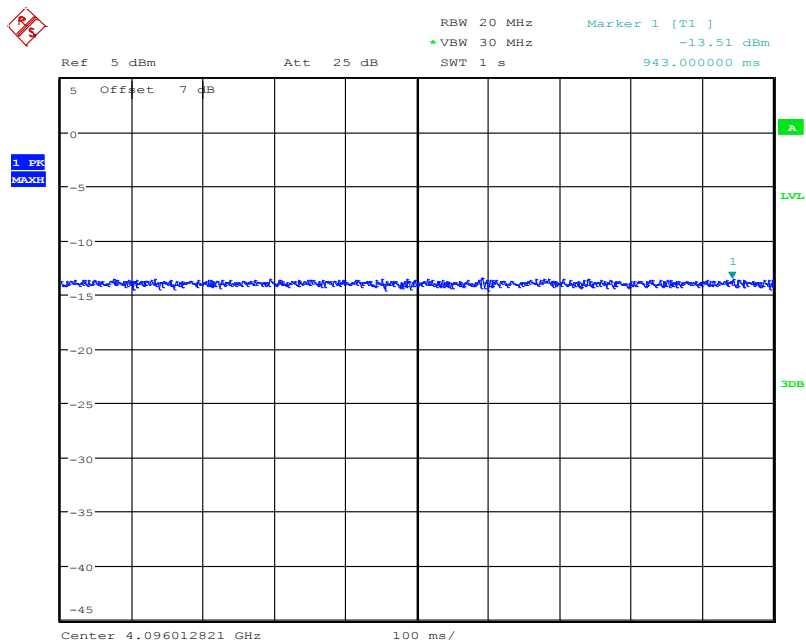


Date: 11.NOV.2015 14:12:51

Plot 61:

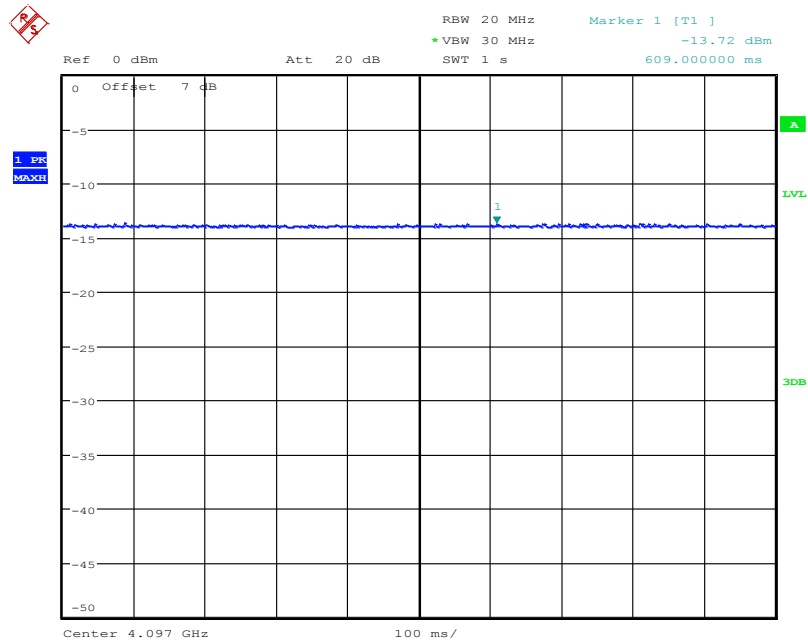


Date: 11.NOV.2015 13:56:00

Plot 62:

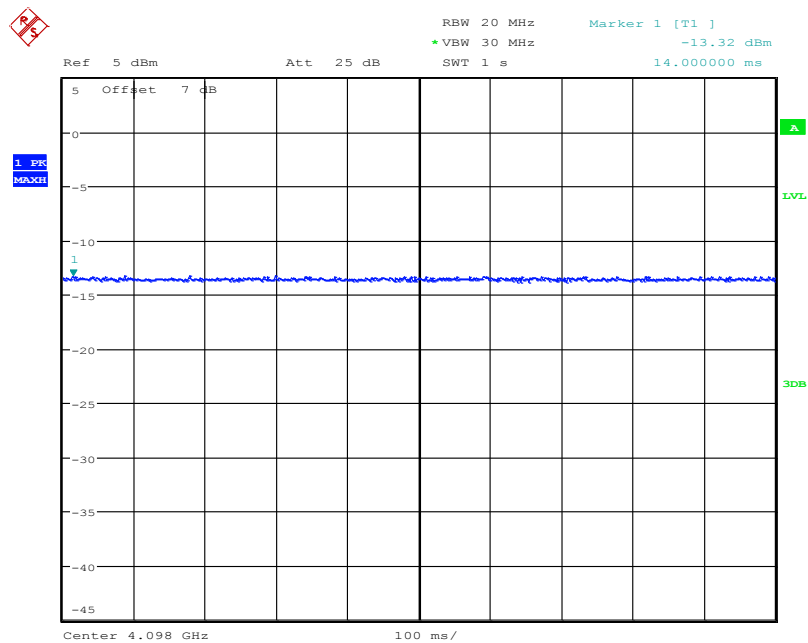


Date: 11.NOV.2015 14:00:37

Plot 65:

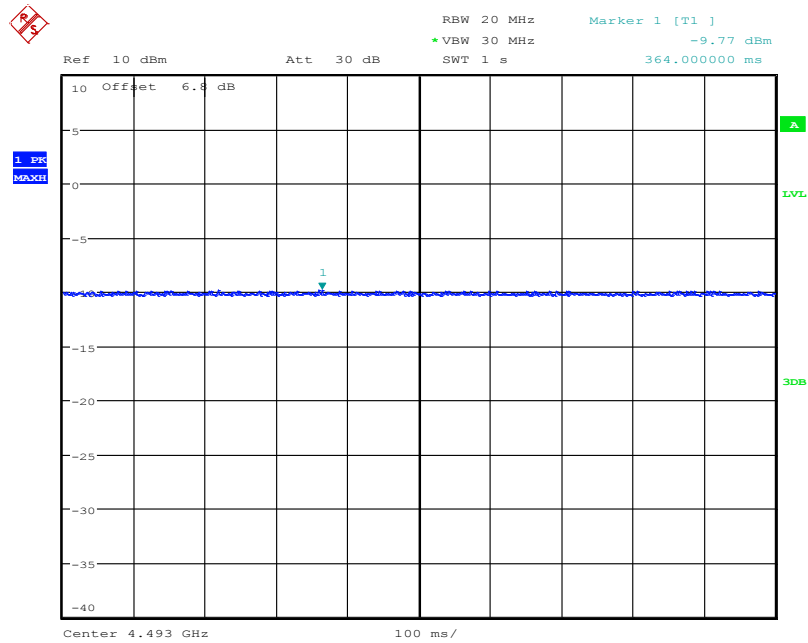


Date: 11.NOV.2015 17:48:49

Plot 66:

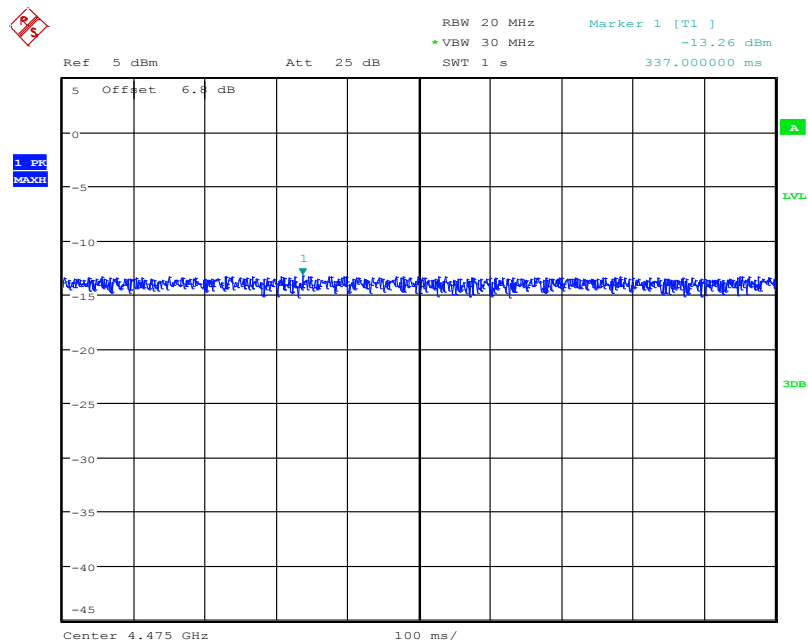


Date: 11.NOV.2015 17:50:59

Plot 67:

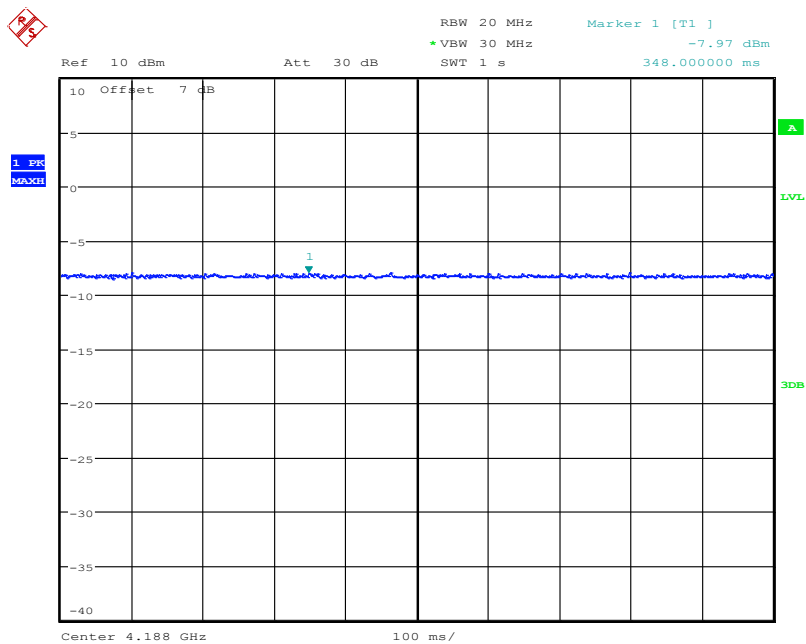


Date: 11.NOV.2015 14:54:41

Plot 68:

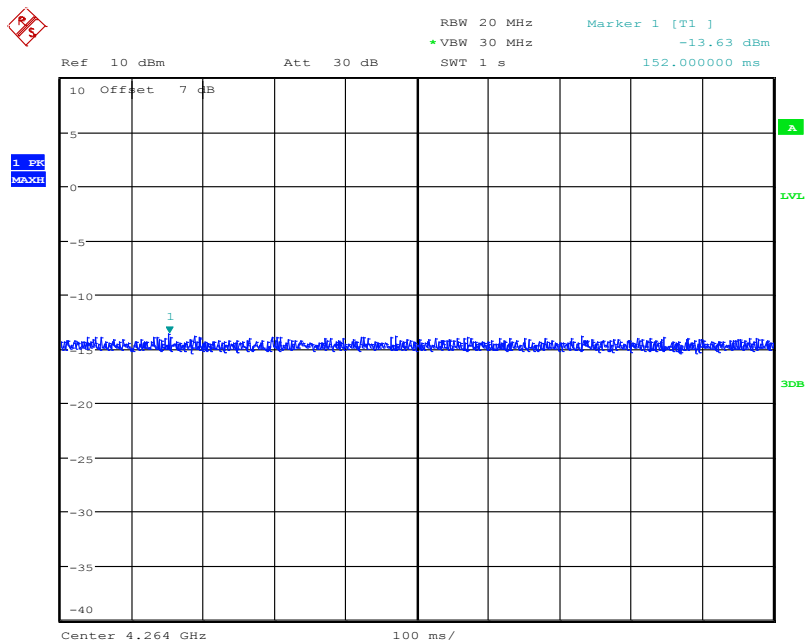


Date: 11.NOV.2015 14:57:47

Plot 69:

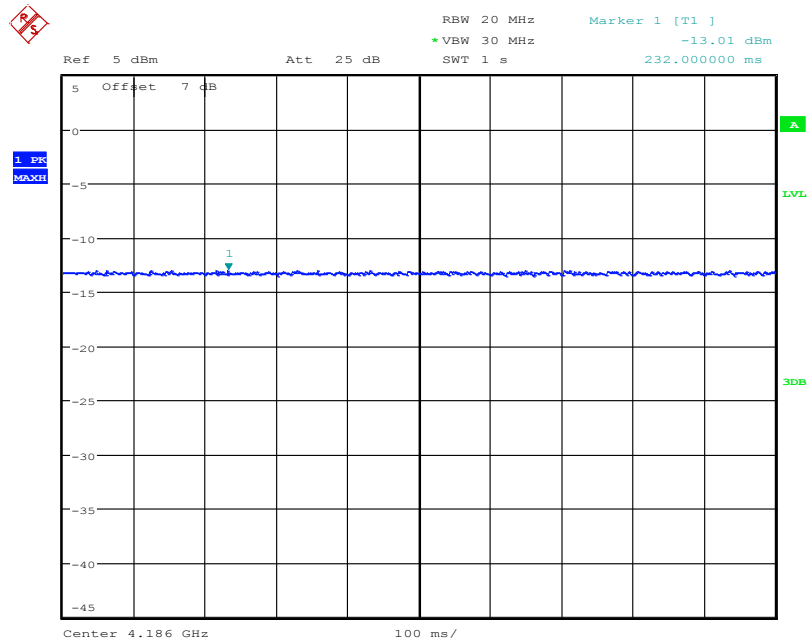

Date: 11.NOV.2015 14:46:14

Plot 70:

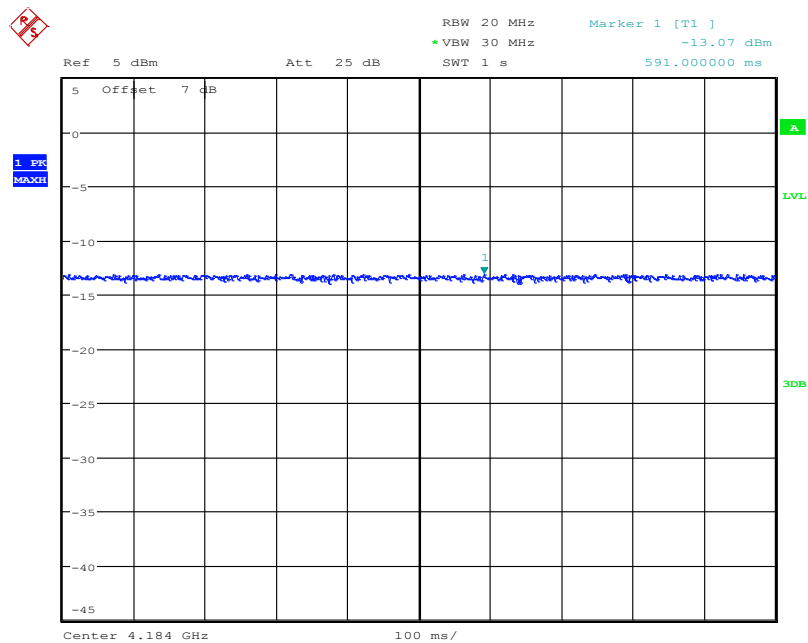


Date: 11.NOV.2015 14:48:37

Plot 71:




Date: 4.FEB.2016 13:52:38

Plot 72:

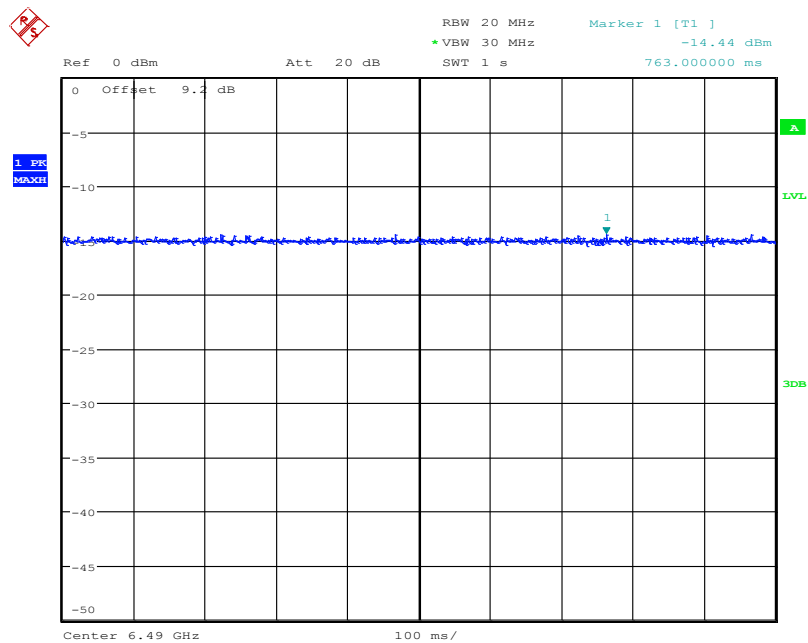


Date: 11.NOV.2015 15:39:37

Plot 73:

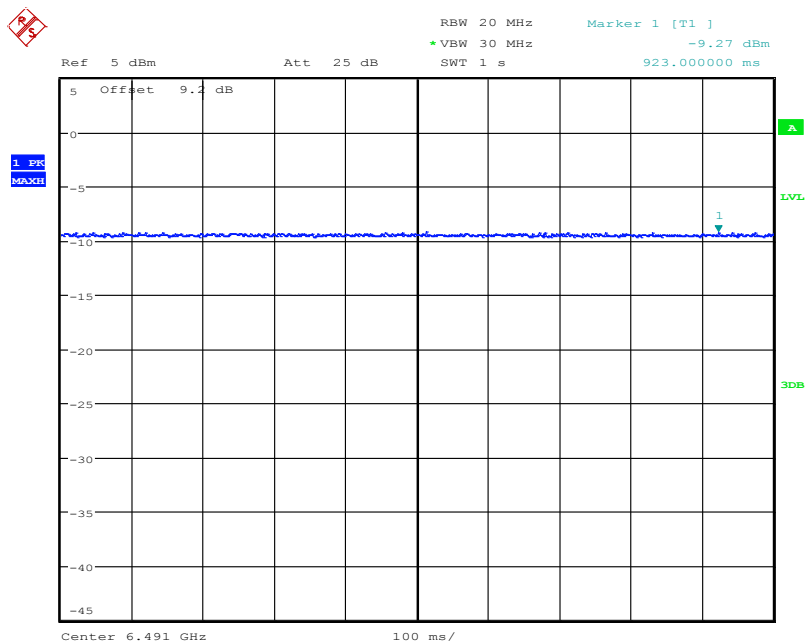


Date: 11.NOV.2015 15:10:35

Plot 74:

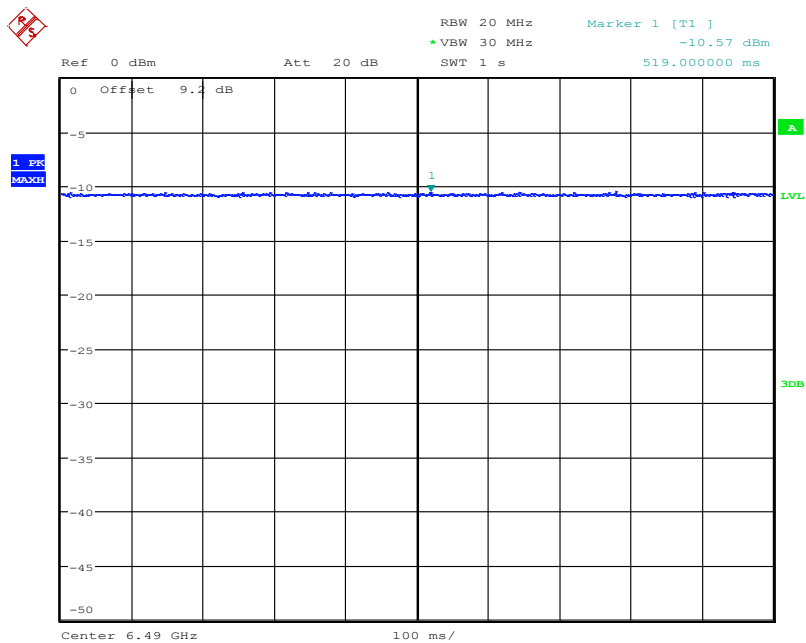


Date: 11.NOV.2015 15:25:17

Plot 75:

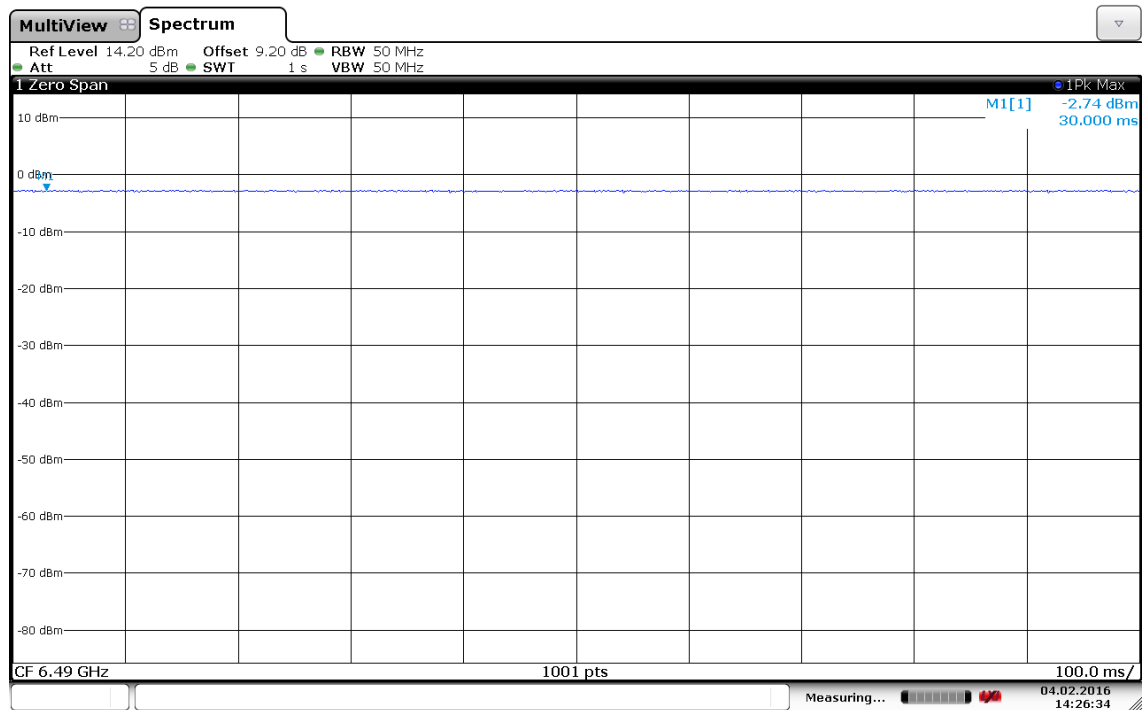


Date: 4.FEB.2016 14:26:34

Plot 76:

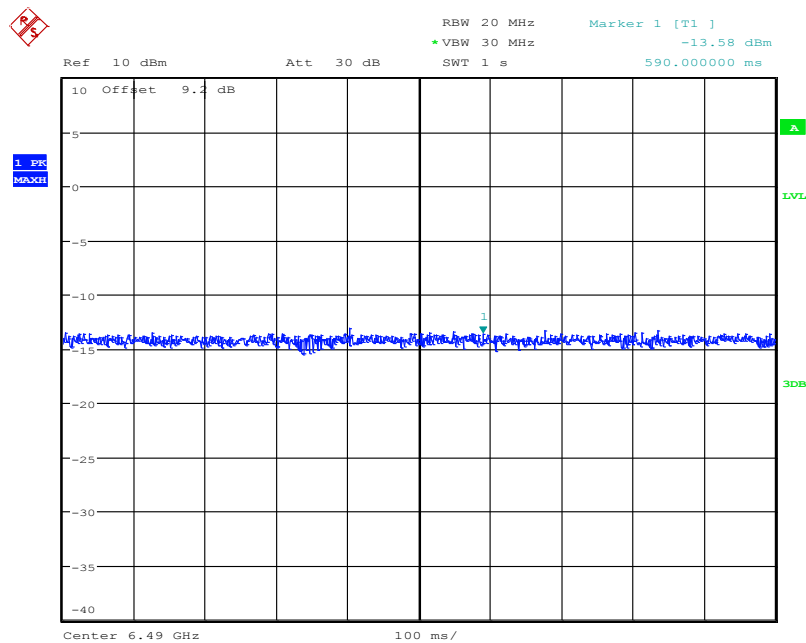


Date: 11.NOV.2015 16:05:22

Plot 77:

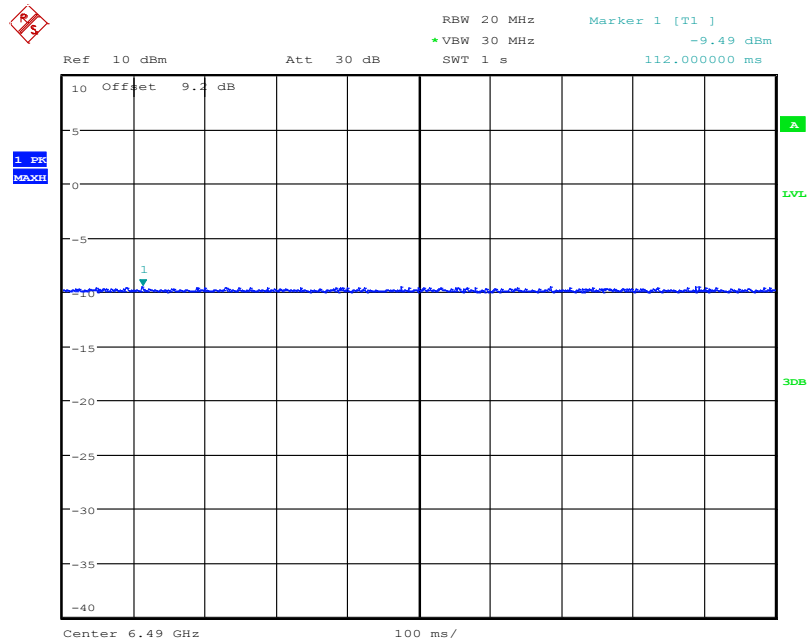

Date: 11.NOV.2015 15:45:59


Plot 78:

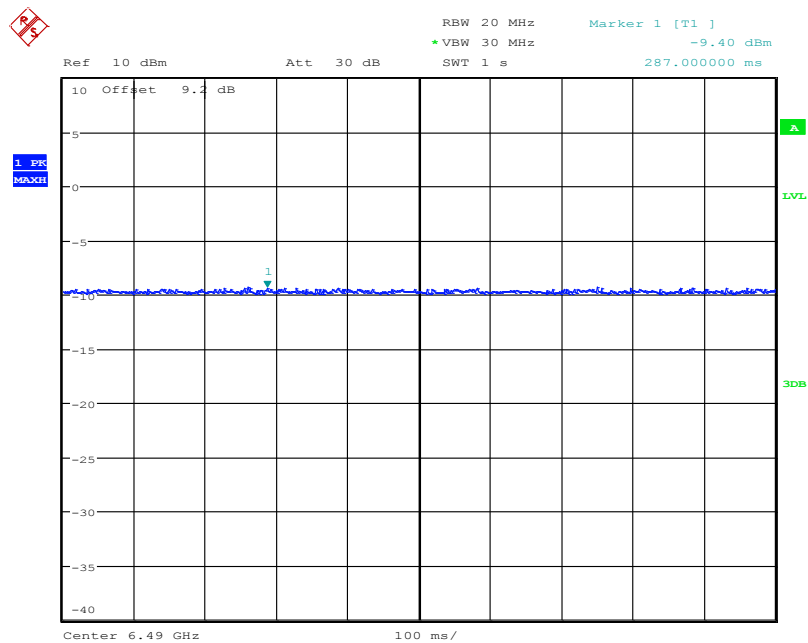

Date: 11.NOV.2015 15:49:57

Plot 79:**Common Information**


EUT: Kedge XV
 Serial number: proto
 Test description: FCC part 15
 Operating condition: TX 3494,4MHz
 Operator name: Kraus
 Comment: powered by PS

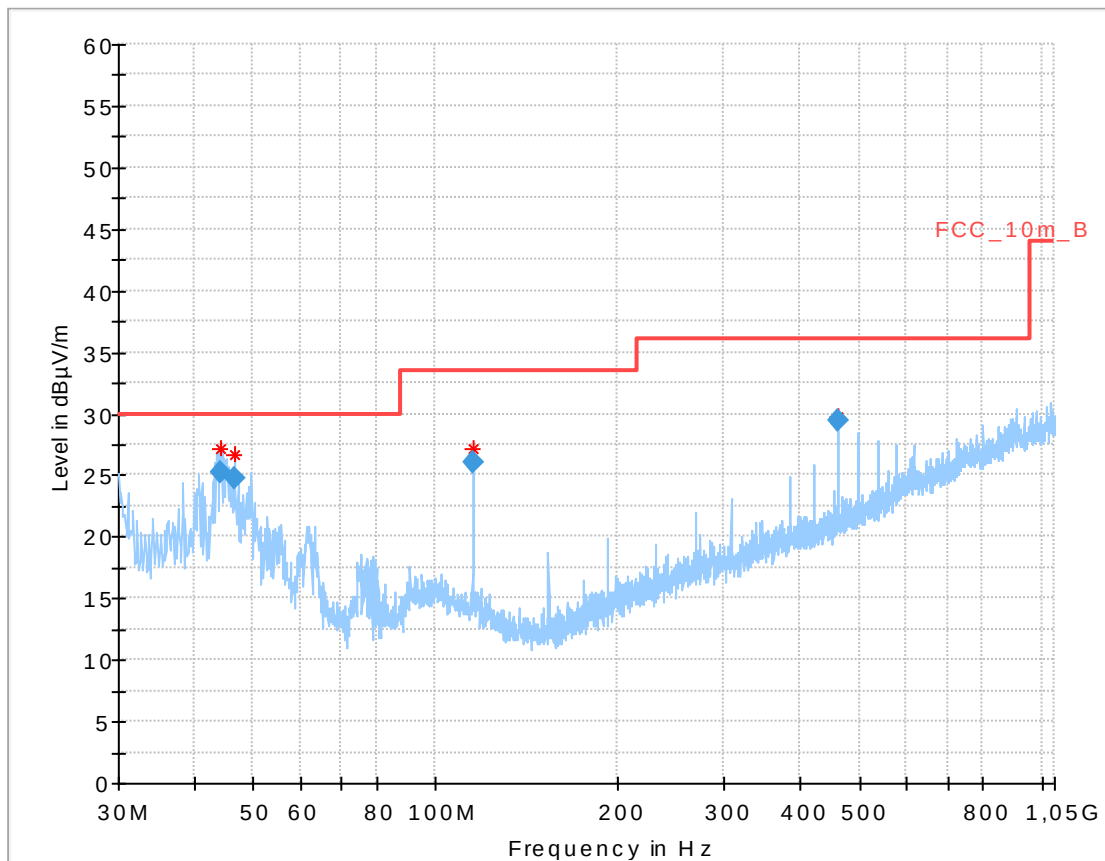**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
44.256000	25.16	30.00	4.84	1000.0	120.000	103.0	V	275	13.9
46.754550	24.76	30.00	5.24	1000.0	120.000	100.0	V	230	13.4
115.206300	26.01	33.50	7.49	1000.0	120.000	100.0	V	28	10.6
460.795350	29.38	36.00	6.62	1000.0	120.000	272.0	V	2	17.8

Plot 80:**Common Information**


EUT:	Kedge XV
Serial number:	proto
Test description:	FCC part 15
Operating condition:	TX 4492,8MHz
Operator name:	Kraus
Comment:	powered by PS

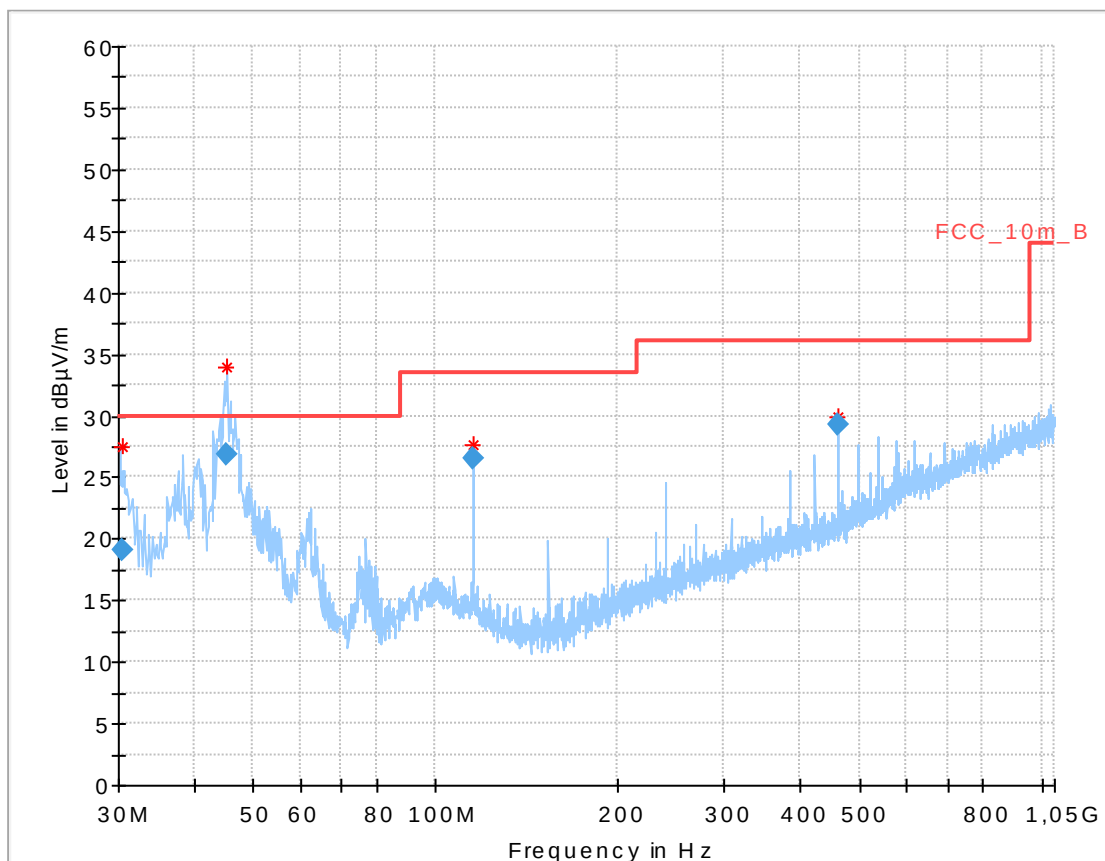**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.474825	19.15	30.00	10.85	1000.0	120.000	275.0	V	140	13.4
45.221100	26.86	30.00	3.14	1000.0	120.000	100.0	V	275	13.8
115.192650	26.45	33.50	7.05	1000.0	120.000	100.0	V	52	10.6
460.814100	29.22	36.00	6.78	1000.0	120.000	274.0	V	2	17.8

Plot 81:**Common Information**

EUT:	Kedge XV
Serial number:	proto
Test description:	FCC part 15
Operating condition:	TX 6489MHz
Operator name:	Kraus
Comment:	powered by PS

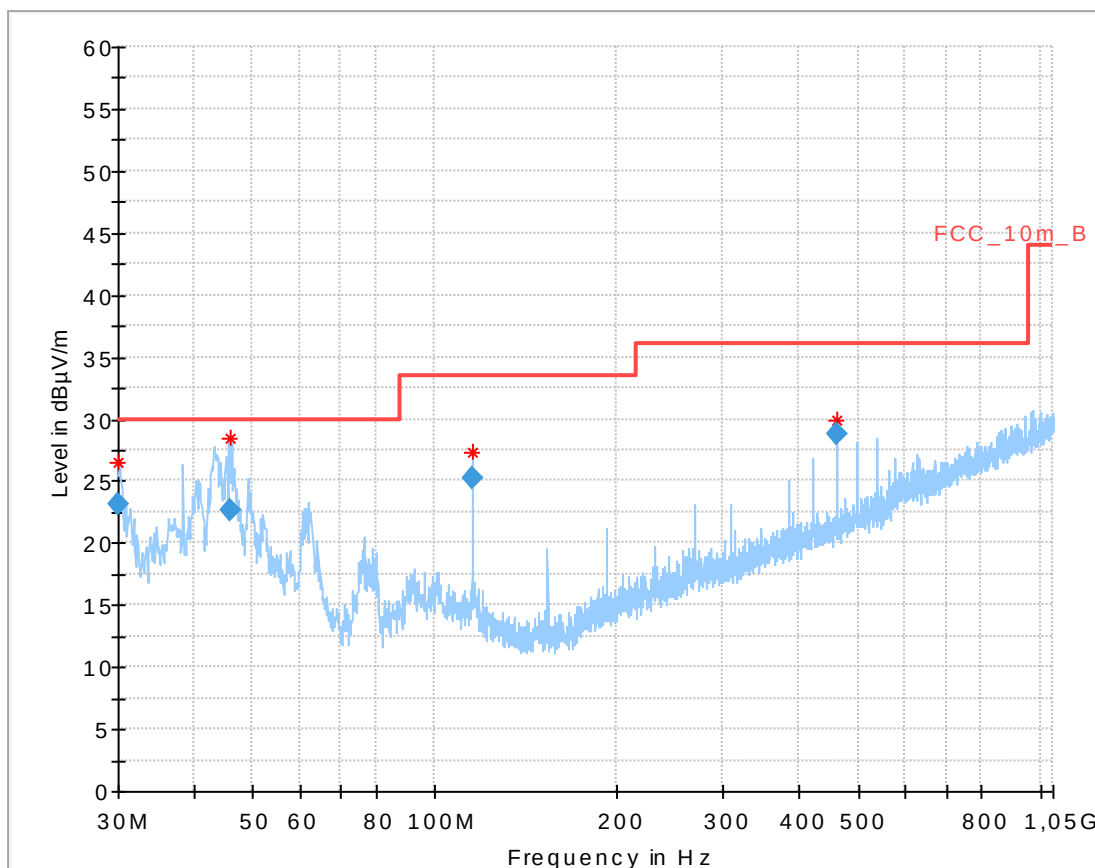
**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.021007	23.18	30.00	6.82	1000.0	120.000	103.0	V	-50	13.3
46.096500	22.58	30.00	7.42	1000.0	120.000	98.0	V	122	13.6
115.203600	25.22	33.50	8.28	1000.0	120.000	98.0	V	117	10.6
460.781100	28.81	36.00	7.19	1000.0	120.000	274.0	V	1	17.8

Plot 82: TX magnetic Channel 1 (bottom), RBW: 200 Hz/ 9kHz

RBW: 200 Hz, 9 kHz – 150 kHz


RBW: 9 kHz, 150 kHz – 30 MHz

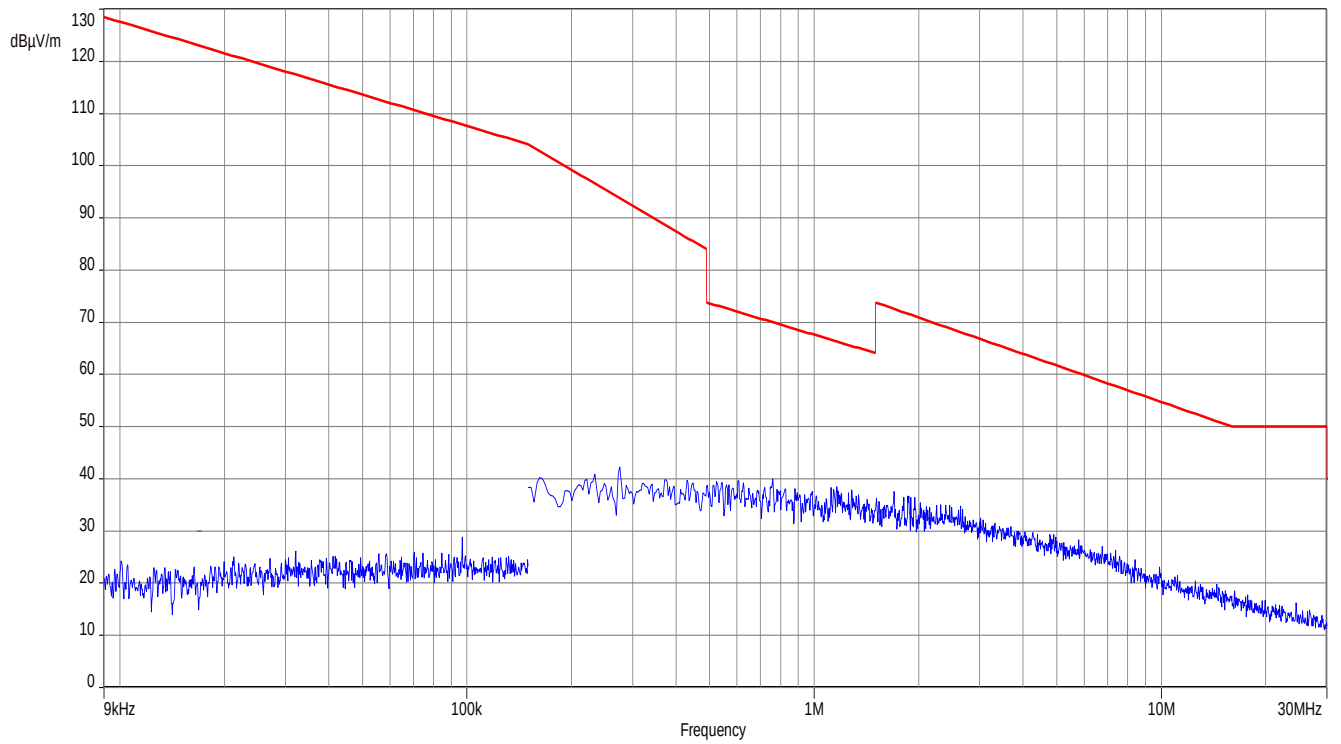

Plot 83: TX magnetic Channel 3 (middle), RBW: 200 Hz/ 9kHz

RBW: 200 Hz, 9 kHz – 150 kHz


RBW: 9 kHz, 150 kHz – 30 MHz

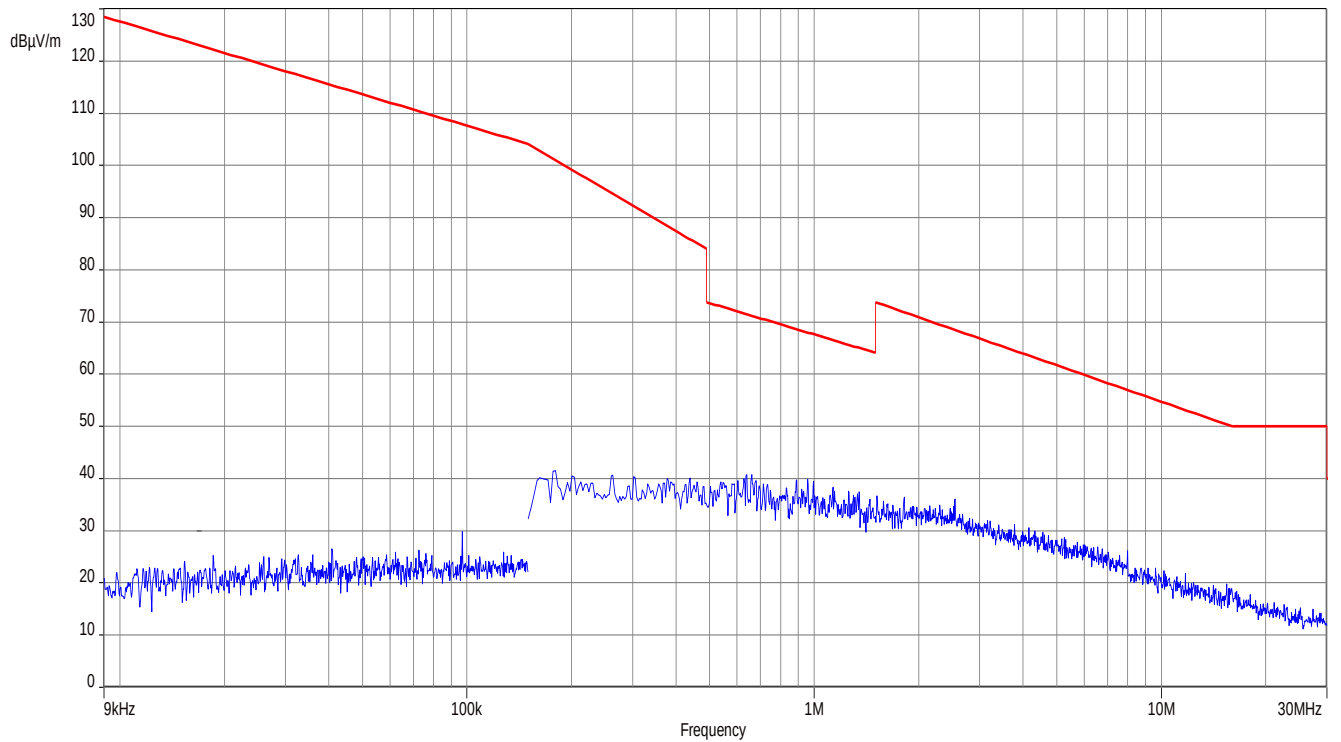

Plot 84: TX magnetic Channel 6 (top), RBW: 200 Hz/ 9kHz

RBW: 200 Hz, 9 kHz – 150 kHz

RBW: 9 kHz, 150 kHz – 30 MHz

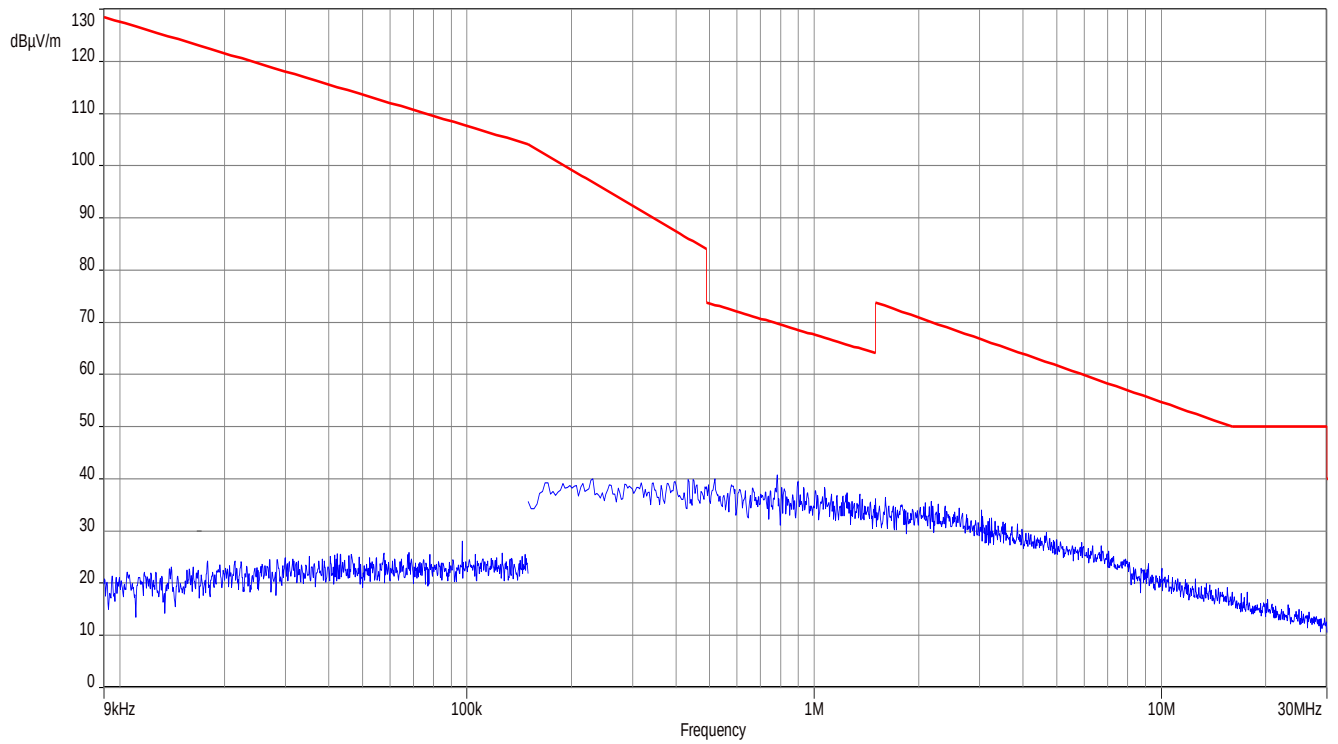


Plot 85: TX radiated, 1 GHz to 12.75 GHz, channel 1 (bottom)

Prescan:

 RBW: 10 kHz 960 MHz – 1.61 GHz
 10.6 GHz – 12.75 GHz

RBW: 1 MHz 1.61 GHz – 10.6 GHz

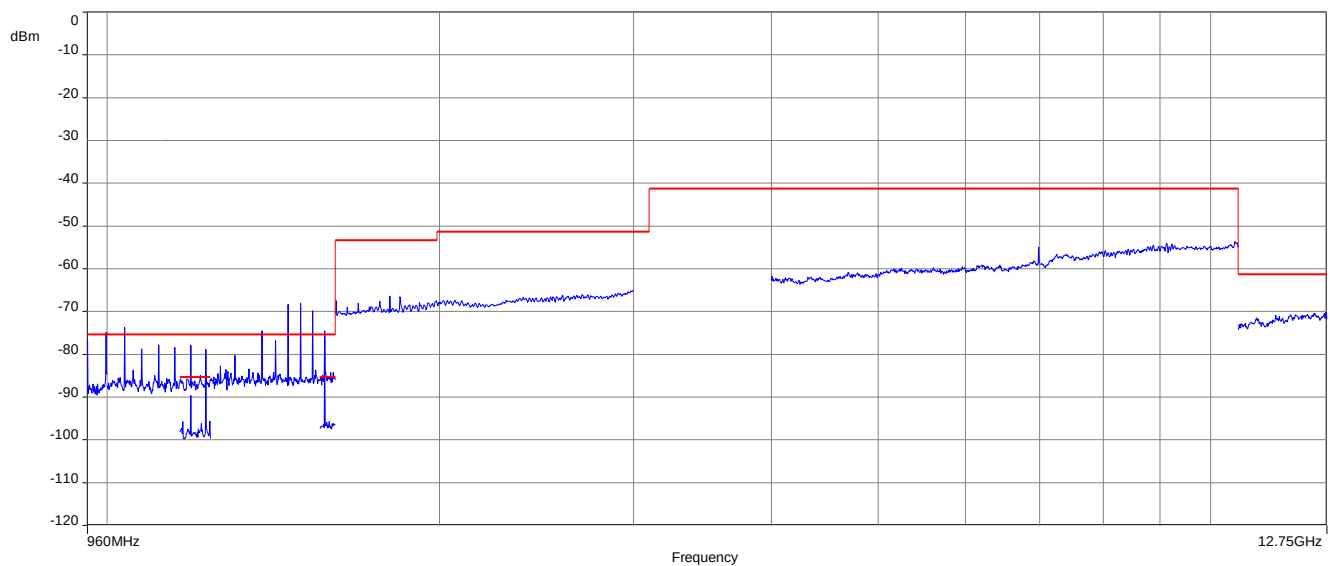 RBW: 1 kHz 1.164 GHz – 1.24 GHz
 1.559 GHz – 1.61 GHz


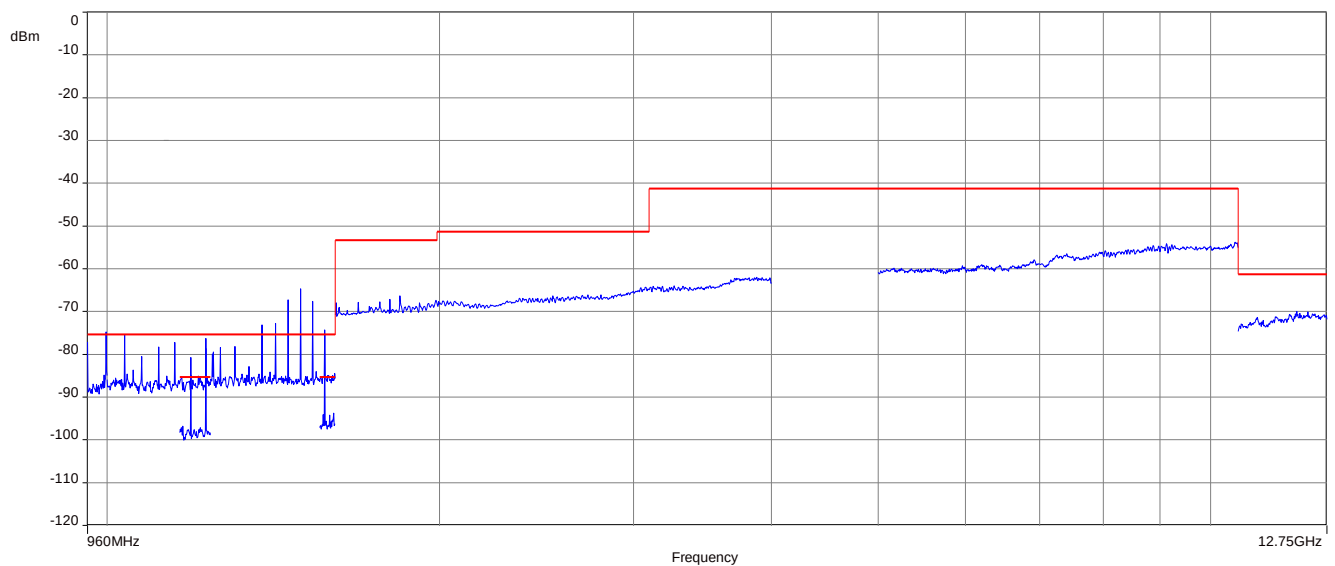
Spurious Emission Level (dBm)			
Frequency (MHz)	RBW	Detector	Level (dBm)
1497.577	1MHz	RMS	-61.4
1075.091	1MHz	RMS	-63.8
1574.397	1 kHz	RMS	-75.9
Measurement uncertainty			± 3dB

Plot 86: TX radiated, 1 GHz to 12.75 GHz, channel 3 (middle)

Prescan:

 RBW: 10 kHz 960 MHz – 1.61 GHz
 10.6 GHz – 12.75 GHz

RBW: 1 MHz 1.61 GHz – 10.6 GHz

 RBW: 1 kHz 1.164 GHz – 1.24 GHz
 1.559 GHz – 1.61 GHz


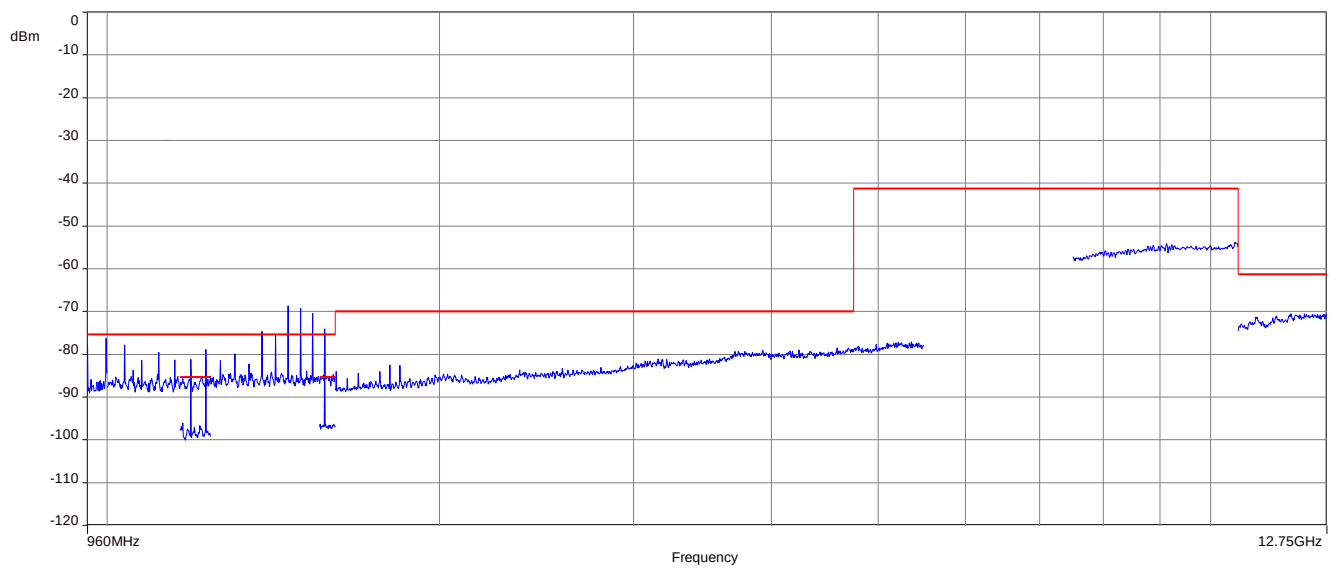
Spurious Emission Level (dBm)			
Frequency (MHz)	RBW	Detector	Level (dBm)
1036.783	1MHz	RMS	-65.3
1497.699	1MHz	RMS	-58.0
1574.437	1 kHz	RMS	-74.3
Measurement uncertainty			± 3dB

Plot 87: TX radiated, 1 GHz to 12.75 GHz, channel 6 (top), RSS 220

Prescan:

RBW: 10 kHz 960 MHz – 1.61 GHz
10.6 GHz – 12.75 GHz

RBW: 1 MHz 1.61 GHz – 10.6 GHz


RBW: 1kHz 1.164 GHz – 1.24 GHz
1.559 GHz – 1.61 GHz

Plot 88: TX radiated, 1 GHz to 12.75 GHz, channel 6 (top), FCC Part 15

Prescan:


 RBW: 10 kHz 960 MHz – 1.61 GHz
 10.6 GHz – 12.75 GHz

RBW: 1 MHz 1.61 GHz – 10.6 GHz

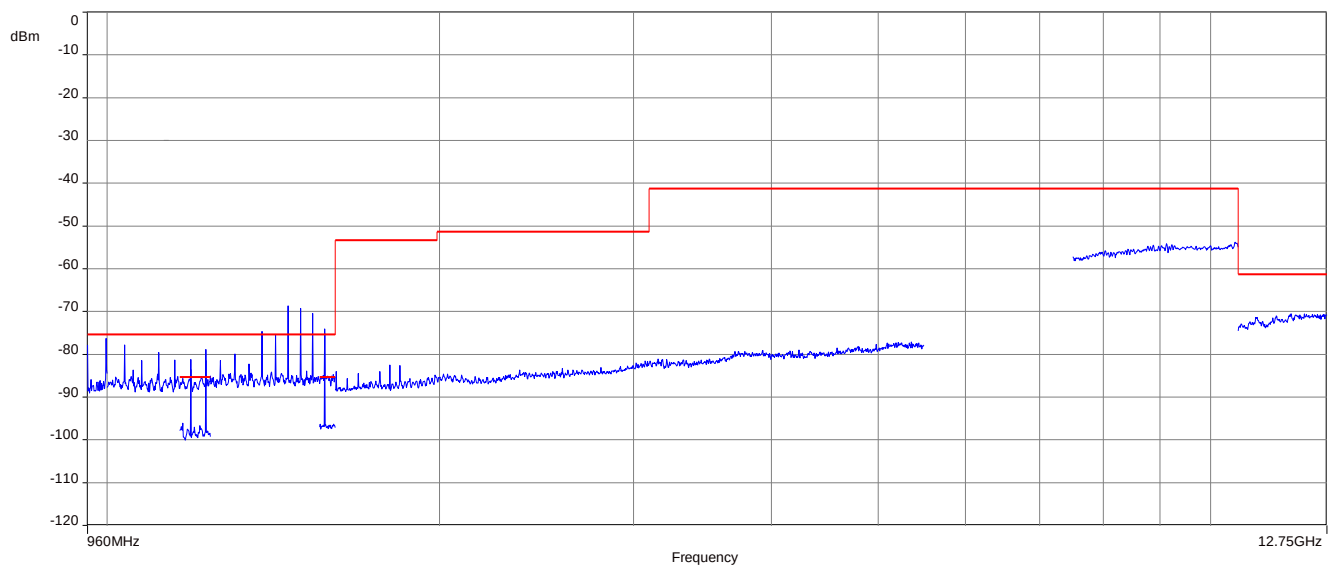 RBW: 1 kHz 1.164 GHz – 1.24 GHz
 1.559 GHz – 1.61 GHz


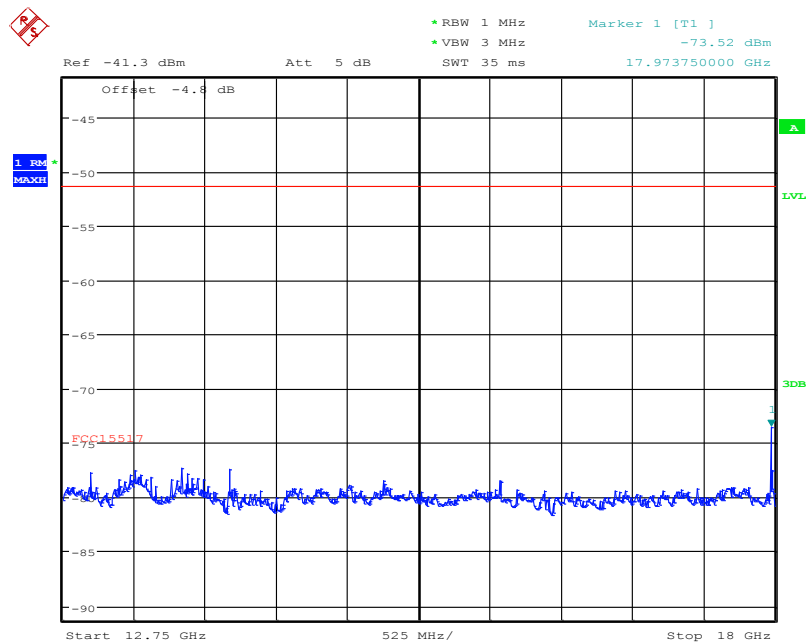
Spurious Emission Level (dBm)			
Frequency (MHz)	RBW	Detector	Level (dBm)
1075.274	1MHz	RMS	-65.486
1459.269	1MHz	RMS	-61.728
1574.437	1 kHz	RMS	-74.023
Measurement uncertainty			± 3dB

Plot 89: TX radiated, 12.75 GHz to 18 GHz, channel 1 (bottom)

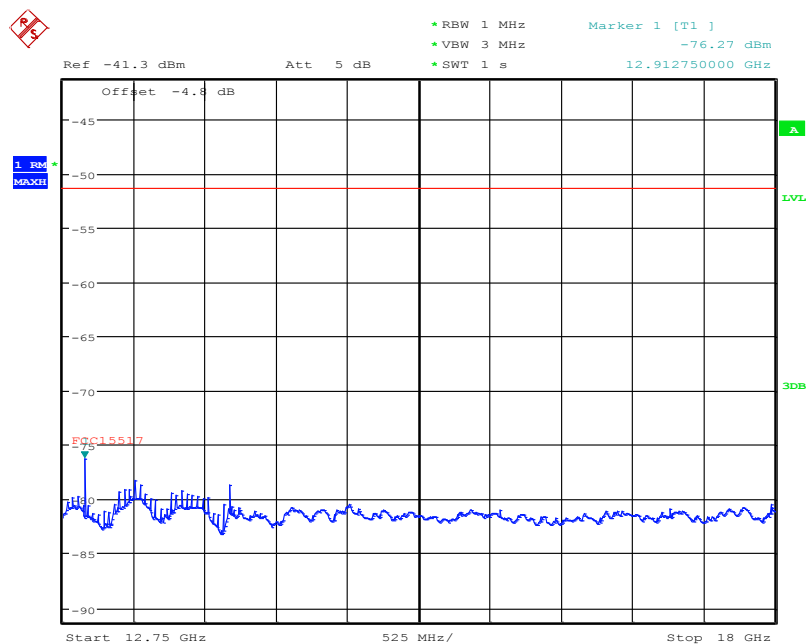

Date: 12.NOV.2015 10:46:45

Plot 90: TX radiated, 12.75 GHz to 18 GHz, channel 3 (middle)




Date: 12.NOV.2015 11:01:54

The screenshot displays a spectrum analyzer interface. At the top, a red 'R' logo is in the upper left corner. The main display area shows a frequency spectrum from 12.75 GHz to 18 GHz. A prominent signal is visible at 12.975 GHz, with a peak level of -65.25 dBm. The signal is labeled 'Marker 1 [T1]' and 'Ref -41.3 dBm'. The bandwidth is set to 3 MHz (VBW) and the resolution bandwidth is 1 MHz (RBW). The sweep time is 35 ms. The offset is -4.8 dB. The signal is identified as 'EC15517'. The noise floor is around -85 dBm. The signal is labeled '1' and '100%'.

Plot 92: TX radiated, 18 GHz to 26.5 GHz, channel 1 (bottom)




Plot 93: TX radiated, 18 GHz to 26.5 GHz, channel 3 (middle)

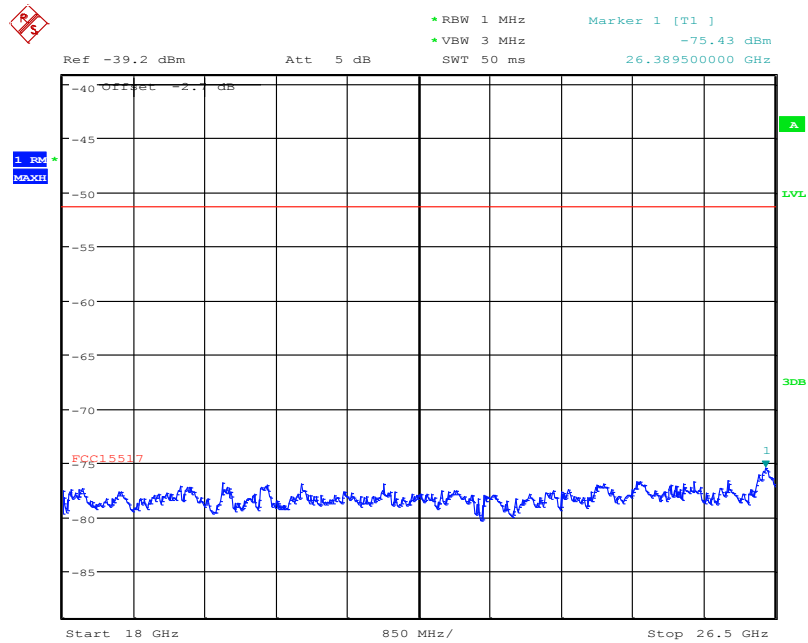


Date: 12.NOV.2015 10:59:37

Plot 94: TX radiated, 18 GHz to 26.5 GHz, channel 6 (top)

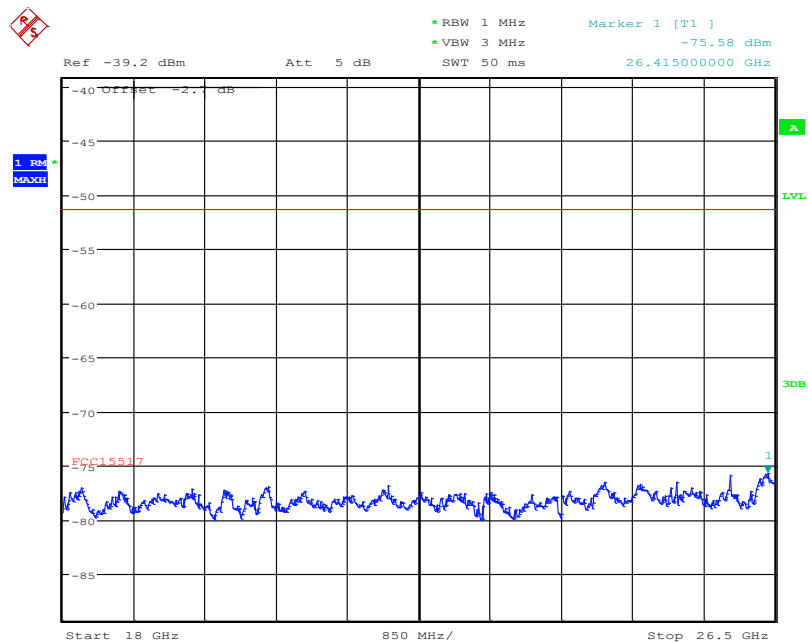


Date: 12.NOV.2015 11:07:17

Plot 95: TX radiated, 26.5 GHz to 40 GHz, channel 1 (bottom)

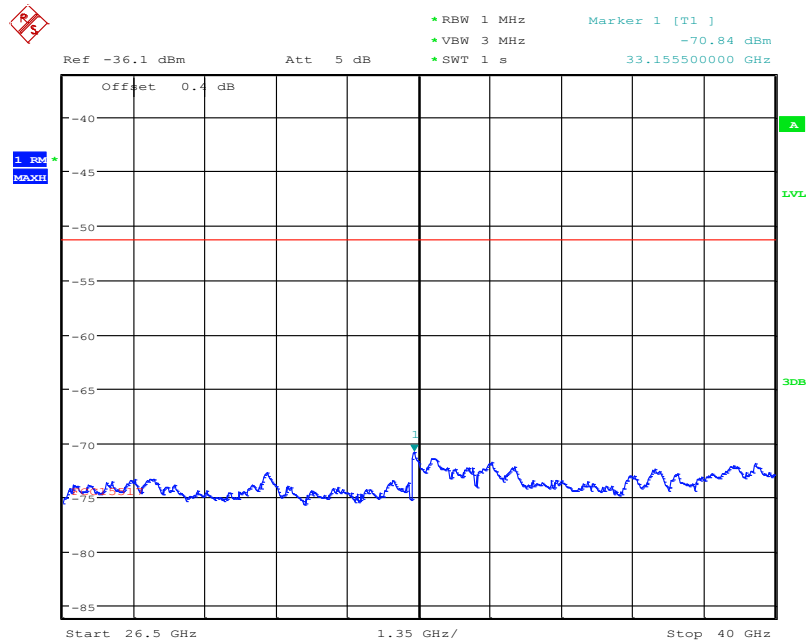


Date: 12.NOV.2015 10:54:18

Plot 96: TX radiated, 26.5 GHz to 40 GHz, channel 3 (middle)

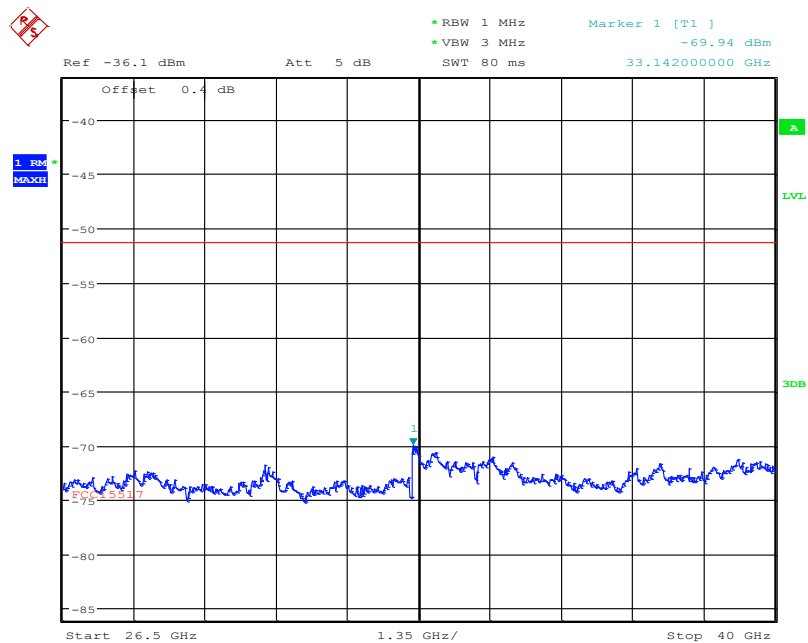

Date: 12.NOV.2015 10:57:31

Plot 97: TX radiated, 26.5 GHz to 40 GHz, channel 6 (top)

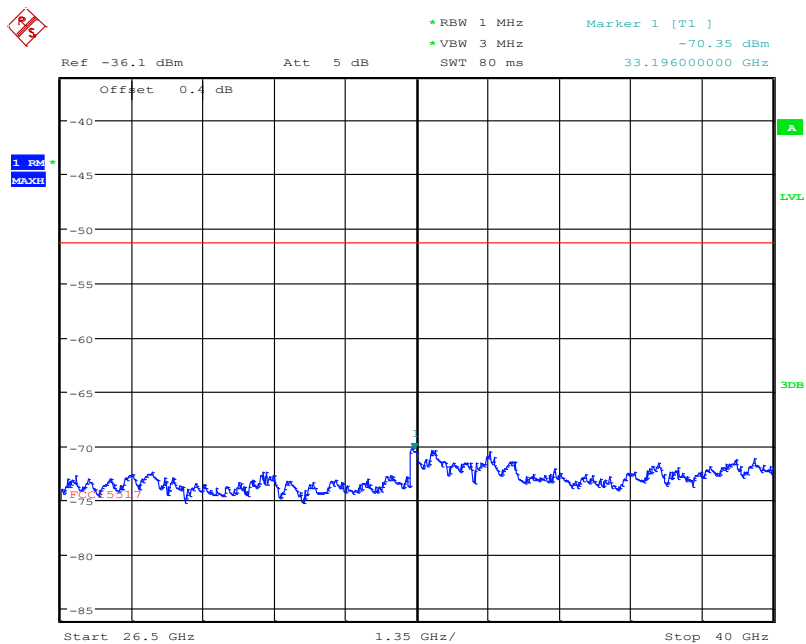


Date: 12.NOV.2015 11:08:59

Plot 98: RX radiated, 1 GHz to 12.75 GHz

Prescan:

RBW: 100 kHz 1 GHz – 12.75 GHz

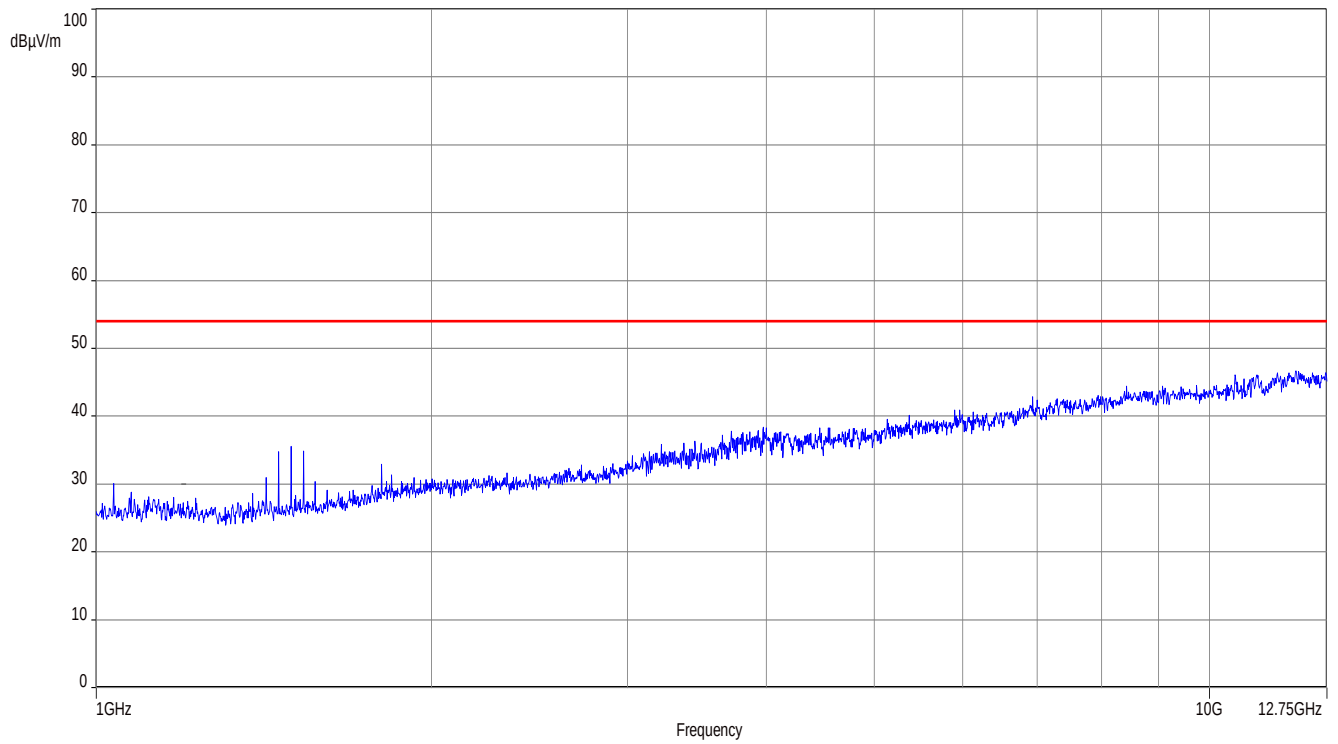

10.3 RX spurious emissions AC line conducted < 30 MHz

Description:

Measurements have been performed in TX mode as a worst case scenario. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
CFR Part 15.107(a)		ICES-003, Issue 5
RX Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dBμV/m)	Average (dBμV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50


*Decreases with the logarithm of the frequency

Result:

RX Spurious Emissions Conducted < 30 MHz [dBμV/m]		
F [MHz]	Detector	Level [dBμV/m]
see tables below		
Measurement uncertainty	± 3 dB	

Verdict: **complies**

Plot 99:

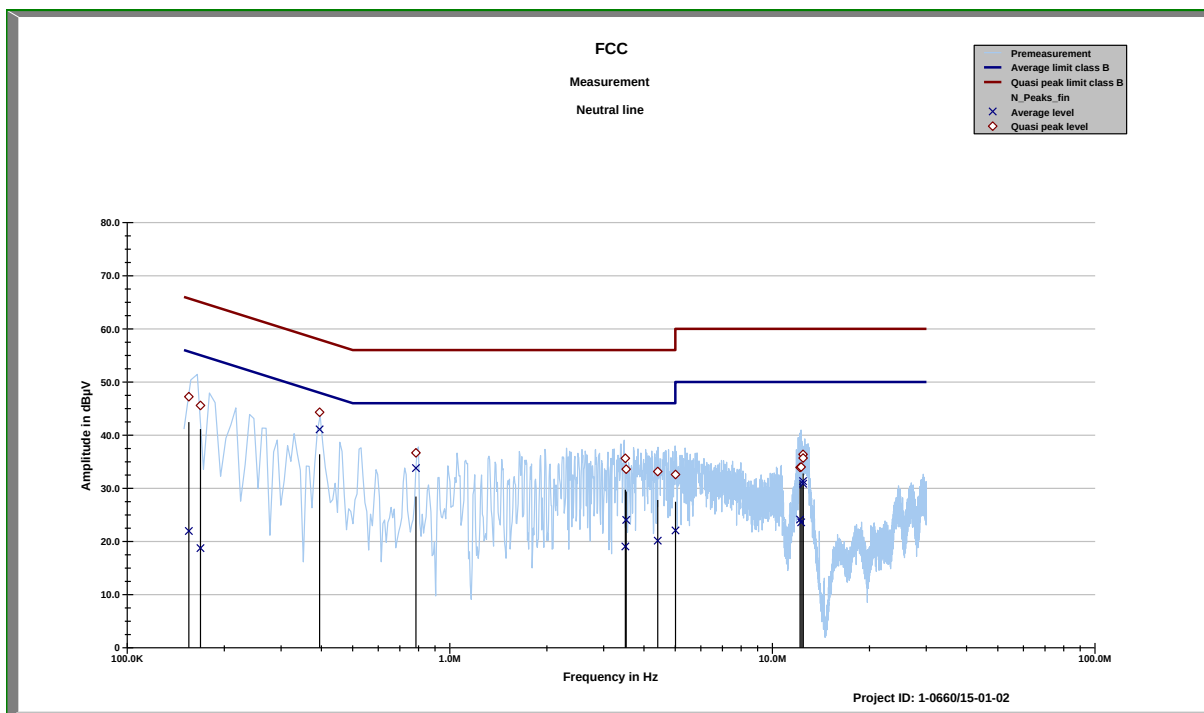

FCC

Neutral line tbl

Project ID: 1-0660/15-01-02

04:41:09 PM, Thursday, November 12, 2015

Frequency	Quasi peak level	Margin quasi peak	Average level	Margin average
MHz	dBµV	dBµV	dBµV	dBµV
0.15526	47.24	18.47	21.97	33.88
0.1687	45.58	19.44	18.75	36.72
0.39471	44.31	13.66	41.09	7.92
0.78501	36.67	19.33	33.81	12.19
3.4998	35.64	20.36	19.06	26.94
3.5196	33.59	22.41	24.05	21.95
4.4091	33.15	22.85	20.15	25.85
5.007	32.60	27.40	22.07	27.93
12.1754	33.92	26.08	24.12	25.88
12.2741	34.01	25.99	23.59	26.41
12.4366	36.37	23.63	31.35	18.65
12.4431	35.68	24.32	30.86	19.14


Project ID - 1-0660/15-01-02

EUT - Kedge XV

Serial Number - Proto

Operating mode - tx AC: 115V / 60 Hz

Plot 100:

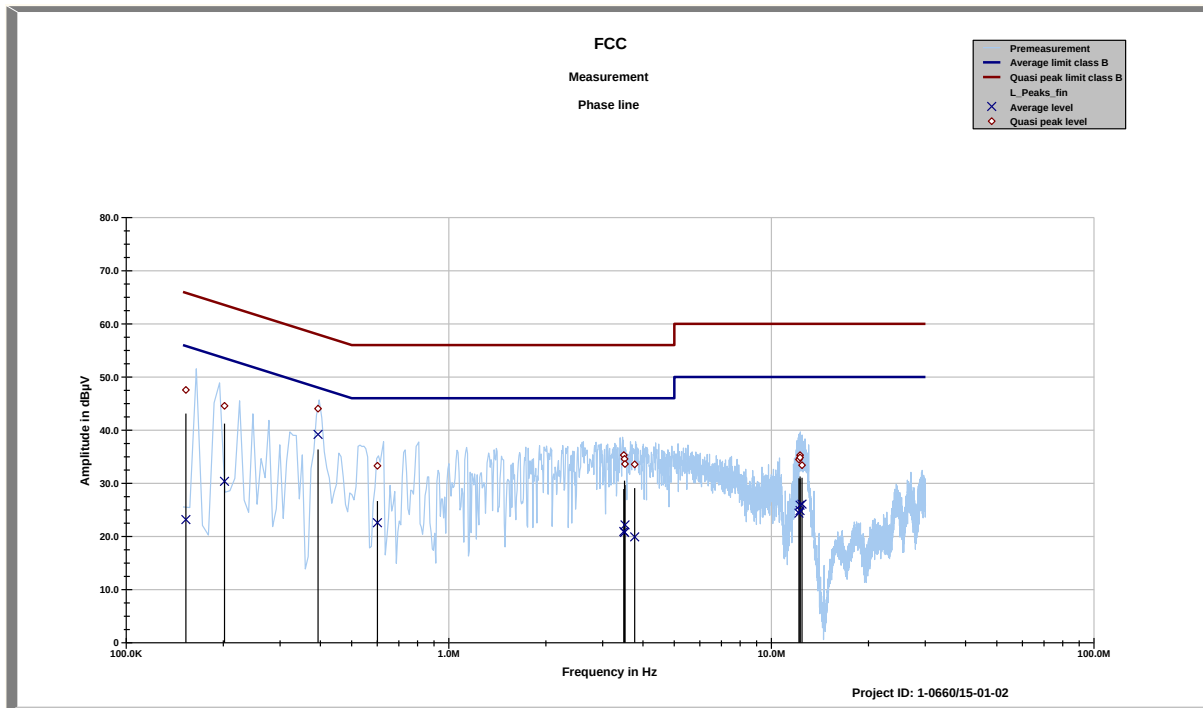

FCC

Phase line tbl

Project ID: 1-0660/15-01-02

04:41:09 PM, Thursday, November 12, 2015

Frequency	Quasi peak level	Margin quasi peak	Average level	Margin average
MHz	dBµV	dBµV	dBµV	dBµV
0.15314	47.56	18.27	23.18	32.74
0.2017	44.57	18.97	30.36	24.16
0.39332	44.04	13.95	39.20	9.85
0.60067	33.29	22.71	22.57	23.43
3.4846	35.30	20.70	20.94	25.06
3.5037	34.59	21.41	20.76	25.24
3.515	33.62	22.38	22.17	23.83
3.7663	33.56	22.44	19.92	26.08
12.1694	34.48	25.52	24.38	25.62
12.262	35.30	24.70	25.90	24.10
12.2662	34.86	25.14	24.87	25.13
12.4337	33.39	26.61	26.09	23.91

Project ID - 1-0660/15-01-02

EUT - Kedge XV

Serial Number - Proto

Operating mode - tx AC: 115V / 60 Hz

10.4 RX spurious emissions radiated

Description:

Measurement of radiated emissions in RX mode.

Measurement: see Tx mode

No RX-only mode available in intended use

Annex A Document history

Version	Applied changes	Date of release
DRAFT	Initial release - DRAFT	2015-12-08
	minor changes based on manufacturer comments	2016-01-06
A	correction of frequency value from 38.8 MHz to 38.4 MHz (Note on page 34)	2016-01-11
B	Photo Annex changed (C,D,E) to (E,F), see chapter 5.3 <i>Additional information</i> Max EIRP remeasured for Operating Conditions 1, 5, 9, 11 with higher RBW (50 MHz) for Max Peak measurement, see chapter 10.2 <i>TX Radiated Emissions</i>	2016-02-04
C	References and Limits for RSS 200 / RSS Gen added remark ‘*’ in chapter 5.2 added correction of the stated frequency bands for FCC and RSS (chapter 5.1)	2016-02-09

Annex B Further information

Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software
PMN		Product marketing name
HMN		Host marketing name
HVIN		Hardware version identification number
FVIN		Firmware version identification number

Annex C Accreditation Certificate

Front side of certificate

Back side of certificate



Deutsche Akkreditierungsstelle GmbH

Befehle gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
 Unterzeichnerin der Multilateralen Abkommen
 von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

CETECOM ICT Services GmbH
 Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

Drahtgebundene Kommunikation einschließlich xDSL
 VoIP und DECT
 Akustik
 Funk einschließlich WLAN
 Short Range Devices (SRD)
 RFID
 WiMax und Richtfunk
 Mobilfunk (GSM / DCS, Over the Air (OTA) Performance)
 Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive
 Produktsicherheit
 SAR und Hearing Aid Compatibility (HAC)
 Umweltsimulation
 Smart Card Terminals
 Bluetooth
 Wi-Fi-Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 07.03.2014 mit der
 Akkreditierungsnummer D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der
 Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 77 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-00

Saarbrücken, 07.03.2014

Datei: 030404-01-01-01-01

In Auftrag gegeben von: CETECOM
 Akkreditierungsstelle

Deutsche Akkreditierungsstelle GmbH

Standort Berlin
 Spittelmarkt 10
 10117 Berlin

Standort Frankfurt am Main
 Gartenstraße 6
 60594 Frankfurt am Main

Standort Braunschweig
 Bundesallee 100
 38115 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen
 Zustimmung der Deutschen Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate
 Weiterverbreitung des Deckblattes durch die uneigentlich genannte Konformitätsbewertungsstelle in
 unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt,
 die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß dem Gesetzbuch über die Akkreditierungsstelle (AkkStelleG) vom
 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments
 und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung
 im Zusammenhang mit der Vermarktung von Produkten (ABl. L 218 vom 9. Juli 2008, S. 30).
 Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der
 European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und
 der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen
 erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:

EA: www.europecooperation.orgILAC: www.ilac.orgIAF: www.iaf.org

Note:

The current certificate including annex may be received from CETECOM ICT Services on request.

Annex D Attestation statement



Verity Studios AG
Markus Hehn
c/o ETH Zurich
Sonneggstrasse 3
8092 Zurich
Switzerland

+41 44 586 55 88
mhehn@veritystudios.com
www.veritystudios.com

Federal Communication Commission
Equipment Authorization Division, Application Processing Branch
7435 Oakland Mills Road
Columbia, MD 21048

Zurich, 3 December 2015

Letter of attestation for model 'Kedge XV', FCC ID: 2AGUC-KDGXVA

To whom it may concern:

With respect to the test report of the model mentioned above, the spurious emissions observed in the frequency range 960MHz to 1610MHz are caused by digital circuitry used to enable the operation of the UWB transmitter.

The measurement report shows measurements of the spurious emissions when the device is transmitting as well as when it is not transmitting (reception mode). The measurements show that these spurious emissions are identical in transmission mode and reception mode. An RF switch disconnects the transmitter from the antenna in reception mode; the measurements therefore show that these spurious emissions are not intended to be radiated from the transmitter's antenna.

Kind regards,

A handwritten signature in blue ink, appearing to read "M. Hehn".

Name: Markus Hehn
Company: Verity Studios AG
Address: c/o ETH Zürich IDSC, ML K34
Sonneggstrasse 3
8092 Zurich
Switzerland
Phone: +41 44 586 5588
Fax: +41 44 632 1139
Email: mhehn@veritystudios.com