



FCC PART 15.247

TEST REPORT

For

Nusoft Corporation

3F.-1, No. 880, Zhongzheng Rd., Zhonghe Dist., New Taipei City 23586, Taiwan

FCC ID: 2AGVZNAP-570

Report Type:

Original Report

Product Type:

Nusoft Wireless AP Router

Report Number: RSZ151201817-00B

Report Date: 2017-03-15

Oscar Ye

A handwritten signature in black ink that reads "Oscar Ye".

Reviewed By: Engineer

Prepared By:

Bay Area Compliance Laboratories Corp. (Kunshan)
No.248 Chenghu Road, Kunshan, Jiangsu province, China
Tel: +86-0512-86175000
Fax: +86-0512-88934268
www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
ANTENNA SYSTEM	7
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	12
TEST EQUIPMENT LIST	13
FCC§15.247 (i), §1.1307 (b) (1) & §2.1091 –Maximum Permissible exposure (MPE).....	15
APPLICABLE STANDARD	15
FCC §15.203 - ANTENNA REQUIREMENT.....	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP.....	17
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	18
CORRECTED FACTOR & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - Spurious Emissions	23
APPLICABLE STANDARD	23
EUT SETUP	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
CORRECTED AMPLITUDE & MARGIN CALCULATION	24
TEST RESULTS SUMMARY	24
TEST DATA	25
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST DATA	55
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST DATA	58
FCC §15.247(e) - POWER SPECTRAL DENSITY	71
APPLICABLE STANDARD	71
TEST PROCEDURE	71
TEST DATA	71

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Nusoft Corporation's* product, model number: *NAP-570 (FCC ID: 2AGVZNAP-570)* in this report was a *Nusoft Wireless AP Router*, which was measured approximately: 205 mm (L) x 205 mm (W) x 50 mm (H), rated with input voltage: DC12V from adapter.

Adapter information:

Model: PA1015-120HUB150

Input: 100-240V~ 50/60Hz 0.4A

Output: 12V, 1.5A

** All measurement and test data in this report was gathered from production sample serial number 15120112 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-08-17.*

Objective

This report is prepared on behalf of *Nusoft Corporation* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP and Part 15E NII submissions with FCC ID: 2AGVZNAP-570.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		± 3.26 dB
RF conducted test with spectrum		± 0.9 dB
RF Output Power with Power meter		± 0.5 dB
Radiated emission	30MHz~1GHz	± 5.91 dB
	Above 1G	± 4.92 dB
Occupied Bandwidth		± 0.5 kHz
Temperature		± 1.0 °C
Humidity		$\pm 6\%$

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g mode and 802.11n-HT20, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	/	/
4	2437	/	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

Telnet terminal command was used.

The test was tested with 100% duty cycle and the worst case was performed as below:

802.11b:

Data rate: 11 Mbps, Power level: 18

802.11g:

Data rate: 54 Mbps, Power level: 14

802.11n-HT20:


Data rate: MCS0, Power level: 14

802.11n-HT40:


Data rate: MCS0, Power level: 12

Array Gain = 0 dB for $N_{\text{ANT}} \leq 4$;
 Array Gain = 0 dB for channel widths ≥ 40 MHz for any N_{ANT} ;
 Array Gain = 3 dB for 20-MHz channel widths with $N_{\text{ANT}} \geq 5$.


802.11b mode

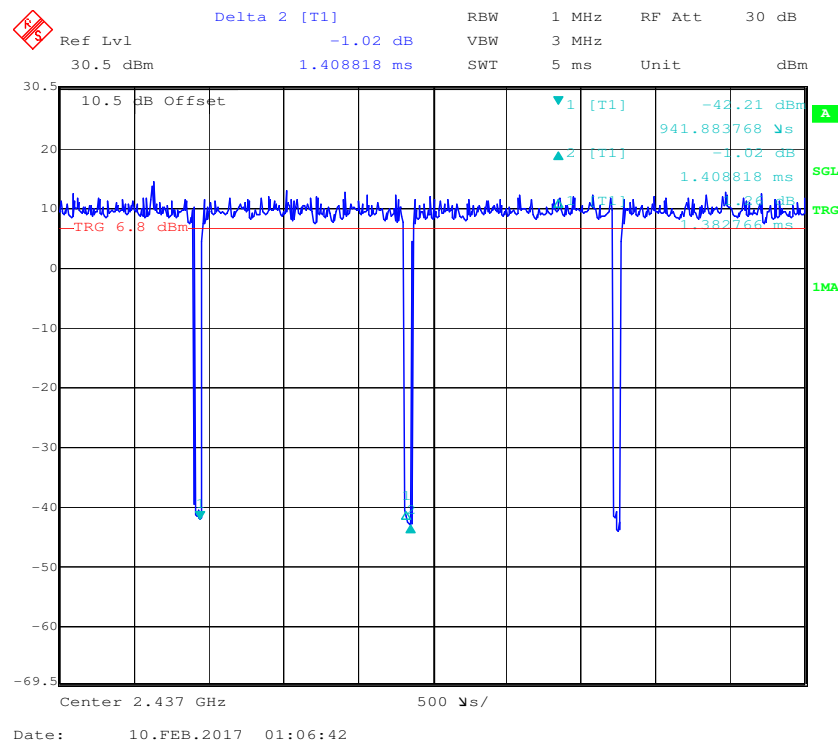


802.11g mode

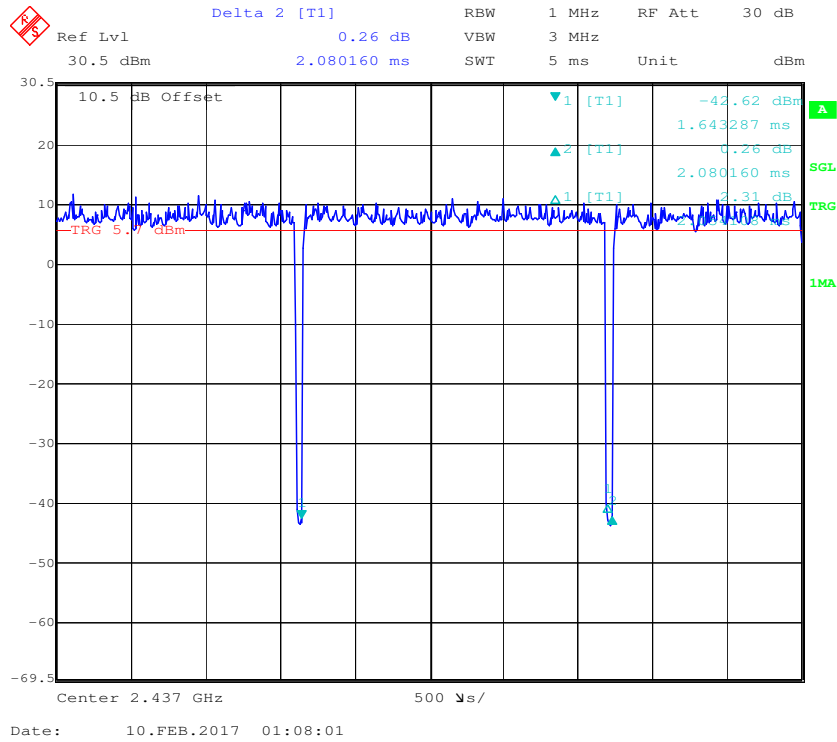

802.11n-HT20 Mode

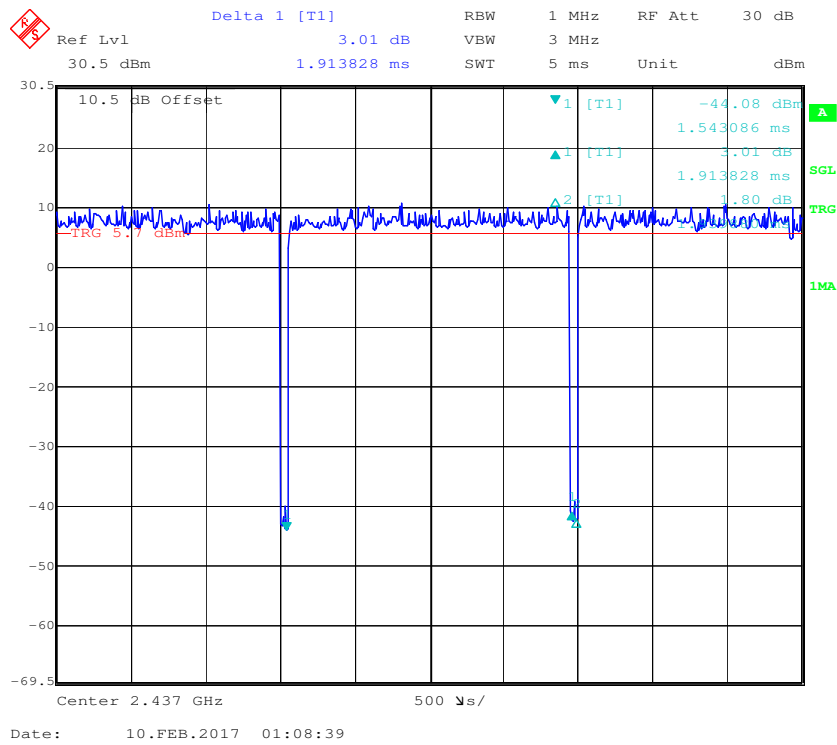

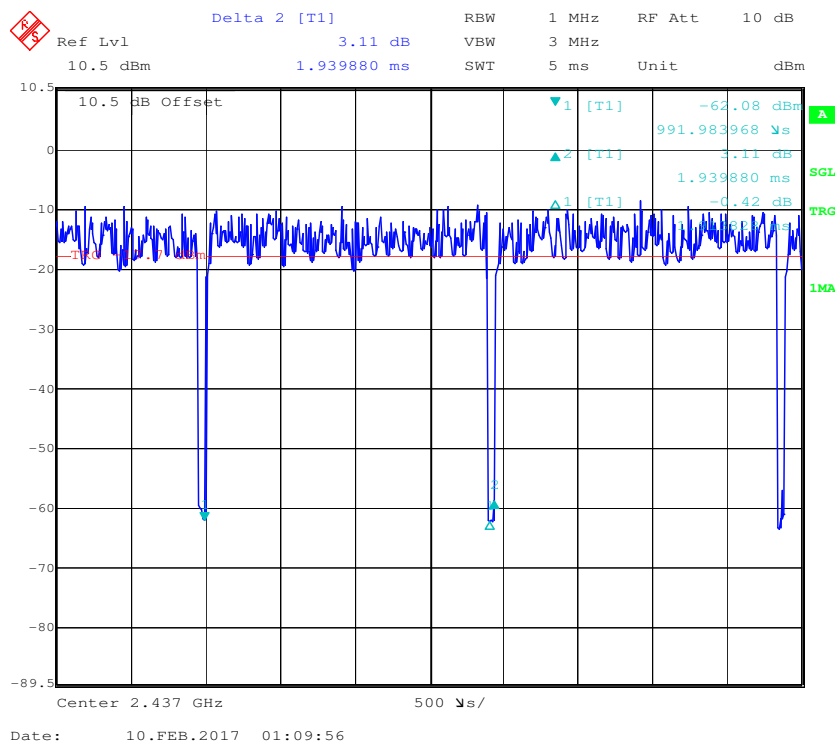802.11n-HT40 Mode

Band	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting	10log(1/x)
802.11b	>98	-	-	10Hz	0
802.11g	>98	-	-	10Hz	0
802.11n-HT20	>98	-	-	10Hz	0
802.11n-HT40	>98	-	-	10Hz	0

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Notebook	T400	R8-LXAXE 09/12
HUAWEI	POE	PoE35-54A	2102220369ARG6001801
MASS POWER	Adapter	NBS24J240100VU	1604

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding detachable RJ45 cable	1.0	POE	EUT
Un-shielding detachable RJ45 cable	3.0	EUT	Notebook
Un-shielding detachable RJ45 cable	3.0	POE	Notebook
Un-shielding detachable AC cable	0.9	Adapter	LISN
Un-shielding Un-detachable DC cable	1.5	EUT	Adapter

Block Diagram of Test Setup

Powered by Adapter

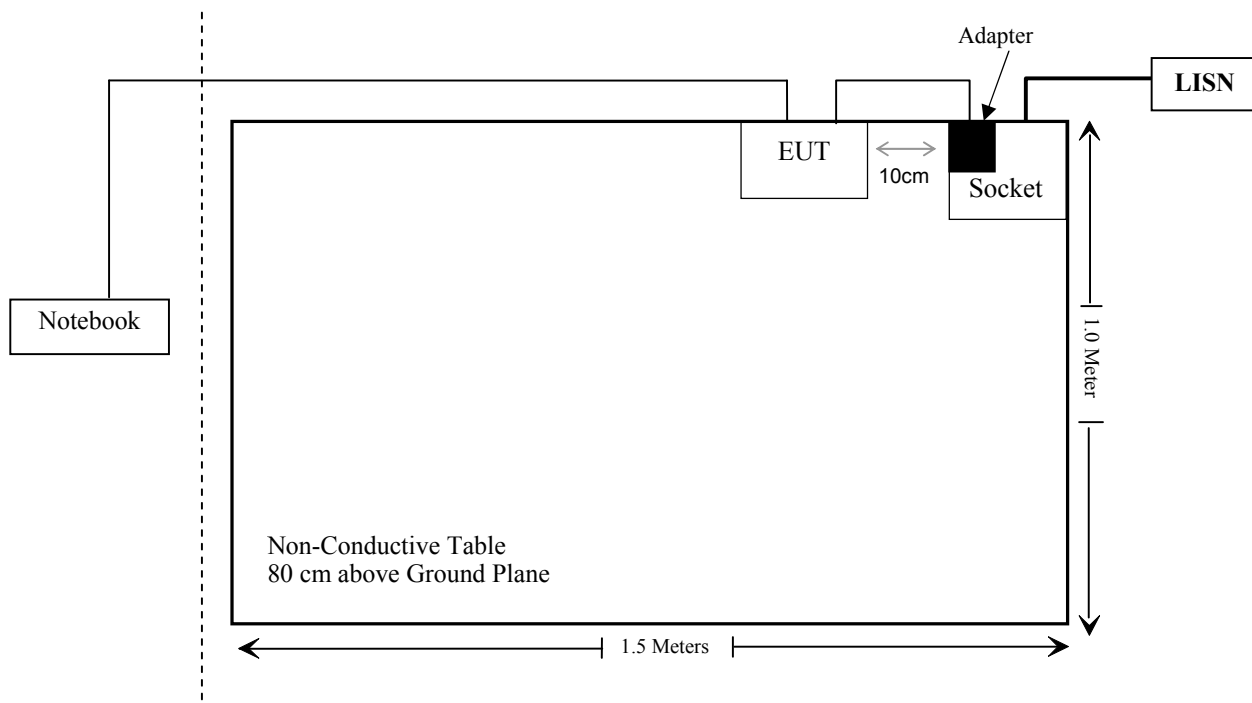

Powered by POE

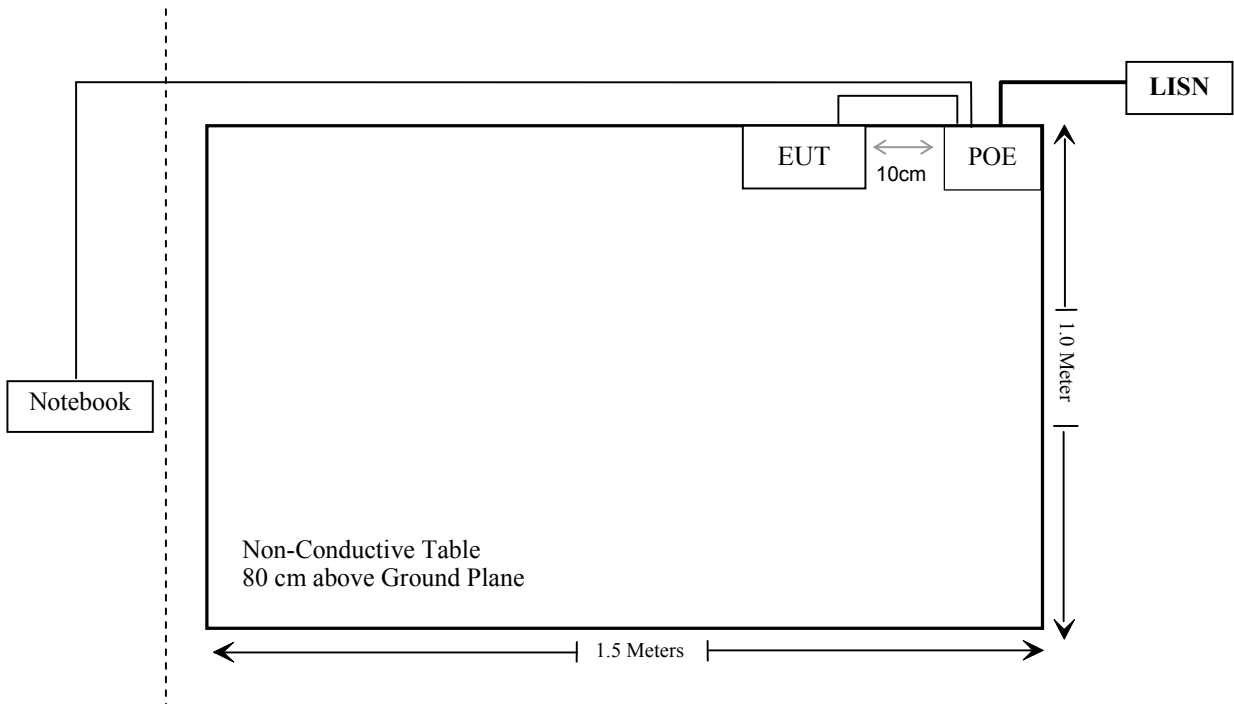

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2016-11-25	2017-11-25
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2016-10-10	2017-10-10
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2016-06-18	2017-06-17
MICRO-COAX	Coaxial line	UFB-293B-1-0480-50X50	97F0173	2016-09-08	2017-09-08
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	NCR	NCR
Radiation test					
Sonoma Instrument	Amplifier	330	171377	2016-12-12	2017-12-12
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-25
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-09-08	2017-09-08
EMCO	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-25
ETS	Horn Antenna	3115	6229	2016-01-11	2019-01-10
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-12

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted test					
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2015-12-10	2016-12-09
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2016-12-09	2017-12-08
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-15	2016-12-15
BACL	RF cable	KS-LAB-012	KS-LAB-012	2016-12-15	2017-12-15
WEINSCHL	10dB Attenuator	5328	N/A	2016-06-18	2017-06-18
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2016-07-04	2017-07-03
Agilent	Power Meter	N1912A	MY5000492	2016-11-17	2017-11-16
Agilent	Power Sensor	N1921A	MY54210024	2016-11-17	2017-11-16
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-21

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1091 –Maximum Permissible exposure (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data (Worst case):

Frequency (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	3.0	2.0	26.5	446.7	20	0.2	1.0

Simultaneous transmitting consideration: (referring to the NII report, the highest MPE for 5G band is 0.16mW/cm²)

The ratio=MPE_{DTS}/limit+MPE_{UNII}/limit=0.2+0.16=0.36<1.0, simultaneous exposure is not required.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 3 internal antennas arrangement, which were permanently attached and the antenna gain is 3.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

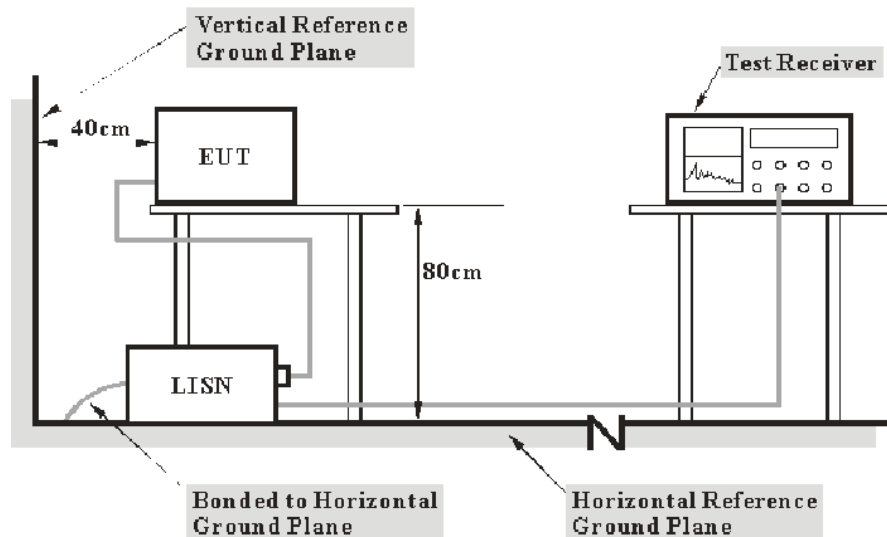

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa


The testing was performed by Layne Li on 2017-02-10.

EUT operation mode: Transmitting (worst case: simultaneous transmission for all the three transmitters)

Powered by Adapter

AC 120V/60 Hz, Line


Full Spectrum

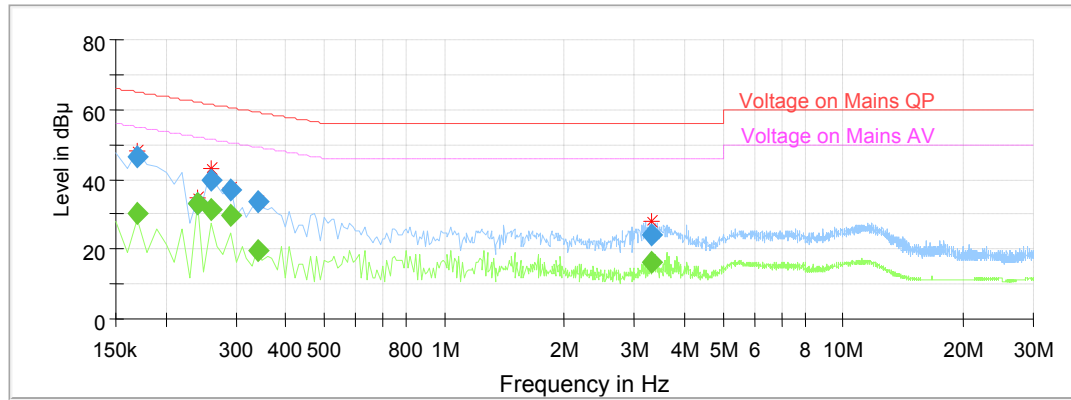

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.170000	---	30.02	9.000	L1	10.0	24.94	54.96	Compliance
0.170000	46.67	---	9.000	L1	10.0	18.29	64.96	Compliance
0.240000	---	32.96	9.000	L1	10.0	19.14	52.10	Compliance
0.240000	33.27	---	9.000	L1	10.0	28.83	62.10	Compliance
0.260000	---	31.21	9.000	L1	10.0	20.22	51.43	Compliance
0.260000	39.90	---	9.000	L1	10.0	21.53	61.43	Compliance
0.290000	---	29.64	9.000	L1	10.0	20.88	50.52	Compliance
0.290000	36.95	---	9.000	L1	10.0	23.57	60.52	Compliance
0.340000	---	19.80	9.000	L1	10.0	29.40	49.20	Compliance
0.340000	33.42	---	9.000	L1	10.0	25.78	59.20	Compliance
3.310000	---	16.29	9.000	L1	9.9	29.71	46.00	Compliance
3.310000	23.98	---	9.000	L1	9.9	32.02	56.00	Compliance

AC 120V/60 Hz, Neutral

Full Spectrum

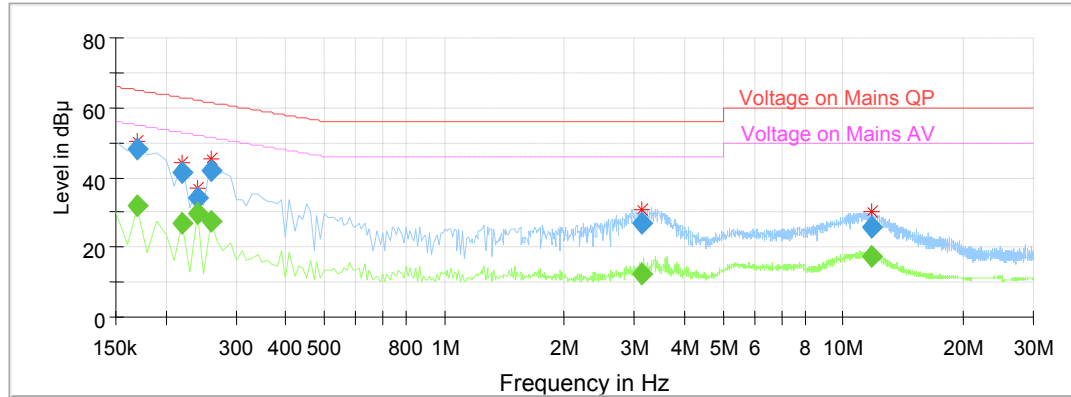


Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.170000	---	31.75	9.000	N	10.1	23.21	54.96	Compliance
0.170000	47.98	---	9.000	N	10.1	16.98	64.96	Compliance
0.220000	---	26.96	9.000	N	10.4	25.86	52.82	Compliance
0.220000	41.57	---	9.000	N	10.4	21.25	62.82	Compliance
0.240000	---	29.64	9.000	N	10.4	22.46	52.10	Compliance
0.240000	33.86	---	9.000	N	10.4	28.24	62.10	Compliance
0.260000	---	27.25	9.000	N	10.3	24.18	51.43	Compliance
0.260000	41.88	---	9.000	N	10.3	19.55	61.43	Compliance
3.120000	---	12.50	9.000	N	9.9	33.50	46.00	Compliance
3.120000	26.98	---	9.000	N	9.9	29.02	56.00	Compliance
11.770000	---	17.33	9.000	N	10.0	32.67	50.00	Compliance
11.770000	25.85	---	9.000	N	10.0	34.15	60.00	Compliance

Powered by POE

AC 120V/60 Hz, Line


Full Spectrum

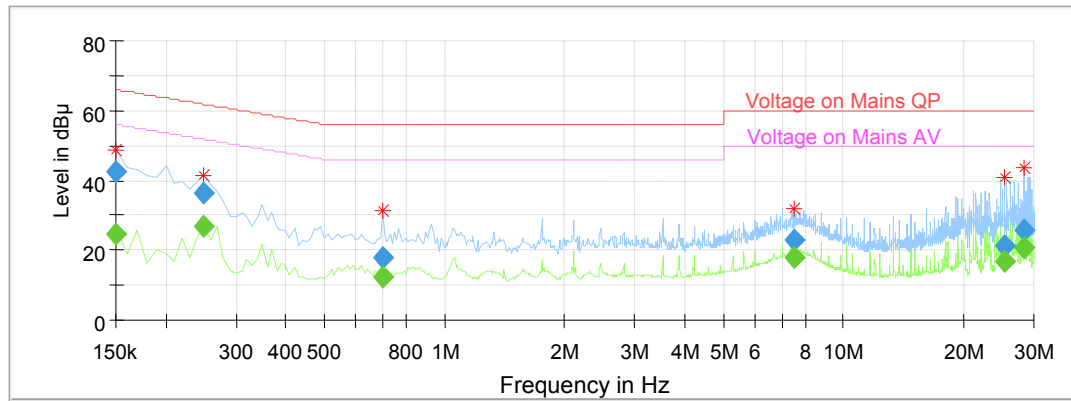

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	---	24.37	9.000	L1	10.1	31.63	56.00	Compliance
0.150000	42.44	---	9.000	L1	10.1	23.56	66.00	Compliance
0.250000	---	26.75	9.000	L1	10.0	25.01	51.76	Compliance
0.250000	36.48	---	9.000	L1	10.0	25.28	61.76	Compliance
0.700000	---	12.46	9.000	L1	10.0	33.54	46.00	Compliance
0.700000	17.82	---	9.000	L1	10.0	38.18	56.00	Compliance
7.530000	---	18.14	9.000	L1	10.0	31.86	50.00	Compliance
7.530000	22.78	---	9.000	L1	10.0	37.22	60.00	Compliance
25.410000	---	16.81	9.000	L1	10.5	33.19	50.00	Compliance
25.410000	21.51	---	9.000	L1	10.5	38.49	60.00	Compliance
28.240000	---	20.70	9.000	L1	10.5	29.30	50.00	Compliance
28.240000	25.50	---	9.000	L1	10.5	34.50	60.00	Compliance

AC 120V/60 Hz, Neutral

Full Spectrum

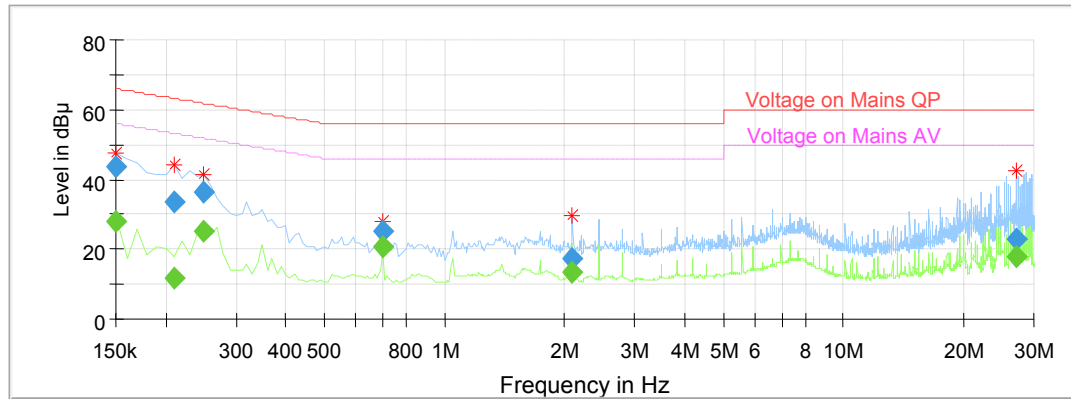

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	---	27.94	9.000	N	10.1	28.06	56.00	Compliance
0.150000	43.49	---	9.000	N	10.1	22.51	66.00	Compliance
0.210000	---	11.80	9.000	N	10.1	41.41	53.21	Compliance
0.210000	33.35	---	9.000	N	10.1	29.86	63.21	Compliance
0.250000	---	25.42	9.000	N	10.1	26.34	51.76	Compliance
0.250000	36.28	---	9.000	N	10.1	25.48	61.76	Compliance
0.700000	---	20.73	9.000	N	10.0	25.27	46.00	Compliance
0.700000	25.11	---	9.000	N	10.0	30.89	56.00	Compliance
2.090000	---	13.21	9.000	N	9.9	32.79	46.00	Compliance
2.090000	17.42	---	9.000	N	9.9	38.58	56.00	Compliance
26.970000	---	17.95	9.000	N	10.3	32.05	50.00	Compliance
26.970000	22.76	---	9.000	N	10.3	37.24	60.00	Compliance

Note:


- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - Spurious Emissions**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

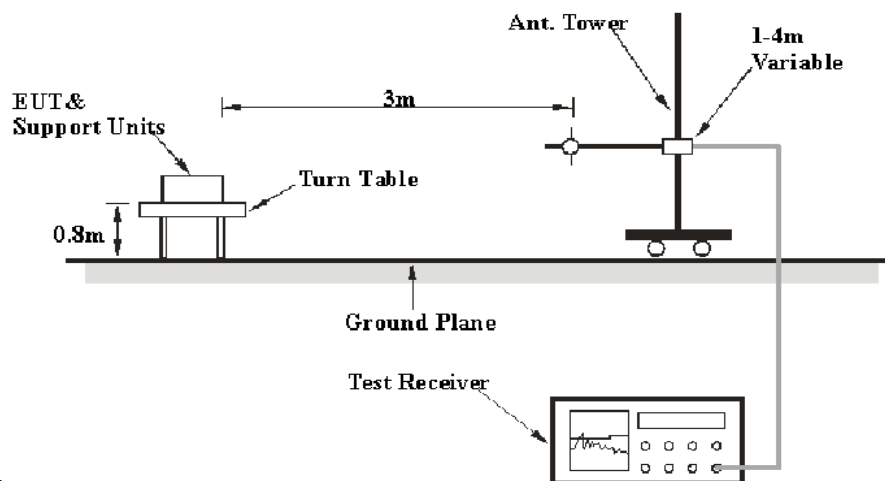

Above 1GHz

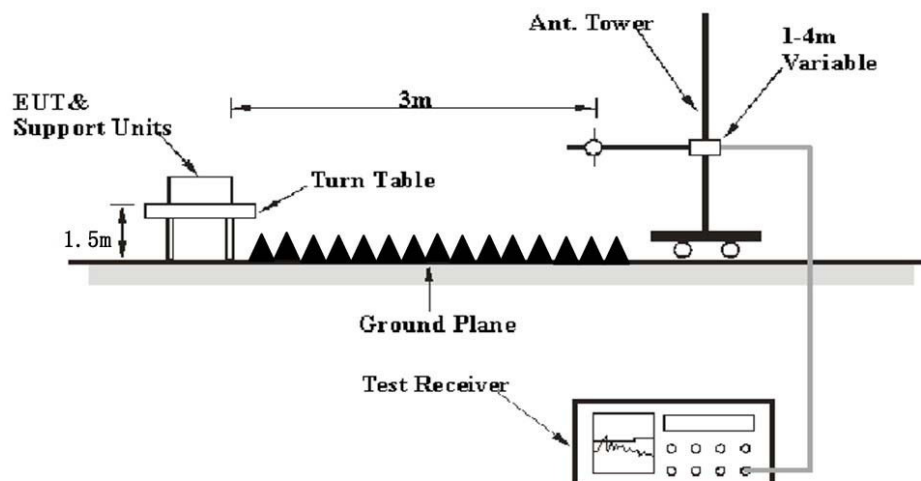

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.209 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Ave.
	1MHz	> 1/T ^{Note 2}	/	Ave.

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Layne Li on 2017-02-10.

EUT operation mode: Transmitting (worst case: simultaneous transmission for all the three transmitters)

30 MHz-25 GHz:**802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
381.25	43.63	QP	300	1.2	H	-9.46	34.17	46	11.83
2412.00	123.49	PK	91	1.8	H	-6.19	117.30	/	/
2412.00	117.32	Ave.	91	1.8	H	-6.19	111.13	/	/
2412.00	112.5	PK	245	1.2	V	-6.19	106.31	/	/
2412.00	105.75	Ave.	245	1.2	V	-6.19	99.56	/	/
2366.11	69.41	PK	26	1.7	H	-6.19	63.22	74	10.78
2366.11	57.08	Ave.	26	1.7	H	-6.19	50.89	54	3.11
2386.63	67.59	PK	17	2.4	H	-6.19	61.40	74	12.60
2386.63	55.06	Ave.	17	2.4	H	-6.19	48.87	54	5.13
2486.17	62.61	PK	151	1.2	H	-5.97	56.64	74	17.36
2486.17	48.3	Ave.	151	1.2	H	-5.97	42.33	54	11.67
4824.00	52.73	PK	190	2.2	V	1.6	54.33	74	19.67
4824.00	37.58	Ave.	190	2.2	V	1.6	39.18	54	14.82

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
381.25	43.13	QP	230	2.1	H	-9.46	33.67	46	12.33
2437.00	122.13	PK	336	2.4	H	-6.19	115.94	/	/
2437.00	116.14	Ave.	336	2.4	H	-6.19	109.95	/	/
2437.00	113.05	PK	34	2.5	V	-6.19	106.86	/	/
2437.00	106.93	Ave.	34	2.5	V	-6.19	100.74	/	/
2387.43	66.54	PK	347	2.0	H	-6.19	60.35	74	13.65
2387.43	51.54	Ave.	347	2.0	H	-6.19	45.35	54	8.65
2384.38	65.14	PK	46	1.3	H	-6.19	58.95	74	15.05
2384.38	50.20	Ave.	46	1.3	H	-6.19	44.01	54	9.99
2483.73	62.68	PK	112	2.5	H	-5.97	56.71	74	17.29
2483.73	48.80	Ave.	112	2.5	H	-5.97	42.83	54	11.17
4874.00	52.51	PK	357	2.4	V	1.83	54.34	74	19.66
4874.00	37.34	Ave.	357	2.4	V	1.83	39.17	54	14.83
High Channel (2462 MHz)									
381.25	42.99	QP	150	2.8	H	-9.46	33.53	46	12.47
2462.00	123.17	PK	211	1.9	H	-5.97	117.20	/	/
2462.00	117.2	Ave.	211	1.9	H	-5.97	111.23	/	/
2462.00	112.34	PK	332	2.0	V	-5.97	106.37	/	/
2462.00	106.37	Ave.	332	2.0	V	-5.97	100.40	/	/
2361.46	69.83	PK	334	2.0	H	-6.19	63.64	74	10.36
2361.46	54.18	Ave.	334	2.0	H	-6.19	47.99	54	6.01
2387.27	68.47	PK	213	2.4	H	-6.19	62.28	74	11.72
2387.27	53.42	Ave.	213	2.4	H	-6.19	47.23	54	6.77
2498.14	67.07	PK	127	2.0	H	-5.97	61.10	74	12.90
2498.14	52.78	Ave.	127	2.0	H	-5.97	46.81	54	7.19
4924.00	49.53	PK	301	1.7	V	1.83	51.36	74	22.64
4924.00	33.42	Ave.	301	1.7	V	1.83	35.25	54	18.75

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
381.25	43.37	QP	1	1.4	H	-9.46	33.91	46	12.09
2412.00	119.99	PK	266	2.4	H	-6.19	113.80	/	/
2412.00	107.3	Ave.	266	2.4	H	-6.19	101.11	/	/
2412.00	111.17	PK	339	2.4	V	-6.19	104.98	/	/
2412.00	99.47	Ave.	339	2.4	V	-6.19	93.28	/	/
2399.00	74.24	PK	30	1.8	H	-6.19	68.05	74	5.95
2399.00	54.87	Ave.	30	1.8	H	-6.19	48.68	54	5.32
2389.35	72.29	PK	207	2.0	H	-6.19	66.10	74	7.90
2389.35	53.42	Ave.	207	2.0	H	-6.19	47.23	54	6.77
2483.69	62.54	PK	256	1.6	H	-5.97	56.57	74	17.43
2483.69	47.67	Ave.	256	1.6	H	-5.97	41.70	54	12.30
4924.00	46.27	PK	58	1.6	V	1.83	48.10	74	25.90
4924.00	32.42	Ave.	58	1.6	V	1.83	34.25	54	19.75
Middle Channel (2437 MHz)									
381.25	43.64	QP	327	2.2	H	-9.46	34.18	46	11.82
2437.00	119.89	PK	350	1.5	H	-6.19	113.70	/	/
2437.00	107.04	Ave.	350	1.5	H	-6.19	100.85	/	/
2437.00	110.3	PK	166	2.4	V	-6.19	104.11	/	/
2437.00	98.97	Ave.	166	2.4	V	-6.19	92.78	/	/
2385.51	68.12	PK	120	2.2	H	-6.19	61.93	74	12.07
2385.51	54.18	Ave.	120	2.2	H	-6.19	47.99	54	6.01
2389.35	66.37	PK	266	1.5	H	-6.19	60.18	74	13.82
2389.35	52.59	Ave.	266	1.5	H	-6.19	46.40	54	7.60
2483.89	66.17	PK	236	1.4	H	-5.97	60.20	74	13.80
2483.89	50.60	Ave.	236	1.4	H	-5.97	44.63	54	9.37
4924.00	46.80	PK	205	2.3	V	1.83	48.63	74	25.37
4924.00	32.43	Ave.	205	2.3	V	1.83	34.26	54	19.74

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
381.25	43.89	QP	31	1.4	H	-9.46	34.43	46	11.57
2462.00	120.68	PK	112	1.4	H	-5.97	114.71	/	/
2462.00	108.79	Ave.	112	1.4	H	-5.97	102.82	/	/
2462.00	109.17	PK	225	2.2	V	-5.97	103.20	/	/
2462.00	96.87	Ave.	225	2.2	V	-5.97	90.90	/	/
2377.65	65.32	PK	195	1.3	H	-6.19	59.13	74	14.87
2377.65	53.42	Ave.	195	1.3	H	-6.19	47.23	54	6.77
2484.75	72.85	PK	193	2.4	H	-5.97	66.88	74	7.12
2484.75	54.52	Ave.	193	2.4	H	-5.97	48.55	54	5.45
2483.86	74.22	PK	180	1.5	H	-5.97	68.25	74	5.75
2483.86	55.97	Ave.	180	1.5	H	-5.97	50.00	54	4.00
4924.00	47.83	PK	214	1.9	V	1.83	49.66	74	24.34
4924.00	32.6	Ave.	214	1.9	V	1.83	34.43	54	19.57

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
381.25	43.52	QP	286	1.4	H	-9.46	34.06	46	11.94
2412.00	118.68	PK	166	1.5	H	-6.19	112.49	/	/
2412.00	106.55	Ave.	166	1.5	H	-6.19	100.36	/	/
2412.00	110.24	PK	342	1.5	V	-6.19	104.05	/	/
2412.00	97.68	Ave.	342	1.5	V	-6.19	91.49	/	/
2389.67	73.98	PK	174	2.3	H	-6.19	67.79	74	6.21
2389.67	53.42	Ave.	174	2.3	H	-6.19	47.23	54	6.77
2388.39	72.82	PK	183	2.3	H	-6.19	66.63	74	7.37
2388.39	52.59	Ave.	183	2.3	H	-6.19	46.40	54	7.60
2494.14	62.32	PK	12	1.9	H	-5.97	56.35	74	17.65
2494.14	47.67	Ave.	12	1.9	H	-5.97	41.70	54	12.30
4824.00	48.09	PK	330	2.4	V	1.6	49.69	74	24.31
4824.00	33.37	Ave.	330	2.4	V	1.6	34.97	54	19.03
Middle Channel (2437 MHz)									
381.25	43.09	QP	319	1.8	H	-9.46	33.63	46	12.37
2437.00	119.82	PK	316	1.5	H	-6.19	113.63	/	/
2437.00	107.7	Ave.	316	1.5	H	-6.19	101.51	/	/
2437.00	109.9	PK	324	2.1	V	-6.19	103.71	/	/
2437.00	96.07	Ave.	324	2.1	V	-6.19	89.88	/	/
2389.67	67.84	PK	203	2.0	H	-6.19	61.65	74	12.35
2389.67	51.68	Ave.	203	2.0	H	-6.19	45.49	54	8.51
2386.63	66.04	PK	65	1.9	H	-6.19	59.85	74	14.15
2386.63	50.67	Ave.	65	1.9	H	-6.19	44.48	54	9.52
2484.62	64.80	PK	210	1.6	H	-5.97	58.83	74	15.17
2484.62	49.27	Ave.	210	1.6	H	-5.97	43.30	54	10.70
4874.00	47.23	PK	303	1.6	V	1.83	49.06	74	24.94
4874.00	32.59	Ave.	303	1.6	V	1.83	34.42	54	19.58

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
381.25	43.95	QP	26	3.0	H	-9.46	34.49	46	11.51
2462.00	120.27	PK	22	1.3	H	-5.97	114.30	/	/
2462.00	107.47	Ave.	22	1.3	H	-5.97	101.50	/	/
2462.00	110.33	PK	40	1.6	V	-5.97	104.36	/	/
2462.00	97.92	Ave.	40	1.6	V	-5.97	91.95	/	/
2368.67	64.74	PK	261	1.2	H	-6.19	58.55	74	15.45
2368.67	50.67	Ave.	261	1.2	H	-6.19	44.48	54	9.52
2483.53	74.97	PK	4	2.2	H	-5.97	69.00	74	5.00
2483.53	52.78	Ave.	4	2.2	H	-5.97	46.81	54	7.19
2484.16	72.52	PK	301	1.7	H	-5.97	66.55	74	7.45
2484.16	51.77	Ave.	301	1.7	H	-5.97	45.80	54	8.20
4924.00	46.55	PK	103	2.1	V	1.83	48.38	74	25.62
4924.00	32.42	Ave.	103	2.1	V	1.83	34.25	54	19.75

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
381.25	44.08	QP	70	1.0	H	-9.46	34.62	46	11.38
2422.00	115.62	PK	49	2.0	H	-6.19	109.43	/	/
2422.00	102.07	Ave.	49	2.0	H	-6.19	95.88	/	/
2422.00	106.24	PK	260	2.5	V	-6.19	100.05	/	/
2422.00	93.13	Ave.	260	2.5	V	-6.19	86.94	/	/
2389.51	78.31	PK	142	1.1	H	-6.19	72.12	74	1.88
2389.51	55.52	Ave.	142	1.1	H	-6.19	49.33	54	4.67
2387.91	77.21	PK	286	1.9	H	-6.19	71.02	74	2.98
2387.91	54.18	Ave.	286	1.9	H	-6.19	47.99	54	6.01
2490.44	61.24	PK	291	2.5	H	-5.97	55.27	74	18.73
2490.44	45.74	Ave.	291	2.5	H	-5.97	39.77	54	14.23
4824.00	48.21	PK	74	1.6	V	1.6	49.81	74	24.19
4824.00	32.87	Ave.	74	1.6	V	1.6	34.47	54	19.53
Middle Channel (2437 MHz)									
381.25	43.21	QP	141	2.6	H	-9.46	33.75	46	12.25
2437.00	114.27	PK	82	2.5	H	-6.19	108.08	/	/
2437.00	100.92	Ave.	82	2.5	H	-6.19	94.73	/	/
2437.00	104.14	PK	128	2.1	V	-6.19	97.95	/	/
2437.00	90.67	Ave.	128	2.1	V	-6.19	84.48	/	/
2324.91	64.10	PK	309	1.5	H	-6.42	57.68	74	16.32
2324.91	49.33	Ave.	309	1.5	H	-6.42	42.91	54	11.09
2353.92	63.89	PK	100	1.6	H	-6.19	57.70	74	16.30
2353.92	49.04	Ave.	100	1.6	H	-6.19	42.85	54	11.15
2483.69	62.68	PK	164	1.4	H	-5.97	56.71	74	17.29
2483.69	45.97	Ave.	164	1.4	H	-5.97	40.00	54	14.00
4874.00	47.70	PK	307	2.2	V	1.83	49.53	74	24.47
4874.00	32.43	Ave.	307	2.2	V	1.83	34.26	54	19.74

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2452 MHz)									
381.25	43.41	QP	239	2.2	H	-9.46	33.95	46	12.05
2452.00	115.81	PK	44	1.1	H	-5.97	109.84	/	/
2452.00	102.53	Ave.	44	1.1	H	-5.97	96.56	/	/
2452.00	106.23	PK	79	1.3	V	-5.97	100.26	/	/
2452.00	92.35	Ave.	79	1.3	V	-5.97	86.38	/	/
2364.51	63.11	PK	58	1.5	H	-6.19	56.92	74	17.08
2364.51	48.62	Ave.	58	1.5	H	-6.19	42.43	54	11.57
2483.56	78.53	PK	353	1.9	H	-5.97	72.56	74	1.44
2483.56	54.58	Ave.	353	1.9	H	-5.97	48.61	54	5.39
2484.72	77.31	PK	102	2.0	H	-5.97	71.34	74	2.66
2484.72	53.80	Ave.	102	2.0	H	-5.97	47.83	54	6.17
4904.00	46.79	PK	168	1.3	V	1.83	48.62	74	25.38
4904.00	32.51	Ave.	168	1.3	V	1.83	34.34	54	19.66

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


Emission more than 20 dB below the limit is not required to be reported.

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	100.0 kPa

The testing was performed by Alisa Gao on 2016-10-07.

Test Result: Pass.


Please refer to the following tables and plots.

EUT operation mode: Transmitting


Antenna 1

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	6.733	≥ 500
Middle	2437	6.673	≥ 500
High	2462	6.703	≥ 500
802.11g mode			
Low	2412	16.683	≥ 500
Middle	2437	16.693	≥ 500
High	2462	16.703	≥ 500
802.11n-HT20 mode			
Low	2412	17.876	≥ 500
Middle	2437	17.876	≥ 500
High	2462	17.906	≥ 500
802.11n-HT40 mode			
Low	2422	36.854	≥ 500
Middle	2437	36.764	≥ 500
High	2452	36.673	≥ 500

802.11b Low Channel

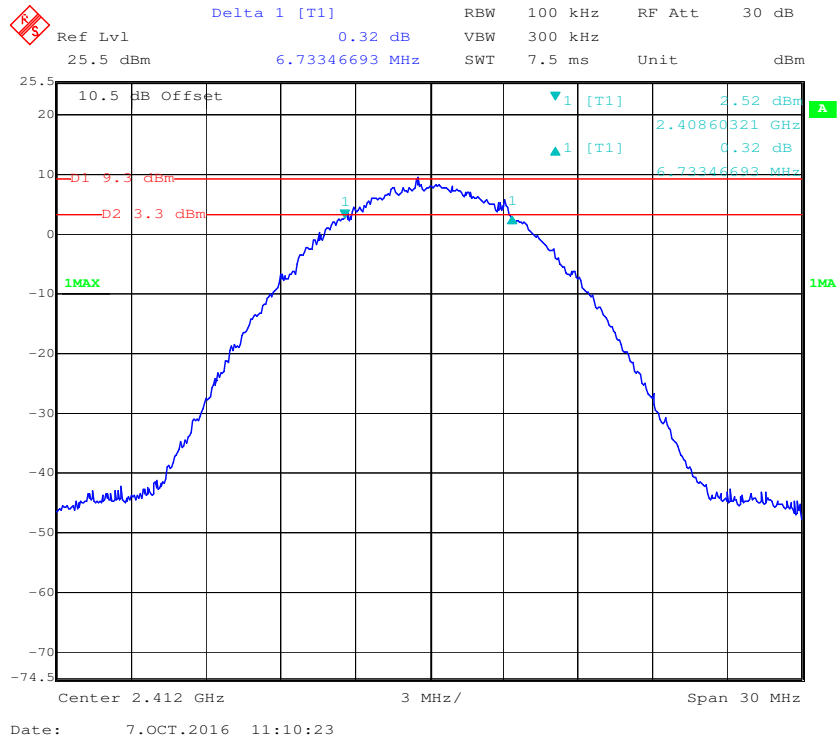

802.11b Middle Channel

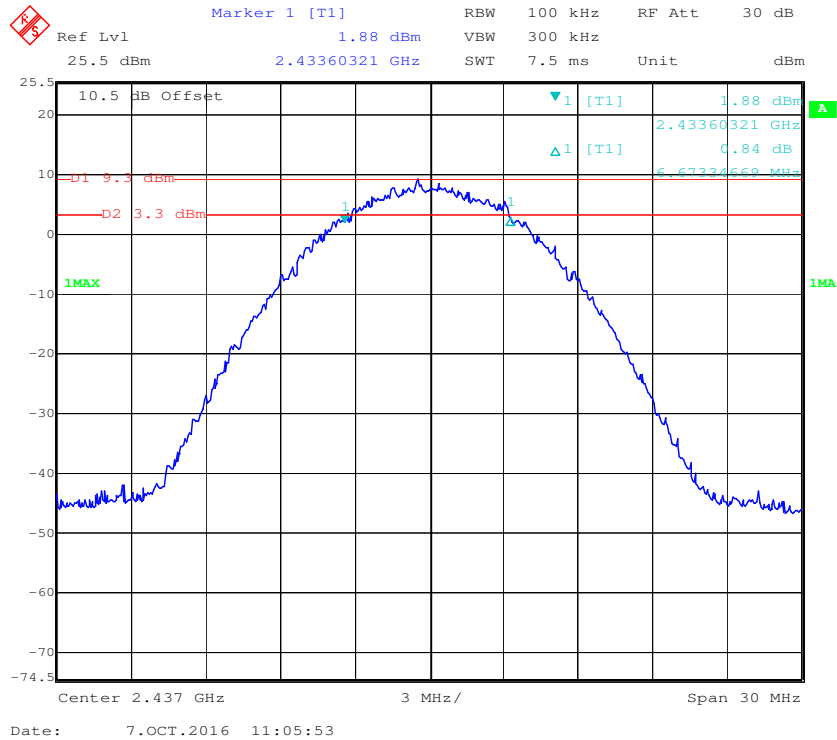

Delta 1 [T1] -0.14 dB RBW 100 kHz RF Att 30 dB

Ref Lvl 25.5 dBm Unit dBm

25.5 dB Offset

10.5 dB Offset

2.50 dBm

2.45860321 GHz

-0.14 dB

6.70340681 MHz

D1 9.3 dBm

D2 3.3 dBm

1MAX

1 [T1]

Center 2.462 GHz 3 MHz/ Span 30 MHz

Date: 7.OCT.2016 11:04:52

Marker 1 [T1]
 Ref Lvl -5.35 dBm
 25.5 dBm 2.40370341 GHz
 RBW 100 kHz VBW 300 kHz RF Att 30 dB
 SWT 10 ms Unit dBm


10.5 dB Offset
 25.5 dBm
 2.40370341 GHz
 -5.35 dBm
 -2.58 dB
 16.68236673 MHz

D1 1.6 dBm
 D2 -4.4 dBm
 1MAX


Center 2.412 GHz 4 MHz/
 Span 40 MHz

Date: 7.OCT.2016 11:11:43

802.11g Middle Channel

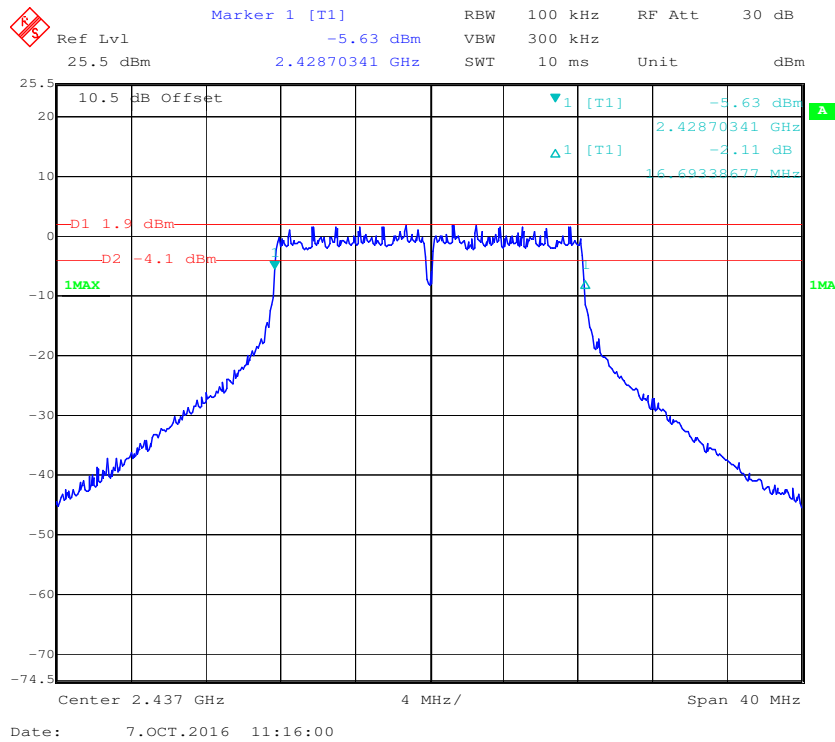

802.11g High Channel

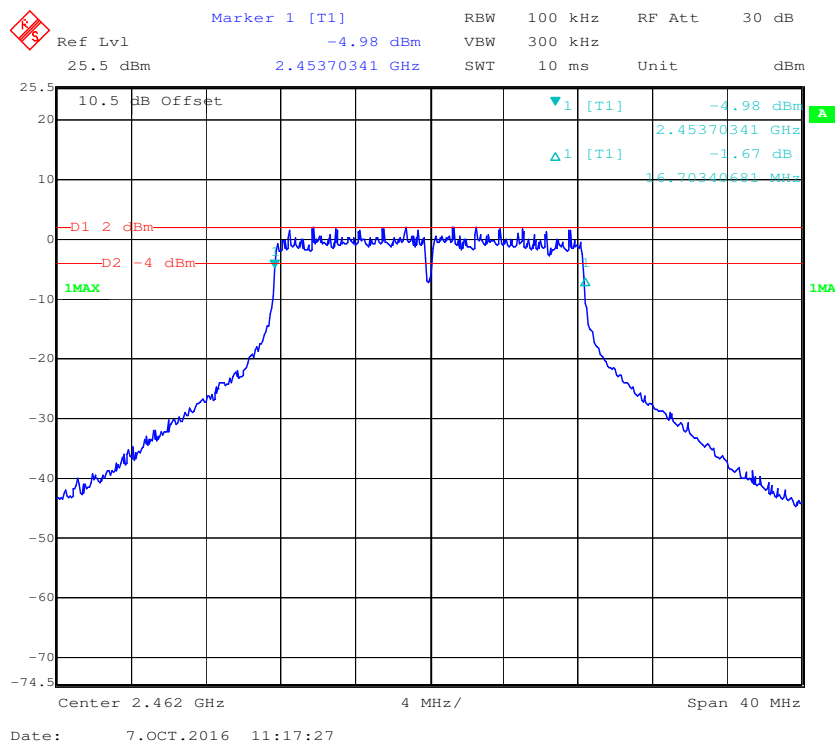

Ref Lvl -6.89 dBm RBW 100 kHz RF Att 30 dB
 25.5 dBm 2.40306212 GHz SWT 10 ms Unit dBm

10.5 dB Offset

Marker 1 [T1] -6.89 dBm
 2.40306212 GHz
 1.91 dB
 7.87575150 MHz

D1 1.4 dBm
 D2 -4.6 dBm
 1MAX

Center 2.412 GHz 4 MHz/ Span 40 MHz

Date: 7.OCT.2016 11:28:28

Marker 1 [T1]

Ref Lvl -7.98 dBm

25.5 dBm 2.42806212 GHz

RBW 100 kHz

VBW 300 kHz

RF Att 30 dB

SWT 10 ms

Unit dBm

10.5 dB Offset

1 [T1] -7.98 dBm

2.42806212 GHz

2.38 dB

17.87575150 MHz

D1 1.1 dBm

D2 -4.9 dBm

1MAX


Center 2.437 GHz

4 MHz/


Span 40 MHz

Date: 7.OCT.2016 11:24:18


802.11n-HT20 High Channel

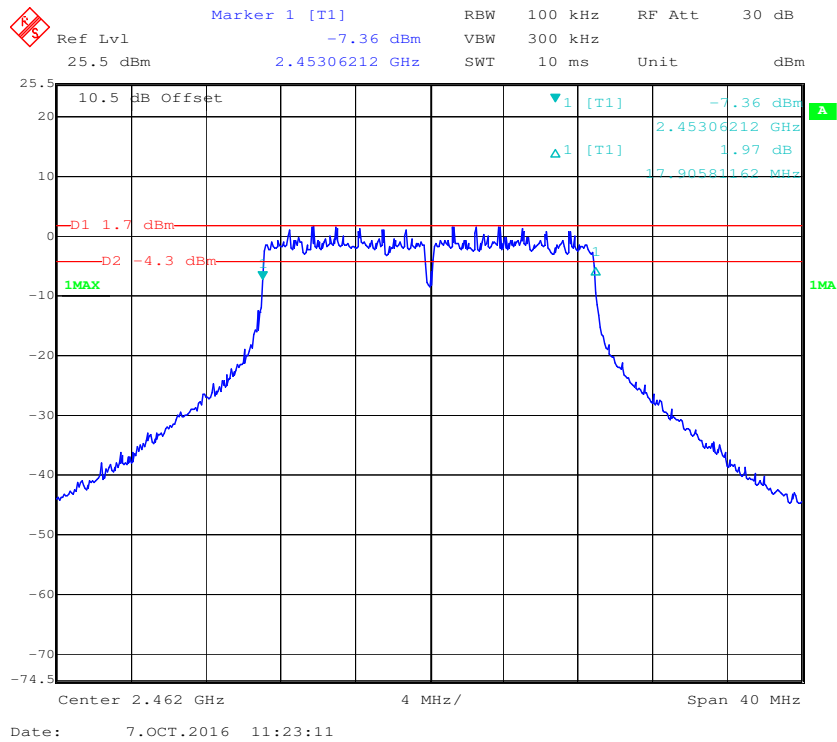


802.11n-HT40 Low Channel

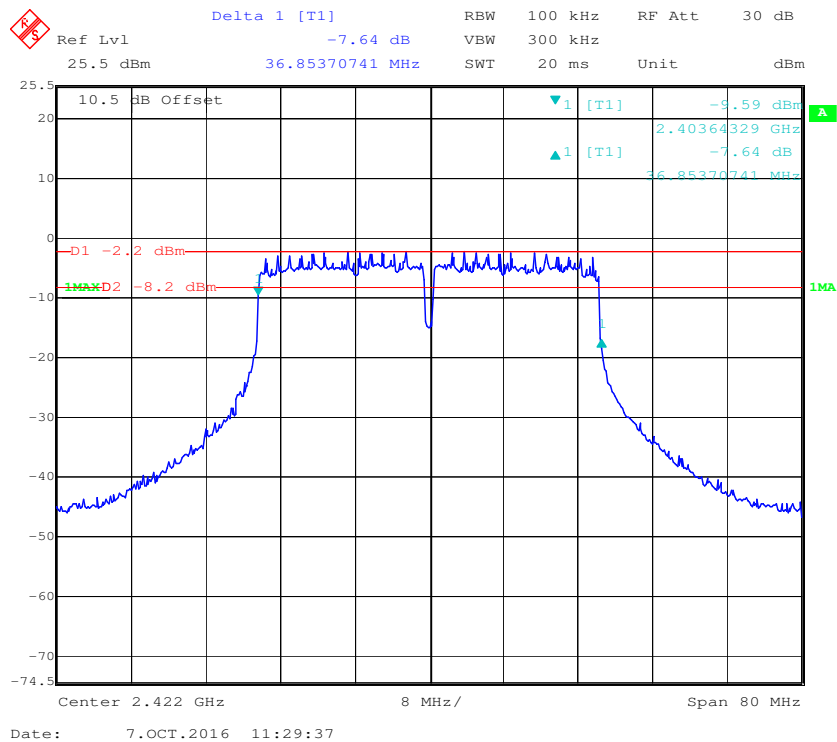

802.11n-HT40 Middle Channel

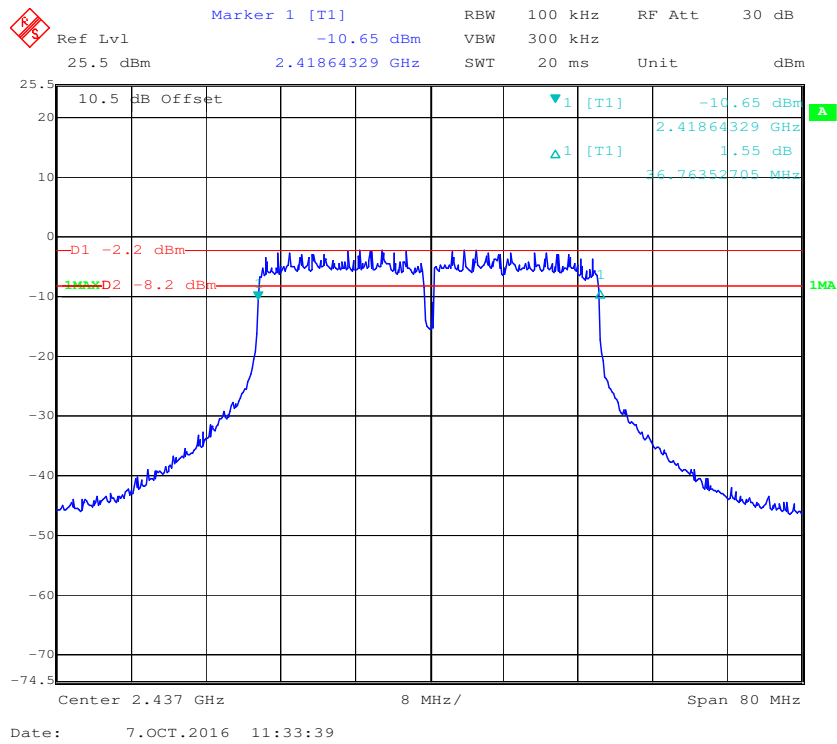


802.11n-HT40 High Channel

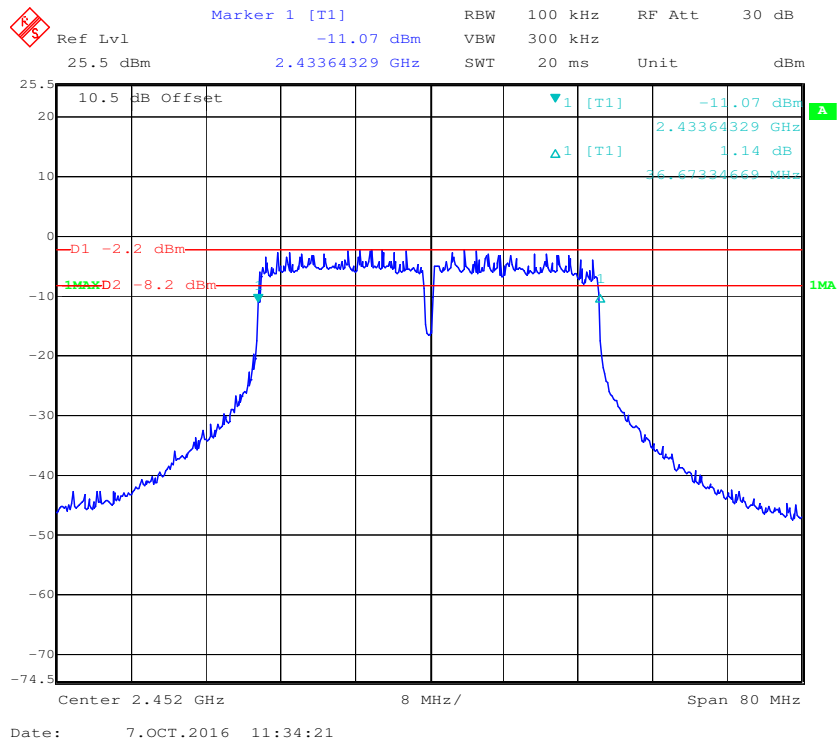


Antenna 2

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	6.673	≥ 500
Middle	2437	6.673	≥ 500
High	2462	6.643	≥ 500
802.11g mode			
Low	2412	16.683	≥ 500
Middle	2437	16.693	≥ 500
High	2462	16.703	≥ 500
802.11n-HT20 mode			
Low	2412	17.876	≥ 500
Middle	2437	17.876	≥ 500
High	2462	17.906	≥ 500
802.11n-HT40 mode			
Low	2422	36.693	≥ 500
Middle	2437	36.764	≥ 500
High	2452	36.673	≥ 500


802.11b Low Channel

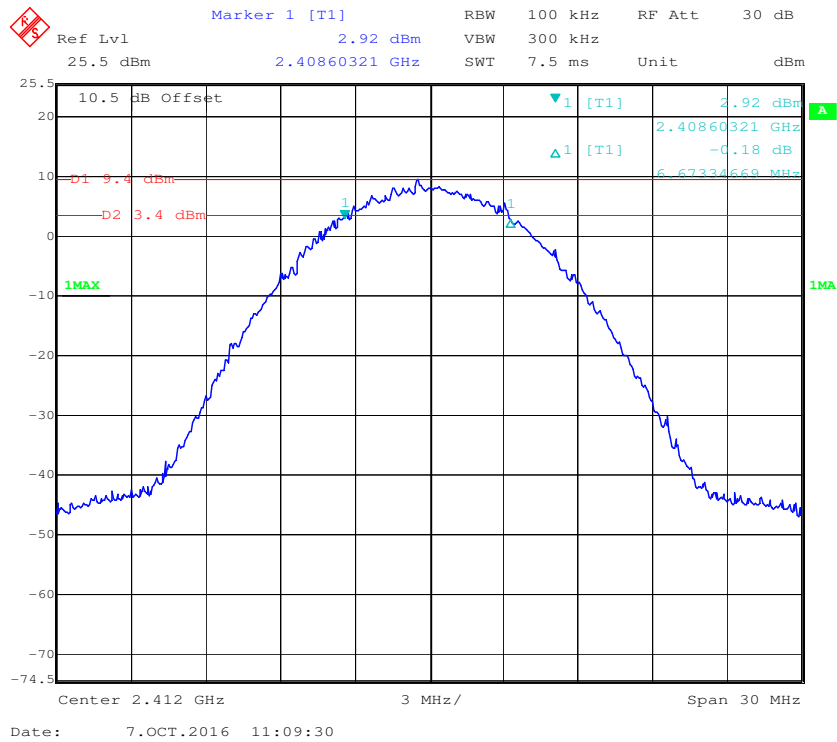


802.11b Middle Channel

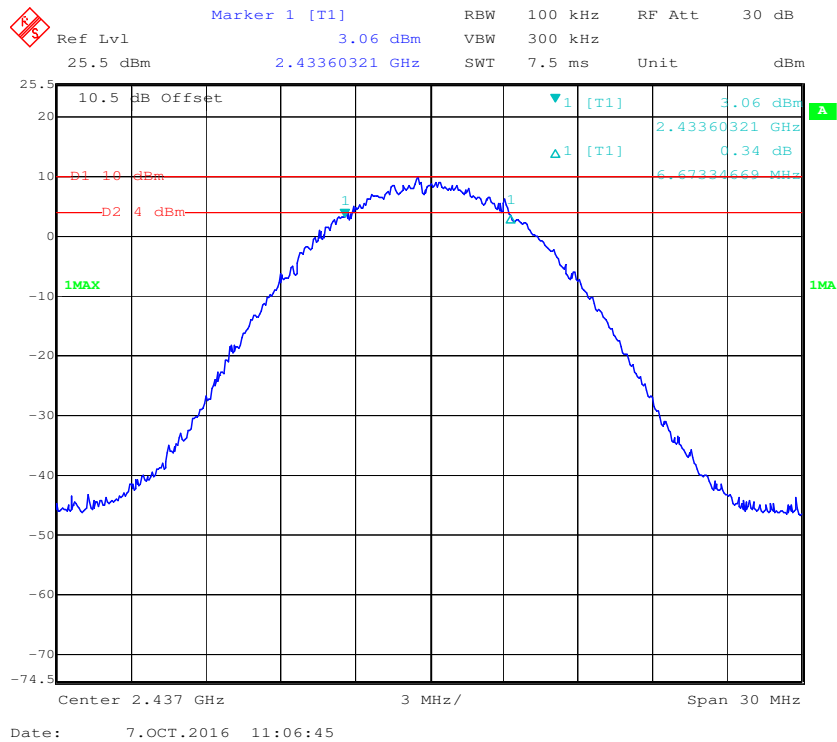


802.11b High Channel

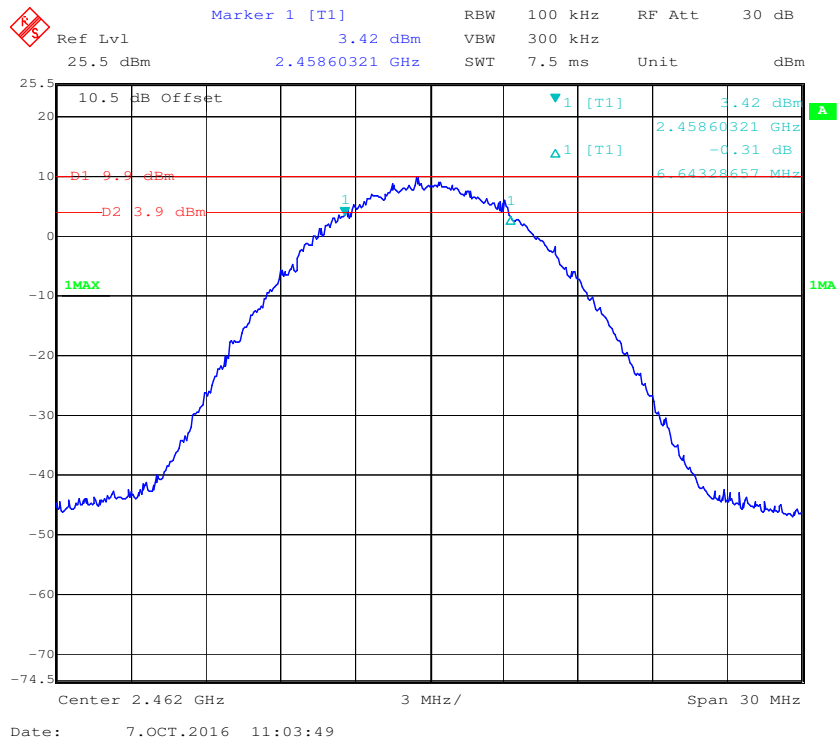


802.11g Low Channel

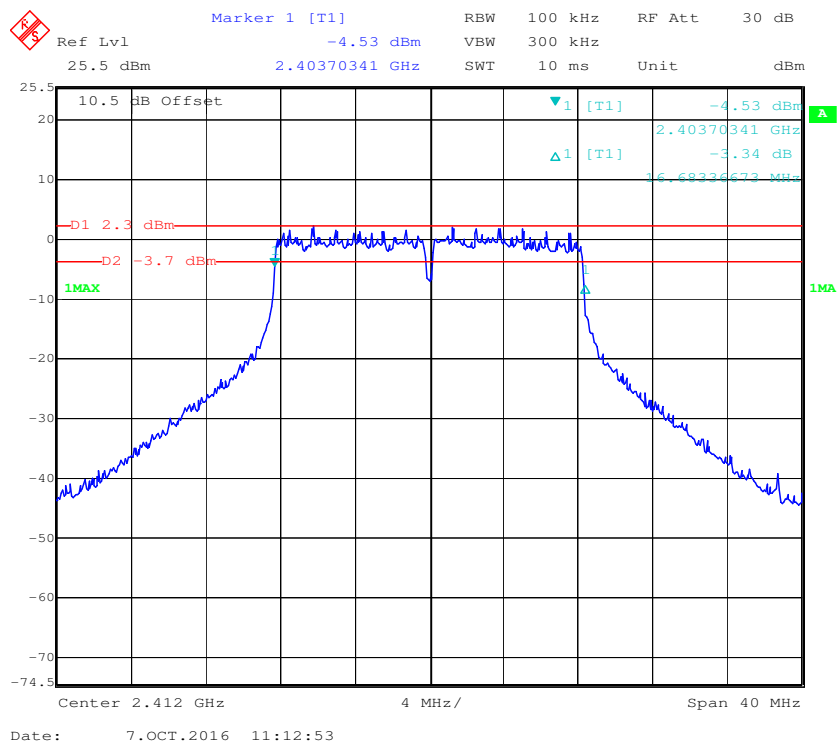


802.11g Middle Channel

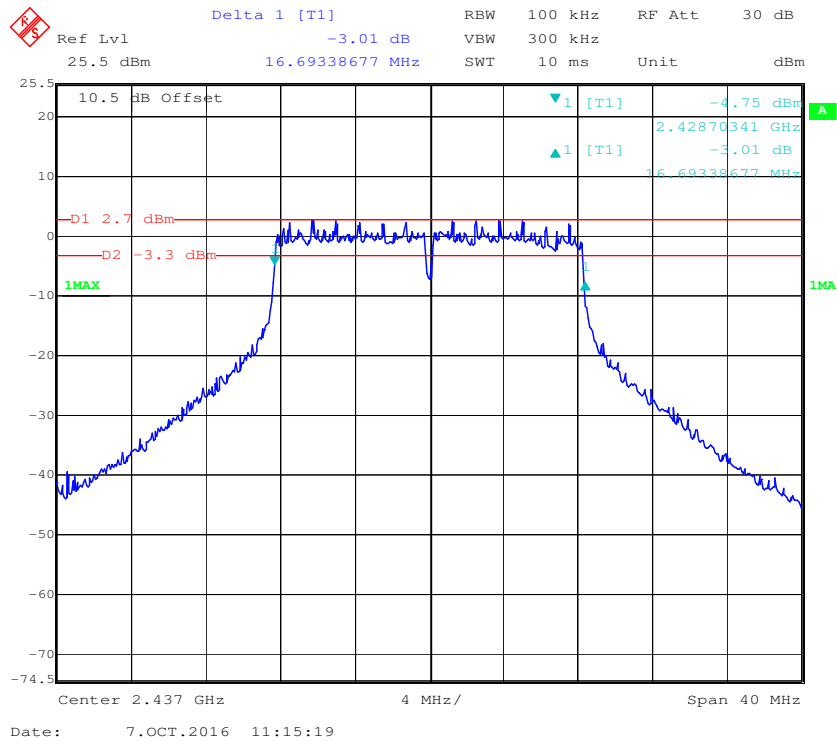


802.11g High Channel

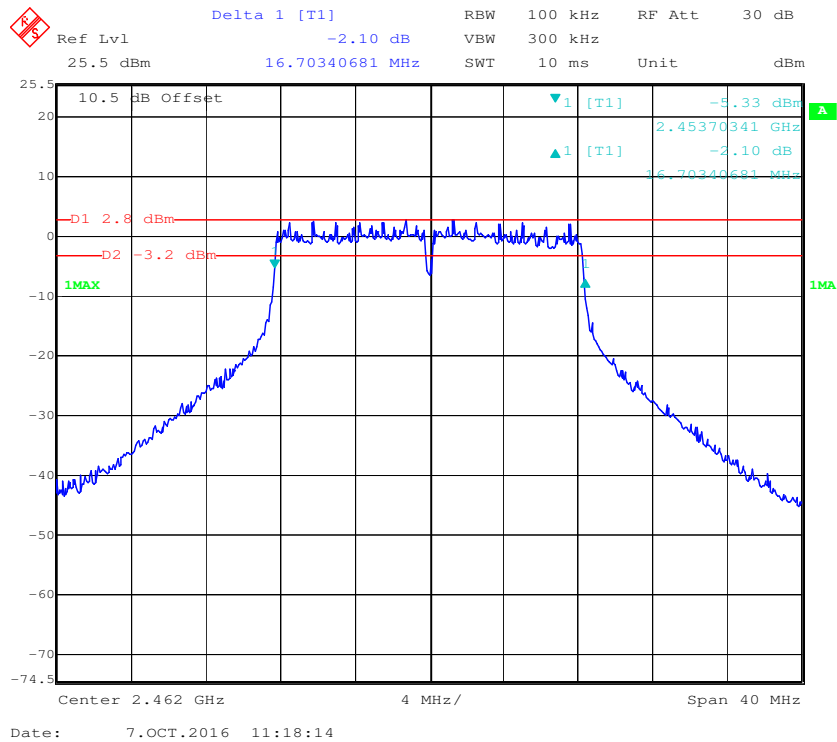


802.11n-HT20 Low Channel

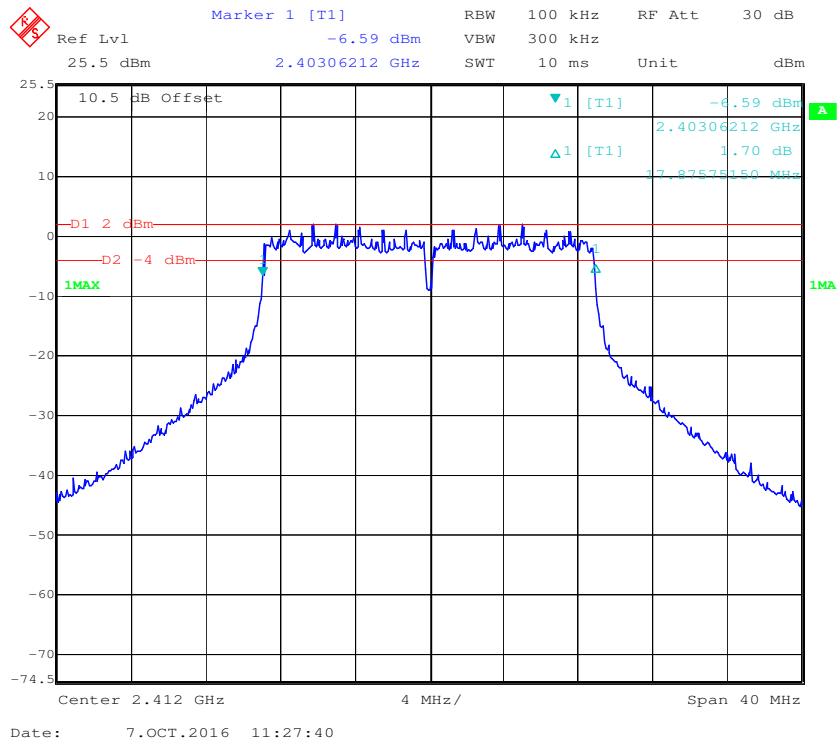


802.11n-HT20 Middle Channel

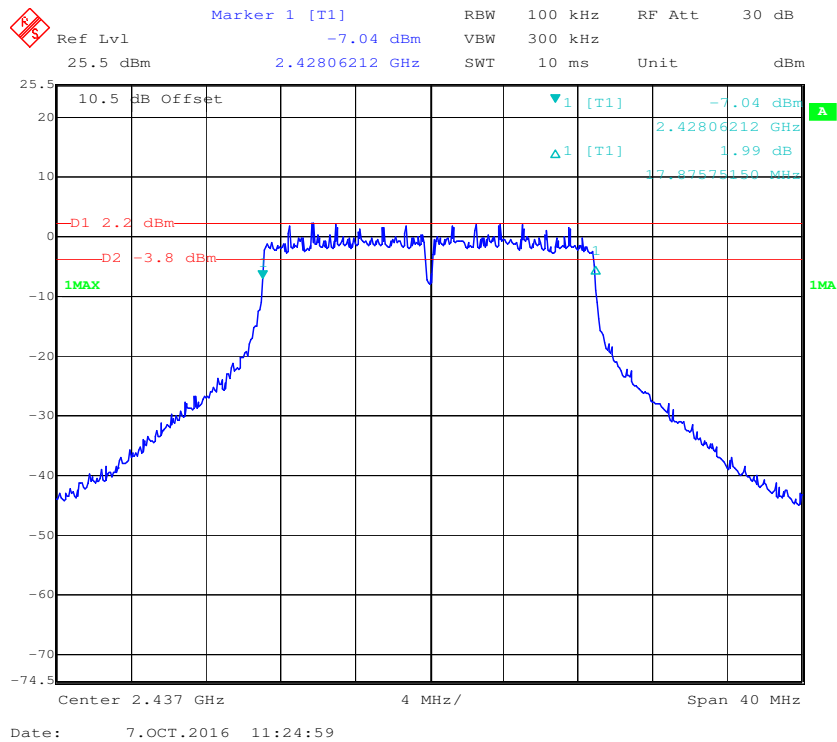


802.11n-HT20 High Channel

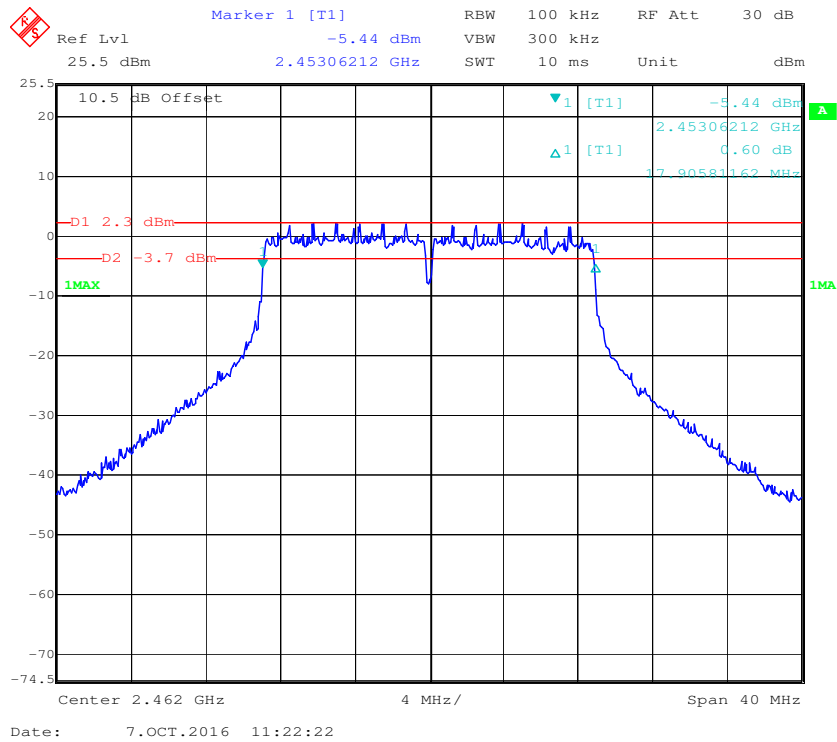


802.11n-HT40 Low Channel

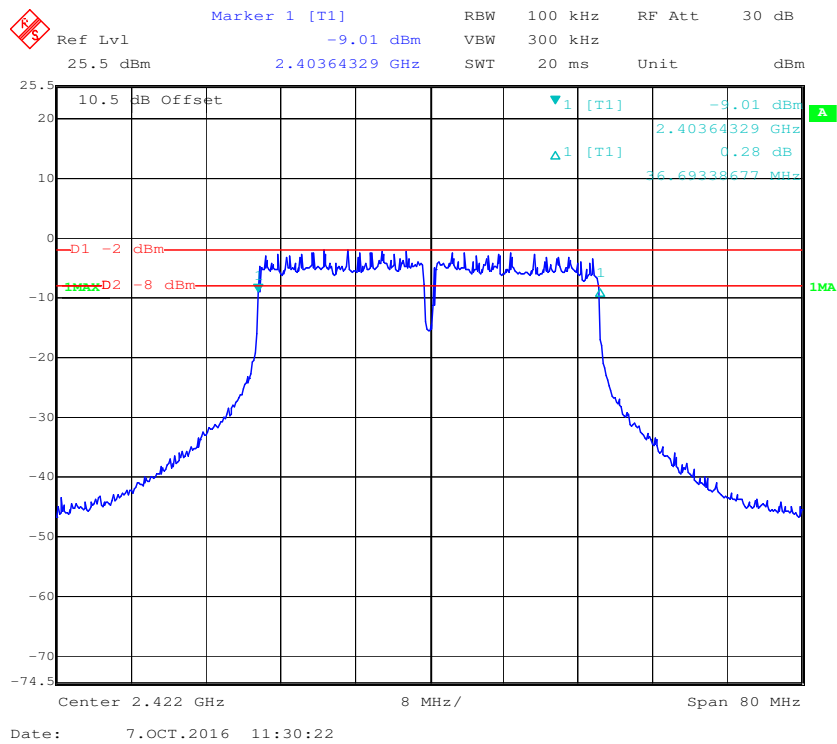

802.11n-HT40 Middle Channel

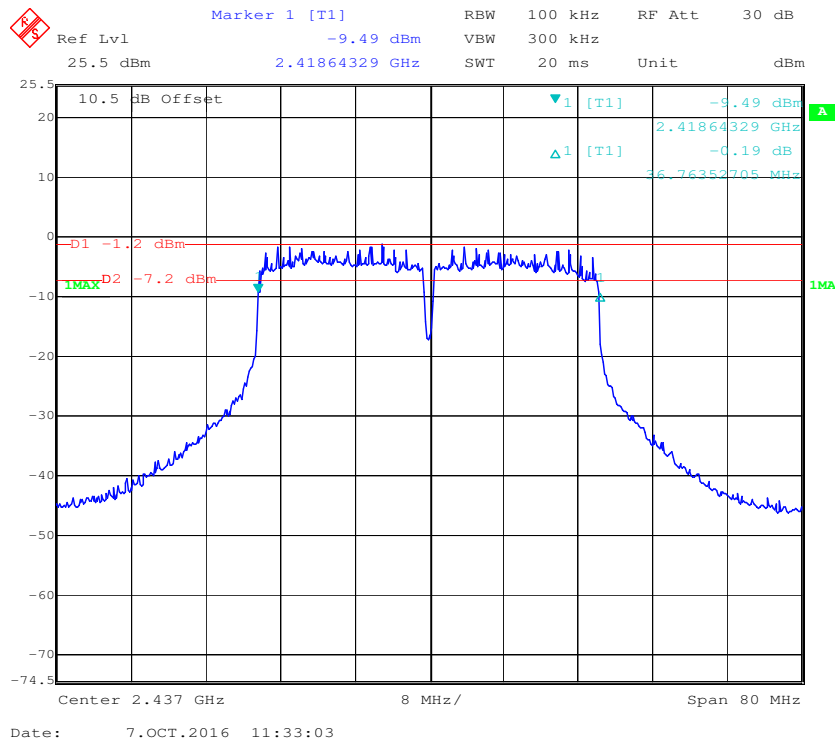


802.11n-HT40 High Channel

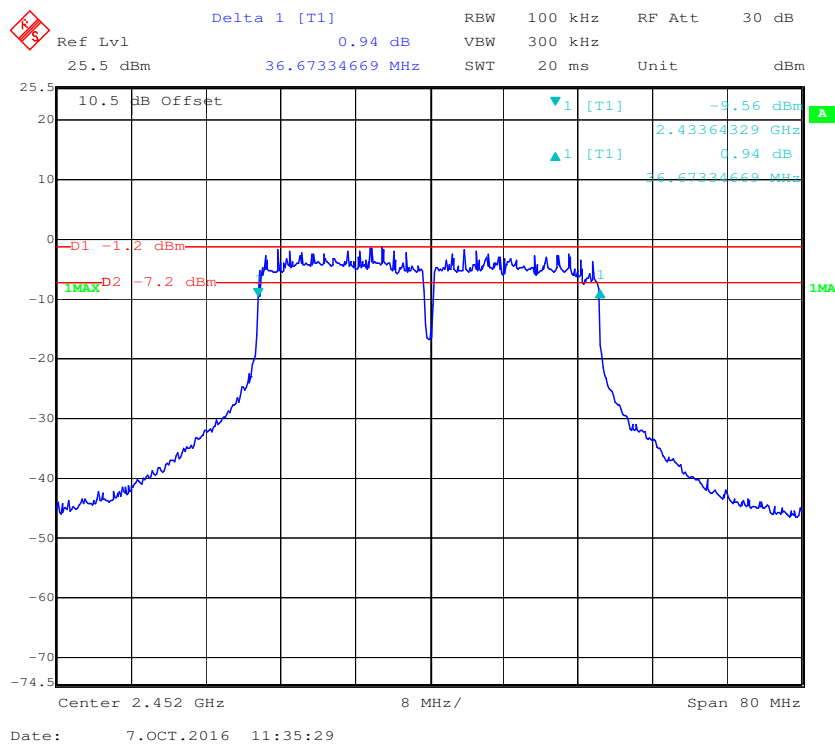


Antenna 3

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	6.673	≥ 500
Middle	2437	6.673	≥ 500
High	2462	6.643	≥ 500
802.11g mode			
Low	2412	16.683	≥ 500
Middle	2437	16.693	≥ 500
High	2462	16.703	≥ 500
802.11n-HT20 mode			
Low	2412	17.876	≥ 500
Middle	2437	17.876	≥ 500
High	2462	17.906	≥ 500
802.11n-HT40 mode			
Low	2422	36.693	≥ 500
Middle	2437	36.764	≥ 500
High	2452	36.673	≥ 500

802.11b Low Channel

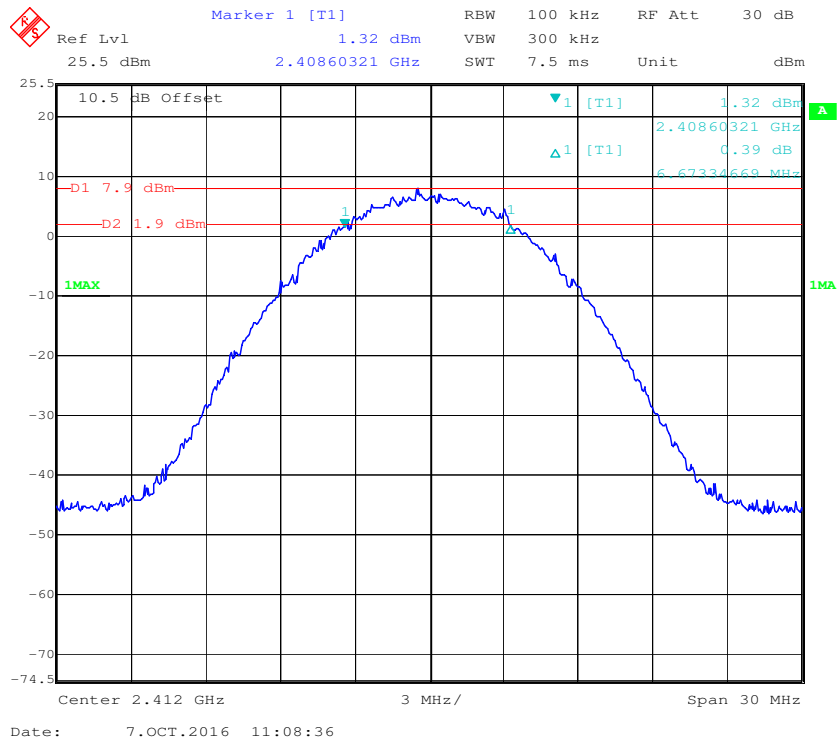

802.11b Middle Channel

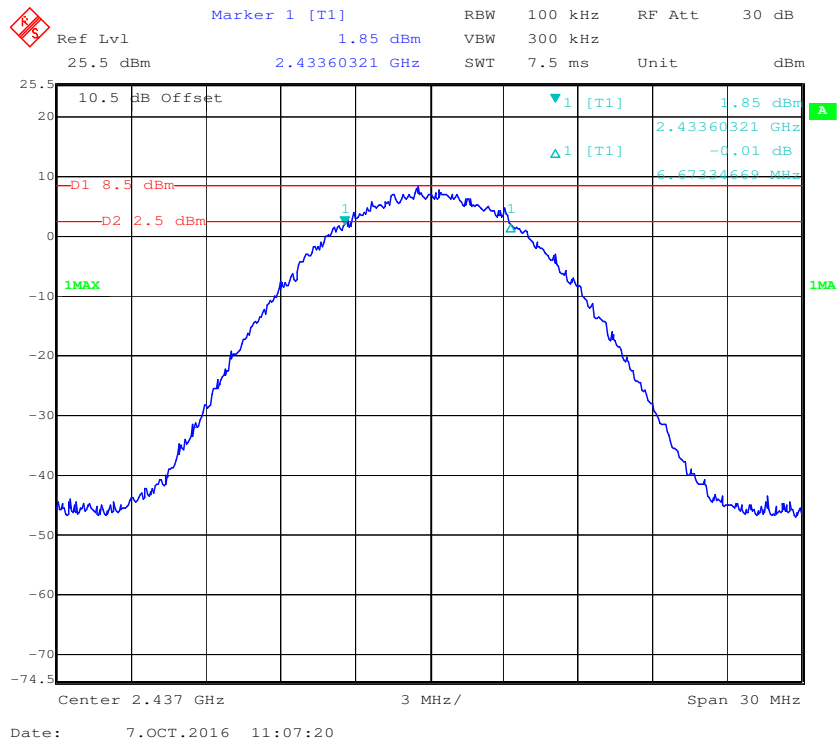

Ref Lvl 25.5 dBm
 Marker 1 [T1] 3.42 dBm
 RBW 100 kHz
 VBW 300 kHz
 RF Att 30 dB
 2.45860321 GHz
 SWT 7.5 ms
 Unit dBm

10.5 dB Offset
 D1 9.9 dBm
 D2 3.9 dBm
 1MAX
 1 [T1]
 2.45860321 GHz
 -0.31 dB
 6.64328657 MHz
 A
 1MAX

Center 2.462 GHz
 3 MHz/
 Span 30 MHz

Date: 7.OCT.2016 11:03:49

Marker 1 [T1] -6.65 dBm

Ref Lvl 25.5 dBm

2.40370341 GHz

RBW 100 kHz

VBW 300 kHz

SWT 10 ms

RF Att 30 dB

Unit dBm

10.5 dB Offset

-6.65 dBm

2.40370341 GHz

-1.55 dBm

16.68236673 MHz

D1 1.4 dBm

D2 -4.6 dBm

1MAX

1MA


Center 2.412 GHz

4 MHz/


Span 40 MHz

Date: 7.OCT.2016 11:13:39

802.11g Middle Channel

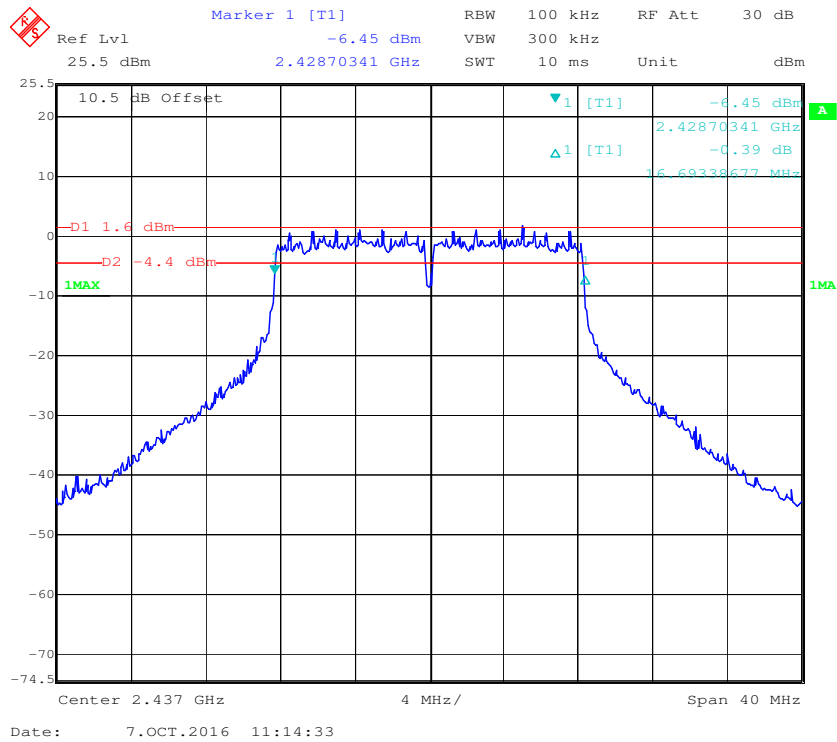

802.11g High Channel

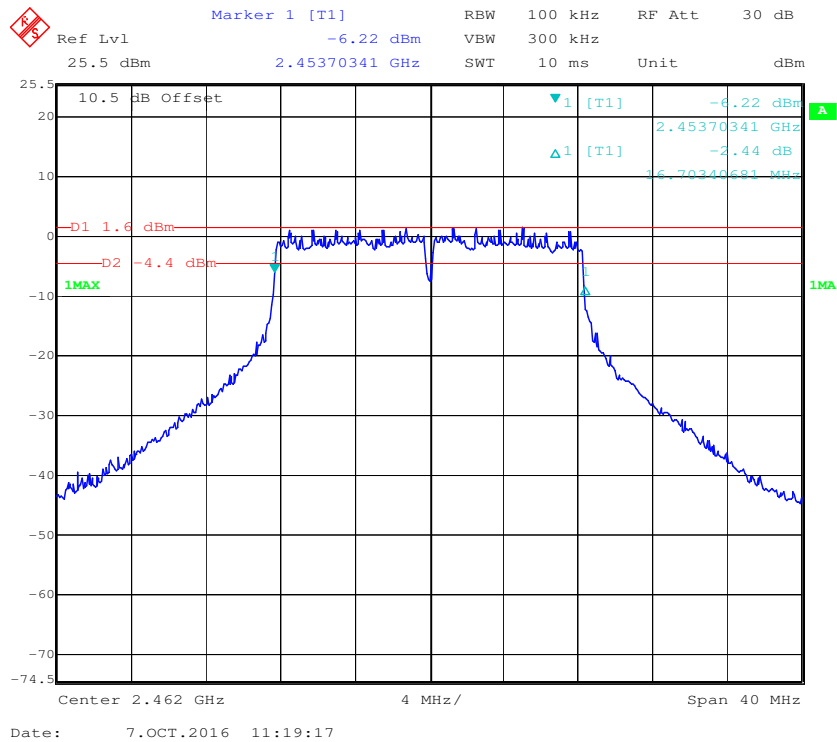

Ref Lvl 25.5 dBm
 Marker 1 [T1] 2.40306212 GHz
 RBW 100 kHz
 VBW 300 kHz
 RF Att 30 dB
 Unit dBm

10.5 dB Offset
 -8.15 dBm
 2.40306212 GHz
 2.38 dB
 17.87575150 MHz

D1 0.8 dBm
 D2 -5.2 dBm
 1MAX
 1MAX

Center 2.412 GHz
 4 MHz/
 Span 40 MHz

Date: 7.OCT.2016 11:26:49

Marker 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl -8.02 dBm VBW 300 kHz
 25.5 dBm 2.42806212 GHz SWT 10 ms Unit dBm


10.5 dB Offset
 1 [T1] -8.02 dBm
 2.42806212 GHz
 2.75 dBm
 17.87575150 MHz

D1 1.5 dBm
 D2 -4.5 dBm
 1MAX
 1MAX


Center 2.437 GHz 4 MHz/
 Span 40 MHz

Date: 7.OCT.2016 11:25:46


802.11n-HT20 High Channel

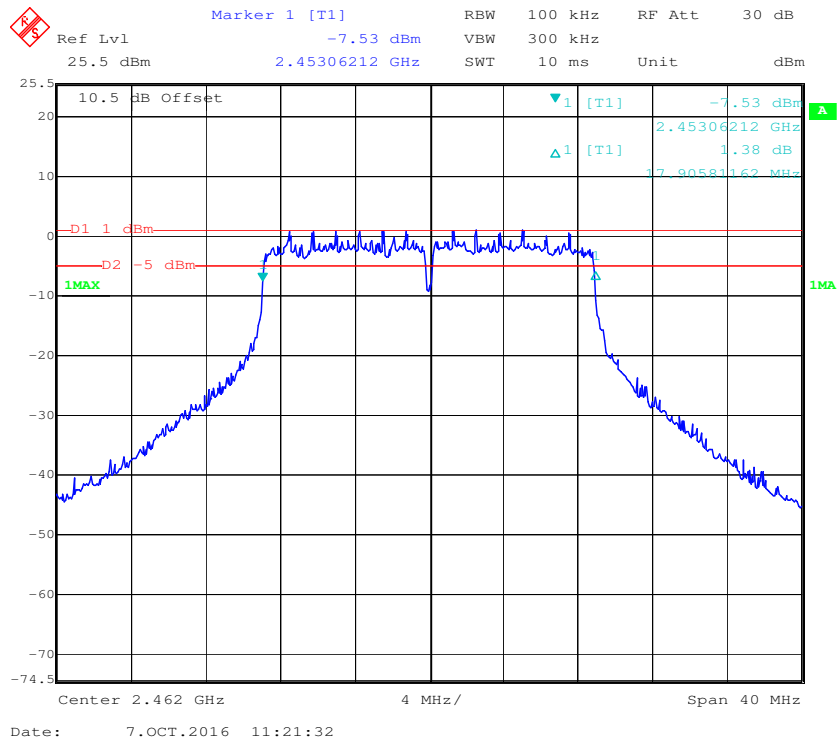


802.11n-HT40 Low Channel

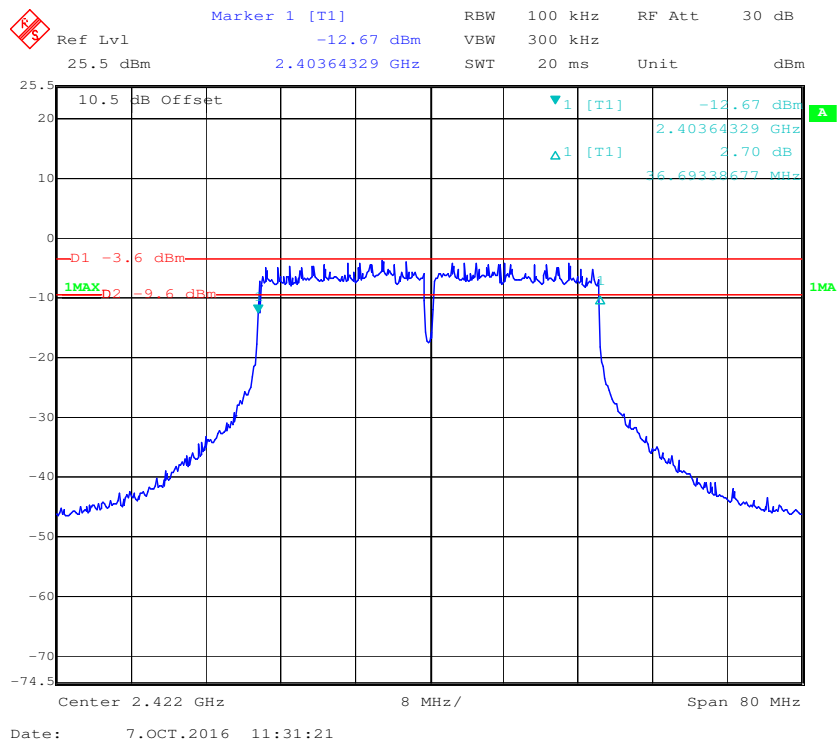

802.11n-HT40 Middle Channel

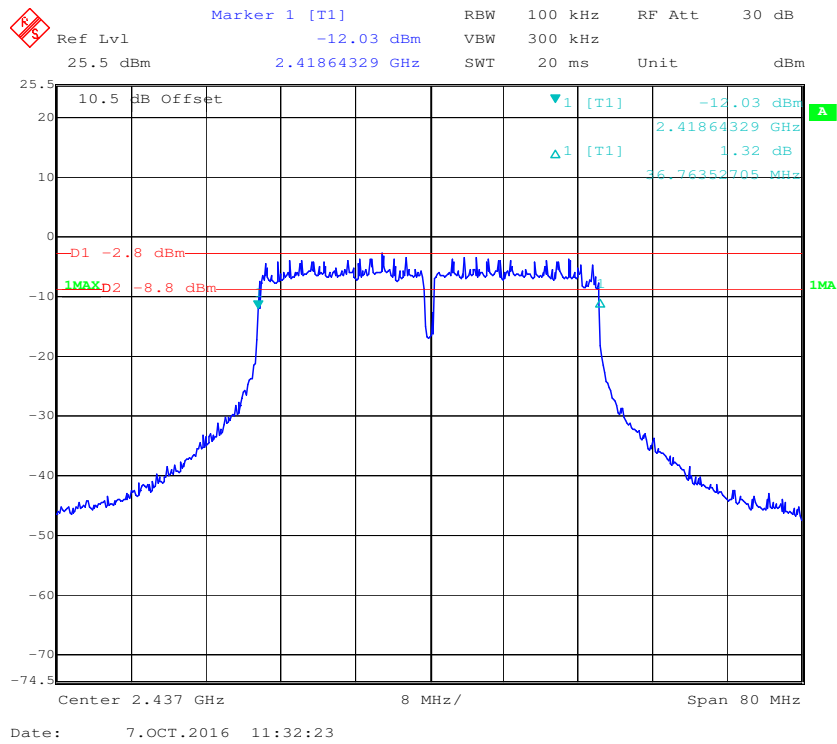

802.11n-HT40 High Channel

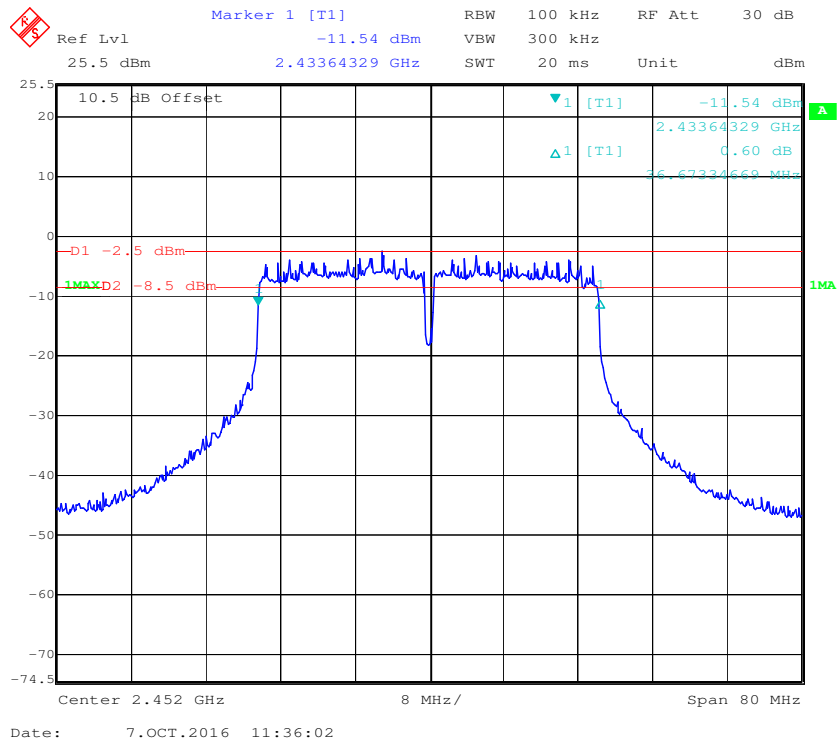


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Alisa Gao on 2016-12-15.

EUT operation mode: Transmitting

Frequency (MHz)	Antenna Port	Max Conducted Peak Output Power (dBm)	Sum Peak Output Power (dBm) Chain1+Chain2+chain 3	Limit (dBm)
802.11b mode				
2412	1	21.66	26.00	30
	2	21.73		
	3	20.12		
2437	1	20.91	25.47	
	2	21.07		
	3	20.06		
2462	1	21.17	25.96	
	2	21.89		
	3	20.37		
802.11g mode				
2412	1	21.83	26.39	30
	2	22.16		
	3	20.74		
2437	1	21.31	26.28	
	2	22.19		
	3	20.92		
2462	1	21.27	26.18	
	2	21.99		
	3	20.89		
802.11n-HT20				
2412	1	21.09	25.67	30
	2	21.21		
	3	20.34		
2437	1	20.92	25.74	
	2	21.49		
	3	20.42		
2462	1	21.03	25.97	
	2	21.67		
	3	20.84		


Frequency (MHz)	Antenna Port	Max Conducted Peak Output Power (dBm)	Sum Peak Output Power (dBm) Chain1+Chain2+chain 3	Limit (dBm)
802.11n-HT40				
2422	1	19.45	24.29	30
	2	19.99		
	3	19.07		
2437	1	19.81	24.49	
	2	20.12		
	3	19.17		
2452	1	19.42	24.35	
	2	20.15		
	3	19.11		

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Alisa Gao on 2016-10-07.

Test Result: Compliance


Please refer to the following plots.

Antenna 1


802.11b: Band Edge, Left Side

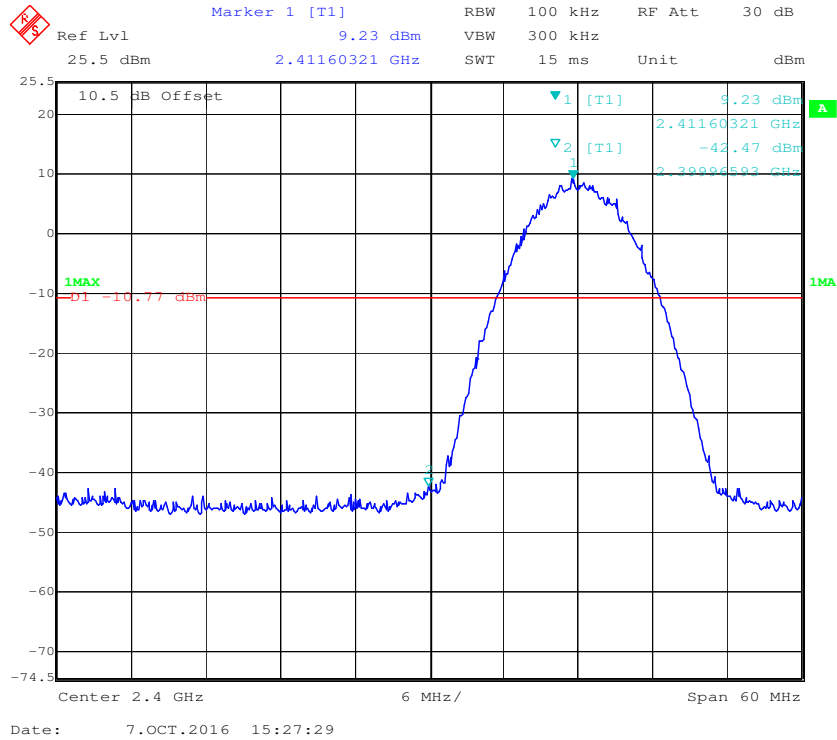


802.11b: Band Edge, Right Side

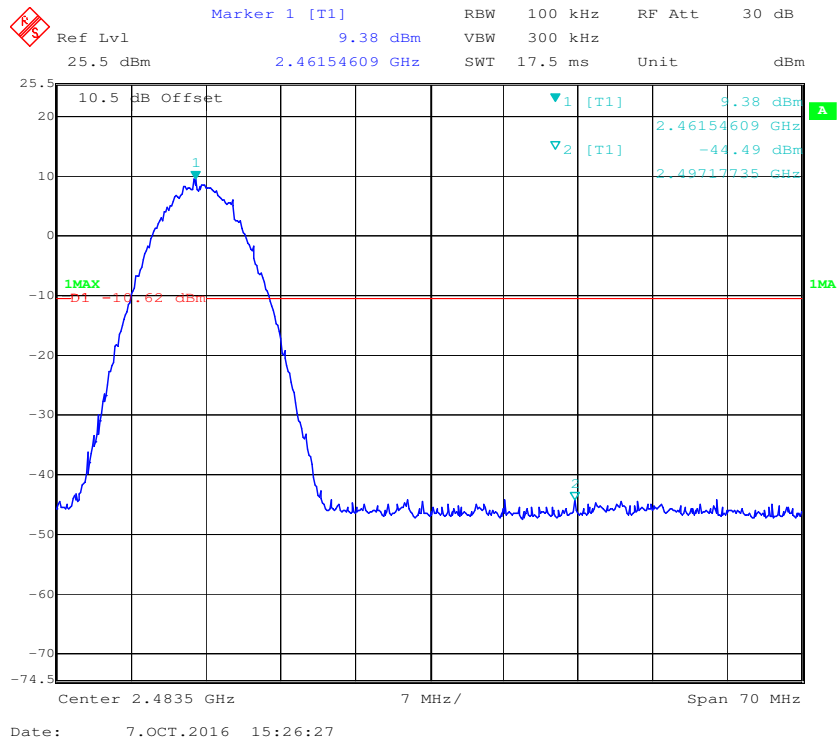


802.11g: Band Edge, Left Side

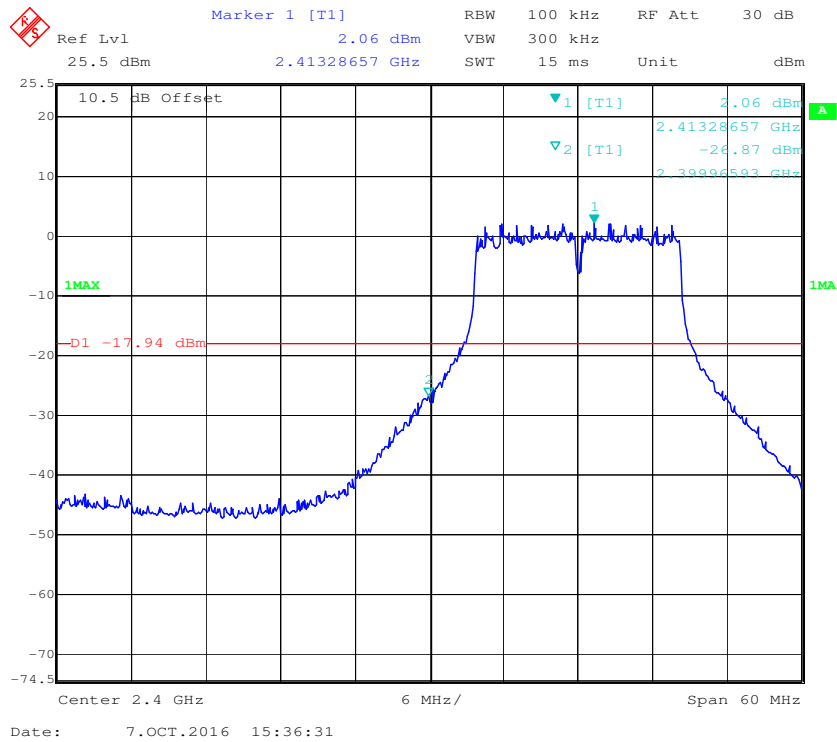


802.11g: Band Edge, Right Side

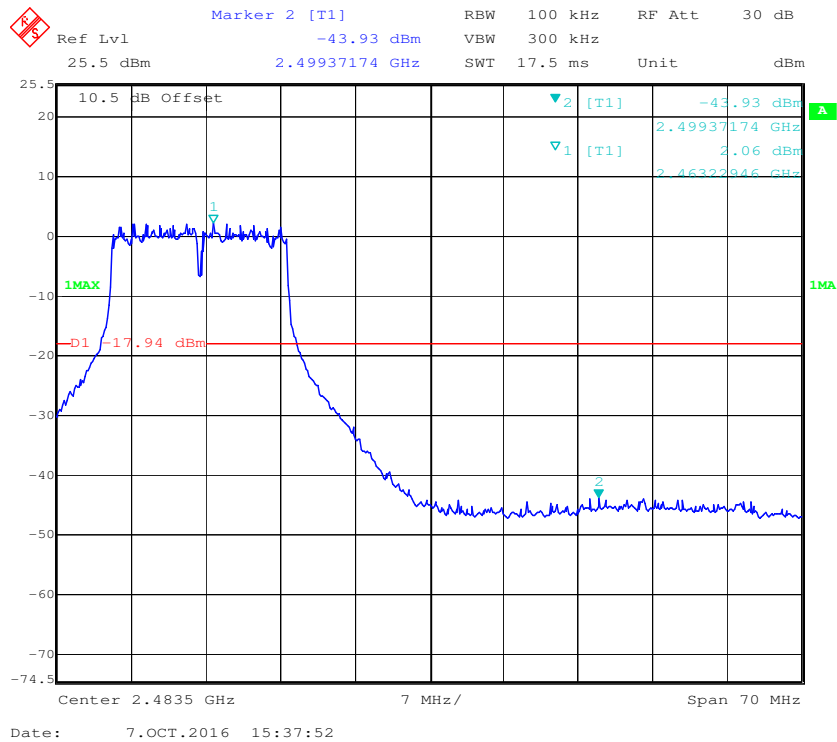


802.11n-HT20: Band Edge, Left Side

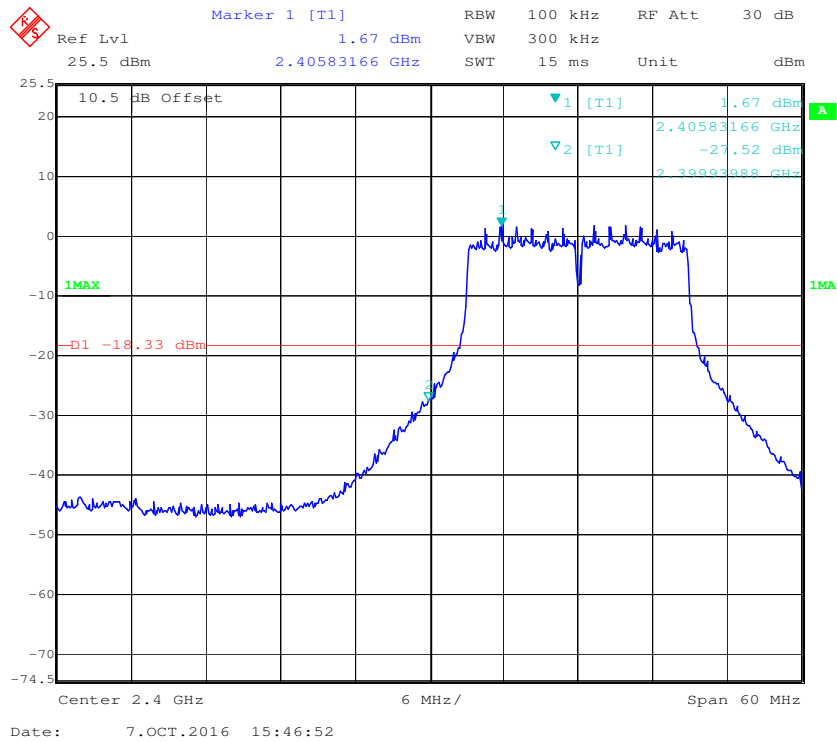


802.11n-HT20: Band Edge, Right Side

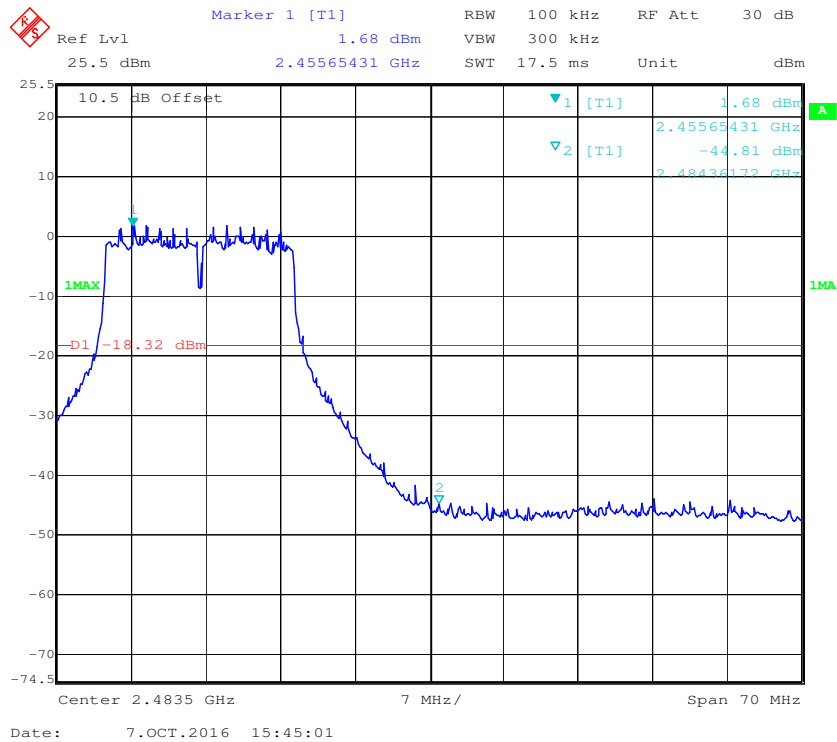

802.11n-HT40: Band Edge, Left Side

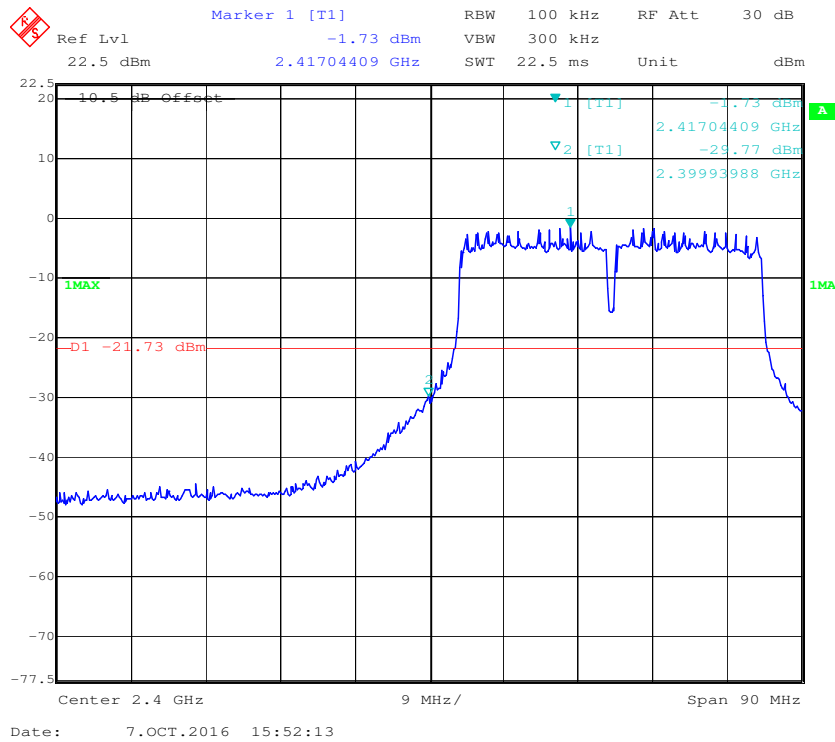


802.11n-HT40: Band Edge, Right Side

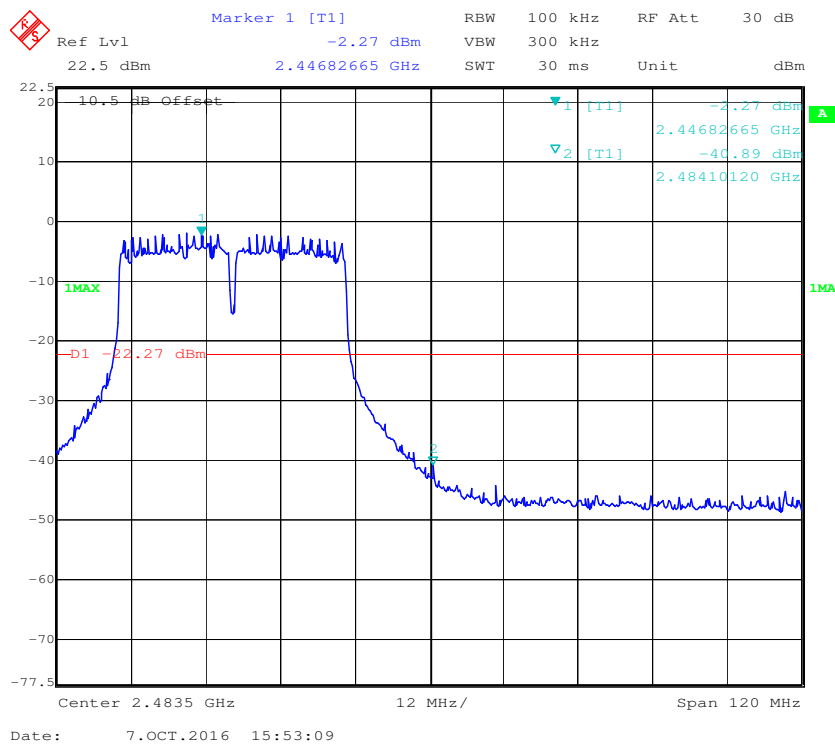


Antenna 2


802.11b: Band Edge, Left Side

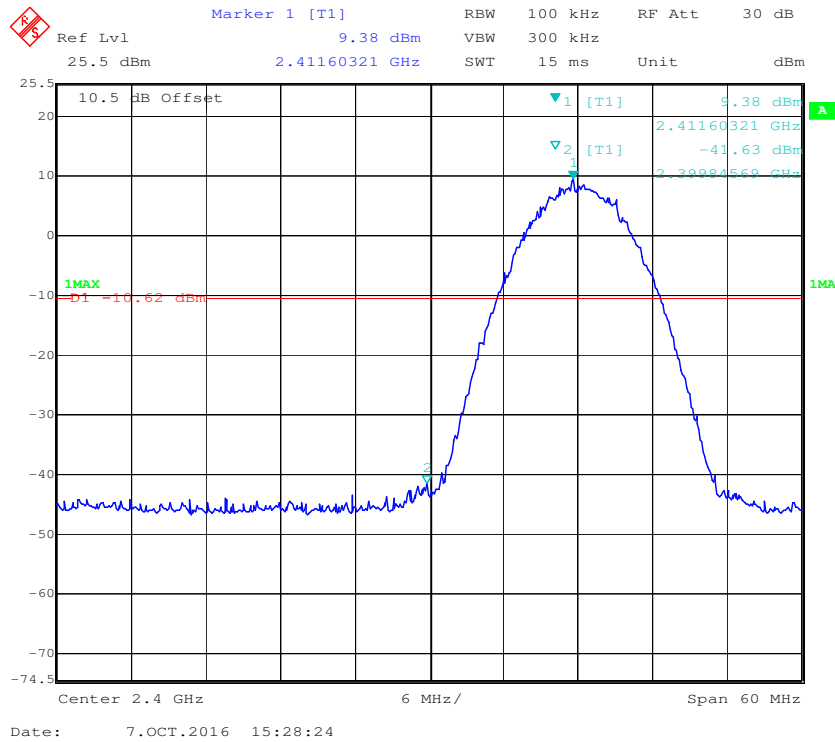


802.11b: Band Edge, Right Side

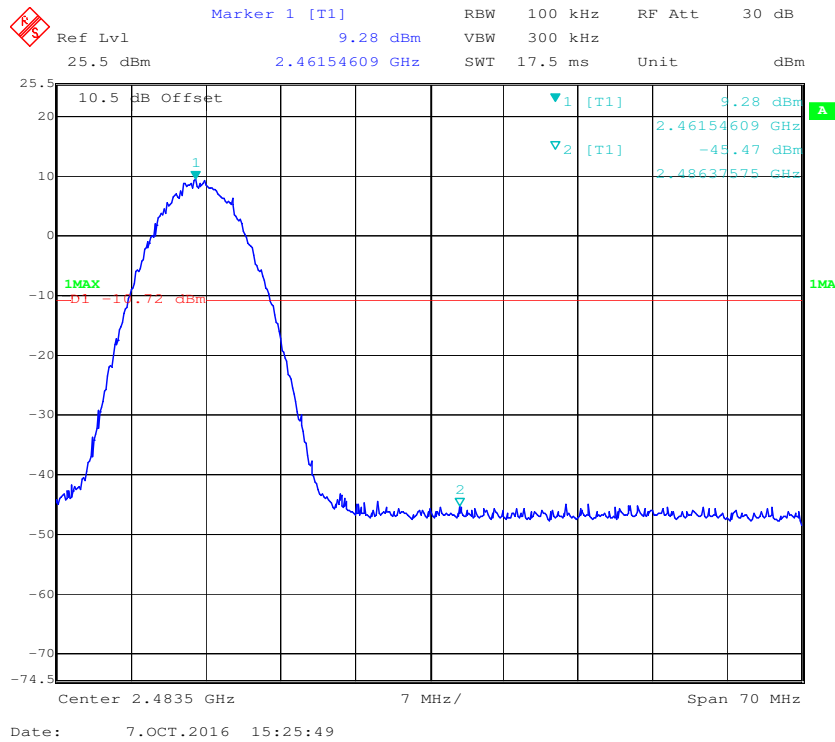


802.11g: Band Edge, Left Side

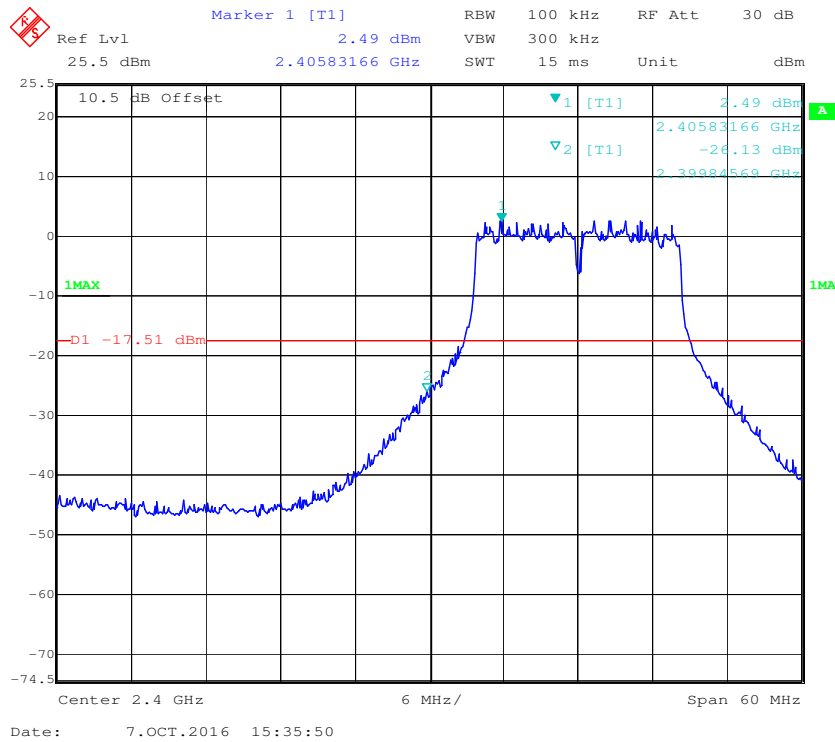


802.11g: Band Edge, Right Side

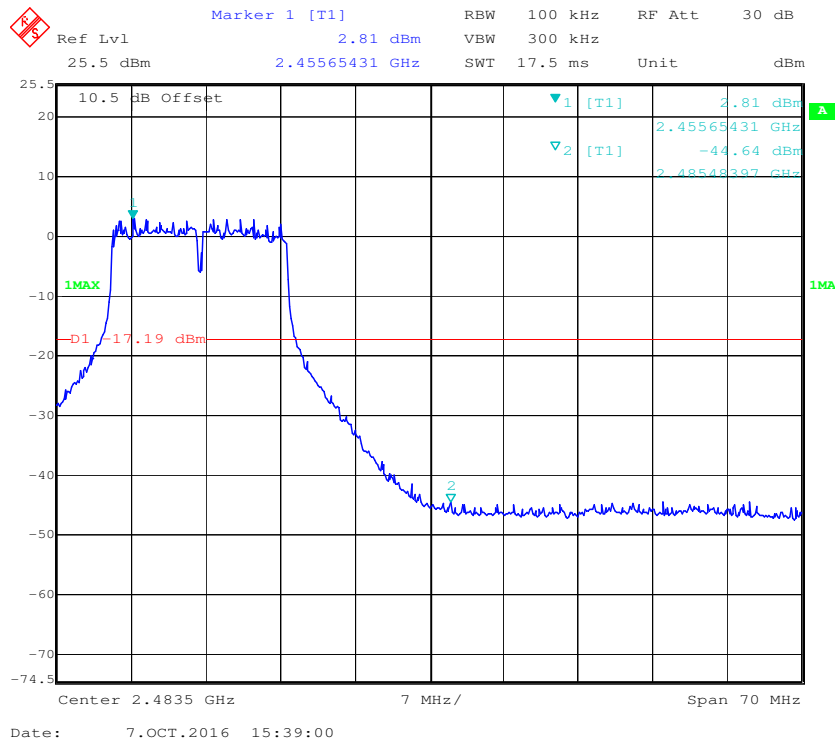


802.11n-HT20: Band Edge, Left Side

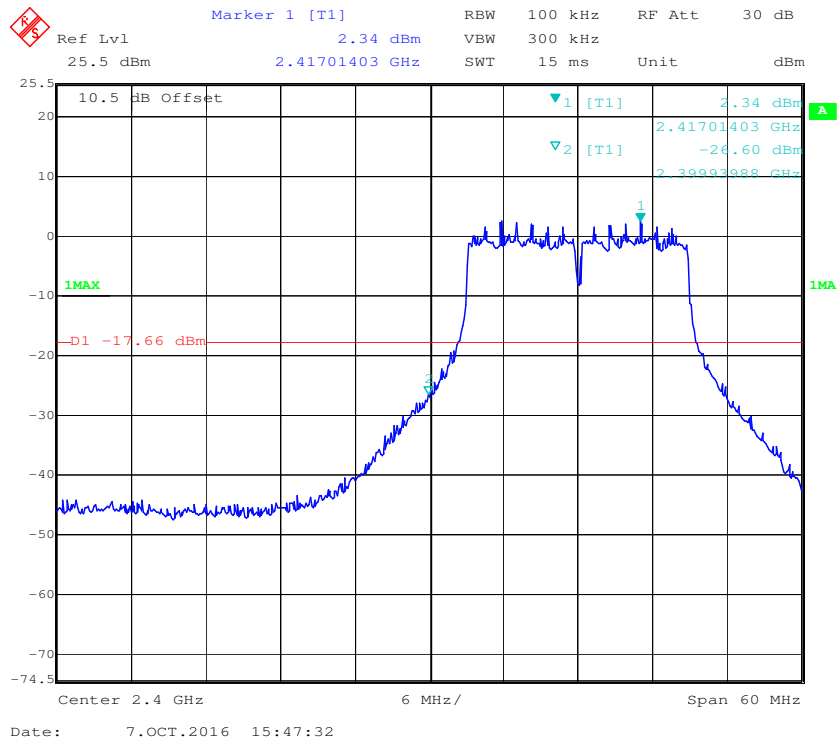


802.11n-HT20: Band Edge, Right Side

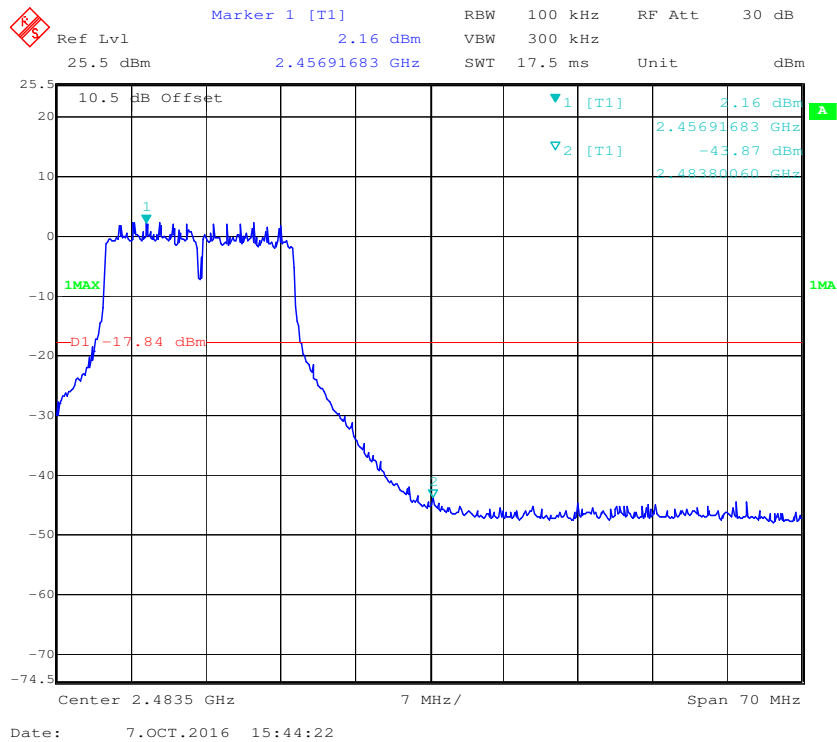

802.11n-HT40: Band Edge, Left Side

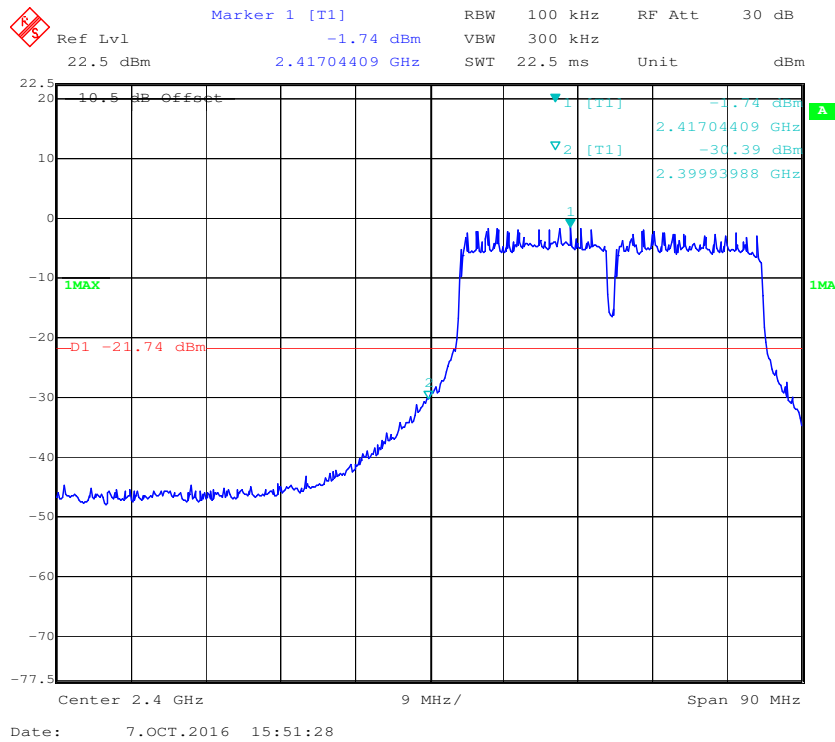


802.11n-HT40: Band Edge, Right Side

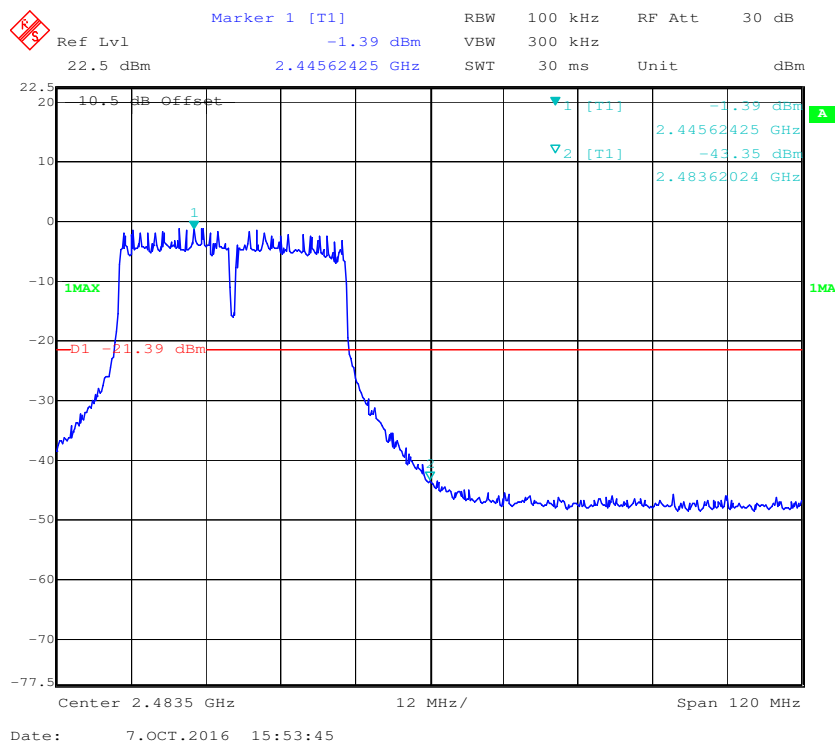


Antenna 3


802.11b: Band Edge, Left Side

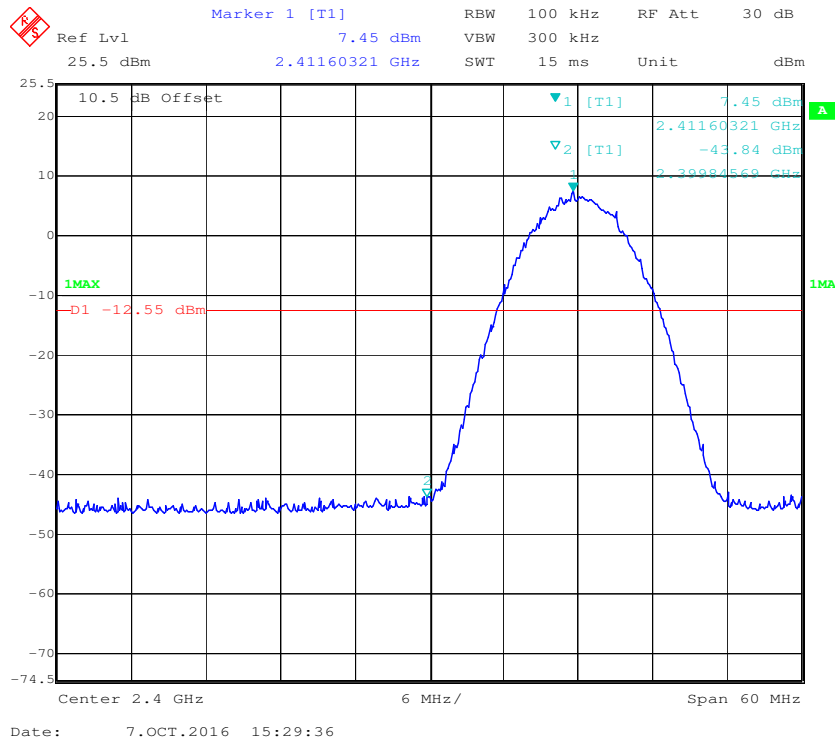


802.11b: Band Edge, Right Side

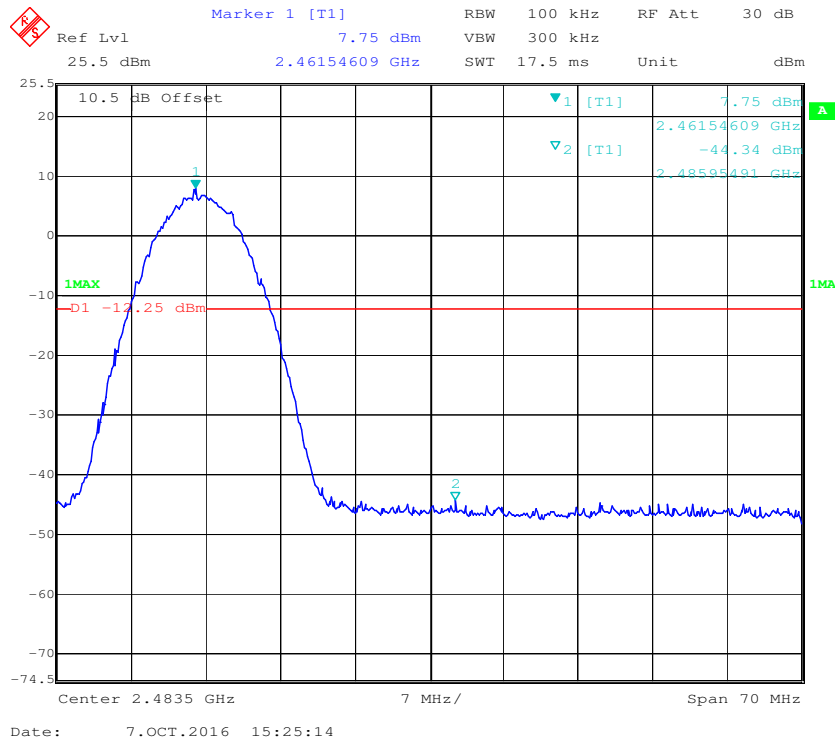


802.11g: Band Edge, Left Side

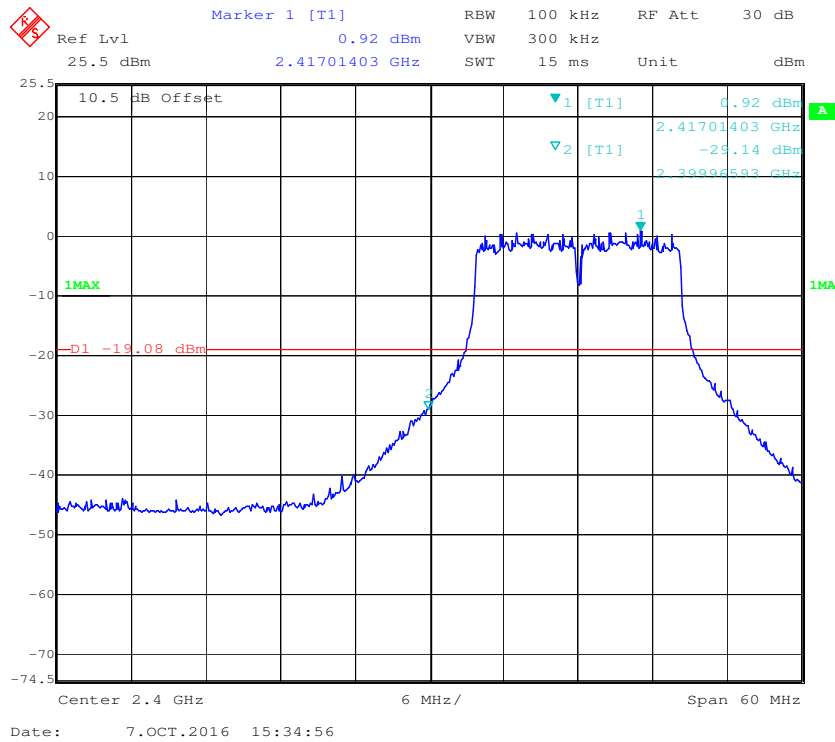


802.11g: Band Edge, Right Side

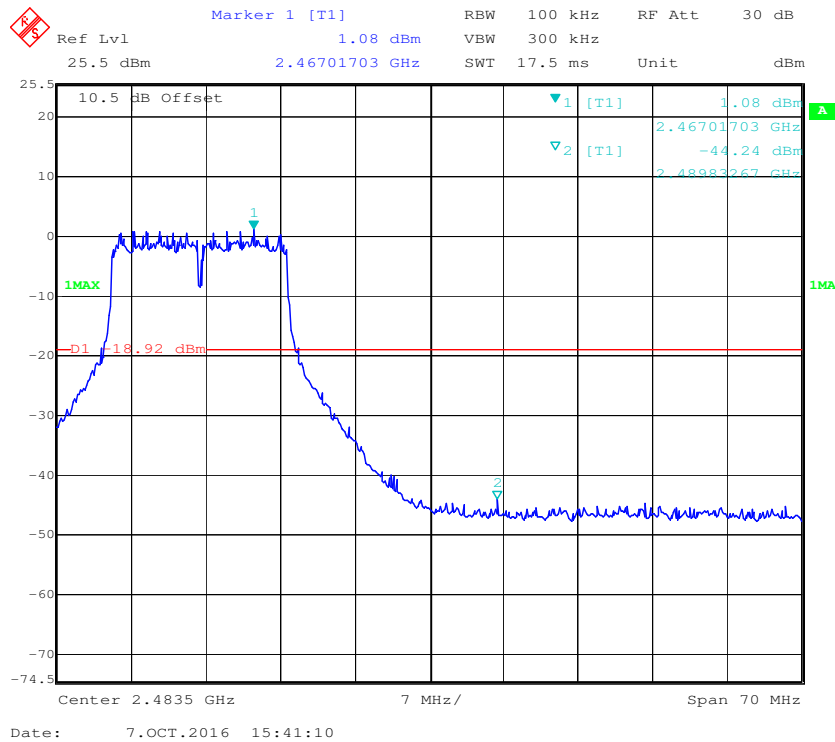


802.11n-HT20: Band Edge, Left Side

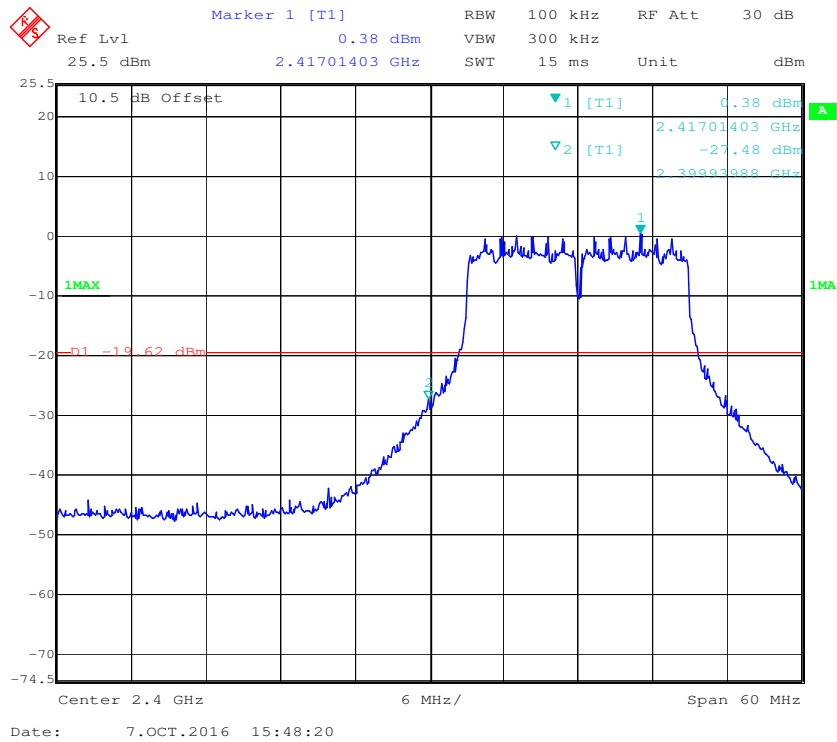


802.11n-HT20: Band Edge, Right Side

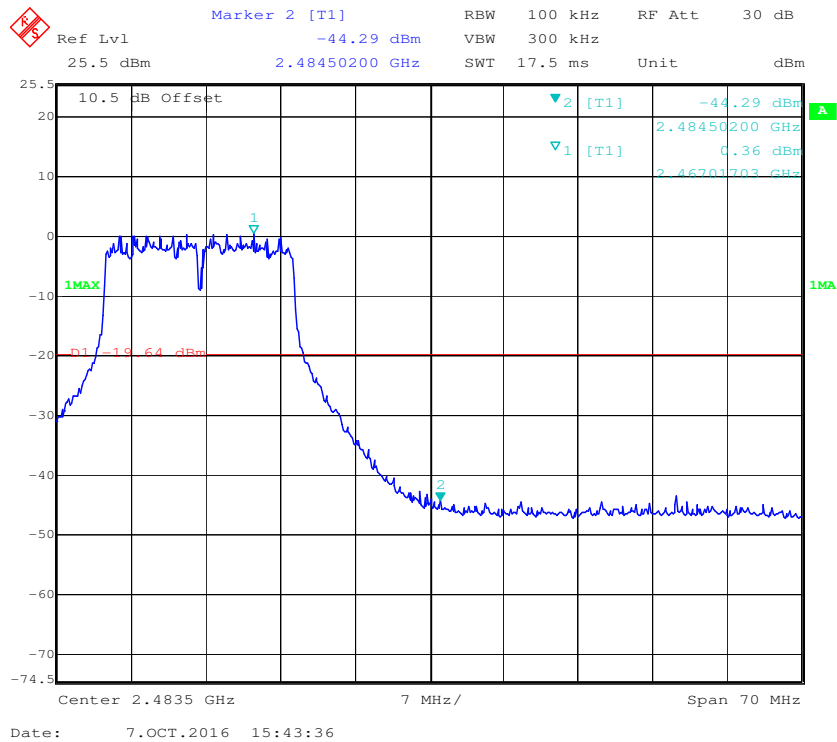

802.11n-HT40: Band Edge, Left Side

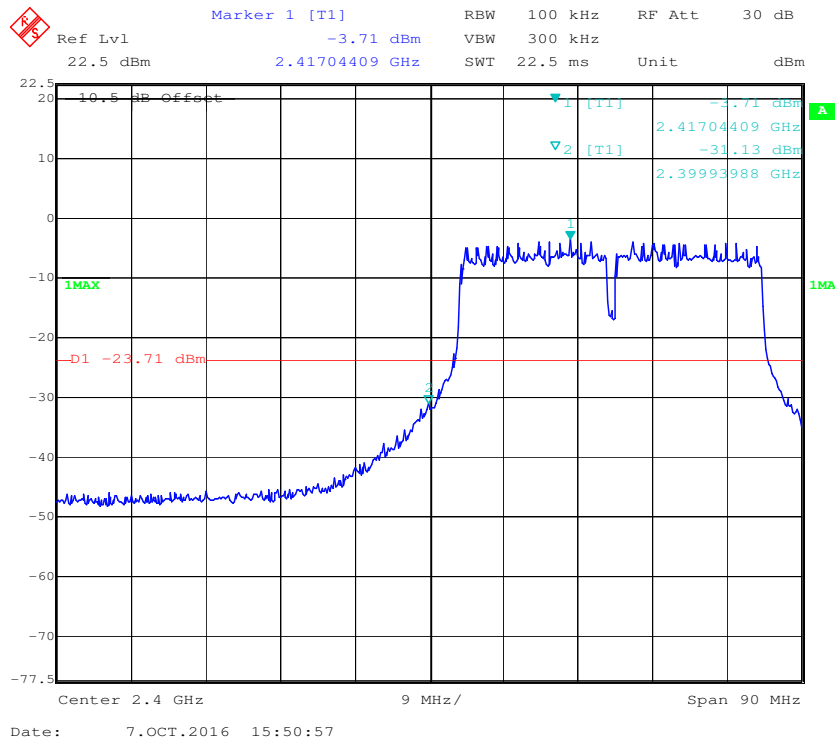

802.11n-HT40: Band Edge, Right Side

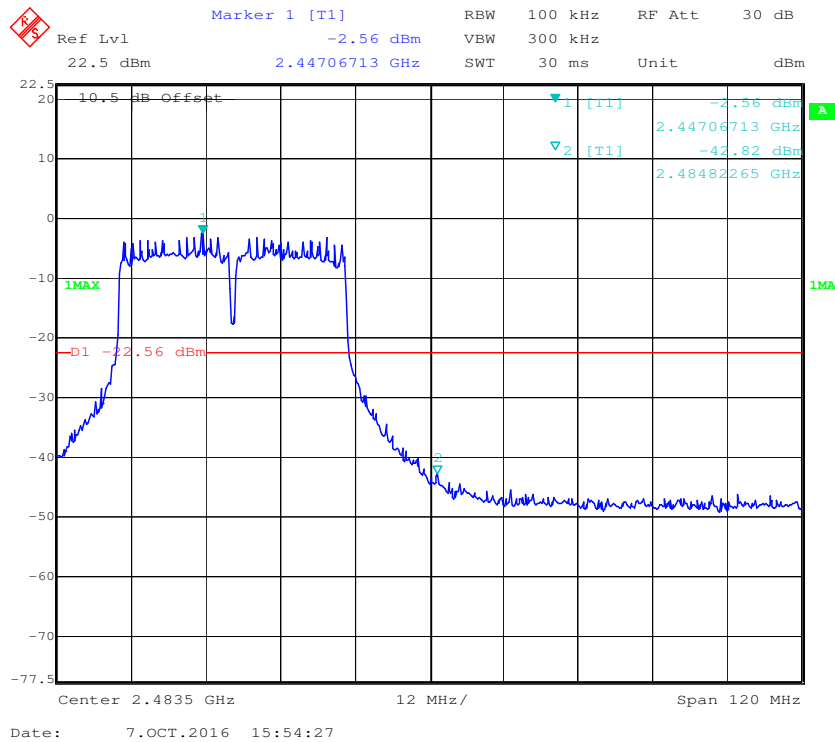


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 10\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Alisa Gao on 2016-10-07.

EUT operation mode: Transmitting

Test Result: Pass

Frequency (MHz)	Antenna Port	Power Spectral Density(dBm/3KHz)	Sum Power spectral density(dBm/3KHz) ant1+ant2+ant3	Limit (dBm/3KHz)
802.11b mode				
2412	1	-5.00	-1.23	6.23
	2	-5.61		
	3	-7.91		
2437	1	-4.58	0.07	
	2	-3.70		
	3	-6.18		
2462	1	-4.97	-0.51	
	2	-4.38		
	3	-6.87		
802.11g mode				
2412	1	-12.66	-8.57	6.23
	2	-12.60		
	3	-15.24		
2437	1	-13.06	-8.47	
	2	-12.67		
	3	-14.12		
2462	1	-12.59	-8.02	
	2	-11.93		
	3	-14.15		
802.11n-HT20				
2412	1	-13.97	-9.37	6.23
	2	-13.28		
	3	-15.45		
2437	1	-13.76	-9.17	
	2	-13.24		
	3	-15.02		
2462	1	-13.81	-9.27	
	2	-13.91		
	3	-14.44		

Frequency (MHz)	Antenna Port	Power Spectral Density(dBm/3KHz)	Sum Power spectral density(dBm/3KHz) ant1+ant2+ant3	Limit (dBm/3KHz)
802.11n-HT40				
2422	1	-17.30	-12.43	6.23
	2	-16.27		
	3	-18.28		
2437	1	-16.27	-12.10	
	2	-16.68		
	3	-17.80		
2452	1	-16.59	-12.24	
	2	-16.08		
	3	-18.80		

Note: This Device Emploies Cyclic Delay Diversity.


When determining reductions in power spectral density limits, array gain is calculated as follows:

Array gain = $10 \log(N_{\text{ANT}})$, where N_{ANT} is the number of transmit antennas.


Total directional gain (dBi) = gain of individual transmit antennas (dBi) + 4.77 (dB) = 7.77 dBi.

Antenna 1


Power Spectral Density, 802.11b Low Channel

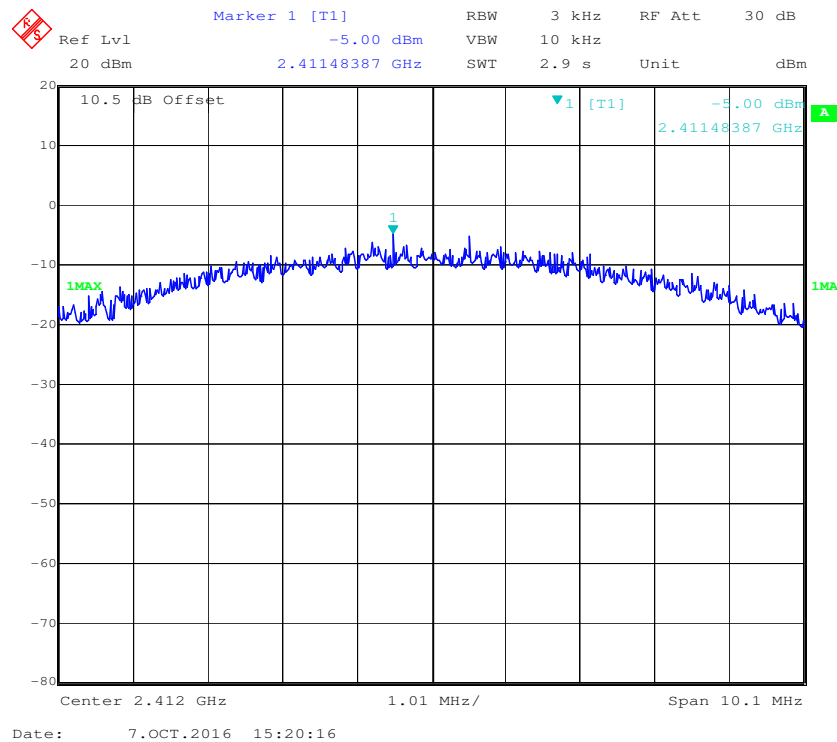


Power Spectral Density, 802.11b Middle Channel

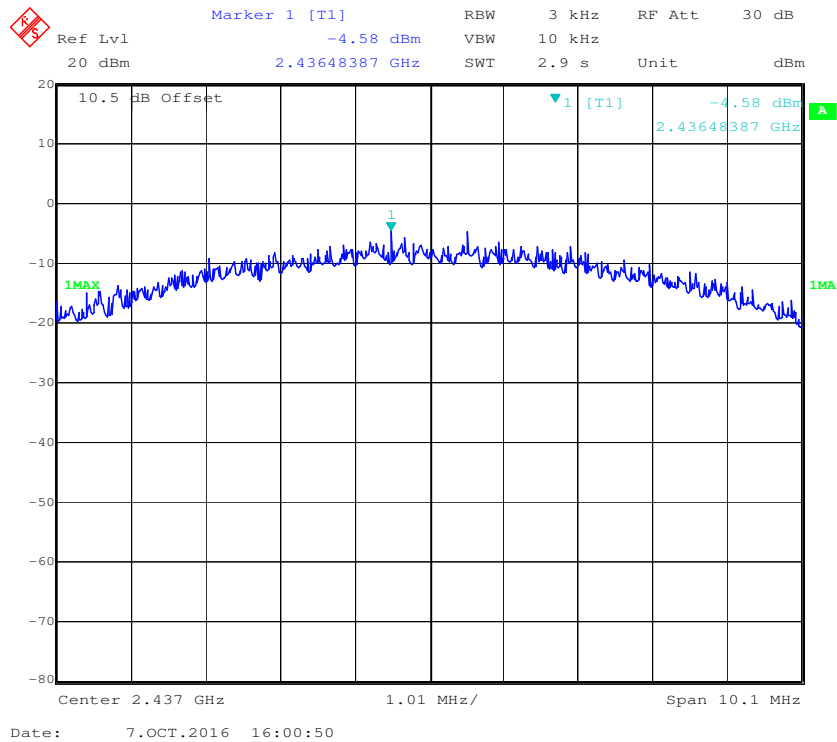


Power Spectral Density, 802.11b High Channel

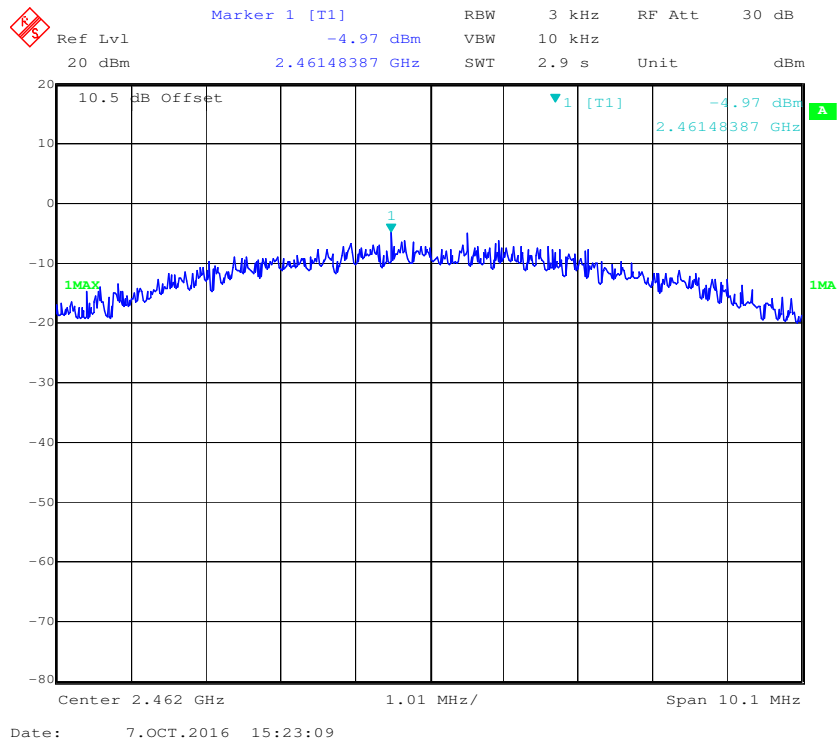


Power Spectral Density, 802.11g Low Channel

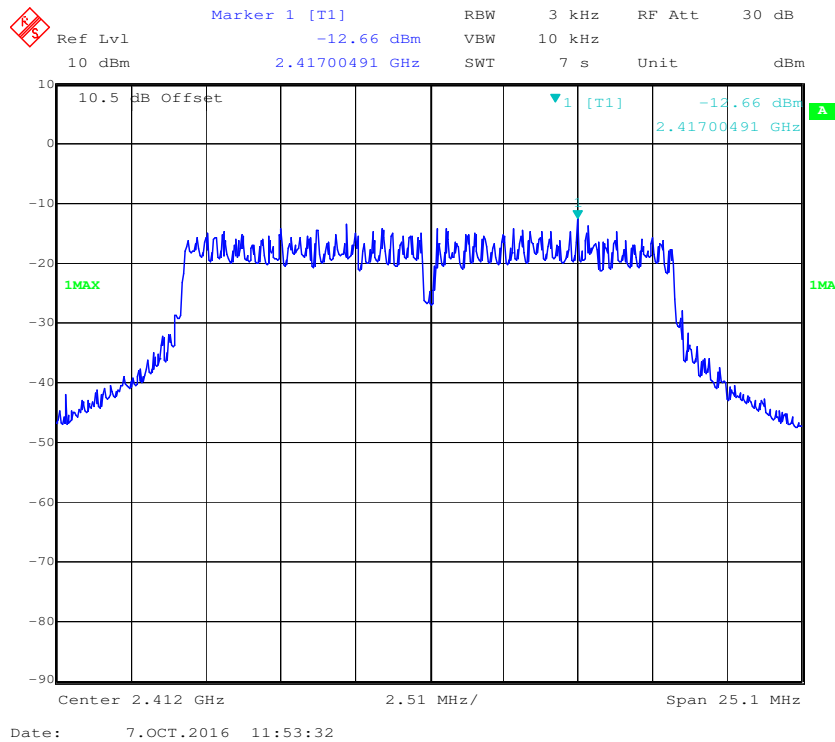


Power Spectral Density, 802.11g Middle Channel

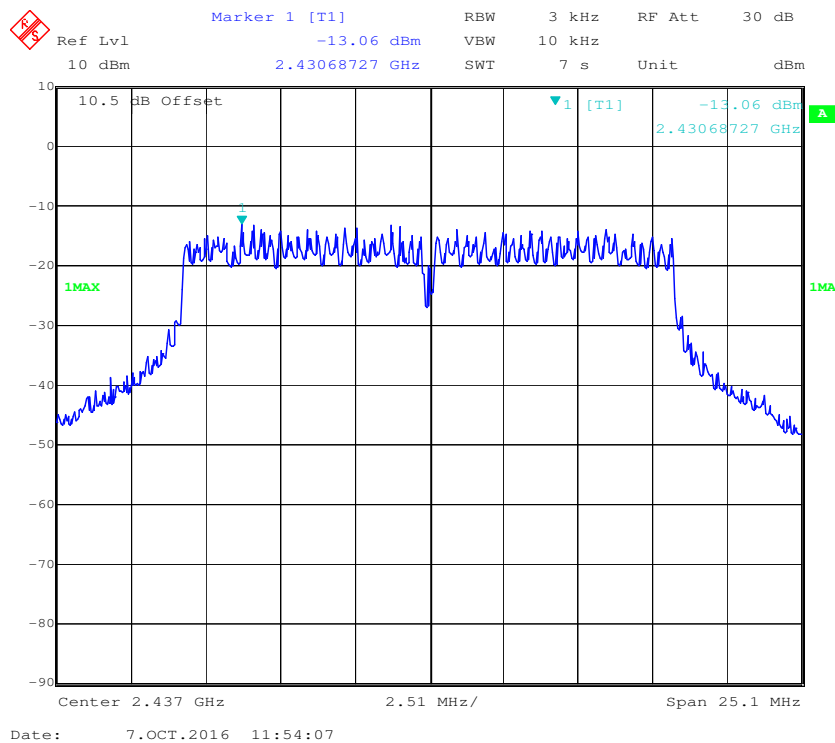


Power Spectral Density, 802.11g High Channel

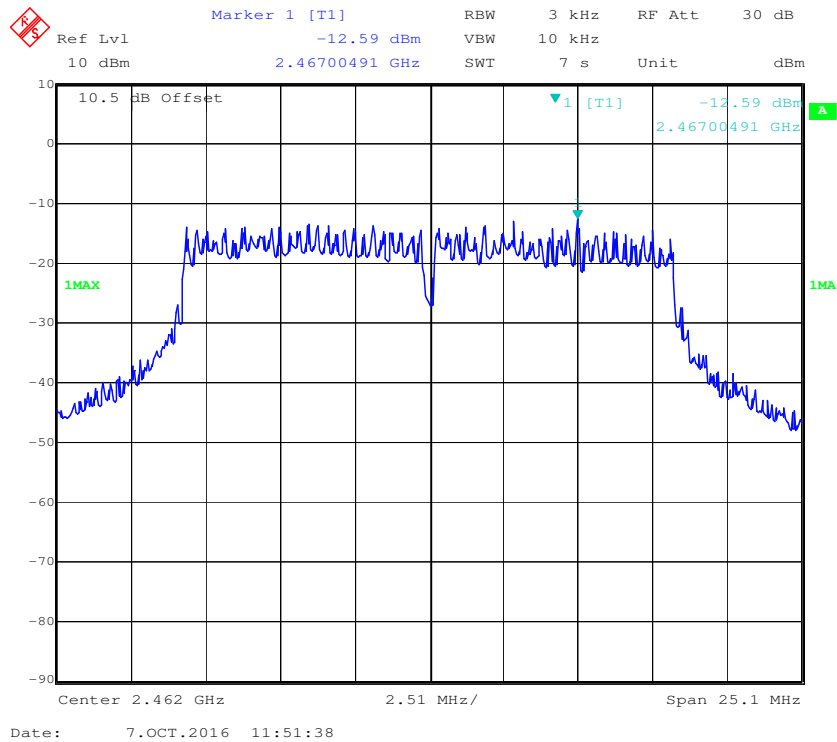


Power Spectral Density, 802.11n-HT20 Low Channel

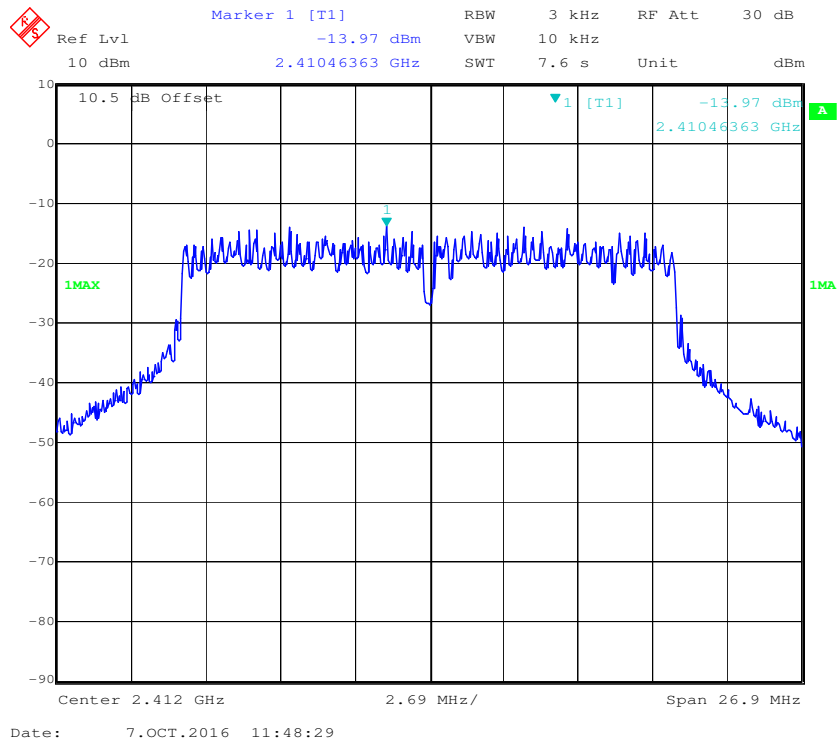


Power Spectral Density, 802.11n-HT20 Middle Channel

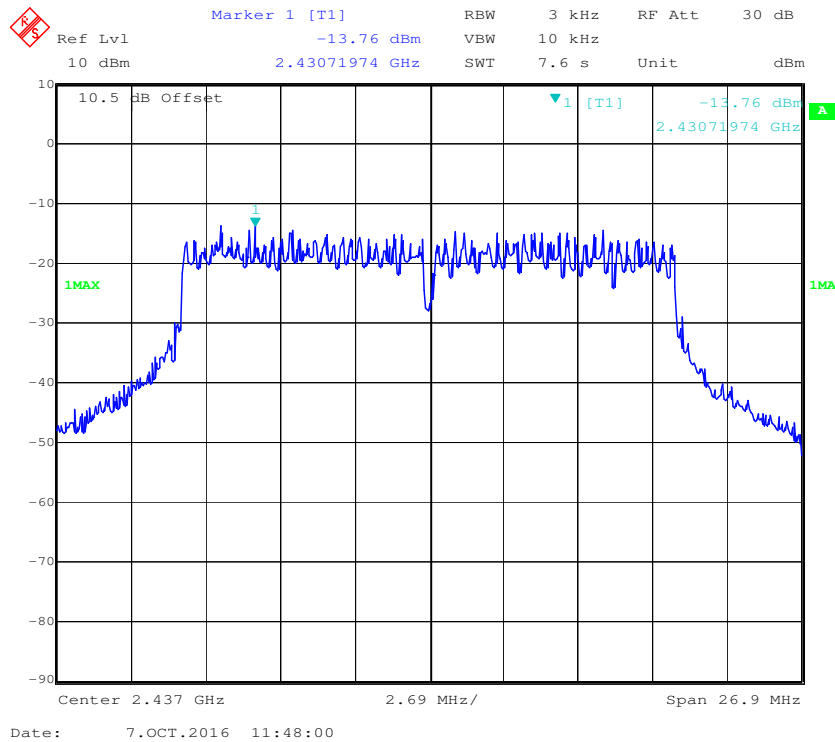


Power Spectral Density, 802.11n-HT20 High Channel

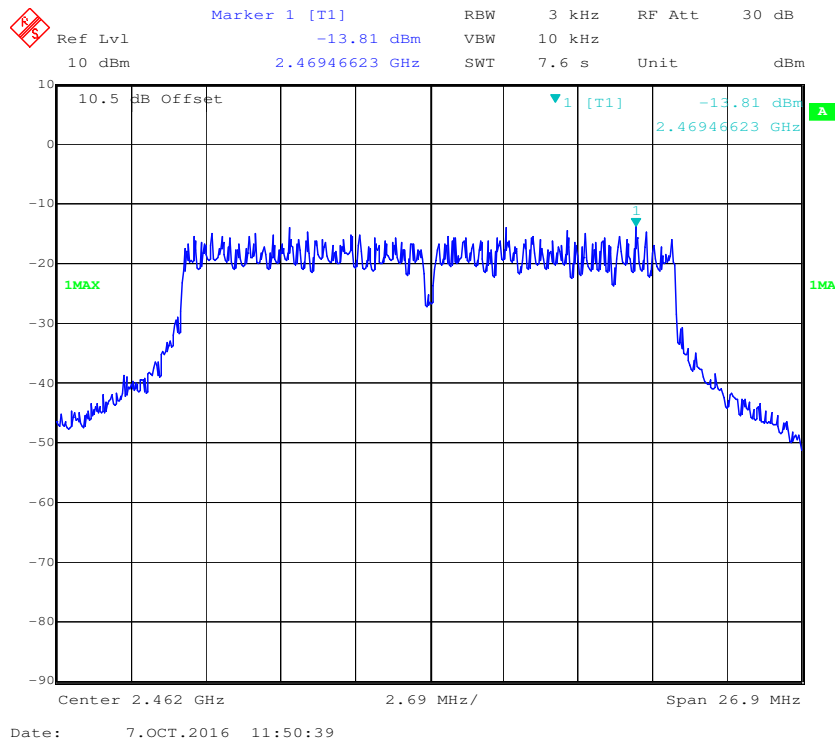


Power Spectral Density, 802.11n-HT40 Low Channel

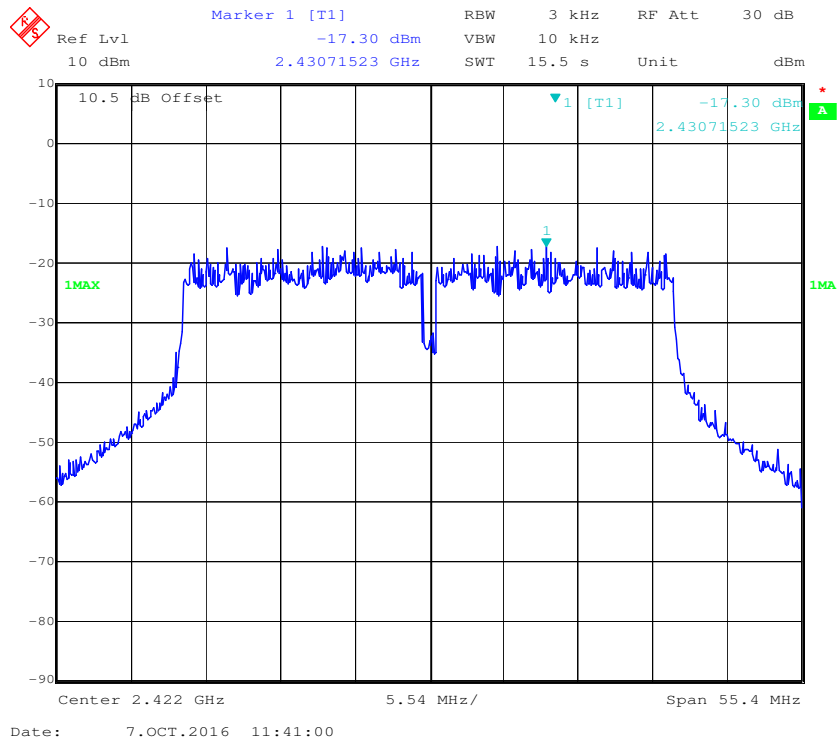

Power Spectral Density, 802.11n-HT40 Middle Channel

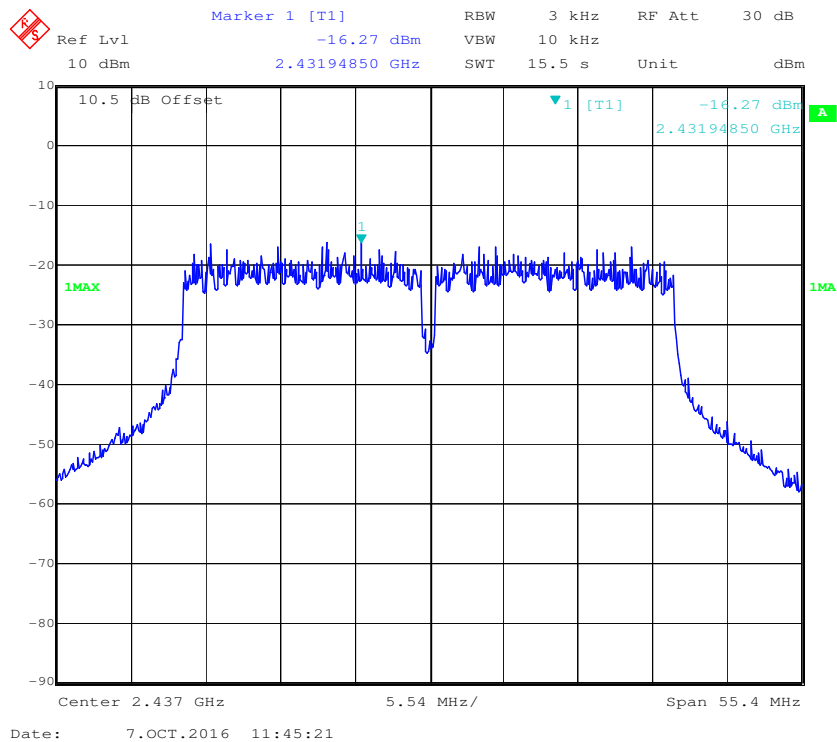


Power Spectral Density, 802.11n-HT40 High Channel

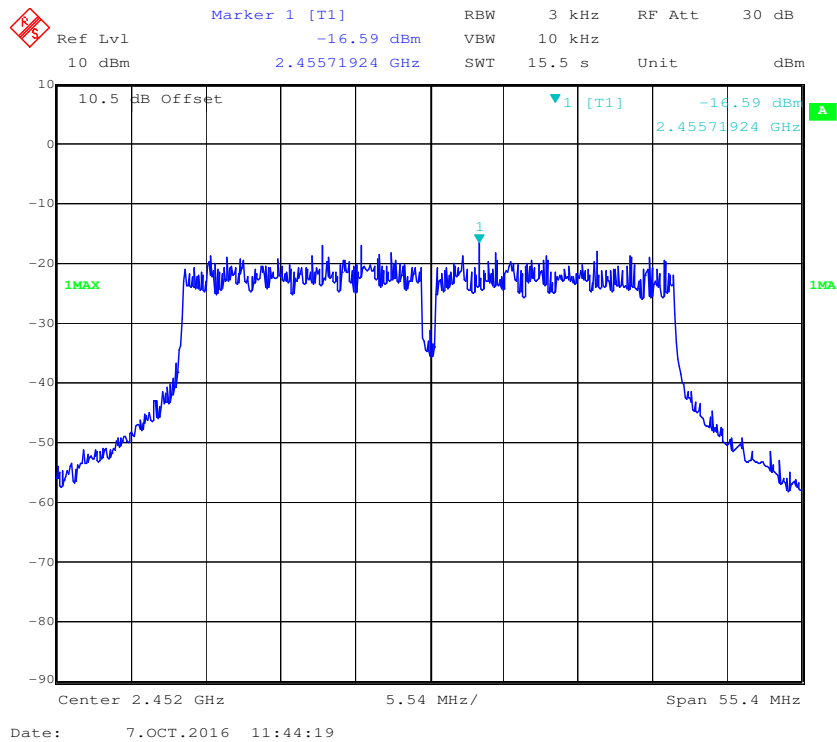


Antenna 2


Power Spectral Density, 802.11b Low Channel

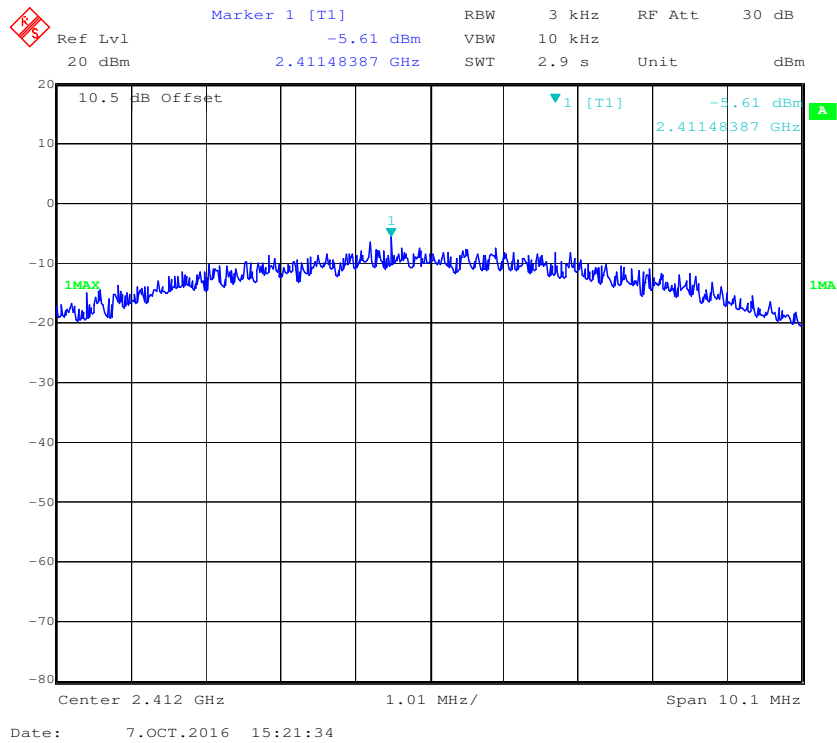


Power Spectral Density, 802.11b Middle Channel

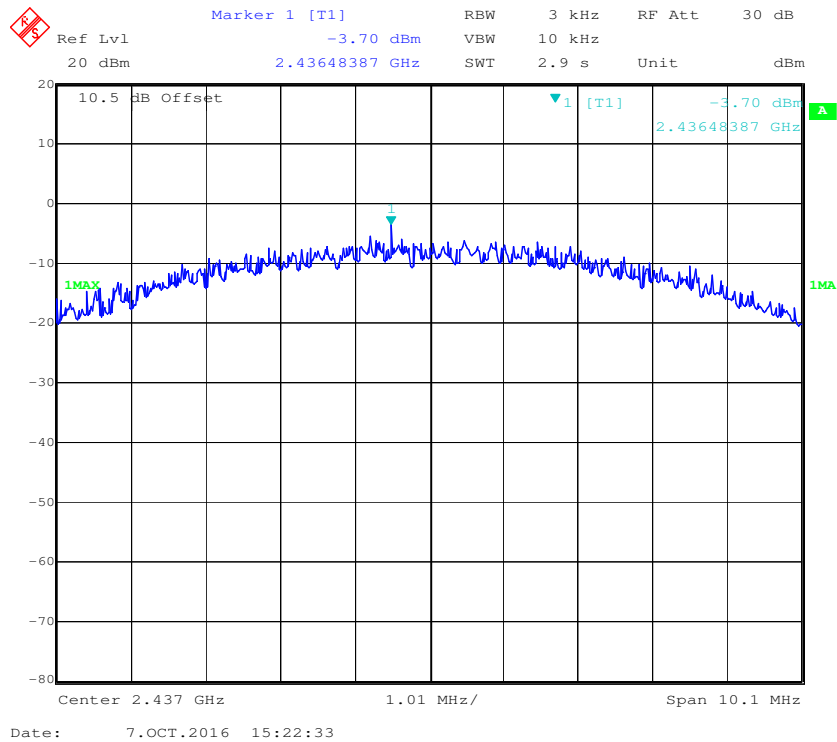


Power Spectral Density, 802.11b High Channel

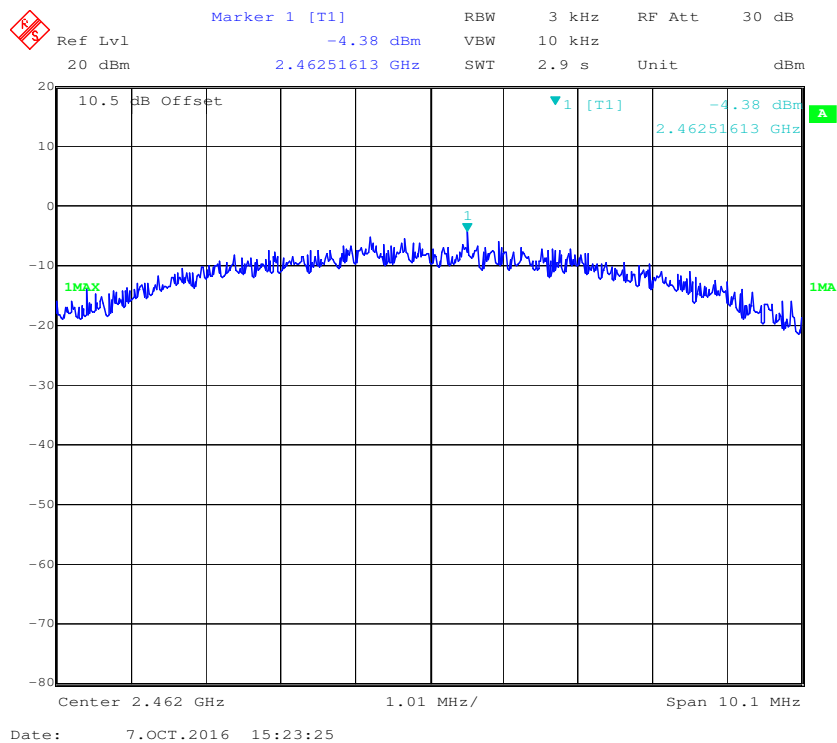


Power Spectral Density, 802.11g Low Channel

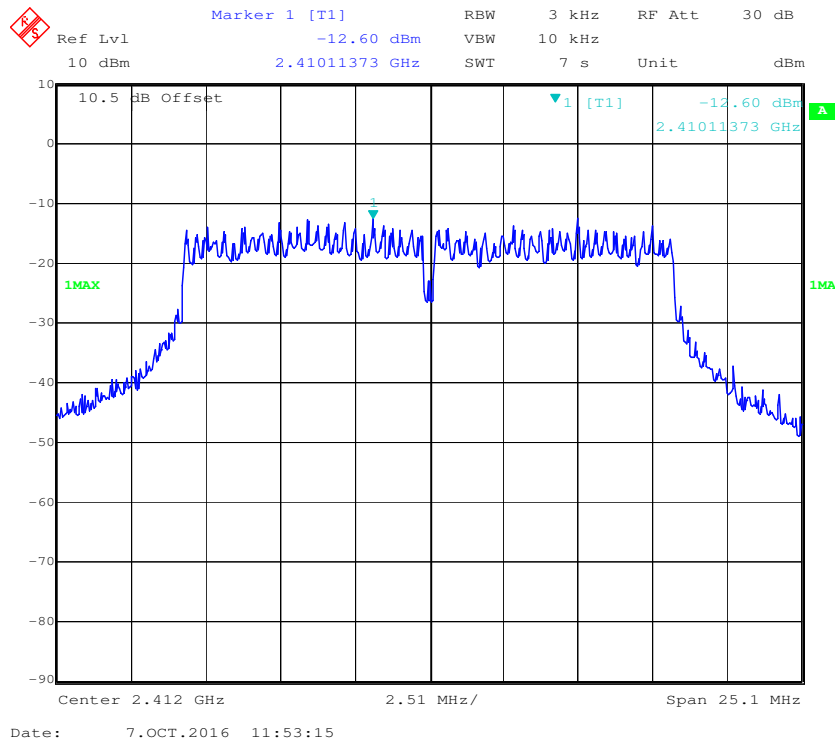


Power Spectral Density, 802.11g Middle Channel

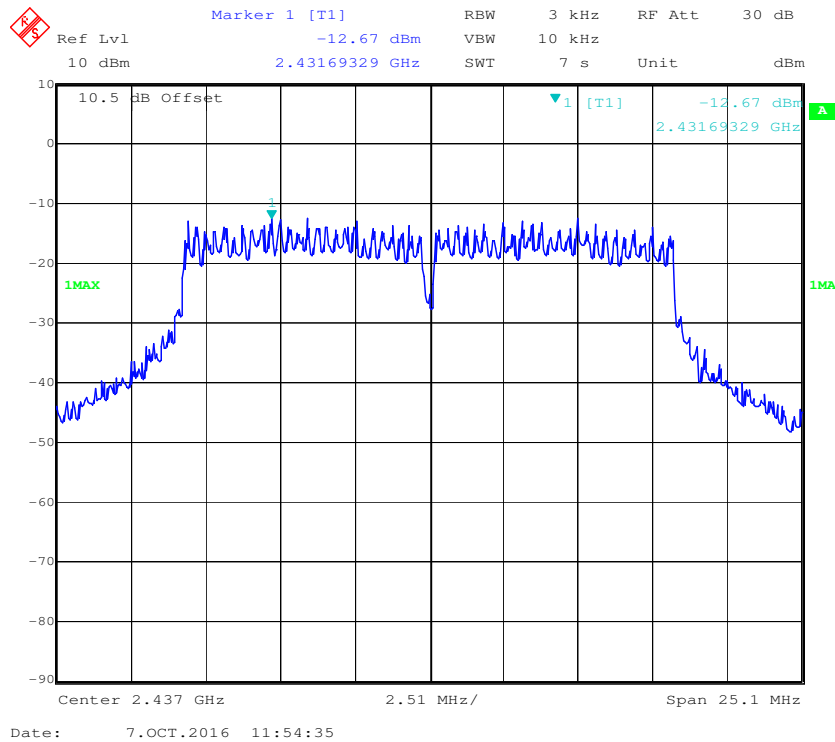


Power Spectral Density, 802.11g High Channel

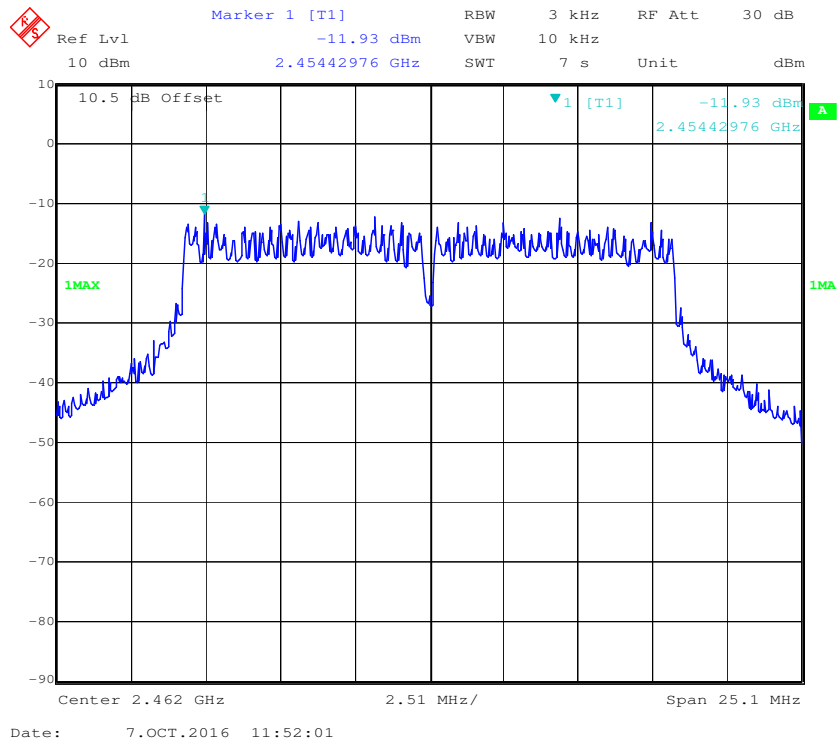


Power Spectral Density, 802.11n-HT20 Low Channel

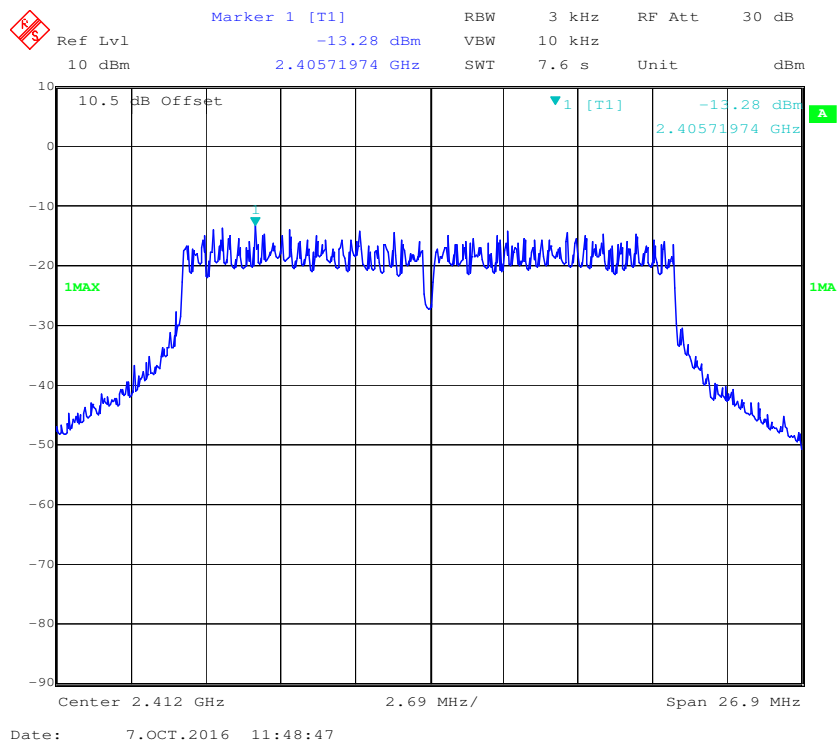


Power Spectral Density, 802.11n-HT20 Middle Channel

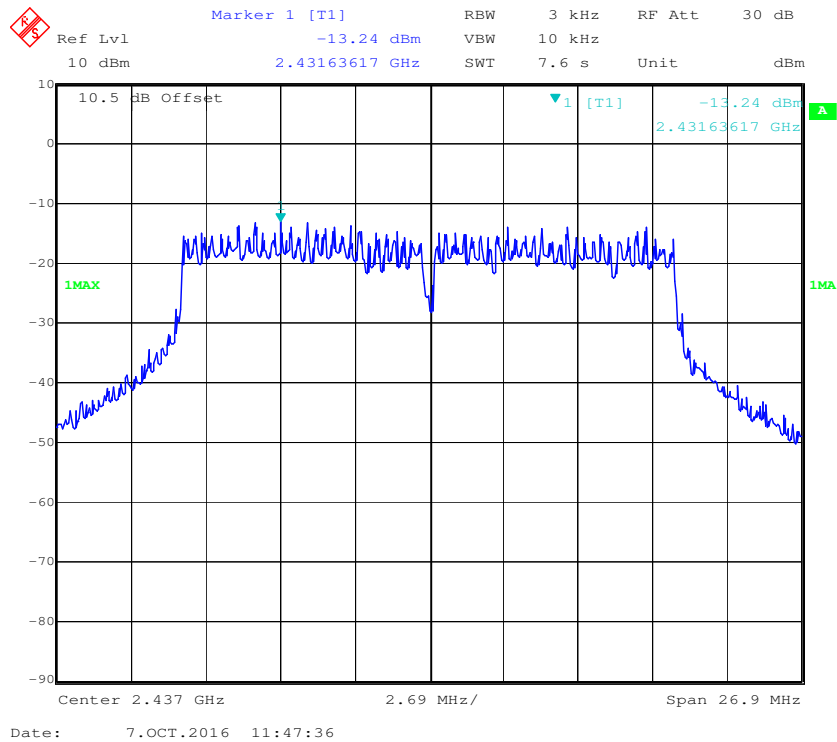


Power Spectral Density, 802.11n-HT20 High Channel

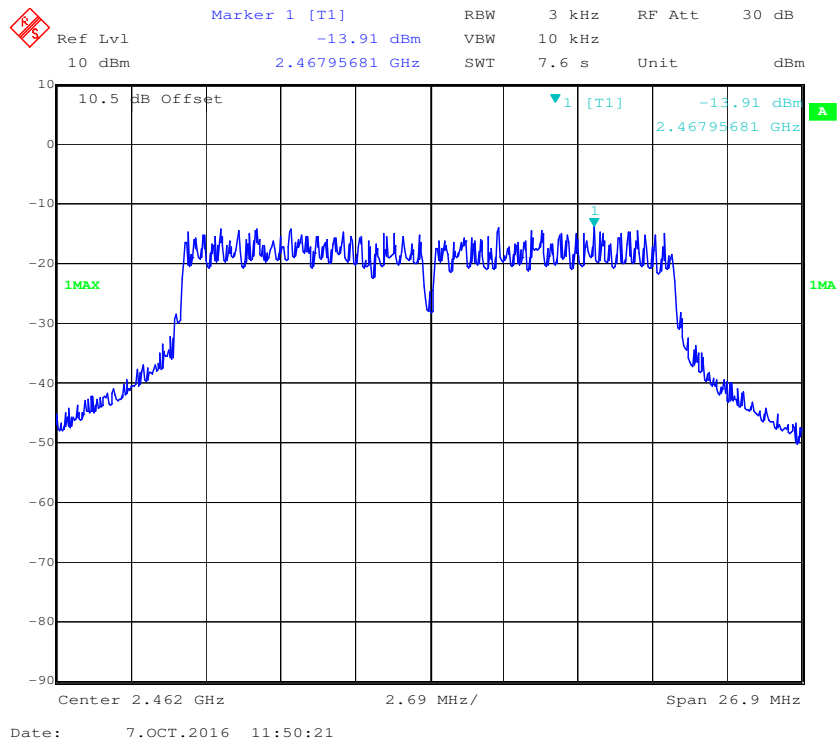


Power Spectral Density, 802.11n-HT40 Low Channel

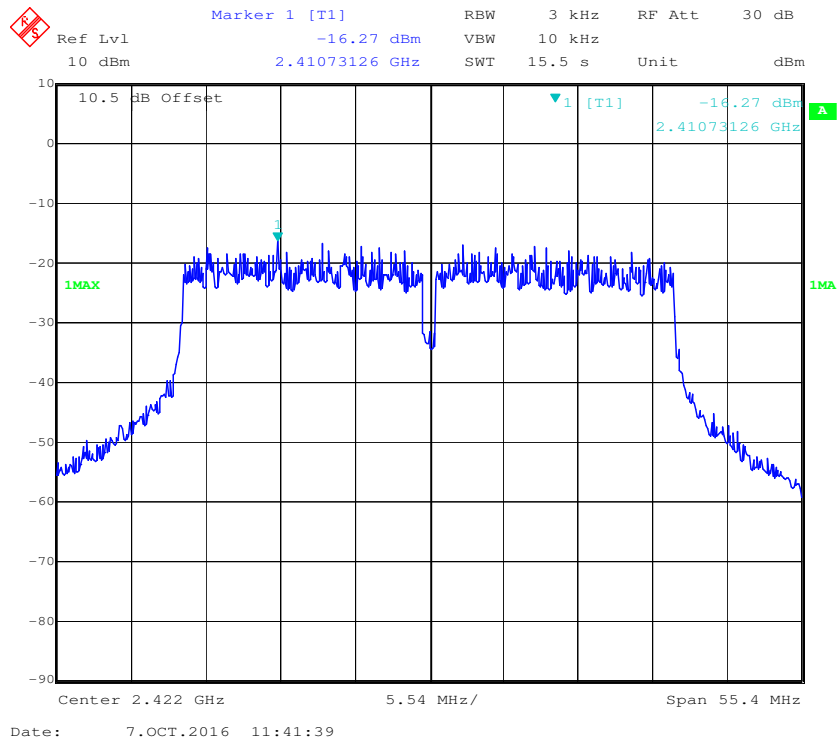

Power Spectral Density, 802.11n-HT40 Middle Channel

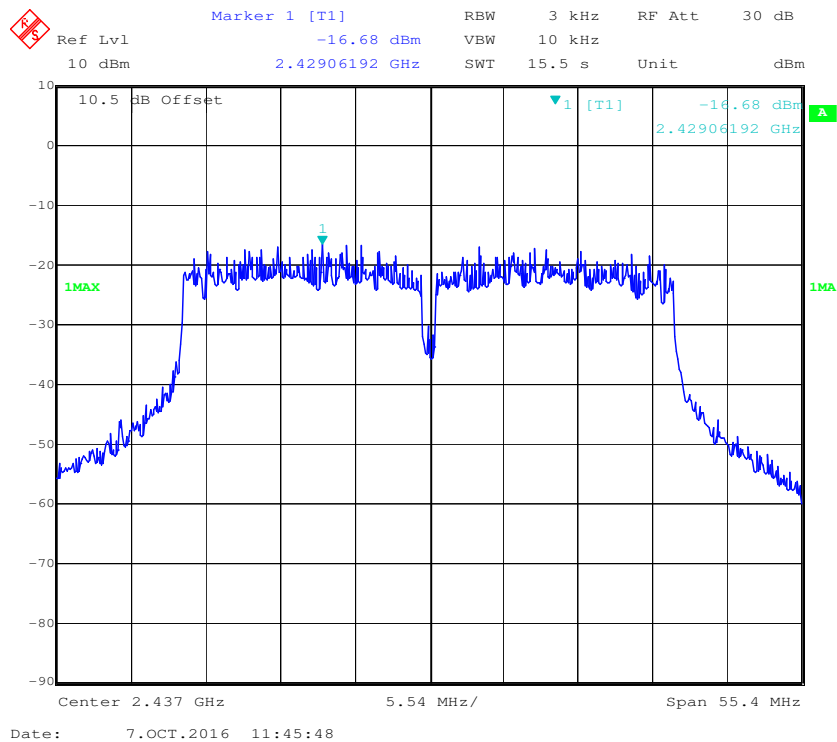


Power Spectral Density, 802.11n-HT40 High Channel

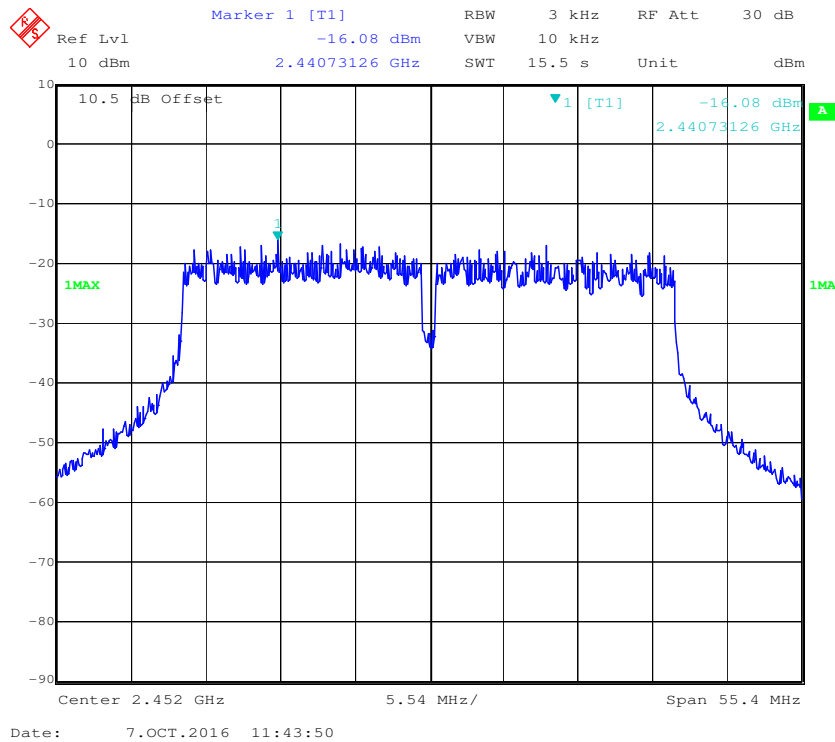


Antenna 3


Power Spectral Density, 802.11b Low Channel

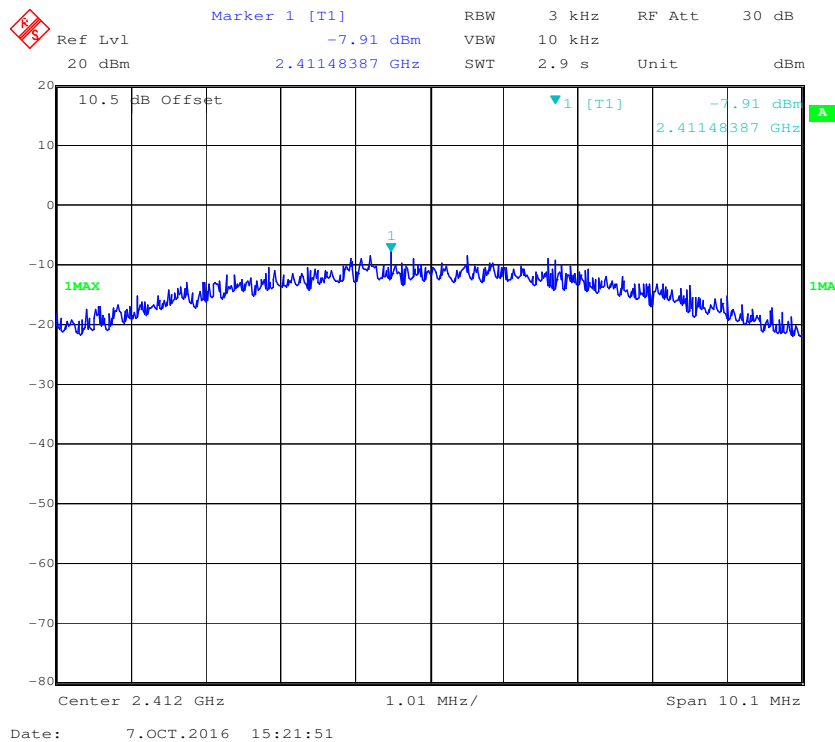


Power Spectral Density, 802.11b Middle Channel

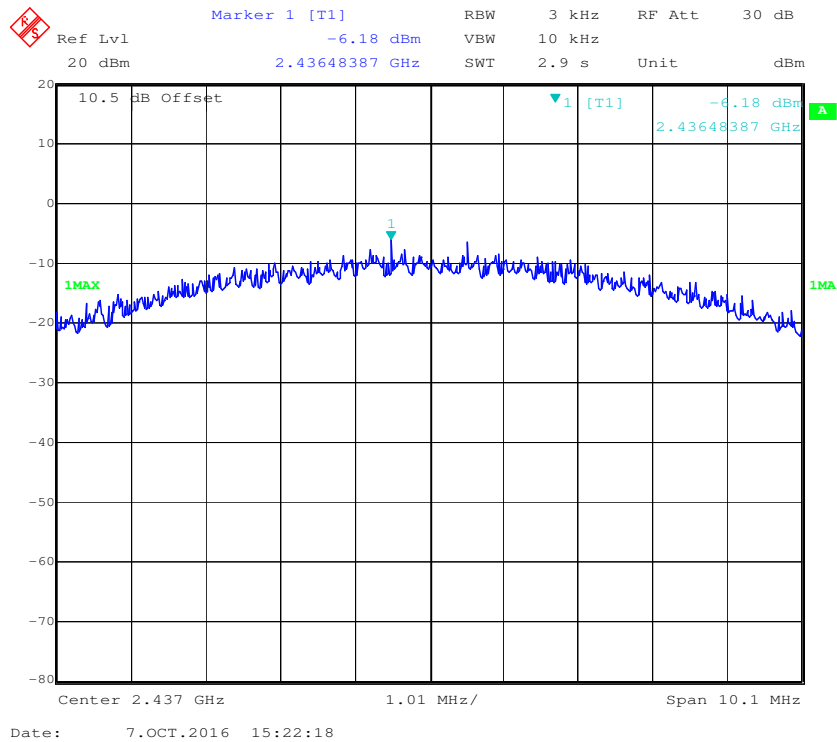


Power Spectral Density, 802.11b High Channel

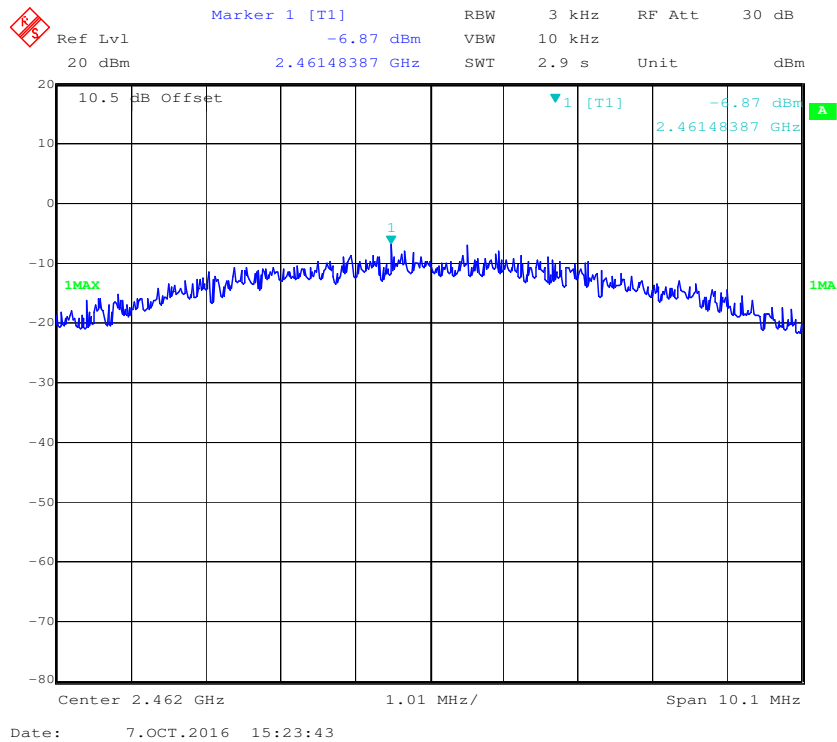


Power Spectral Density, 802.11g Low Channel

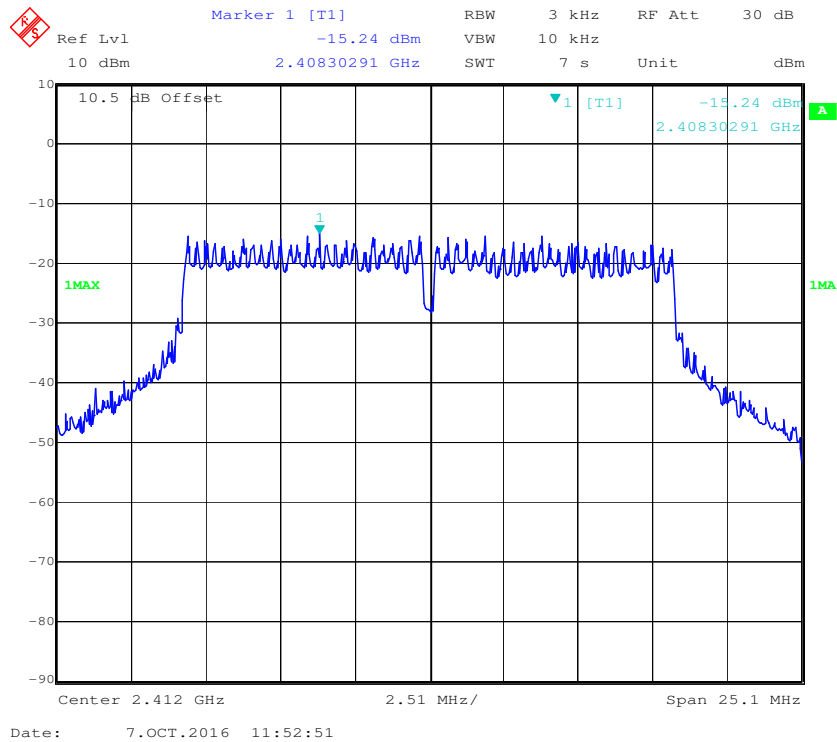


Power Spectral Density, 802.11g Middle Channel

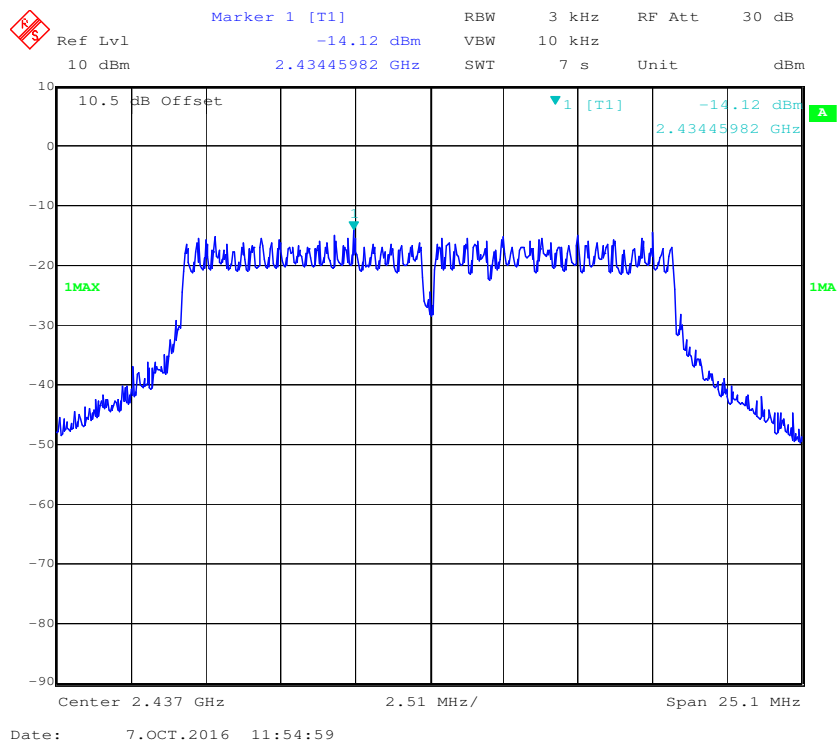


Power Spectral Density, 802.11g High Channel

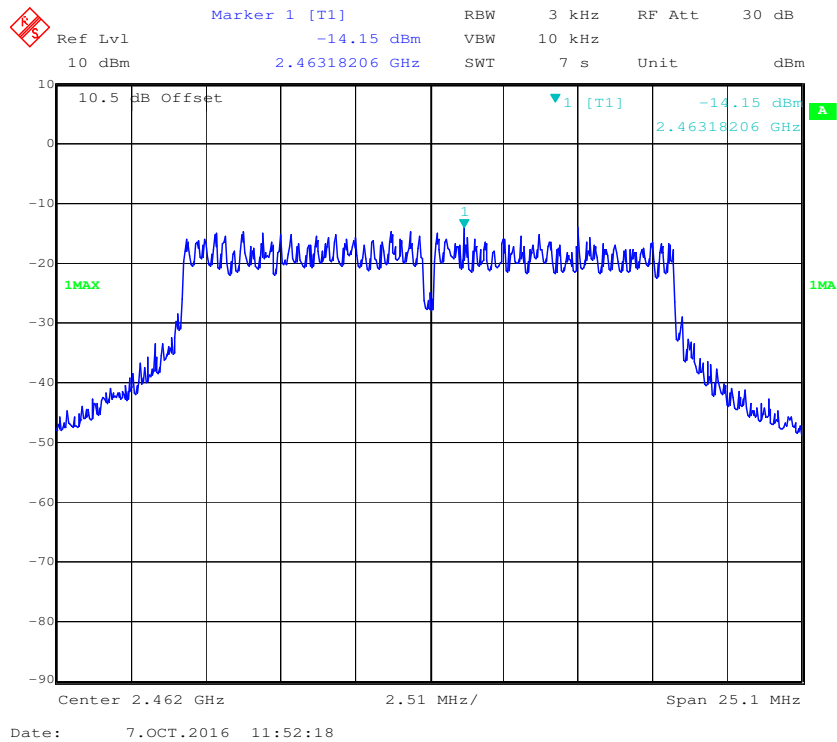


Power Spectral Density, 802.11n-HT20 Low Channel

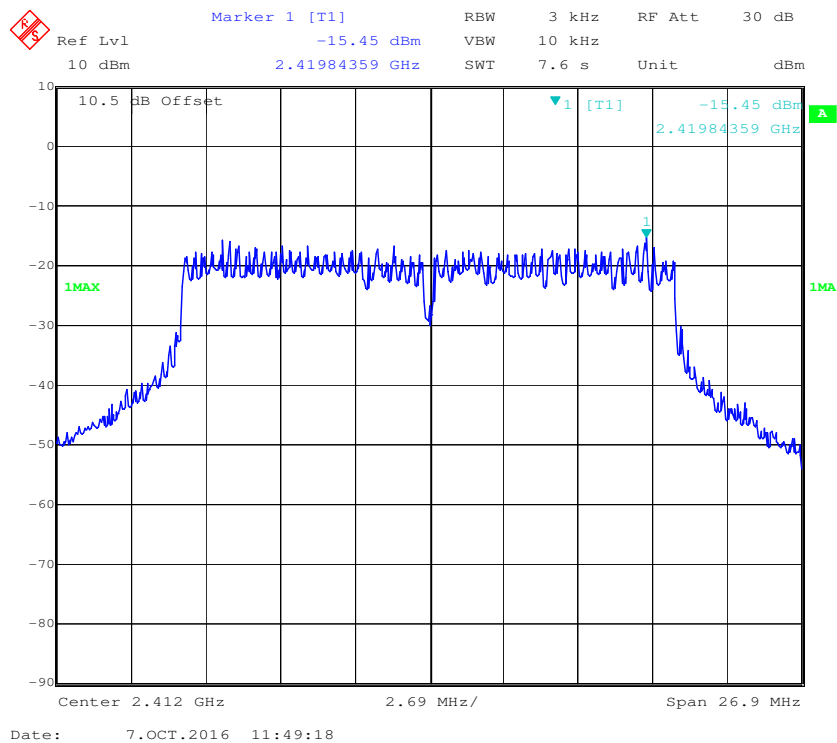


Power Spectral Density, 802.11n-HT20 Middle Channel

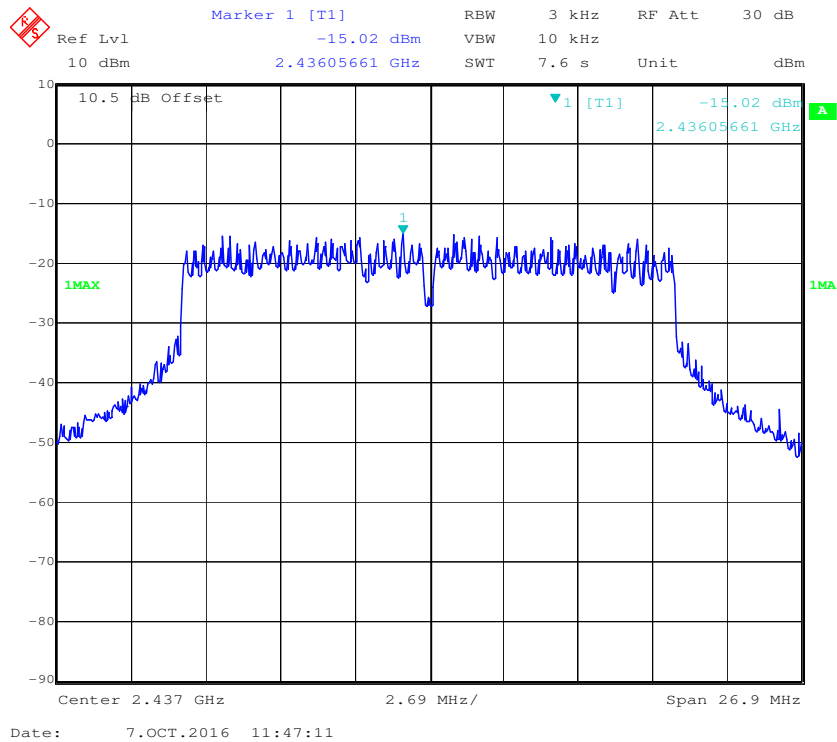


Power Spectral Density, 802.11n-HT20 High Channel

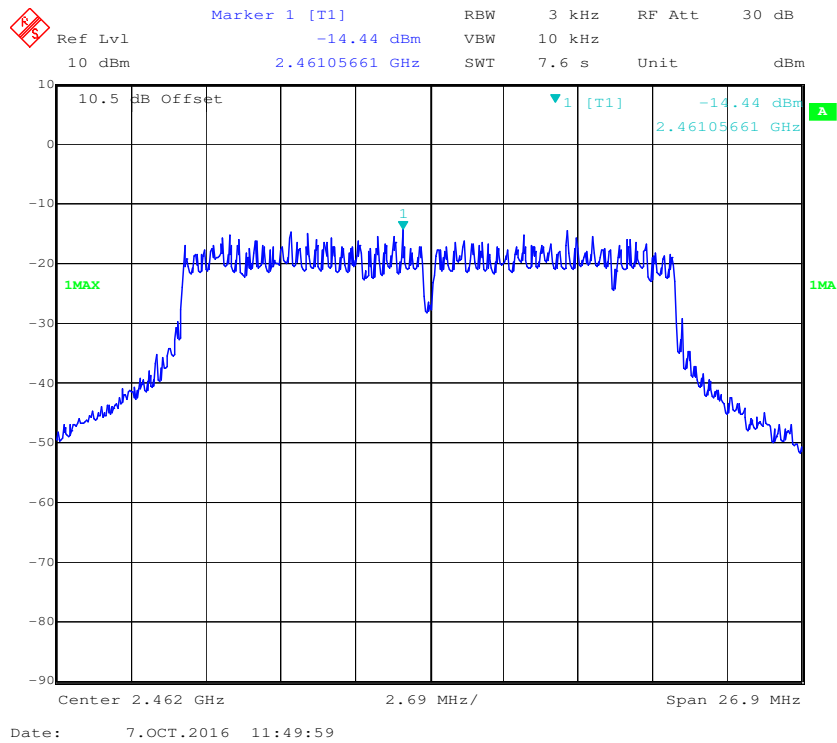


Power Spectral Density, 802.11n-HT40 Low Channel

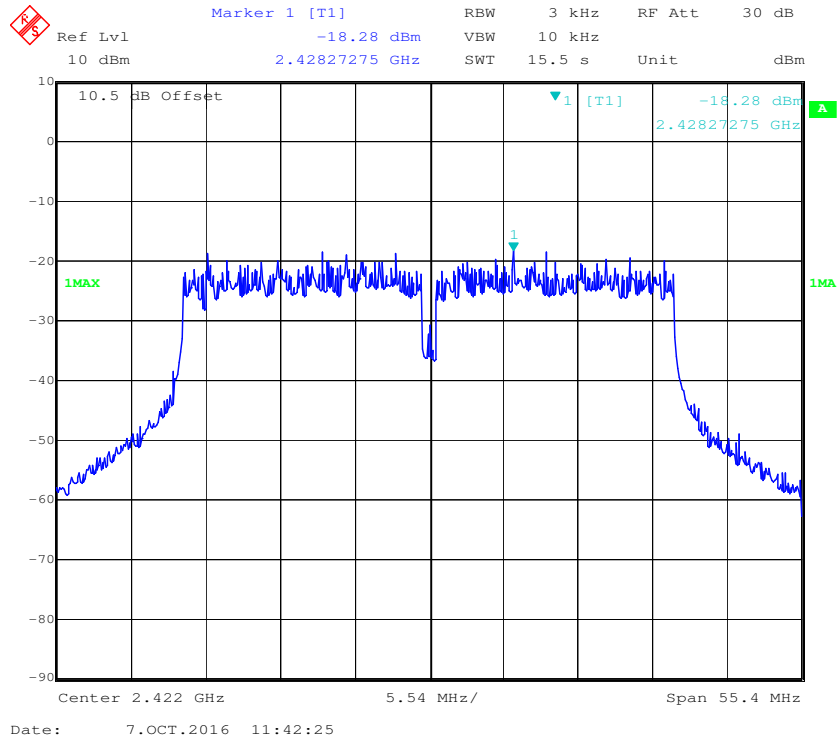

Power Spectral Density, 802.11n-HT40 Middle Channel

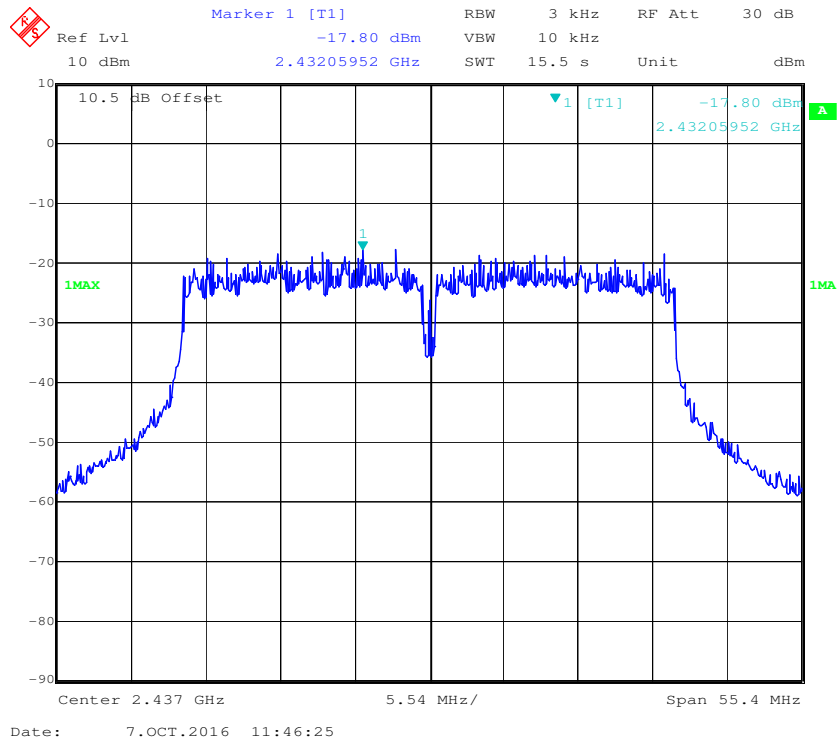

Power Spectral Density, 802.11n-HT40 High Channel

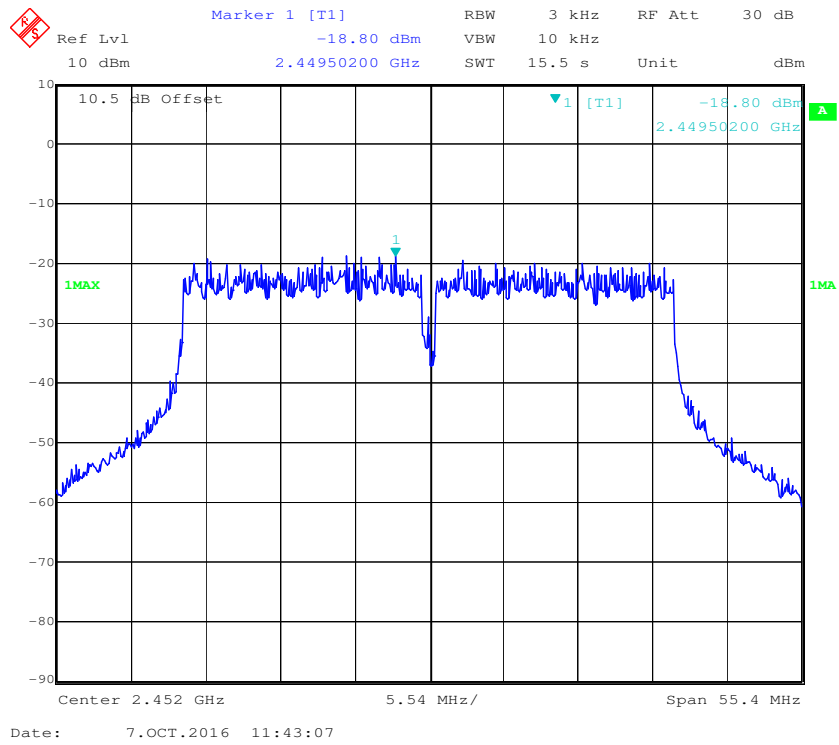

***** END OF REPORT *****