


RF TEST REPORT

Applicant Shanghai Sunmi Technology Co.,Ltd.
FCC ID 2AH25D3
Product POS System
Brand SUNMI
Model F153A
Report No. EFTA25070076-IE-02-R1V1
Issue Date December 31, 2025

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2025)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the Test Report.....	5
1.2. Test Facility	5
1.3. Testing Location.....	5
2. General Description of Equipment Under Test.....	6
2.1. Applicant and Manufacturer Information	6
2.2. General Information	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case	9
5.1. Maximum output power	10
5.2. 99% Bandwidth and 6dB Bandwidth	11
5.3. Band Edge	12
5.4. Power Spectral Density	13
5.5. Spurious RF Conducted Emissions.....	15
5.6. Unwanted Emission	17
5.7. Conducted Emission.....	22
6. Test Results	23
6.1. Maximum output power	28
6.2. 99% Bandwidth and 6dB Bandwidth	30
6.3. Band Edge	58
6.4. Power Spectral Density	76
6.5. Spurious RF Conducted Emissions.....	91
6.6. Unwanted Emission	117
6.7. Conducted Emission.....	118
7. Main Test Instruments.....	119
8. The EUT Appearance	120
9. Test Setup Photos.....	121

Version	Revision Description	Issue Date
Rev.0	Initial issue of report.	December 19, 2025
Rev.1	Updated information.	December 31, 2025
Note: This revised report (Report No.: EFTA25070076-IE-02-R1V1) supersedes and replaces the previously issued report (Report No.: EFTA25070076-IE-02-R1). Please discard or destroy the previously issued report and dispose of it accordingly.		

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	Duty Cycle	C63.10 11.6	PASS
2	Maximum output power	15.247(b)(3)	PASS
3	99% Bandwidth and 6dB Bandwidth	15.247(a)(2) C63.10 6.9	PASS
4	Power spectral density	15.247(e)	PASS
5	Band Edge	15.247(d), 15.205, 15.209	PASS
6	Spurious RF Conducted Emissions	15.247(d)	PASS
7	Unwanted Emissions	15.247(d), 15.205, 15.209	PASS
8	Conducted Emissions	15.207	PASS
Date of Testing: July 12, 2025 ~ July 22, 2025 and December 12, 2025 ~ December 19, 2025 Date of Sample Received: July 7, 2025			
Note: All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment Under Test

2.1. Applicant and Manufacturer Information

Applicant	Shanghai Sunmi Technology Co.,Ltd.
Applicant address	Room 505,No.388,Song Hu Road, Yang Pu District, Shanghai, China
Manufacturer	Shanghai Sunmi Technology Co.,Ltd.
Manufacturer address	Room 505,No.388,Song Hu Road, Yang Pu District, Shanghai, China

2.2. General Information

EUT Description		
Model	F153A	
SN	Conducted	D301E56BJ0093
	Radiated	D301E56BJ0095
Hardware Version	D3_MB_V1.1	
Software Version	V1.0	
Power Supply	AC adapter	
Antenna Type	PIFA Antenna	
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)	
Antenna Gain	4.01 dBi	
Operating Frequency Range(s)	802.11b/g/n(HT20)/ax(HE20): 2412 ~ 2462 MHz 802.11n(HT40)/ax(HE40): 2422 ~ 2452 MHz Bluetooth LE V5.3: 2402 ~2480 MHz	
Modulation Type	802.11b: DSSS 802.11g/n: OFDM 802.11ax: OFDMA Bluetooth LE: GFSK	
Max. Output Power	Wi-Fi 2.4GHz: 17.48 dBm Bluetooth LE: 4.63 dBm	
Operating voltage range	21.6 V to 26.4 V	
State voltage	24 V	
EUT Accessory		
Adapter	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: CYZS36-240150 Input: 100-240V 1.5A Output: 24.0V $\overline{\text{---}}$ 1.5A	
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.		

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2025) Radio Frequency Devices

ANSI C63.10-2020

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

The test software is used adb.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Bluetooth(Low Energy)	1Mbps; 2Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0

5. Test Case

5.1. Duty Cycle

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss.
The zero-span measurement

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$
- 3) Set detector = peak or average

Test Setup



Limits

For Reporting purposes only

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

5.2. Maximum output power


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1\text{W (30dBm)}$
----------------------	--------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

5.3. 99% Bandwidth and 6dB Bandwidth

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.

Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

5.4. Band Edge


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB

5.5. Power Spectral Density

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation.

Method AVGPSD-2 was used for this test.

- Measure the duty cycle (D) of the transmitter output signal as described in 11.6
- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- Set VBW $\geq [3 \times \text{RBW}]$
- Detector = power averaging (rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$
- Sweep time = auto couple
- Do not use sweep triggering; allow sweep to "free run"
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level
- Add $[10 \log(1/D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time
- If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Test setup



Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission."

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

5.6. Spurious RF Conducted Emissions

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to AUTO.

The test is in transmitting mode.

Test Setup

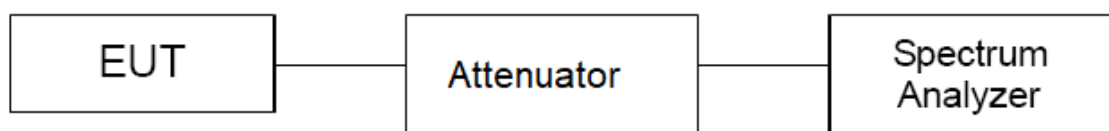

Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. ”

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11ax(HE20)	2412	2.90	-27.10
802.11ax(HE20)	2437	2.77	-27.23
802.11ax(HE20)	2462	3.46	-26.54
802.11ax(HE40)	2422	-0.43	-30.43
802.11ax(HE40)	2437	-1.09	-31.09
802.11ax(HE40)	2452	-0.39	-30.39
802.11b	2412	8.04	-21.96
802.11b	2437	8.56	-21.44
802.11b	2462	8.88	-21.12

802.11g	2412	1.52	-28.48
802.11g	2437	2.51	-27.49
802.11g	2462	3.42	-26.58
802.11n(HT20)	2412	-1.82	-31.82
802.11n(HT20)	2417	1.57	-28.43
802.11n(HT20)	2437	-1.61	-31.61
802.11n(HT20)	2462	-1.13	-31.13
802.11n(HT40)	2422	-2.54	-32.54
802.11n(HT40)	2427	-0.12	-30.12
802.11n(HT40)	2437	-0.04	-30.04
802.11n(HT40)	2452	-0.52	-30.52
Bluetooth (1M)	2402	4.13	-25.87
Bluetooth (1M)	2440	3.66	-26.34
Bluetooth (1M)	2480	4.24	-25.76
Bluetooth (2M)	2402	2.63	-27.37
Bluetooth (2M)	2440	3.22	-26.78
Bluetooth (2M)	2480	3.37	-26.63

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

5.7. Unwanted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9kHz, VBW=30kHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.

Test Setup


9kHz~ 30MHz

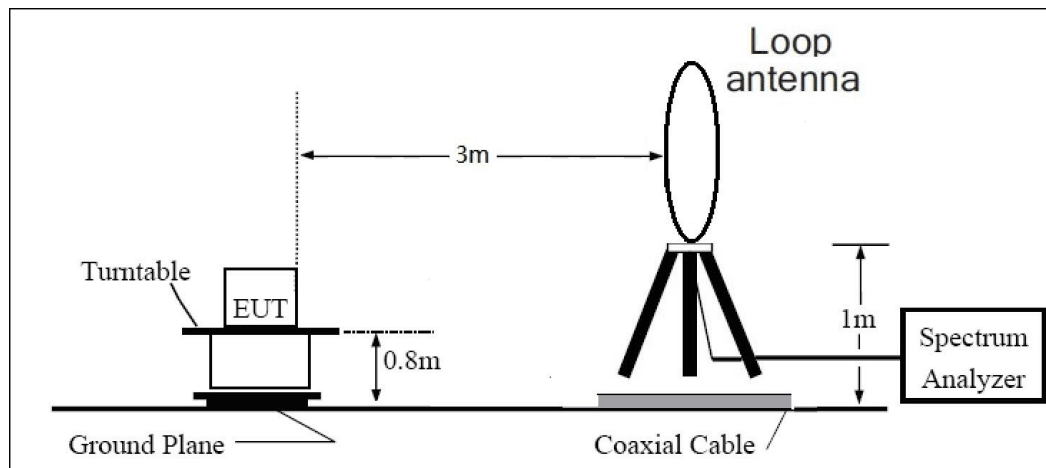

30MHz~ 1GHz

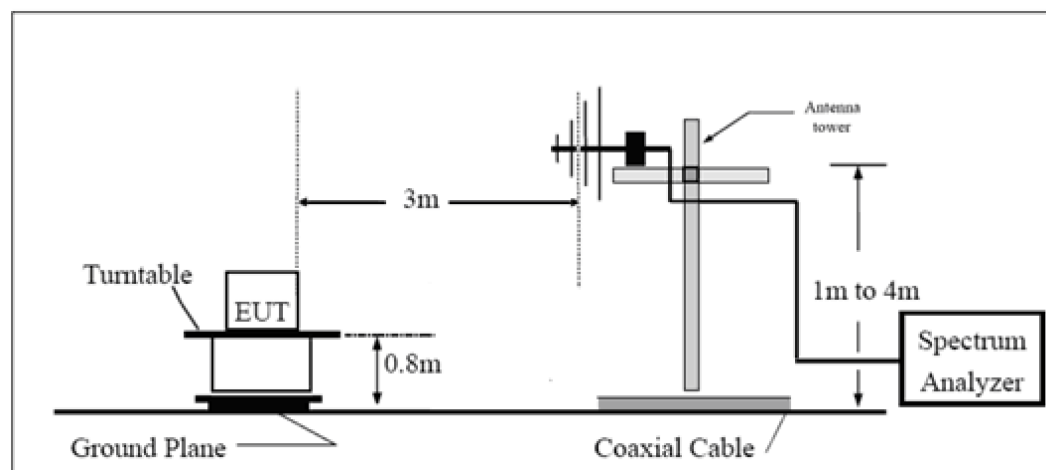

Above 1GHz

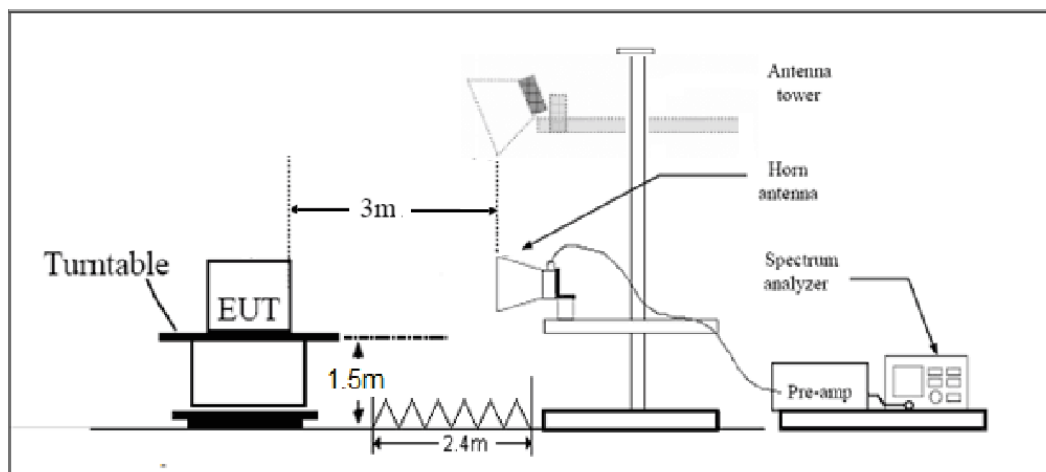

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dB μ V/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30–88	100	40
88–216	150	43.5
216–960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dB μ V/m

Average Limit=54 dB μ V/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

5.8. Conducted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

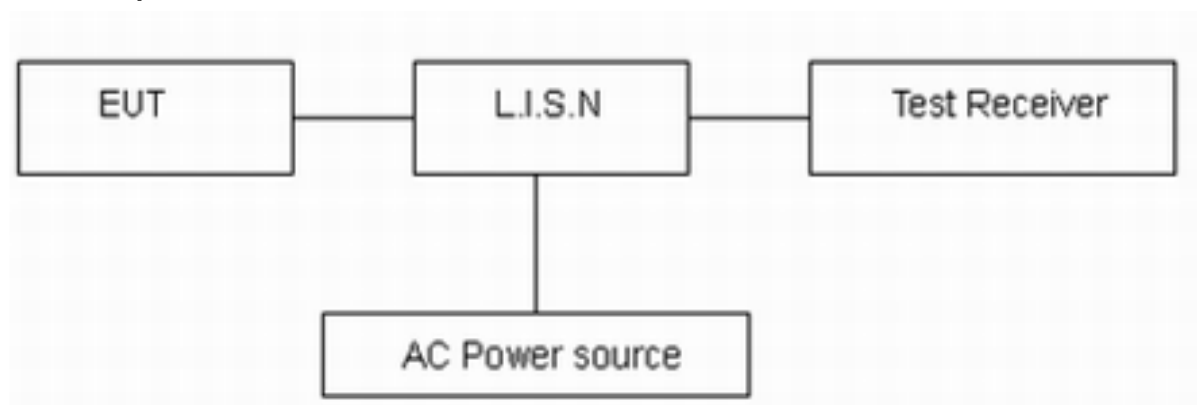

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

6. Test Results


6.1. Duty Cycle

Test Mode	T _{on} (msec)	Period (msec)	Duty cycle (%)	Duty cycle correction Factor (dB)
802.11b	12.23	22.25	0.549	2.60
802.11g	2.03	17.50	0.116	9.36
802.11n HT20	1.89	11.92	0.159	7.99
802.11n HT40	0.93	10.96	0.085	10.72
802.11ax HE20	1.46	11.49	0.127	8.95
802.11ax HE40	0.77	10.79	0.071	11.48
Bluetooth LE (1M)	2.12	2.50	0.849	0.71
Bluetooth LE (2M)	1.06	1.87	0.568	2.46
Note: when Duty cycle ≥ 0.98 , Duty cycle correction Factor not required.				


Duty Cycle 802.11ax(HE20) 2412MHz

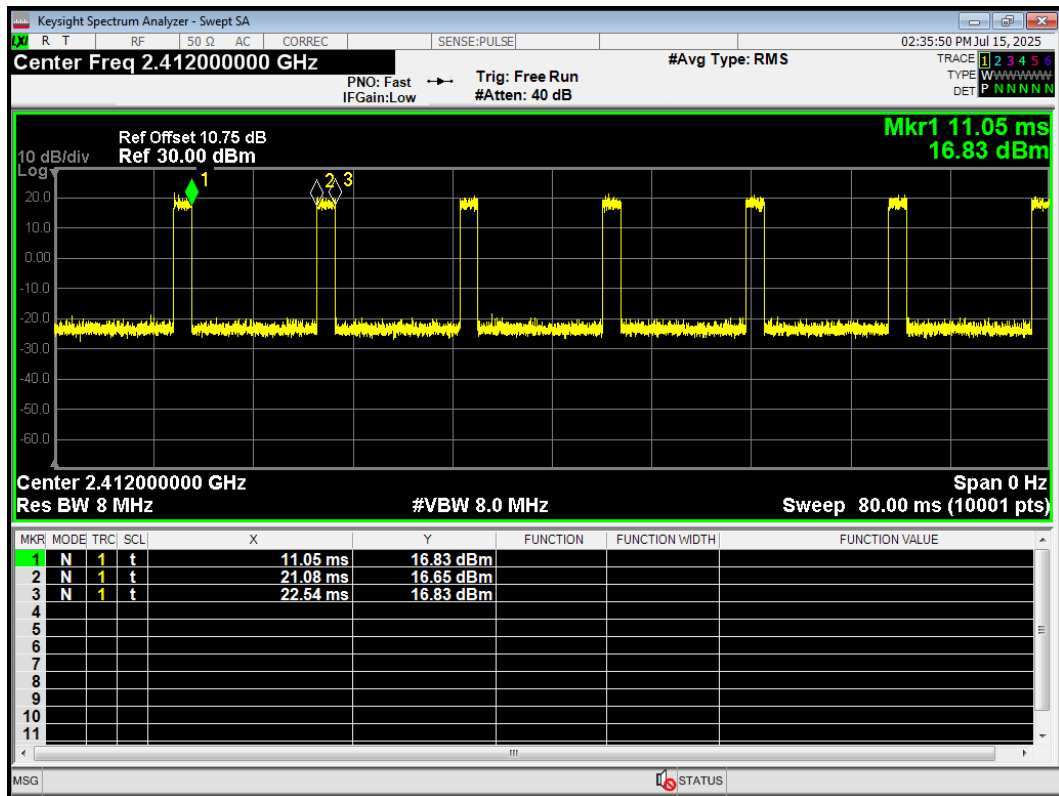


Duty Cycle 802.11ax(HE40) 2422MHz

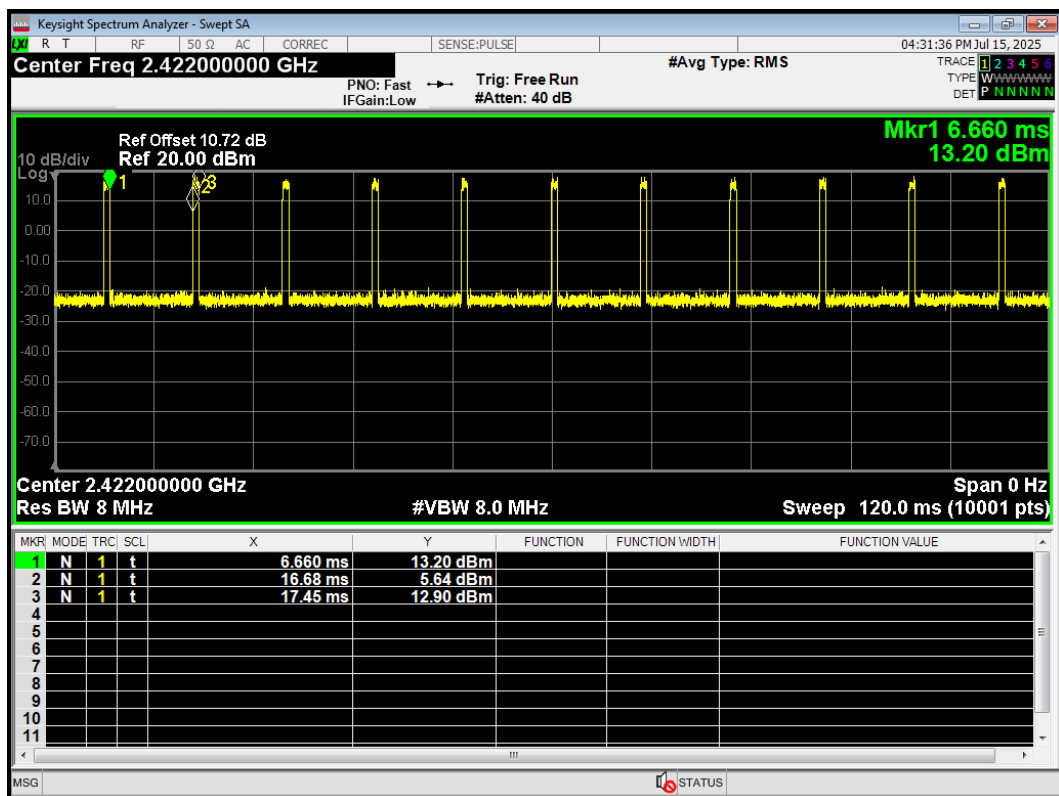


Duty Cycle 802.11b 2412MHz

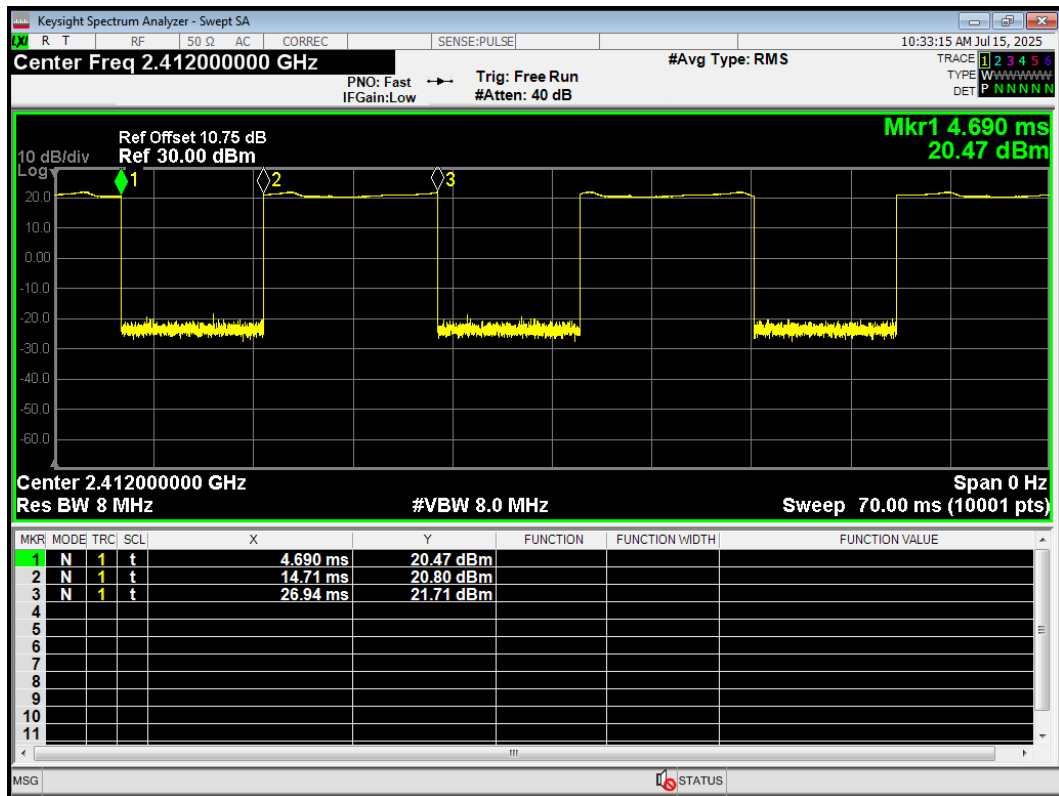


Duty Cycle 802.11g 2412MHz

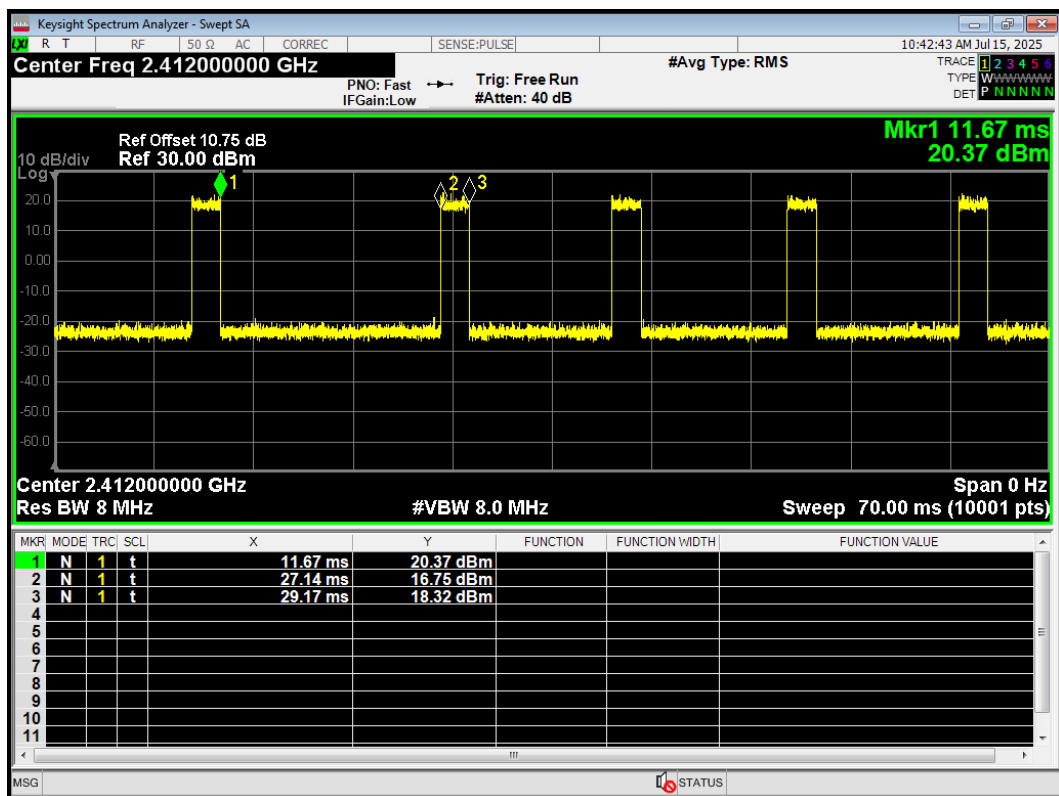


Duty Cycle 802.11n(HT20) 2412MHz

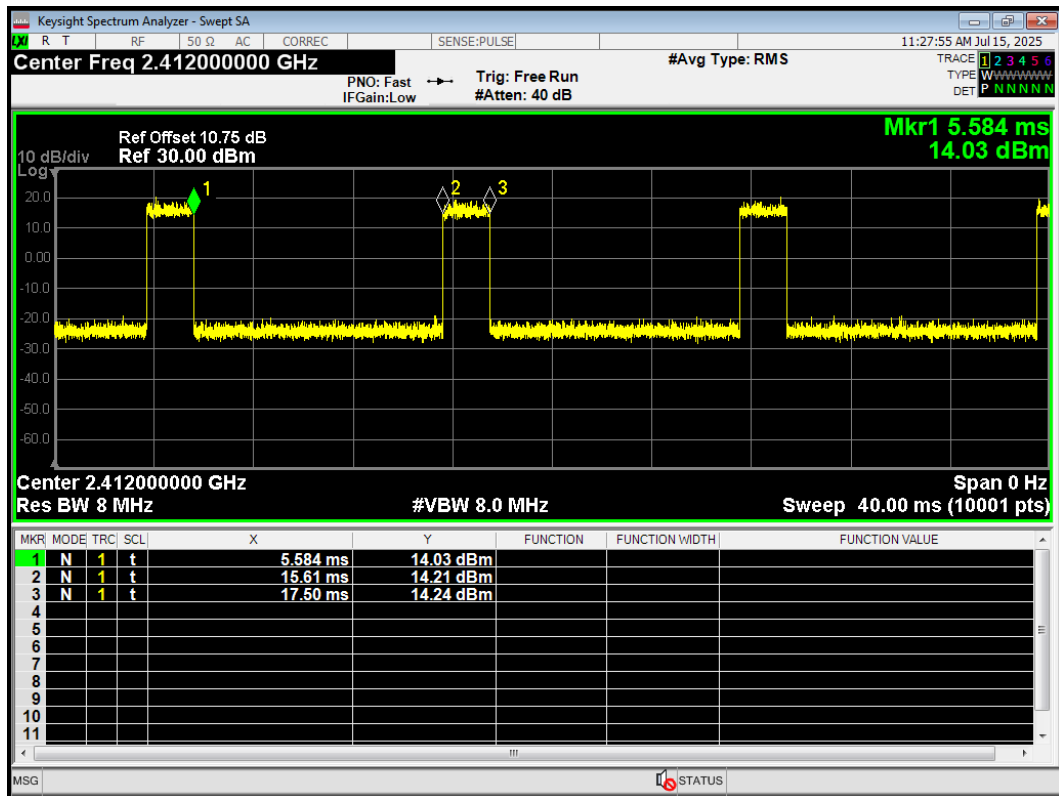


Duty Cycle 802.11n(HT40) 2422MHz

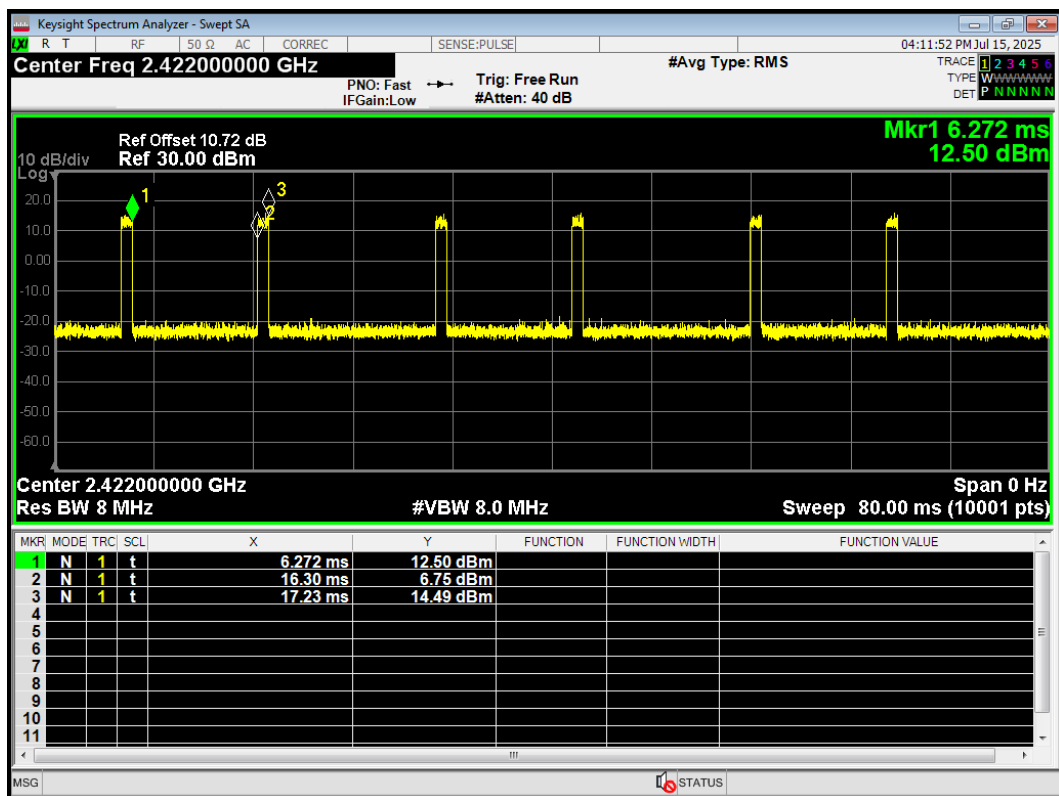

Duty Cycle BLE 2402MHz

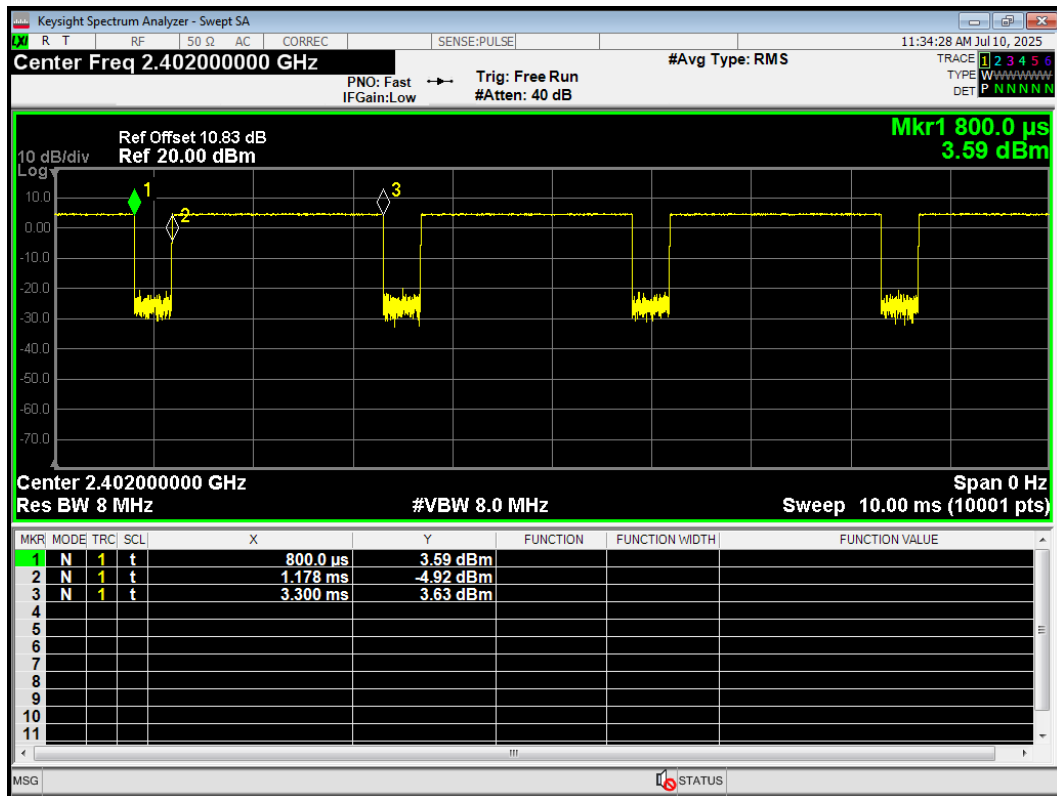

Duty Cycle BT5.0 2404MHz

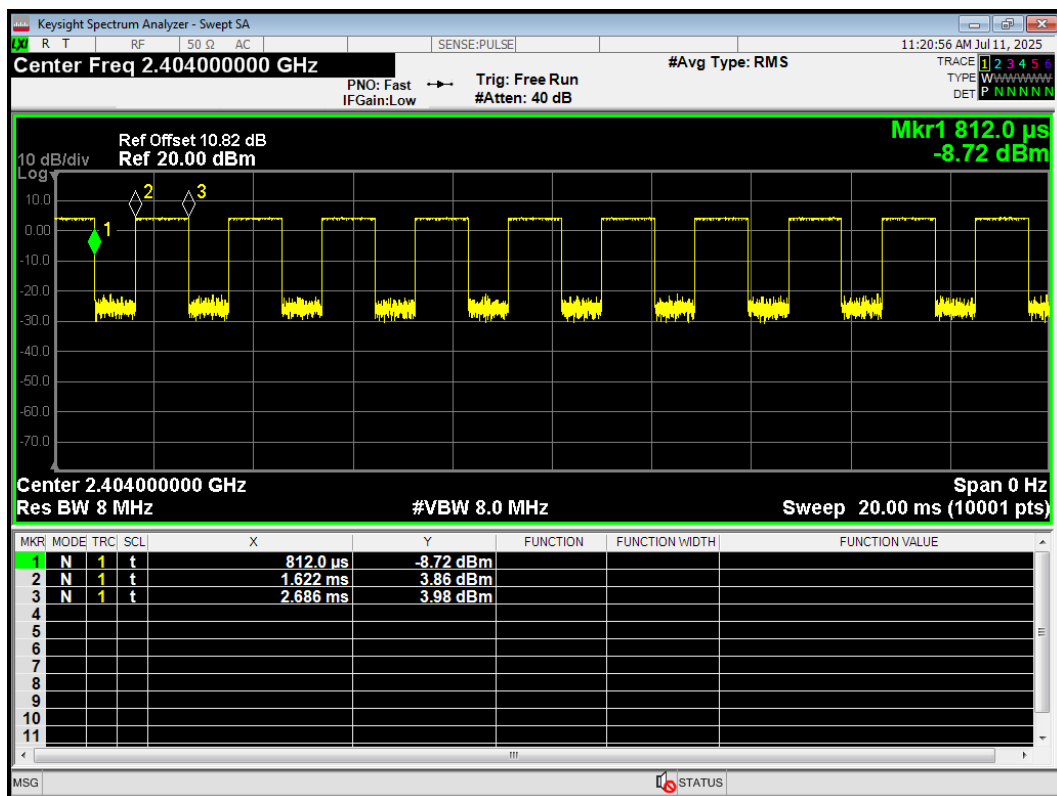

6.2. Maximum output power

Power Index		
Test Mode	Carrier frequency (MHz)/ Channel	TP Set
802.11b	2412/CH 1	Default
	2437/CH 6	Default
	2462/CH11	Default
802.11g	2412/CH 1	Default
	2437/CH 6	Default
	2462/CH11	Default
802.11n HT20	2412/CH 1	15
	2417/CH 2	Default
	2437/CH 6	Default
	2462/CH11	Default
802.11n HT40	2422/CH3	16
	2427/CH4	Default
	2437/CH6	Default
	2452/CH9	Default
802.11ax HE20	2412/CH 1	Default
	2437/CH 6	Default
	2462/CH11	Default
802.11ax HE40	2422/CH3	Default
	2437/CH6	Default
	2452/CH9	Default
Bluetooth (Low Energy) (1M)	2402/CH0	Default
	2440/CH19	Default
	2480/CH39	Default
Bluetooth (Low Energy) (2M)	2402/CH0	Default
	2440/CH19	Default
	2480/CH39	Default

Test Mode	Carrier frequency (MHz)/ Channel	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412/CH 1	14.32	16.92	30	PASS
	2437/CH 6	14.50	17.10	30	PASS
	2462/CH11	14.49	17.09	30	PASS
802.11g	2412/CH 1	7.09	16.45	30	PASS
	2437/CH 6	8.07	17.43	30	PASS
	2462/CH11	8.12	17.48	30	PASS
802.11n HT20	2412/CH 1	3.02	11.01	30	PASS
	2417/CH 2	6.46	14.45	30	PASS
	2437/CH 6	7.19	15.18	30	PASS
	2462/CH11	6.16	14.15	30	PASS
802.11n HT40	2422/CH3	3.20	13.92	30	PASS
	2427/CH4	4.21	14.93	30	PASS
	2437/CH6	5.00	15.72	30	PASS
	2452/CH9	4.20	14.92	30	PASS
802.11ax HE20	2412/CH 1	6.96	15.91	30	PASS
	2437/CH 6	5.80	14.75	30	PASS
	2462/CH11	5.75	14.70	30	PASS
802.11ax HE40	2422/CH3	3.23	14.71	30	PASS
	2437/CH6	4.37	15.85	30	PASS
	2452/CH9	3.71	15.19	30	PASS
Bluetooth (Low Energy) (1M)	2402/CH0	3.45	4.16	30	PASS
	2440/CH19	3.68	4.39	30	PASS
	2480/CH39	3.86	4.57	30	PASS
Bluetooth (Low Energy) (2M)	2402/CH0	1.56	4.02	30	PASS
	2440/CH19	1.79	4.25	30	PASS
	2480/CH39	2.17	4.63	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					


6.3. 99% Bandwidth and 6dB Bandwidth

Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	13.407	10.059	500	Pass
802.11b	2437	13.650	10.088	500	Pass
802.11b	2462	13.829	10.100	500	Pass
802.11g	2412	16.783	16.200	500	Pass
802.11g	2437	16.895	16.315	500	Pass
802.11g	2462	16.872	16.306	500	Pass
802.11n(HT20)	2412	17.949	17.257	500	Pass
802.11n(HT20)	2417	17.923	17.264	500	Pass
802.11n(HT20)	2437	17.861	17.469	500	Pass
802.11n(HT20)	2462	17.864	17.453	500	Pass
802.11n(HT40)	2422	36.360	36.059	500	Pass
802.11n(HT40)	2427	36.253	35.917	500	Pass
802.11n(HT40)	2437	36.173	36.080	500	Pass
802.11n(HT40)	2452	36.230	35.846	500	Pass
802.11ax(HE20)	2412	18.943	18.883	500	Pass
802.11ax(HE20)	2437	19.102	18.742	500	Pass
802.11ax(HE20)	2462	18.988	18.747	500	Pass
802.11ax(HE40)	2422	37.826	37.730	500	Pass
802.11ax(HE40)	2437	37.756	37.419	500	Pass
802.11ax(HE40)	2452	37.812	37.272	500	Pass


Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
Bluetooth (1M)	2402	1.030	0.667	500	Pass
Bluetooth (1M)	2440	1.029	0.690	500	Pass
Bluetooth (1M)	2480	1.030	0.658	500	Pass
Bluetooth (2M)	2402	2.067	1.213	500	Pass
Bluetooth (2M)	2440	2.080	1.240	500	Pass
Bluetooth (2M)	2480	2.072	1.212	500	Pass

99%bandwidth


OBW 802.11ax(HE20) 2412MHz

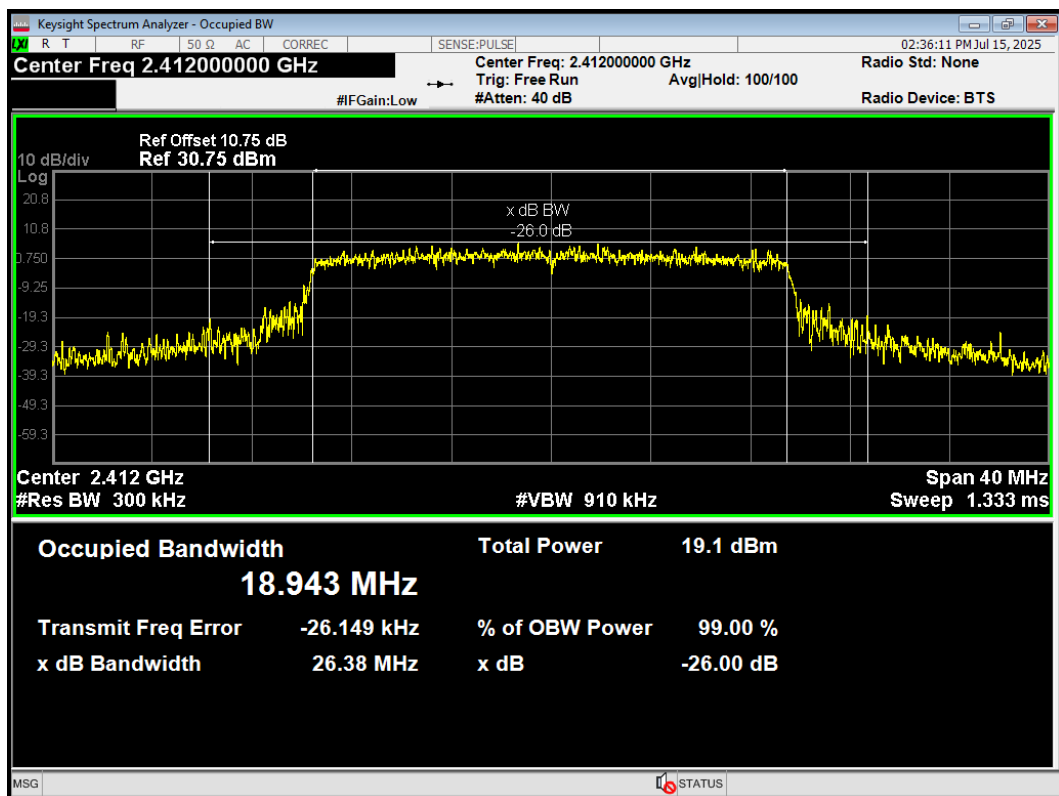


OBW 802.11ax(HE20) 2437MHz

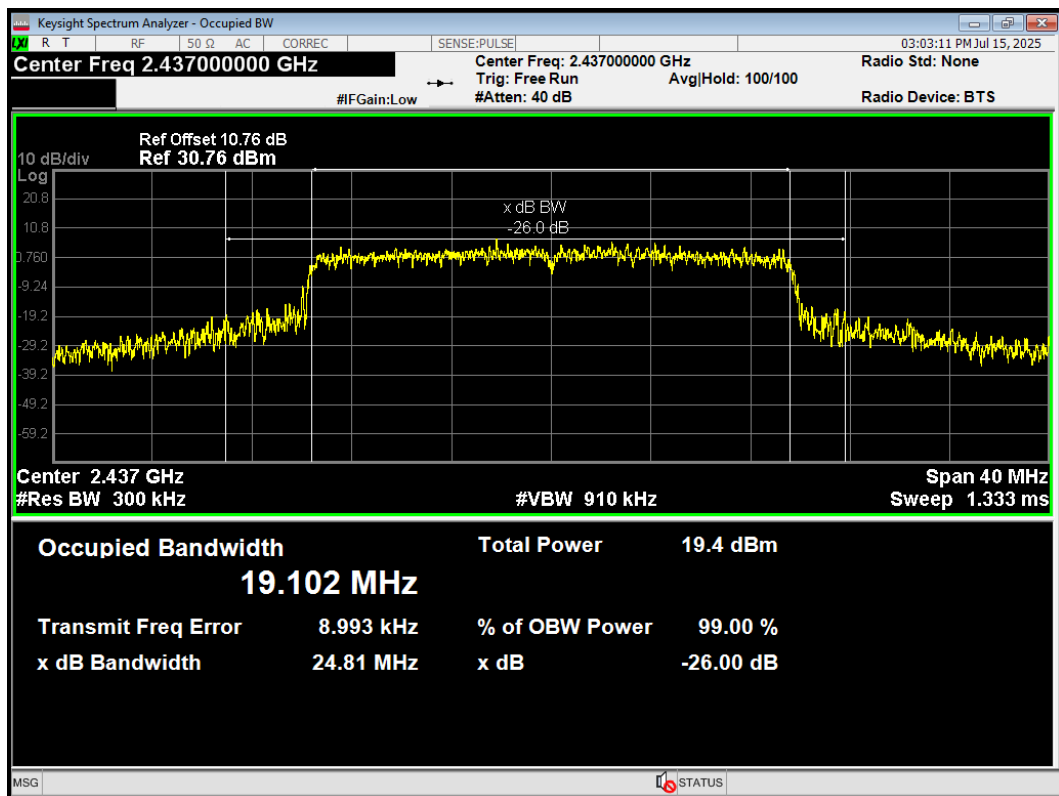


OBW 802.11ax(HE20) 2462MHz

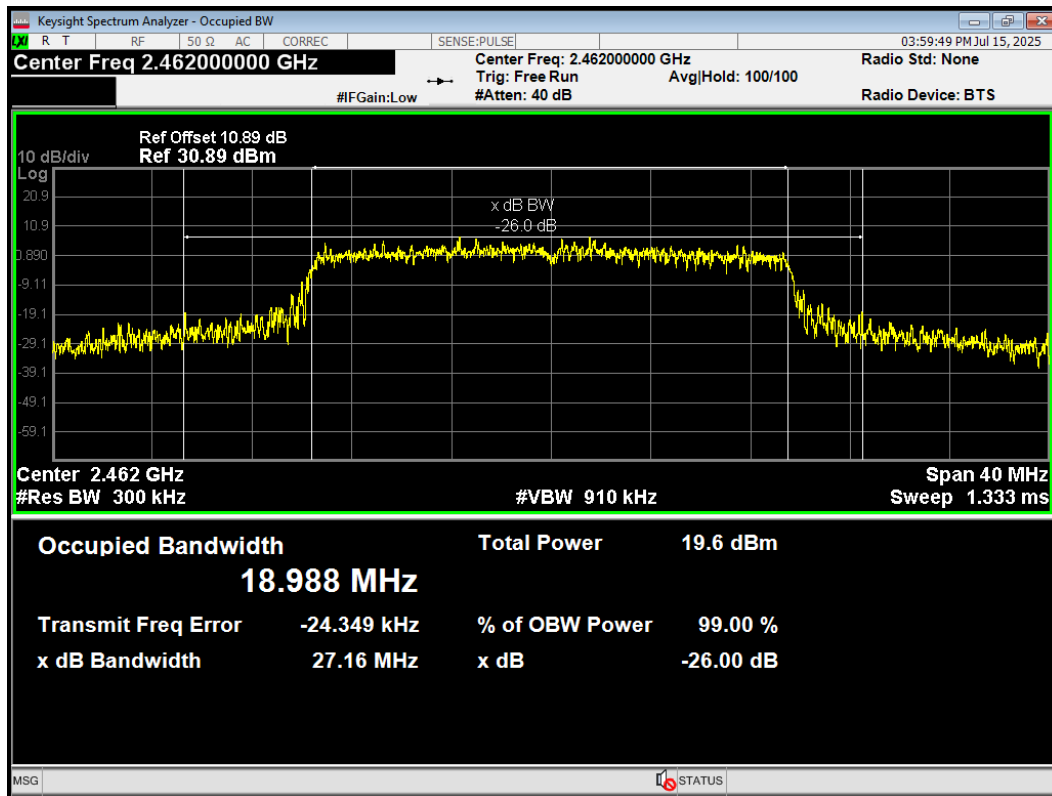


OBW 802.11ax(HE40) 2422MHz

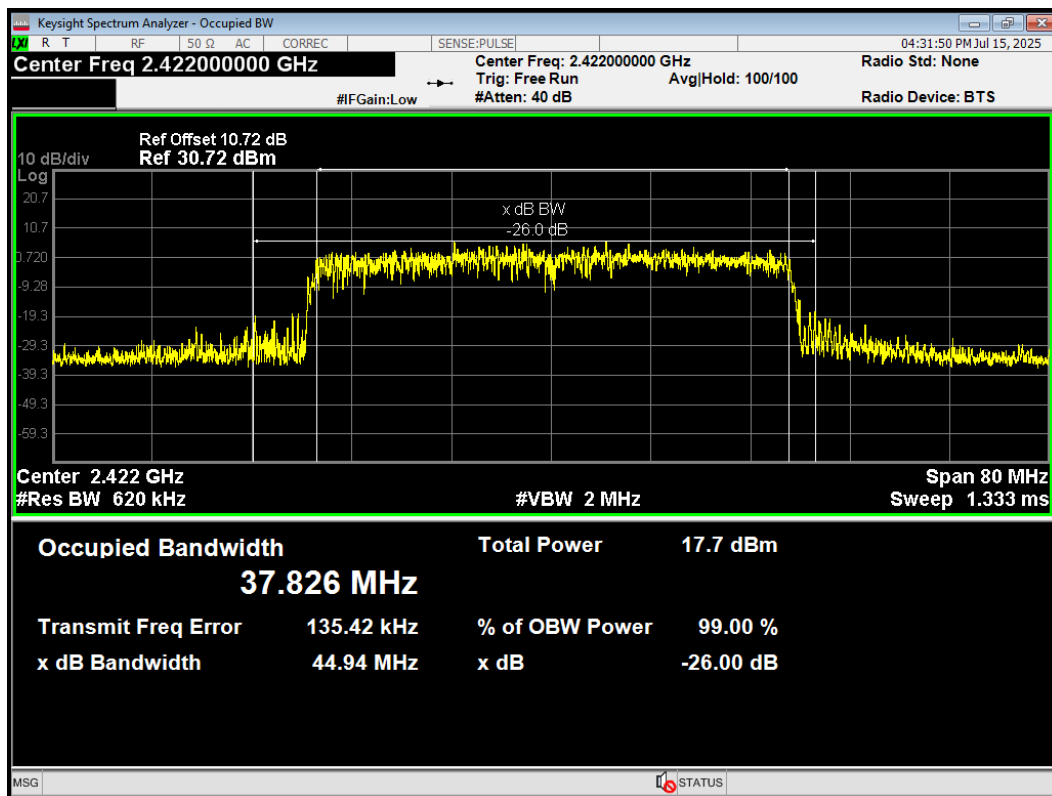


OBW 802.11ax(HE40) 2437MHz

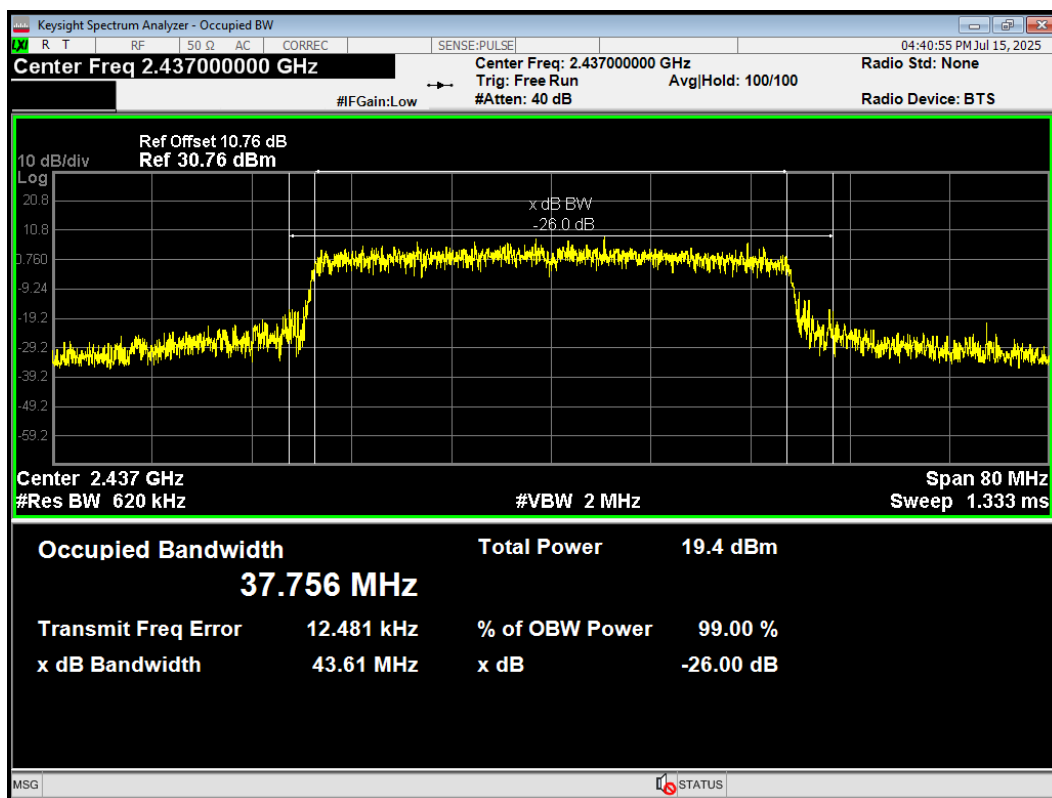


OBW 802.11ax(HE40) 2452MHz

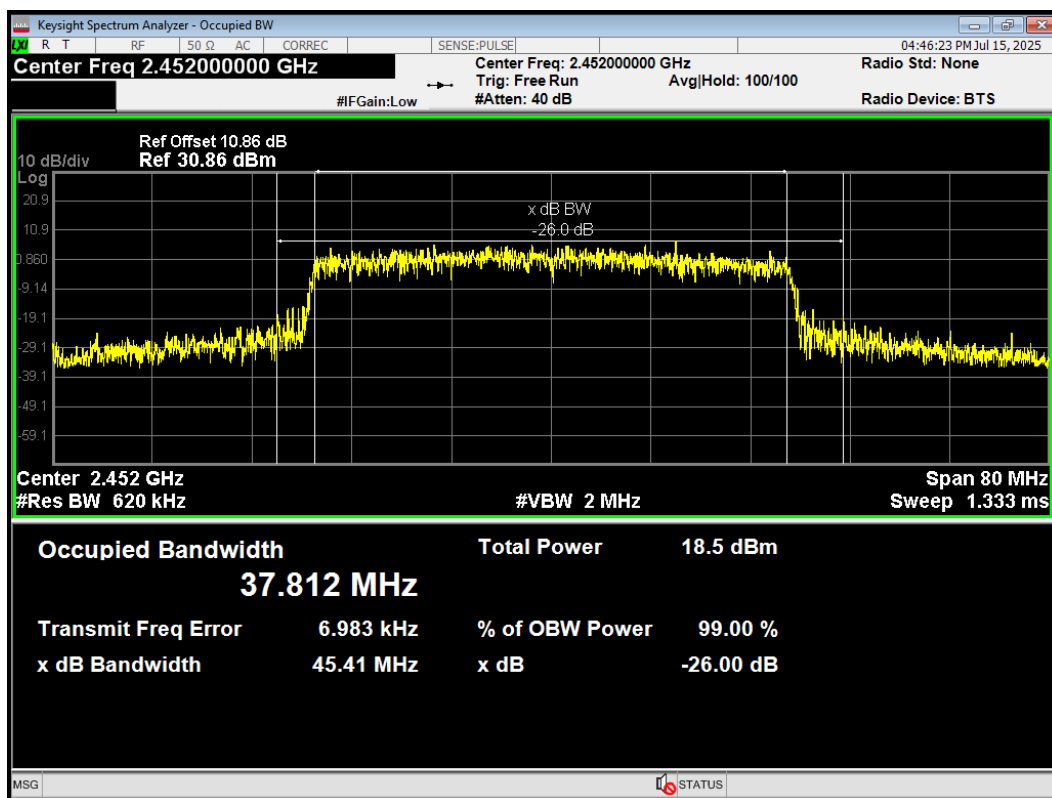


OBW 802.11b 2412MHz

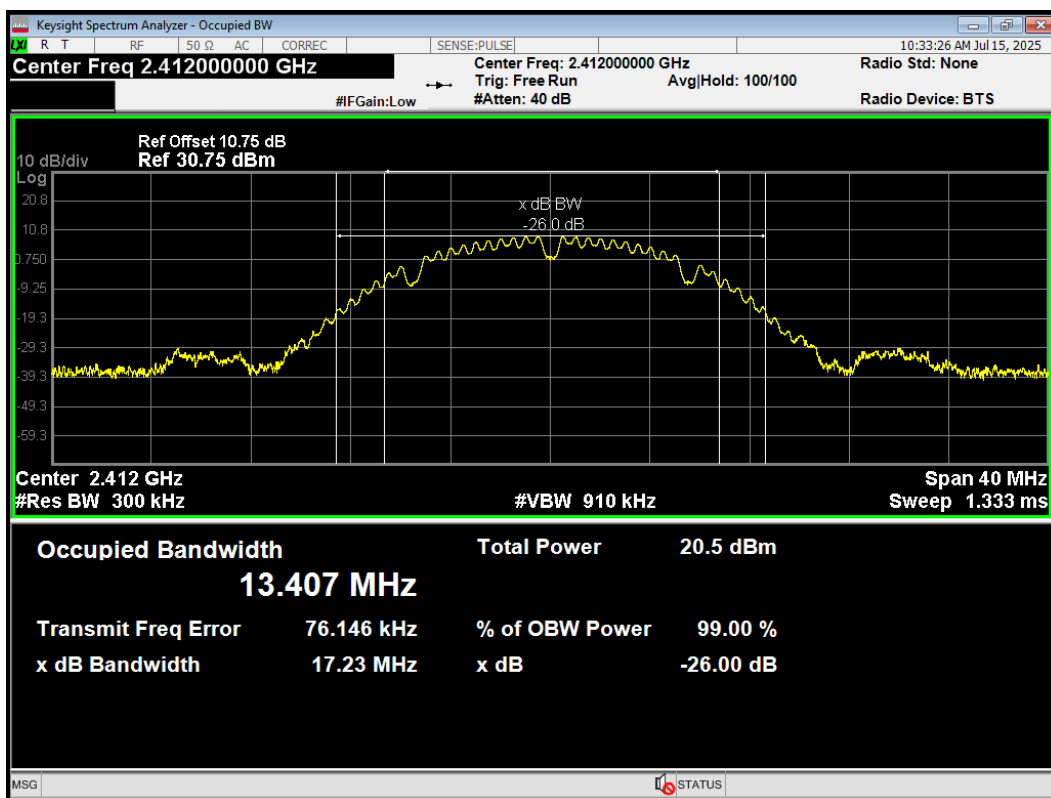


OBW 802.11b 2437MHz

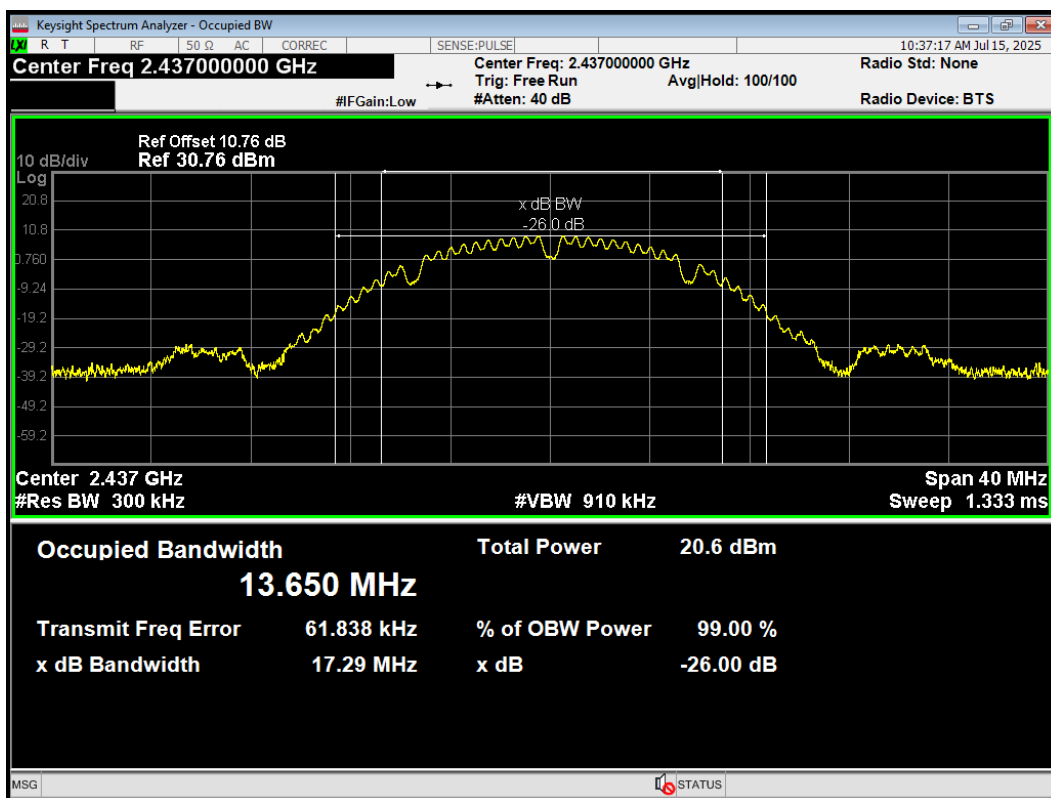


OBW 802.11b 2462MHz

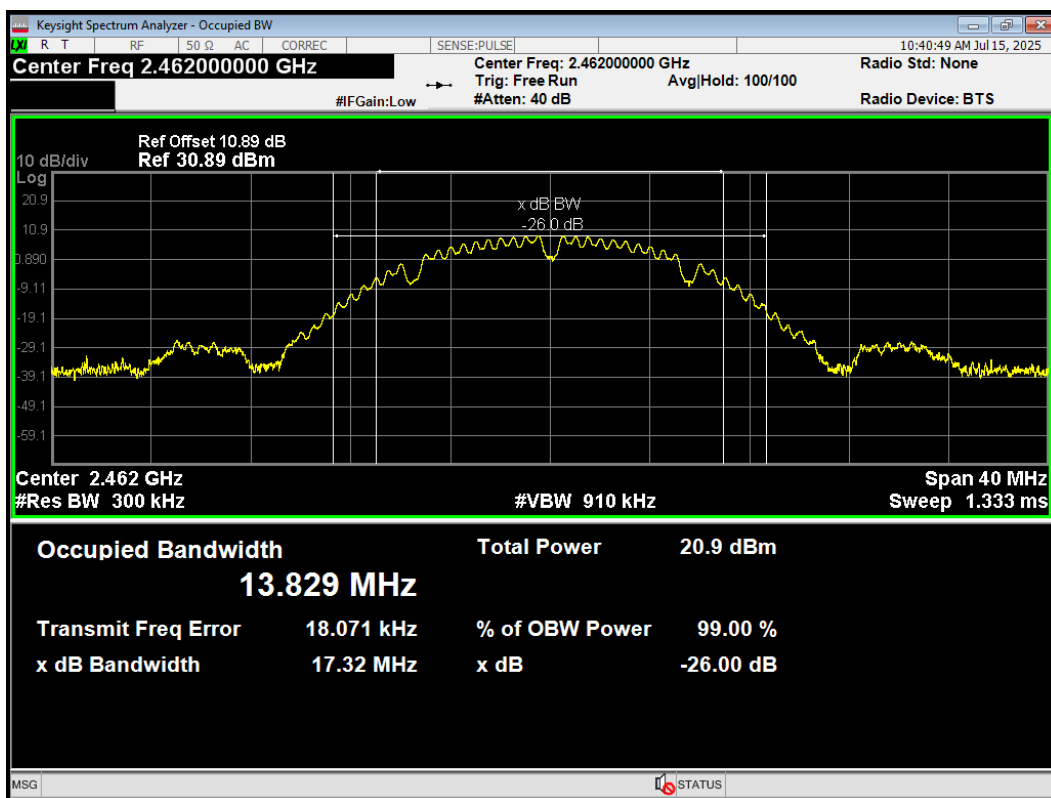


OBW 802.11g 2412MHz

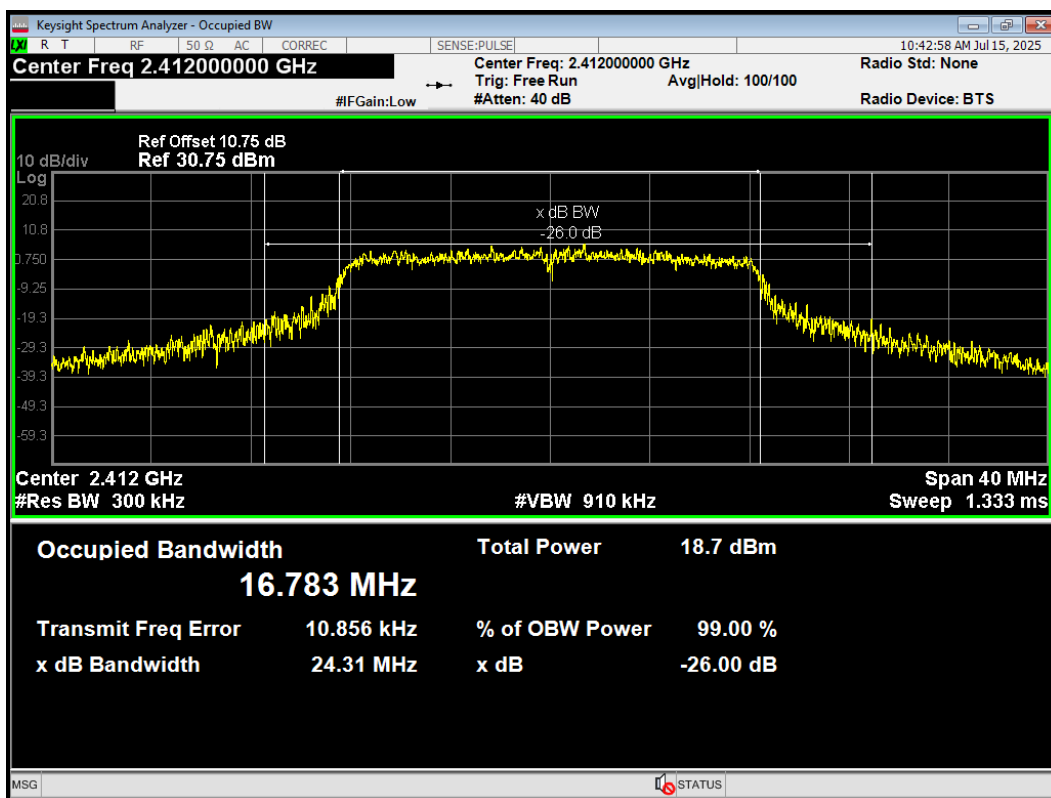


OBW 802.11g 2437MHz

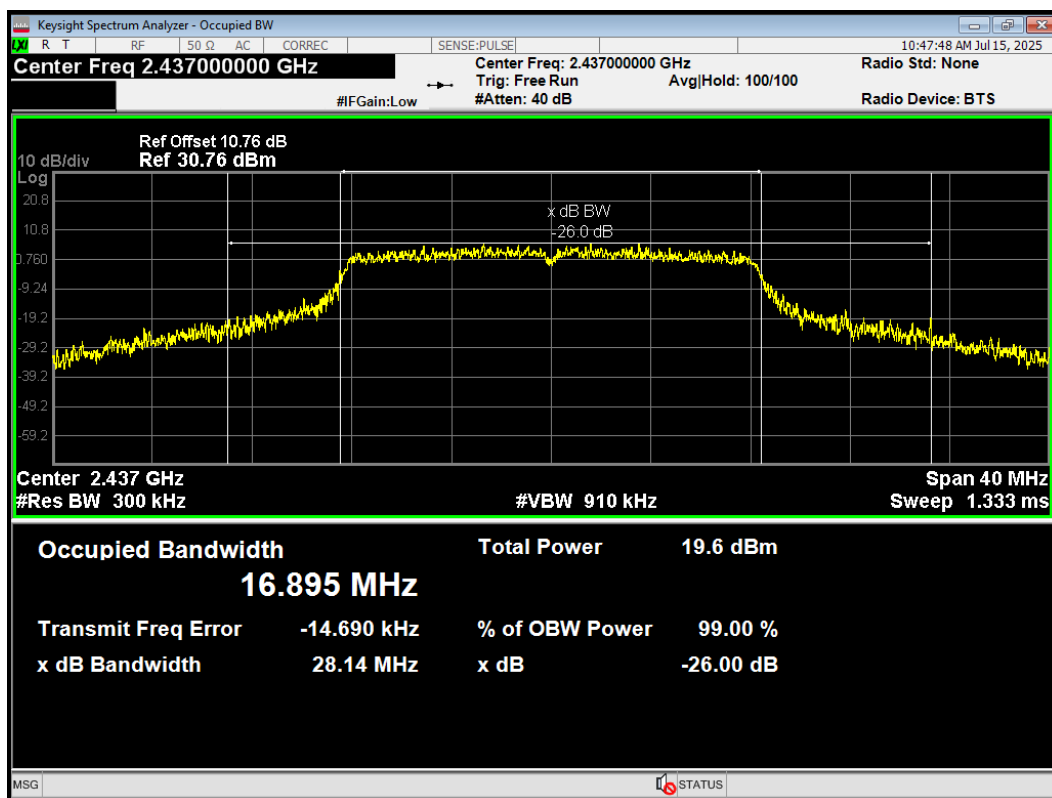


OBW 802.11g 2462MHz

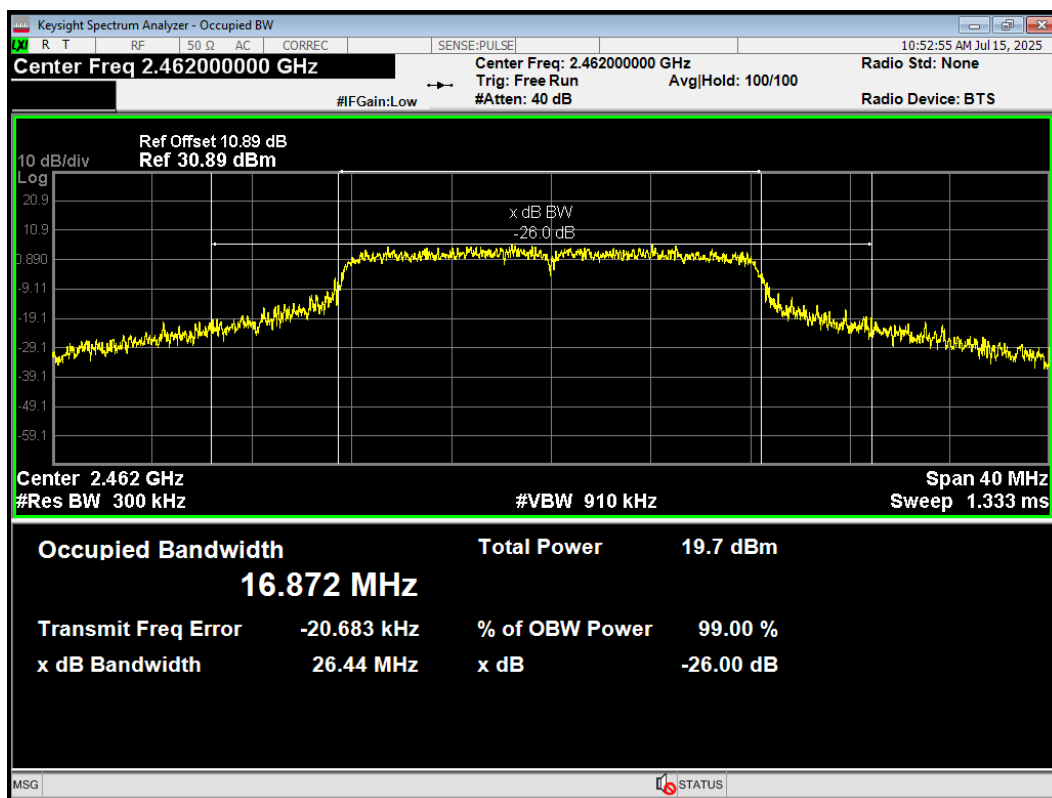


OBW 802.11n(HT20) 2412MHz

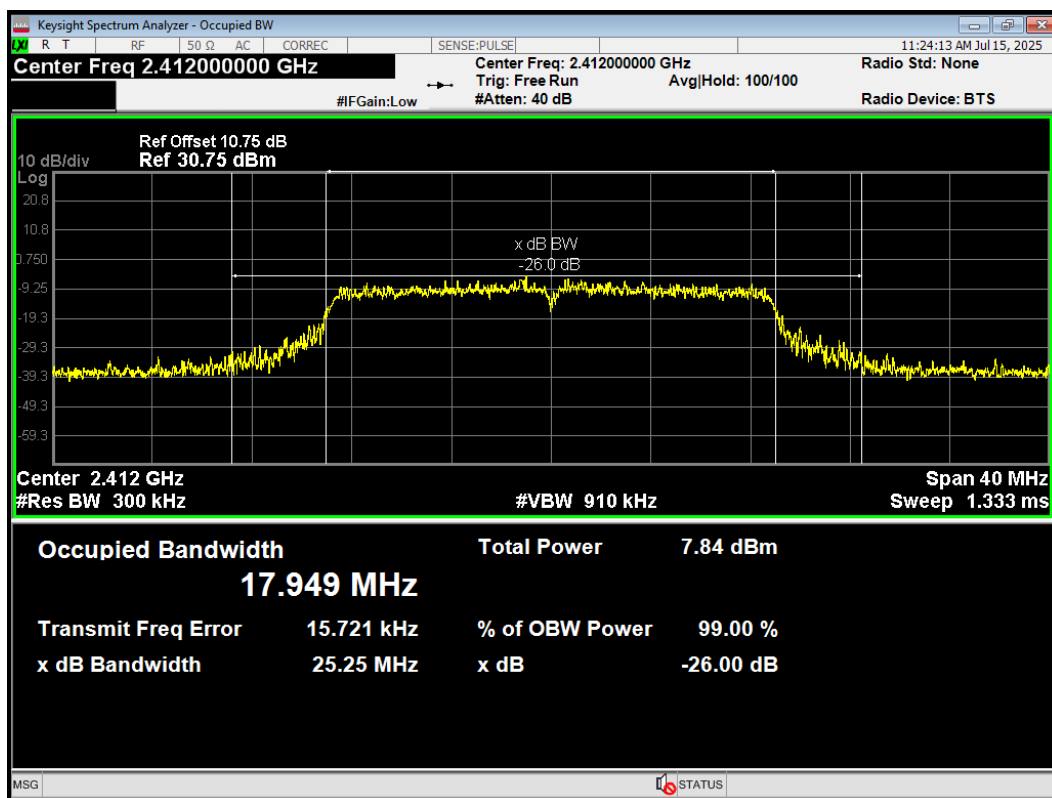


OBW 802.11n(HT20) 2417MHz

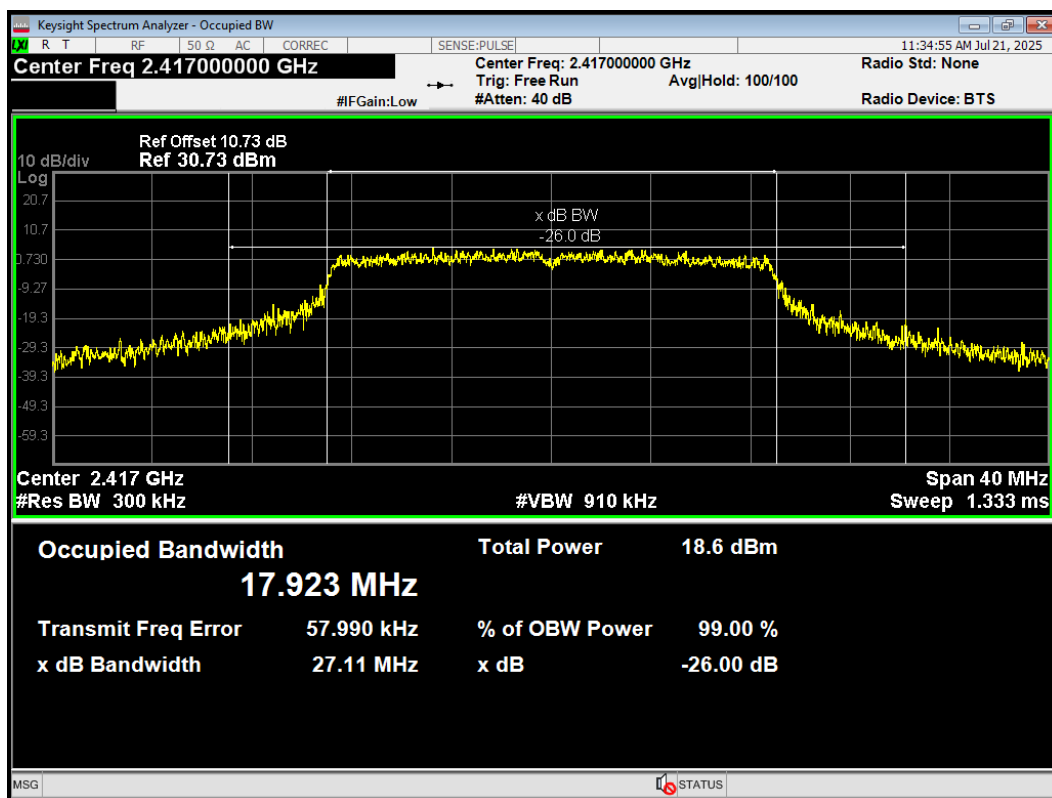


OBW 802.11n(HT20) 2437MHz

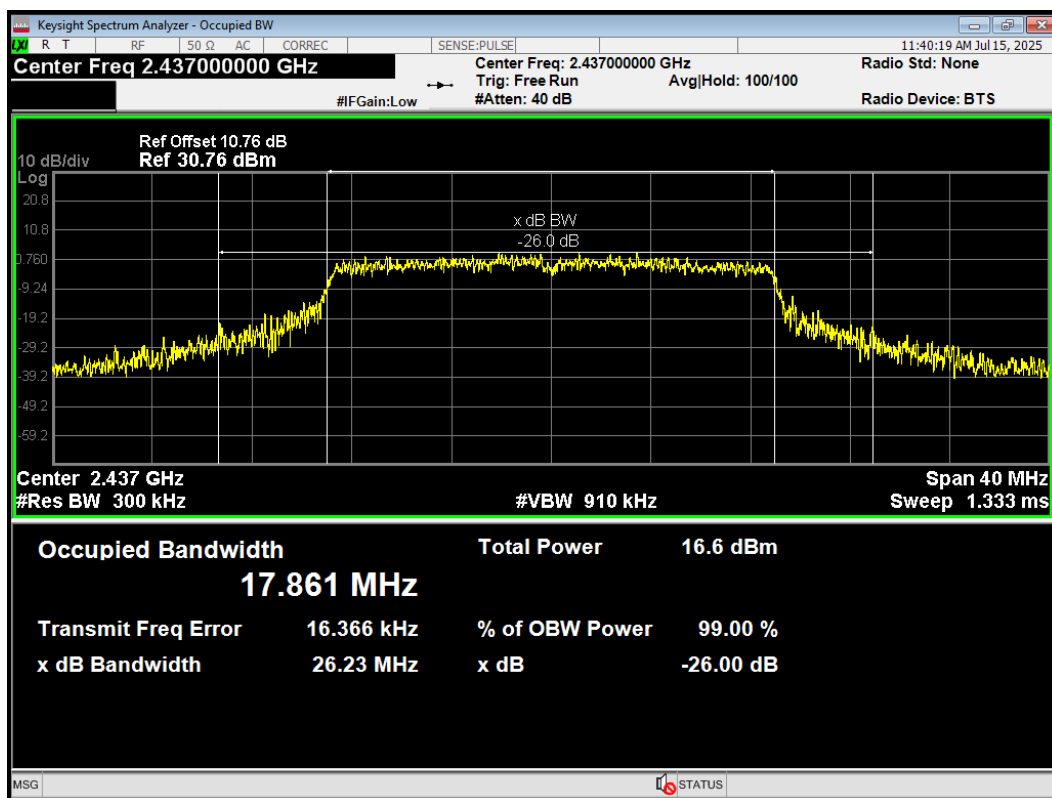


OBW 802.11n(HT20) 2462MHz

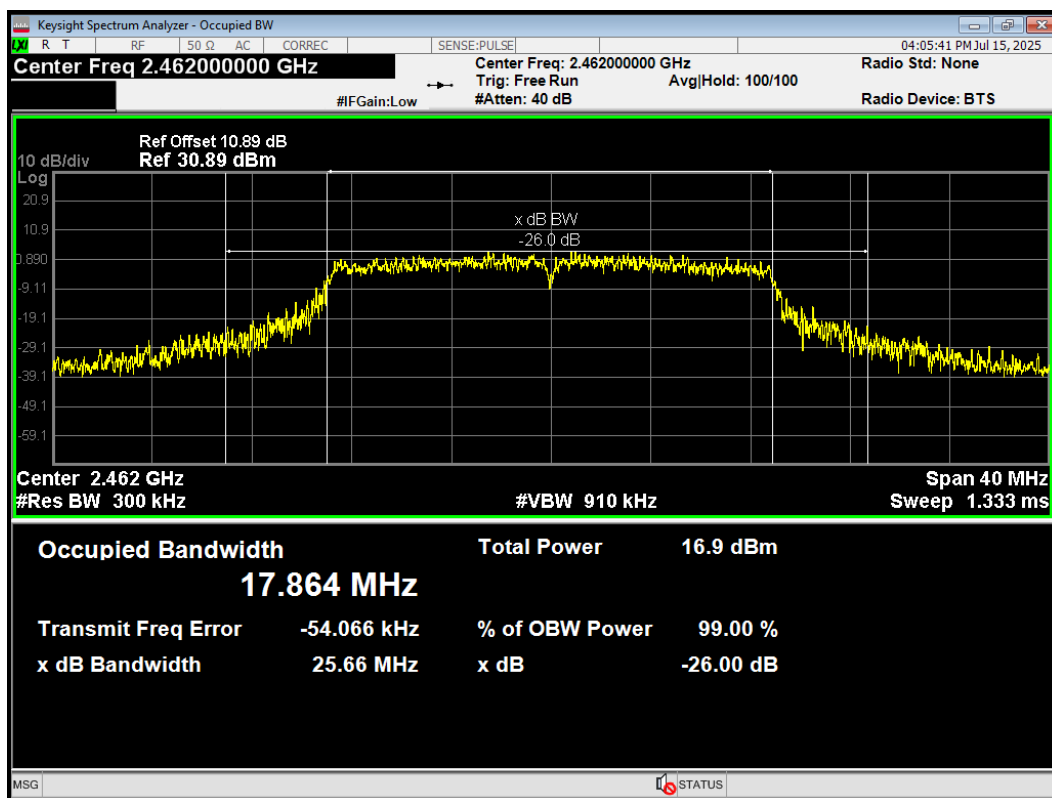


OBW 802.11n(HT40) 2422MHz

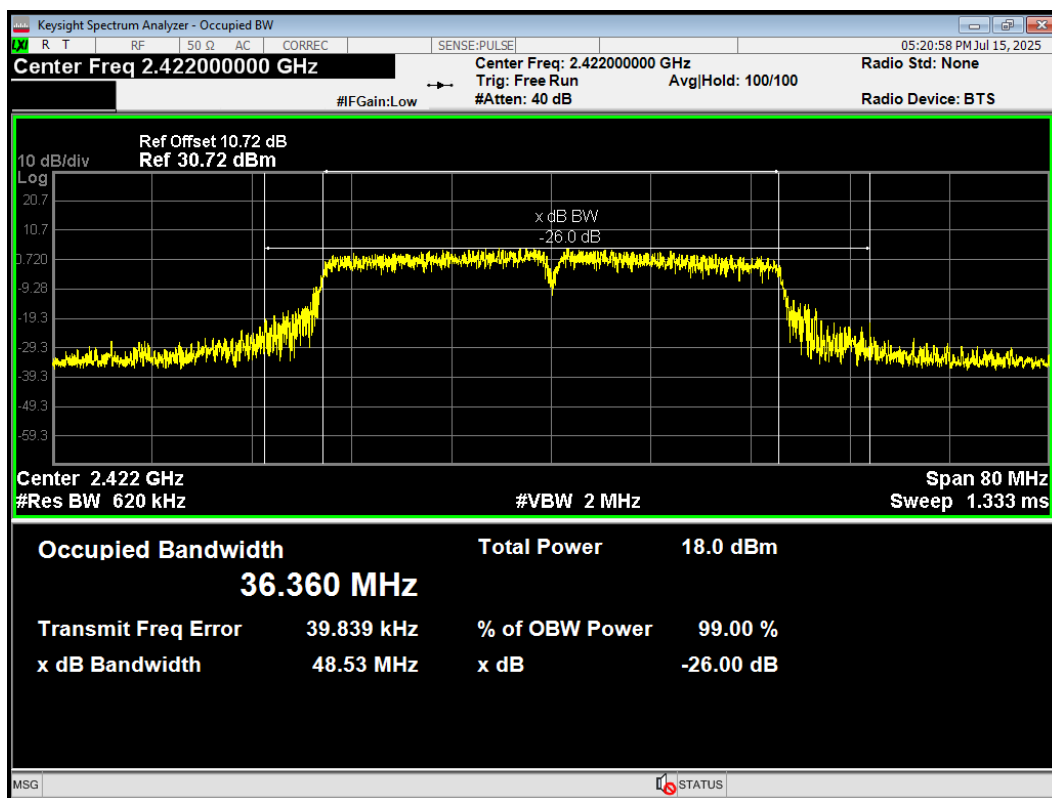


OBW 802.11n(HT40) 2427MHz

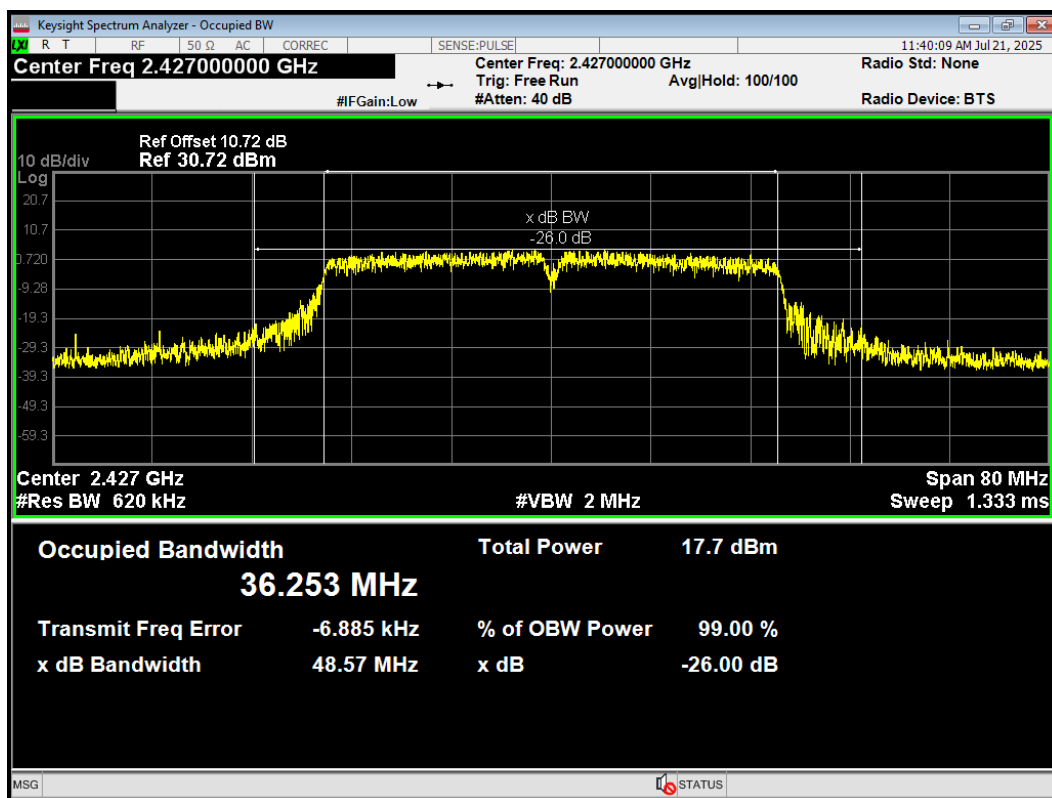


OBW 802.11n(HT40) 2437MHz

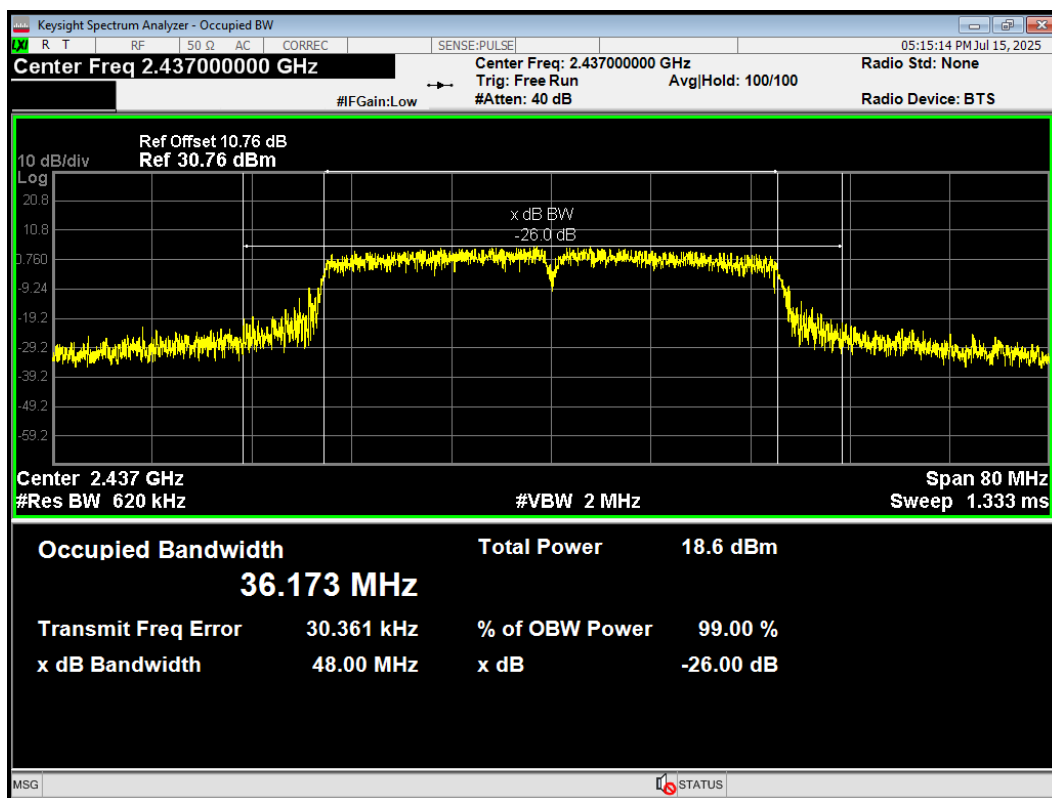


OBW 802.11n(HT40) 2452MHz

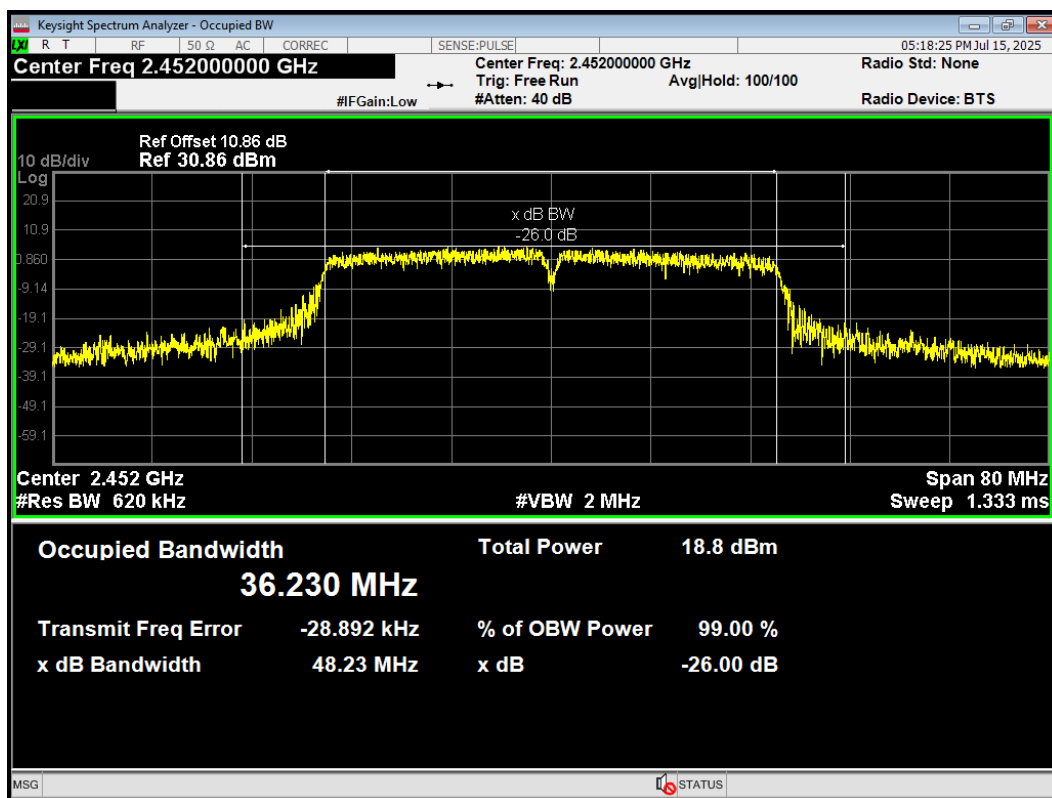


OBW Bluetooth (1M) 2402MHz

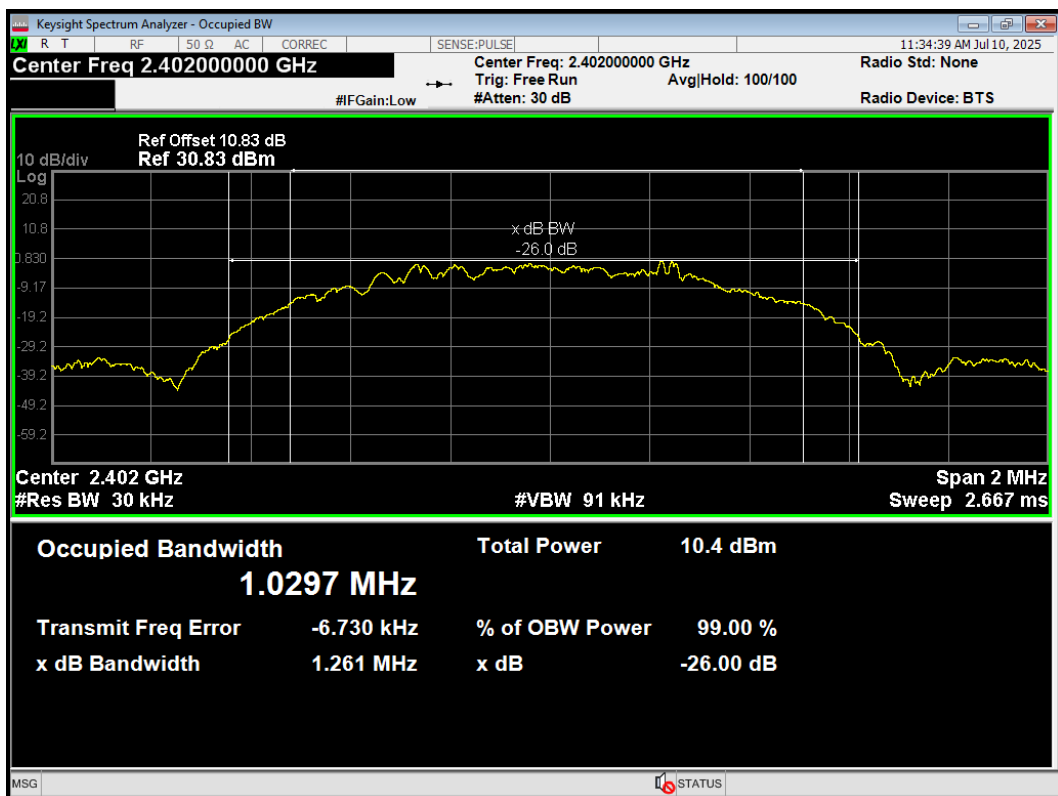


OBW Bluetooth (1M) 2440MHz

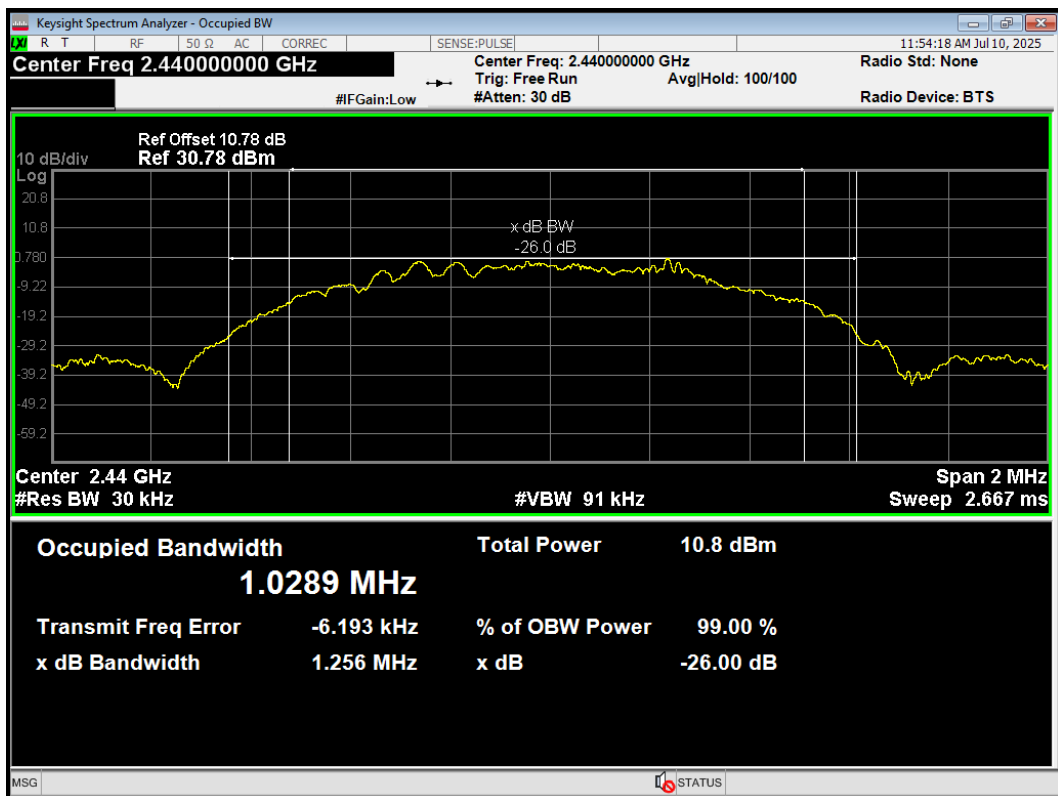


OBW Bluetooth (1M) 2480MHz

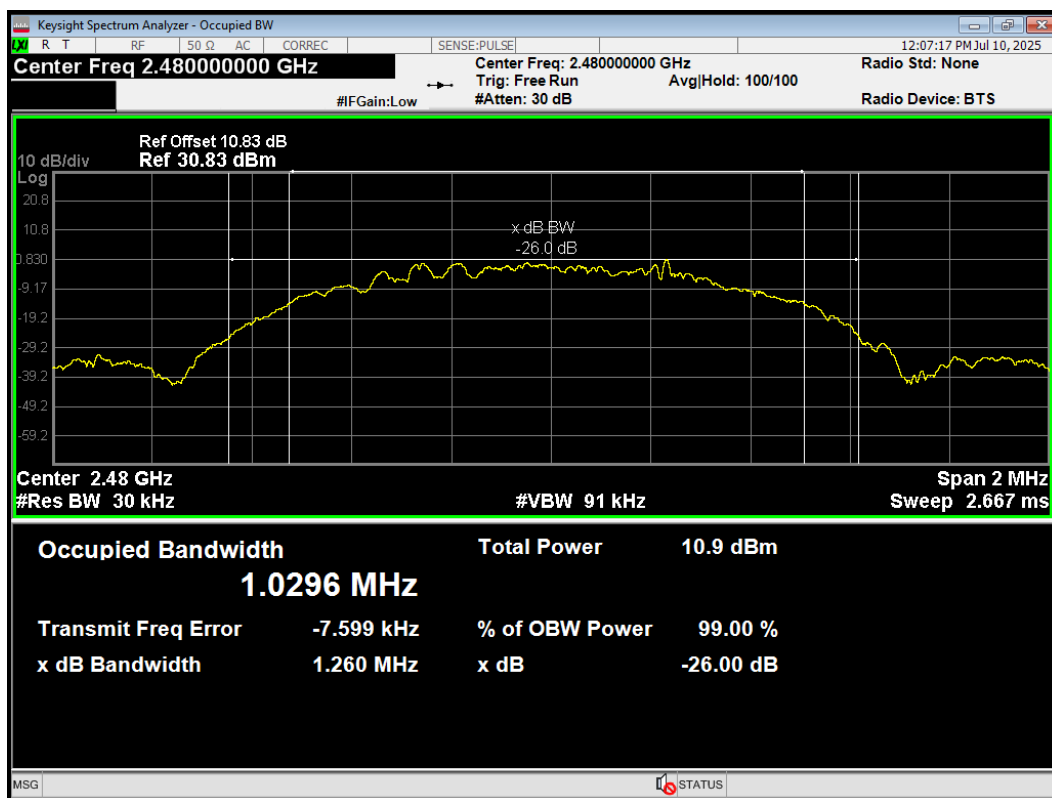


OBW Bluetooth (2M) 2402MHz

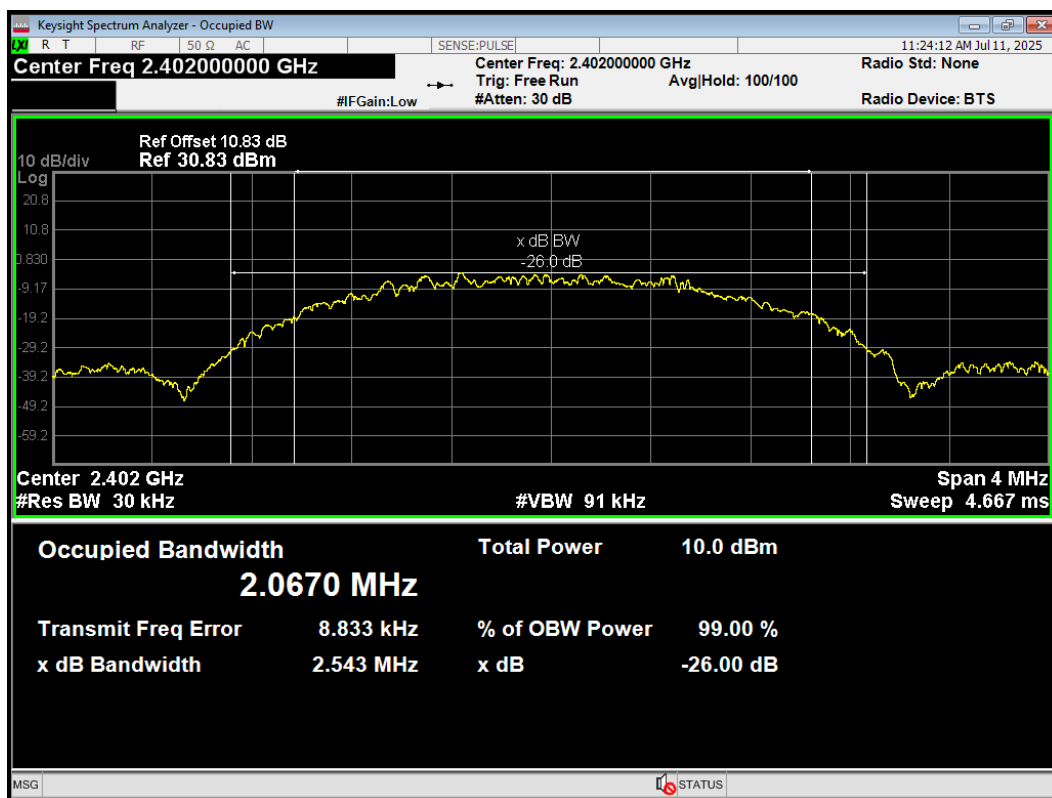

OBW Bluetooth (2M) 2440MHz

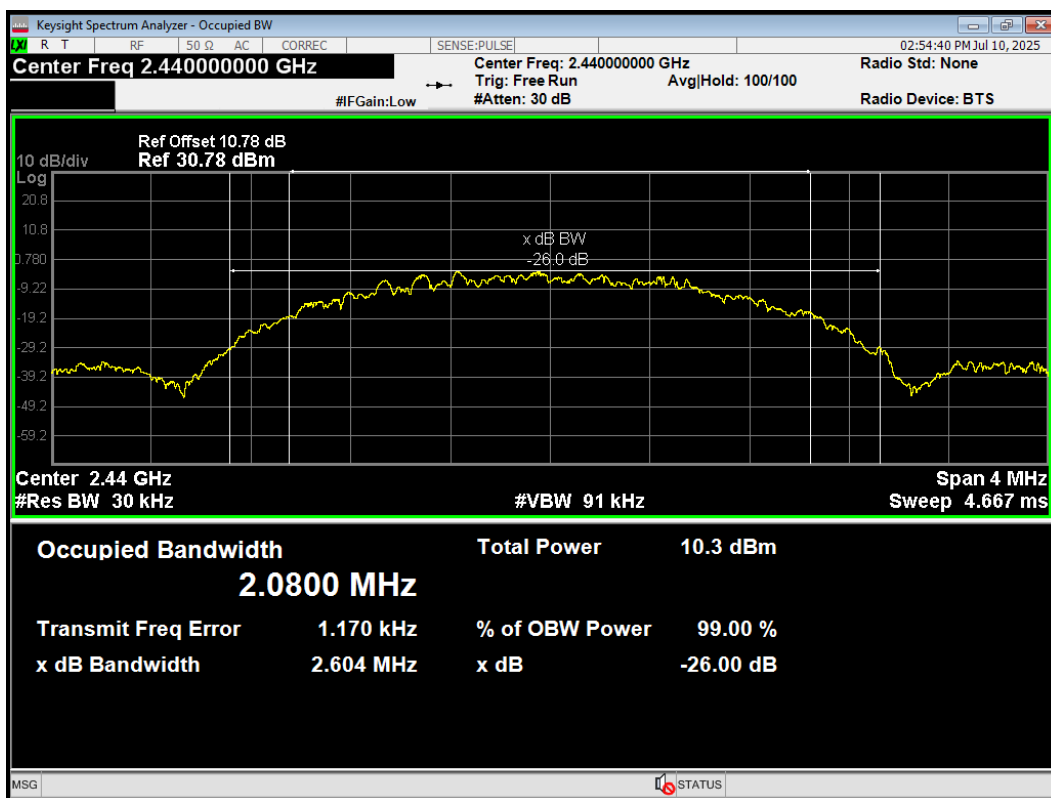


OBW Bluetooth (2M) 2480MHz

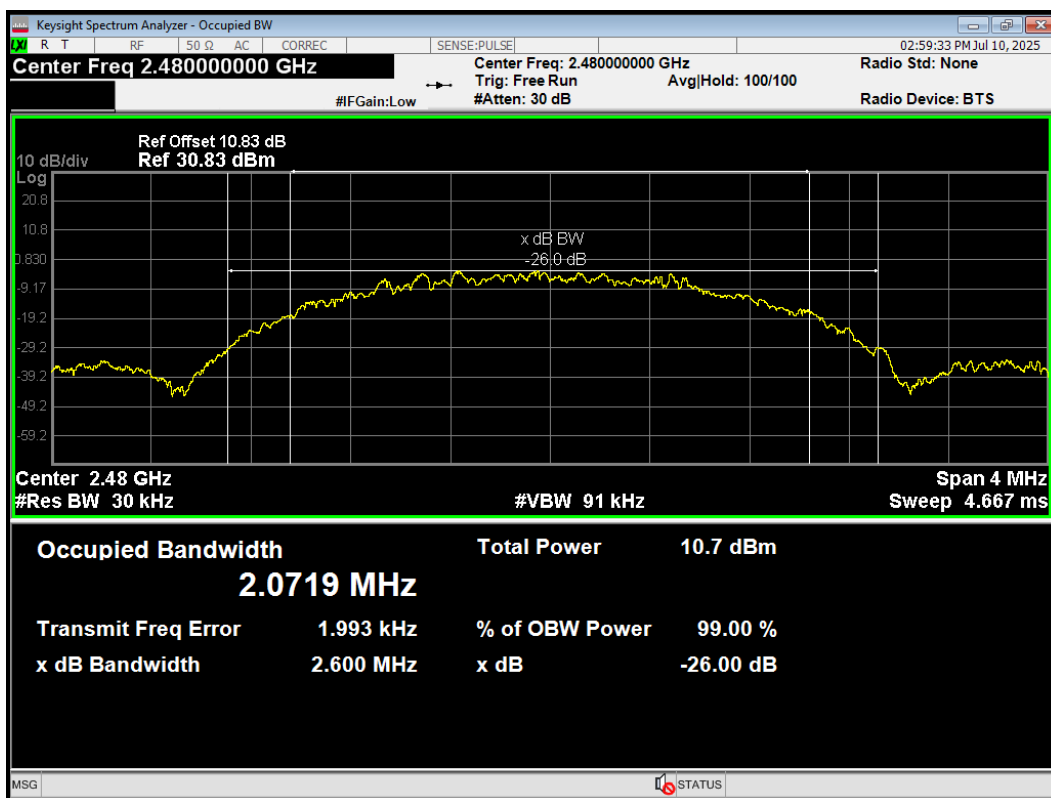


6 dB bandwidth


-6dB Bandwidth 802.11ax(HE20) 2412MHz

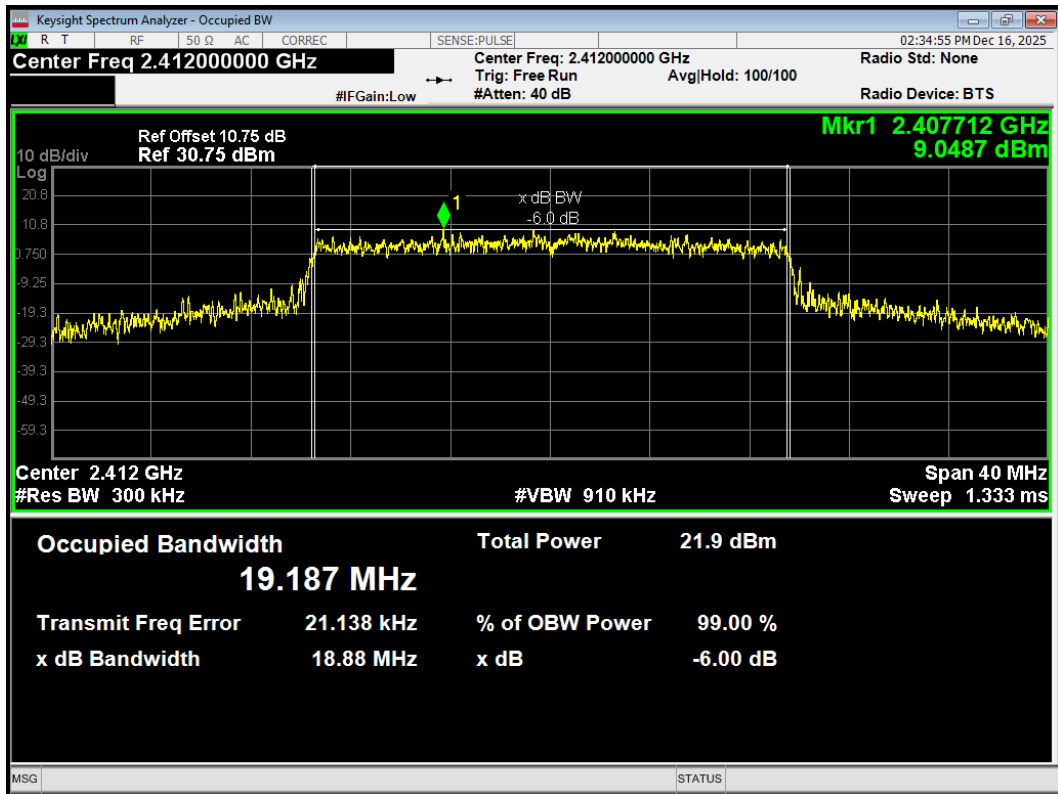


-6dB Bandwidth 802.11ax(HE20) 2437MHz

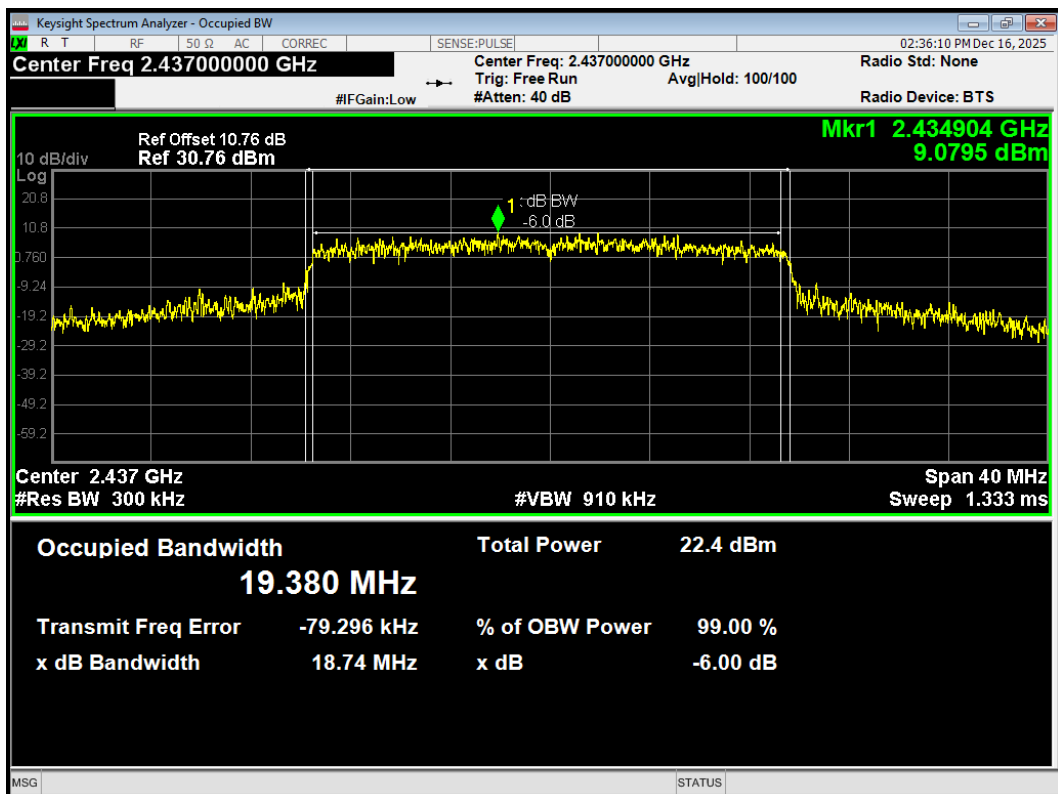


-6dB Bandwidth 802.11ax(HE20) 2462MHz

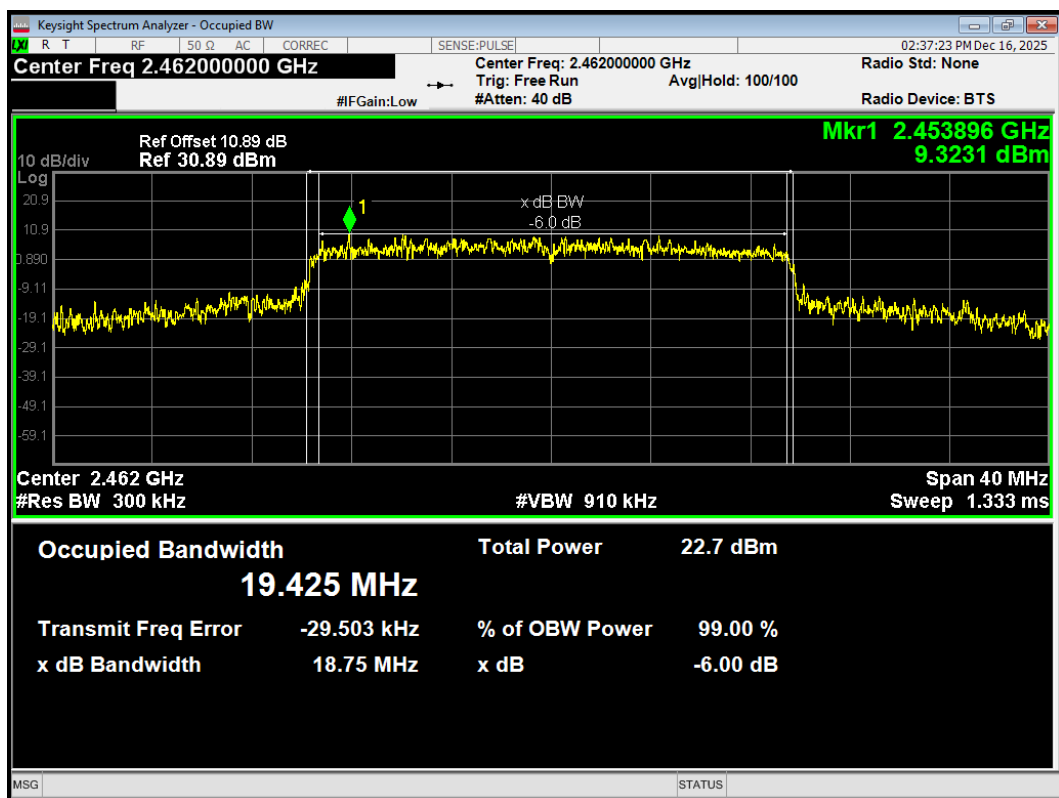


-6dB Bandwidth 802.11ax(HE40) 2422MHz

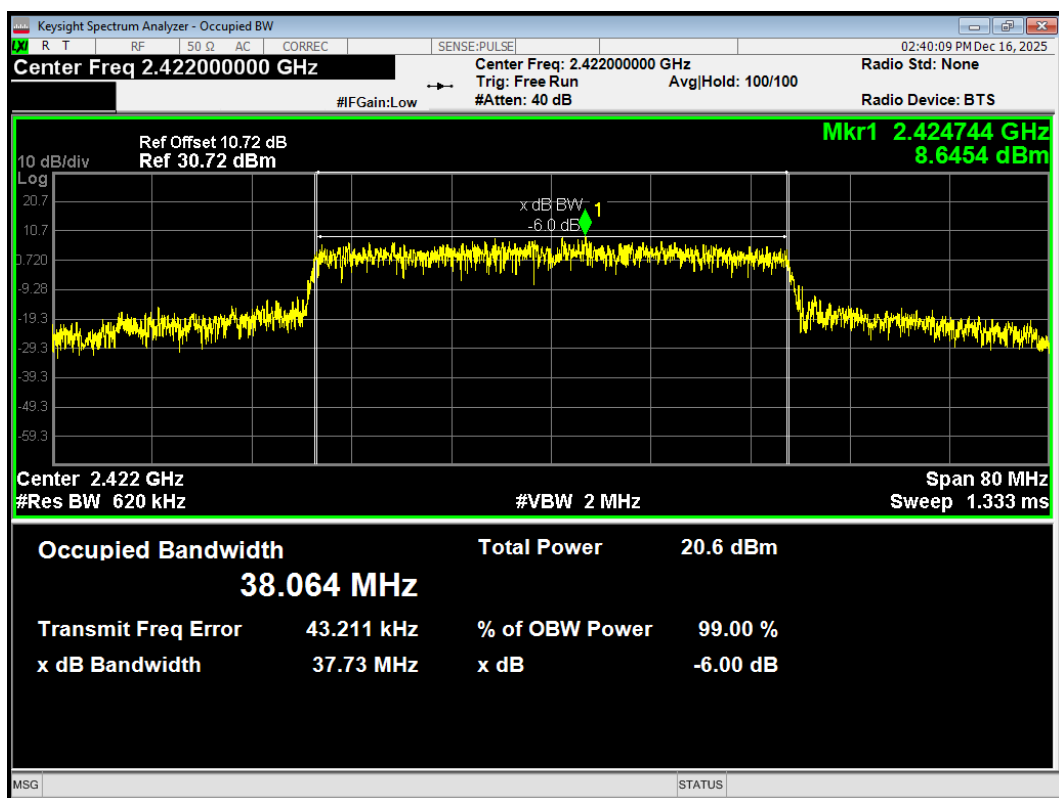


-6dB Bandwidth 802.11ax(HE40) 2437MHz

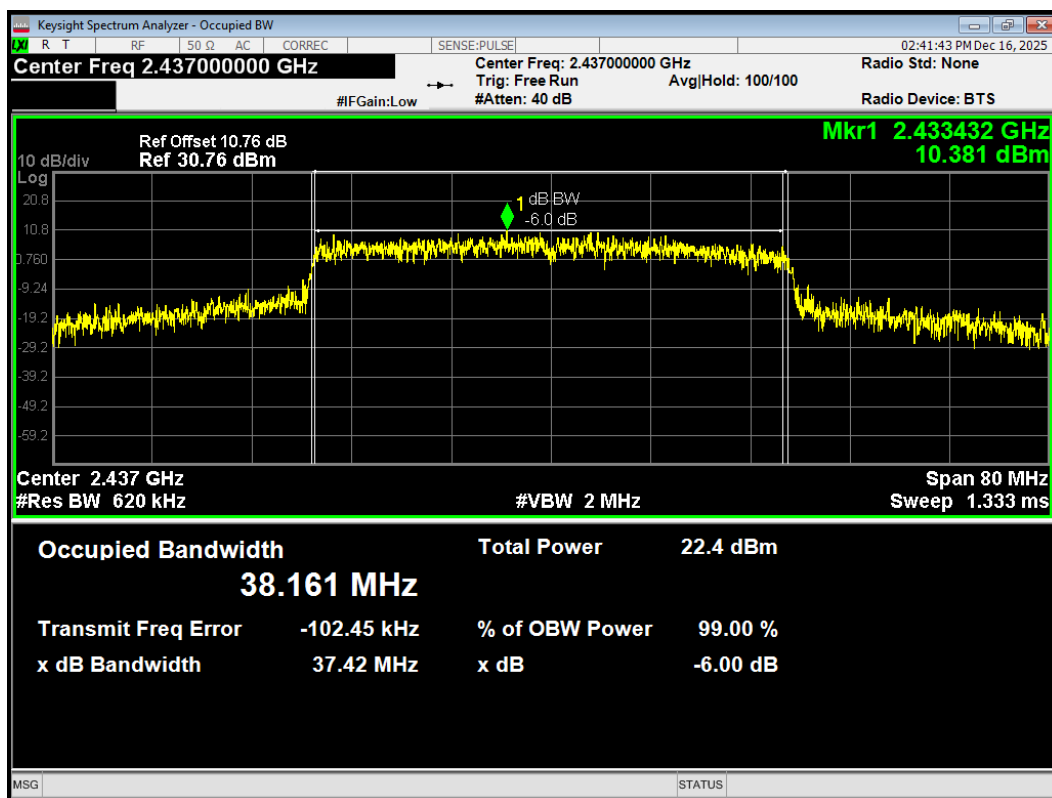


-6dB Bandwidth 802.11ax(HE40) 2452MHz

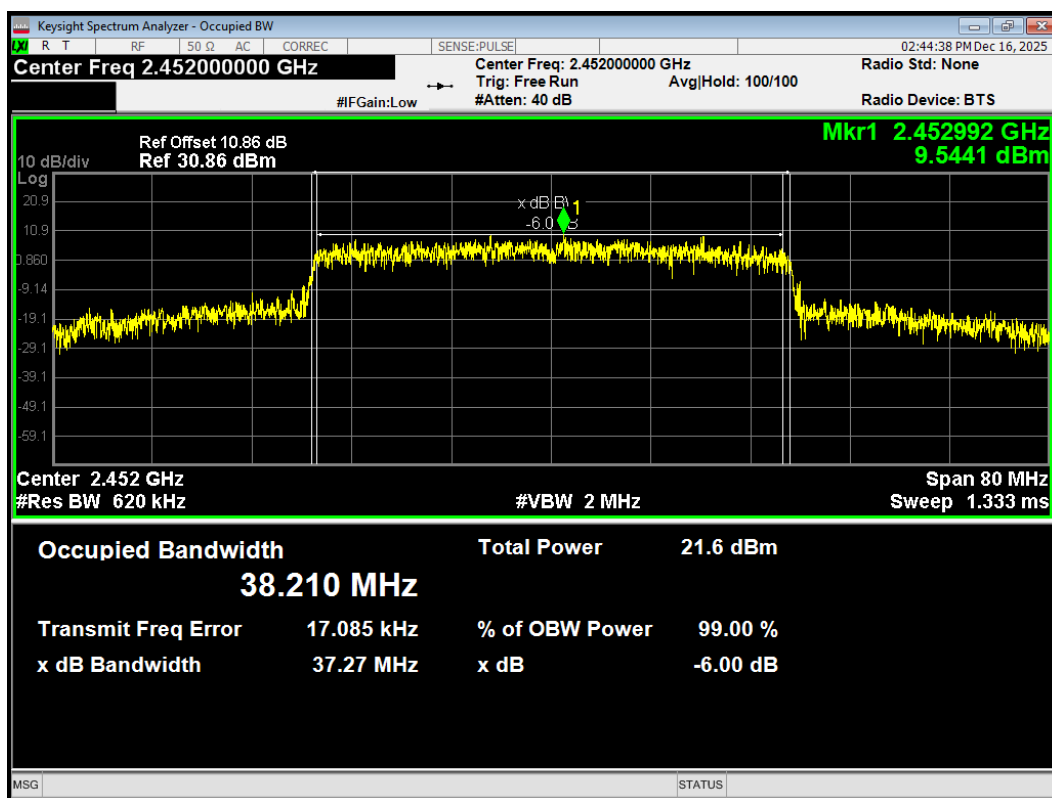


-6dB Bandwidth 802.11b 2412MHz

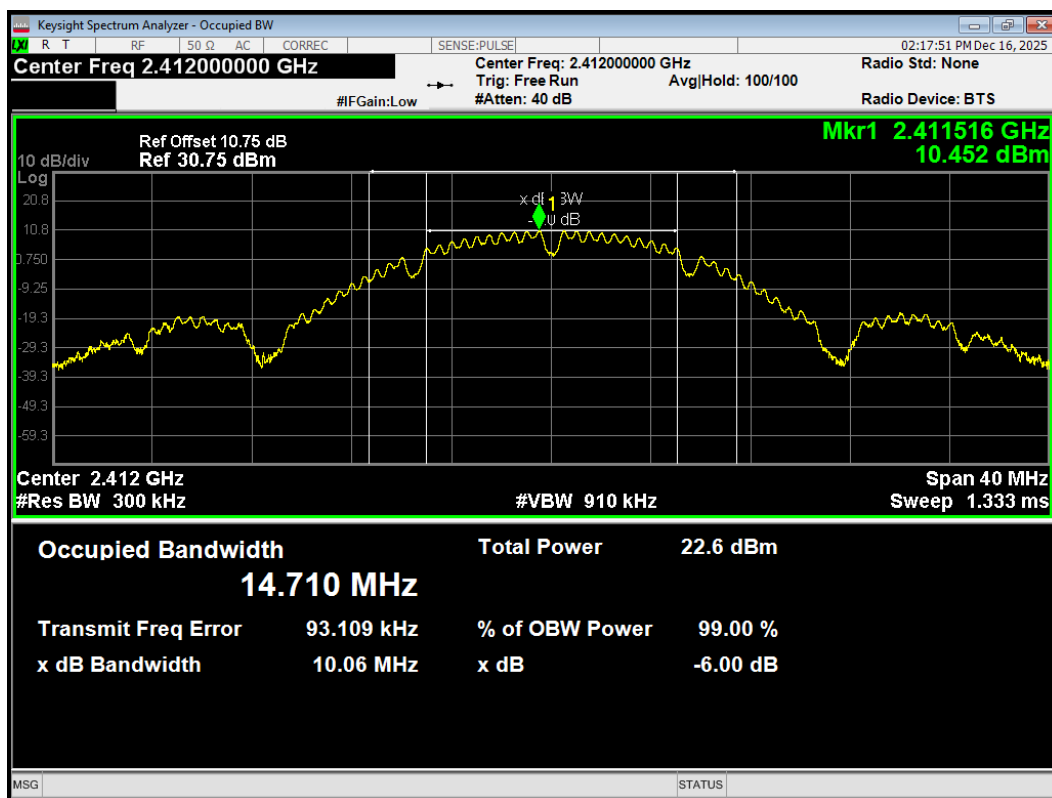


-6dB Bandwidth 802.11b 2437MHz

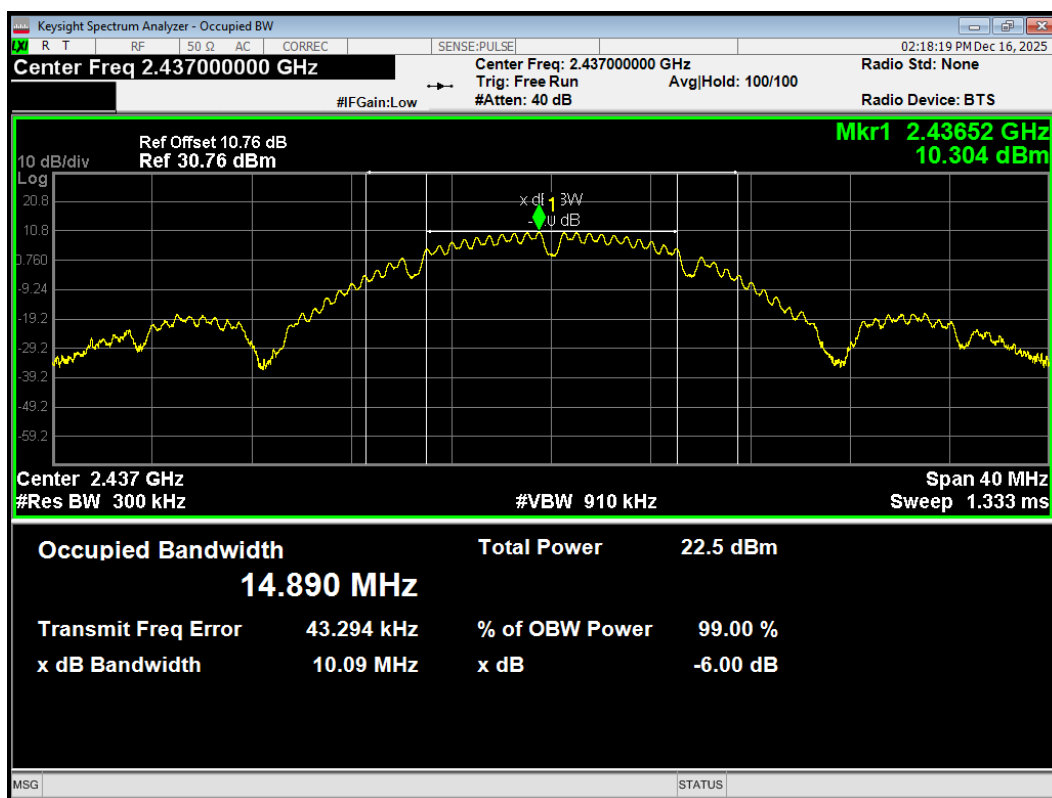


-6dB Bandwidth 802.11b 2462MHz

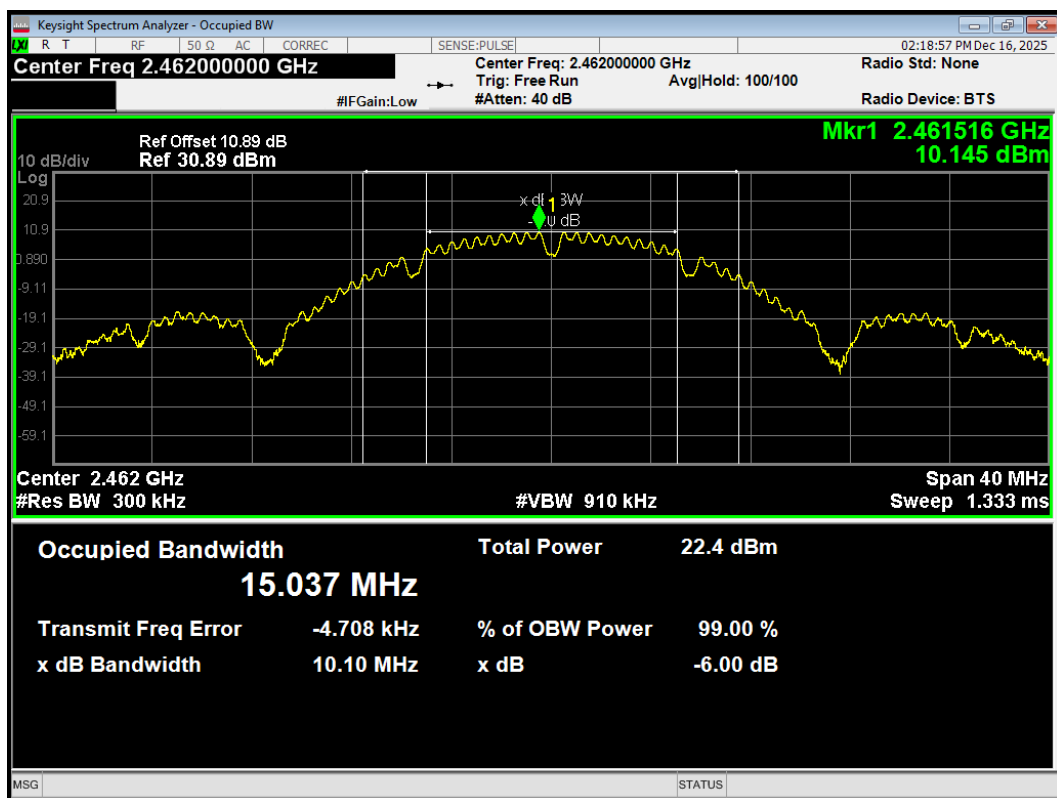


-6dB Bandwidth 802.11g 2412MHz

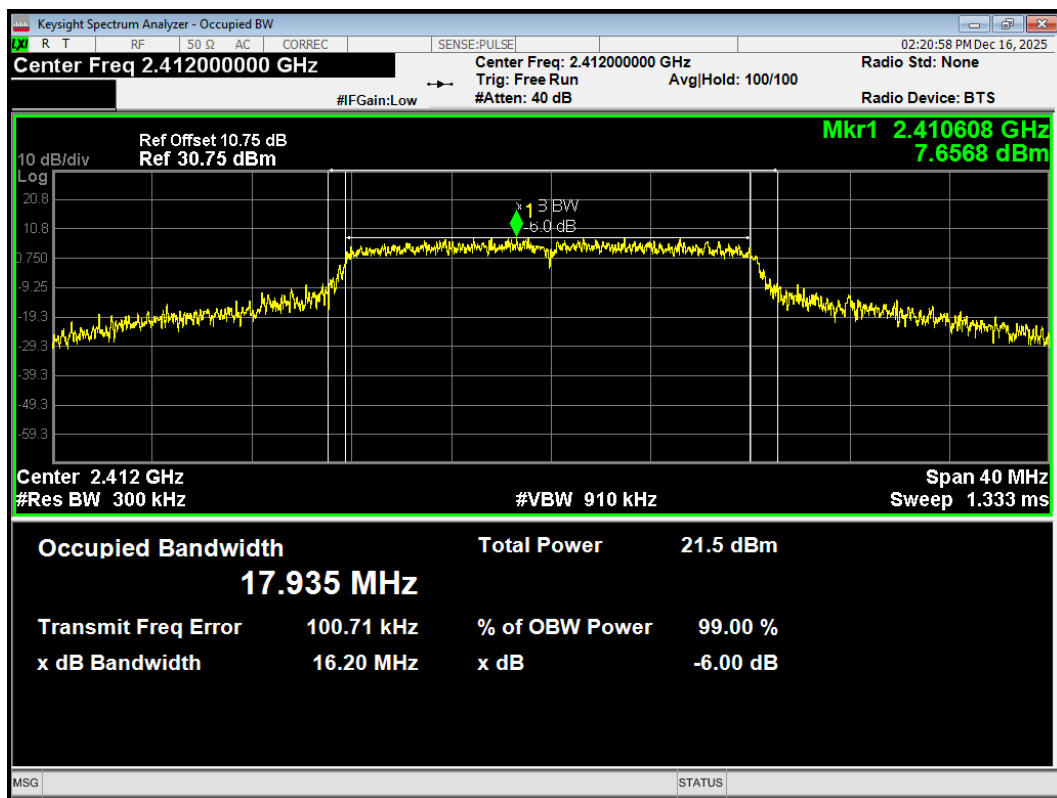


-6dB Bandwidth 802.11g 2437MHz

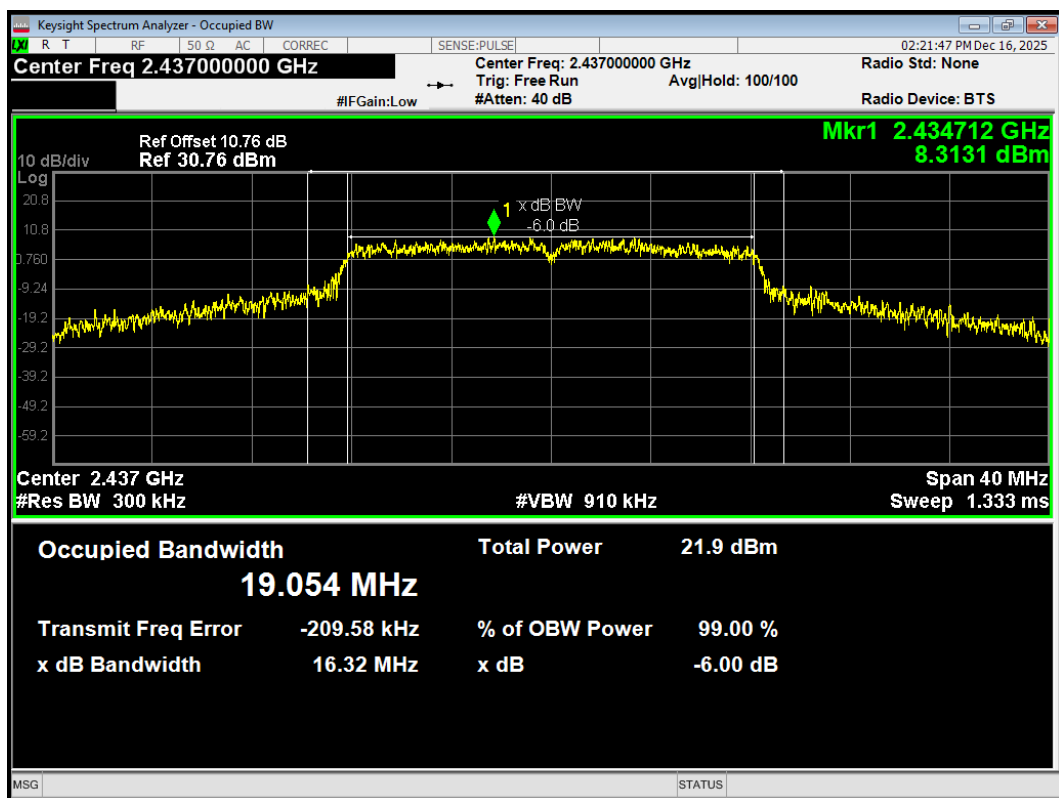


-6dB Bandwidth 802.11g 2462MHz

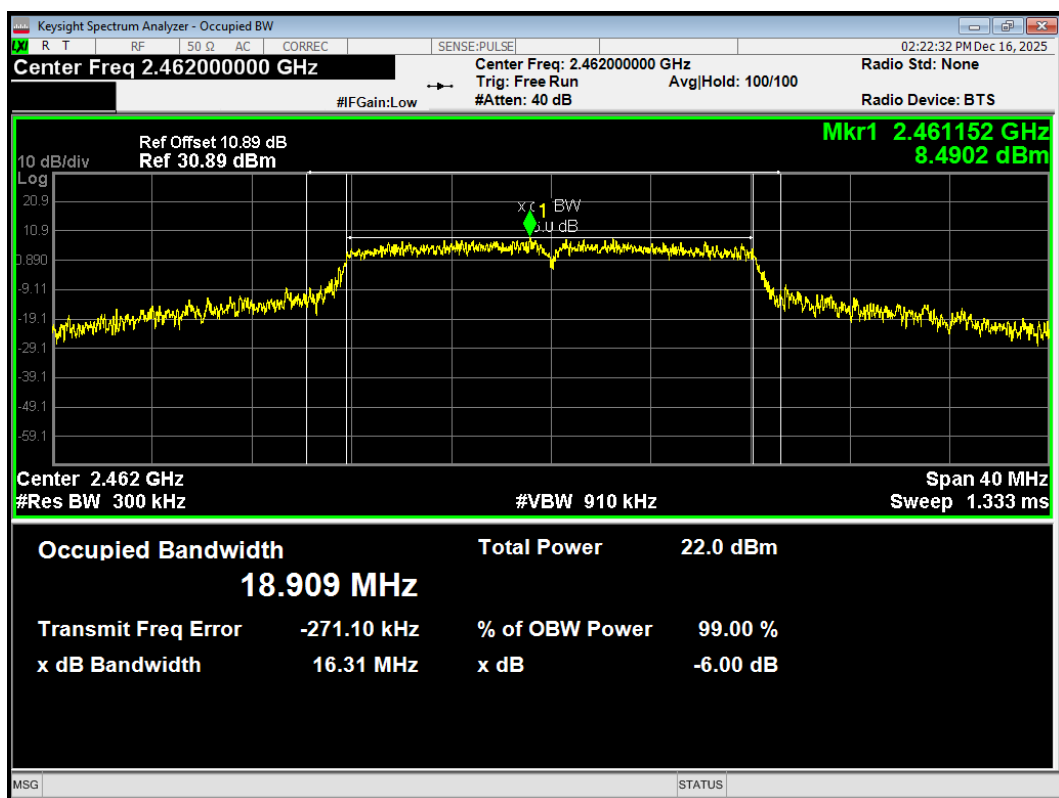


-6dB Bandwidth 802.11n(HT20) 2412MHz

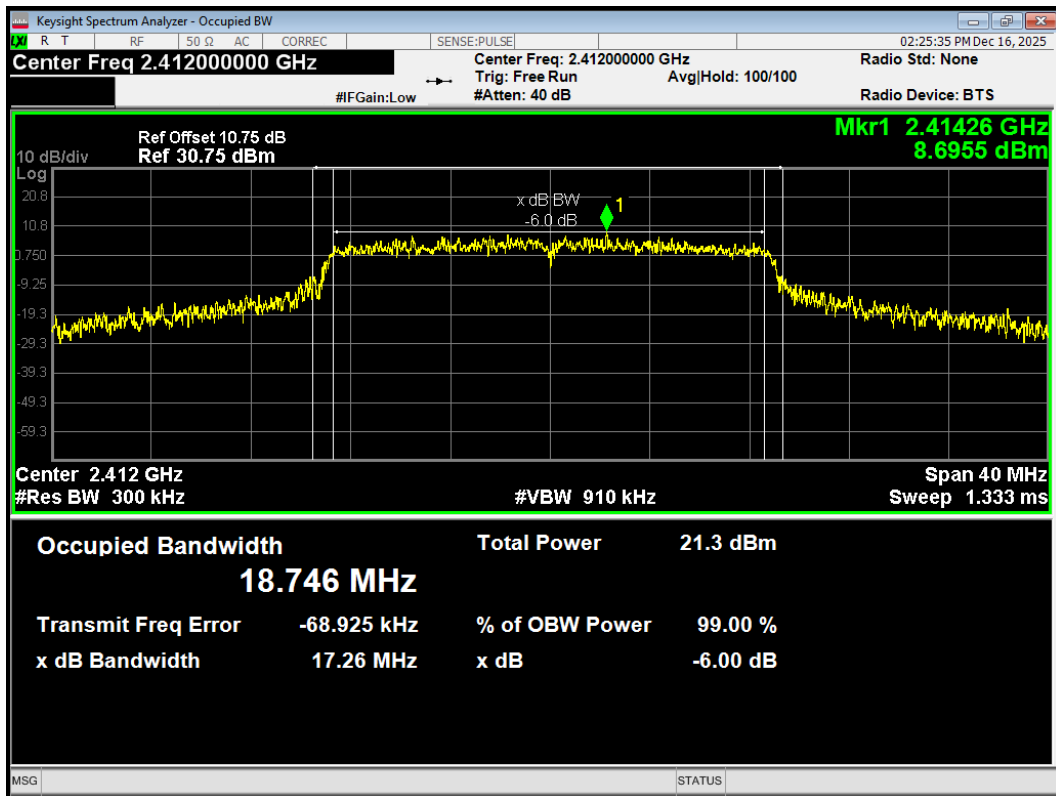


-6dB Bandwidth 802.11n(HT20) 2417MHz

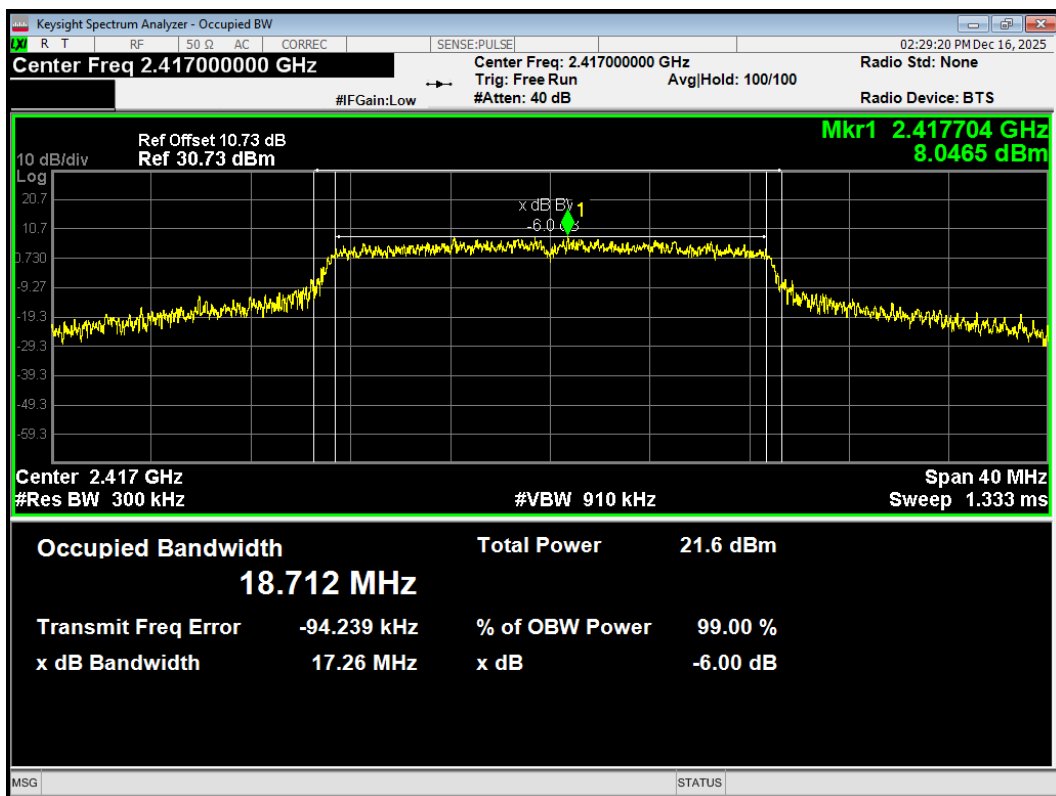


-6dB Bandwidth 802.11n(HT20) 2437MHz

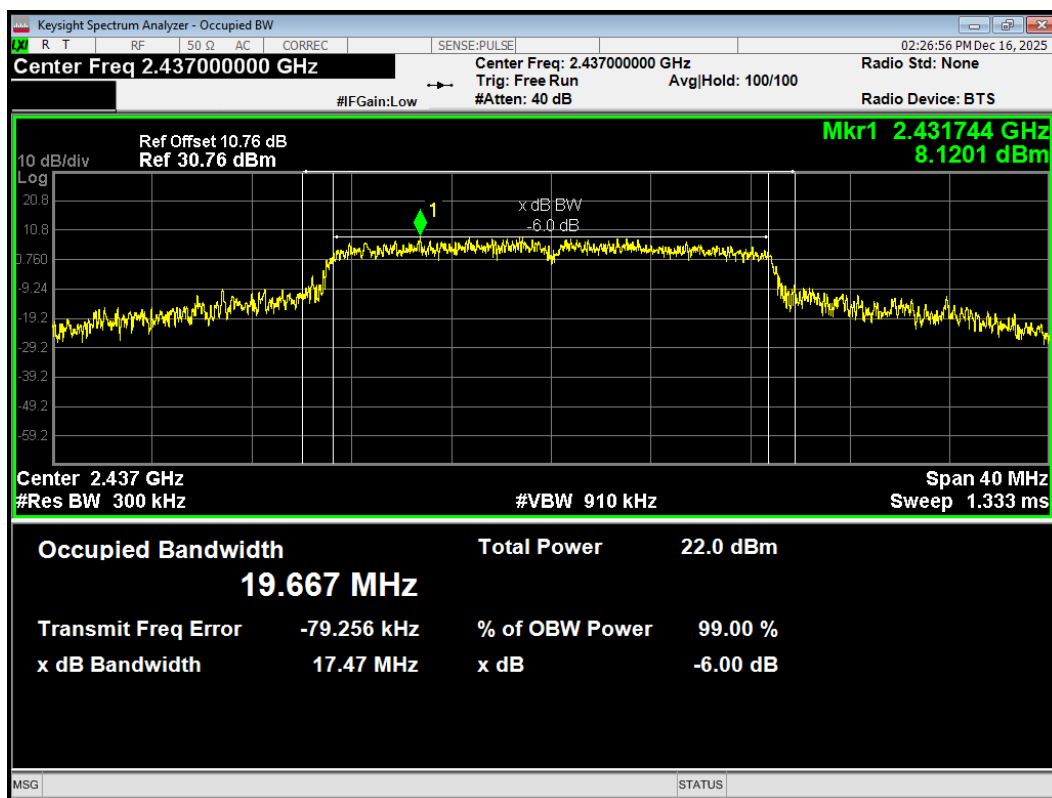


-6dB Bandwidth 802.11n(HT20) 2462MHz

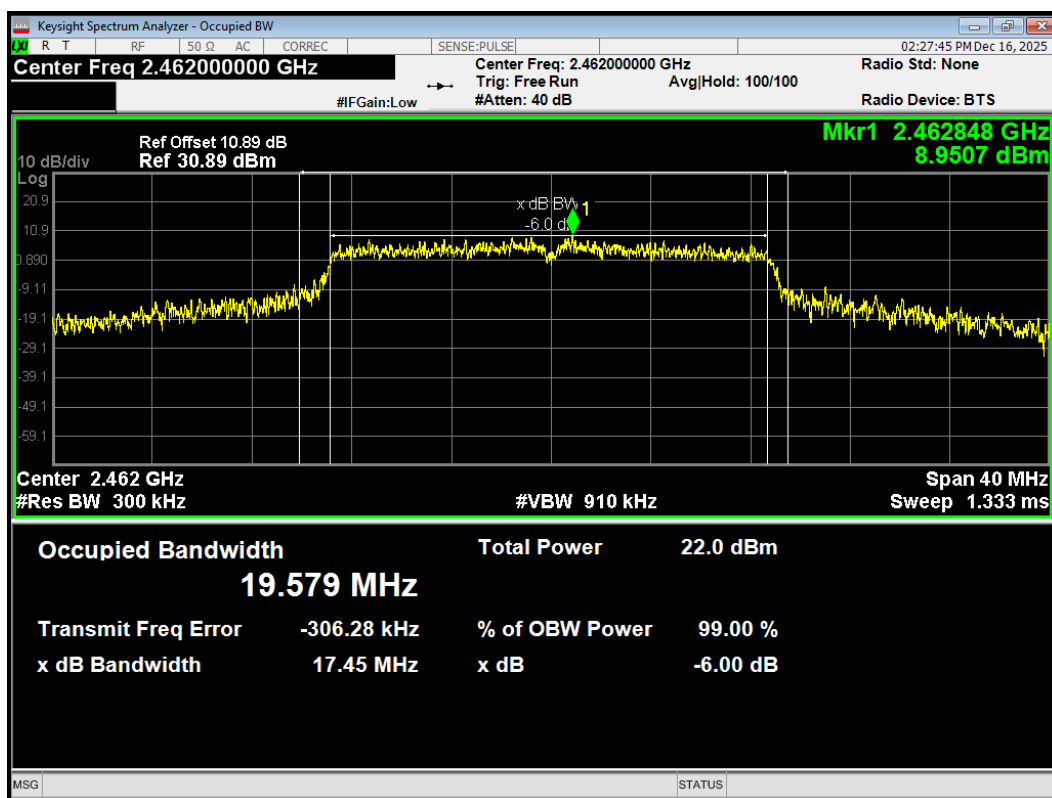


-6dB Bandwidth 802.11n(HT40) 2422MHz

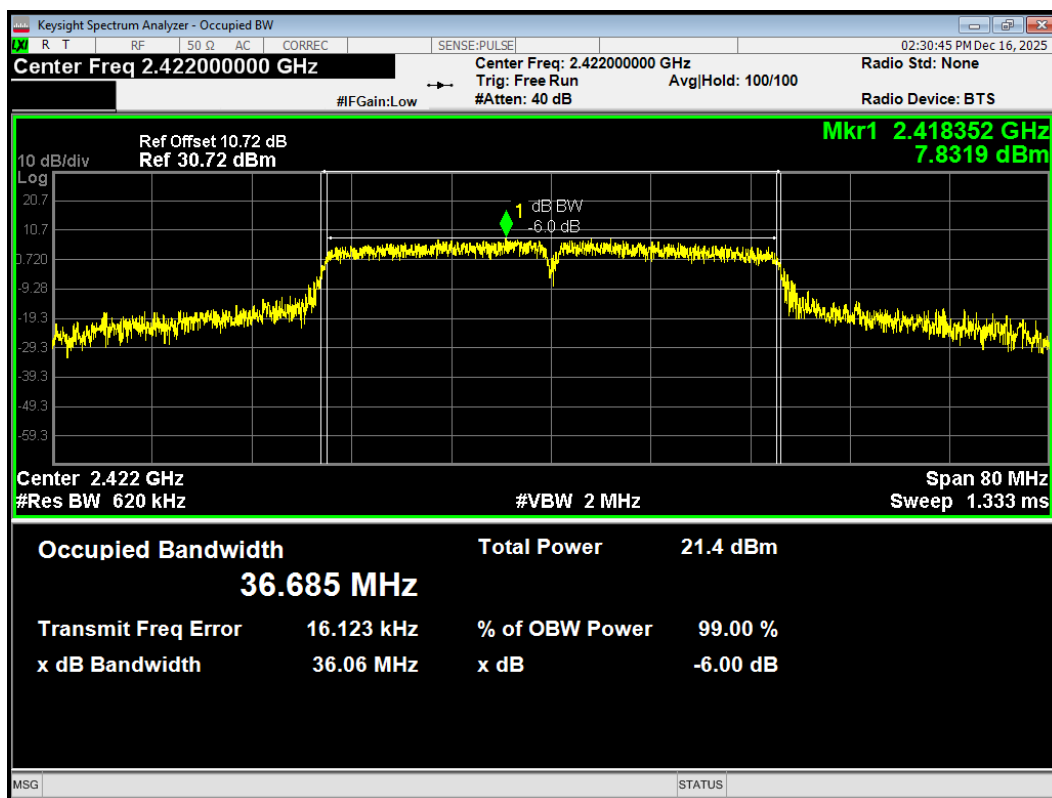


-6dB Bandwidth 802.11n(HT40) 2427MHz

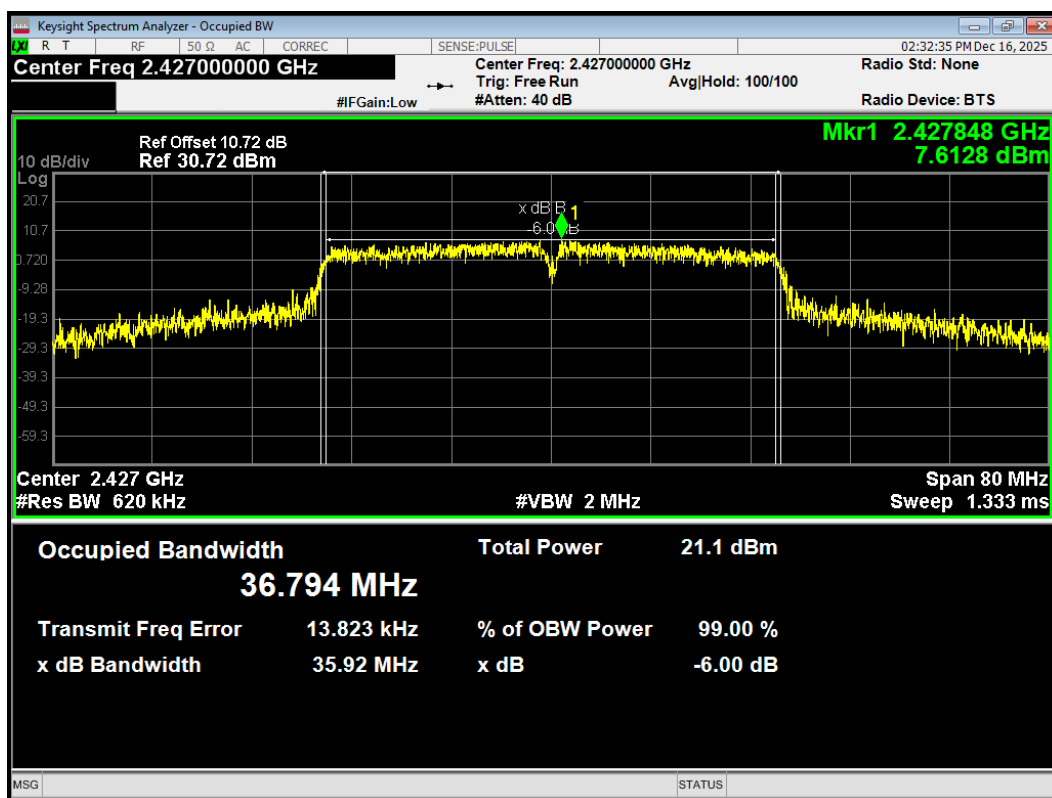


-6dB Bandwidth 802.11n(HT40) 2437MHz

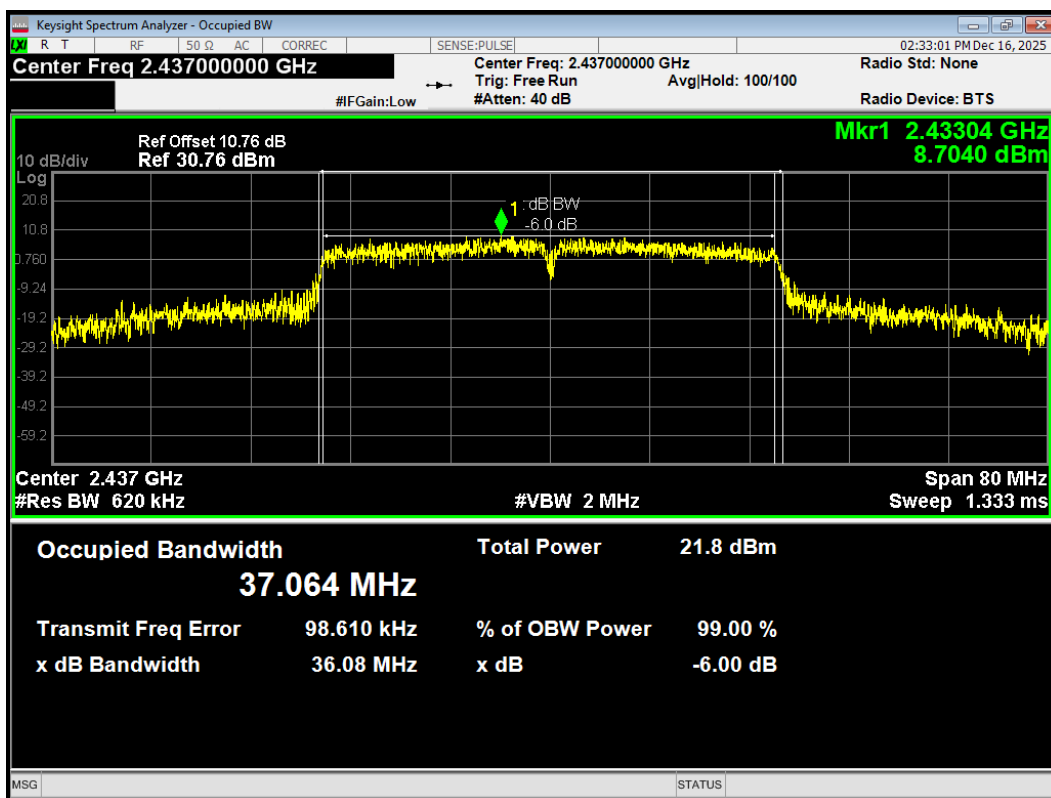


-6dB Bandwidth 802.11n(HT40) 2452MHz

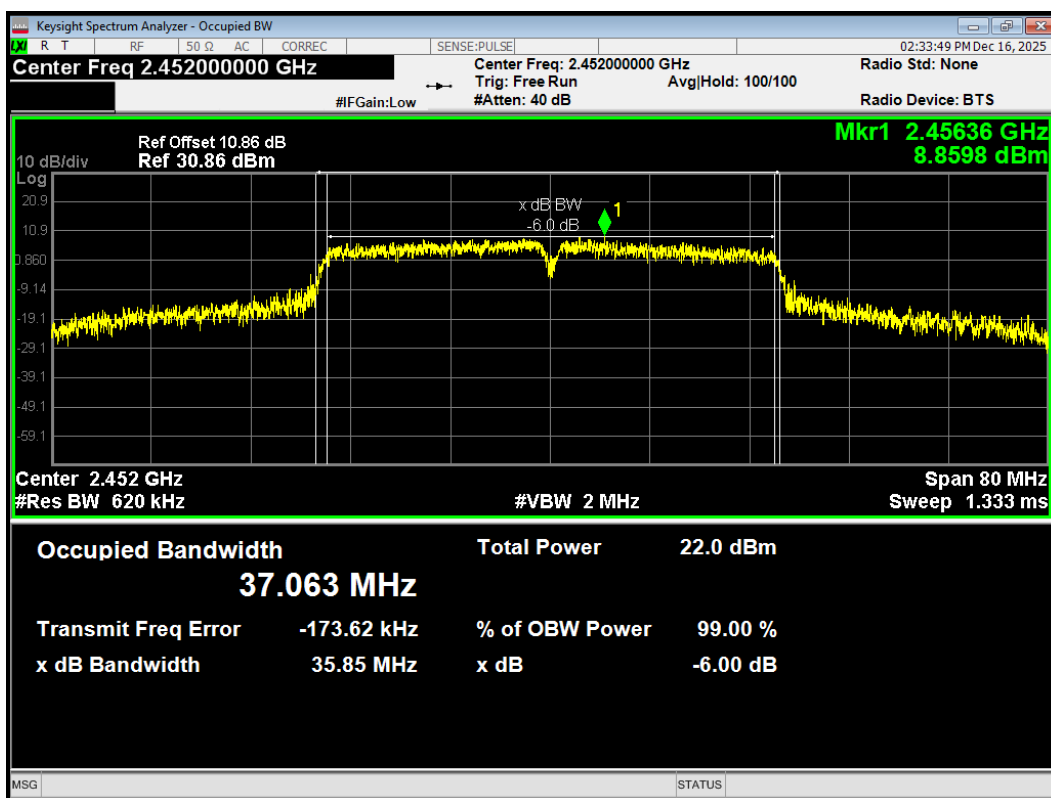


-6dB Bandwidth Bluetooth (1M) 2402MHz

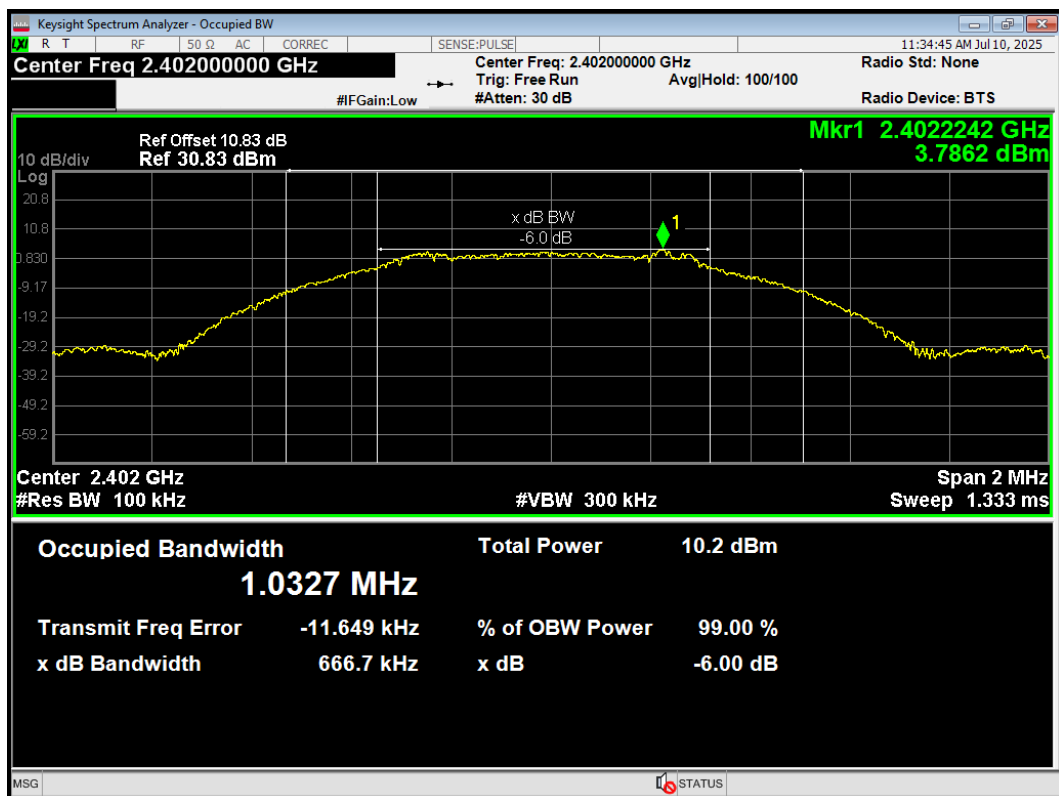


-6dB Bandwidth Bluetooth (1M) 2440MHz

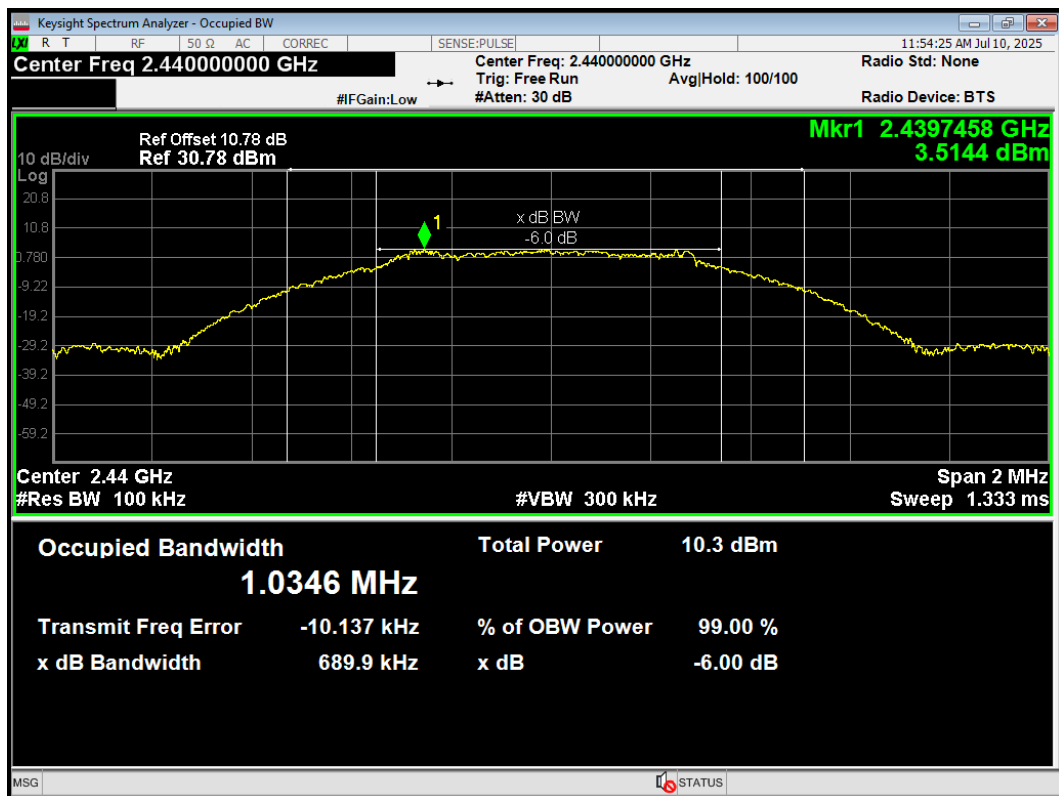


-6dB Bandwidth Bluetooth (1M) 2480MHz

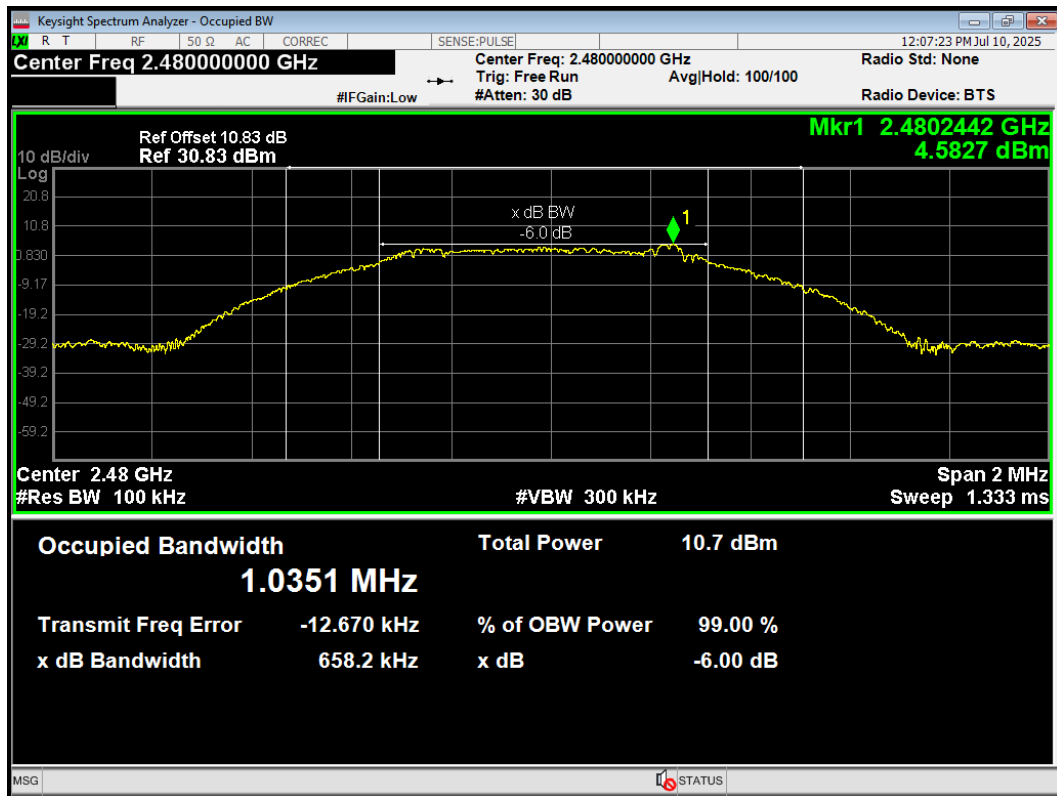


-6dB Bandwidth Bluetooth (2M) 2402MHz

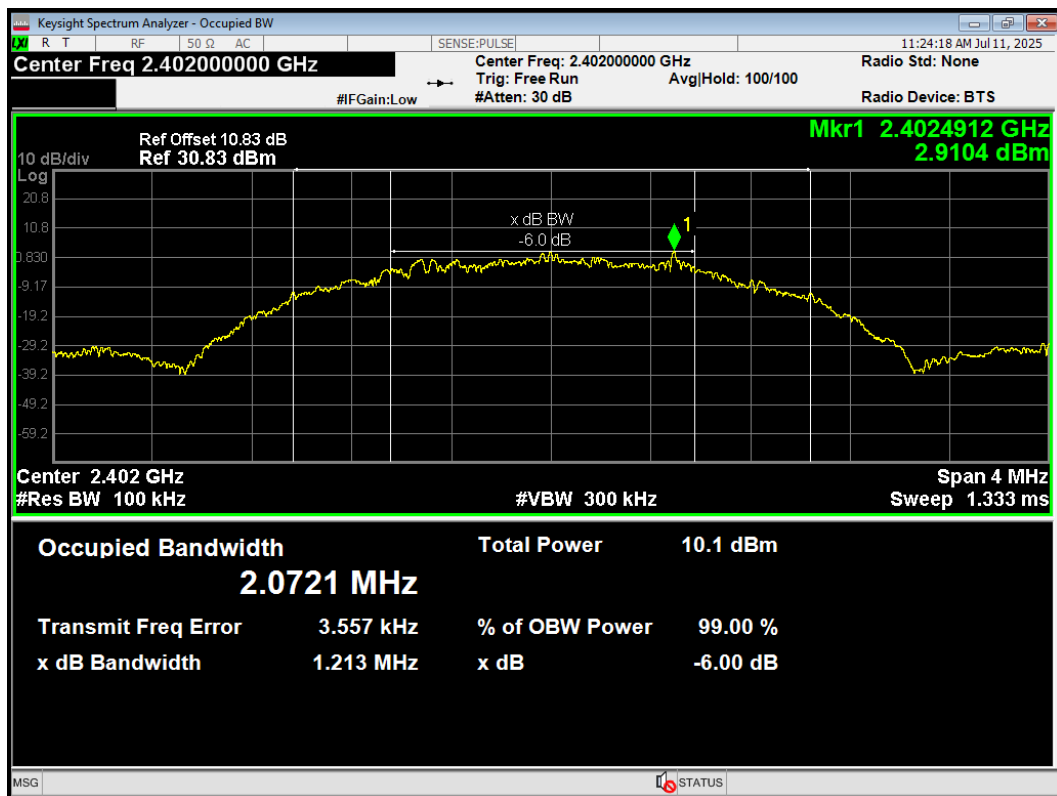

-6dB Bandwidth Bluetooth (2M) 2440MHz

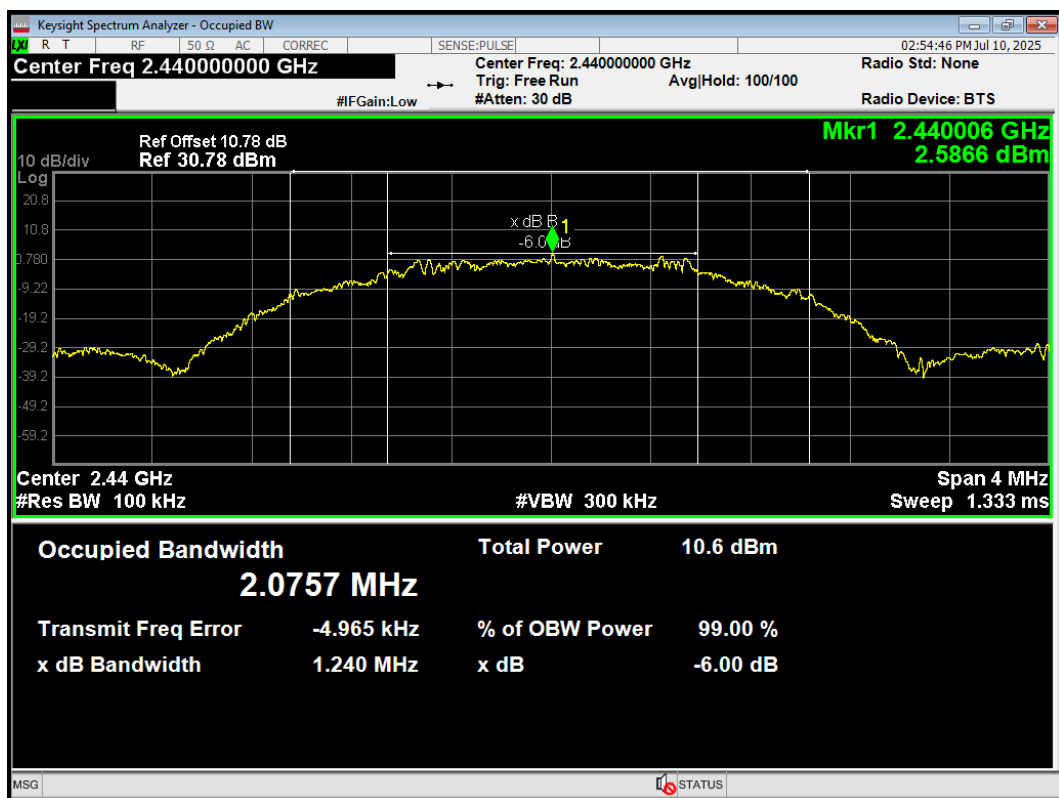


-6dB Bandwidth Bluetooth (2M) 2480MHz

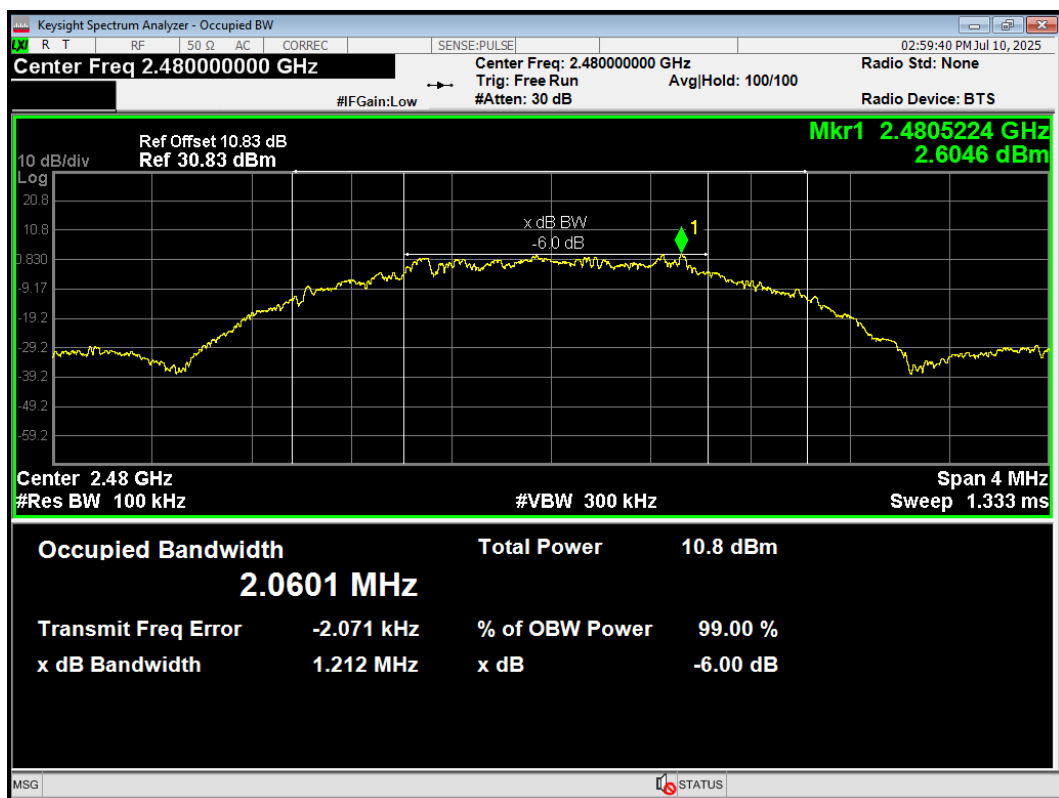


6.4. Band Edge


Band Edge 802.11ax(HE20) 2412MHz Ref

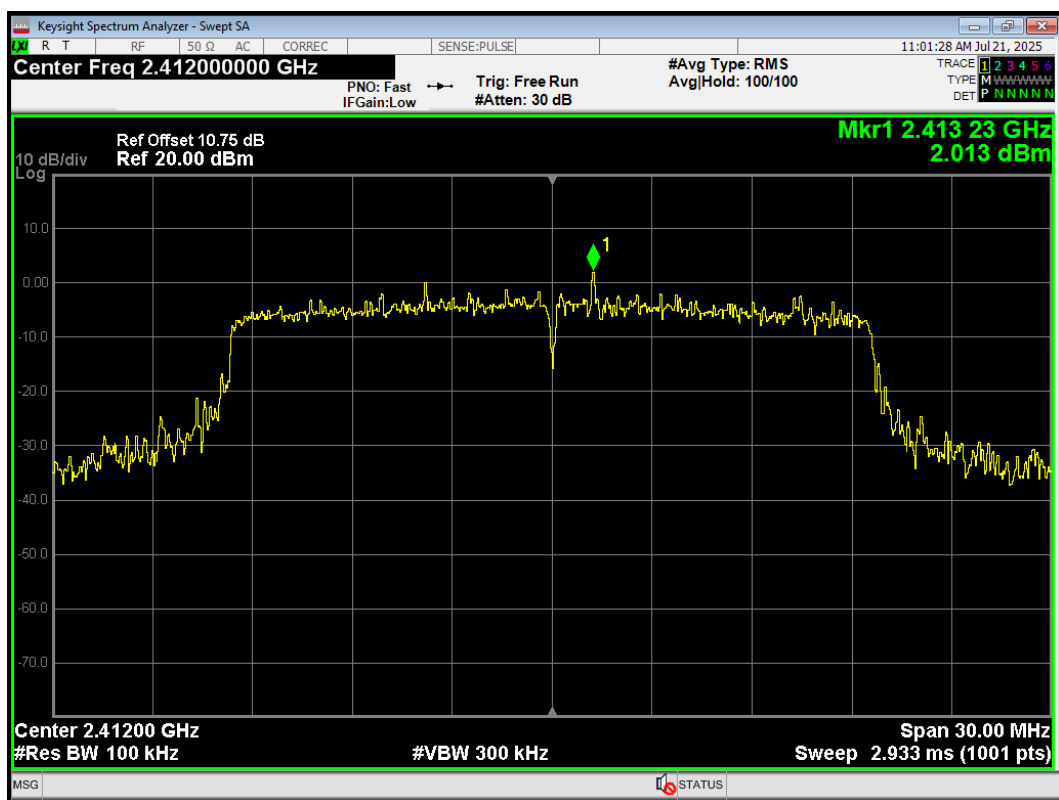


Band Edge 802.11ax(HE20) 2412MHz Emission

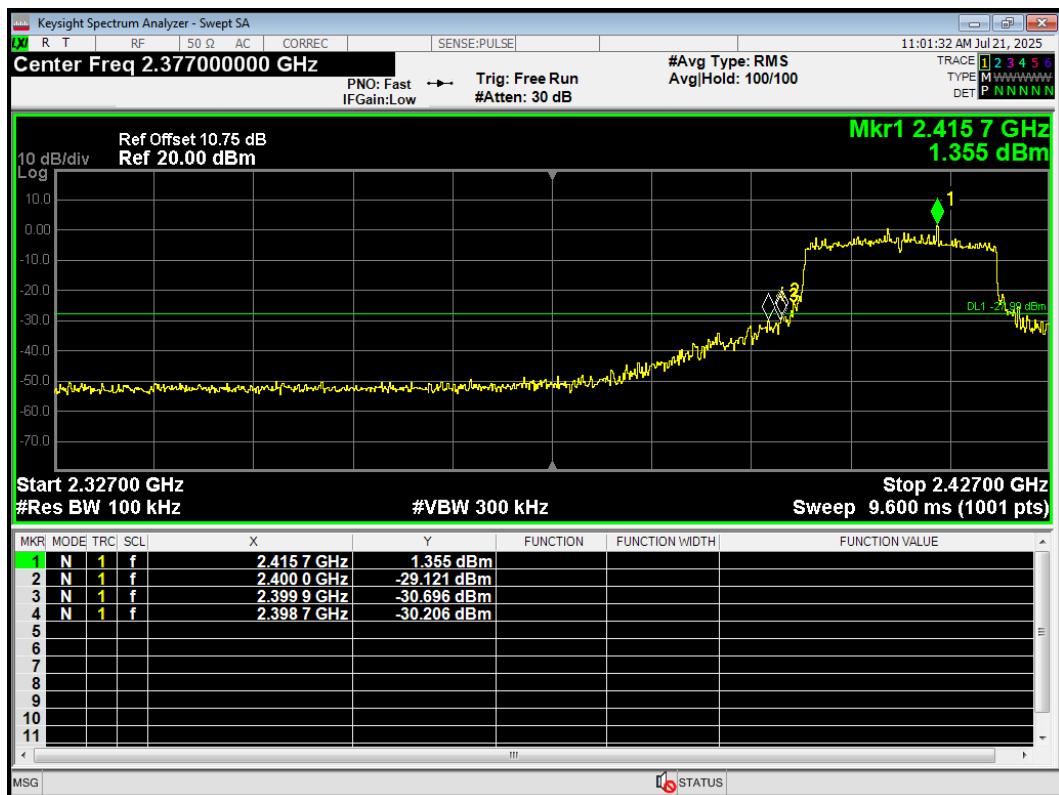


Band Edge 802.11ax(HE20) 2462MHz Ref

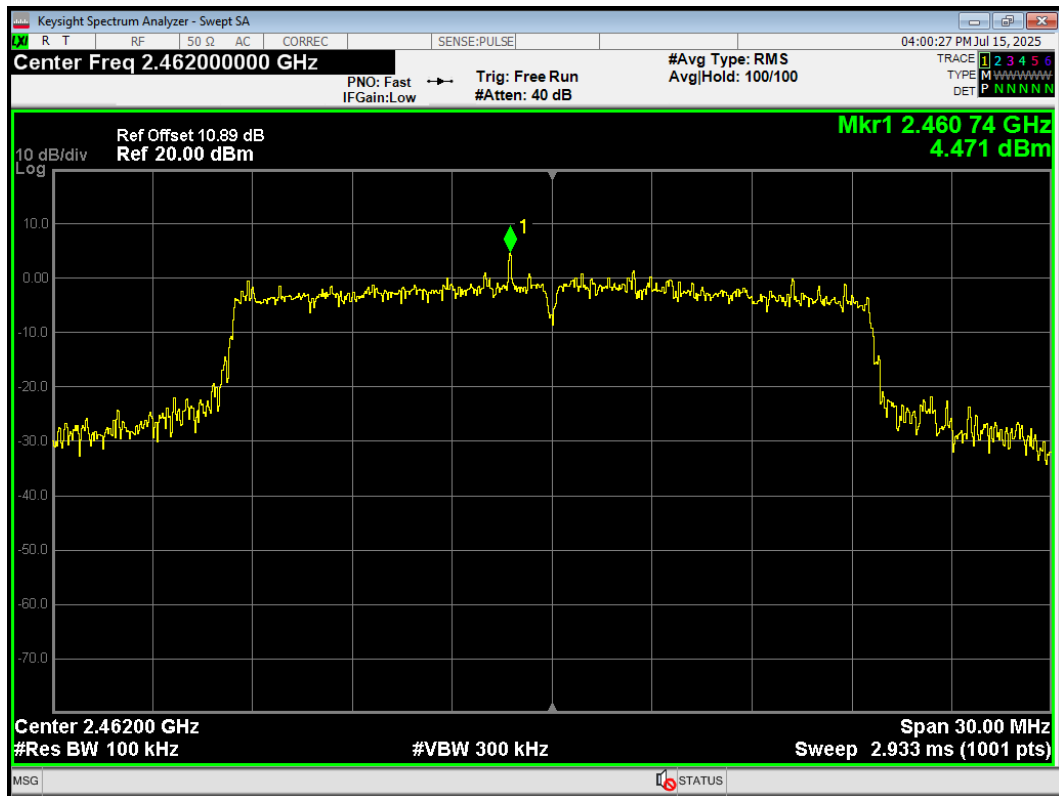


Band Edge 802.11ax(HE20) 2462MHz Emission

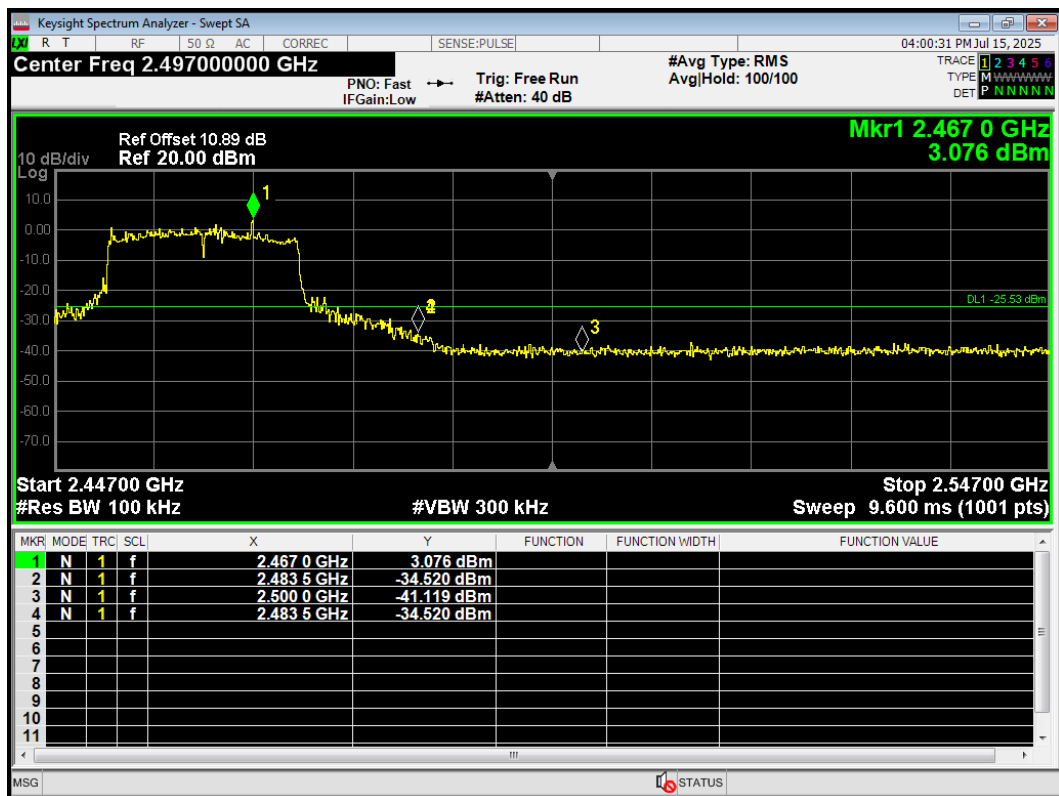


Band Edge 802.11ax(HE40) 2422MHz Ref

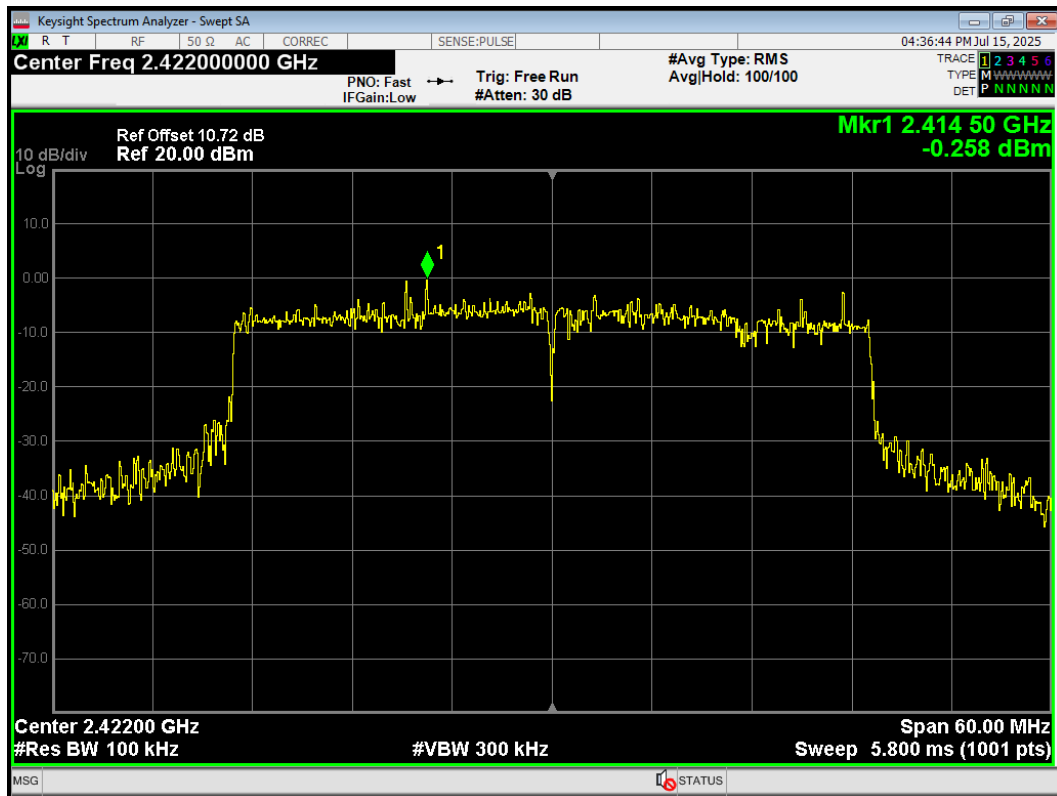


Band Edge 802.11ax(HE40) 2422MHz Emission

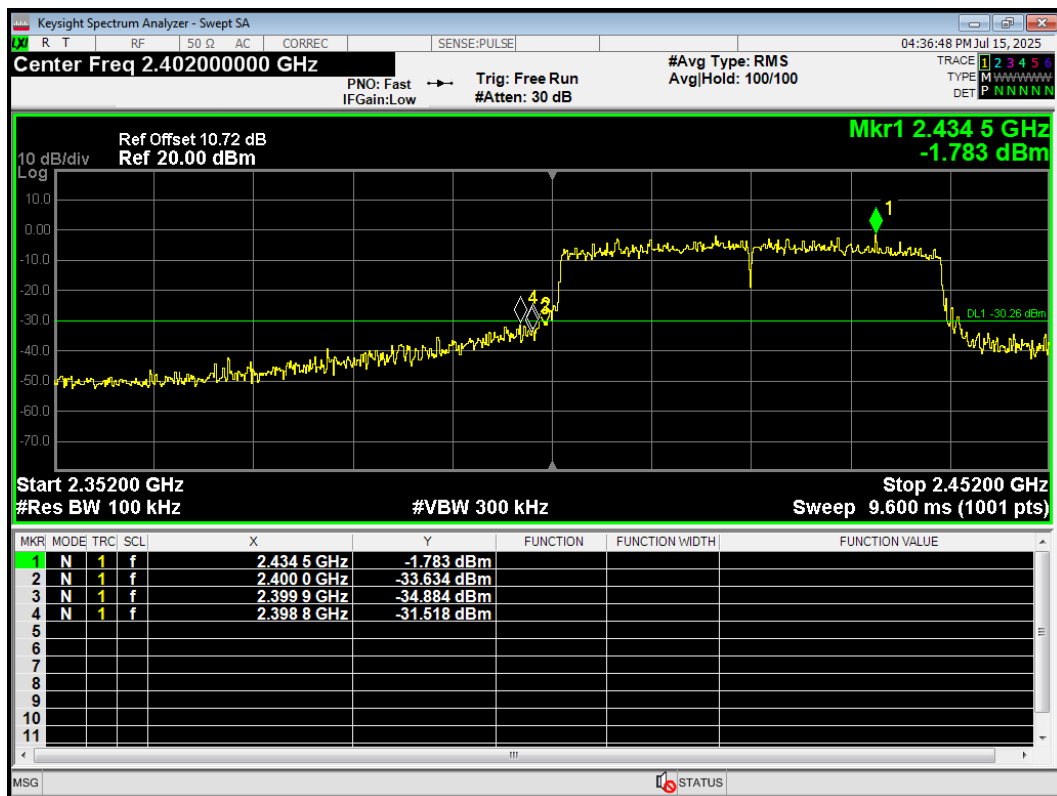


Band Edge 802.11ax(HE40) 2452MHz Ref

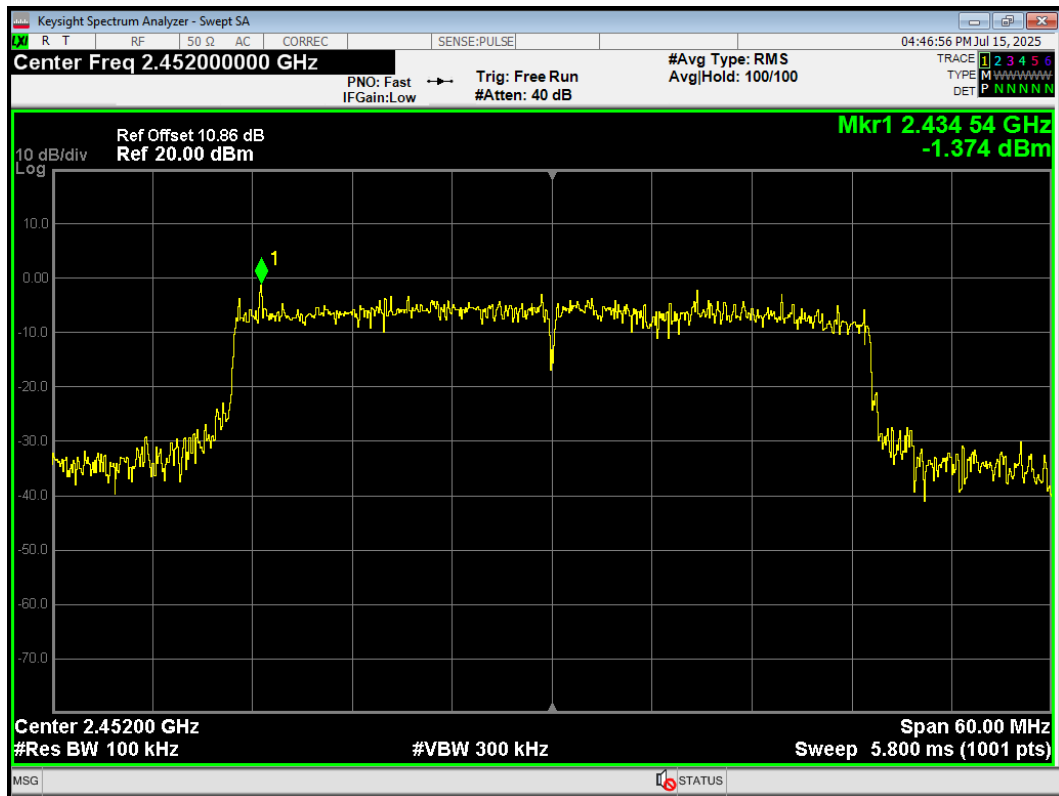


Band Edge 802.11ax(HE40) 2452MHz Emission

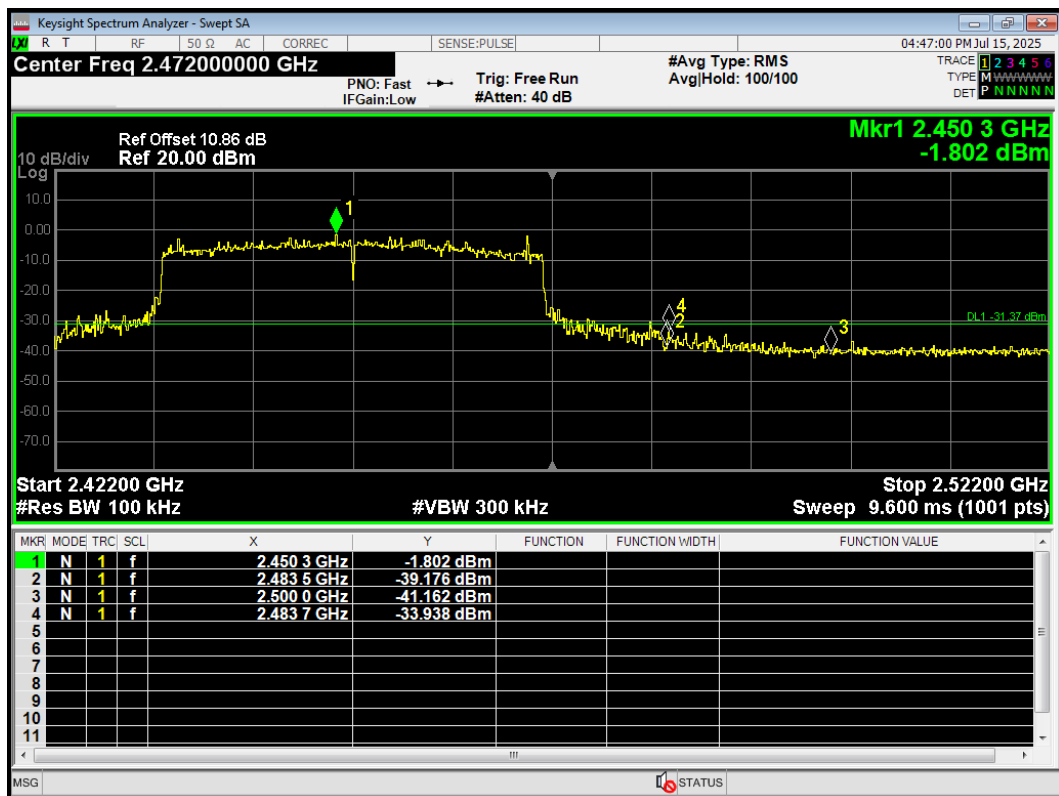


Band Edge 802.11b 2412MHz Ref

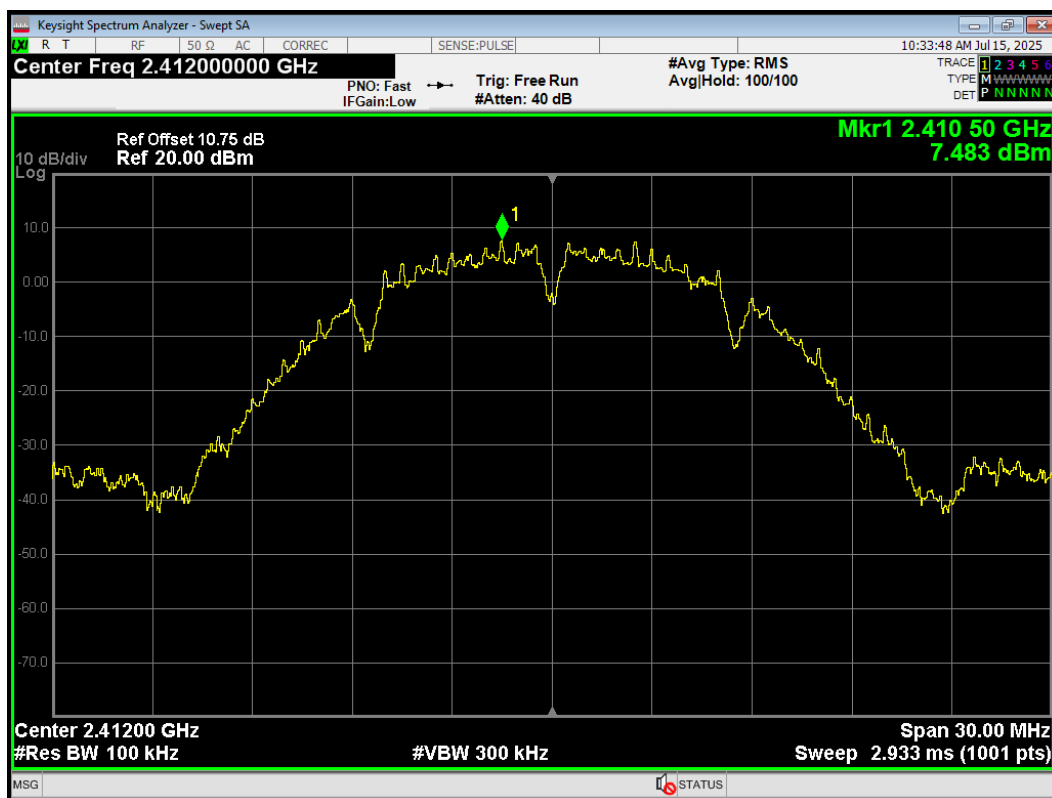

Band Edge 802.11b 2412MHz Emission

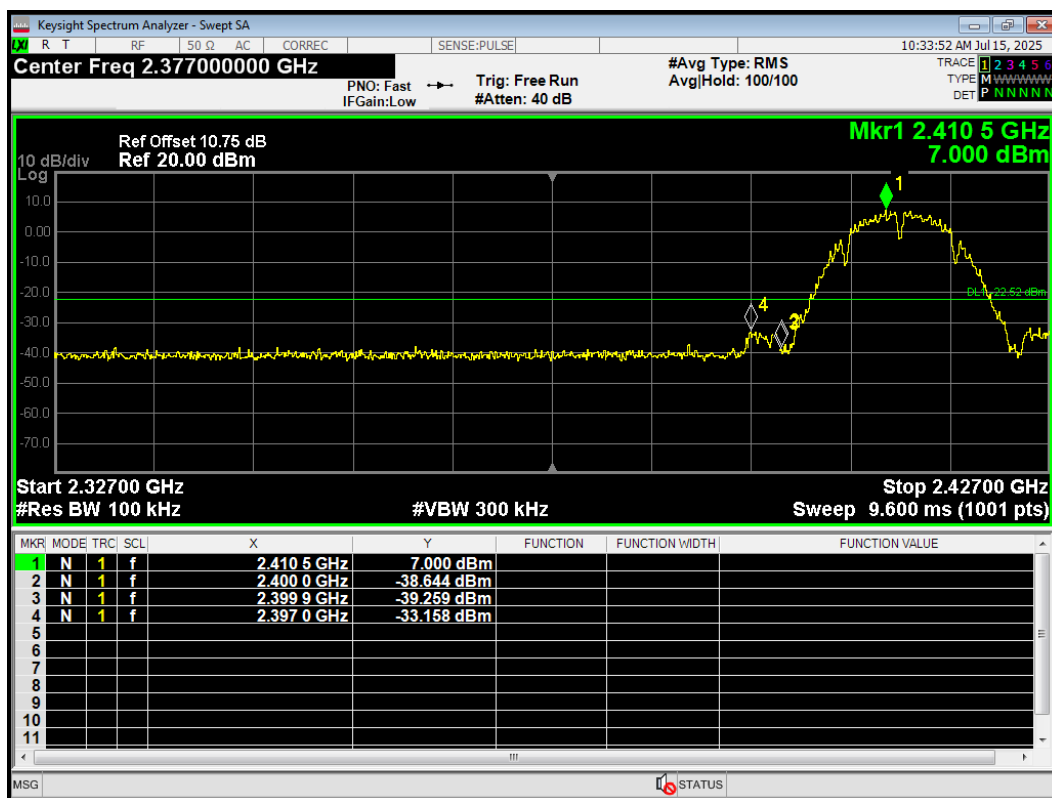

Band Edge 802.11b 2462MHz Ref

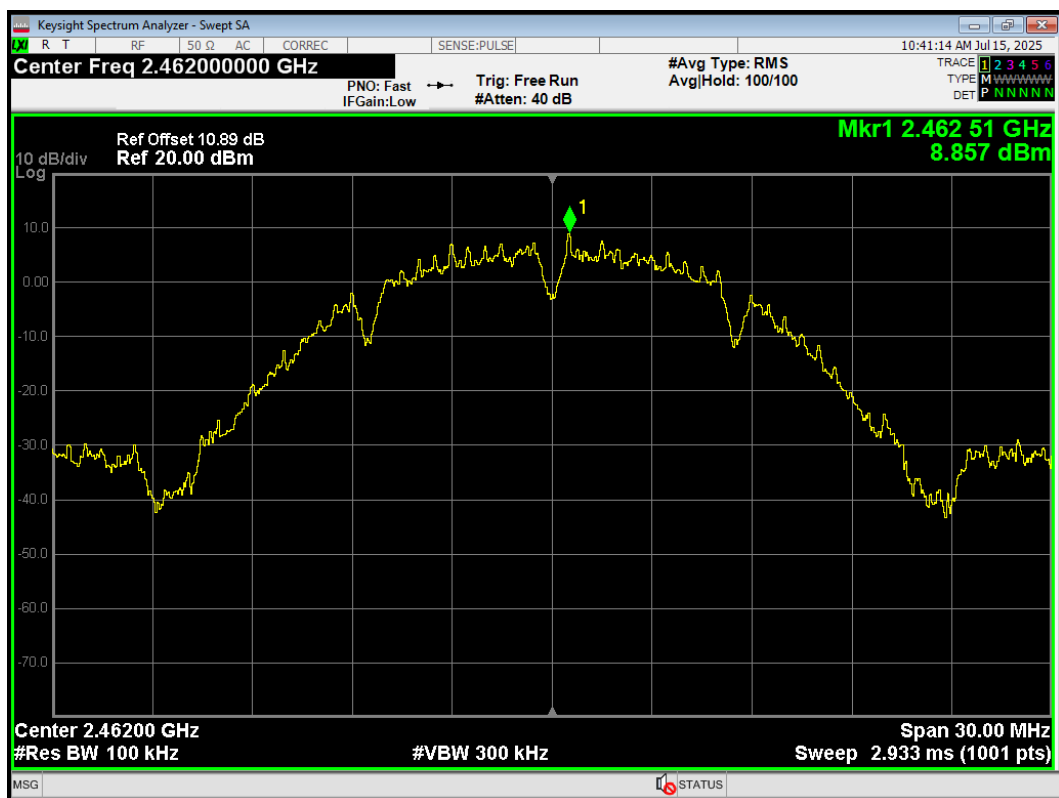

Band Edge 802.11b 2462MHz Emission

