

TEST REPORT

Application No.: SUCR2508000804AT
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
EUT Description: Smart Interactive Terminal
Model No.: F9J2A
Trade Mark: SUNMI
FCC ID: 2AH25F962AL
Standards: FCC 47 CFR Part 2, Subpart J
FCC 47 CFR Part 15, Subpart E
Date of Receipt: 2025-08-08
Date of Test: 2025-08-15 to 2025-08-28
Date of Issue: 2025-09-01

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Version

Revision Record			
Version	Description	Date	Remark
01	Original	2025-09-01	/

Authorized for issue by:				
Tested By				
		Hayley Zhang / Project Manager		
Approved By				
		Cloud Peng/Technical Manager		

Contents

Version	2
1 Test Summary	4
2 General Information	7
2.1 Details of Client	7
2.2 Test Location	7
2.3 Test Facility	7
2.4 General Description of EUT	8
2.5 Test Environment and Mode	11
2.6 Description of Support Units	11
2.7 Worst-case configuration and mode	11
3 Equipment List	12
4 Measurement Uncertainty (95% confidence levels, k=2)	13
5 Test results and Measurement Data	14
5.1 Antenna Requirement	14
5.2 AC Power Line Conducted Emissions	15
5.3 Radiated Spurious Emissions	19
5.4 Restricted bands around fundamental frequency	21
6 Photographs - Setup Photos	23
7 Appendix	24

1 Test Summary

Test Item	Band ^[1]	FCC rules No.	Test Requirements	Test Result	Result
Antenna Requirement	--	15.203/15.407(a)	--	Clause 3.1	PASS
26dB Emission Bandwidth	Band I	15.407(a)(1)	No limit.	Clause 3.5	Reference report SUCR250400030604
	Band II-A	15.407(a)(2)			
	Band II-C	15.407(a)(2)			
6dB Emission Bandwidth	Band III	15.407(e)	≥ 500 kHz.	Clause 3.6	
99% Occupied Bandwidth	Band I	KDB 789033 D02§ D	No limit.	Clause 3.7	
	Band II-A				
	Band II-C				
	Band III				
Duty Cycle	Band I Band II-A Band II-C Band III	--	No limit.	Clause 3.3	
Maximum Conducted Output Power	Band I	15.407(a)(iv)	< 250mW	Clause 3.4	
	Band II-A	15.407(a)(2)	<MIN{250mW,11dBm+10*lg(EBW)}		
	Band II-C				
	Band III	15.407(a)(3)	< 1W		
Maximum Power Spectral Density	Band I	15.407(a)(iv)	<11dBm/MHz	Clause 3.8	
	Band II-A	15.407(a)(2)	<11dBm/MHz		
	Band II-C				
	Band III	15.407(a)(3)	<30dBm/500KHz		
Radiated Spurious Emissions	Band I	15.407(b) 15.205/15.209	F<1GHz: §15.209 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.15-5.35 GHz). F≥1GHz & in-restricted: §15.209 limit (AV&PK).	Clause 3.9	PASS
	Band II-A	15.407(b) 15.205/15.209	F<1GHz: §15.209 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.25-5.35 GHz). F≥1GHz & in-restricted: §15.209 limit (AV&PK).		
	Band II-C	15.407(b) 15.205/15.209	F<1GHz: §15.209 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl.		

Test Item	Band ^[1]	FCC rules No.	Test Requirements	Test Result	Result
			5.47-5.725 GHz). F≥1GHz & in-restricted: §15.209 limit (AV&PK).		
	Band III	15.407(b) 15.205/15.209	F<1GHz: §15.209 limit (QP) F≥1GHz & out-restricted:(PK) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. F≥1GHz & in-restricted: §15.209 limit (AV&PK).		
Restricted bands around fundamental frequency	Band I Band II-A Band II-C Band III	15.407(b) 15.205/15.209	---	Clause 3.10	PASS
AC Power Line Conducted Emissions	Band I Band II-A Band II-C Band III	15.207	---	Clause 3.2	PASS
Dynamic Frequency Selection	Band II-A Band II-C	15.407	Channel Move Time:10 Seconds	Clause 3.11	
Frequency Stability	Band I Band II-A Band II-C Band III	15.407(g)	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual	N/A	Reference report SUCR250400030604
Note 1: Band I: 5150-5250MHz Band II-A: 5250-5350MHz Band II-C: 5470-5725MHz Band III: 5725-5850MHz					

Remark:

This test report (Report No.: SUCR250800080404 issue on 2025/09/01) is based on the original test report (Report No.: SUCR250400030604 issue on 2025/06/12).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report only the AC power line conducted emission and radiated spurious emissions based on the worst case of the original report with report number SUCR250800080404 issue on 2025/09/01 and other test data in this report are based on the previous report with report number SUCR250400030604 issue on 2025/06/12.

2 General Information

2.1 Details of Client

Applicant:	Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer:	Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China

2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Ives Cheng, King-p Li

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

2.4 General Description of EUT

Hardware Version:	6225Coreboard_MB_V3.0	
Software Version:	4.0.12	
Power Supply:	20V	
WLAN Mode Supported:	802.11a:	20 MHz channel bandwidth
	802.11n:	20 MHz / 40 MHz channel bandwidth
	802.11ac:	20 MHz / 40 MHz / 80 MHz channel bandwidth
Operation Frequency:	5150MHz to 5250MHz 5250MHz to 5350MHz 5470MHz to 5725MHz 5725MHz to 5850MHz	
Modulation Type:	802.11a:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11n:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11ac:	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing:	20MHz:	802.11a/n(HT20)/ac(VHT20)
	40MHz:	802.11n(HT40)/ac(VHT40)
	80MHz:	802.11ac(VHT80)
Antenna Type:	PIFA Antenna	
Antenna Gain:	F9J2A: 5150MHz to 5250MHz: -2.0 dBi 5250MHz to 5350MHz: -0.3dBi 5470MHz to 5725MHz: 1.2dBi 5725MHz to 5850MHz: 1.0dBi	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.	
Smart System:	☒ SISO	802.11a/n/ac
TPC Function:	☒ Support, ☐ Not Support	
DFS Function:	☐ Master	
	☐ Slave with radar detection	☒ Slave without radar detection
RF Cable:	2dB	
Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.		

In FCC 15.31, for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table, and the selected channel to perform the test as below:

Frequency range over which device operates	Number of Measurement Frequencies Required	Location of Measurement Frequency in Band of Operation
1 MHz or less	1	centre
1 MHz to 10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near centre

For UNII Band I:

Mode	Channel	Frequency(MHz)
IEEE 802.11a/n/ac 20MHz	The Lowest channel	5180
	The Middle channel	5200
	The Highest channel	5240
IEEE 802.11n/ac 40MHz	The Lowest channel	5190
	The Highest channel	5230
IEEE 802.11ac 80MHz	The Middle channel	5210

For UNII Band II-A:

Mode	Channel	Frequency(MHz)
IEEE 802.11a/n/ac 20MHz	The Lowest channel	5260
	The Middle channel	5280
	The Highest channel	5320
IEEE 802.11n/ac 40MHz	The Lowest channel	5270
	The Highest channel	5310
IEEE 802.11ac 80MHz	The Middle channel	5290

For UNII Band II-C:		
Mode	Channel	Frequency(MHz)
IEEE 802.11a/n/ac 20MHz	The Lowest channel	5500
	The Middle channel	5580
	The Highest channel	5700
IEEE 802.11n/ac 40MHz	The Lowest channel	5510
	The Middle channel	5550
	The Highest channel	5670
IEEE 802.11ac 80MHz	The Middle channel	5530

For UNII Band III:		
Mode	Channel	Frequency(MHz)
IEEE 802.11a/n/ac 20MHz	The Lowest channel	5745
	The Middle channel	5785
	The Highest channel	5825
IEEE 802.11n/ac 40MHz	The Lowest channel	5755
	The Highest channel	5795
IEEE 802.11ac 80MHz	The Middle channel	5775

2.5 Test Environment and Mode

Environment Parameter	101 kPa Selected Values During Tests	
Relative Humidity	44-46 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	22~23	3.87
Remark: NV: Normal Voltage NT: Normal Temperature		

2.6 Description of Support Units

Description	Manufacturer	Model No.	FCC ID
Router	ASUS	GT-AXE11000	MSQ-RTAXJF00

2.7 Worst-case configuration and mode

Low data rate was used to test on antenna port conducted tests and radiated spurious emissions since it has the highest maximum power. Following are the worst-case data rates set for test:

Modulation Type	SISO - Data Rate	MIMO - Data Rate
802.11a	6 Mbps	/
802.11n (HT 20)	MCS0 (6.5 Mbps)	/
802.11n (HT 40)	MCS0 (13.5 Mbps)	/
802.11ac (VHT 20)	MCS0 (6.5 Mbps)	/
802.11ac (VHT 40)	MCS0 (13.5 Mbps)	/
802.11ac (VHT 80)	MCS0 (29.3 Mbps)	/

3 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
2	LISN	R&S	ENV216	SUWI-01-19-03	5/8/2025	5/7/2026
3	LISN	Schwarzbeck	ENV216	SUWI-01-19-04	5/8/2025	5/7/2026
4	Test Software	Tonscend	JS32-CE 4.0.0.2	SUWI-02-09-05	N.C.R	N.C.R
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
4	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
5	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-09	11/21/2024	11/20/2025
6	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
8	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	8/22/2024	8/21/2026
9	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
10	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
11	Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027
12	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/16/2025	1/15/2026
13	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/16/2025	1/15/2026
14	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/20/2025	1/19/2026
15	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	9/10/2024	9/9/2025
16	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/19/2024	11/18/2025
17	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	5/8/2025	5/7/2026
18	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	11/19/2024	11/18/2025
3	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	5/8/2025	5/7/2026
7	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
2	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
19	Measurement Software	Tonscend	JS32-RSE 4.0.0.1	SUWI-02-09-06	NCR	NCR
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026

Remark: NCR=No Calibration Requirement.

4 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	1%
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	1%
7	Conduction Emission	± 2.90dB (150kHz to 30MHz)
8	Radiated Emission	± 3.13dB (9k -30MHz)
		± 4.8dB (30M -1GHz)
		± 4.8dB (1GHz to 18GHz)
		± 4.80dB (Above 18GHz)
Remark: The U _{lab} (lab Uncertainty) is less than U _{CISPR/ETSI} (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		


5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15 Section 15.203
The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is F9J2A: 5150MHz to 5250MHz: -2.0 dBi 5250MHz to 5350MHz: -0.3dBi 5470MHz to 5725MHz:1.2dBi 5725MHz to 5850MHz: 1.0dBi <i>Note:</i> <i>The antenna gain are derived from the gain information report provided by the manufacturer.</i> <i>Remark:</i> <i>As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.</i>	


5.2 AC Power Line Conducted Emissions


Test Requirement:	47 CFR Part 15 Section 15.207		
Test Method:	ANSI C63.10:2013 Section 6.2		
Test Frequency Range:	150kHz to 30MHz		
Receiver Setup:	RBW = 9kHz, VBW = 30kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		

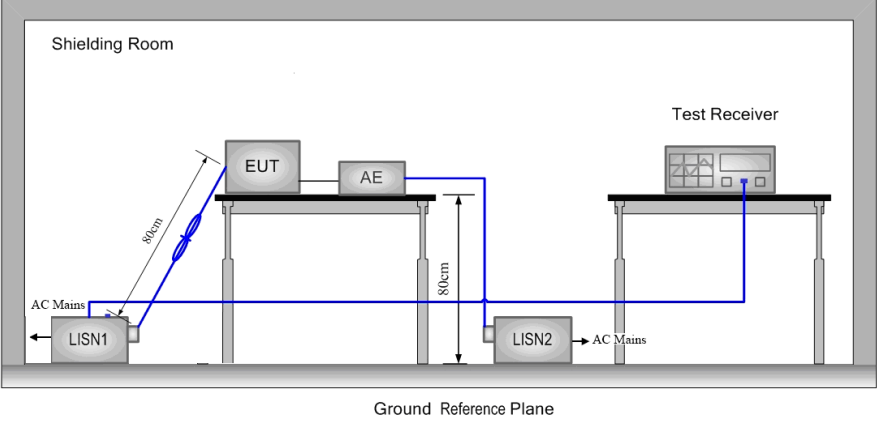Test Setup:	
Test Mode:	BT Link + WIFI 2.4G Link + WIFI 5G Link
Instruments Used:	Refer to section 6 for details.
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

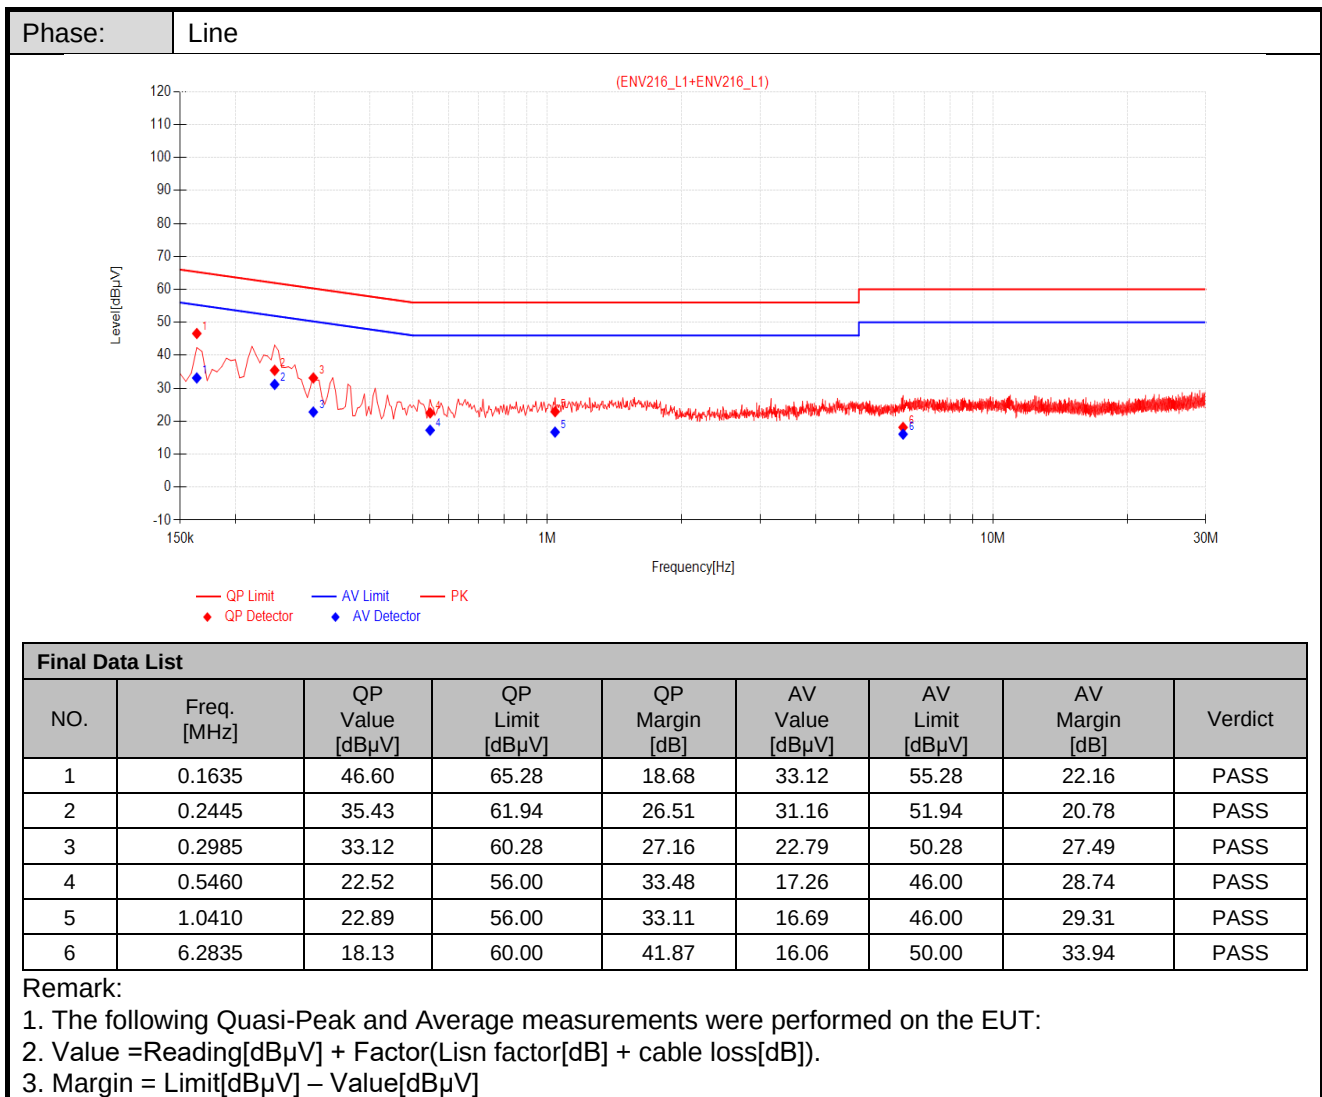

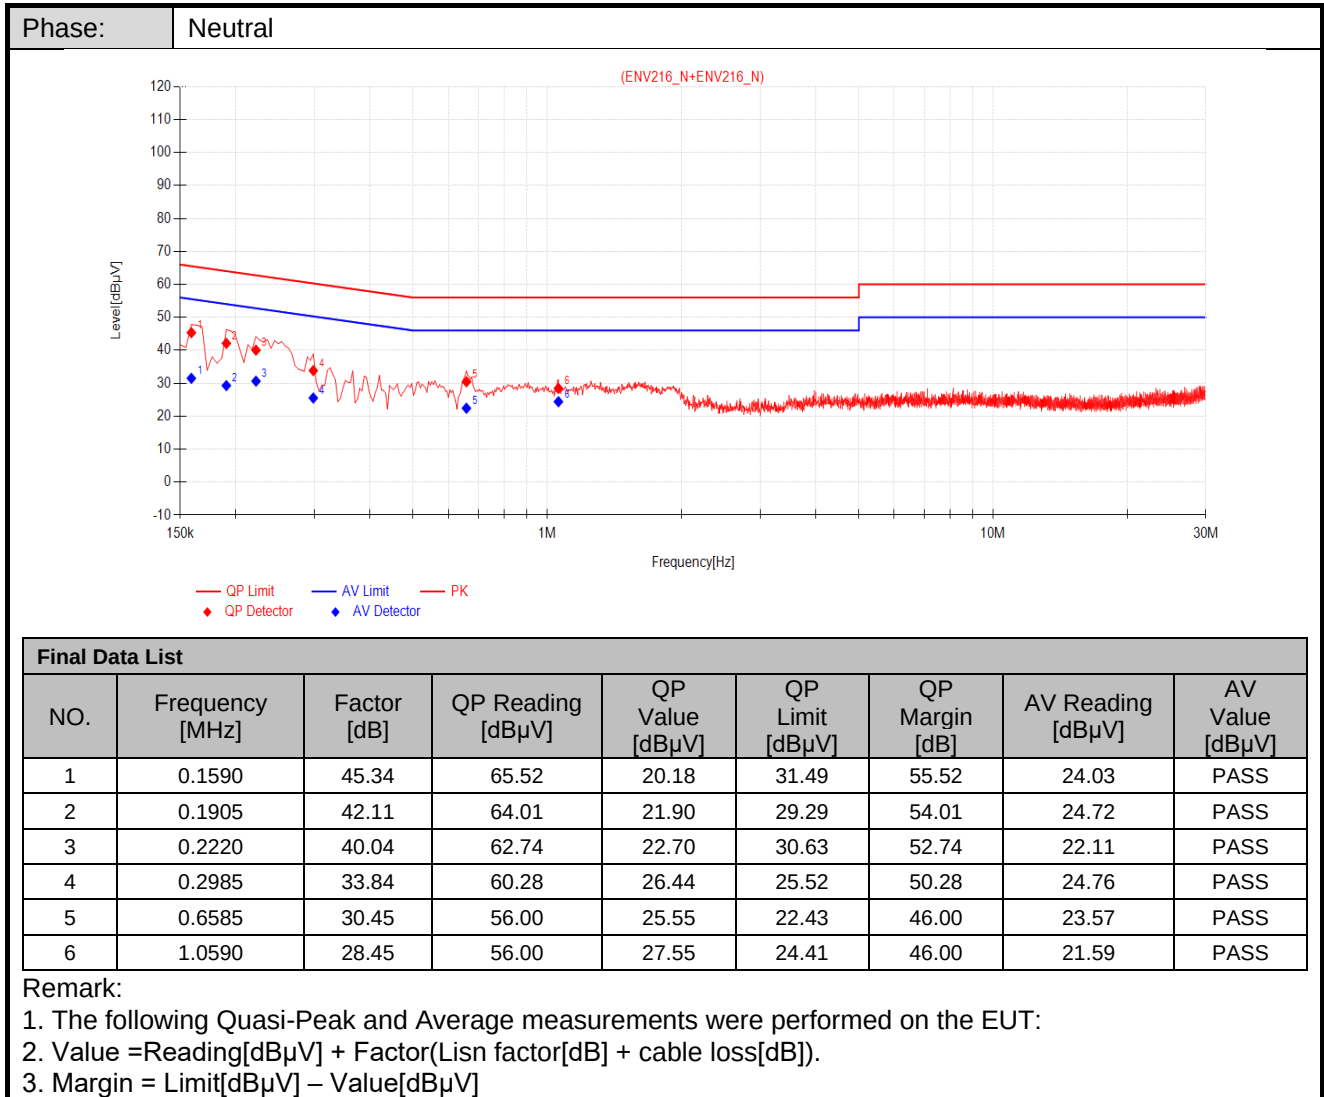

5.3 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15 Section 15.205 and 15.209
Test Method:	ANSI C63.10:2013 Section 6.4/6.5/6.6
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Test frequency:	9kHz ~ 40GHz(or 10 Harmonic)

Test Setup:

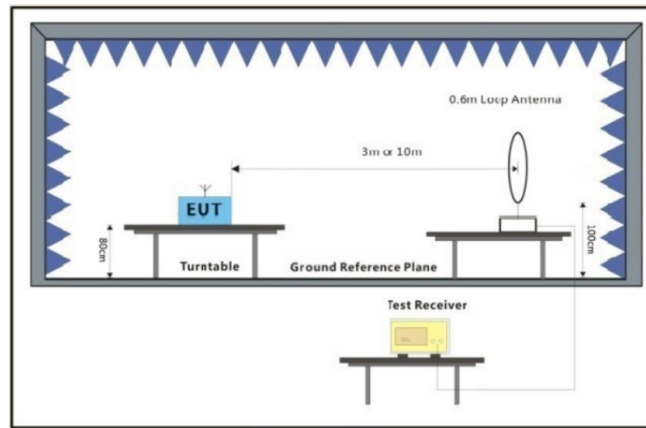


Figure 1. 9kHz to 30MHz

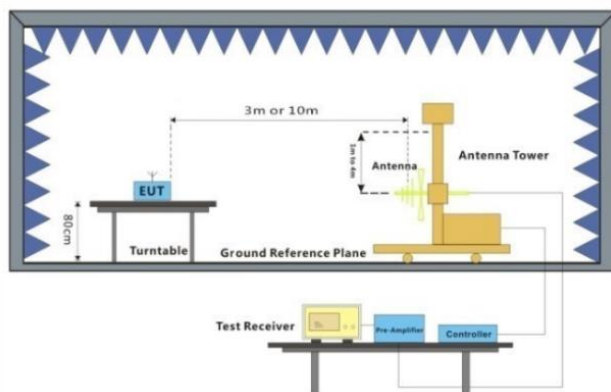


Figure 1. 30MHz to 1GHz

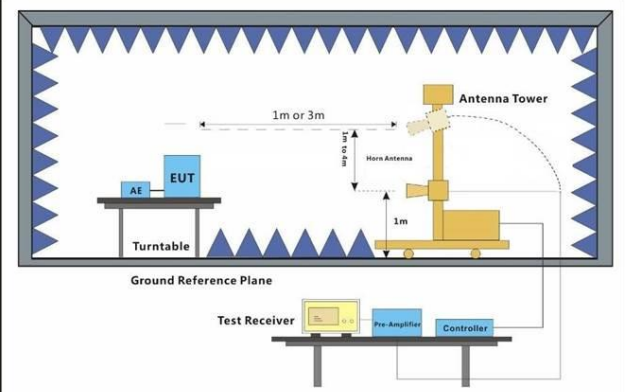


Figure 2. Above 1 GHz


Test Procedure:	- For below 1GHz test, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - For above 1GHz test, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (Distance from antenna to EUT is 1m for measurements >18GHz). - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and
-----------------	---

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Test the EUT in the outermost channels. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete. j. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported k. The disturbance above 18GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. l. At a measurement distance of 1 meter the limit line was increased by $20 \times \text{LOG}(3/1) = 9.54 \text{ dB}$.
Test Configuration:	Measurements below 30MHz • RBW = 10 kHz • VBW = 30 kHz • Detector = Peak & Average & Quasi-peak • Trace mode = max hold Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq 3 \text{ MHz}$ • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10Hz, when duty cycle is no less than 98 percent. • VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Refer to section 3.7 for details. For below 1GHz part, through pre-scan all channels, but only the worst case is recorded in the report.
Instruments Used:	Refer to section 6 for details.
Test Results:	Pass

5.4 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10:2013 Section 12.7		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

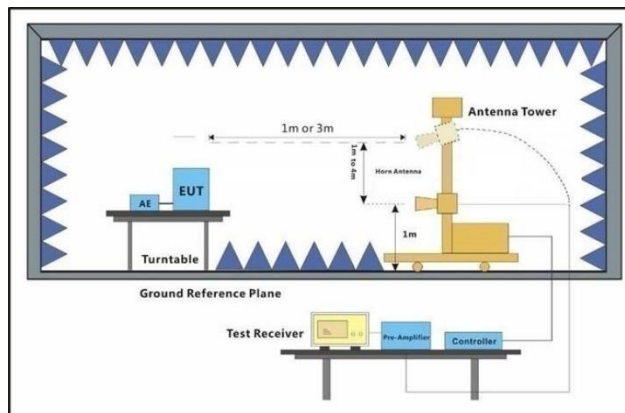

Test Procedure:	- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel. - Test the EUT in the outermost channels. - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz

	• RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Refer to section 3.7 for details.
Instruments Used:	Refer to section 6 for details.
Test Results:	Pass

6 Photographs - Setup Photos

Refer to SUCR2508000804AT Appendix Setup Photos


7 Appendix

Radiated Spurious Emissions


Radiated emission below 1GHz

Worst case Mode:

802.11ac80_Channel 106

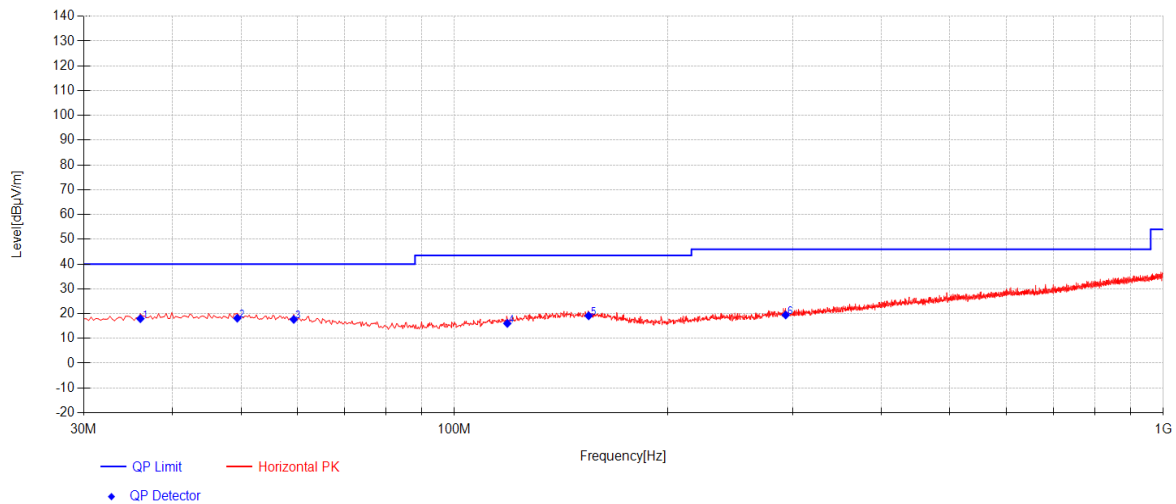

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.0625	37.97	17.95	40.00	22.05	185	234	Horizontal
2	49.4	37.52	18.14	40.00	21.86	235	25	Horizontal
3	59.3425	37.76	17.65	40.00	22.35	179	35	Horizontal
4	118.755	36.86	16.03	43.50	27.47	156	244	Horizontal
5	154.645	37.89	19.11	43.50	24.39	248	220	Horizontal
6	293.355	37.85	19.45	46.00	26.55	188	274	Horizontal

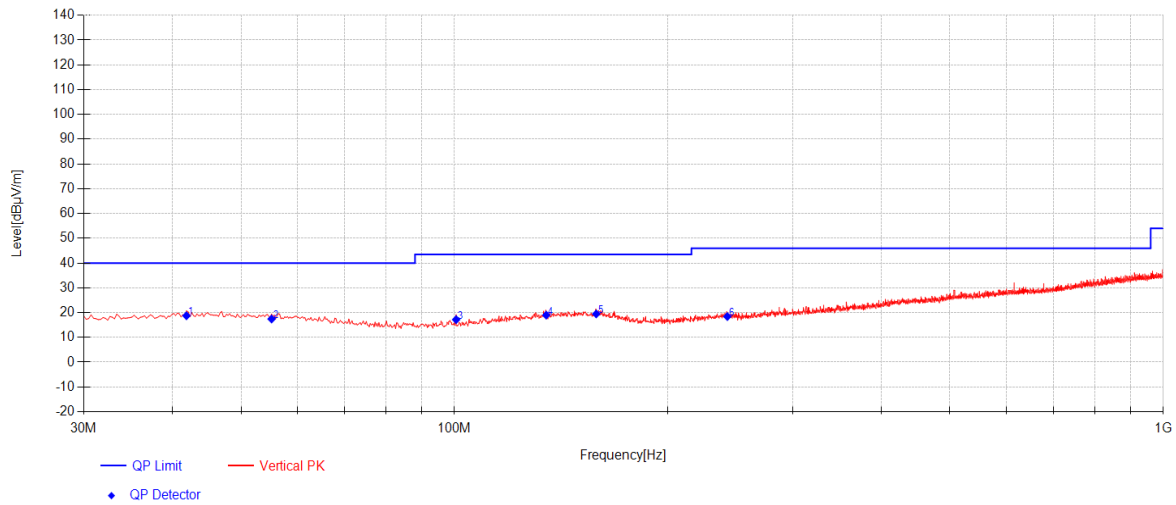

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	41.8825	38.04	18.72	40.00	21.28	198	231	Vertical
2	55.22	37.22	17.43	40.00	22.57	253	80	Vertical
3	100.5675	39.90	17.16	43.50	26.34	177	20	Vertical
4	134.76	38.37	18.97	43.50	24.53	249	110	Vertical
5	158.525	38.20	19.46	43.50	24.04	158	65	Vertical
6	242.6725	37.97	18.39	46.00	27.61	208	86	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:


$$\text{Value} = \text{Reading}(\text{dB}\mu\text{V}) + \text{AF}(\text{dB}/\text{m}) + \text{Factor}(\text{dB})$$

$$\text{AF} = \text{Antenna Factor}(\text{dB}/\text{m})$$


$$\text{Factor} = \text{Cable Factor}(\text{dB}) - \text{Preamplifier gain}(\text{dB})$$

$$\text{Margin} = \text{Limit}(\text{dB}\mu\text{V}/\text{m}) - \text{Value}(\text{dB}\mu\text{V}/\text{m})$$
- All channels have been tested, but only the worst case data displayed in this report.

Transmitter emission Above 1GHz 802.11ac80_Channel 106

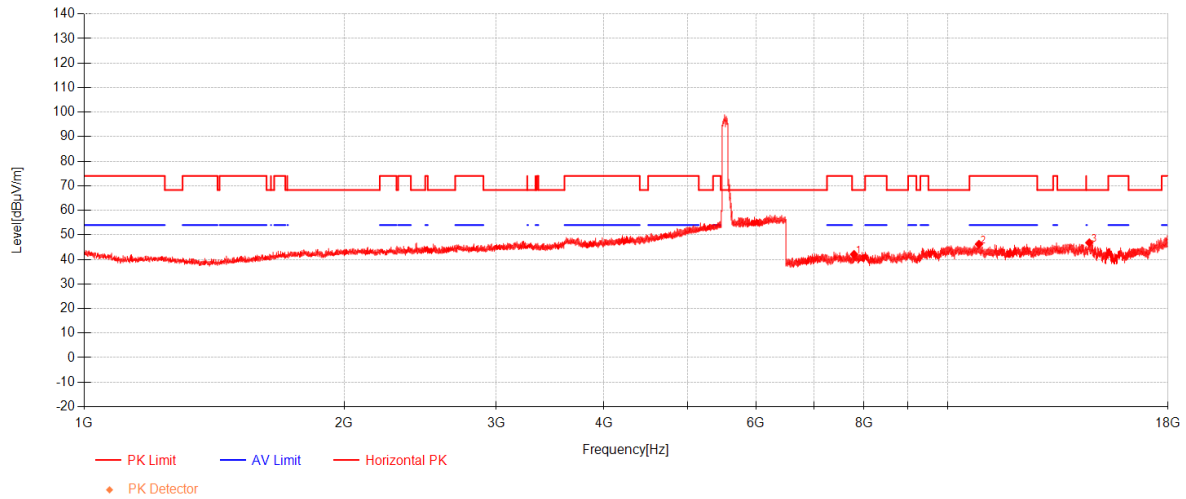

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7791.8333	50.66	36.34	-44.92	42.08	68.30	26.22	Horizontal
2	10871.437	47.05	39.41	-40.25	46.21	74.00	27.79	Horizontal
3	14592.166	44.72	40.24	-38.15	46.81	68.30	21.49	Horizontal

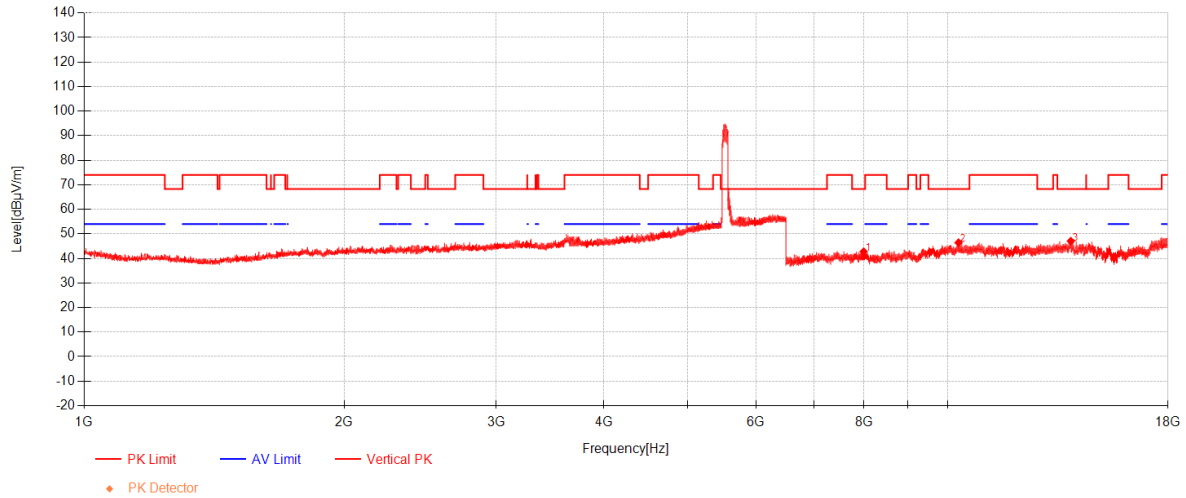

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7994.0417	50.75	36.30	-44.31	42.74	68.30	25.56	Vertical
2	10295.958	48.54	39.01	-41.12	46.43	68.30	21.87	Vertical
3	13887.791	45.27	40.13	-38.36	47.04	68.30	21.26	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:


$$\text{Level} = \text{Reading}(\text{dB}\mu\text{V}) + \text{AF}(\text{dB}/\text{m}) + \text{Factor}(\text{dB})$$

$$\text{AF} = \text{Antenna Factor}(\text{dB}/\text{m})$$

$$\text{Factor} = \text{Cable Factor}(\text{dB}) - \text{Preamplifier gain}(\text{dB})$$


$$\text{Margin} = \text{Limit}(\text{dB}\mu\text{V}/\text{m}) - \text{Level}(\text{dB}\mu\text{V}/\text{m})$$
- All channels have been tested, but only the worst case data displayed in this report.
- Both peak and average measured complies with the limit line, so test result is "PASS"

Restricted bands around fundamental frequency 802.11ac80_Channel 106

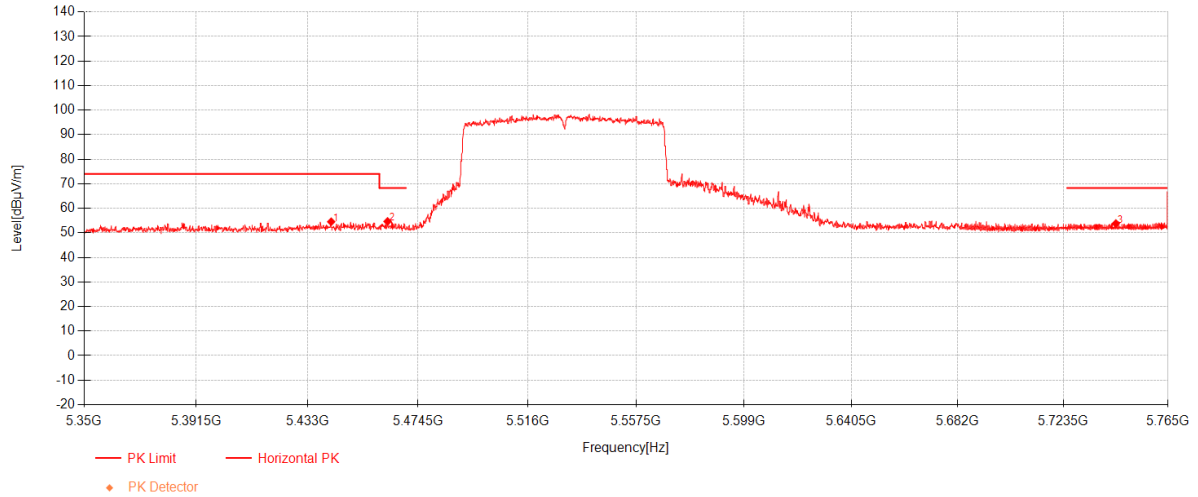


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5441.8738	39.00	32.44	-16.91	54.53	74.00	19.47	Horizontal
2	5463.0625	39.16	32.50	-17.02	54.64	68.30	13.66	Horizontal
3	5744.3	37.90	32.70	-16.78	53.81	68.30	14.49	Horizontal

802.11ac80_Channel 106

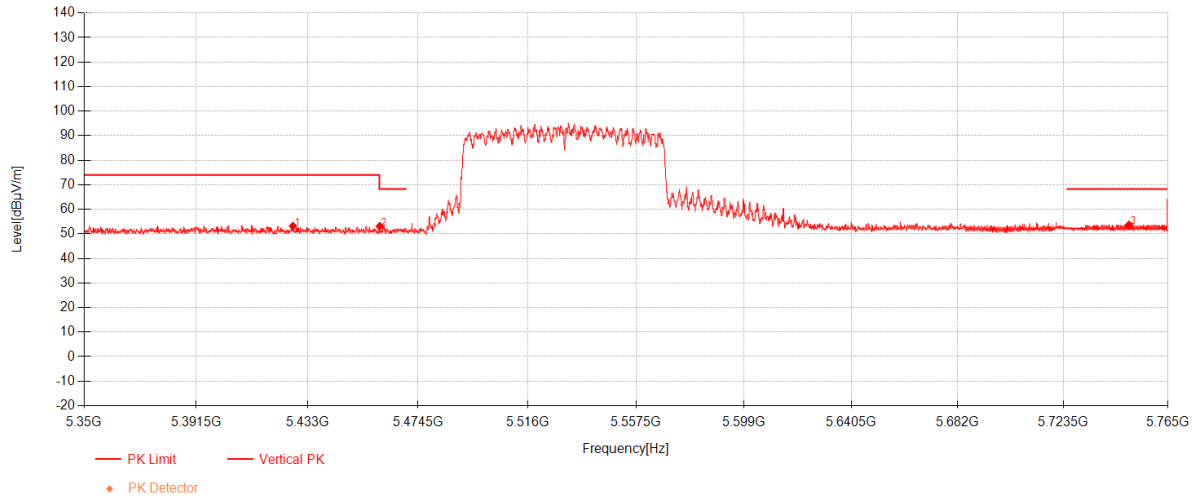


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5427.5525	37.61	32.40	-16.83	53.18	74.00	20.82	Vertical
2	5460.1312	37.65	32.49	-17.00	53.13	68.30	15.17	Vertical
3	5749.5	37.75	32.70	-16.76	53.69	68.30	14.61	Vertical

802.11ac80_Channel 106

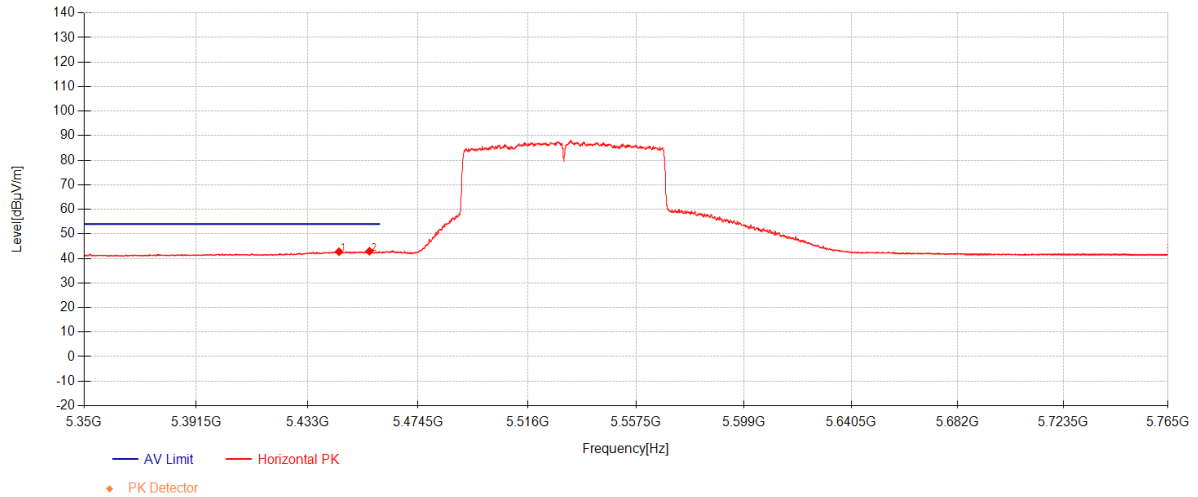

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5444.805	27.21	32.45	-16.92	42.73	54.00	11.27	Horizontal
2	5456.2788	27.44	32.48	-16.98	42.93	54.00	11.07	Horizontal

802.11ac80_Channel 106

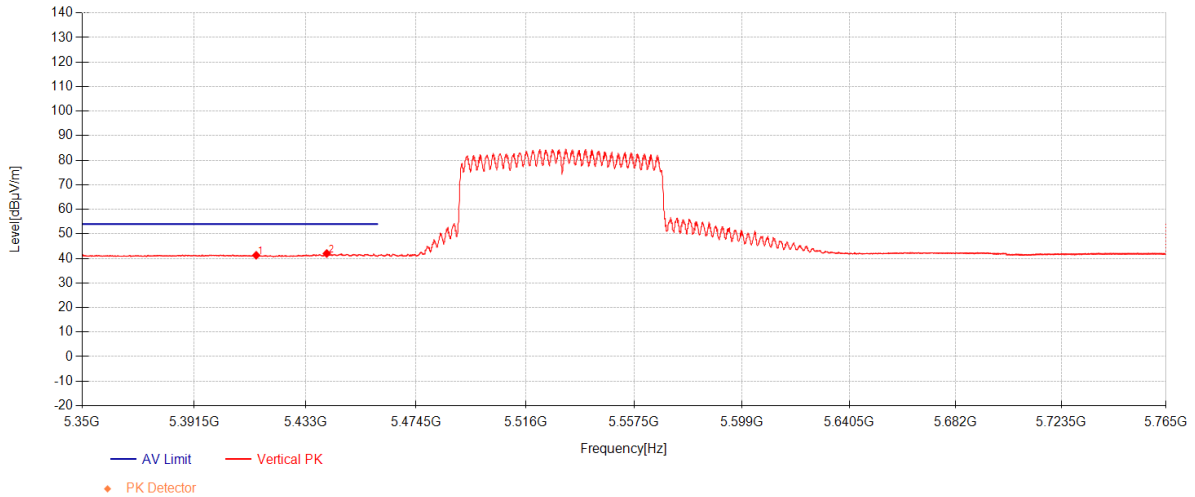

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5414.5712	25.68	32.36	-16.76	41.28	54.00	12.72	Vertical
2	5440.9525	26.48	32.43	-16.90	42.01	54.00	11.99	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

$$\text{Level} = \text{Reading (dB}\mu\text{V)} + \text{AF (dB/m)} + \text{Factor (dB)}$$

$$\text{AF} = \text{Antenna Factor (dB/m)}$$

$$\text{Factor} = \text{Cable Factor (dB)} - \text{Preamplifier gain (dB)}$$

$$\text{Margin} = \text{Limit (dB}\mu\text{V/m)} - \text{Level (dB}\mu\text{V/m)}$$
- Both peak and average measured complies with the limit line, so test result is "PASS"

---End of Report---