



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247



TEST REPORT

For

Shanghai Sunmi Technology Co.,Ltd.

Room 605, Block 7, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai 200433 China

FCC ID: 2AH25FW010

Report Type: Original Report	Product Type: Wireless Router
Test Engineer: Max Min 	
Report Number: RKSA190613001-00C	
Report Date: 2019-07-31 Kyle Xu	
Reviewed By: RF Leader 	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	13
EXTERNAL I/O CABLE.....	13
BLOCK DIAGRAM OF TEST SETUP	14
SUMMARY OF TEST RESULTS	16
TEST EQUIPMENT LIST	17
FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)	18
FCC §15.203 - ANTENNA REQUIREMENT.....	20
APPLICABLE STANDARD	20
ANTENNA CONNECTOR CONSTRUCTION	20
FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS.....	21
APPLICABLE STANDARD	21
EUT SETUP	21
EMI TEST RECEIVER SETUP.....	21
TEST PROCEDURE	21
CORRECTED FACTOR & OVER LIMIT CALCULATION	22
TEST RESULTS SUMMARY	22
TEST DATA	22
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	25
APPLICABLE STANDARD	25
EUT SETUP	25
EMI TEST RECEIVER SETUP.....	26
TEST PROCEDURE	26
CORRECTED AMPLITUDE & MARGIN CALCULATION	26
TEST RESULTS SUMMARY	26
TEST DATA	27
FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH	75
APPLICABLE STANDARD	75
TEST PROCEDURE	75
TEST DATA	75
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	95
APPLICABLE STANDARD	95
TEST PROCEDURE	95
TEST DATA	95
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	97
APPLICABLE STANDARD	97

TEST PROCEDURE	97
TEST DATA	97
FCC §15.247(e) - POWER SPECTRAL DENSITY	110
APPLICABLE STANDARD	110
TEST PROCEDURE	110
TEST DATA	110

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Shanghai Sunmi Technology Co.,Ltd.
Tested Model:	FW010
Product Type:	Wireless Router
Dimension:	230mm (L)*166mm (W)*50.2mm(H)
Power Supply:	AC100~240V

**All measurement and test data in this report was gathered from production sample serial number: 20190613001. (Assigned by the BACL. The EUT supplied by the applicant was received on 2019-06-13.*

Objective

This report is prepared on behalf of *Shanghai Sunmi Technology Co.,Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions' rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.407 NII submissions with FCC ID: 2AH25FW010.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliant Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11;

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For Conducted Test:

802.11b/g: each transmit chains were tested

802.11n: each transmit chains were tested

For Radiated Test:

For 802.11b/g: SISO for each transmit chain

For 802.11n: MIMO for three transmit chains

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: QRCT

Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Power Level		
		Chain 0	Chain 1	Chain 2
802.11b	1Mbps	23.0	23.0	23.0
802.11g	6 Mbps	22.5	22.5	22.5
802.11n-HT20	MCS0	22.5	22.5	22.5
802.11n-HT40	MCS0	22.0	22.0	22.0

Duty Cycle (Chain 0):


802.11b Mode Middle Channel

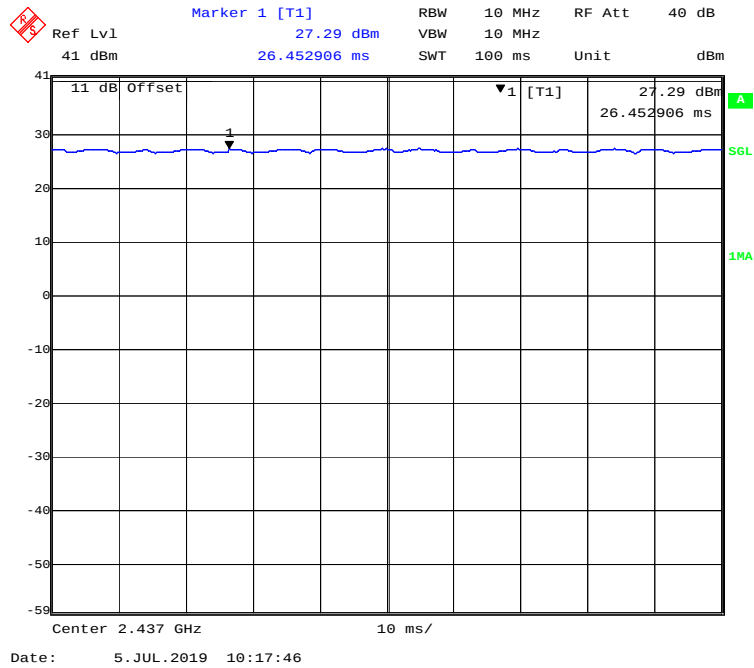


802.11g Mode Middle Channel

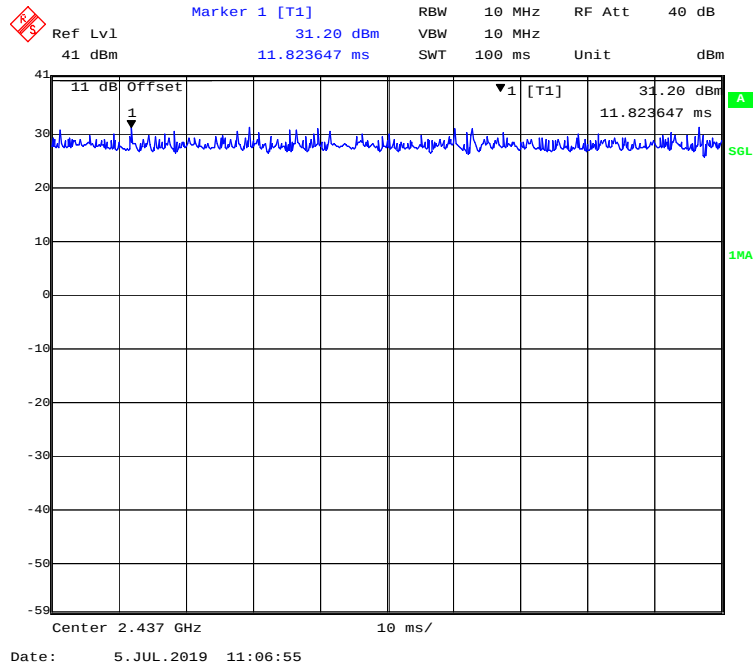

802.11n-HT20 Mode Middle Channel

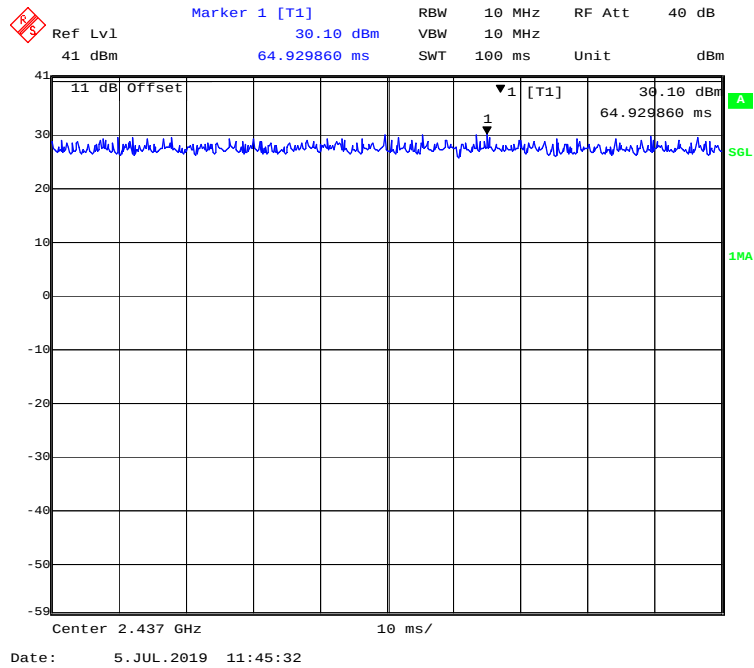


802.11n-HT40 Mode Middle Channel

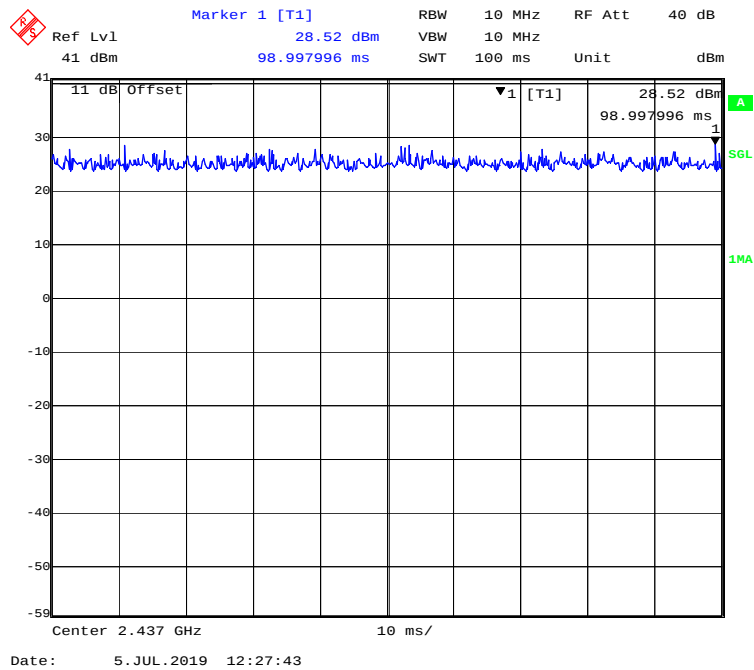


Duty Cycle (Chain1):


802.11b Mode Middle Channel

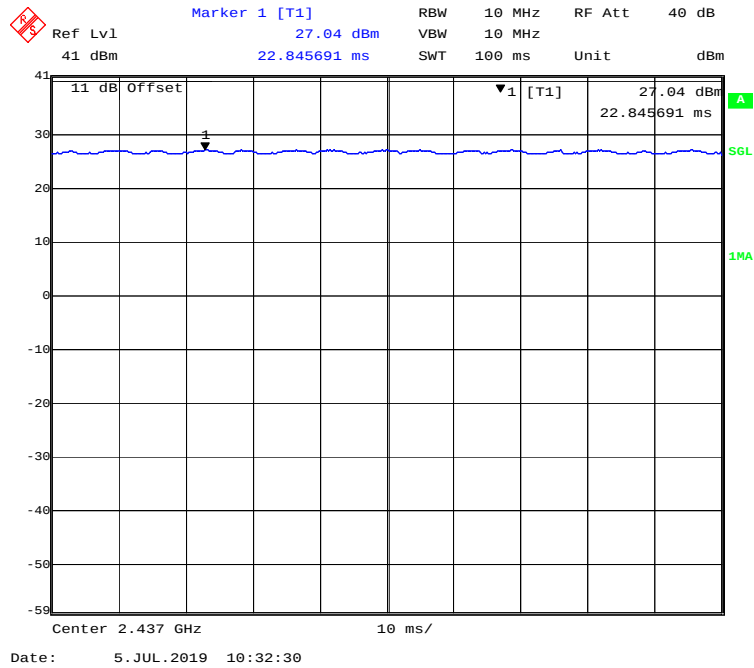


802.11g Mode Middle Channel

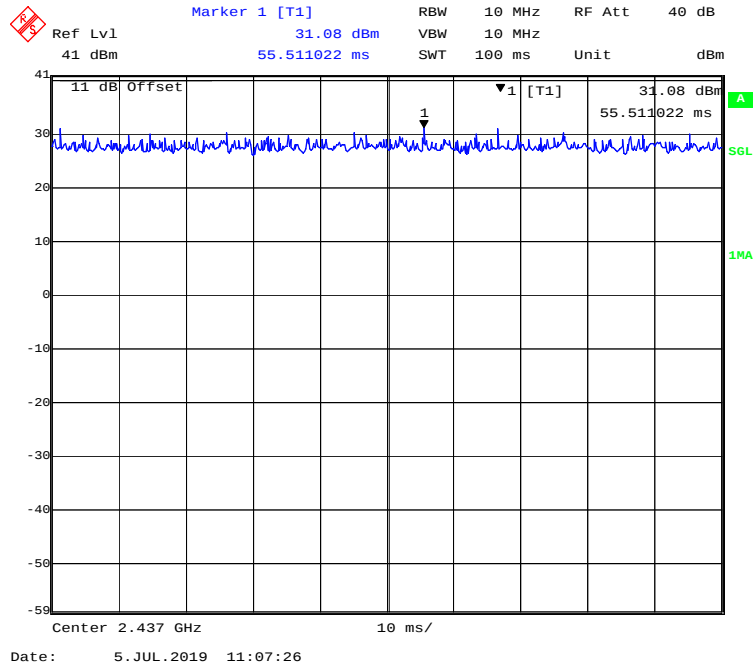

802.11n-HT20 Mode Middle Channel

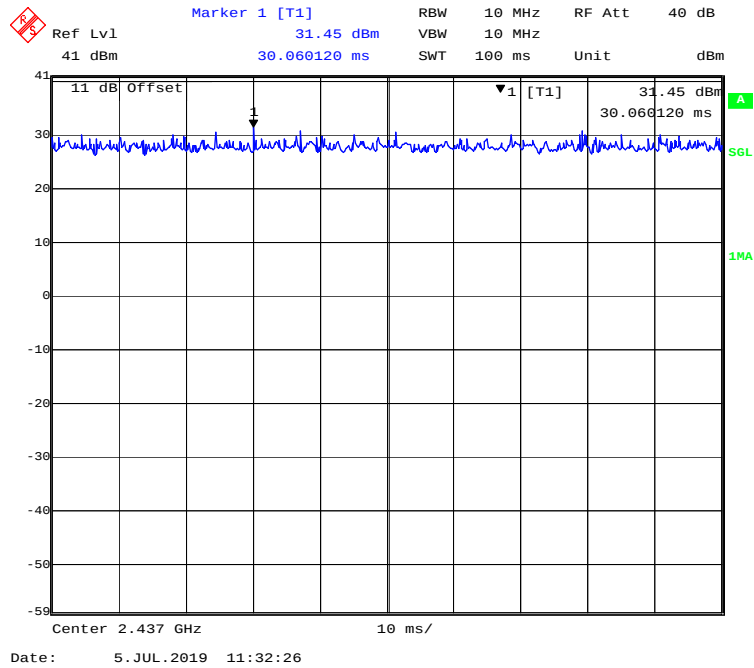


802.11n-HT40 Mode Middle Channel

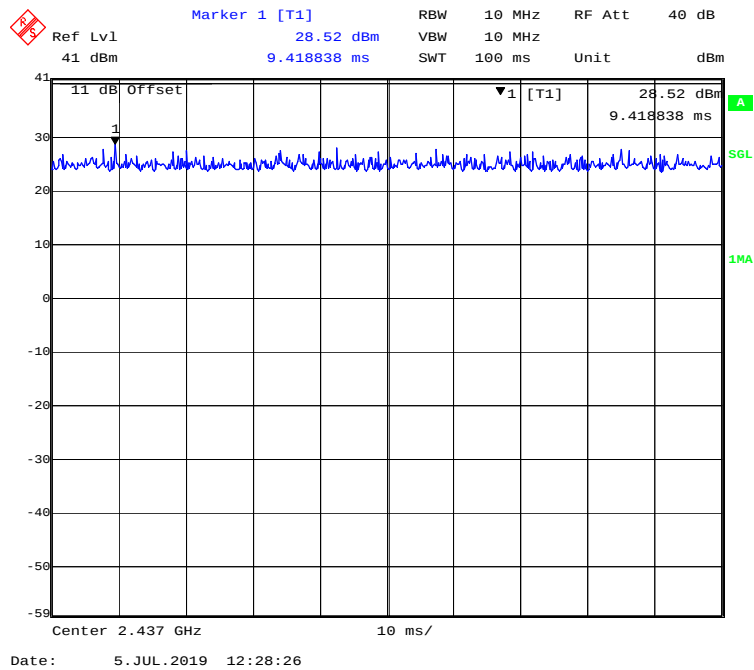


Duty Cycle (Chain2):


802.11b Mode Middle Channel

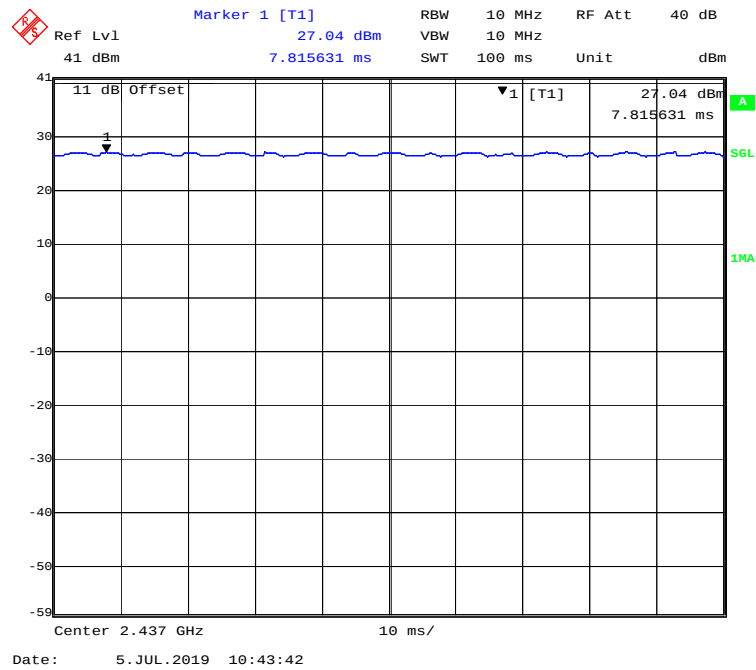


802.11g Mode Middle Channel

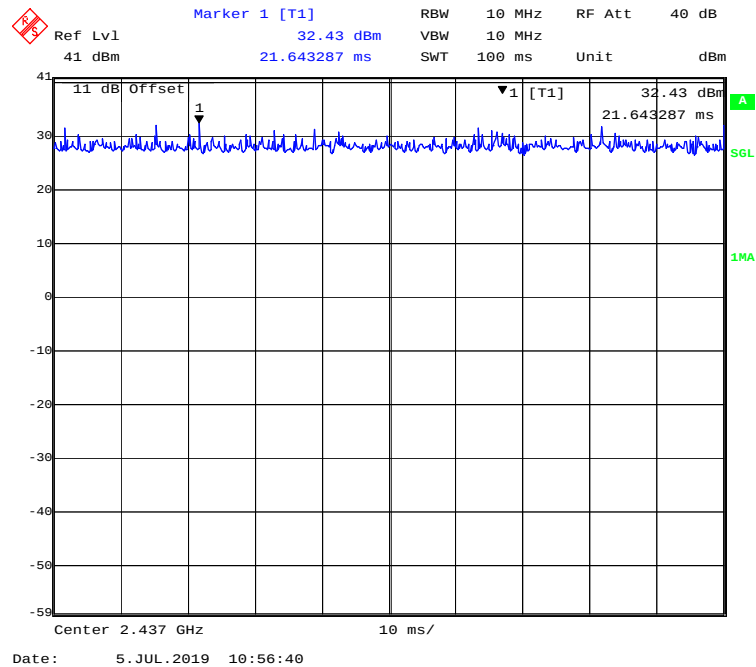

802.11n-HT20 Mode Middle Channel

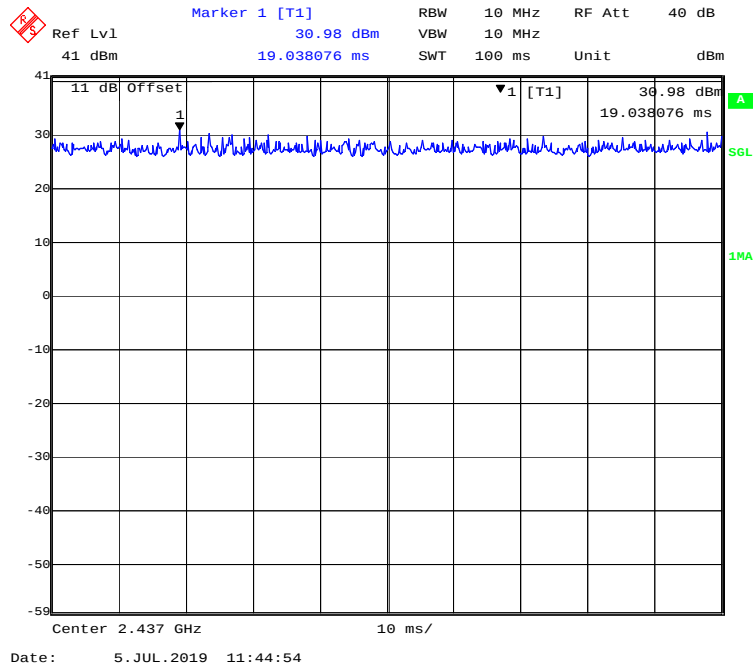

802.11n-HT40 Mode Middle Channel

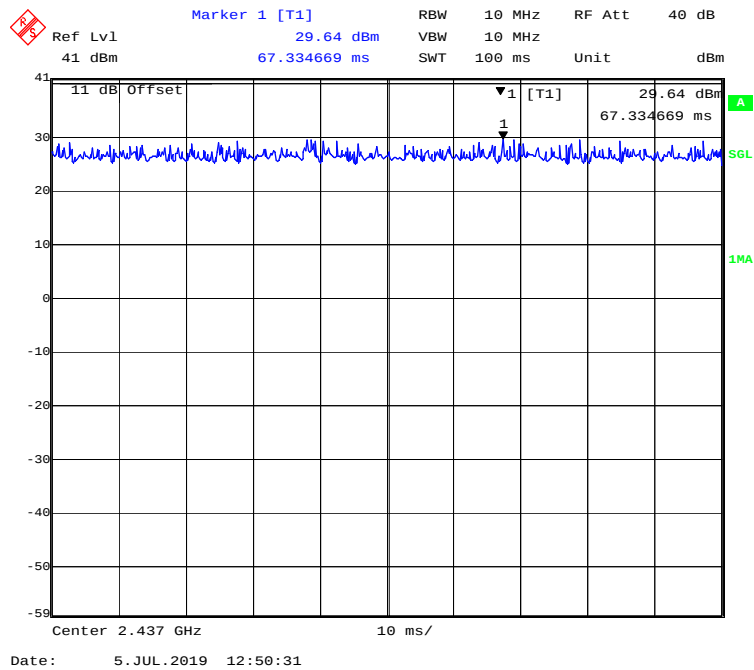

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
802.11n-HT40	100	/	/	0

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook1	GX620	D65874152
DELL	Notebook2	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
Sandisk	USB flash disk	16G	/

External I/O Cable


Cable Description	Length (m)	From Port	To
RJ45 Cable	1.0	EUT	Notebook1
RJ45 Cable	10.0	EUT	Notebook2
Power Cable	1.0	Notebook	Adapter
Power Cable	1.0	Adapter	AC Source
Power Cable	1.0	EUT	AC Source

Block Diagram of Test Setup


For Conducted Emissions:

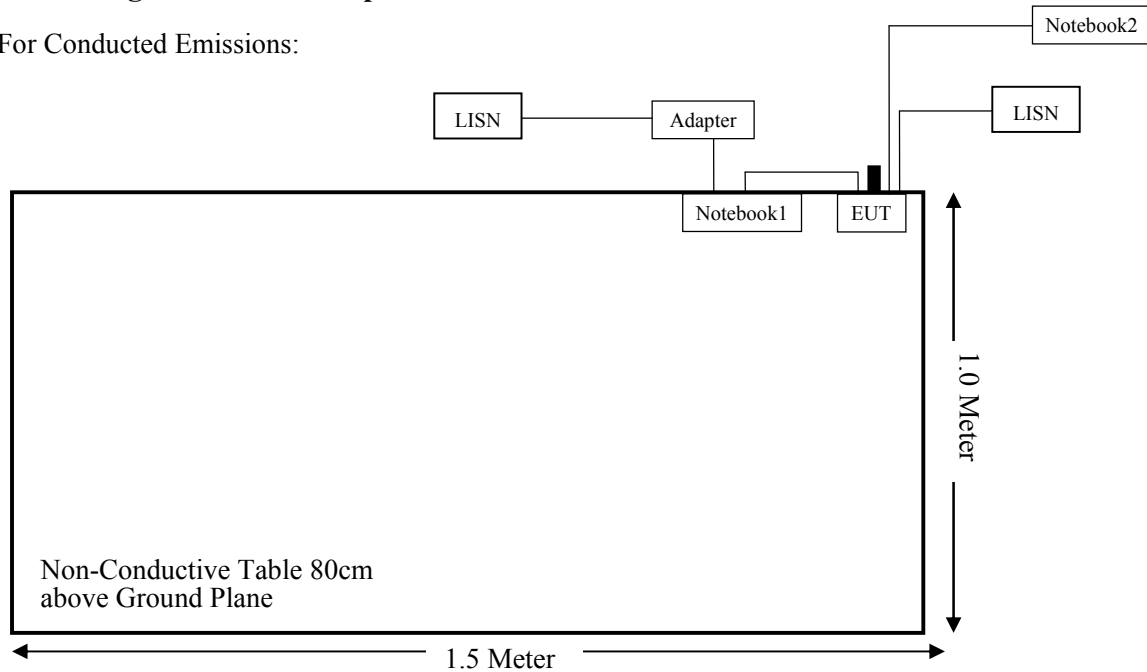

For Radiated Emissions(Below 1GHz):

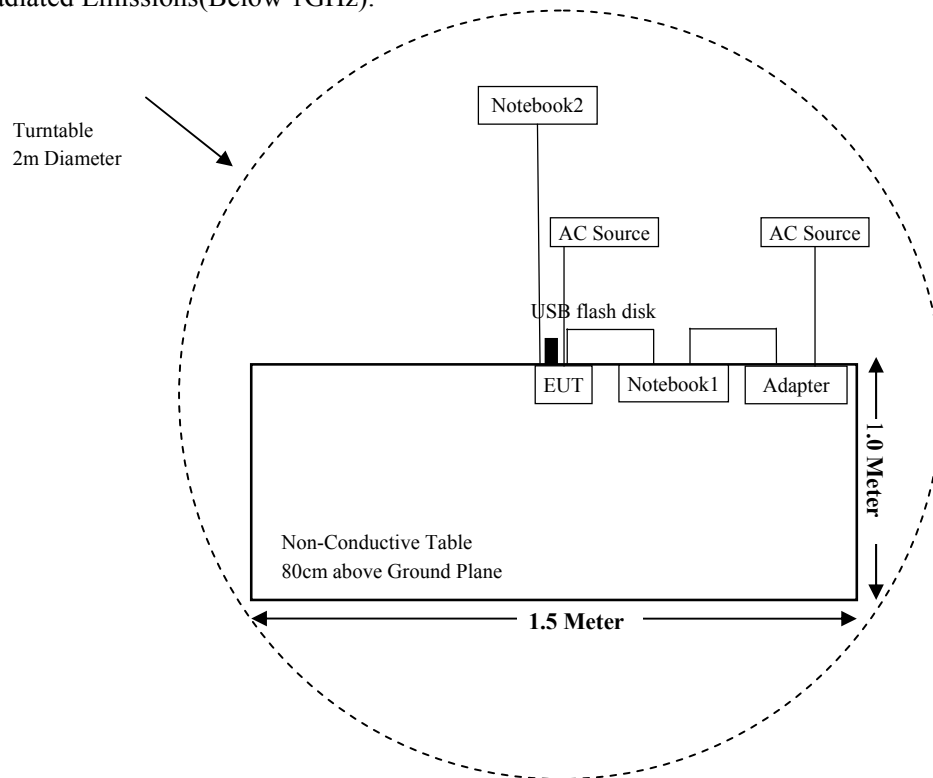

For Radiated Emissions(Above 1GHz):

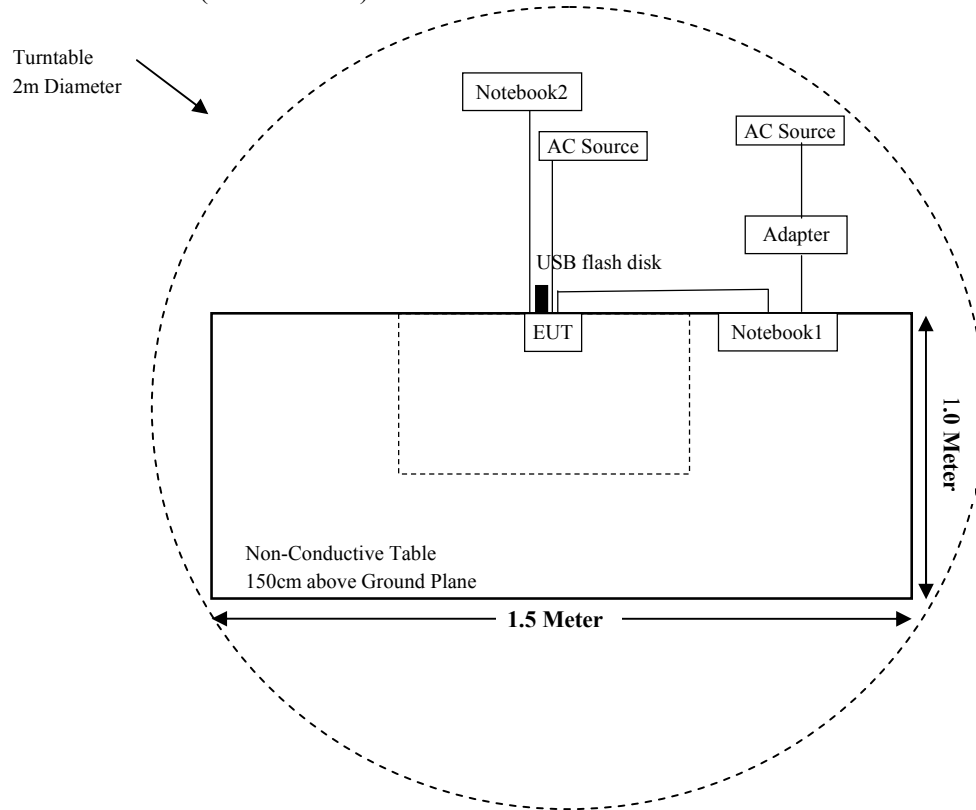

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-14	2019-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2018-08-05	2019-08-04
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-30	2019-11-29
Agilent	Power Meter	N1912A	MY5000492	2018-11-18	2019-11-17
Agilent	Power Sensor	N1921A	MY54210024	2018-11-18	2019-11-17
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Sunmi	RF Cable	Sunmi C01	C01	Each Time	N/A
Conducted Emission Test					
ROHDE&SCHWARZ	EMI Test receiver	ESR	1316.3003K03-102454-Qd	2019-03-13	2020-03-12
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2018-11-30	2019-11-29
Audix	Test Software	e3	V9	---	---
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)	MPE Ratio
		(dBi)	(numeric)	(dBm)	(mW)				
802.11b	2412~2462	3.67	2.33	24	251.19	20	0.1164	1.0	0.1164
802.11g		3.67	2.33	24	251.19	20	0.1164	1.0	0.1164
802.11n-HT20		3.67	2.33	29	794.33	20	0.3682	1.0	0.3682
802.11n-HT40	2422~2452	3.67	2.33	28	630.96	20	0.2924	1.0	0.2924
802.11a	5150~5250	5.13	3.26	25	316.23	20	0.2051	1.0	0.2051
	5725~5850	5.13	3.26	25	316.23	20	0.2051	1.0	0.2051
802.11ac20	5150~5250	5.13	3.26	28	630.96	20	0.4092	1.0	0.4092
	5725~5850	5.13	3.26	28	630.96	20	0.4092	1.0	0.4092
802.11n20	5150~5250	5.13	3.26	28	630.96	20	0.4092	1.0	0.4092
	5725~5850	5.13	3.26	28	630.96	20	0.4092	1.0	0.4092
802.11ac40	5150~5250	5.13	3.26	28	630.96	20	0.4092	1.0	0.4092
	5725~5850	5.13	3.26	28	630.96	20	0.4092	1.0	0.4092
802.11n40	5150~5250	5.13	3.26	28	630.96	20	0.4092	1.0	0.4092
	5725~5850	5.13	3.26	28	630.96	20	0.4092	1.0	0.4092
802.11ac80	5210	5.13	3.26	21	125.89	20	0.0816	1.0	0.0816
	5775	5.13	3.26	24	251.19	20	0.1629	1.0	0.1629

Note:

(1) The Tune-up output power was declared by the Manufacturer.

(2) 2.4GWi-Fi and 5G Wi-Fi can transmit simultaneously, The worst condition is 802.11n-HT20 Wi-Fi & 5G Wi-Fi, as below:

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.3682/1.00 + 0.4092/1.00 = 0.3682 + 0.4092 = 0.7774 < 1.0$$

Conclusion: The device meets MPE at distance 20cm.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has four monopole antennas for Wi-Fi, which was permanently attached; fulfill the requirement of this section. Please refer to the EUT photos.

ANT	Antenna Type	Max. Antenna Gain
0	Monopole(TX+RX)	3.67dBi
1	Monopole(TX+RX)	3.35dBi
2	Monopole(TX+RX)	3.33dBi
3	Monopole(RX Only)	2.65dBi


Result: Compliant.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

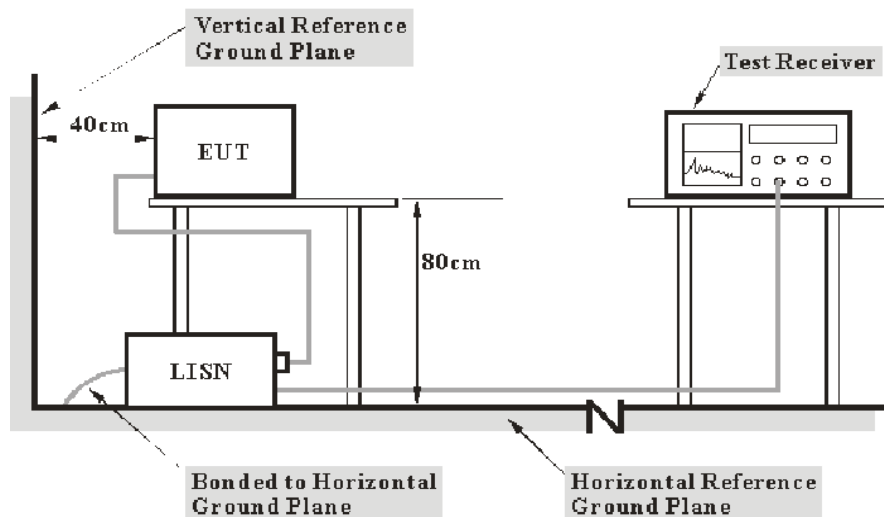

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	20.2 °C
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa


The testing was performed by Max Min on 2019-06-20.

EUT operation mode: MIMO Transmitting in 802.11n-HT20 mode low channel (worst case)

AC 120V/60 Hz, Line

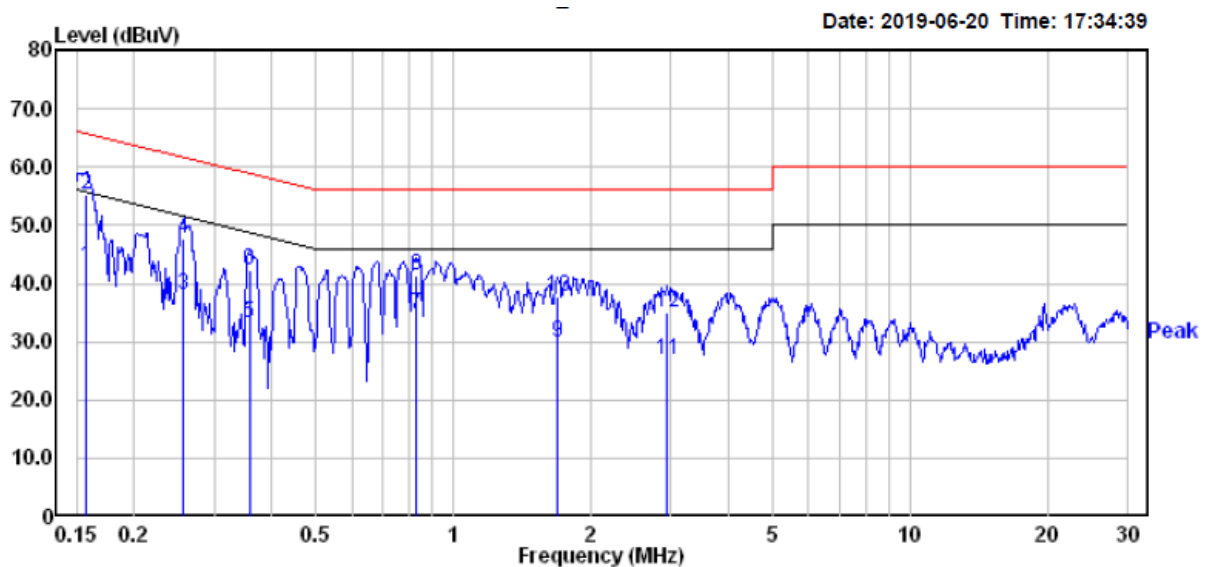

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.157	26.90	16.09	42.99	55.60	-12.61 Average
2	0.157	39.20	16.09	55.29	65.60	-10.31 QP
3	0.256	21.90	16.09	37.99	51.56	-13.57 Average
4	0.256	31.50	16.09	47.59	61.56	-13.97 QP
5	0.358	17.00	16.06	33.06	48.78	-15.72 Average
6	0.358	26.20	16.06	42.26	58.78	-16.52 QP
7	0.830	18.90	15.96	34.86	46.00	-11.14 Average
8	0.830	25.30	15.96	41.26	56.00	-14.74 QP
9	1.689	13.80	16.08	29.88	46.00	-16.12 Average
10	1.689	21.80	16.08	37.88	56.00	-18.12 QP
11	2.931	11.30	15.70	27.00	46.00	-19.00 Average
12	2.931	19.20	15.70	34.90	56.00	-21.10 QP

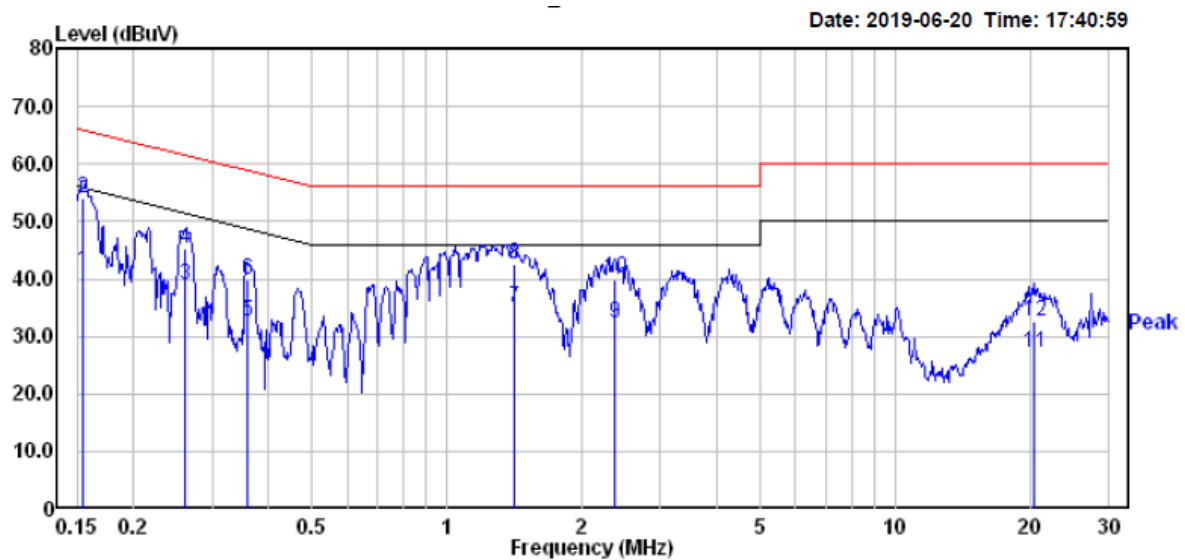AC 120V/60 Hz, Neutral



	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.154	25.30	16.09	41.39	55.78	-14.39	Average
2	0.154	38.00	16.09	54.09	65.78	-11.69	QP
3	0.260	22.80	16.09	38.89	51.42	-12.53	Average
4	0.260	29.30	16.09	45.39	61.42	-16.03	QP
5	0.360	16.40	16.06	32.46	48.74	-16.28	Average
6	0.360	23.70	16.06	39.76	58.74	-18.98	QP
7	1.418	19.00	16.08	35.08	46.00	-10.92	Average
8	1.418	26.40	16.08	42.48	56.00	-13.52	QP
9	2.371	16.60	15.80	32.40	46.00	-13.60	Average
10	2.371	24.20	15.80	40.00	56.00	-16.00	QP
11	20.377	11.00	16.11	27.11	50.00	-22.89	Average
12	20.377	16.50	16.11	32.61	60.00	-27.39	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

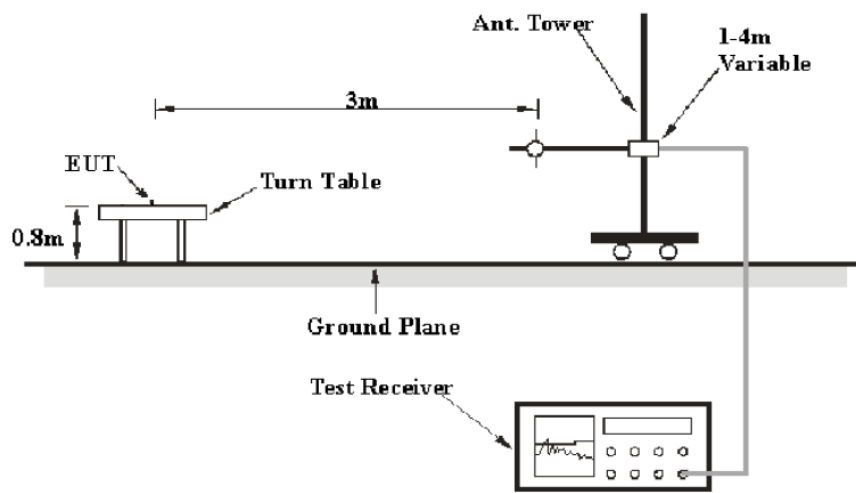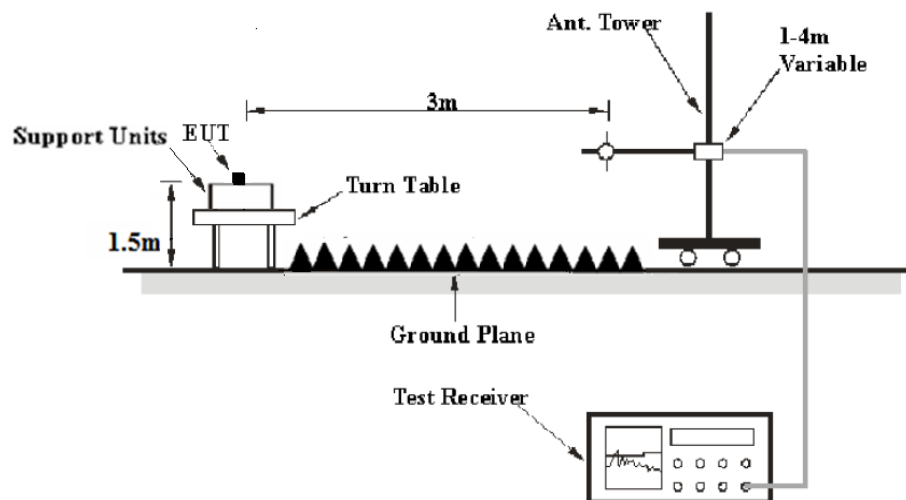EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30MHz - 1GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliant with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	21.6~25.2 °C
Relative Humidity:	48~51 %
ATM Pressure:	101.1~101.2kPa

The testing was performed by Max Min from 2019-07-05 to 2019-07-11.


EUT operation mode: Transmitting

Note: For bandage which was tested without amplifier and the test distance is 1.0m.

Spurious Emission Test:

30MHz-1GHz:

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **low channel of 802.11 n-HT20 MIMO mode in Z-axis of orientation** was recorded

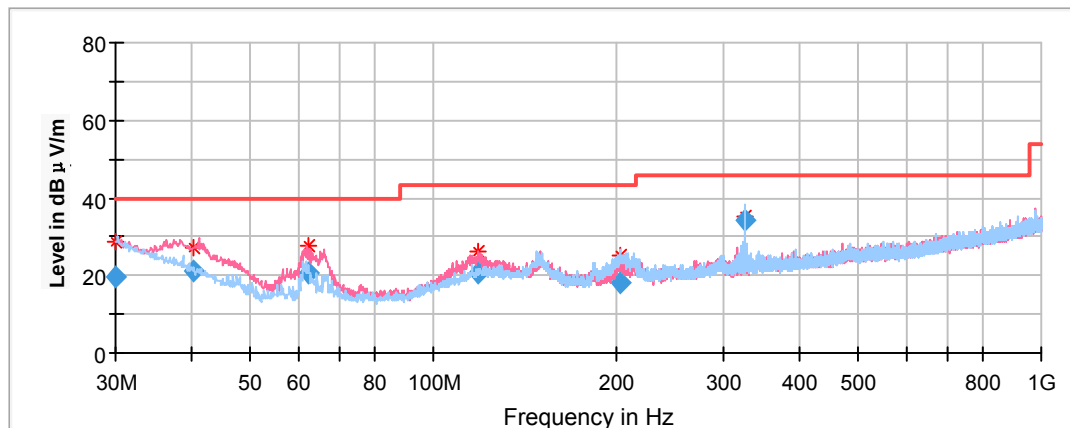

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
30.096648	19.39	100	H	34.0	-4.0	40.00	20.61
40.435300	21.28	100	V	235.0	-11.0	40.00	18.72
62.338200	20.82	200	V	196.0	-17.8	40.00	19.18
118.193550	20.85	100	V	135.0	-11.5	43.50	22.65
202.493150	18.23	200	H	10.0	-12.3	43.50	25.27
324.987150	34.21	100	H	270.0	-10.0	46.00	11.79

1GHz-18GHz:**802.11b Mode(Chain 0):**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV /m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV /m)

Low Channel: 2412MHz


Full Spectrum

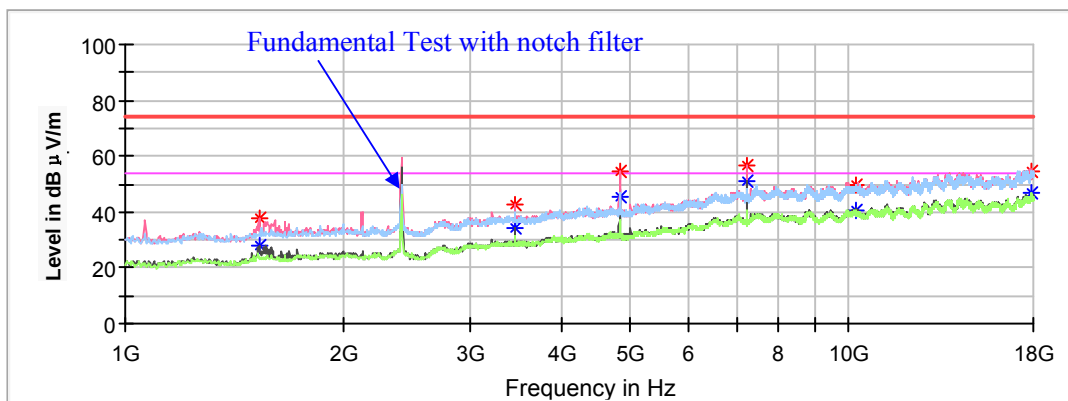

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1530.400000	---	28.22	250.0	V	170.0	-9.8	54.00	25.78
1530.400000	37.88	---	250.0	V	170.0	-9.8	74.00	36.12
3454.800000	---	34.54	200.0	V	223.0	-3.6	54.00	19.46
3454.800000	42.75	---	200.0	V	223.0	-3.6	74.00	31.25
4824.000000	---	45.76	250.0	V	34.0	-0.5	54.00	8.24
4824.000000	54.69	---	250.0	V	34.0	-0.5	74.00	19.31
7236.000000	---	51.06	150.0	V	60.0	5.7	54.00	2.94
7236.000000	56.45	---	150.0	V	60.0	5.7	74.00	17.55
10237.800000	---	40.76	100.0	V	168.0	8.6	54.00	13.24
10237.800000	49.65	---	100.0	V	168.0	8.6	74.00	24.35
17925.200000	---	47.13	150.0	H	103.0	13.6	54.00	6.87
17925.200000	54.41	---	150.0	H	103.0	13.6	74.00	19.59

Middle Channel: 2437MHz


Full Spectrum

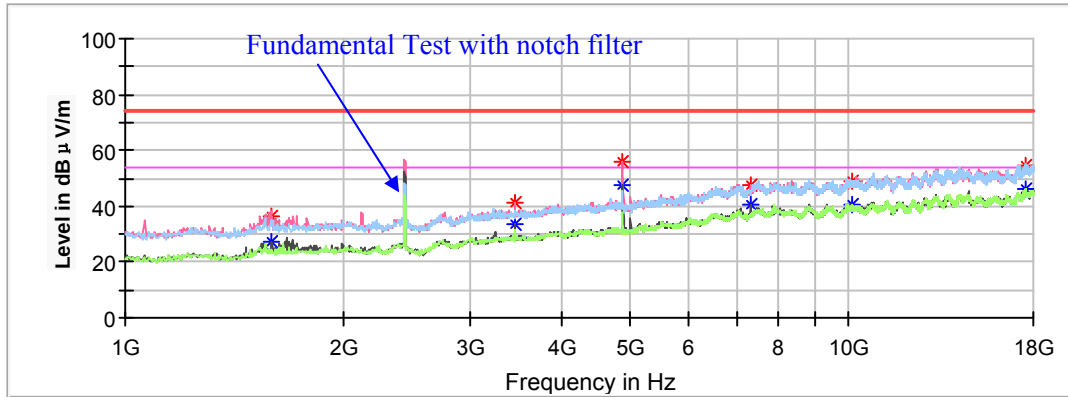

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1595.000000	---	27.13	250.0	V	0.0	-9.6	54.00	26.87
1595.000000	36.06	---	250.0	V	0.0	-9.6	74.00	37.94
3454.800000	---	33.70	200.0	V	73.0	-3.6	54.00	20.30
3454.800000	41.26	---	200.0	V	73.0	-3.6	74.00	32.74
4874.000000	---	47.68	250.0	V	34.0	-0.5	54.00	6.32
4874.000000	55.78	---	250.0	V	34.0	-0.5	74.00	18.22
7311.000000	---	40.68	100.0	V	316.0	5.8	54.00	13.32
7311.000000	47.84	---	100.0	V	316.0	5.8	74.00	26.16
10115.400000	---	40.47	200.0	V	329.0	8.4	54.00	13.53
10115.400000	48.98	---	200.0	V	329.0	8.4	74.00	25.02
17609.000000	---	46.05	250.0	H	280.0	14.1	54.00	7.95
17609.000000	54.29	---	250.0	H	280.0	14.1	74.00	19.71

High Channel: 2462MHz

Full Spectrum

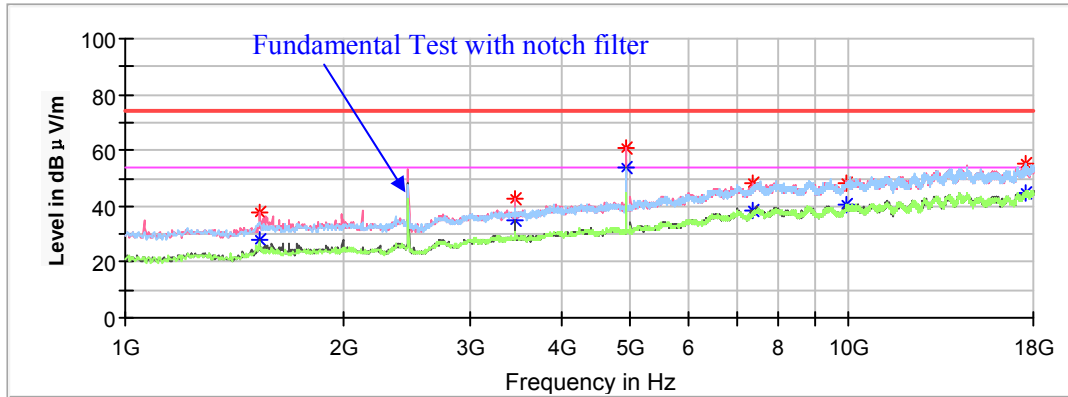

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1533.800000	---	28.30	250.0	V	132.0	-9.8	54.00	25.70
1533.800000	37.93	---	250.0	V	132.0	-9.8	74.00	36.07
3454.800000	---	34.74	250.0	V	71.0	-3.6	54.00	19.26
3454.800000	42.93	---	250.0	V	71.0	-3.6	74.00	31.07
4924.000000	---	52.94	250.0	V	81.0	-0.4	54.00	1.06
4924.000000	61.14	---	250.0	V	81.0	-0.4	74.00	12.86
7386.000000	---	38.68	100.0	V	160.0	5.9	54.00	15.32
7386.000000	48.51	---	100.0	V	160.0	5.9	74.00	25.49
9942.000000	---	40.87	150.0	H	142.0	8.2	54.00	13.13
9942.000000	48.16	---	150.0	H	142.0	8.1	74.00	25.84
17544.400000	---	45.00	250.0	H	60.0	14.2	54.00	9.00
17544.400000	55.48	---	250.0	H	60.0	14.2	74.00	18.52

802.11g Mode (Chain 0):


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

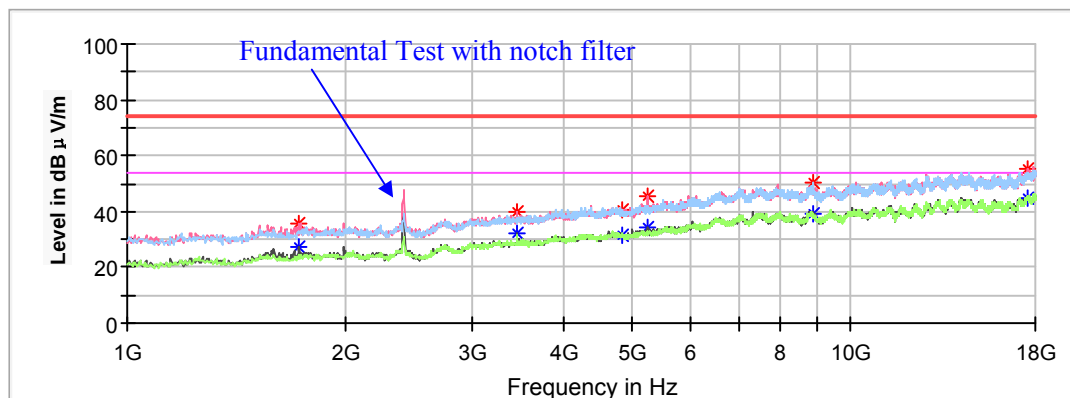

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1731.000000	---	27.46	150.0	V	97.0	-9.1	54.00	26.54
1731.000000	35.80	---	150.0	V	97.0	-9.1	74.00	38.20
3454.800000	---	32.39	100.0	V	228.0	-3.6	54.00	21.61
3454.800000	39.80	---	100.0	V	228.0	-3.6	74.00	34.20
4824.000000	---	31.77	150.0	V	263.0	-0.5	54.00	22.23
4824.000000	40.73	---	150.0	V	263.0	-0.5	74.00	33.27
5246.600000	---	34.10	100.0	V	299.0	0.6	54.00	19.90
5246.600000	45.53	---	100.0	V	299.0	0.6	74.00	28.47
8854.000000	---	38.87	100.0	H	350.0	7.3	54.00	15.13
8854.000000	50.09	---	100.0	H	350.0	7.3	74.00	23.91
17544.400000	---	44.96	150.0	V	263.0	14.2	54.00	9.04
17544.400000	54.97	---	150.0	V	263.0	14.2	74.00	19.03

Middle Channel: 2437MHz


Full Spectrum

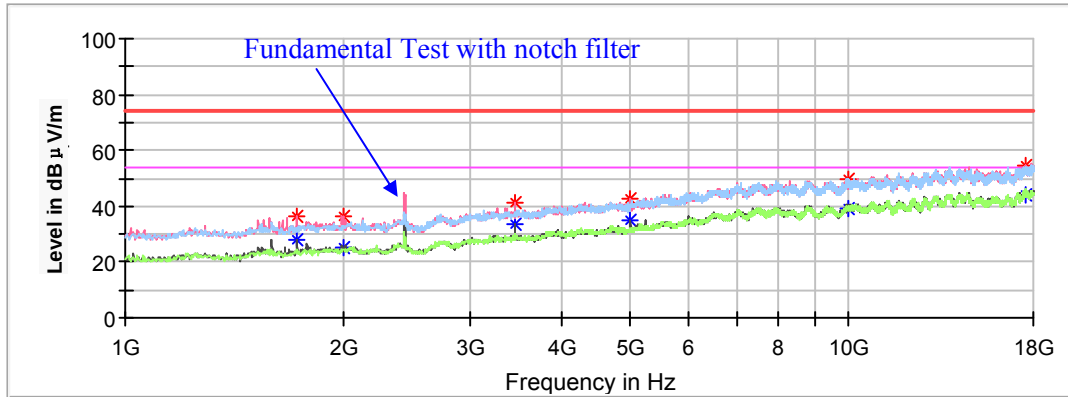

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1724.200000	---	27.87	100.0	V	94.0	-9.2	54.00	26.13
1724.200000	36.34	---	100.0	V	94.0	-9.2	74.00	37.66
1999.600000	---	25.33	150.0	V	281.0	-8.2	54.00	28.67
1999.600000	36.55	---	150.0	V	281.0	-8.2	74.00	37.45
3454.800000	---	33.49	150.0	V	53.0	-3.6	54.00	20.51
3454.800000	40.92	---	150.0	V	53.0	-3.6	74.00	33.08
4998.400000	---	34.67	100.0	V	276.0	-0.3	54.00	19.33
4998.400000	42.48	---	100.0	V	276.0	-0.3	74.00	31.52
9962.400000	---	39.18	150.0	H	163.0	8.2	54.00	14.82
9962.400000	49.86	---	150.0	H	163.0	8.2	74.00	24.14
17598.800000	---	43.98	150.0	V	124.0	14.1	54.00	10.02
17598.800000	54.72	---	150.0	V	124.0	14.1	74.00	19.28

High Channel: 2462MHz

Full Spectrum

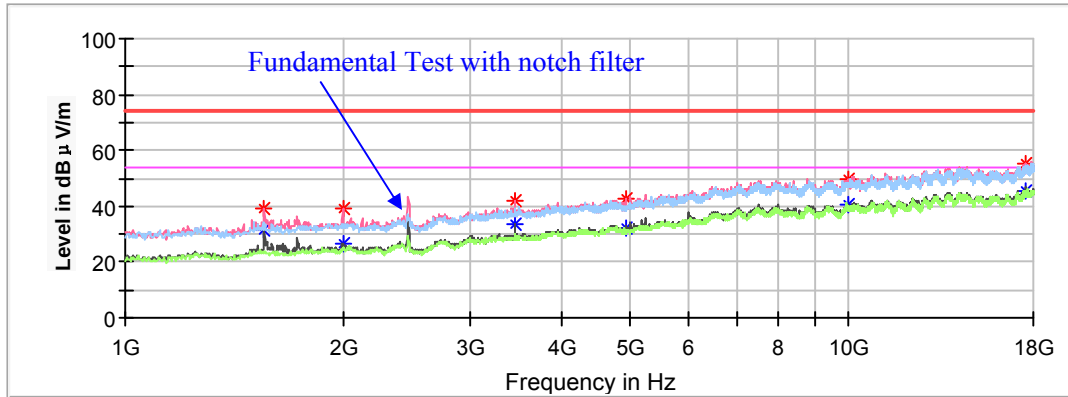


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1557.600000	---	31.37	150.0	V	179.0	-9.7	54.00	22.63
1557.600000	39.50	---	150.0	V	179.0	-9.7	74.00	34.50
1999.600000	---	26.72	150.0	V	154.0	-8.2	54.00	27.28
1999.600000	39.20	---	150.0	V	154.0	-8.2	74.00	34.80
3454.800000	---	33.51	200.0	V	226.0	-3.6	54.00	20.49
3454.800000	41.95	---	200.0	V	226.0	-3.6	74.00	32.05
4924.000000	---	32.31	150.0	V	95.0	-0.4	54.00	21.69
4924.000000	42.80	---	150.0	V	95.0	-0.4	74.00	31.20
9955.600000	---	40.25	100.0	V	189.0	8.2	54.00	13.75
9955.600000	49.49	---	100.0	V	189.0	8.2	74.00	24.51
17609.000000	---	45.59	150.0	V	144.0	14.1	54.00	8.41
17609.000000	55.56	---	150.0	V	144.0	14.1	74.00	18.44

802.11b Mode(Chain 1):

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:


1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

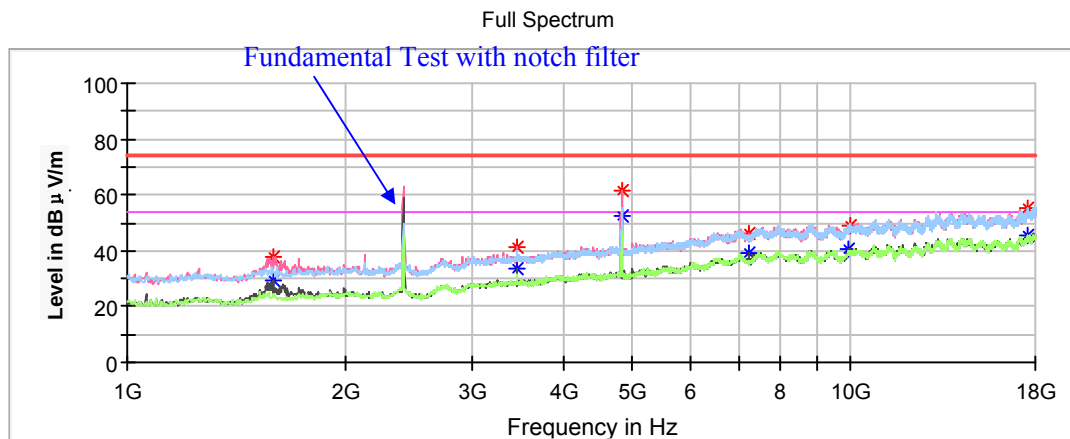Low Channel: 2412MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	---	29.23	250.0	V	195.0	-9.6	54.00	24.77
1591.600000	38.11	---	250.0	V	195.0	-9.6	74.00	35.89
3454.800000	---	33.85	200.0	V	235.0	-3.6	54.00	20.15
3454.800000	41.51	---	200.0	V	235.0	-3.6	74.00	32.49
4824.000000	---	52.62	200.0	V	79.0	-0.5	54.00	1.38
4824.000000	61.48	---	200.0	V	79.0	-0.5	74.00	12.52
7236.000000	---	39.27	250.0	V	342.0	5.7	54.00	14.73
7236.000000	46.33	---	250.0	V	342.0	5.7	74.00	27.67
9955.600000	---	40.66	150.0	V	327.0	8.2	54.00	13.34
9955.600000	49.04	---	150.0	V	327.0	8.2	74.00	24.96
17609.000000	---	45.42	150.0	H	134.0	14.1	54.00	8.58
17609.000000	55.55	---	150.0	H	134.0	14.1	74.00	18.45

Middle Channel: 2437MHz


Full Spectrum

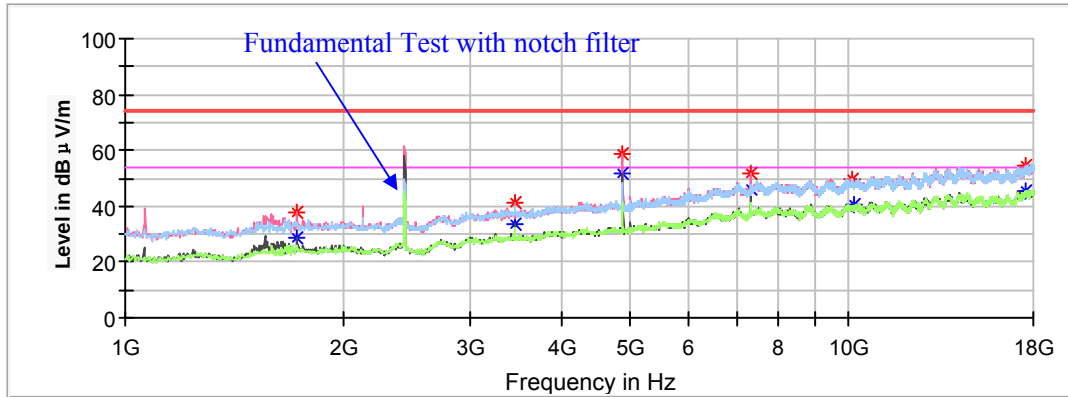

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1724.200000	---	28.42	100.0	V	98.0	-9.2	54.00	25.58
1724.200000	38.05	---	100.0	V	98.0	-9.2	74.00	35.95
3454.800000	---	33.72	200.0	H	78.0	-3.6	54.00	20.28
3454.800000	41.21	---	200.0	H	78.0	-3.6	74.00	32.79
4874.000000	---	51.54	200.0	V	78.0	-0.5	54.00	2.46
4874.000000	59.06	---	200.0	V	78.0	-0.5	74.00	14.94
7311.000000	---	46.44	100.0	V	326.0	5.8	54.00	7.56
7311.000000	51.86	---	100.0	V	326.0	5.8	74.00	22.14
10146.000000	---	40.27	250.0	H	107.0	8.4	54.00	13.73
10146.000000	49.76	---	250.0	H	107.0	8.4	74.00	24.24
17602.200000	---	45.49	150.0	V	230.0	14.1	54.00	8.51
17602.200000	54.34	---	150.0	V	230.0	14.1	74.00	19.66

High Channel: 2462MHz

Full Spectrum

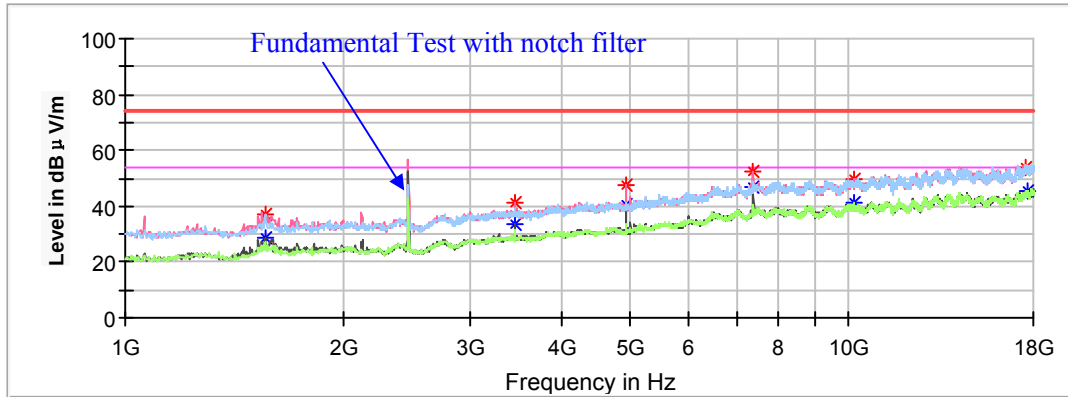

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1561.000000	---	28.50	100.0	V	201.0	-9.7	54.00	25.50
1561.000000	36.82	---	100.0	V	201.0	-9.7	74.00	37.18
3454.800000	---	33.46	200.0	V	249.0	-3.6	54.00	20.54
3454.800000	41.48	---	200.0	V	249.0	-3.6	74.00	32.52
4924.000000	---	40.22	250.0	V	89.0	-0.4	54.00	13.78
4924.000000	47.63	---	250.0	V	89.0	-0.4	74.00	26.37
7386.000000	---	47.07	150.0	V	354.0	5.9	54.00	6.93
7386.000000	52.71	---	150.0	V	354.0	5.9	74.00	21.29
10146.000000	---	41.12	200.0	H	352.0	8.5	54.00	12.88
10146.000000	49.50	---	200.0	H	352.0	8.5	74.00	24.50
17609.000000	---	45.78	100.0	V	240.0	14.1	54.00	8.22
17609.000000	53.71	---	100.0	V	240.0	14.1	74.00	20.29

802.11g Mode (Chain 1):


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

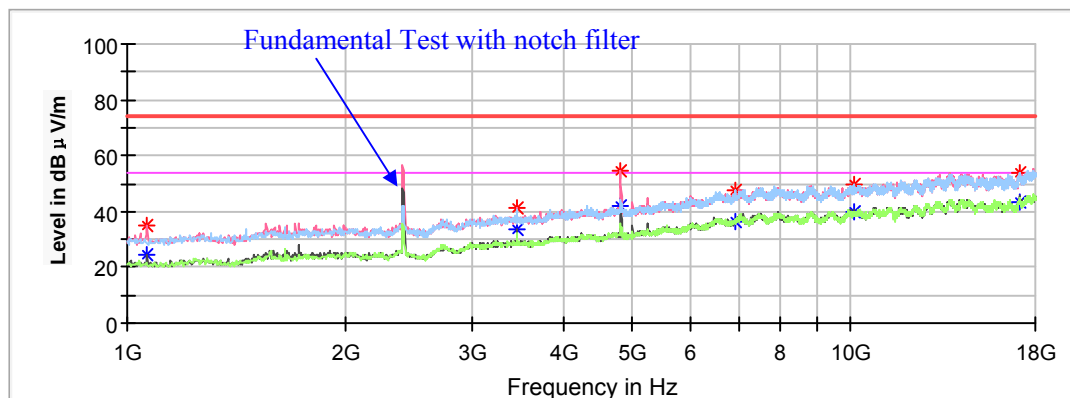

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1064.600000	---	24.13	200.0	V	191.0	-12.3	54.00	29.87
1064.600000	35.03	---	200.0	V	191.0	-12.3	74.00	38.97
3454.800000	---	33.59	200.0	V	241.0	-3.6	54.00	20.41
3454.800000	41.44	---	200.0	V	241.0	-3.6	74.00	32.56
4824.000000	---	41.94	150.0	V	75.0	-0.5	54.00	12.06
4824.000000	54.39	---	150.0	V	75.0	-0.5	74.00	19.61
6926.200000	---	36.66	200.0	H	63.0	5.2	54.00	17.34
6926.200000	47.87	---	200.0	H	63.0	5.2	74.00	26.13
10112.000000	---	40.08	150.0	H	128.0	8.4	54.00	13.92
10112.000000	49.36	---	150.0	H	128.0	8.4	74.00	24.64
17116.000000	---	43.33	200.0	V	17.0	12.3	54.00	10.67
17116.000000	53.83	---	200.0	V	17.0	12.3	74.00	20.17

Middle Channel: 2437MHz


Full Spectrum

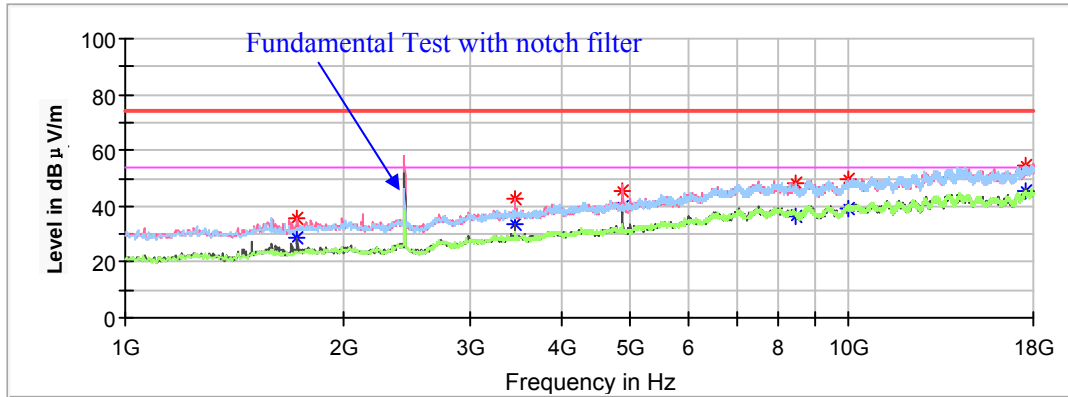

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1731.000000	---	28.91	150.0	V	84.0	-9.1	54.00	25.09
1731.000000	35.53	---	150.0	V	84.0	-9.1	74.00	38.47
3454.800000	---	33.22	200.0	V	235.0	-3.6	54.00	20.78
3454.800000	42.65	---	200.0	V	235.0	-3.6	74.00	31.35
4874.000000	---	40.02	200.0	V	75.0	-0.5	54.00	13.98
4874.000000	45.62	---	200.0	V	75.0	-0.5	74.00	28.38
8469.800000	---	36.70	150.0	H	119.0	6.3	54.00	17.30
8469.800000	48.32	---	150.0	H	119.0	6.3	74.00	25.68
9962.400000	---	39.45	200.0	V	334.0	8.2	54.00	14.55
9962.400000	49.78	---	200.0	V	334.0	8.2	74.00	24.22
17544.400000	---	45.27	200.0	V	65.0	14.2	54.00	8.73
17544.400000	54.55	---	200.0	V	65.0	14.2	74.00	19.45

High Channel: 2462MHz

Full Spectrum

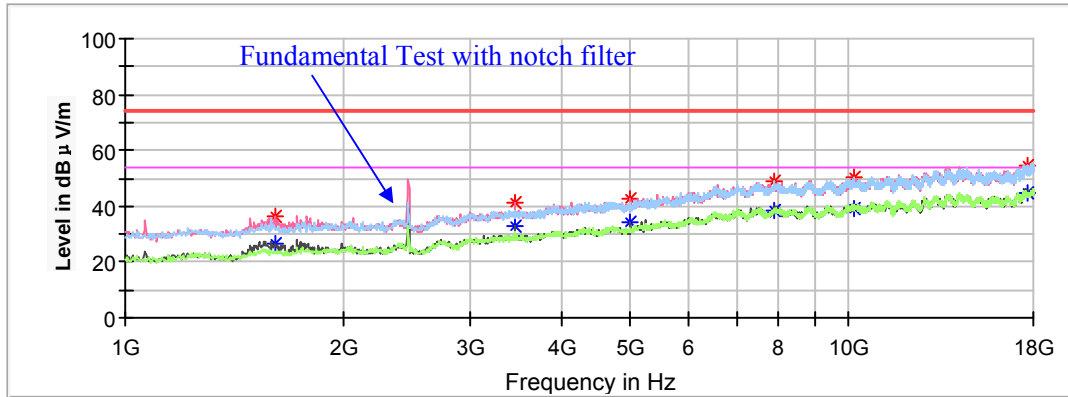

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1608.600000	---	26.66	200.0	V	172.0	-9.6	54.00	27.34
1608.600000	36.24	---	200.0	V	172.0	-9.6	74.00	37.76
3454.800000	---	33.18	150.0	V	75.0	-3.6	54.00	20.82
3454.800000	41.25	---	150.0	V	75.0	-3.6	74.00	32.75
4998.400000	---	34.38	200.0	V	211.0	-0.3	54.00	19.62
4998.400000	42.61	---	200.0	V	211.0	-0.3	74.00	31.39
7895.200000	---	38.71	150.0	H	203.0	6.9	54.00	15.29
7895.200000	49.01	---	150.0	H	203.0	6.9	74.00	24.99
10142.600000	---	39.51	150.0	H	349.0	8.4	54.00	14.49
10142.600000	50.09	---	150.0	H	349.0	8.4	74.00	23.91
17619.200000	---	44.66	200.0	V	94.0	14.1	54.00	9.34
17619.200000	54.62	---	200.0	V	94.0	14.1	74.00	19.38

802.11b Mode(Chain 2):


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

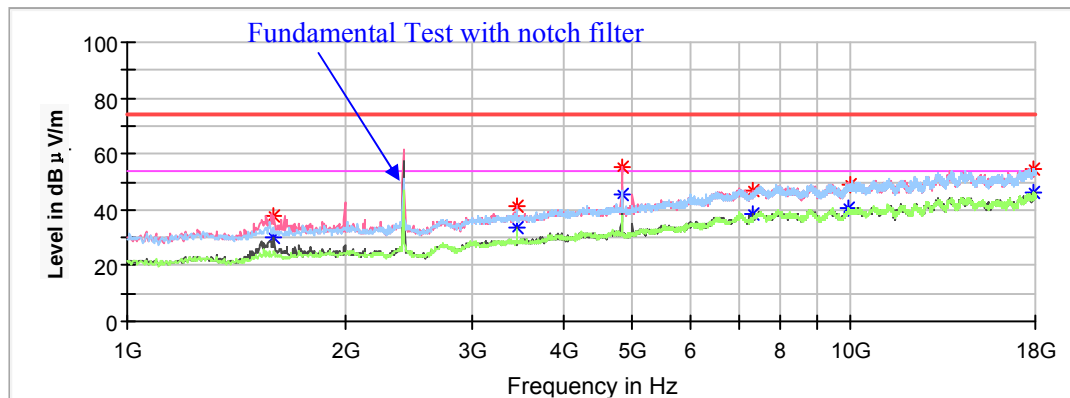

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.000000	---	29.99	250.0	V	15.0	-9.6	54.00	24.01
1595.000000	37.64	---	250.0	V	15.0	-9.6	74.00	36.36
3454.800000	---	33.64	250.0	V	82.0	-3.6	54.00	20.36
3454.800000	41.43	---	250.0	V	82.0	-3.6	74.00	32.57
4824.000000	---	45.63	200.0	V	311.0	-0.5	54.00	8.37
4824.000000	55.14	---	200.0	V	311.0	-0.5	74.00	18.86
7334.200000	---	38.61	150.0	V	11.0	5.9	54.00	15.39
7334.200000	46.66	---	150.0	V	11.0	5.9	74.00	27.34
9952.200000	---	40.42	250.0	H	189.0	8.2	54.00	13.58
9952.200000	49.24	---	250.0	H	189.0	8.2	74.00	24.76
17928.600000	---	46.18	200.0	H	131.0	13.6	54.00	7.82
17928.600000	54.33	---	200.0	H	131.0	13.6	74.00	19.67

Middle Channel: 2437MHz


Full Spectrum

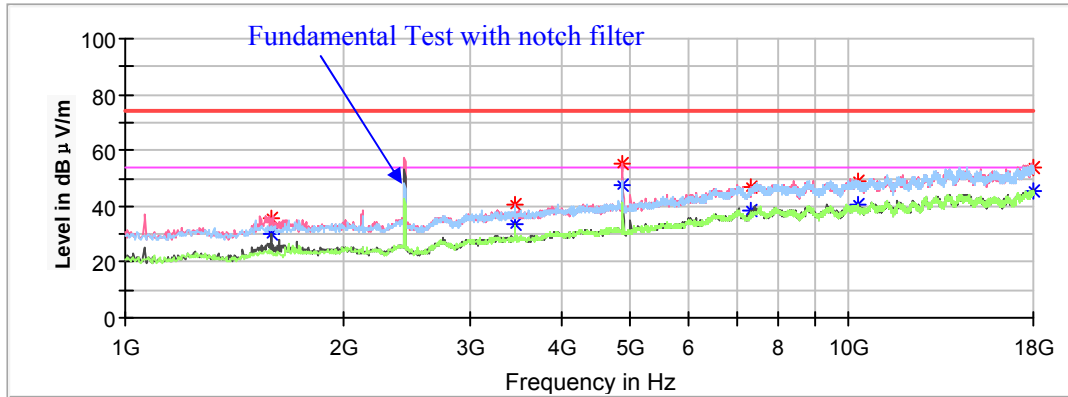

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	---	29.76	250.0	V	349.0	-9.6	54.00	24.24
1591.600000	35.33	---	250.0	V	349.0	-9.6	74.00	38.67
3454.800000	---	33.44	200.0	H	72.0	-3.6	54.00	20.56
3454.800000	40.76	---	200.0	H	72.0	-3.6	74.00	33.24
4874.000000	---	47.88	250.0	V	293.0	-0.5	54.00	6.12
4874.000000	54.99	---	250.0	V	293.0	-0.5	74.00	19.01
7311.000000	---	38.74	200.0	V	341.0	5.8	54.00	15.26
7311.000000	46.57	---	200.0	V	341.0	5.8	74.00	27.43
10309.200000	---	40.87	250.0	V	313.0	8.7	54.00	13.13
10309.200000	49.14	---	250.0	V	313.0	8.7	74.00	24.86
17983.000000	---	45.53	200.0	H	354.0	13.5	54.00	8.47
17983.000000	53.87	---	200.0	H	354.0	13.5	74.00	20.13

High Channel: 2462MHz

Full Spectrum

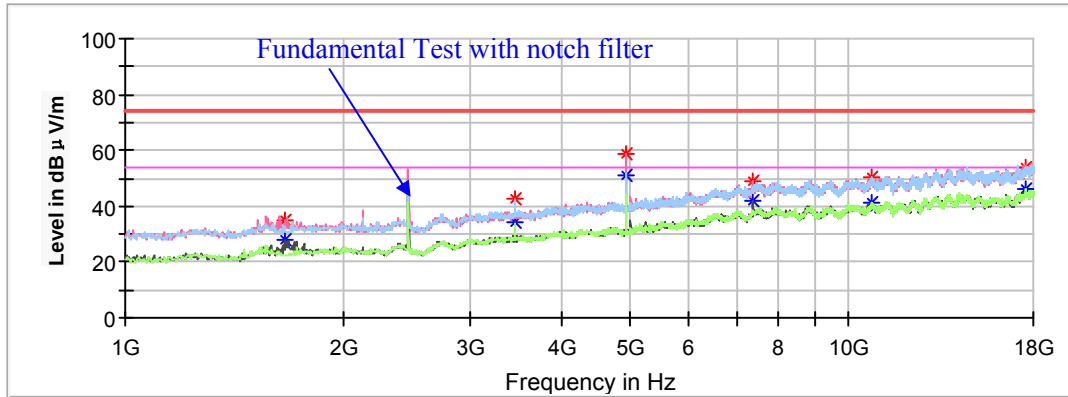

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1663.000000	---	27.77	200.0	V	145.0	-9.4	54.00	26.23
1663.000000	34.75	---	200.0	V	145.0	-9.4	74.00	39.25
3454.800000	---	34.04	200.0	V	224.0	-3.6	54.00	19.96
3454.800000	42.40	---	200.0	V	224.0	-3.6	74.00	31.60
4924.000000	---	51.31	250.0	V	195.0	-0.4	54.00	2.69
4924.000000	59.00	---	250.0	V	195.0	-0.4	74.00	15.00
7386.000000	---	41.75	200.0	V	354.0	5.9	54.00	12.25
7386.000000	49.03	---	200.0	V	354.0	5.9	74.00	24.97
10747.800000	---	40.91	250.0	H	117.0	9.4	54.00	13.09
10747.800000	50.07	---	250.0	H	117.0	9.4	74.00	23.93
17605.600000	---	46.18	200.0	H	354.0	14.1	54.00	7.82
17605.600000	53.93	---	200.0	H	354.0	14.1	74.00	20.07

802.11g Mode (Chain 2):


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

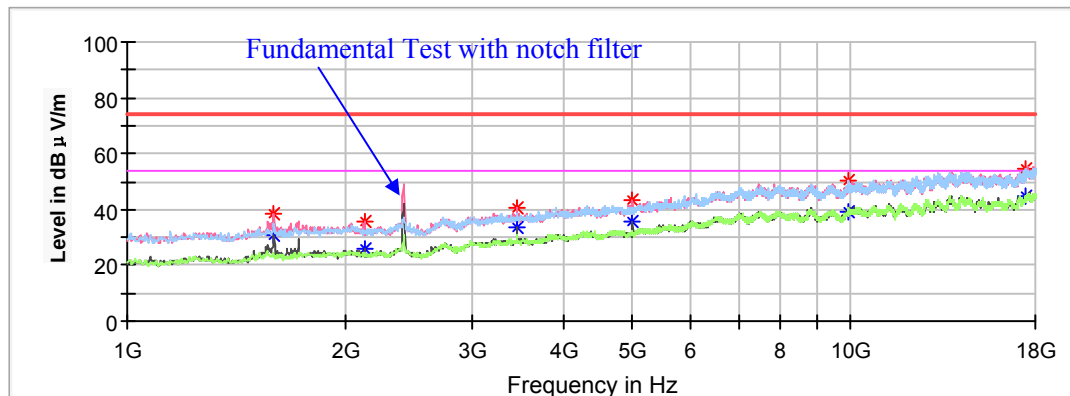

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.000000	---	31.06	200.0	V	317.0	-9.6	54.00	22.94
1595.000000	38.15	---	200.0	V	317.0	-9.6	74.00	35.85
2128.800000	---	25.59	150.0	V	232.0	-7.9	54.00	28.41
2128.800000	35.92	---	150.0	V	232.0	-7.9	74.00	38.08
3454.800000	---	33.41	200.0	V	235.0	-3.6	54.00	20.59
3454.800000	40.59	---	200.0	V	235.0	-3.6	74.00	33.41
4998.400000	---	35.86	200.0	V	276.0	-0.3	54.00	18.14
4998.400000	43.24	---	200.0	V	276.0	-0.3	74.00	30.76
9938.600000	---	39.27	200.0	H	314.0	8.1	54.00	14.73
9938.600000	50.14	---	200.0	H	314.0	8.1	74.00	23.86
17473.000000	---	44.59	150.0	H	324.0	14.1	54.00	9.41
17473.000000	54.73	---	150.0	H	324.0	14.1	74.00	19.27

Middle Channel: 2437MHz


Full Spectrum

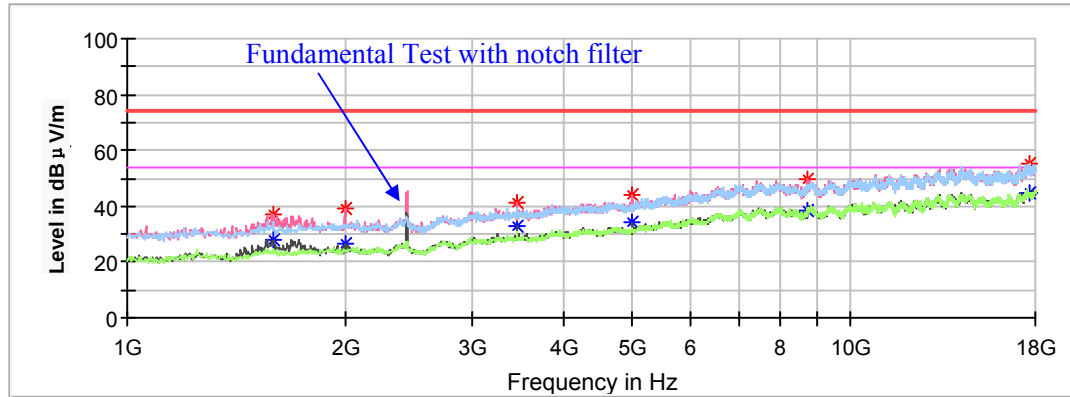

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1595.000000	---	27.97	150.0	V	284.0	-9.6	54.00	26.03
1595.000000	37.23	---	150.0	V	284.0	-9.6	74.00	36.77
1999.600000	---	26.32	150.0	V	109.0	-8.2	54.00	27.68
1999.600000	39.48	---	150.0	V	109.0	-8.2	74.00	34.52
3454.800000	---	33.18	200.0	V	79.0	-3.6	54.00	20.82
3454.800000	41.56	---	200.0	V	79.0	-3.6	74.00	32.44
4998.400000	---	34.28	200.0	V	30.0	-0.3	54.00	19.72
4998.400000	44.33	---	200.0	V	30.0	-0.3	74.00	29.67
8728.200000	---	38.61	150.0	V	11.0	6.9	54.00	15.39
8728.200000	49.39	---	150.0	V	11.0	6.9	74.00	24.61
17673.600000	---	44.59	200.0	H	343.0	14.0	54.00	9.41
17673.600000	55.11	---	200.0	H	343.0	14.0	74.00	18.89

High Channel: 2462MHz

Full Spectrum

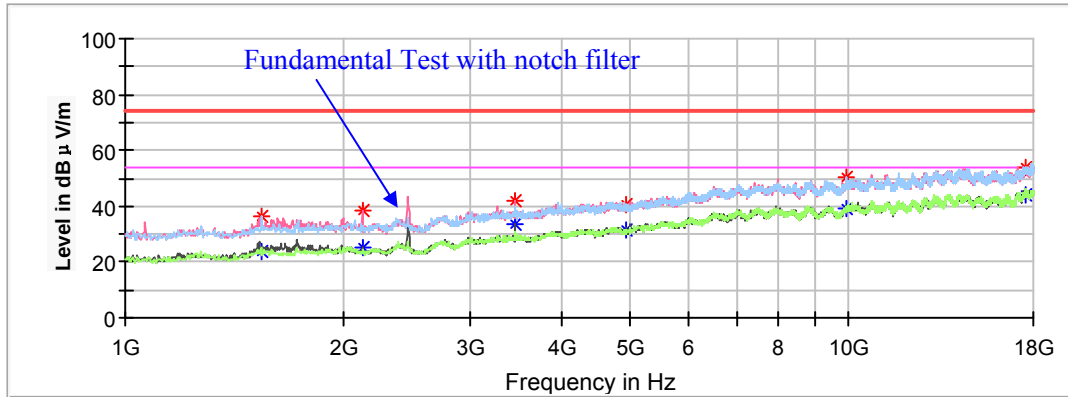

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1544.000000	---	23.93	200.0	H	52.0	-9.8	54.00	30.07
1544.000000	36.37	---	200.0	H	52.0	-9.8	74.00	37.63
2125.400000	---	24.89	150.0	V	333.0	-7.9	54.00	29.11
2125.400000	38.25	---	150.0	V	333.0	-7.9	74.00	35.75
3454.800000	---	33.36	200.0	V	64.0	-3.6	54.00	20.64
3454.800000	41.84	---	200.0	V	64.0	-3.6	74.00	32.16
4924.000000	---	31.36	150.0	H	131.0	-0.4	54.00	22.64
4924.000000	40.87	---	150.0	H	131.0	-0.4	74.00	33.13
9928.400000	---	39.07	200.0	H	112.0	8.1	54.00	14.93
9928.400000	50.14	---	200.0	H	112.0	8.1	74.00	23.86
17595.400000	---	44.05	150.0	H	261.0	14.1	54.00	9.95
17595.400000	54.09	---	150.0	H	261.0	14.1	74.00	19.91

802.11n-HT20 Mode (Chain0+Chain1+ Chain2):


(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel : 2412MHz


Full Spectrum

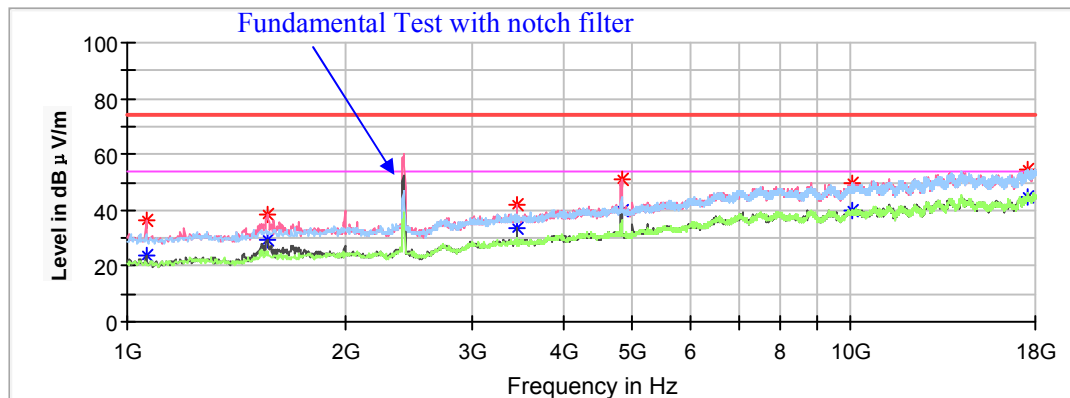

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1061.200000	---	23.50	200.0	V	124.0	-12.3	54.00	30.50
1061.200000	36.30	---	200.0	V	124.0	-12.3	74.00	37.70
1564.400000	---	29.45	150.0	V	134.0	-9.7	54.00	24.55
1564.400000	38.75	---	150.0	V	134.0	-9.7	74.00	35.25
3454.800000	---	33.44	200.0	V	227.0	-3.6	54.00	20.56
3454.800000	41.95	---	200.0	V	227.0	-3.6	74.00	32.05
4824.000000	---	40.19	150.0	V	114.0	-0.5	54.00	13.81
4824.000000	51.37	---	150.0	V	114.0	-0.5	74.00	22.63
10023.600000	---	39.65	200.0	H	168.0	8.3	54.00	14.35
10023.600000	49.46	---	200.0	H	168.0	8.3	74.00	24.54
17561.400000	---	44.83	150.0	H	41.0	14.2	54.00	9.17
17561.400000	54.33	---	150.0	H	41.0	14.2	74.00	19.67

Middle Channel: 2437MHz


Full Spectrum

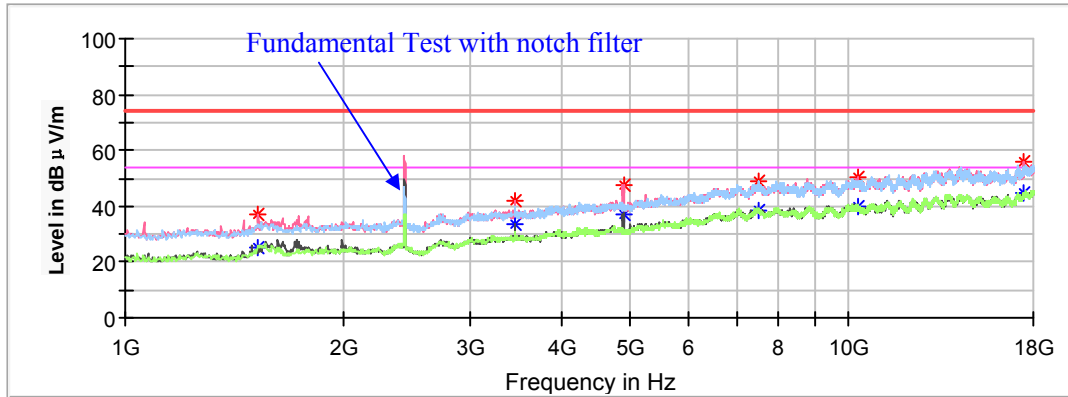

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1527.000000	---	25.39	150.0	V	173.0	-9.8	54.00	28.61
1527.000000	37.39	---	150.0	V	173.0	-9.8	74.00	36.61
3454.800000	---	33.26	200.0	V	63.0	-3.6	54.00	20.74
3454.800000	41.62	---	200.0	V	63.0	-3.6	74.00	32.38
4874.000000	---	37.02	150.0	V	351.0	-0.5	54.00	16.98
4874.000000	47.51	---	150.0	V	351.0	-0.5	74.00	26.49
7524.600000	---	38.48	150.0	H	15.0	6.2	54.00	15.52
7524.600000	48.63	---	150.0	H	15.0	6.2	74.00	25.37
10316.000000	---	40.16	200.0	V	358.0	8.7	54.00	13.84
10316.000000	50.34	---	200.0	V	358.0	8.7	74.00	23.66
17483.200000	---	44.64	150.0	V	0.0	14.2	54.00	9.36
17483.200000	55.89	---	150.0	V	0.0	14.2	74.00	18.11

High Channel : 2462MHz

Full Spectrum

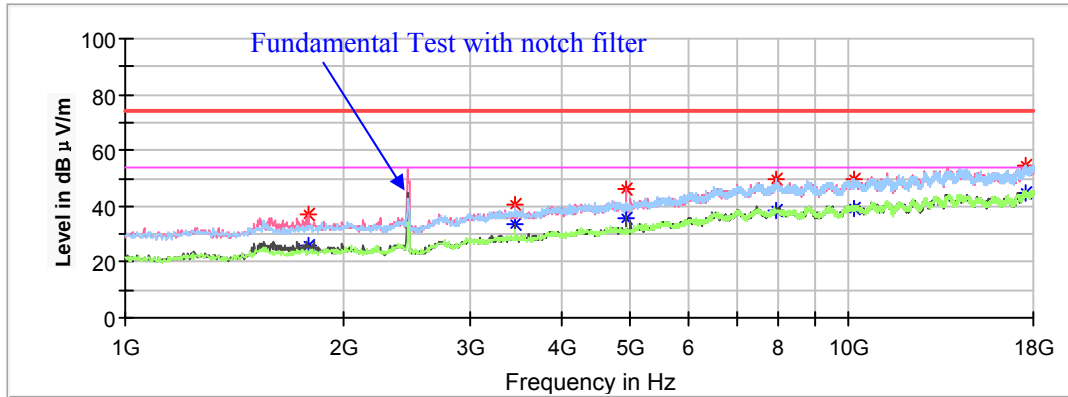

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1788.800000	---	25.70	150.0	V	350.0	-9.0	54.00	28.30
1788.800000	36.81	---	150.0	V	350.0	-9.0	74.00	37.19
3454.800000	---	33.23	200.0	V	225.0	-3.6	54.00	20.77
3454.800000	40.78	---	200.0	V	225.0	-3.6	74.00	33.22
4924.000000	---	35.83	200.0	V	195.0	-0.4	54.00	18.17
4924.000000	45.90	---	200.0	V	195.0	-0.4	74.00	28.10
7956.400000	---	38.58	150.0	H	276.0	7.0	54.00	15.42
7956.400000	49.60	---	150.0	H	276.0	7.0	74.00	24.40
10183.400000	---	39.36	200.0	V	2.0	8.5	54.00	14.64
10183.400000	49.63	---	200.0	V	2.0	8.5	74.00	24.37
17578.400000	---	44.88	150.0	H	334.0	14.2	54.00	9.12
17578.400000	54.50	---	150.0	H	334.0	14.2	74.00	19.50

802.11n-HT40 Mode (Chain0+Chain1+Chain2):


(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel : 2422MHz


Full Spectrum

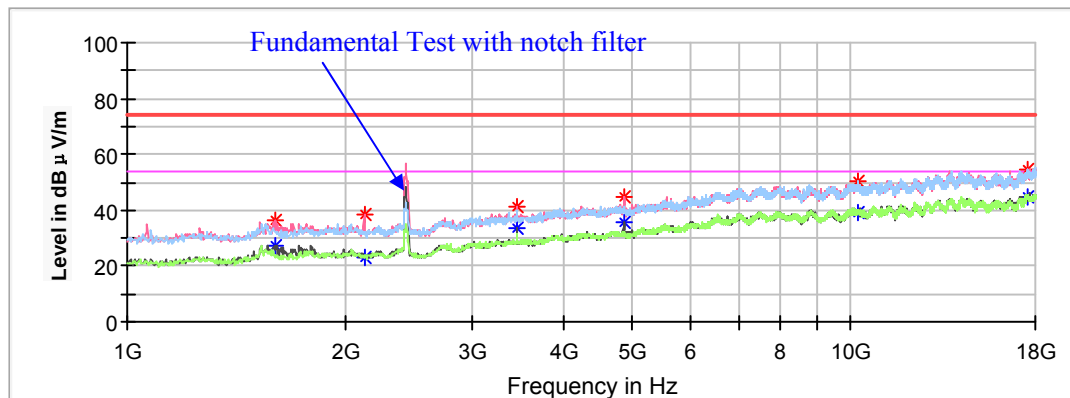

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1605.200000	---	27.33	150.0	V	266.0	-9.6	54.00	26.67
1605.200000	36.24	---	150.0	V	266.0	-9.6	74.00	37.76
2125.400000	---	23.39	150.0	V	333.0	-7.9	54.00	30.61
2125.400000	38.38	---	150.0	V	333.0	-7.9	74.00	35.62
3454.800000	---	33.70	200.0	V	60.0	-3.6	54.00	20.30
3454.800000	41.14	---	200.0	V	60.0	-3.6	74.00	32.86
4844.000000	---	35.94	200.0	V	295.0	-0.5	54.00	18.06
4844.000000	44.41	---	200.0	V	295.0	-0.5	74.00	29.59
10258.200000	---	39.02	150.0	H	324.0	8.6	54.00	14.98
10258.200000	50.24	---	150.0	H	324.0	8.6	74.00	23.76
17602.200000	---	45.05	200.0	H	155.0	14.1	54.00	8.95
17602.200000	54.69	---	200.0	H	155.0	14.1	74.00	19.31

Middle Channel: 2437MHz


Full Spectrum

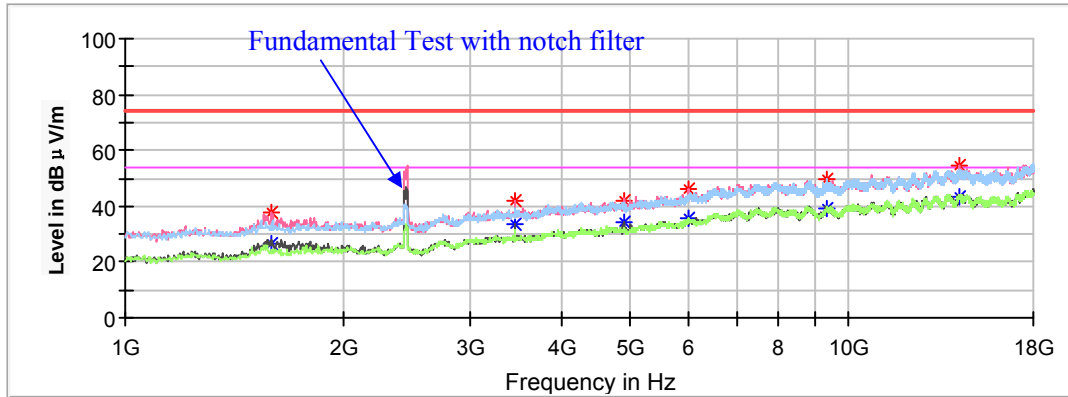

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	---	26.56	150.0	V	357.0	-9.6	54.00	27.44
1591.600000	37.51	---	150.0	V	357.0	-9.6	74.00	36.49
3454.800000	---	33.61	200.0	V	78.0	-3.6	54.00	20.39
3454.800000	41.69	---	200.0	V	78.0	-3.6	74.00	32.31
4879.400000	---	34.44	200.0	V	307.0	-0.4	54.00	19.56
4879.400000	41.83	---	200.0	V	307.0	-0.4	74.00	32.17
5994.600000	---	35.51	150.0	V	297.0	2.3	54.00	18.49
5994.600000	46.07	---	150.0	V	297.0	2.3	74.00	27.93
9340.200000	---	39.39	200.0	H	246.0	7.7	54.00	14.61
9340.200000	49.75	---	200.0	H	246.0	7.7	74.00	24.25
14239.600000	---	43.52	150.0	V	195.0	12.6	54.00	10.48
14239.600000	54.88	---	150.0	V	195.0	12.6	74.00	19.12

High Channel : 2452MHz


Full Spectrum

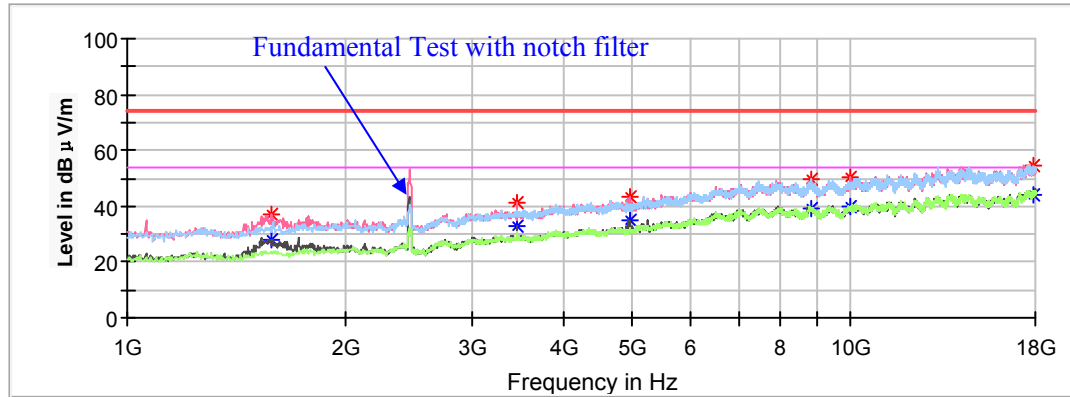


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1581.400000	---	27.84	200.0	V	138.0	-9.7	54.00	26.16
1581.400000	37.04	---	200.0	V	138.0	-9.7	74.00	36.96
3454.800000	---	32.96	200.0	V	80.0	-3.6	54.00	21.04
3454.800000	41.20	---	200.0	V	80.0	-3.6	74.00	32.80
4940.600000	---	35.25	200.0	V	205.0	-0.4	54.00	18.75
4940.600000	43.24	---	200.0	V	205.0	-0.4	74.00	30.76
8820.000000	---	39.13	150.0	H	226.0	7.2	54.00	14.87
8820.000000	49.36	---	150.0	H	226.0	7.2	74.00	24.64
9965.800000	---	39.67	200.0	V	41.0	8.2	54.00	14.33
9965.800000	50.00	---	200.0	V	41.0	8.2	74.00	24.00
17857.200000	---	43.97	150.0	V	359.0	13.7	54.00	10.03
17857.200000	54.31	---	150.0	V	359.0	13.7	74.00	19.69

18GHz-25GHz(worst case):

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **low channel of 802.11 n-HT20 MIMO mode in Z-axis of orientation** was recorded

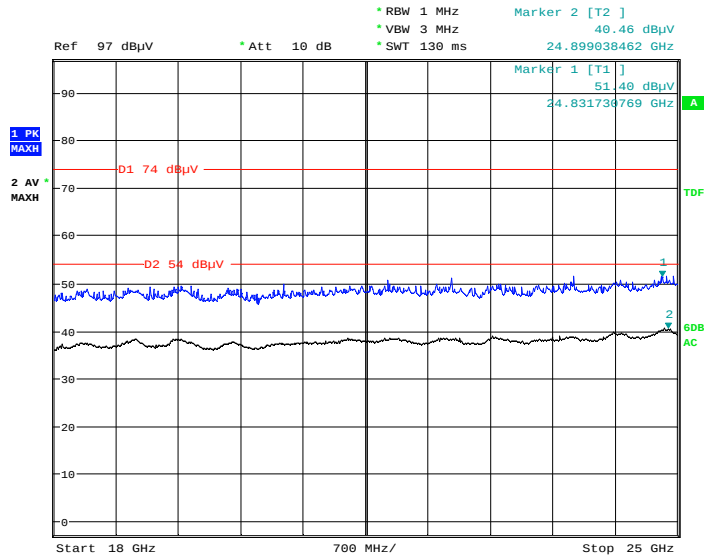Vertical

Date: 11.JUL.2019 17:12:08

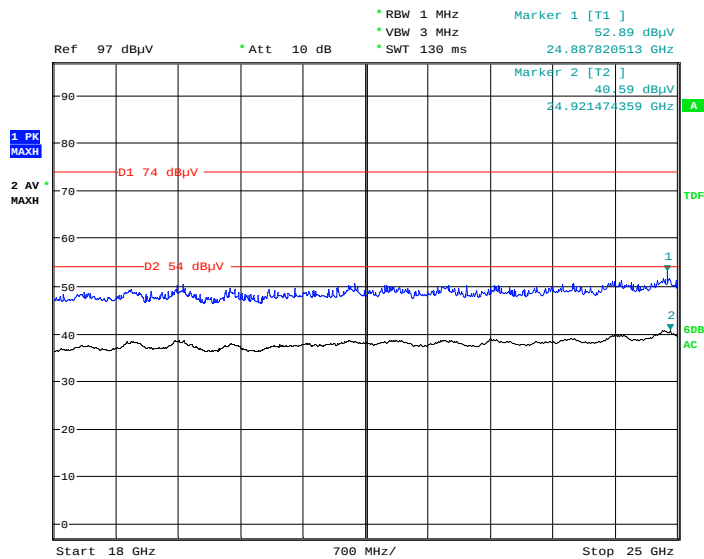Horizontal

Date: 11.JUL.2019 16:42:32

Fundamental Test & Restricted Bands Emissions Test:

Note:

- Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)
- The test distance is 1m instead of 3m, Extrapolation Factor=20*log(3m /1m)=9.54dB
 Extrapolation Result(dB μ V/m)= Corrected Amplitude (dB μ V/m) - Extrapolation Factor(dB)

802.11b Mode (Chain 0): (Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correcte d Factor (dB/m)	Extrapolation Result@3m		Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)			MaxPeak (dBμV /m)	Average (dBμV /m)		
Low Channel: 2412MHz										
2390.000000	---	52.24	150	V	116	31.5	---	42.70	54.00	11.30
2390.000000	62.35	---	150	V	116	31.5	52.81	---	74.00	21.19
High Channel: 2462MHz										
2483.500000	---	55.08	200	V	281	31.7	---	45.54	54.00	8.46
2483.500000	63.88	---	200	V	281	31.7	54.34	---	74.00	19.66

802.11g Mode (Chain 0): (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correcte d Factor (dB/m)	Extrapolation Result@3m		Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)			MaxPeak (dBμV /m)	Average (dBμV /m)		
Low Channel: 2412MHz										
2390.000000	---	54.12	100	V	35	31.5	---	44.58	54.00	9.42
2390.000000	64.67	---	100	V	35	31.5	55.13	---	74.00	18.87
High Channel: 2462MHz										
2483.500000	---	55.57	150	V	66	31.7	---	46.03	54.00	7.97
2483.500000	63.27	---	150	V	66	31.7	53.73	---	74.00	20.27

802.11b Mode (Chain 1): (Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correcte d Factor (dB/m)	Extrapolation Result@3m		Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)			MaxPeak (dBμV /m)	Average (dBμV /m)		
Low Channel: 2412MHz										
2390.000000	---	54.89	100	V	36	31.5	---	45.35	54.00	8.65
2390.000000	63.12	---	100	V	36	31.5	53.58	---	74.00	20.42
High Channel: 2462MHz										
2483.500000	---	54.97	150	V	191	31.7	---	45.43	54.00	8.57
2483.500000	63.72	---	150	V	191	31.7	54.18	---	74.00	19.82

802.11g Mode (Chain 1): (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correcte d Factor (dB/m)	Extrapolation Result@3m		Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)			MaxPeak (dBμV /m)	Average (dBμV /m)		
Low Channel: 2412MHz										
2390.000000	---	54.89	200	V	118	31.5	---	45.35	54.00	8.65
2390.000000	63.29	---	200	V	118	31.5	53.75	---	74.00	20.25
High Channel: 2462MHz										
2483.500000	---	56.30	100	V	178	31.7	---	46.76	54.00	7.24
2483.500000	66.69	---	100	V	178	31.7	57.15	---	74.00	16.85

802.11b Mode (Chain 2): (Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correcte d Factor (dB/m)	Extrapolation Result@3m		Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)			MaxPeak (dBμV /m)	Average (dBμV /m)		
Low Channel: 2412MHz										
2390.000000	---	54.63	150	V	88	31.5	---	45.09	54.00	8.91
2390.000000	62.87	---	150	V	88	31.5	53.33	---	74.00	20.67
High Channel: 2462MHz										
2483.500000	---	54.93	100	V	240	31.7	---	45.39	54.00	8.61
2483.500000	64.26	---	200	V	240	31.7	54.72	---	74.00	19.28

802.11g Mode (Chain 2): (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correcte d Factor (dB/m)	Extrapolation Result@3m		Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)			MaxPeak (dBμV /m)	Average (dBμV /m)		
Low Channel: 2412MHz										
2390.000000	---	54.17	150	V	36	31.5	---	44.63	54.00	9.37
2390.000000	62.85	---	150	V	36	31.5	53.31	---	74.00	20.69
High Channel: 2462MHz										
2483.500000	---	54.91	150	V	66	31.7	---	45.37	54.00	8.63
2483.500000	63.96	---	150	V	66	31.7	54.42	---	74.00	19.58

802.11n-HT20 Mode (Chain0+Chain1+ Chain2): (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correcte d Factor (dB/m)	Extrapolation Result@3m		Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)			MaxPeak (dBμV /m)	Average (dBμV /m)		
Low Channel: 2412MHz										
2390.000000	---	58.90	200	H	63	31.5	---	49.36	54.00	4.64
2390.000000	68.56	---	200	H	63	31.5	59.02	---	74.00	14.98
High Channel: 2462MHz										
2483.500000	---	59.01	100	H	9	31.7	---	49.47	54.00	4.53
2483.500000	68.40	---	100	H	9	31.7	58.86	---	74.00	15.14

802.11n-HT40 Mode (Chain0+Chain1+Chain2): (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correcte d Factor (dB/m)	Extrapolation Result@3m		Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)			MaxPeak (dBμV /m)	Average (dBμV /m)		
Low Channel: 2412MHz										
2390.000000	---	59.79	150	H	128	31.5	---	50.25	54.00	3.75
2390.000000	69.71	---	150	H	128	31.5	60.17	---	74.00	13.83
High Channel: 2462MHz										
2483.500000	---	60.86	100	H	341	31.7	---	51.32	54.00	2.68
2483.500000	70.39	---	100	H	341	31.7	60.85	---	74.00	13.15

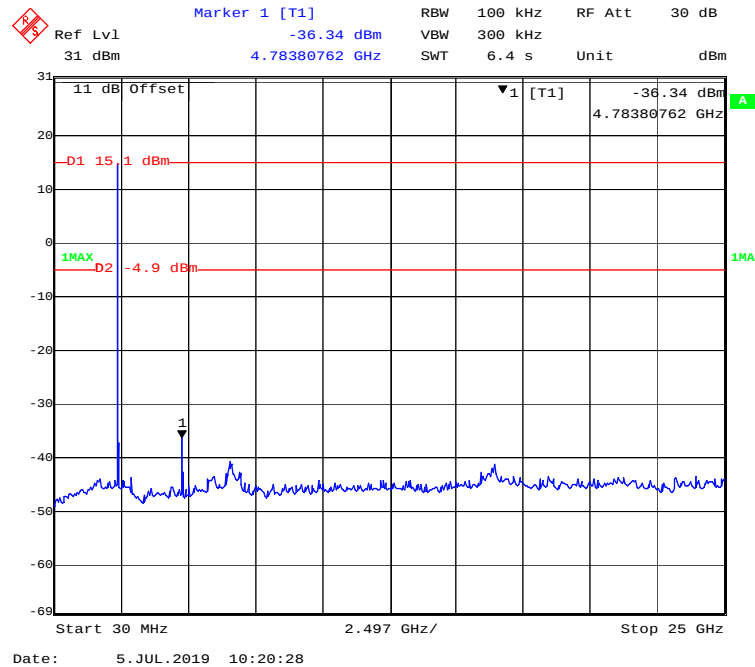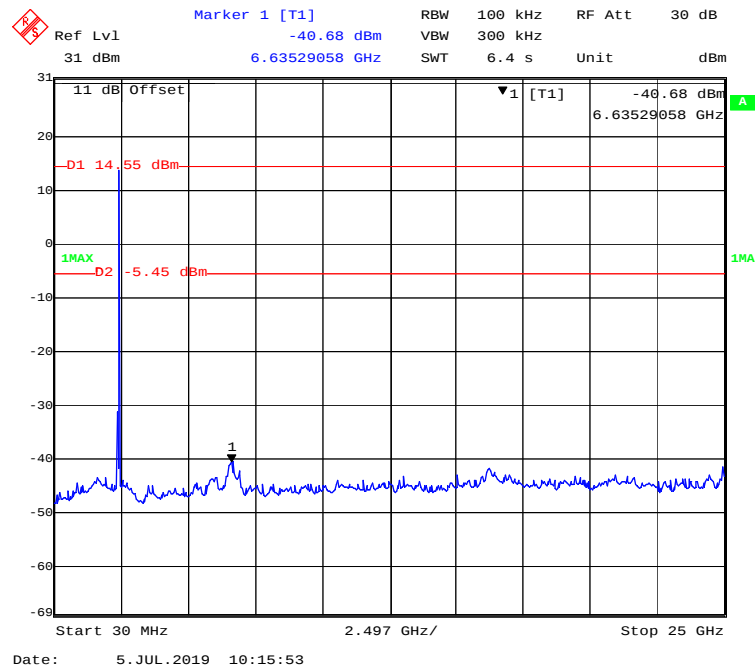Conducted Spurious Emissions at Antenna Port**Chain0: 802.11b Mode Low Channel****Chain0: 802.11b Mode Middle Channel**


Chain0: 802.11b Mode High Channel

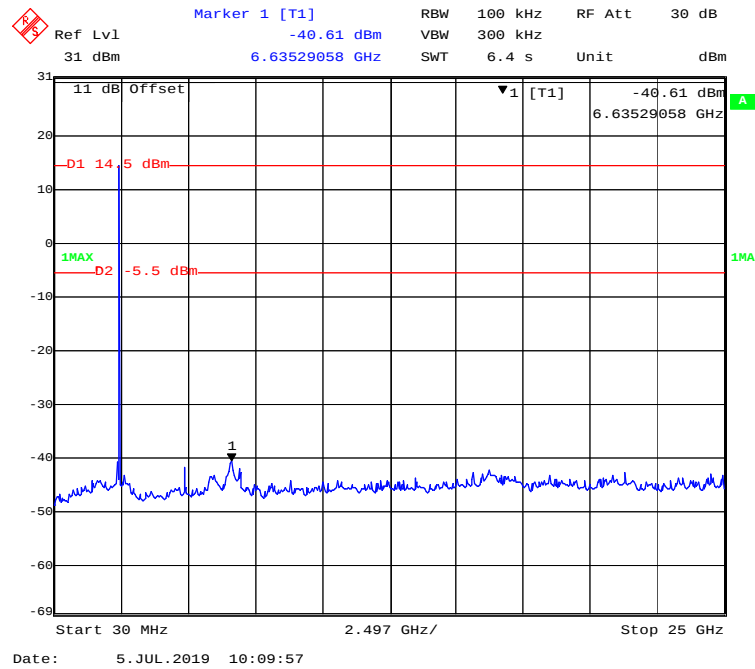


Chain0: 802.11g Mode Low Channel

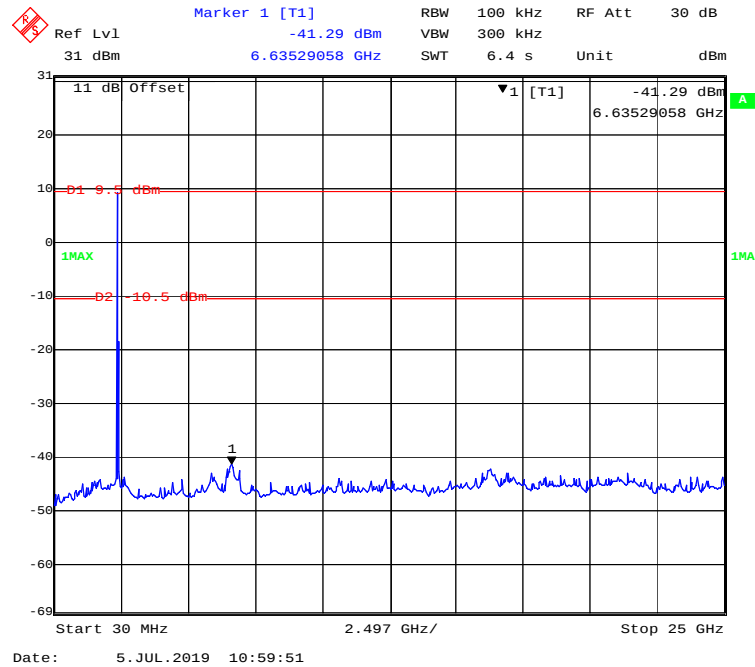


Chain0: 802.11g Mode Middle Channel

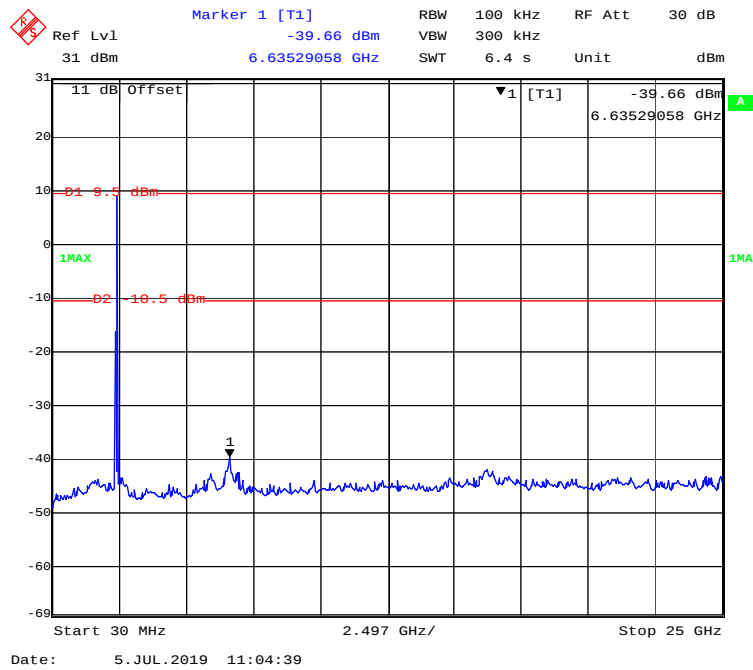


Chain0: 802.11g Mode High Channel

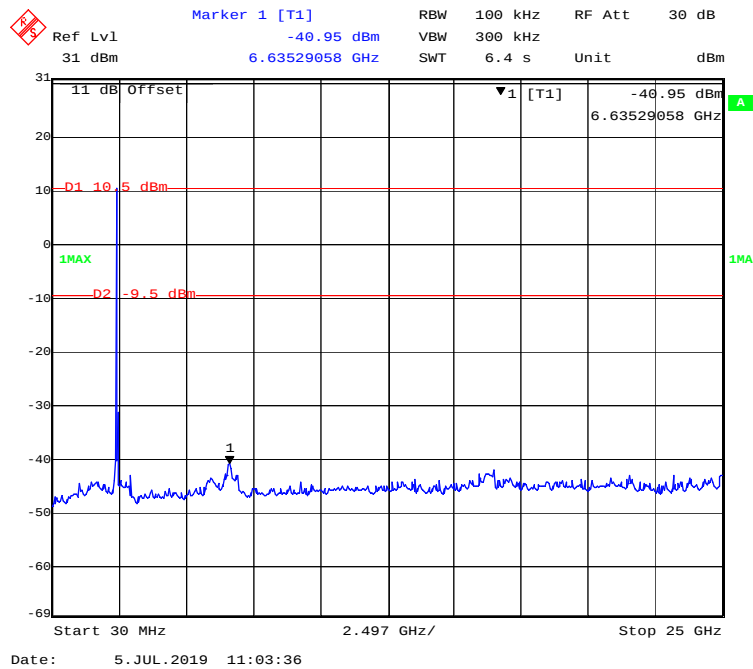


Chain0: 802.11n-HT20 Mode Low Channel

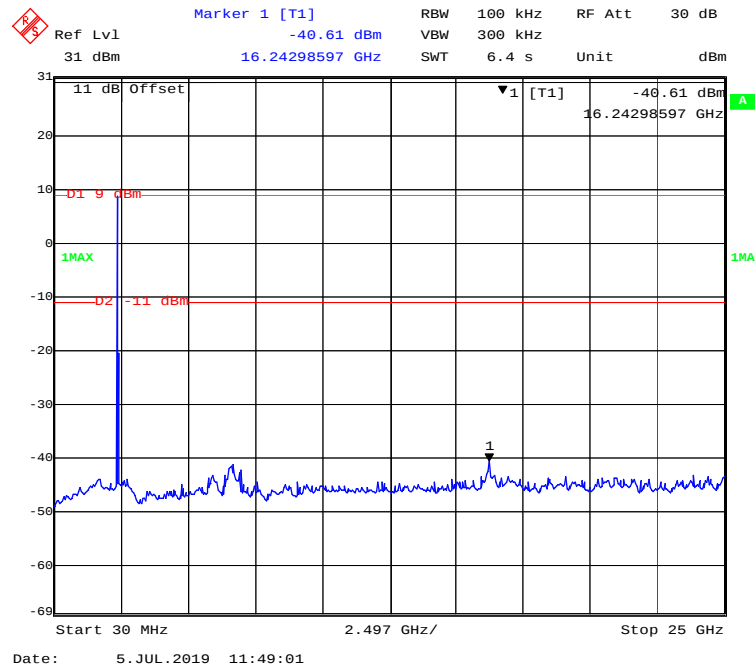


Chain0: 802.11n-HT20 Mode Middle Channel


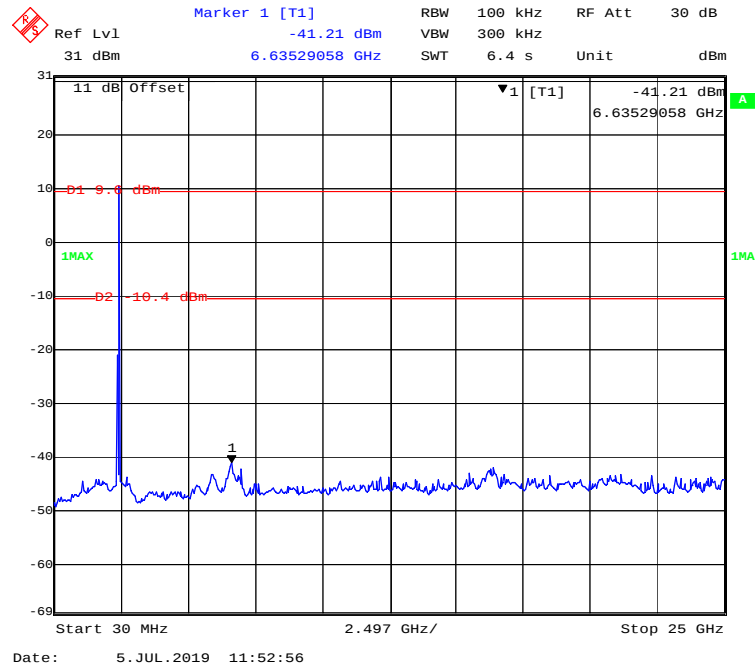


Chain0: 802.11n-HT20 Mode High Channel

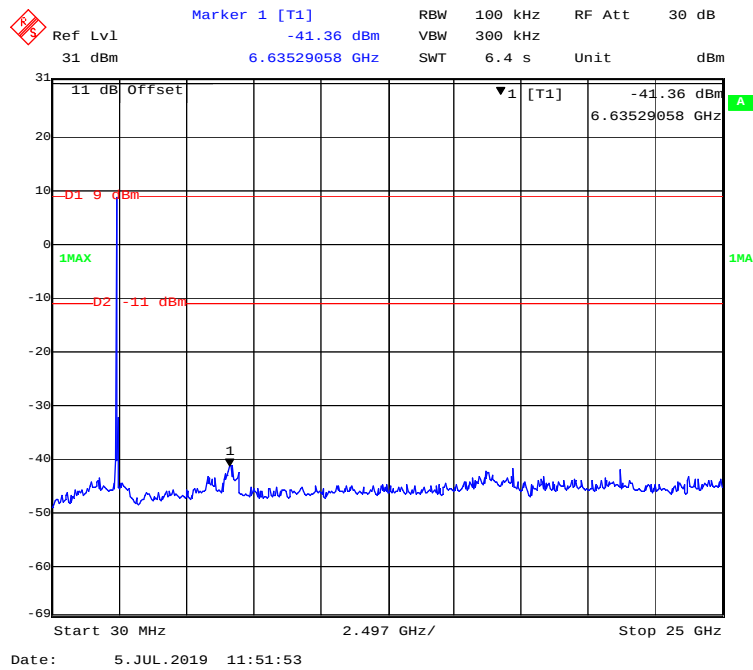


Chain0: 802.11n-HT40 Mode Low Channel

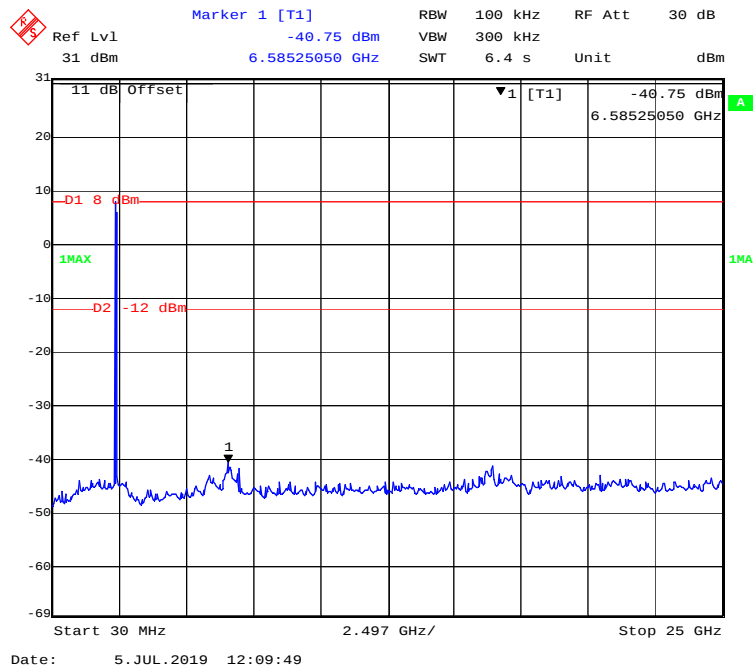

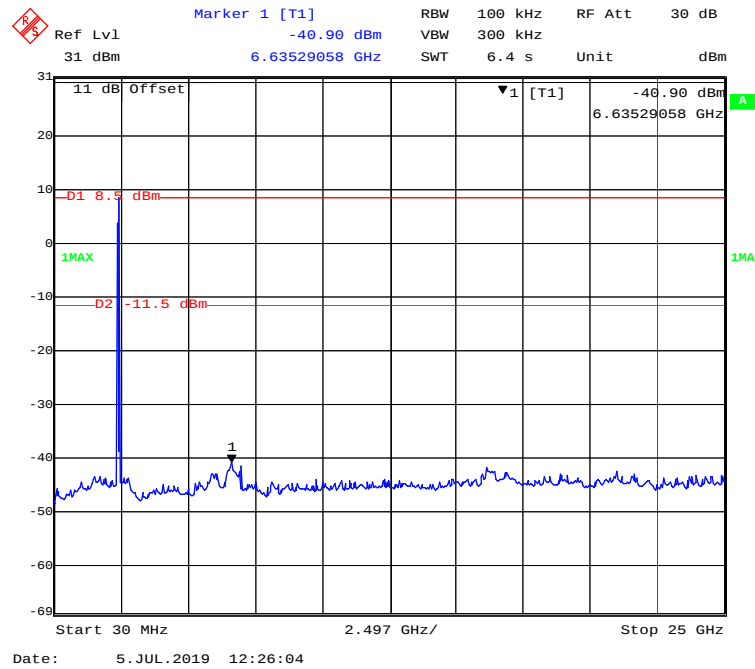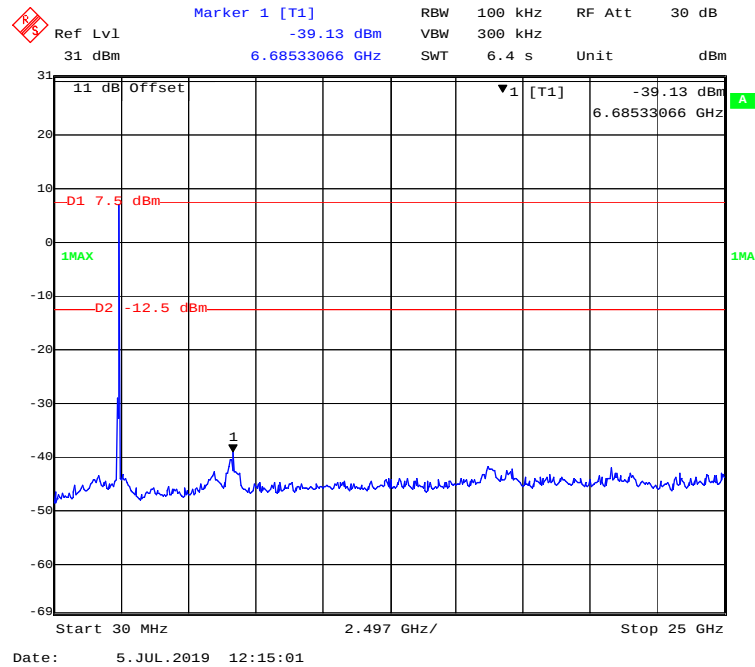
Chain0: 802.11n-HT40 Mode Middle Channel**Chain0: 802.11n-HT40 Mode High Channel**

Conducted Spurious Emissions at Antenna Port


Chain1: 802.11b Mode Low Channel

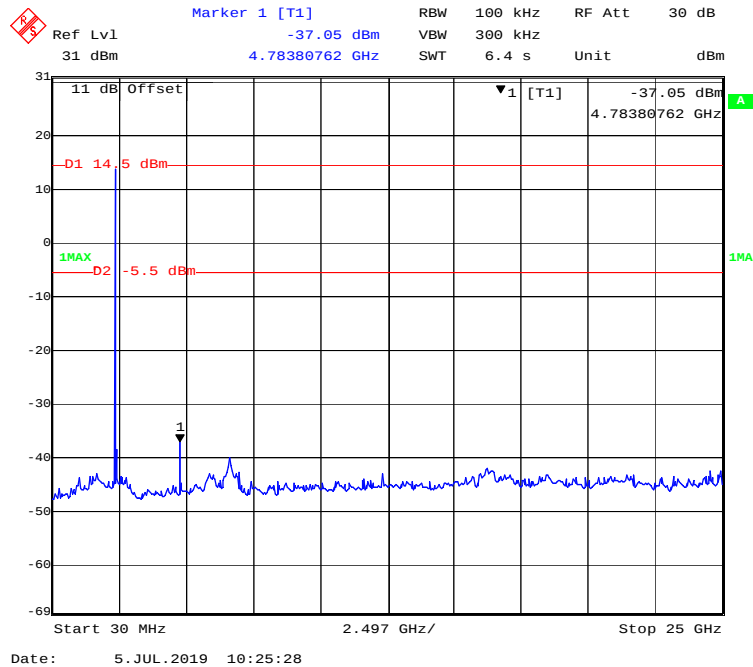


Chain1: 802.11b Mode Middle Channel


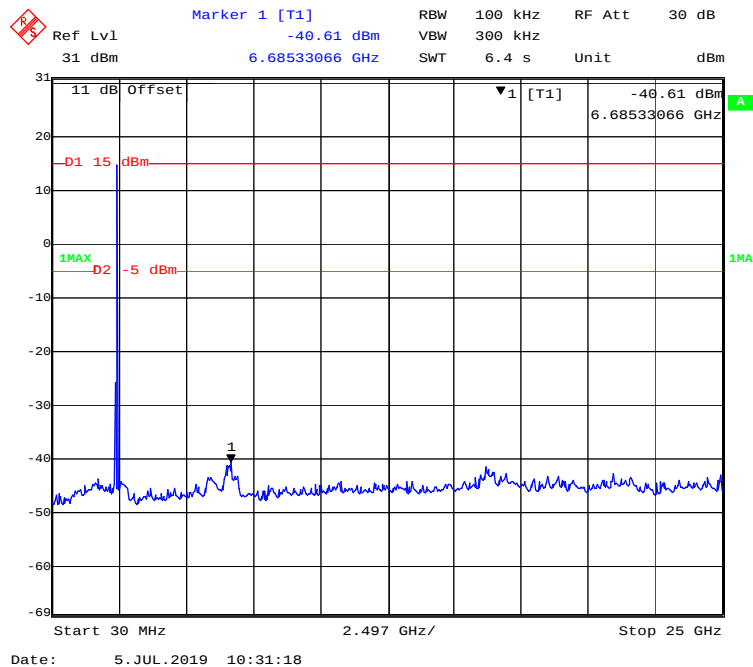


Chain1: 802.11b Mode High Channel

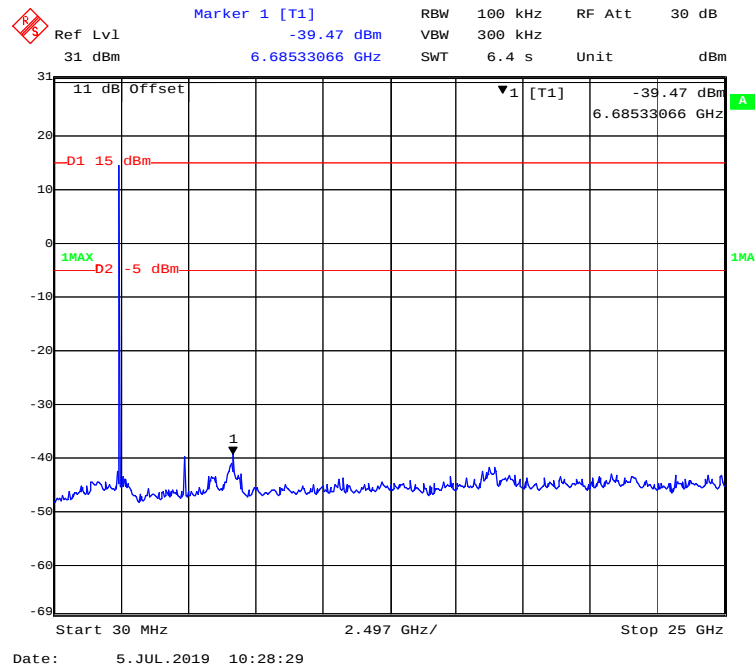


Chain1: 802.11g Mode Low Channel

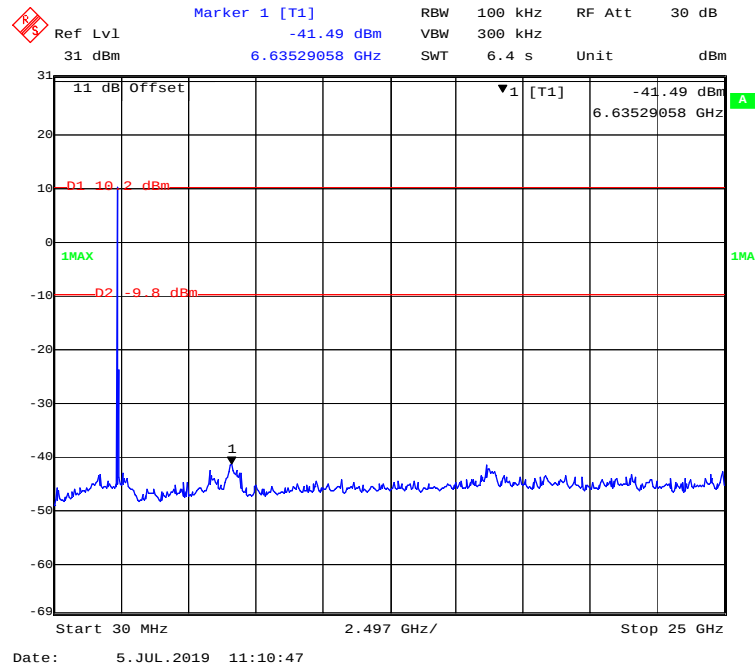


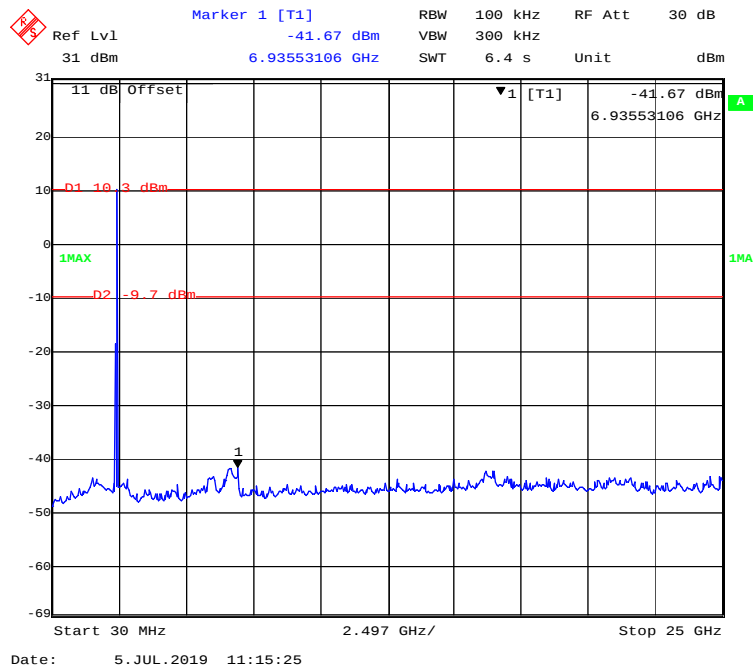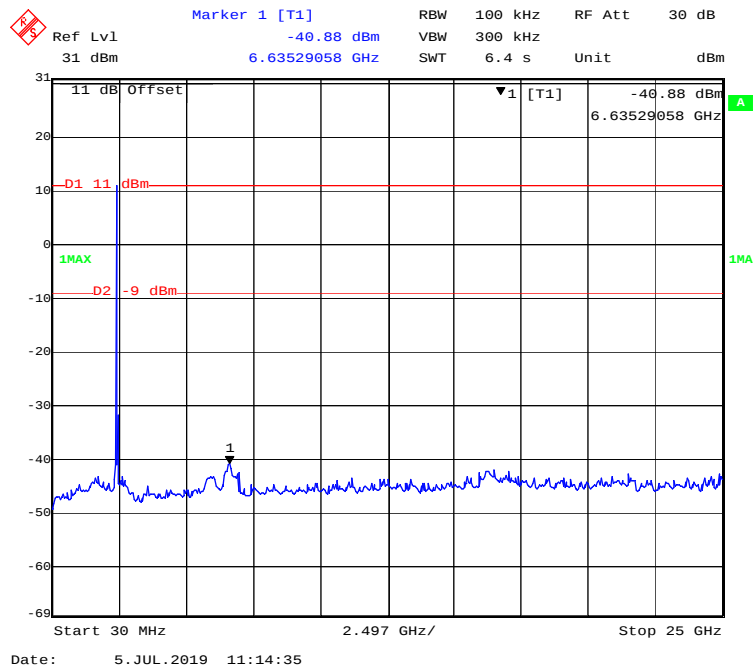Chain1: 802.11g Mode Middle Channel**Chain1: 802.11g Mode High Channel**


Chain1: 802.11n-HT20 Mode Low Channel

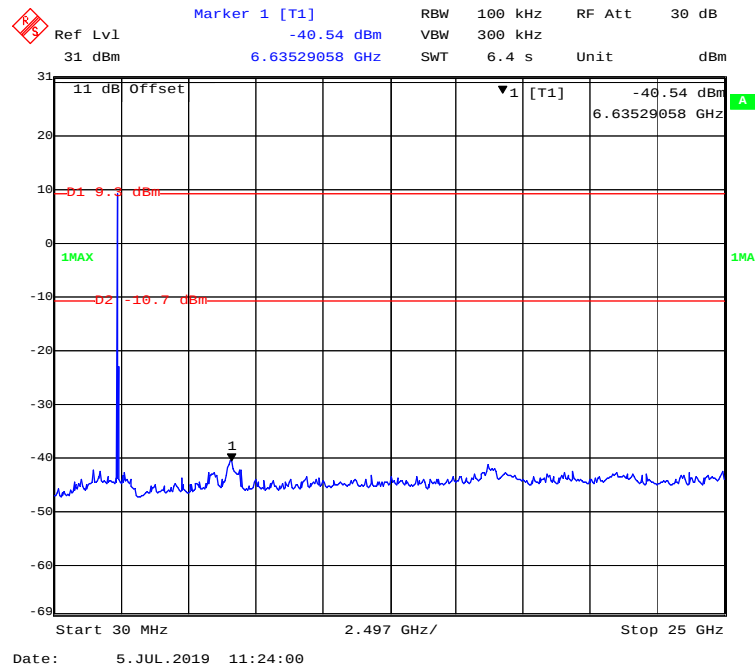


Chain1: 802.11n-HT20 Mode Middle Channel

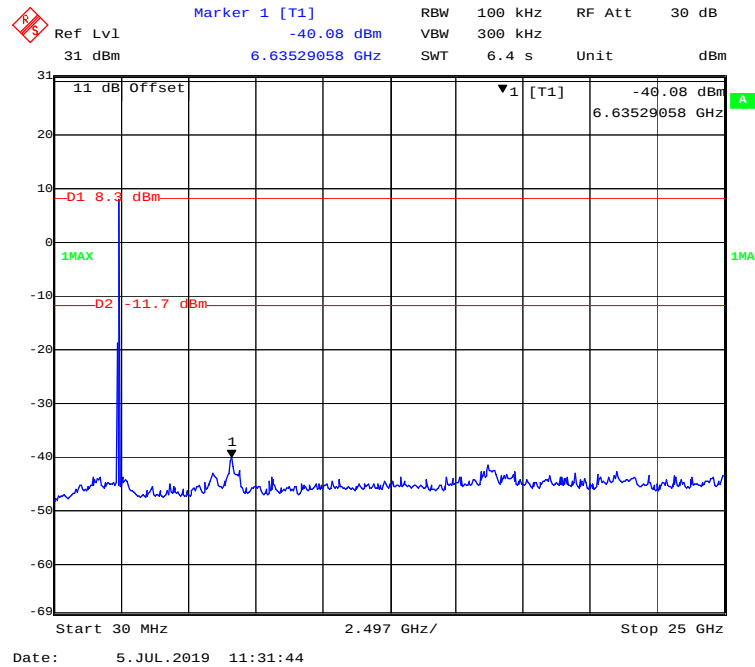


Chain1: 802.11n-HT20 Mode High Channel

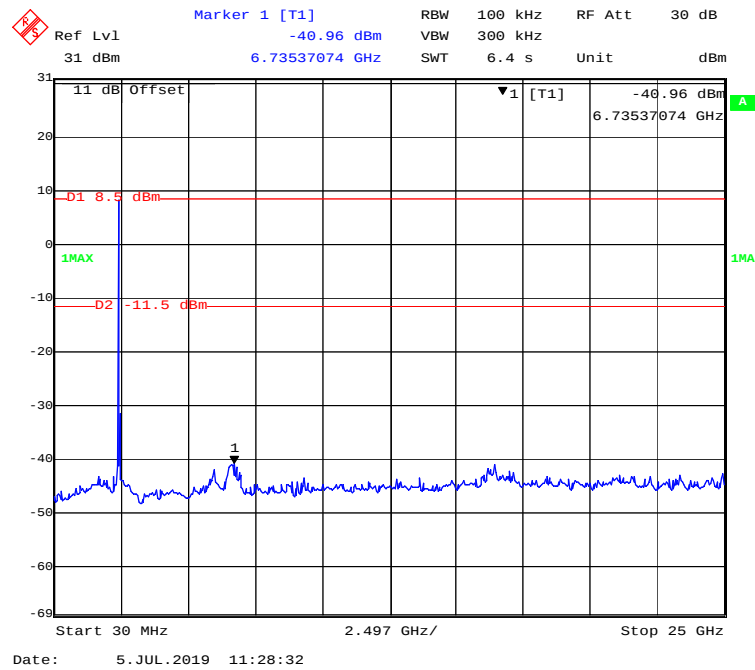


Chain1: 802.11n-HT40 Mode Low Channel

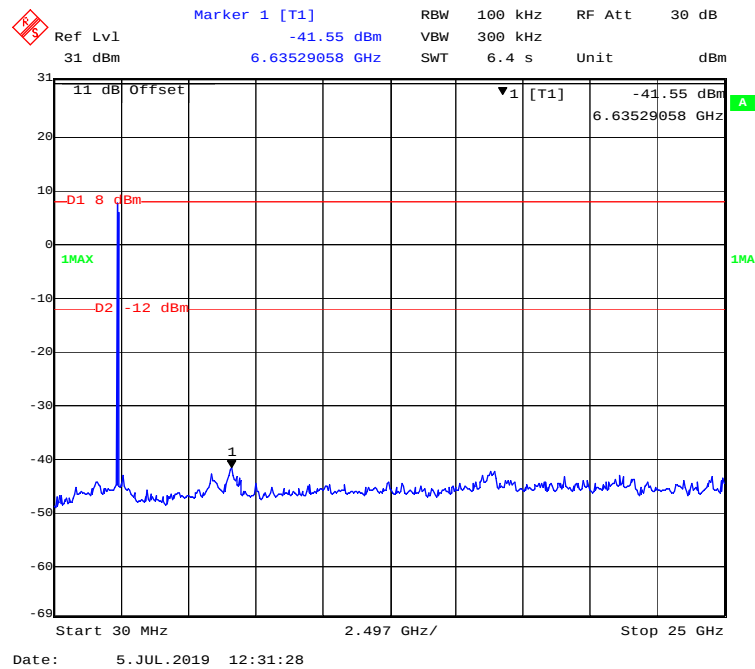

Chain1: 802.11n-HT40 Mode Middle Channel

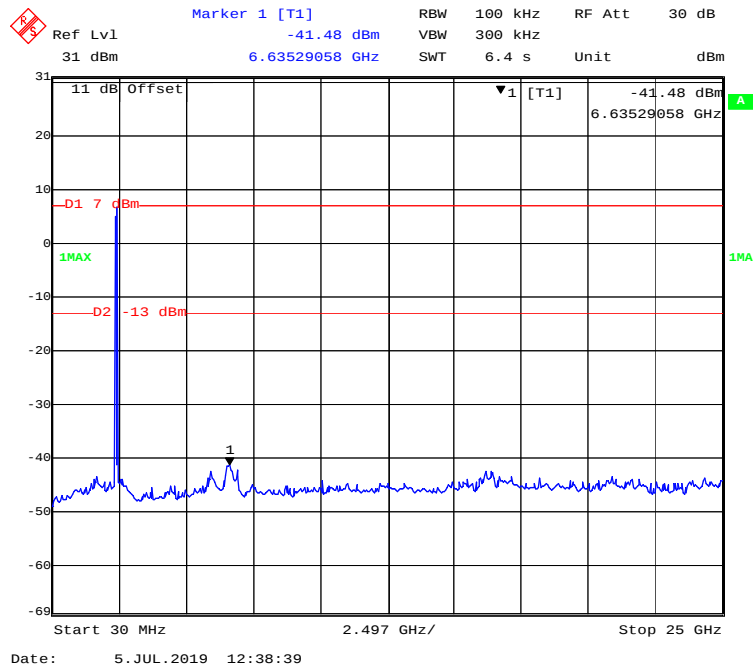


Chain1: 802.11n-HT40 Mode High Channel

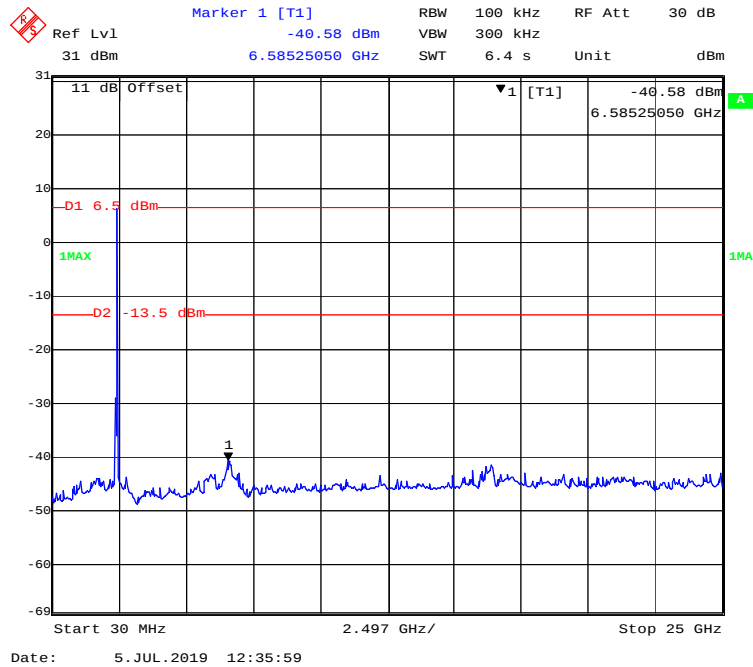


Conducted Spurious Emissions at Antenna Port


Chain2: 802.11b Mode Low Channel

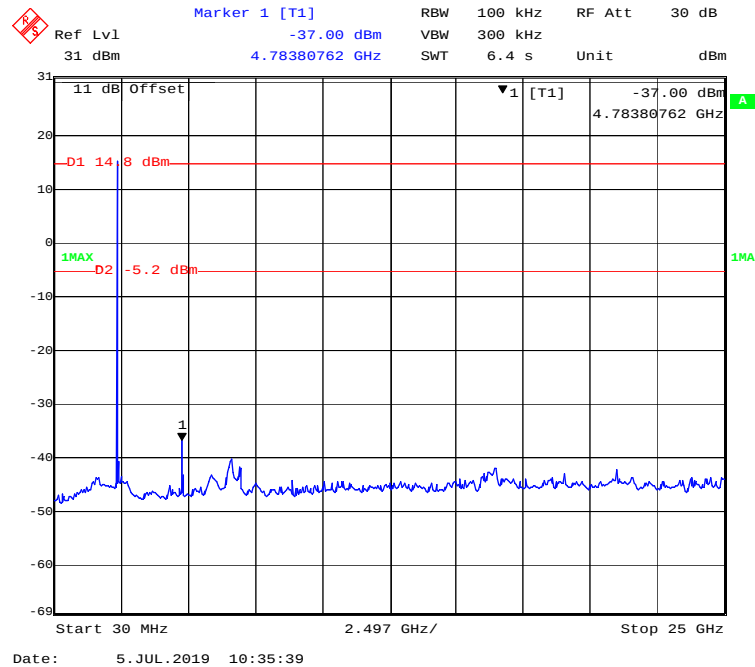


Chain2: 802.11b Mode Middle Channel

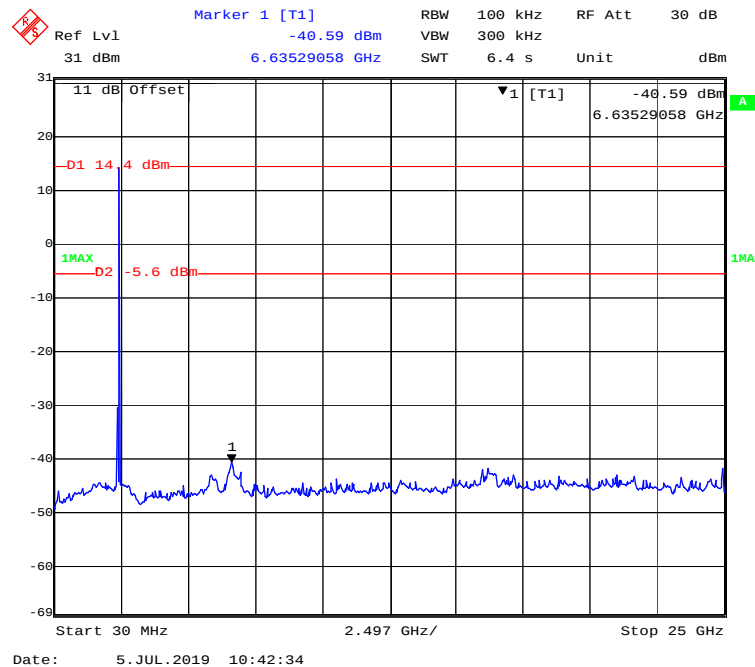


Chain2: 802.11b Mode High Channel

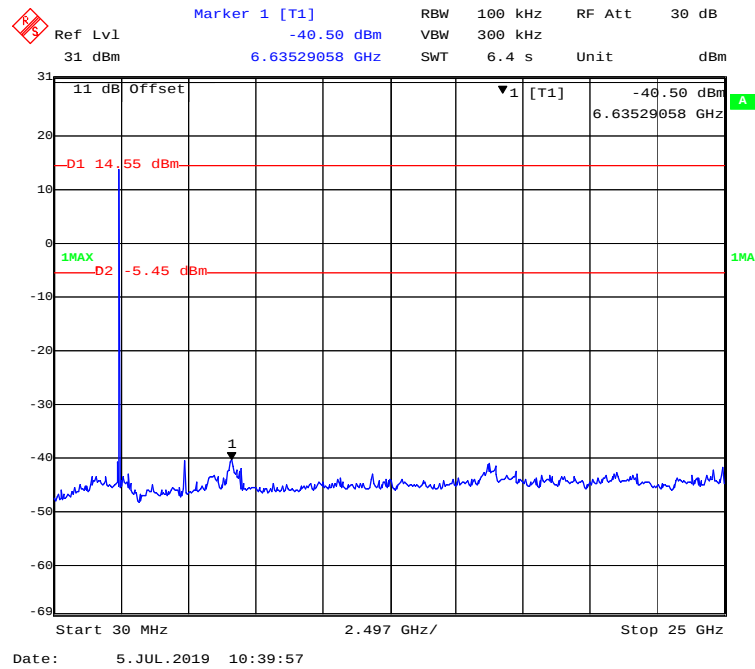


Chain2: 802.11g Mode Low Channel

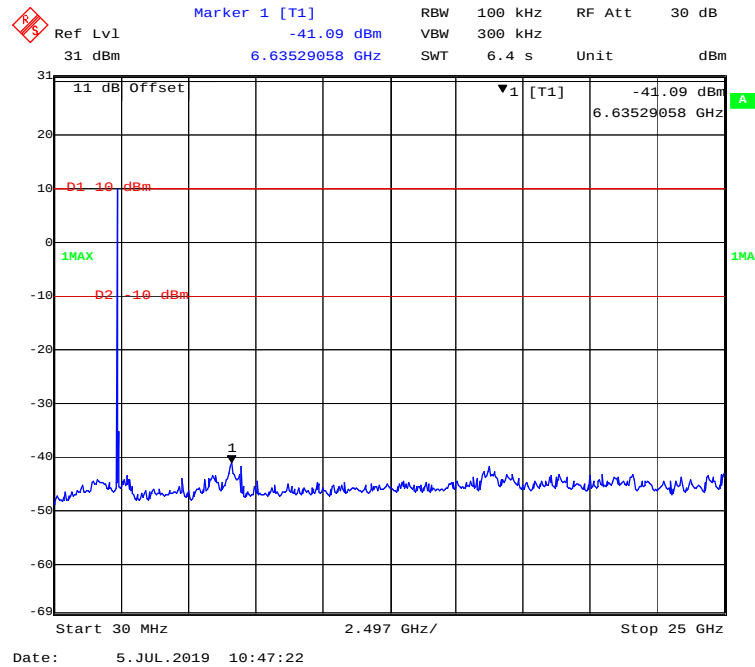


Chain2: 802.11g Mode Middle Channel

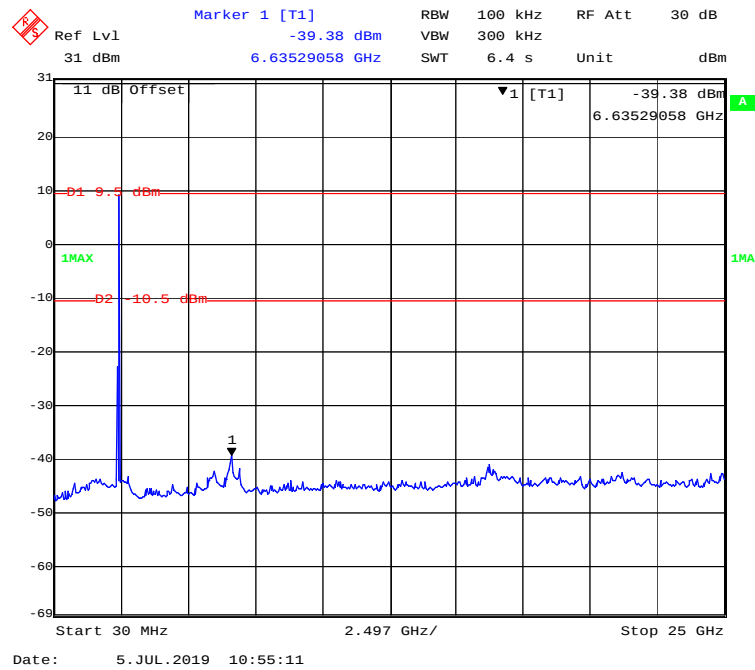


Chain2: 802.11g Mode High Channel

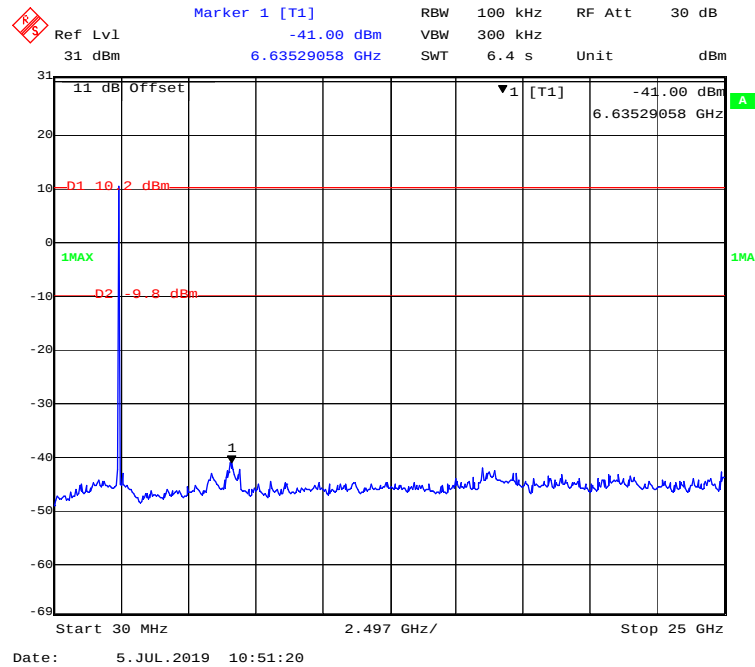


Chain2: 802.11n-HT20 Mode Low Channel

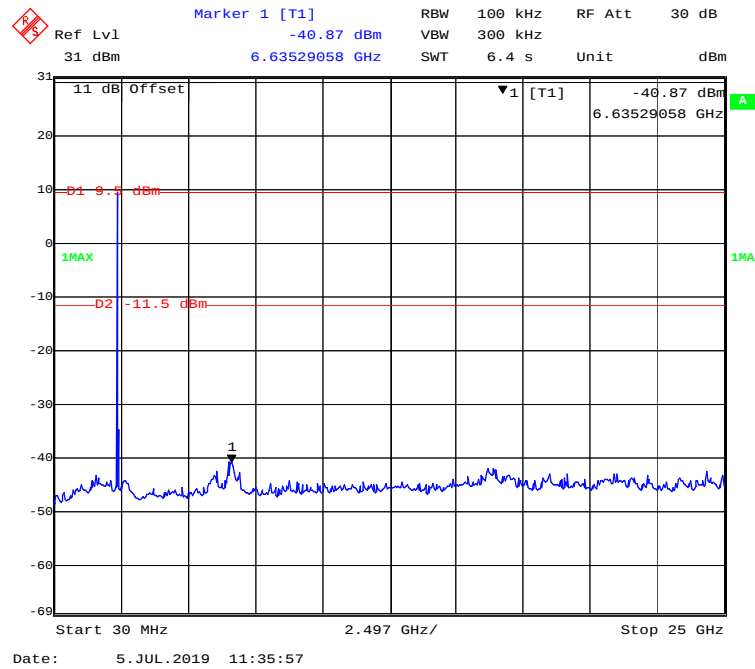


Chain2: 802.11n-HT20 Mode Middle Channel

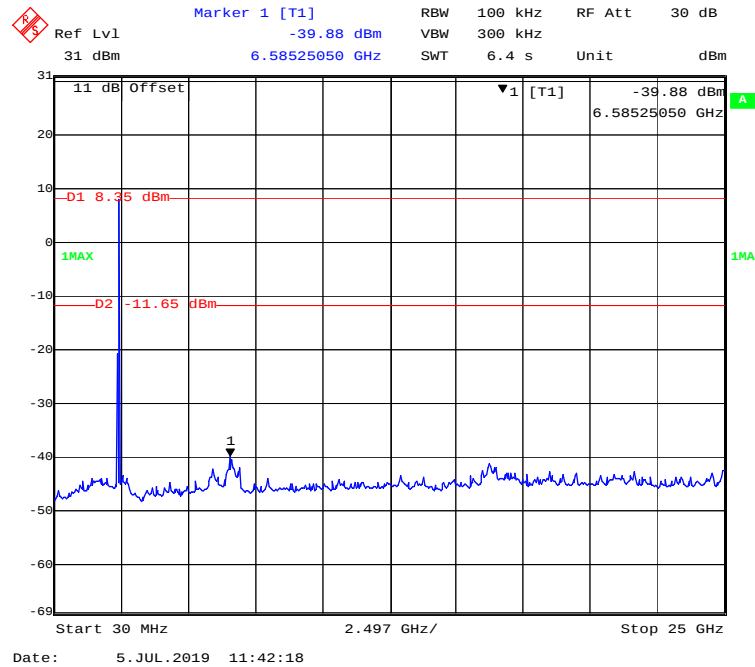


Chain2: 802.11n-HT20 Mode High Channel

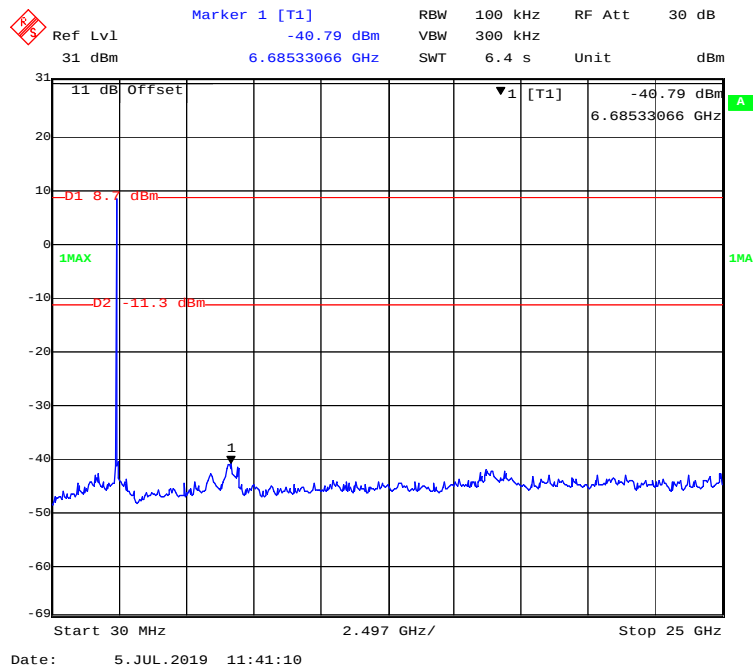


Chain2: 802.11n-HT40 Mode Low Channel

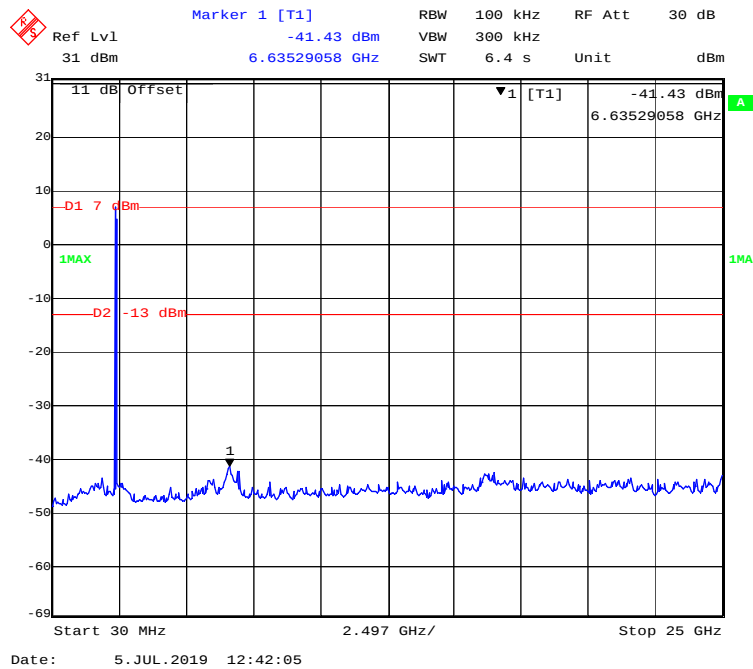

Chain2: 802.11n-HT40 Mode Middle Channel

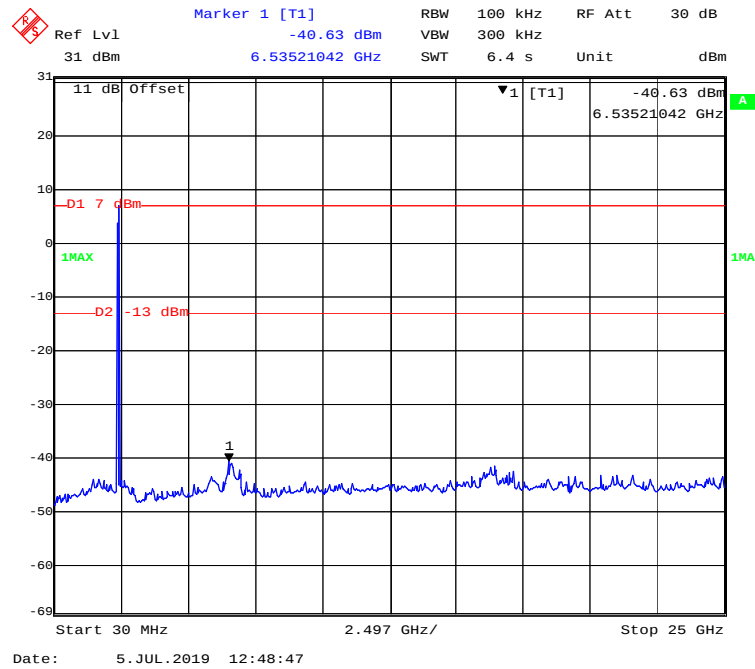

Chain2: 802.11n-HT40 Mode High Channel

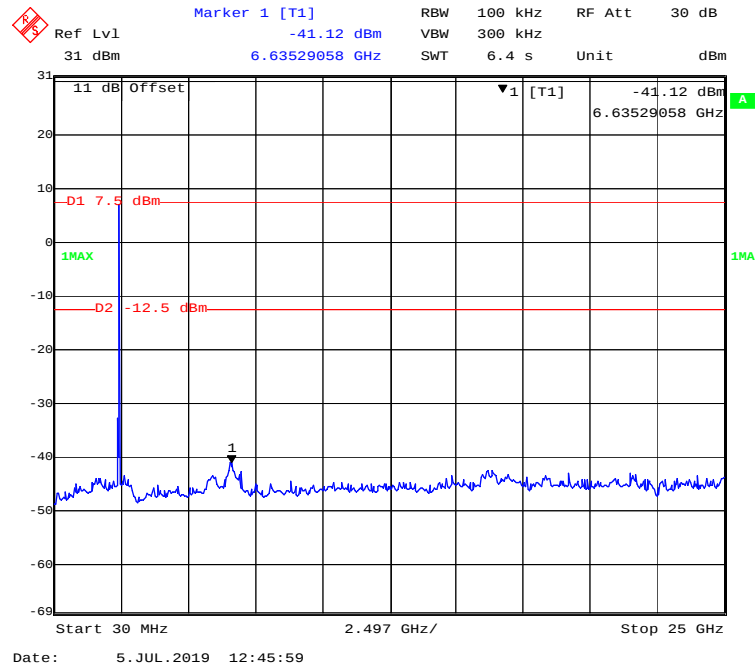


FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Test Data****Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.3kPa


The testing was performed by Max Min on 2019-07-05.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)			Limit (MHz)
		Chain 0	Chain 1	Chain 2	
	802.11b Mode				
Low	2412	7.094	7.094	7.094	≥ 0.5
Middle	2437	7.094	7.094	7.094	≥ 0.5
High	2462	7.094	7.094	7.094	≥ 0.5
	802.11g Mode				
Low	2412	15.631	15.451	15.812	≥ 0.5
Middle	2437	15.691	15.631	15.812	≥ 0.5
High	2462	15.912	15.631	15.511	≥ 0.5
	802.11n-HT20 Mode				
Low	2412	15.691	15.511	15.752	≥ 0.5
Middle	2437	15.691	15.812	15.511	≥ 0.5
High	2462	15.331	15.511	15.511	≥ 0.5
	802.11n-HT40 Mode				
Low	2422	32.585	30.180	35.110	≥ 0.5
Middle	2437	33.908	35.110	35.110	≥ 0.5
High	2452	35.110	35.110	35.110	≥ 0.5


Chain0: 802.11b Mode Low Channel

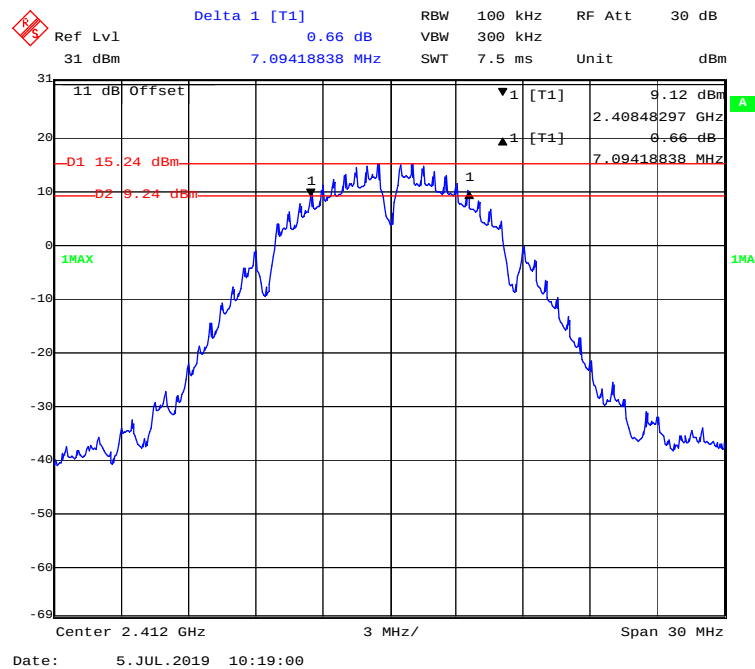


Chain0: 802.11b Mode Middle Channel

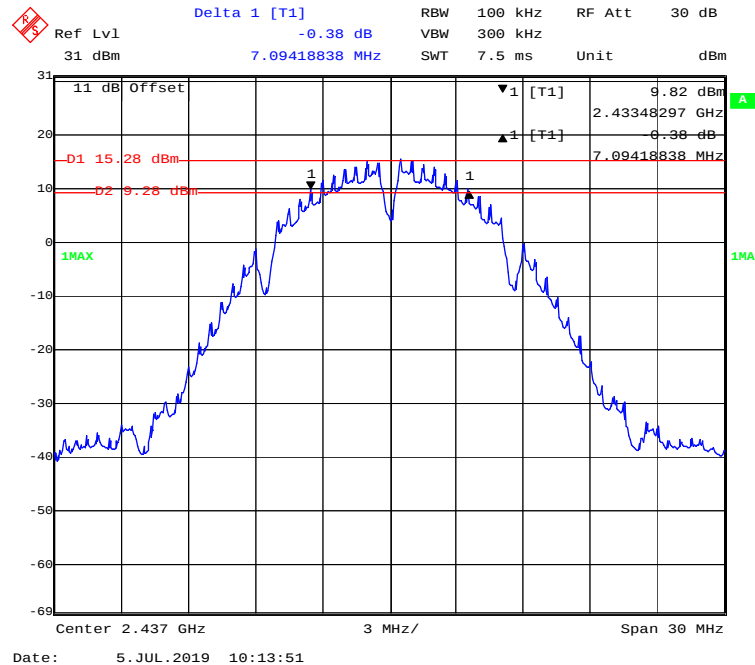


Chain0: 802.11b Mode High Channel

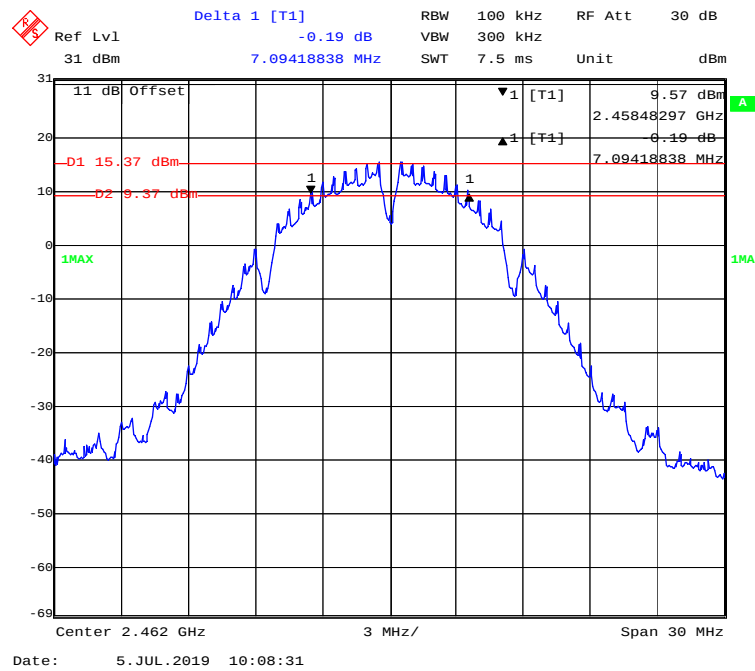


Chain0: 802.11g Mode Low Channel


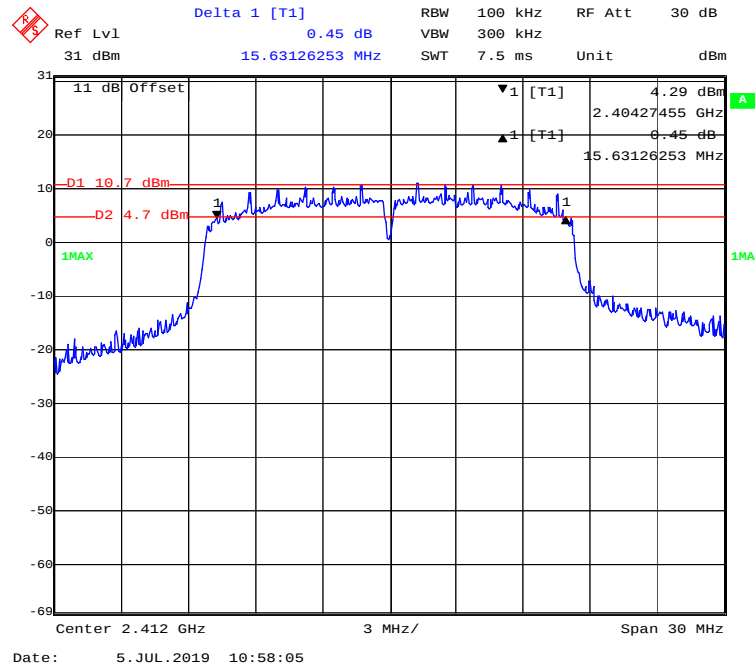


Chain0: 802.11g Mode Middle Channel

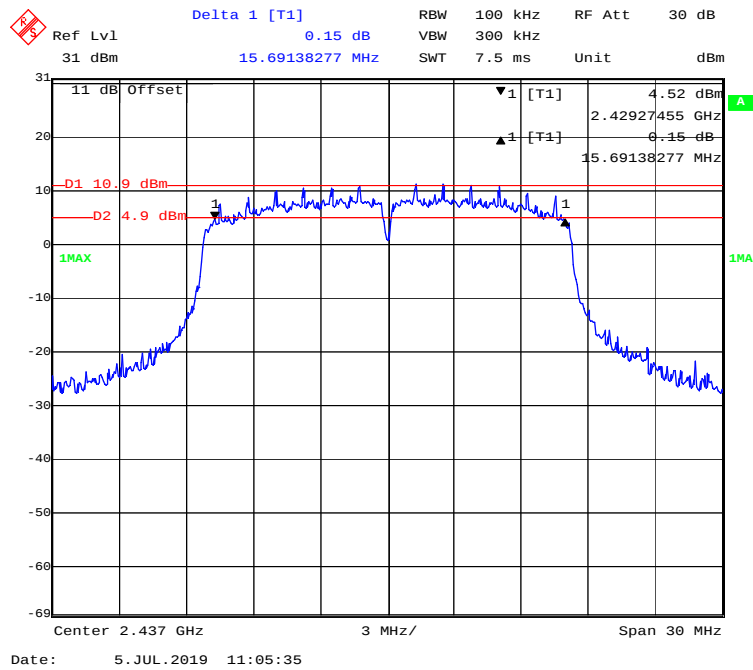


Chain0: 802.11g Mode High Channel

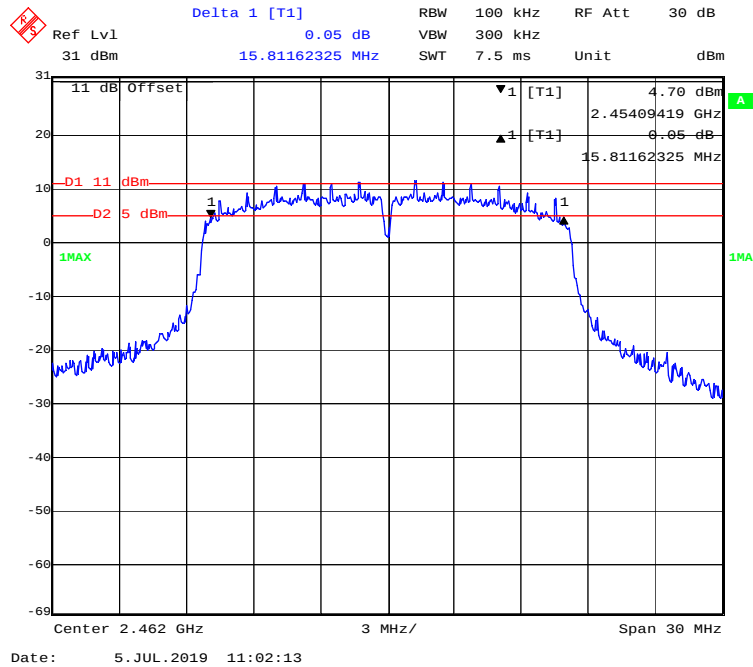


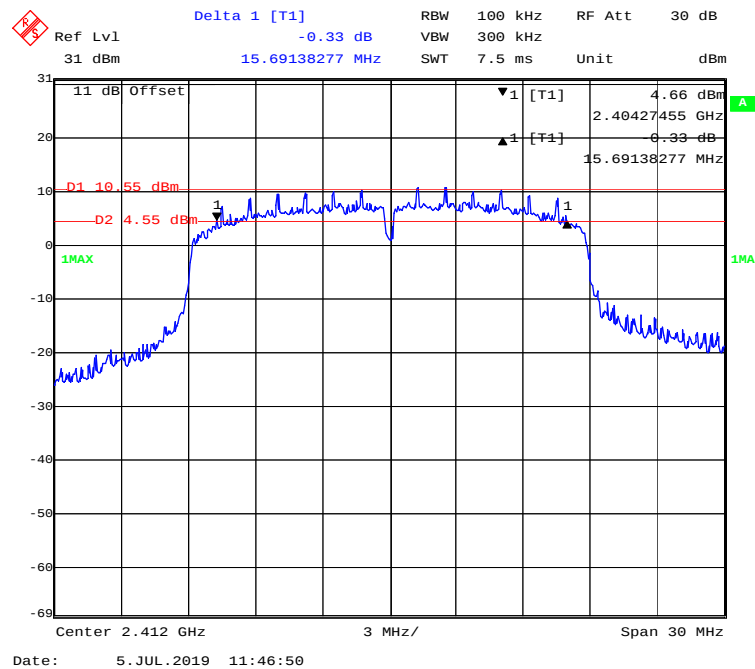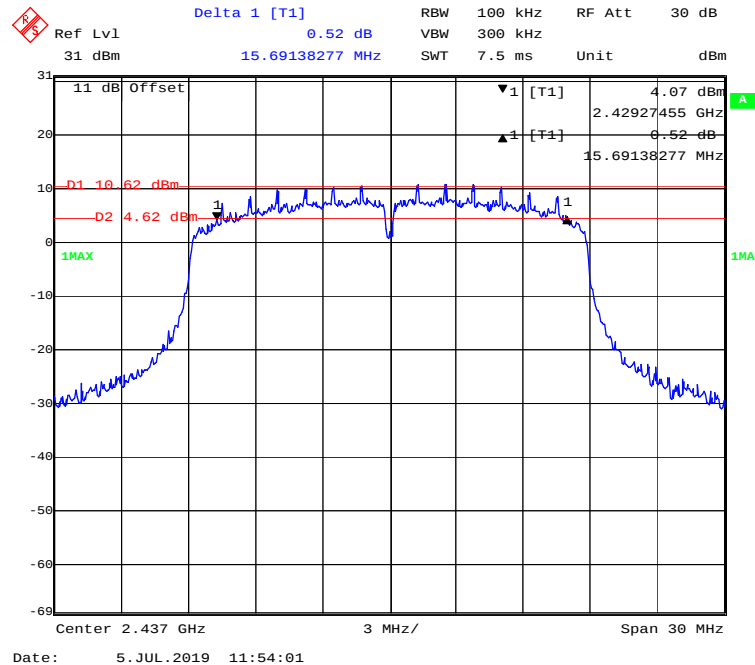Chain0: 802.11n-HT20 Mode Low Channel**Chain0: 802.11n-HT20 Mode Middle Channel**

Chain0: 802.11n-HT20 Mode High Channel

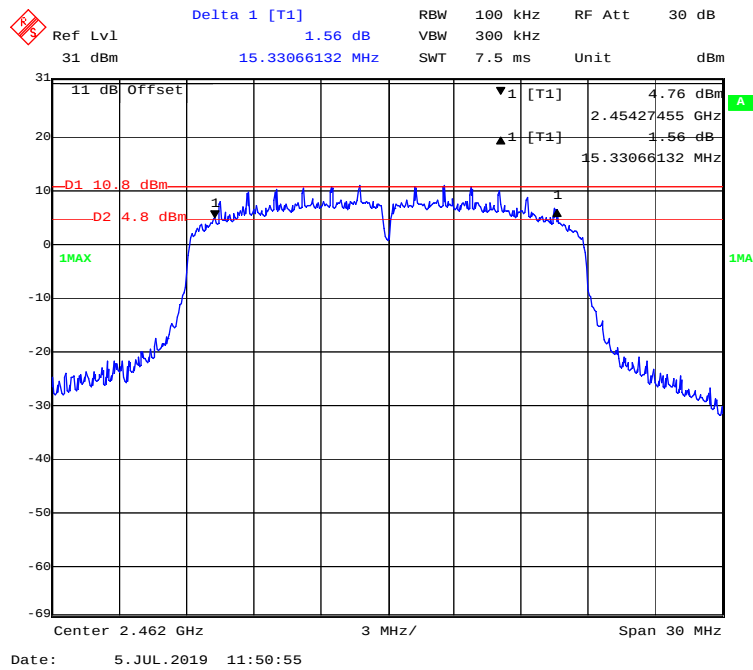

Chain0: 802.11n-HT40 Mode Low Channel

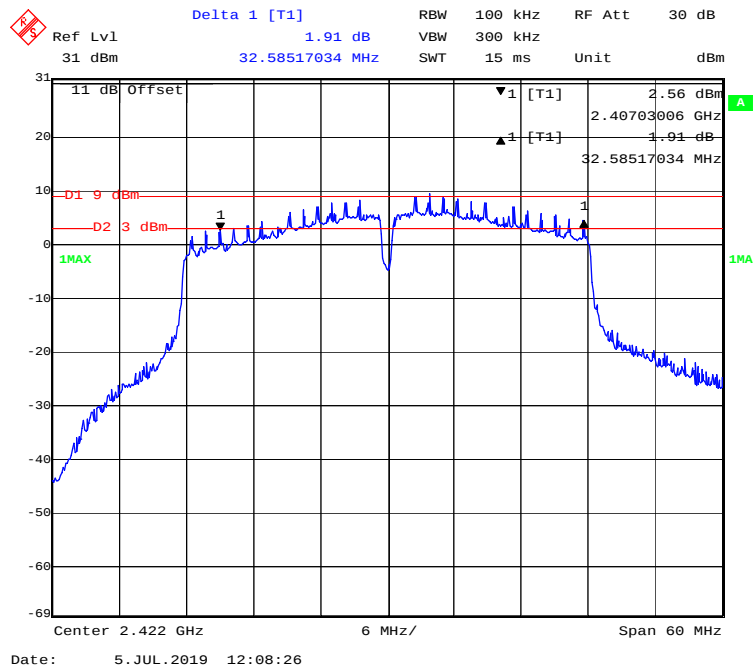

Delta 1 [T1] 1.95 dB

Ref Lvl 31 dBm RBW 100 kHz RF Att 30 dB

VBW 300 kHz Span 60 MHz

SWT 15 ms Unit dBm

11 dB Offset

▼ 1 [T1] 2.66 dBm

▲ 1 [T1] 2.42070741 GHz

1.95 dB

33.90781563 MHz

D1 8.94 dBm

D2 2.94 dBm

1MAX

Center 2.437 GHz 6 MHz/

Date: 5.JUL.2019 12:22:49

[illegible]

[illegible]

Delta 1 [T1]
 RBW 100 kHz RF Att 30 dB
 VBW 300 kHz
 SWT 7.5 ms Unit dBm

Ref Lvl 31 dBm
 -0.44 dB
 7.09418838 MHz



11 dB Offset
 10.22 dBm
 2.43348297 GHz
 -0.44 dB
 7.09418838 MHz

-D1 15.7 dBm
 -D2 9.7 dBm


1MAX

Center 2.437 GHz 3 MHz/ Span 30 MHz


Date: 5 JUL 2019 10:30:26

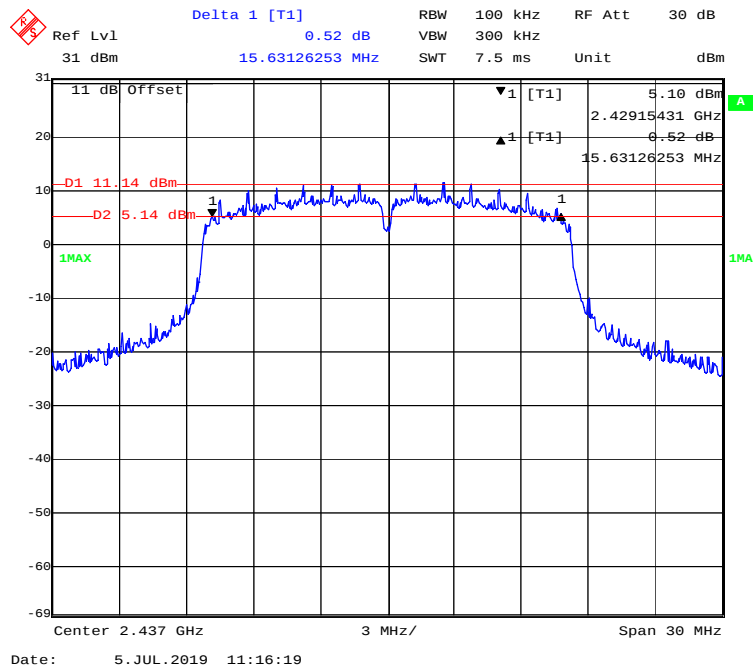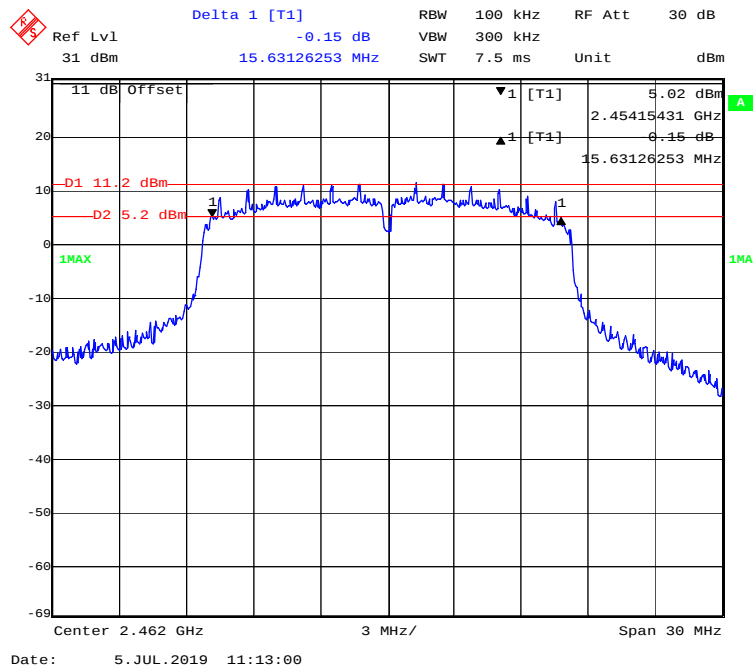Chain1: 802.11g Mode Middle Channel**Chain1: 802.11g Mode High Channel**


Chain1: 802.11n-HT20 Mode Low Channel

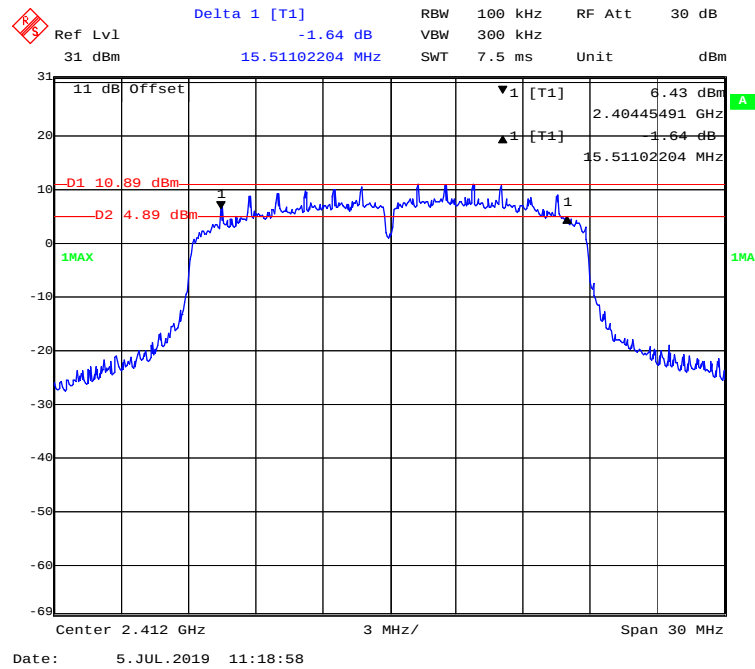


Chain1: 802.11n-HT20 Mode Middle Channel

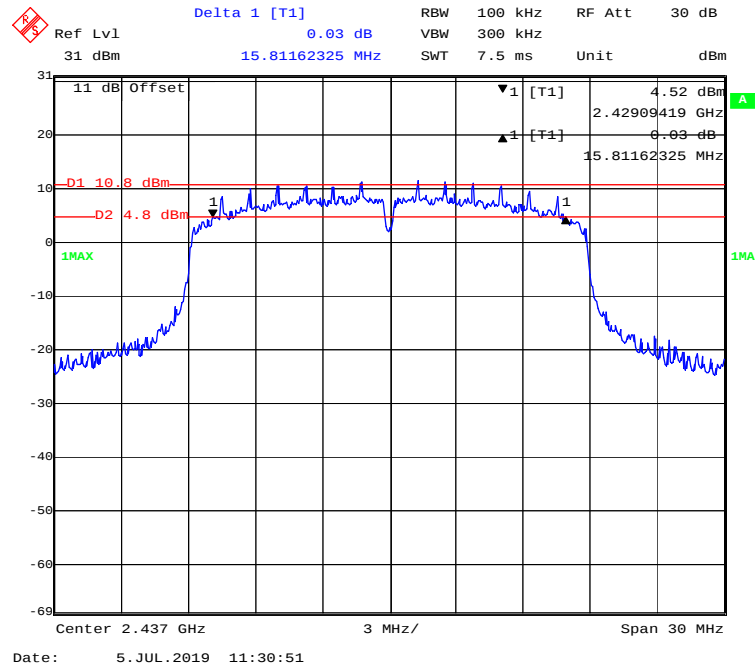

Chain1: 802.11n-HT20 Mode High Channel

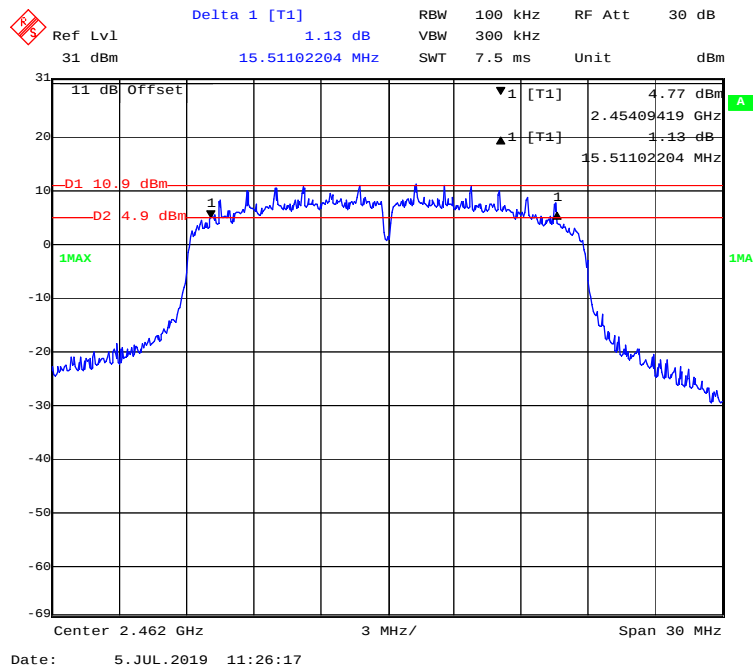

Chain1: 802.11n-HT40 Mode Low Channel

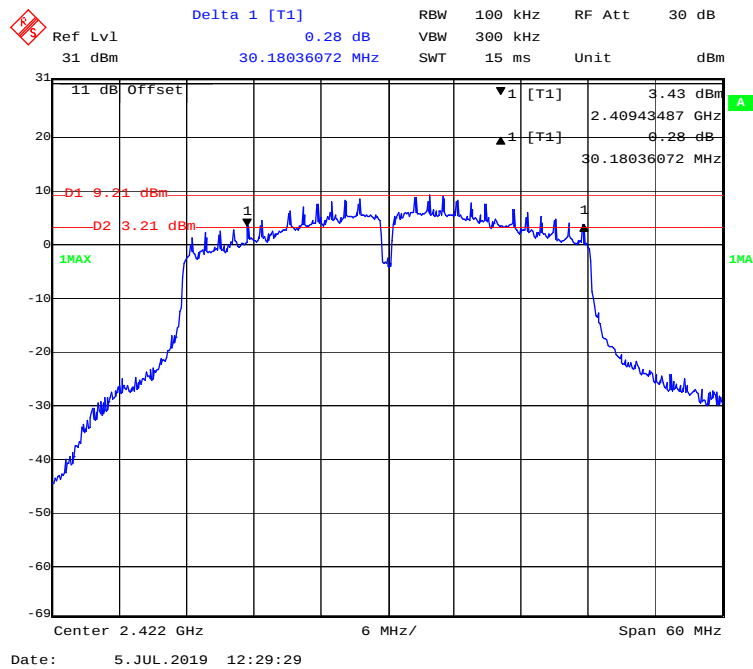

Delta 1 [T1]

Ref Lvl 0.82 dB

31 dBm

35.11022044 MHz

RBW 100 kHz RF Att 30 dB

SWT 300 kHz

15 ms

Unit dBm

11 dB Offset

▼ 1 [T1] 2.31 dBm

▲ 1 [T1] 2.41950501 GHz

0.82 dB

35.11022044 MHz

D1 8.55 dBm

D2 2.55 dBm

1MAX

Center 2.437 GHz

6 MHz/

Span 60 MHz

Date: 5.JUL.2019 12:37:58

Delta 1 [T1] -0.80 dB

Ref Lvl 31 dBm

31.1022044 MHz

RBW 100 kHz RF Att 30 dB

VBW 300 kHz

SWT 15 ms Unit dBm

11 dB Offset

▼ 1 [T1] 2.43 dBm

▲ 1 [T1] 2.434501 GHz

-D1 8.65 dBm

-D2 2.05 dBm

1MAX


Center 2.452 GHz

6 MHz/


Span 60 MHz

Date: 5.JUL.2019 12:34:19


Chain2: 802.11b Mode Low Channel

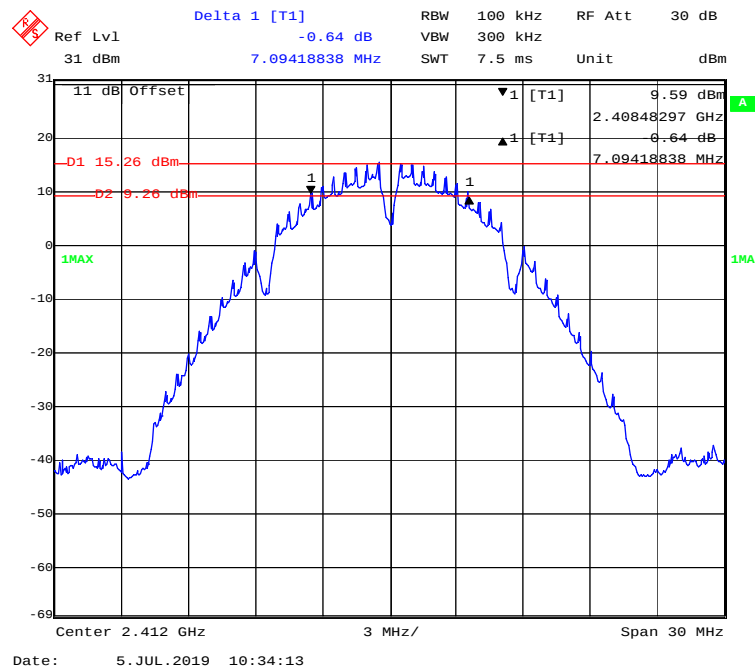


Chain2: 802.11b Mode Middle Channel

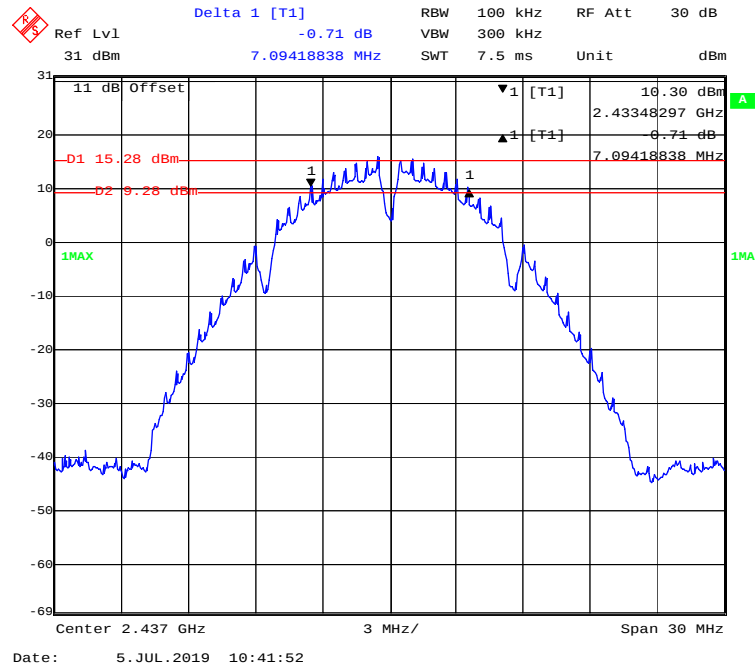


Chain2: 802.11b Mode High Channel

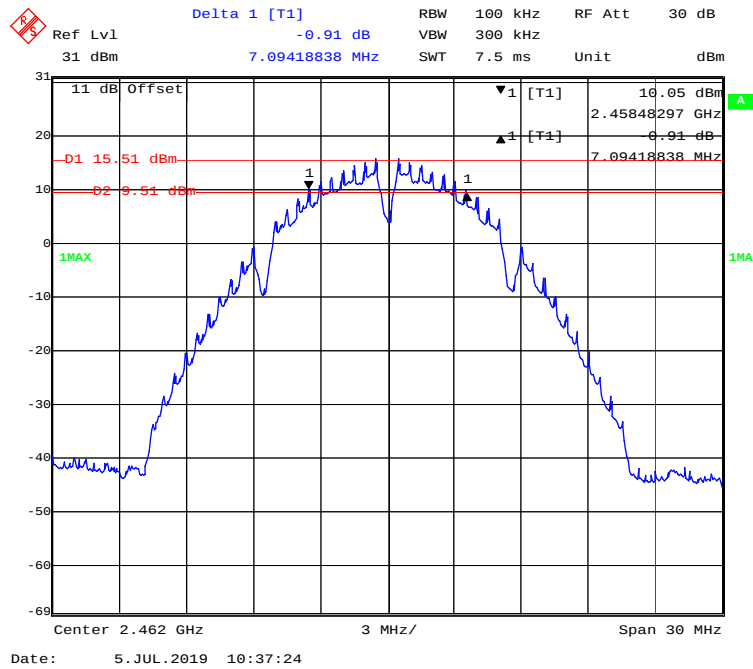


Chain2: 802.11g Mode Low Channel

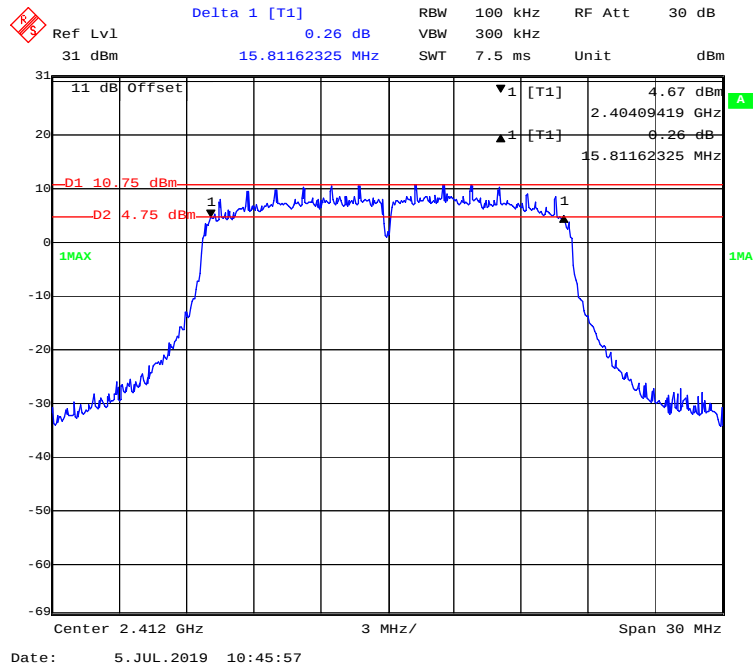


Chain2: 802.11g Mode Middle Channel

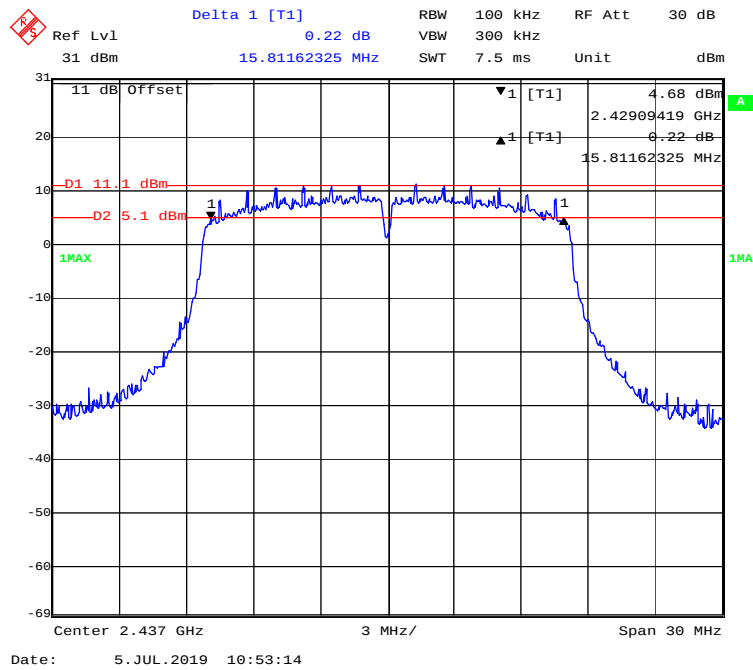


Chain2: 802.11g Mode High Channel

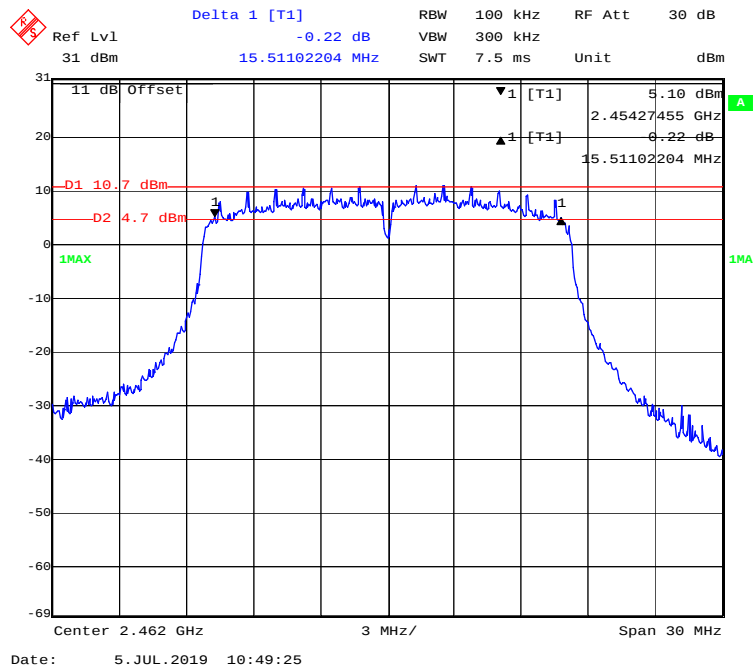


Chain2: 802.11n-HT20 Mode Low Channel

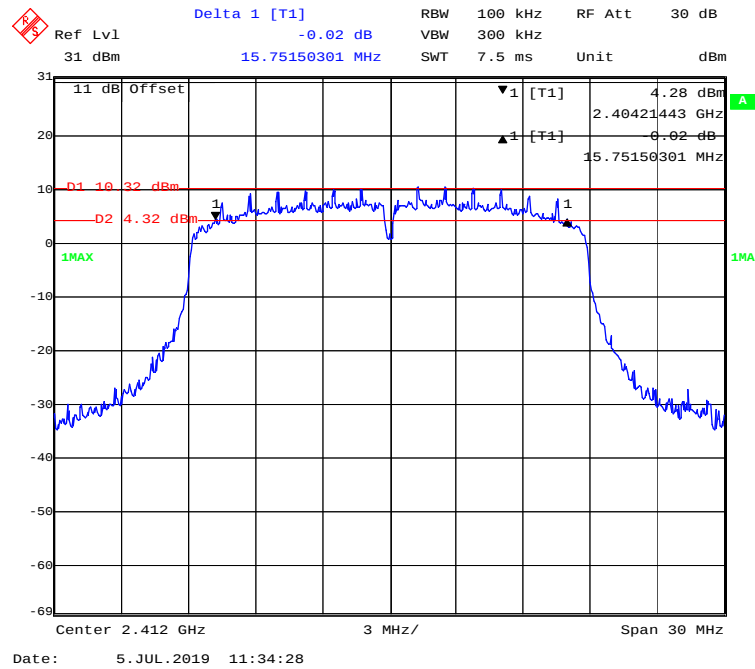


Chain2: 802.11n-HT20 Mode Middle Channel

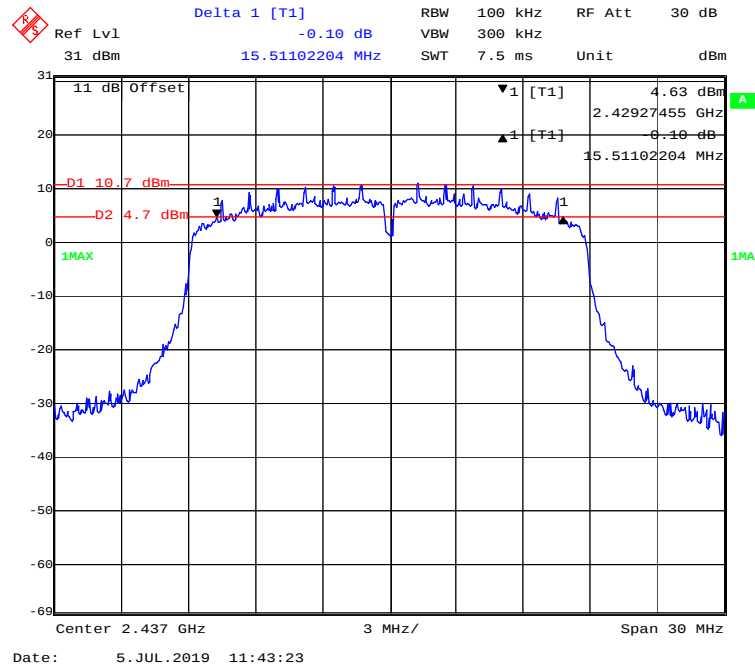

Chain2: 802.11n-HT20 Mode High Channel

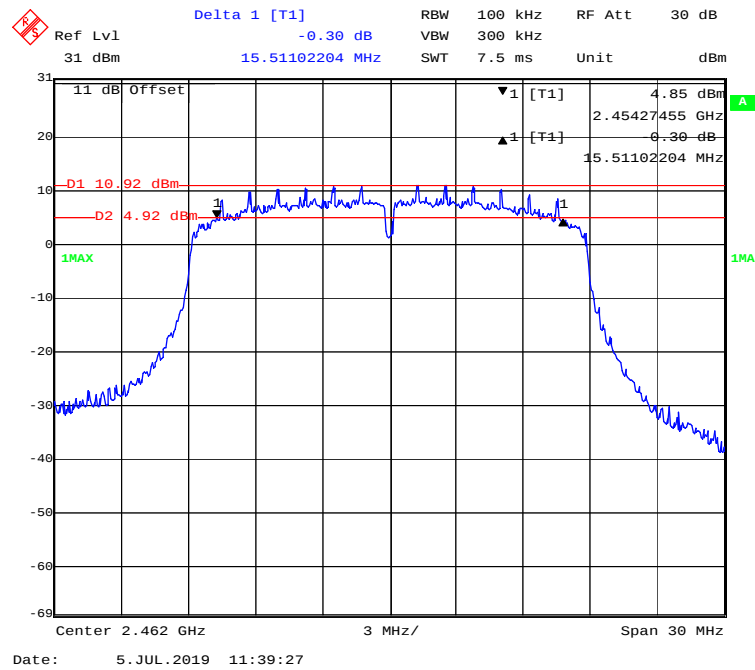

Chain2: 802.11n-HT40 Mode Low Channel

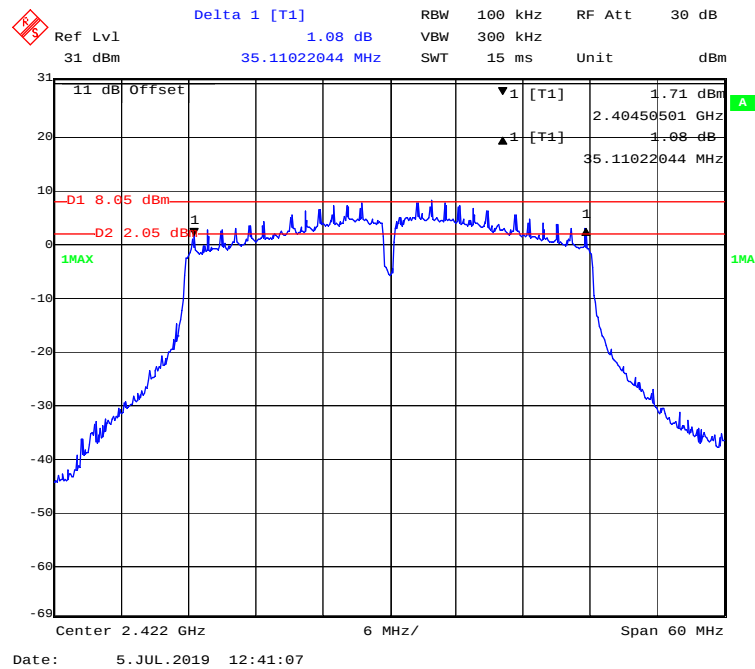

Delta 1 [T1] 0.68 dB
 RBW 100 kHz RF Att 30 dB
 Ref Lvl 31 dBm
 31 dBm 35.11022044 MHz SWT 15 ms Unit dBm

11 dB Offset
 2.40 dBm
 2.41950501 GHz
 0.68 dB
 35.11022044 MHz

D1 8.57 dBm
 D2 2.57 dBm
 1MAX

Center 2.437 GHz 6 MHz/ Span 60 MHz

Date: 5.JUL.2019 12:47:58

Delta 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl -0.49 dB VBW 300 kHz
 31 dBm SWT 15 ms Unit dBm

11 dB Offset ▼ 1 [T1] 3.05 dBm
 2.434501 GHz ▲ 1 [T1] -0.49 dB
 35.11022044 MHz

-D1 8.54 dBm
 -D2 2.54 dBm
 1MAX

Center 2.452 GHz 6 MHz/ Span 60 MHz

Date: 5.JUL.2019 12:44:29

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**Applicable Standard**


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	23.8°C
Relative Humidity:	54 %
ATM Pressure:	101.2kPa

The testing was performed by Max Min on 2019-07-23.

EUT operation mode: Transmitting

Test mode	Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)				Limit (dBm)	Result
			Chain0	Chain1	Chain2	Total		
802.11b	Low	2412	23.47	23.49	23.74	/	30	Pass
	Middle	2437	22.36	23.35	23.62	/	30	Pass
	High	2462	22.72	22.37	23.02	/	30	Pass
802.11g	Low	2412	23.03	23.81	23.54	/	30	Pass
	Middle	2437	21.88	23.73	23.61	/	30	Pass
	High	2462	22.66	23.42	23.62	/	30	Pass
802.11n-HT20	Low	2412	23.11	23.62	23.62	28.23	30	Pass
	Middle	2437	21.85	23.65	23.42	27.81	30	Pass
	High	2462	22.53	23.36	23.44	27.90	30	Pass
802.11n-HT40	Low	2422	22.87	23.65	22.81	27.90	30	Pass
	Middle	2437	22.41	23.41	22.85	27.68	30	Pass
	High	2452	22.51	21.98	22.57	27.13	30	Pass

Note: The total output power= $10\log(10^{\wedge}(\text{Chain } 0/10) + 10^{\wedge}(\text{Chain } 1/10) + 10^{\wedge}(\text{Chain } 2/10))$

The maximum antenna gain is 3.67dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for NANT $\leq$ 4;

So: Directional gain = GANT + Array Gain = 3.67dBi < 6dBi, no RF out power limit was reduced.

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	48%
ATM Pressure:	101.3kPa


The testing was performed by Max Min on 2019-07-05.

EUT operation mode: Transmitting


Test Result: Compliant

Note: For SISO mode, The margin is more than 4.77dB, So 3*3 MIMO mode is compliant.


Chain0: 802.11b Mode Left Side

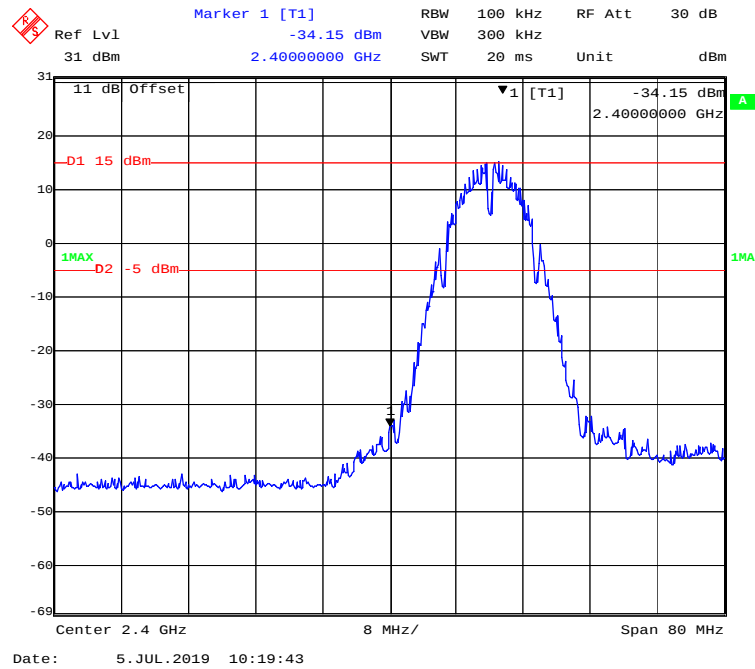


Chain0: 802.11b Mode Right Side

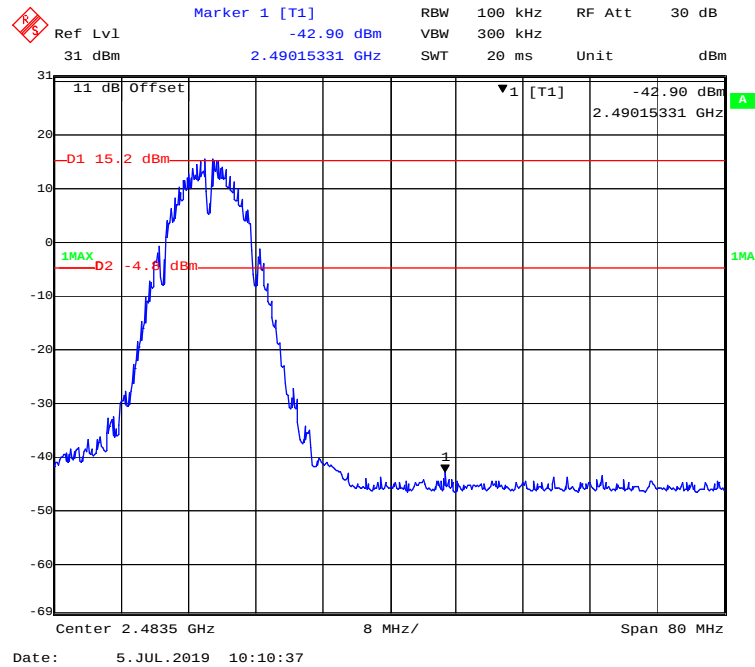


Chain0: 802.11g Mode Left Side

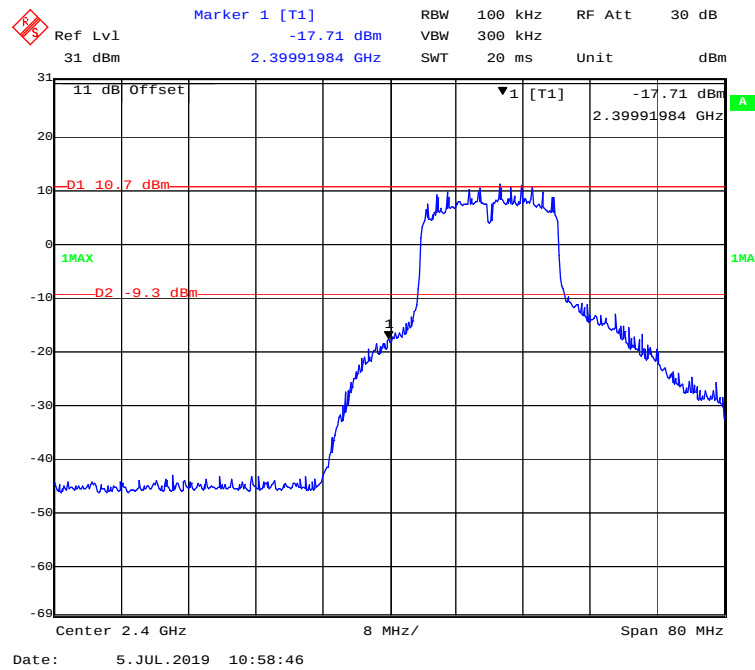


Chain0: 802.11g Mode Right Side

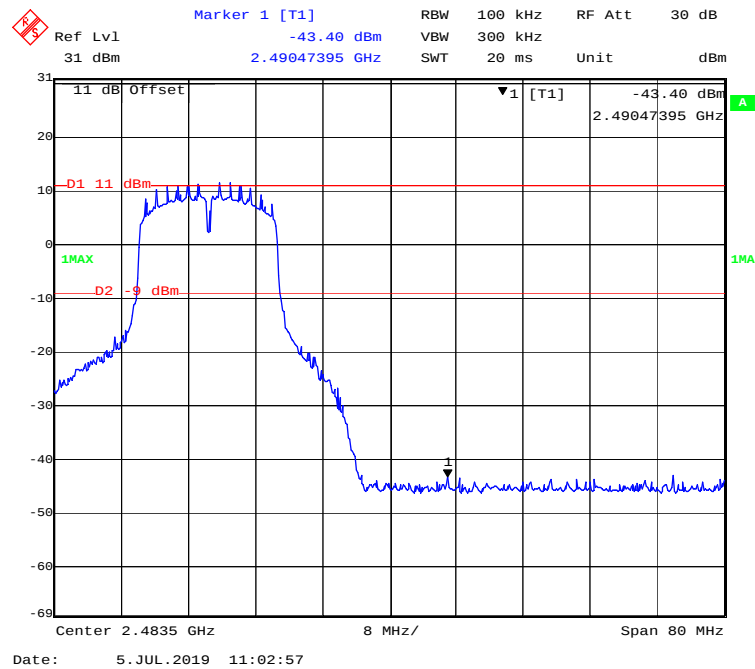


Chain0: 802.11n-HT20 Mode Left Side

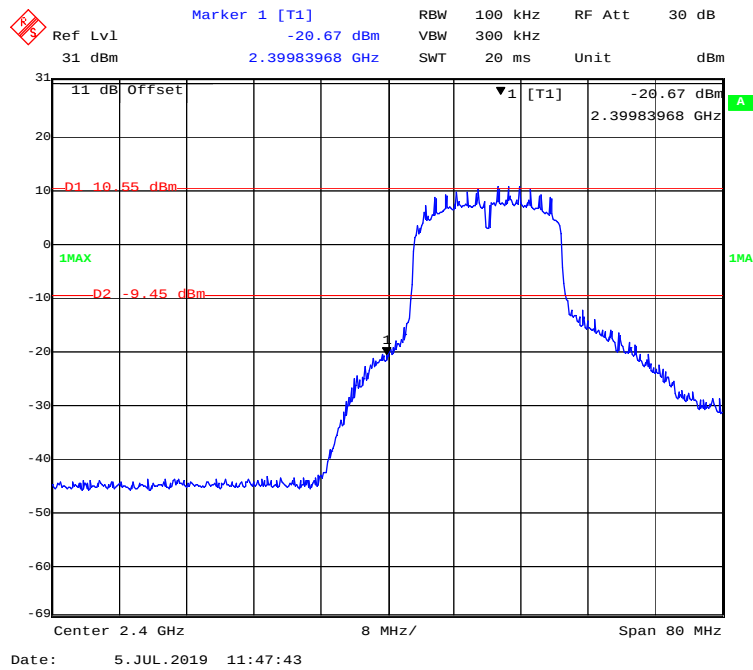


Chain0: 802.11n-HT20 Mode Right Side

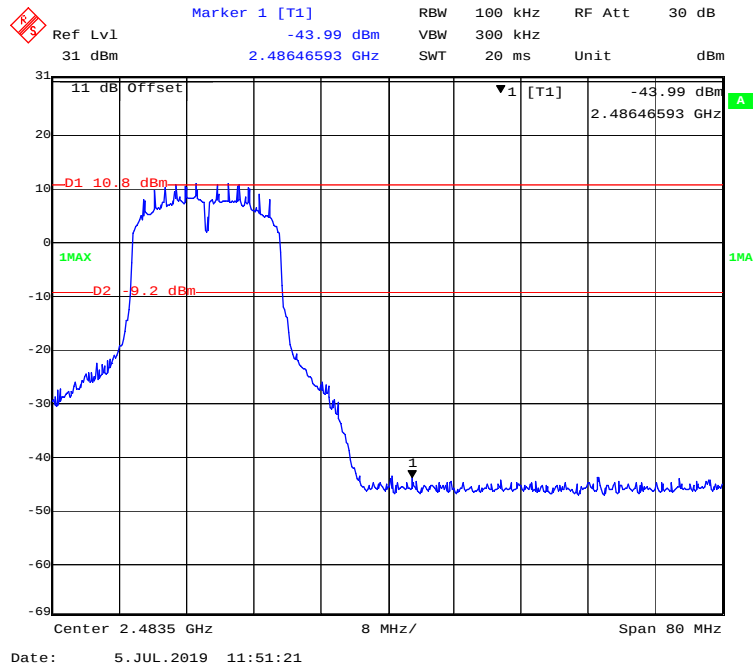


Chain0: 802.11n-HT40 Mode Left Side

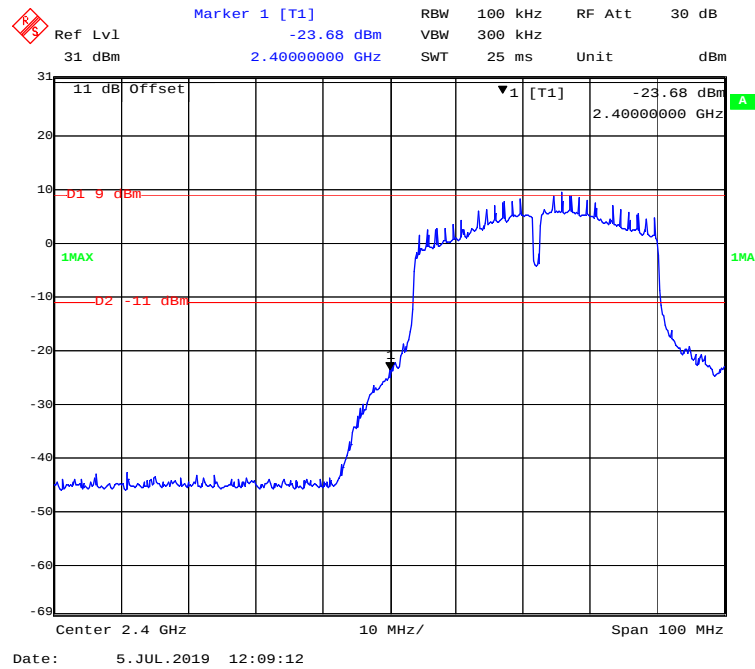


Chain0: 802.11n-HT40 Mode Right Side

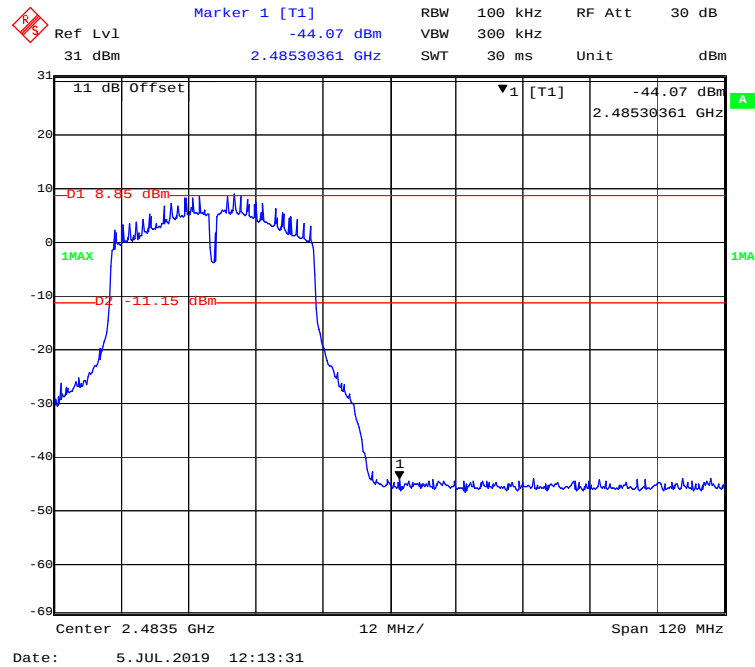


Chain1: 802.11b Mode Left Side

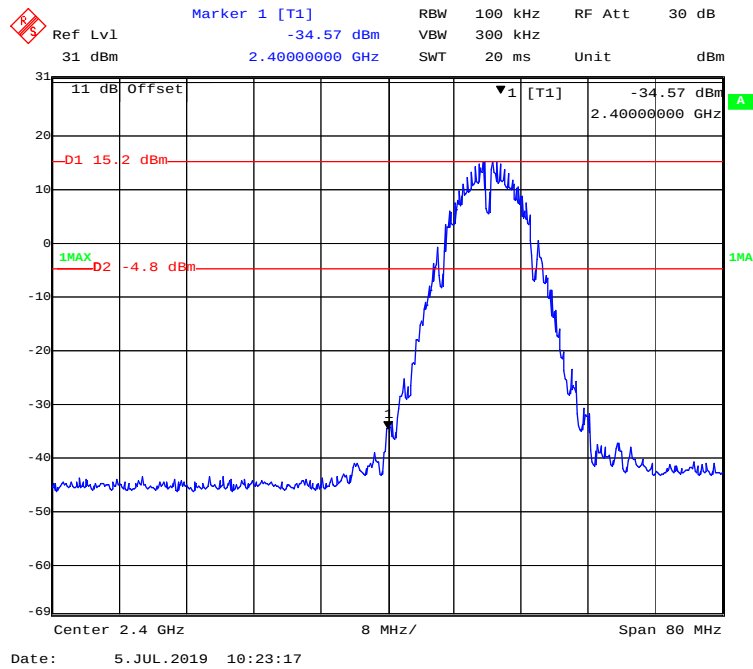


Chain1: 802.11b Mode Right Side

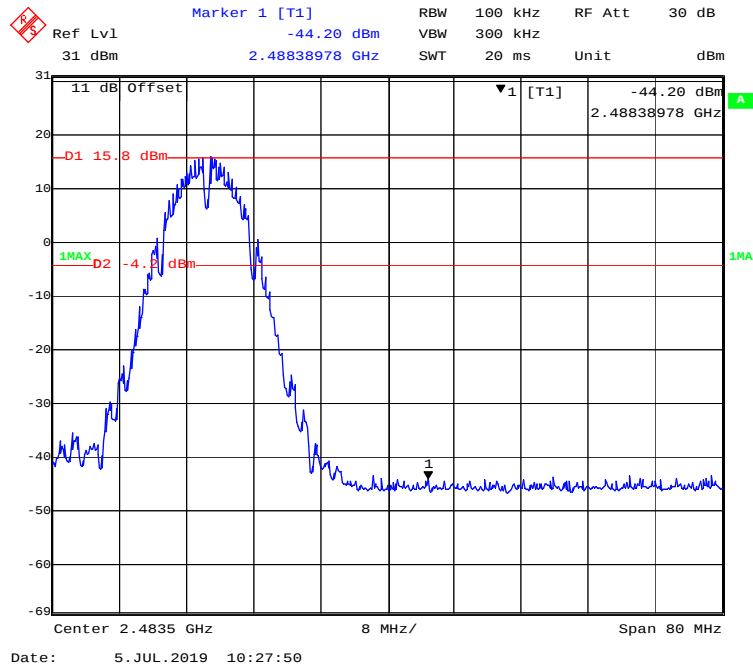


Chain1: 802.11g Mode Left Side

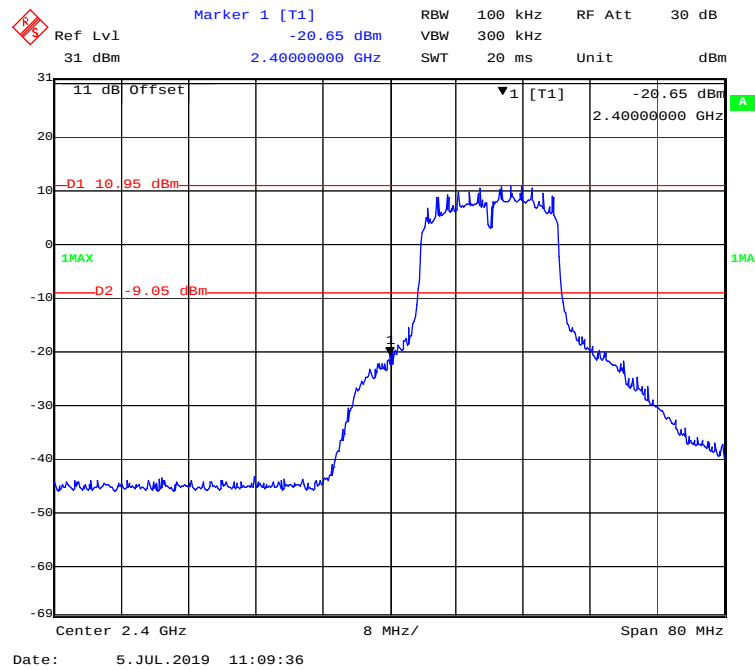


Chain1: 802.11g Mode Right Side

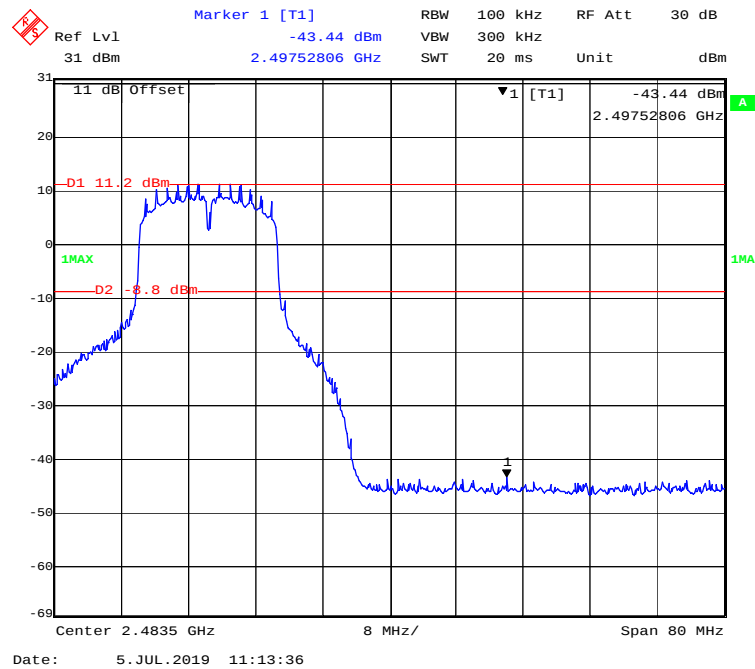


Chain1: 802.11n-HT20 Mode Left Side

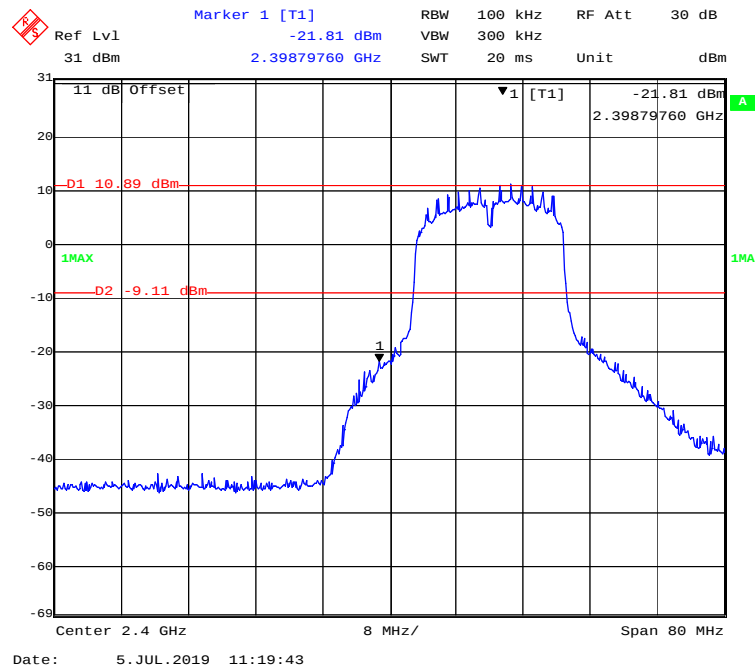


Chain1: 802.11n-HT20 Mode Right Side

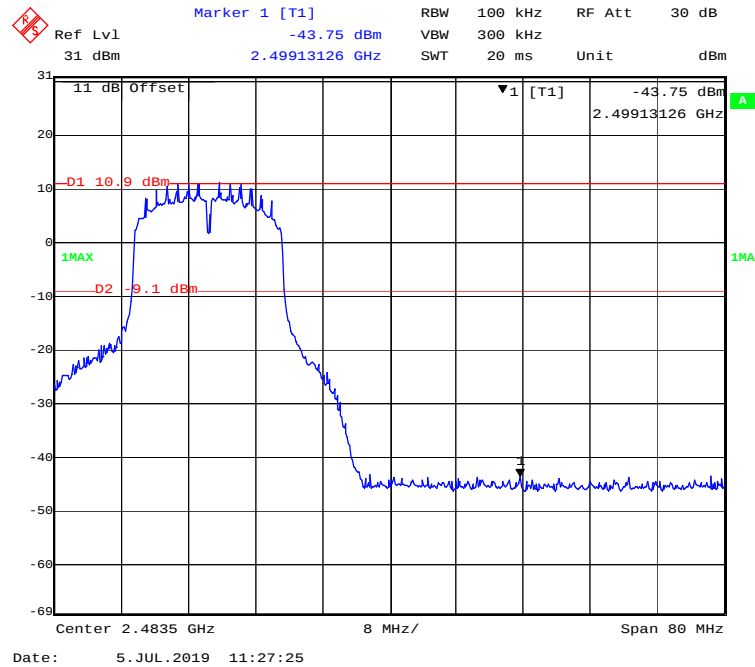


Chain1: 802.11n-HT40 Mode Left Side

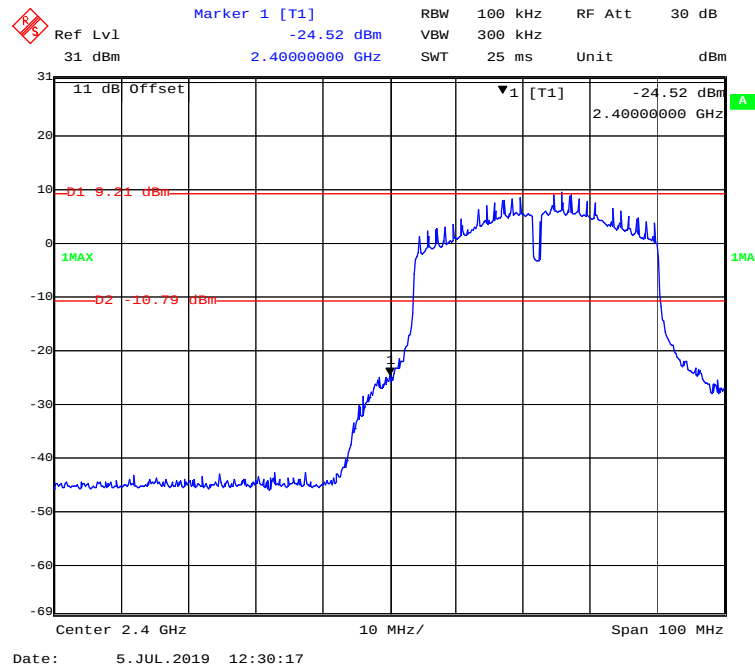


Chain1: 802.11n-HT40 Mode Right Side

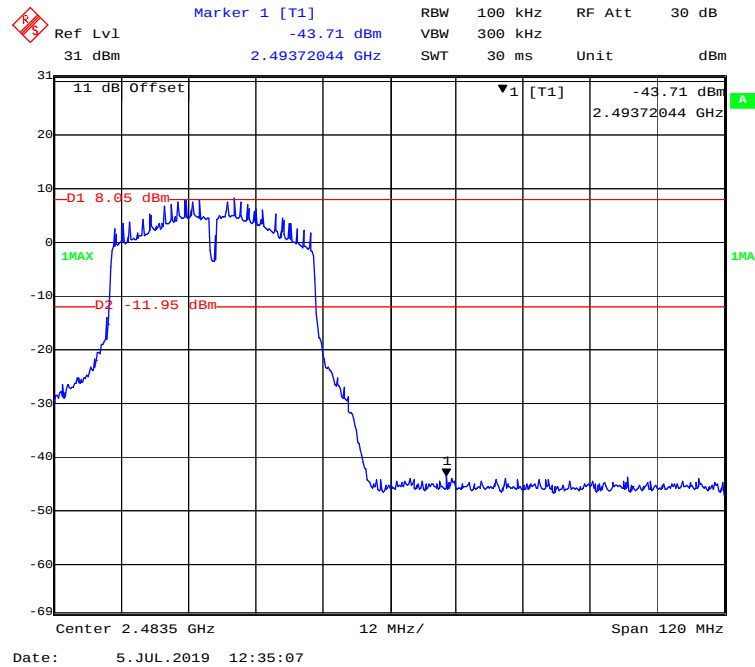


Chain2: 802.11b Mode Left Side

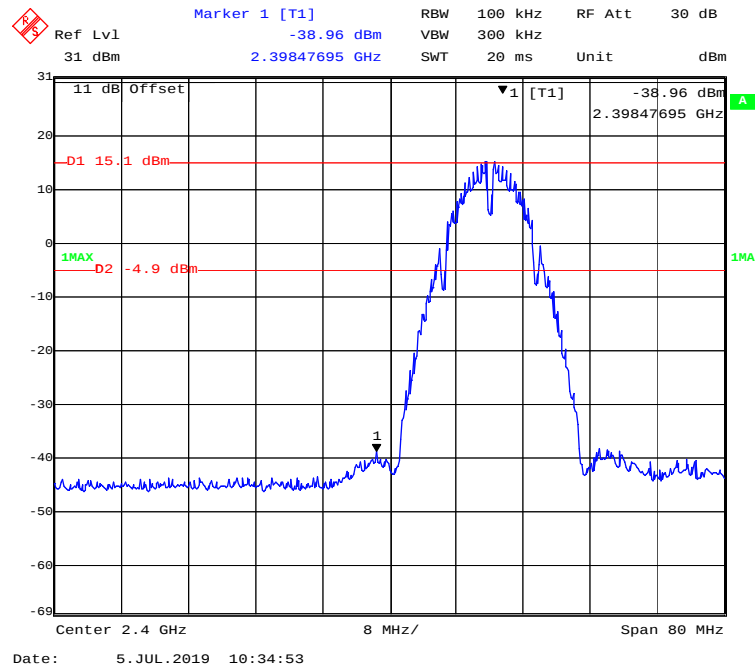


Chain2: 802.11b Mode Right Side

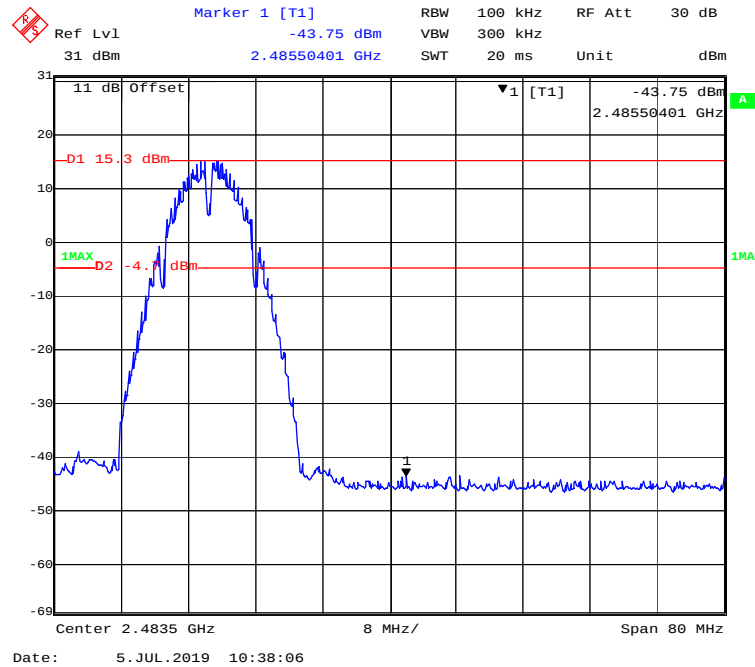


Chain2: 802.11g Mode Left Side

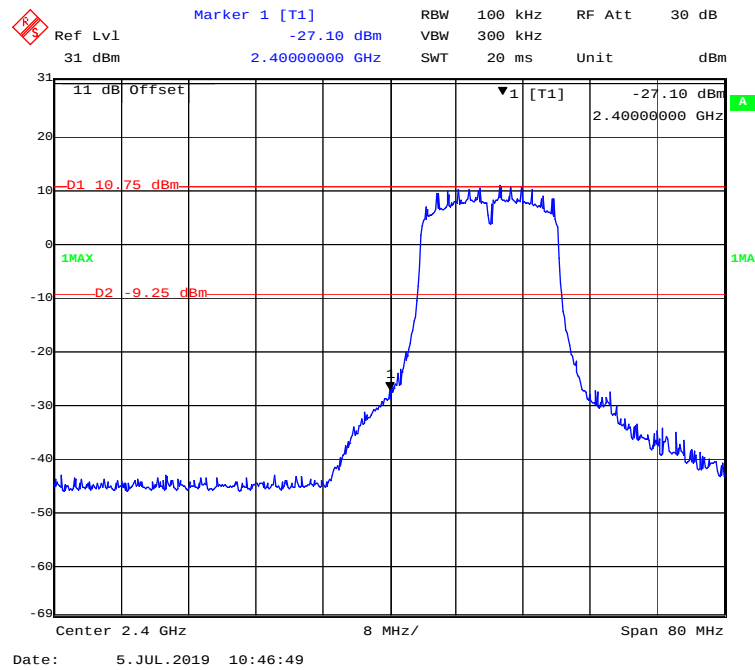


Chain2: 802.11g Mode Right Side

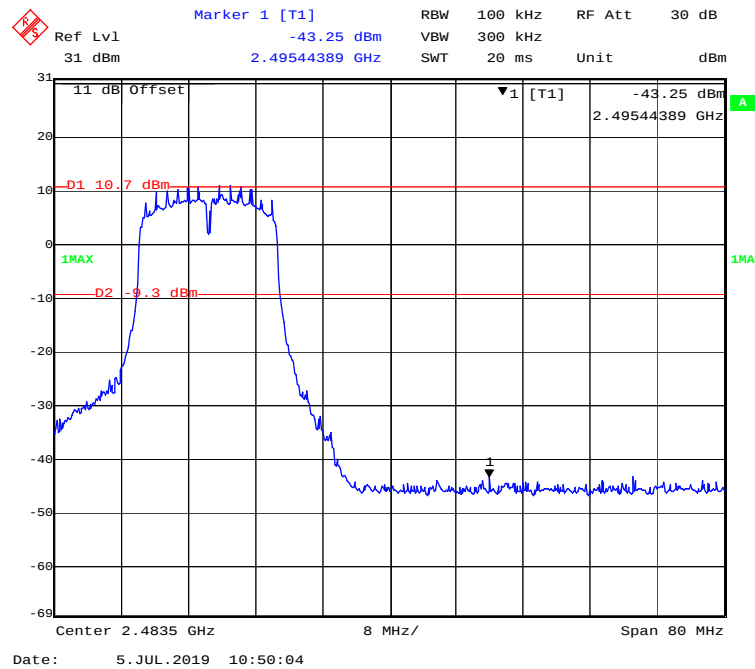


Chain2: 802.11n-HT20 Mode Left Side

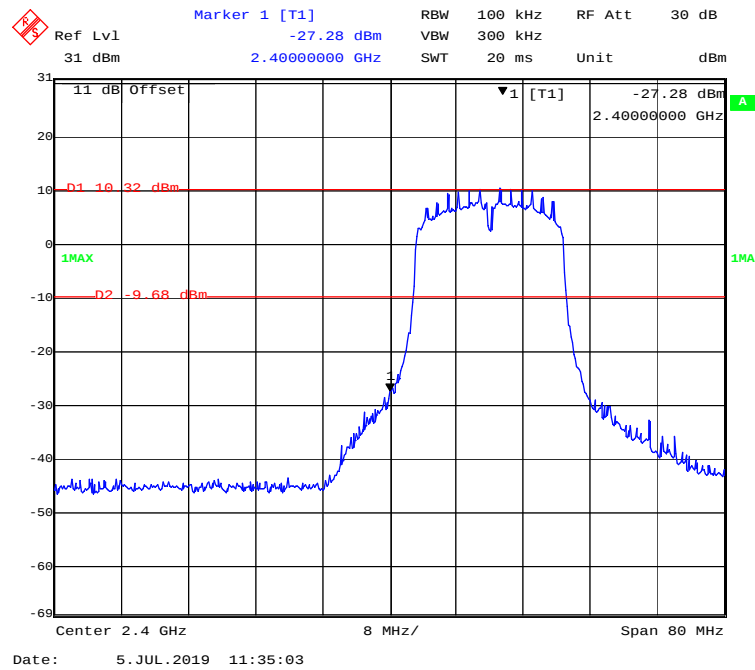


Chain2: 802.11n-HT20 Mode Right Side

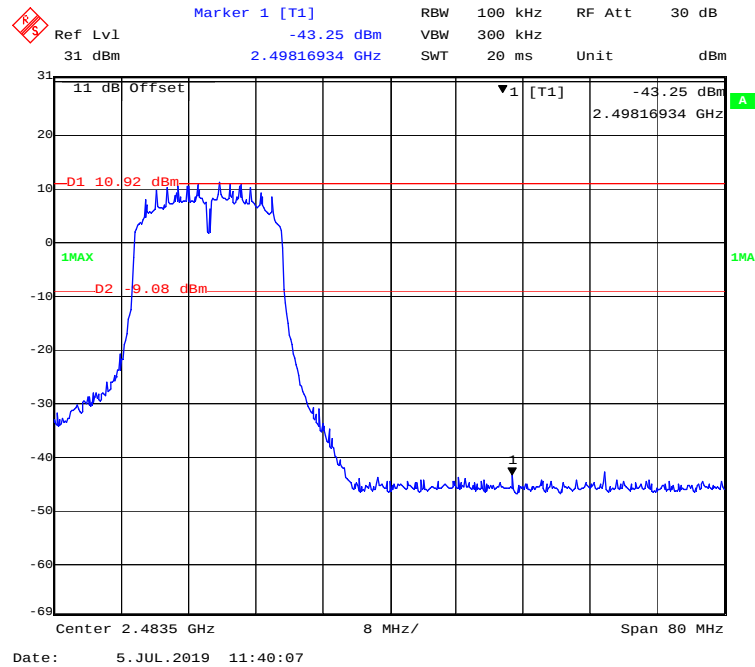

Chain2: 802.11n-HT40 Mode Left Side

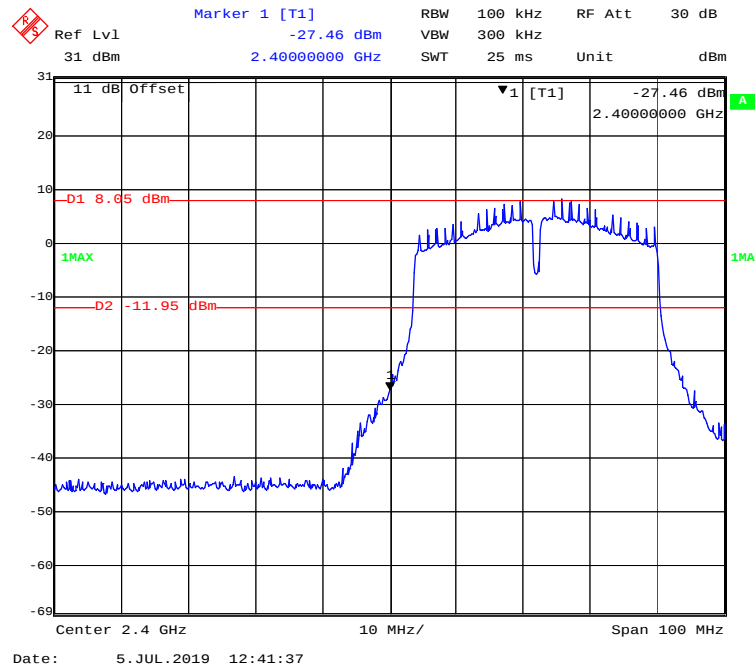

Chain2: 802.11n-HT40 Mode Right Side

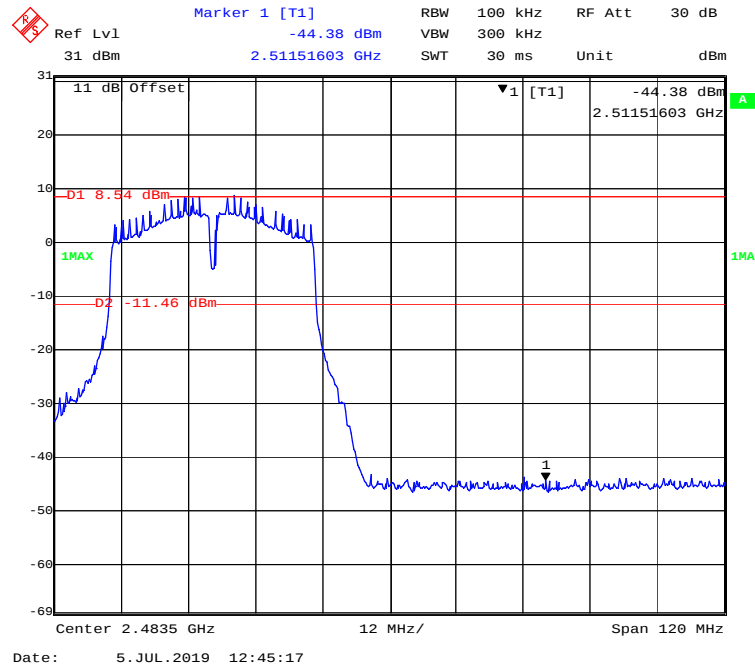

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine Compliant, and it is optional if the maximum conducted (average) output power was used to determine Compliant:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.3 °C
Relative Humidity:	50%
ATM Pressure:	101.3kPa

The testing was performed by Max Min on 2019-07-05.

EUT operation mode: Transmitting

Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)				Limit (dBm/3kHz)
		Chain0	Chain1	Chain2	Total	
802.11b mode						
Low	2412	1.41	1.37	1.15	/	≤8
Middle	2437	1.79	1.22	1.23	/	≤8
High	2462	1.25	1.56	0.85	/	≤8
802.11g mode						
Low	2412	-3.14	-2.64	-2.46	/	≤8
Middle	2437	-2.44	-2.89	-2.31	/	≤8
High	2462	-2.54	-2.23	-2.73	/	≤8
802.11n-HT20 mode						
Low	2412	-3.58	-3.37	-3.43	1.31	≤5.56
Middle	2437	-3.50	-3.20	-4.08	1.19	≤5.56
High	2462	-3.16	-3.30	-3.71	1.39	≤5.56
802.11n-HT40 mode						
Low	2422	-5.50	-5.74	-6.12	-1.01	≤5.56
Middle	2437	-5.48	-5.34	-5.92	-0.80	≤5.56
High	2452	-4.77	-6.18	-5.48	-0.67	≤5.56

Note:

The total PSD=10 Log (10[^] (Chain 0/10) +10[^] (Chain 1/10) + 10[^] (Chain 2/10))


The maximum antenna gain is 3.67dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

Array Gain = 10 log (N_{ANT}/N_{SS}) dB.


So:

Directional gain = G_{ANT} + Array Gain = 3.67 +10*log (3/1) = 8.44dBi, The power spectral density limit was reduced 8.44-6=2.44dB


Chain0: 802.11b Mode Low Channel

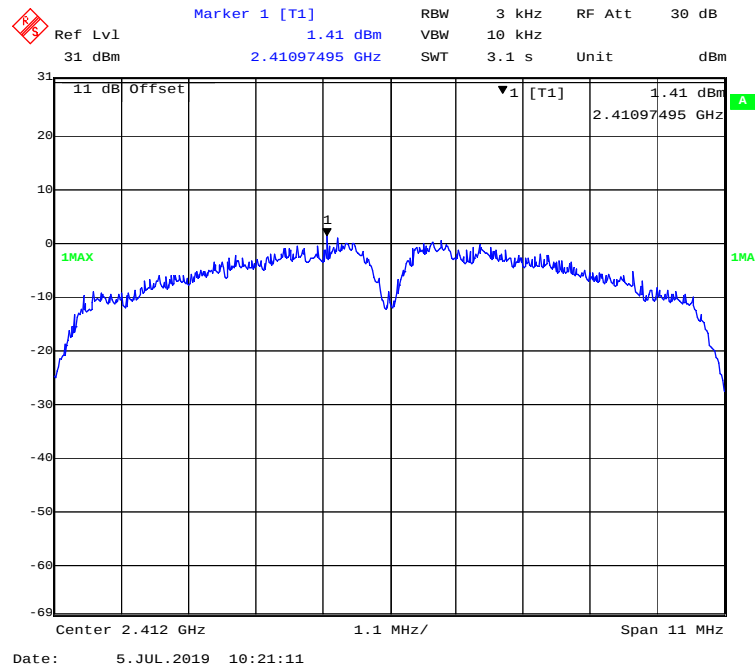


Chain0: 802.11b Mode Middle Channel

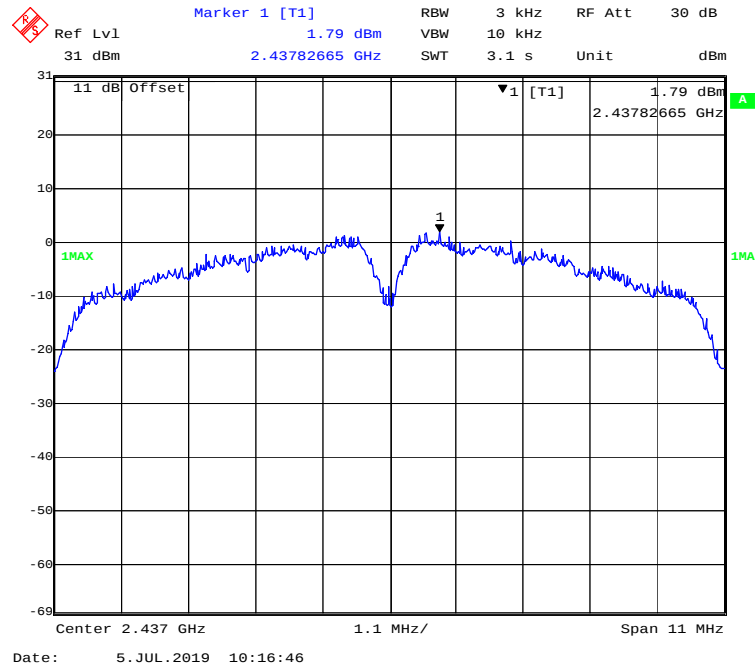


Chain0: 802.11b Mode High Channel

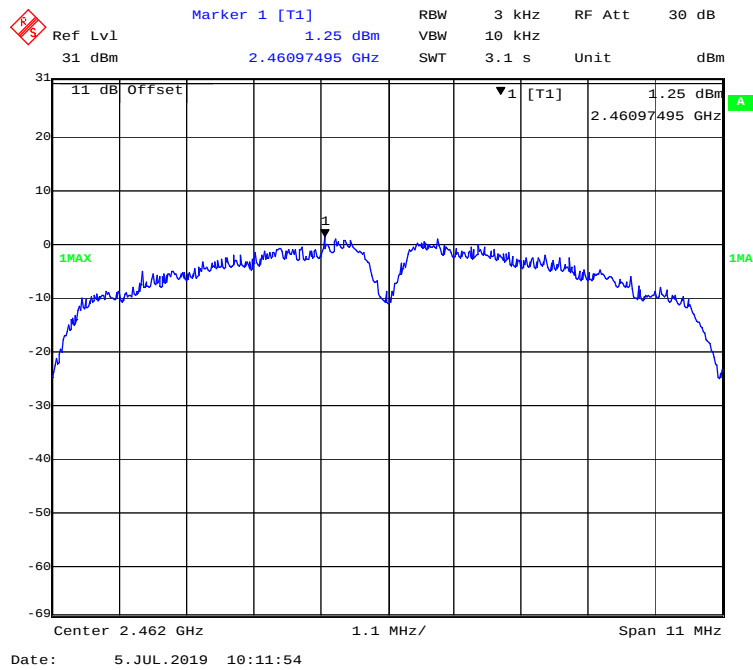


Chain0: 802.11g Mode Low Channel

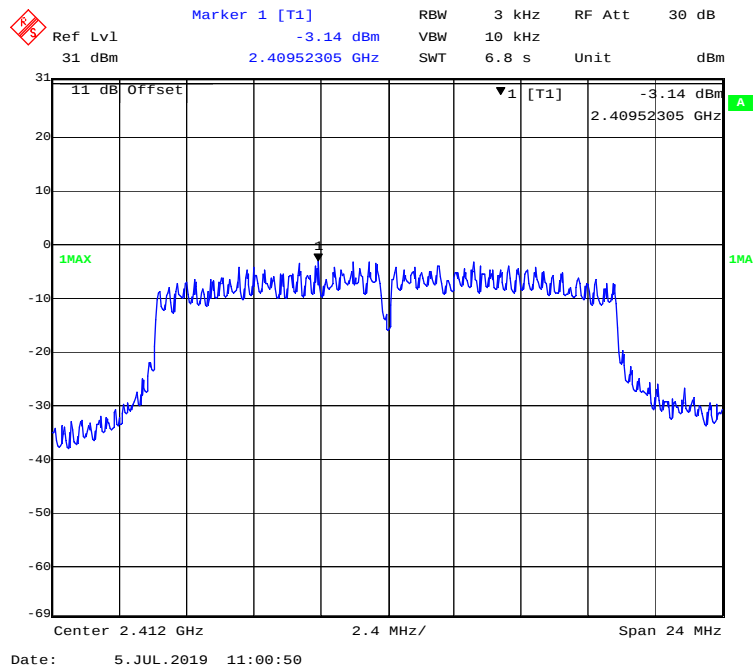


Chain0: 802.11g Mode Middle Channel

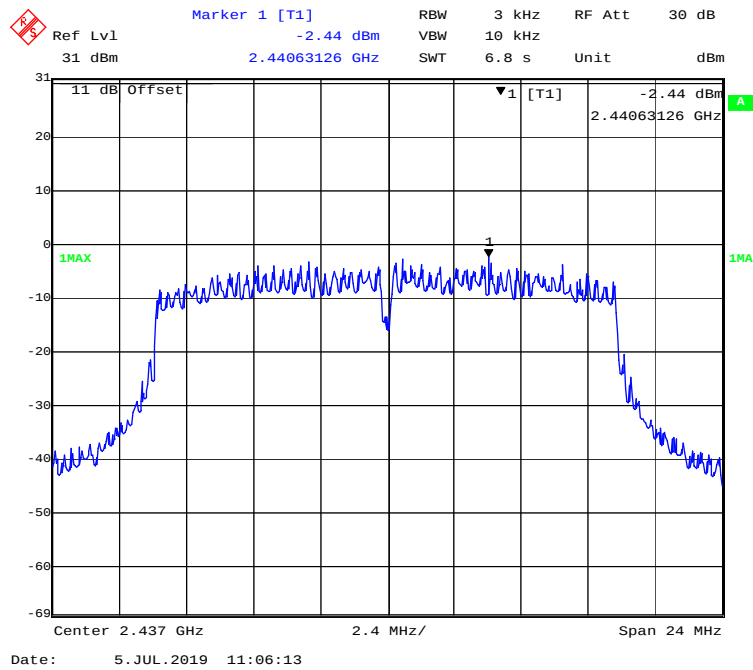


Chain0: 802.11g Mode High Channel

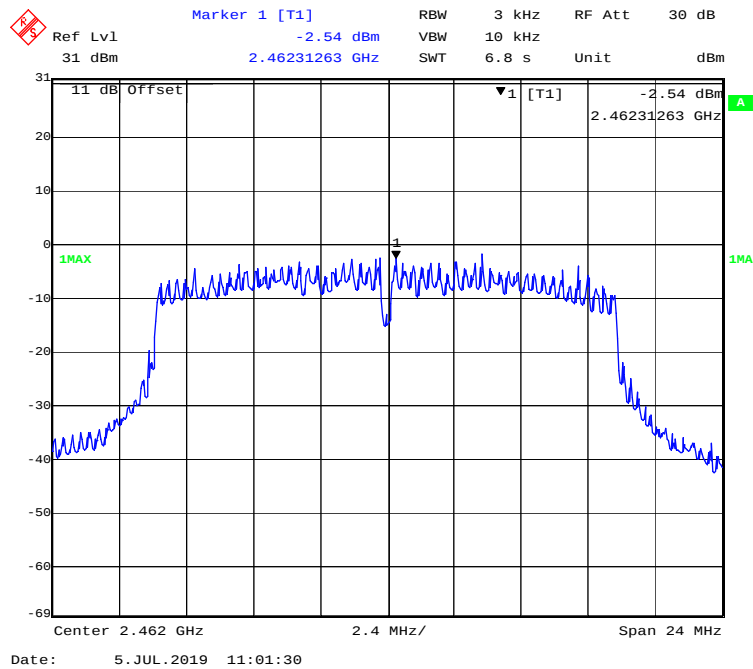


Chain0: 802.11n-HT20 Mode Low Channel

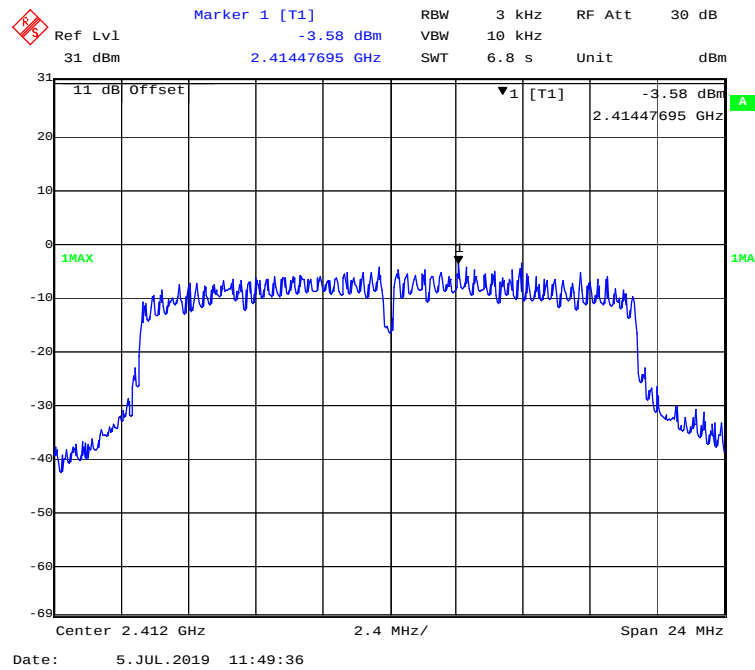


Chain0: 802.11n-HT20 Mode Middle Channel

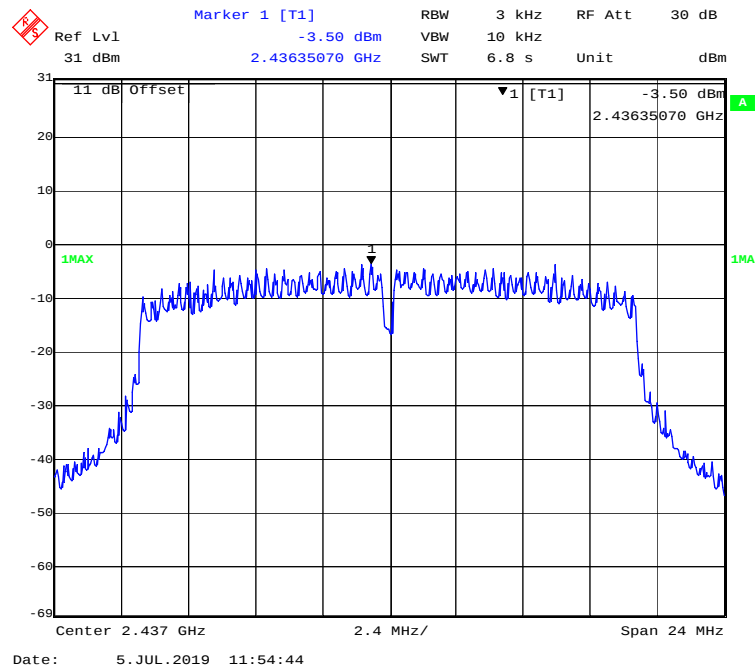


Chain0: 802.11n-HT20 Mode High Channel

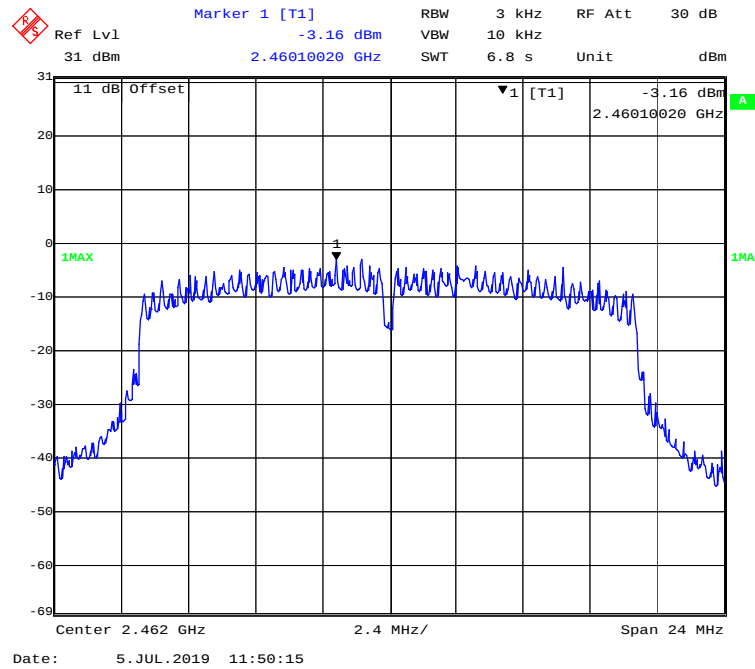


Chain0: 802.11n-HT40 Mode Low Channel

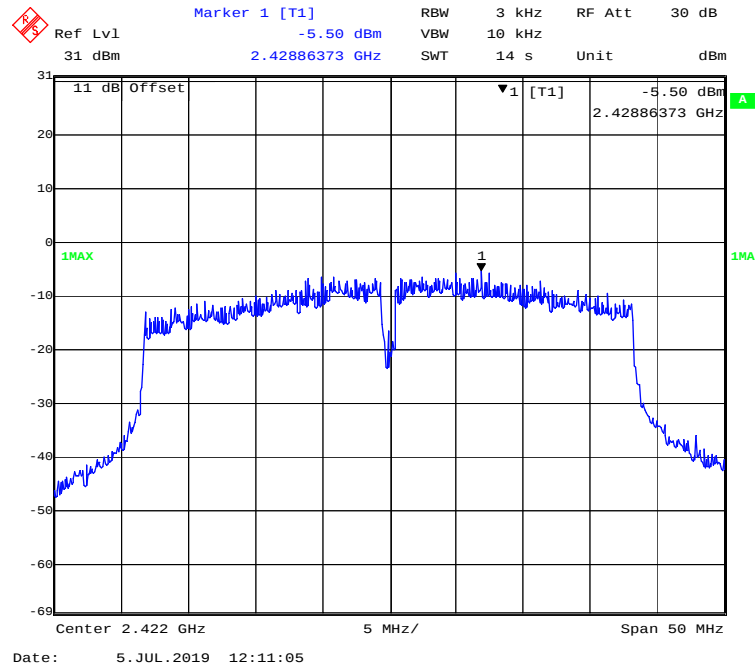


Chain0: 802.11n-HT40 Mode Middle Channel

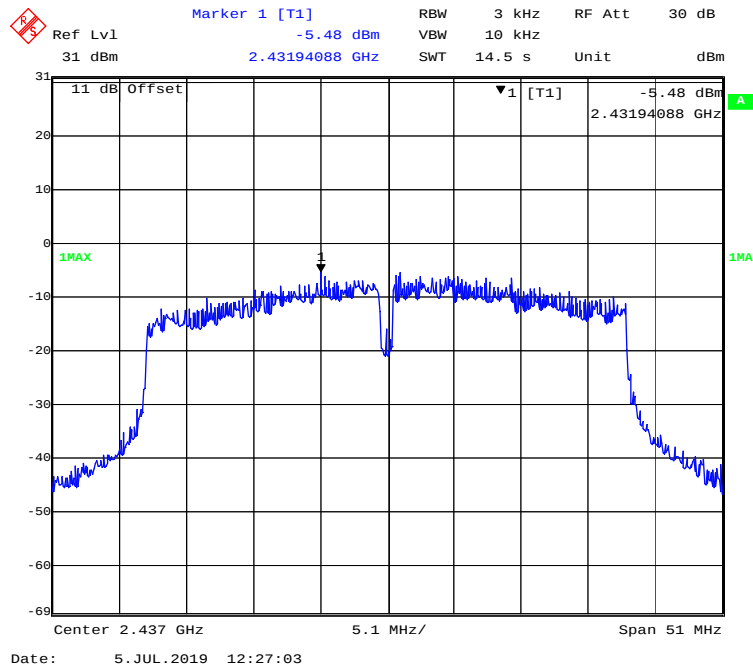


Chain0: 802.11n-HT40 Mode High Channel

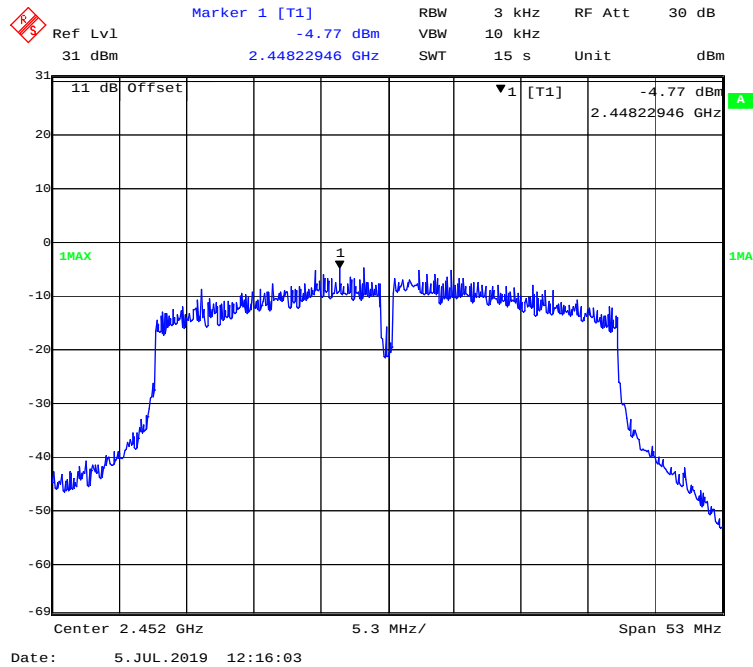


Chain1: 802.11b Mode Low Channel

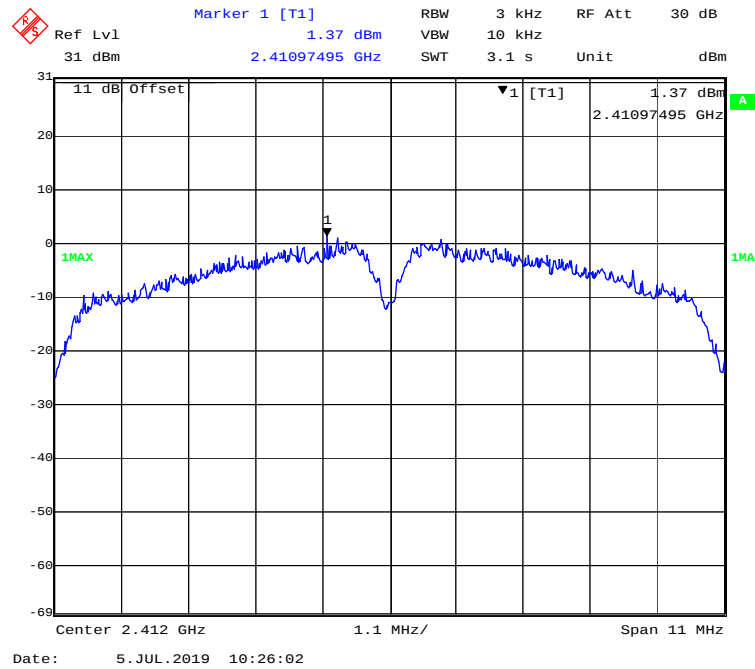


Chain1: 802.11b Mode Middle Channel

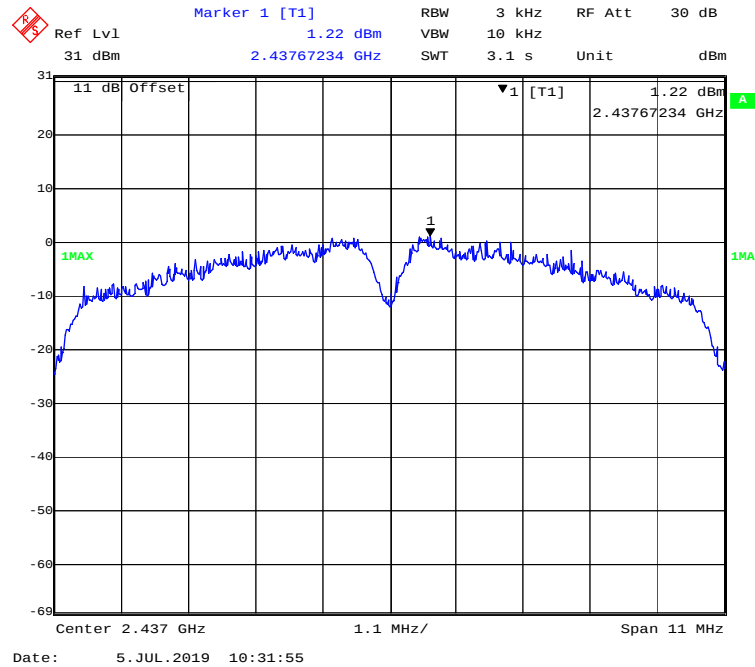


Chain1: 802.11b Mode High Channel

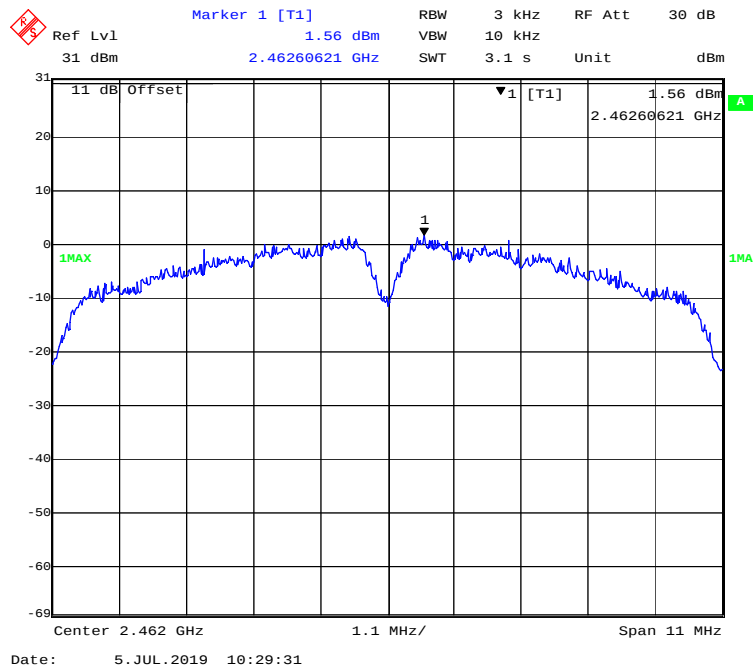


Chain1: 802.11g Mode Low Channel

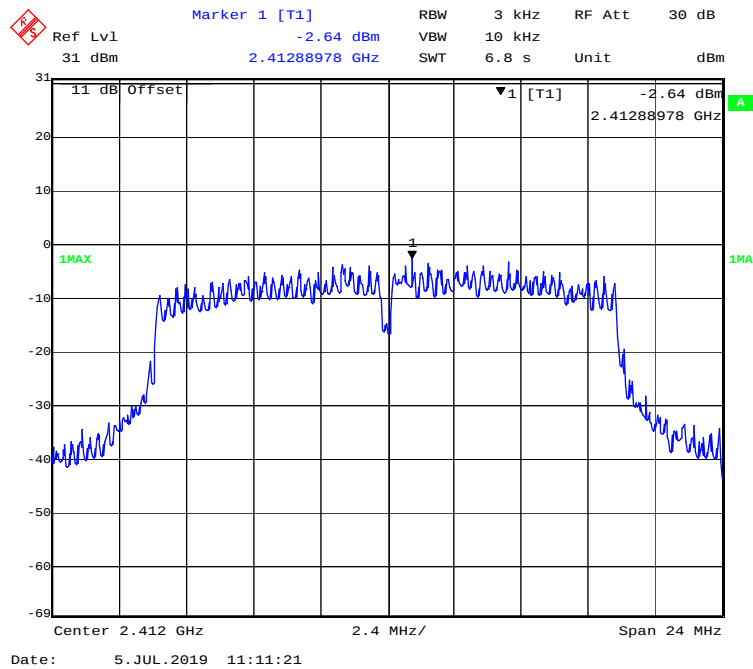


Chain1: 802.11g Mode Middle Channel

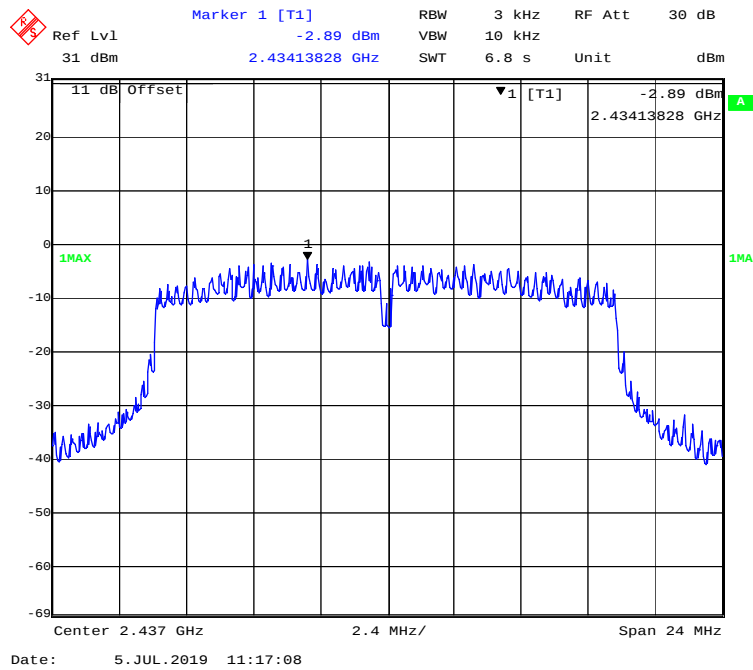


Chain1: 802.11g Mode High Channel

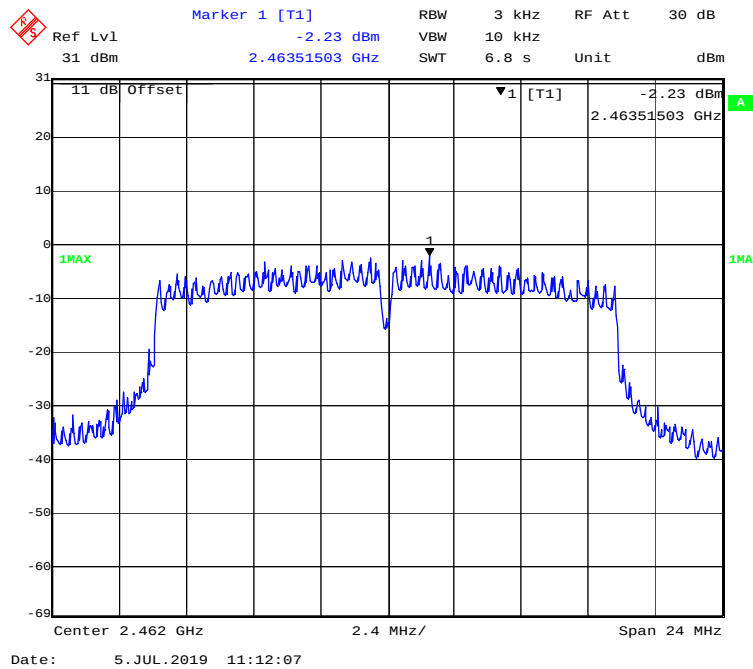


Chain1: 802.11n-HT20 Mode Low Channel

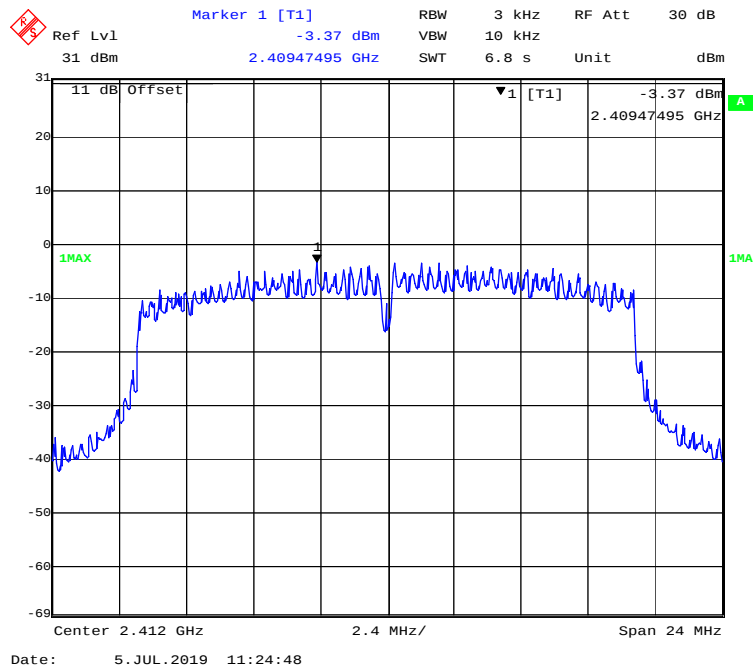


Chain1: 802.11n-HT20 Mode Middle Channel

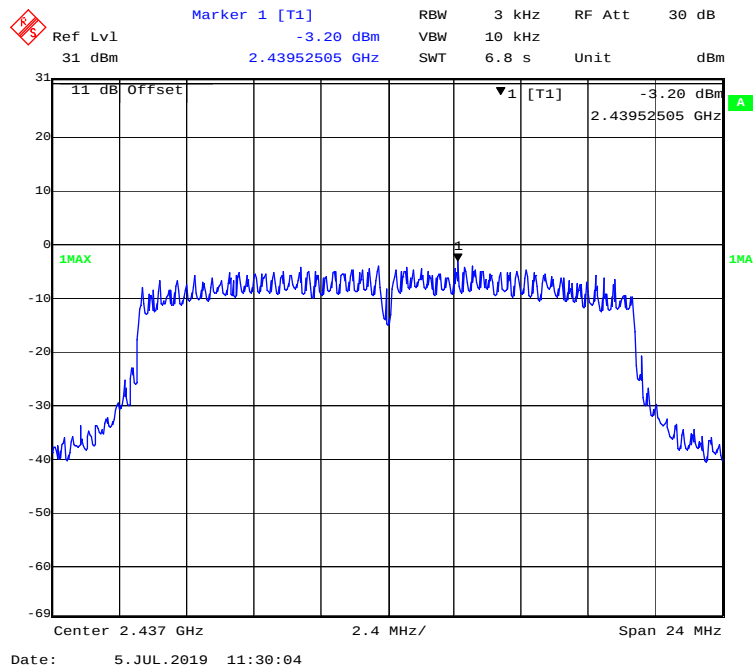


Chain1: 802.11n-HT20 Mode High Channel

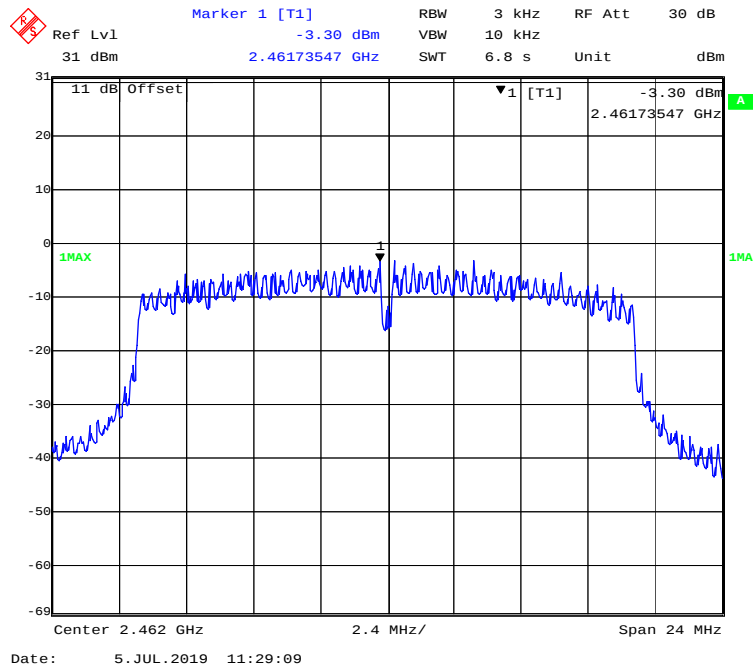


Chain1: 802.11n-HT40 Mode Low Channel

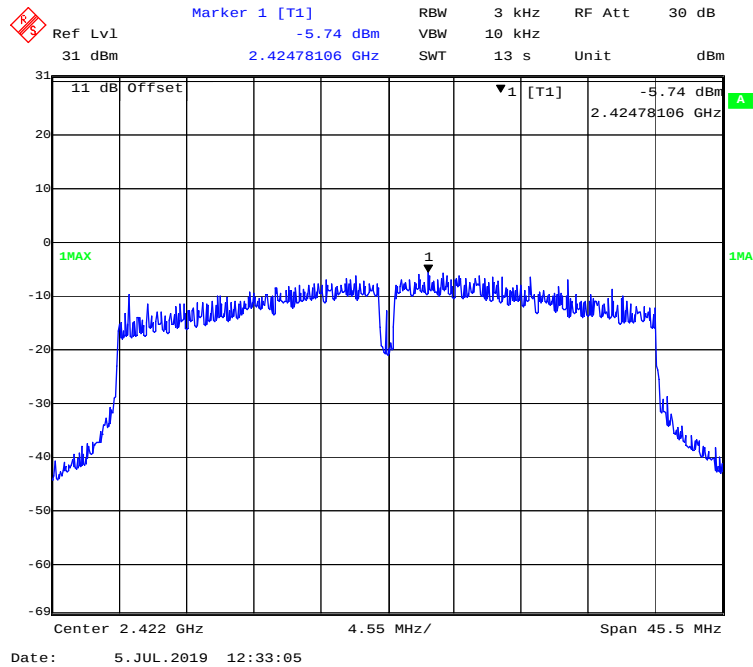


Chain1: 802.11n-HT40 Mode Middle Channel

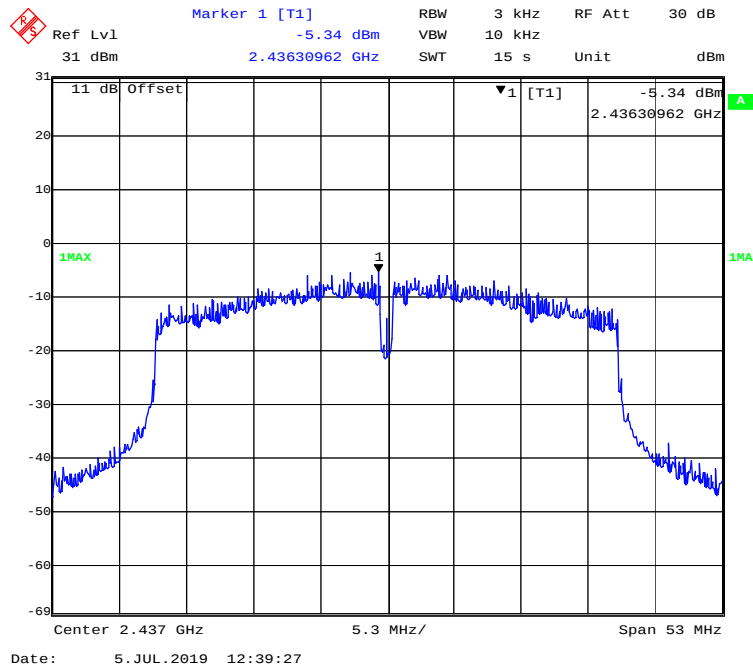


Chain1: 802.11n-HT40 Mode High Channel

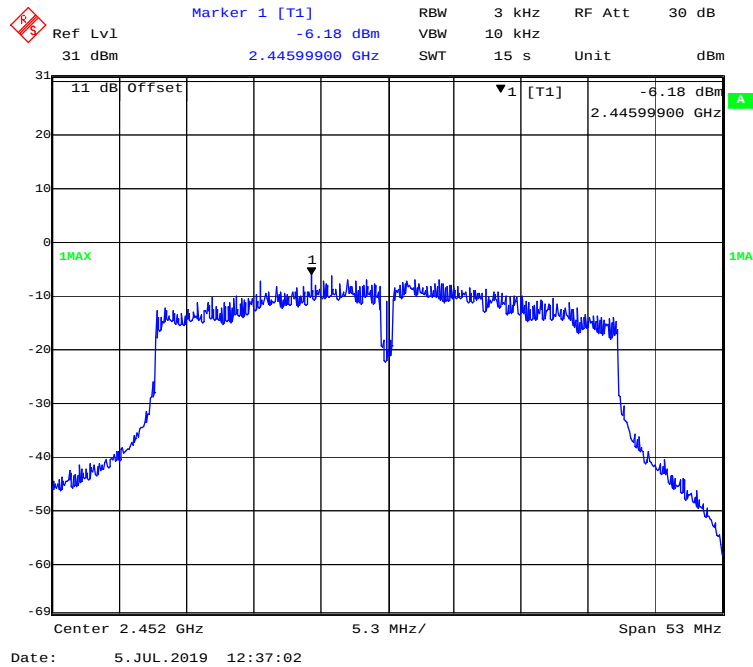


Chain2: 802.11b Mode Low Channel

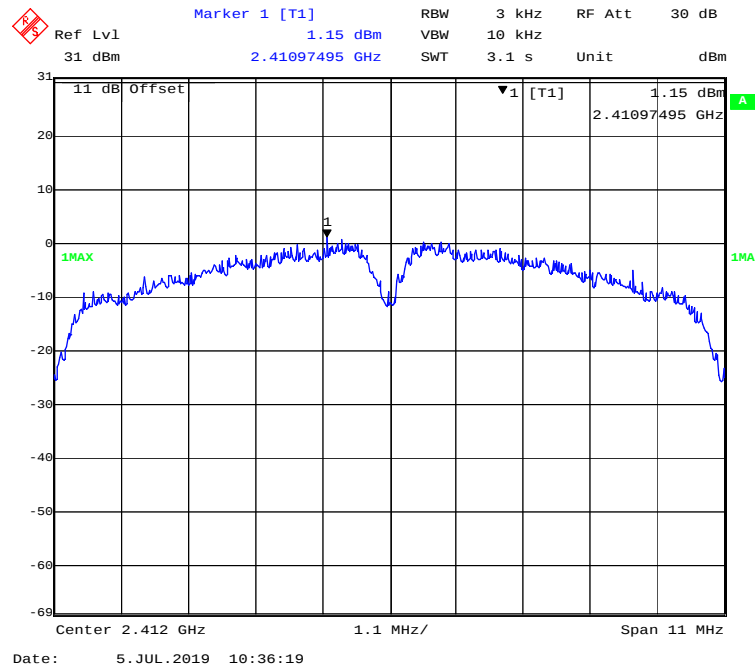


Chain2: 802.11b Mode Middle Channel

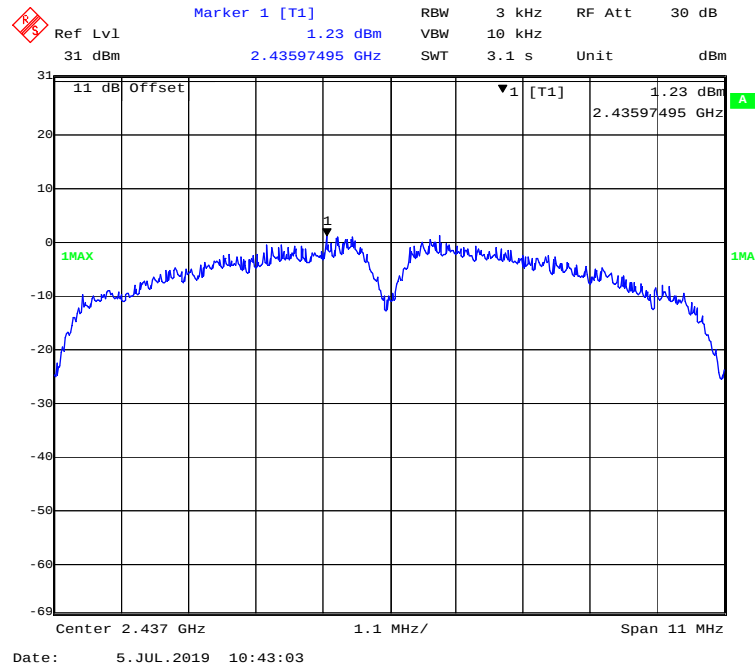


Chain2: 802.11b Mode High Channel

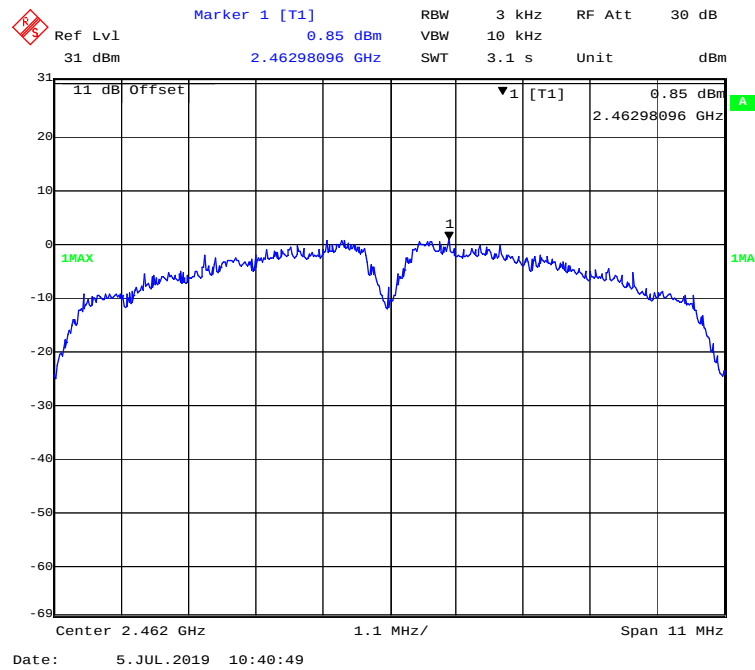


Chain2: 802.11g Mode Low Channel

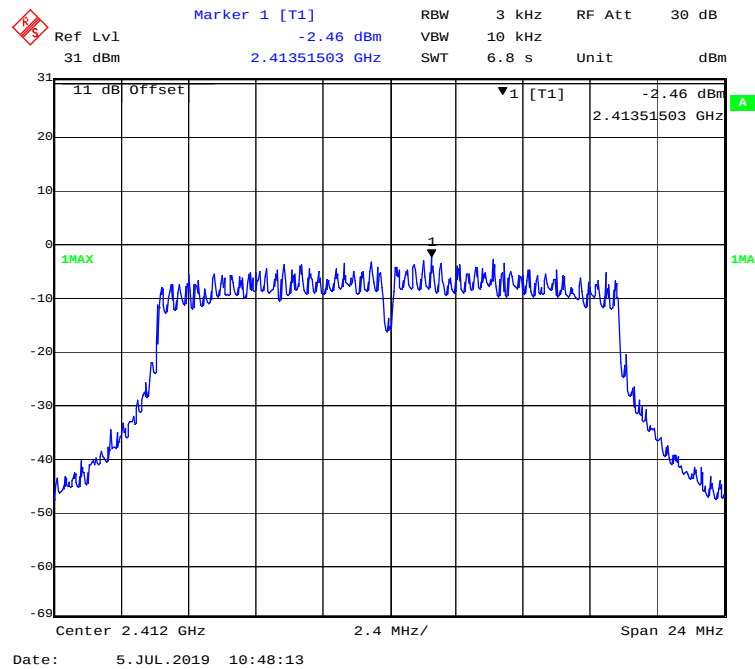


Chain2: 802.11g Mode Middle Channel

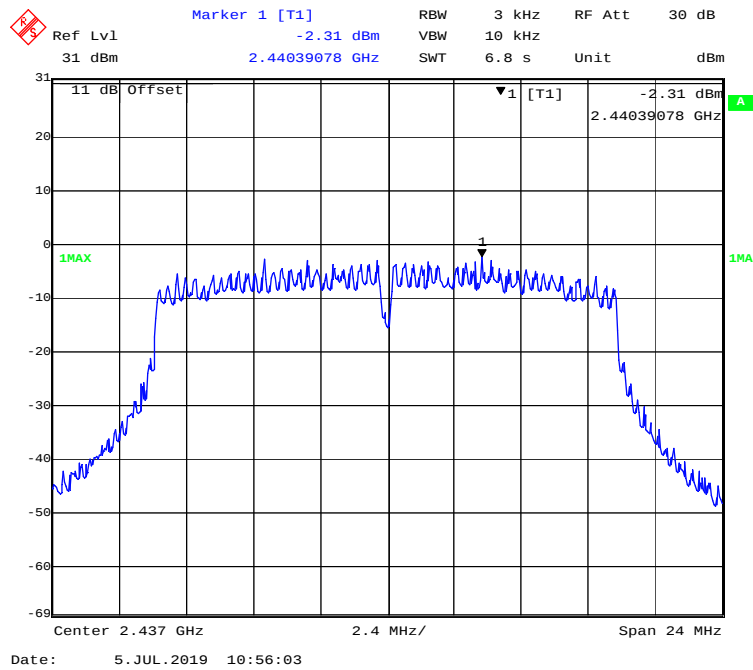


Chain2: 802.11g Mode High Channel

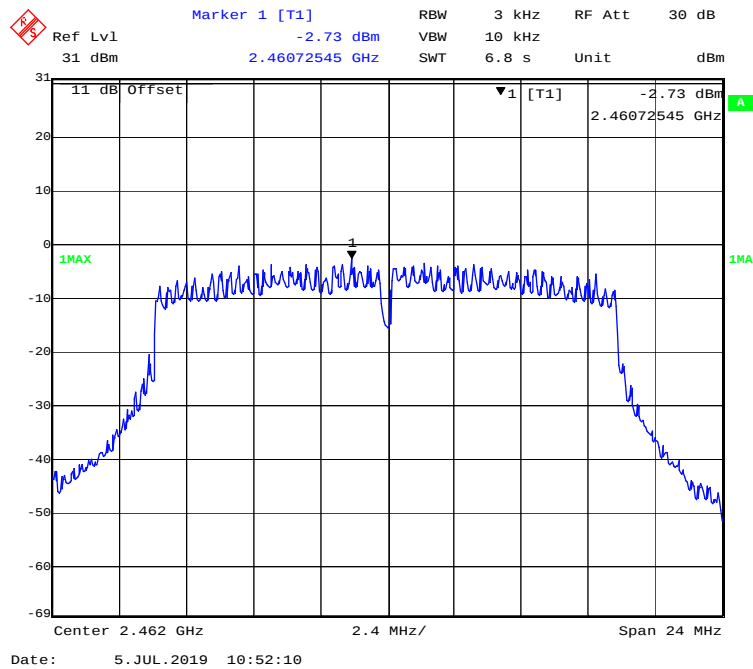


Chain2: 802.11n-HT20 Mode Low Channel

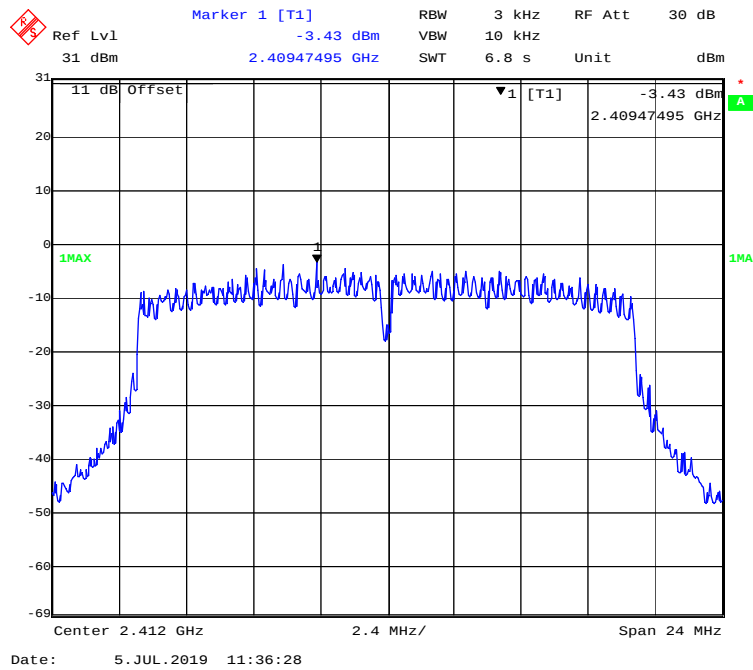


Chain2: 802.11n-HT20 Mode Middle Channel

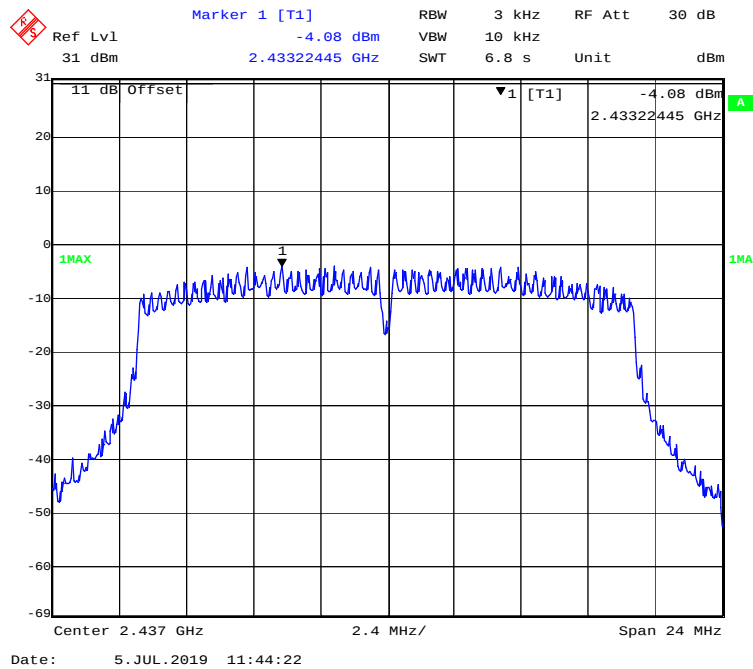


Chain2: 802.11n-HT20 Mode High Channel

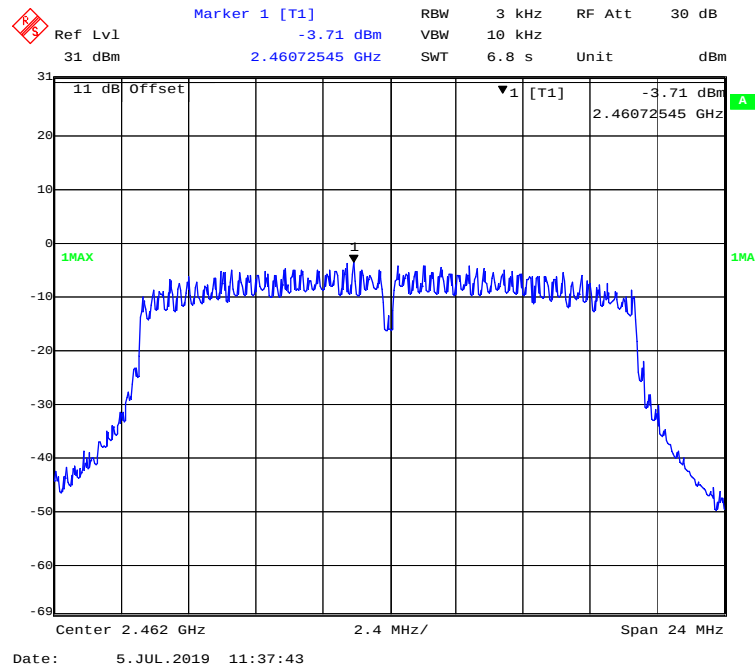


Chain2: 802.11n-HT40 Mode Low Channel

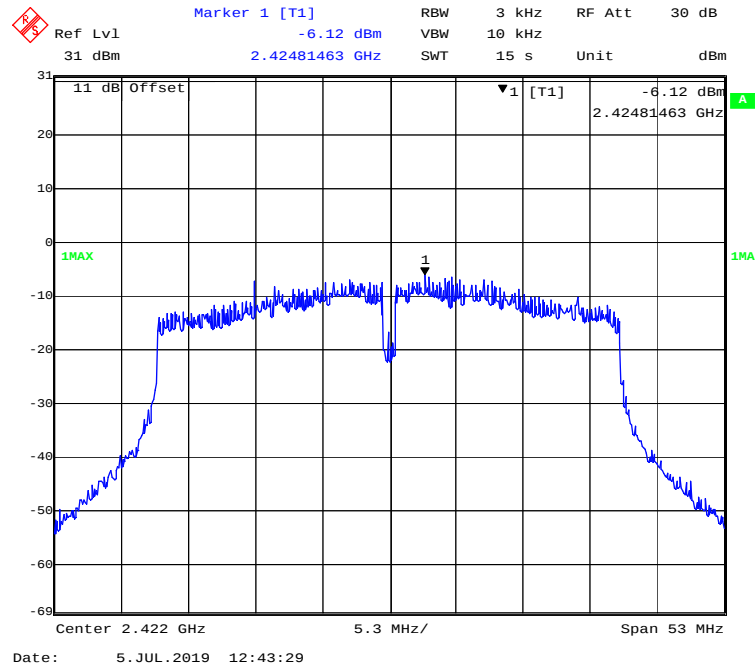

Chain2: 802.11n-HT40 Mode Middle Channel

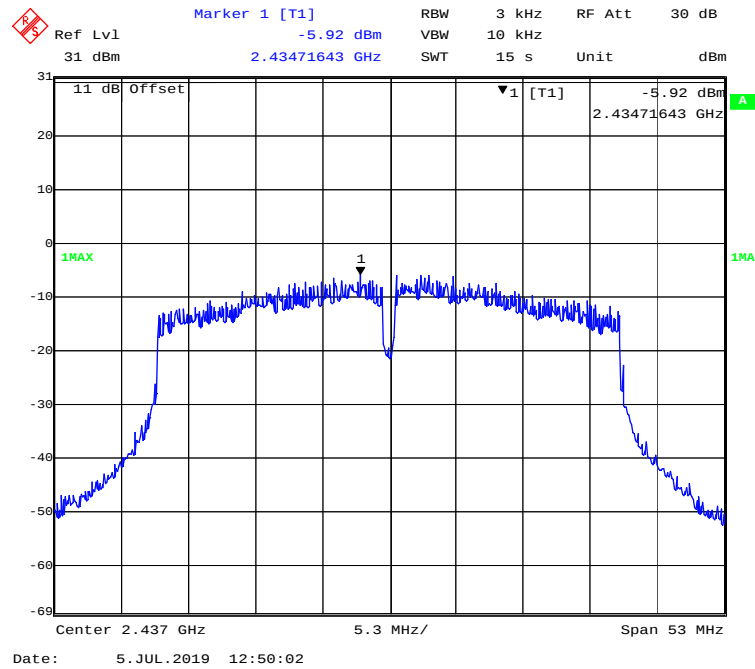

Chain2: 802.11n-HT40 Mode High Channel

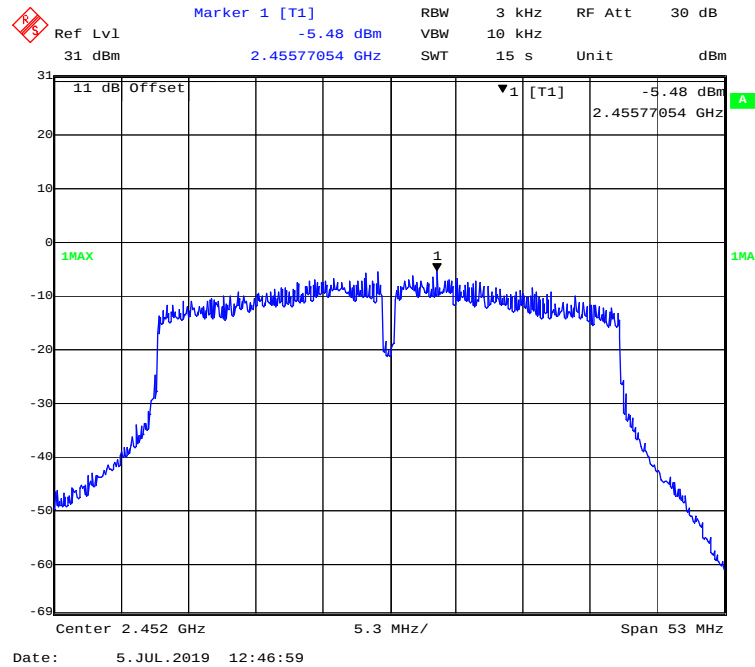

***** END OF REPORT *****