

TEST REPORT

Application No.: SUCR2603000174TL
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Equipment Under Test (EUT):
EUT Name: Wireless Data Terminal
Model No.: TFB1A
Trade Mark: SUNMI
FCC ID: 2AH25M3WH
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2026-03-04
Date of Test: 2026-05-13
Date of Issue: 2026-05-19

Test Result:
Pass*

* In the configuration tested, the EUT complied with the standards specified above.


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Revision Record			
Version	Description	Date	Remark
00	Original	2026-05-19	/

Authorized for issue by:				
Tested By				
		Hayley Zhang/Project Engineer		
Approved By				
		Cedar Cheng /Reviewer		



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Duty Cycle	47 CFR Part 15, Subpart E 15.407	ANSI C63.10-2020/Cor1-2023 Section 12.2	ANSI C63.10-2020/Cor1-2023 Section 12.2	Pass
Maximum Conducted Output Power		ANSI C63.10-2020/Cor1-2023 Section 12.4	47 CFR Part 15, Subpart E 15.407 (a)	Pass

Remark:

This test report (Report No.: SUCR260300017406 issue on 2026-05-19) is based on the original test report (Report No.: SUCR250500042204 issue on 2025-06-11).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Therefore in this report only duty cycle and power is performed, and other test data in this report are refer to the previous report with report number SUCR250500042204 issue on 2025-06-11.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Environment Parameter	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty & Decision Rule	6
4.5 Test Location	7
4.6 Test Facility	7
4.7 Deviation from Standards.....	7
4.8 Abnormalities from Standard Conditions.....	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	9
6.1 Antenna Requirement	9
6.2 Transmission in the Absence of Data	11
7 Radio Spectrum Matter Test Results	12
7.1 Duty Cycle	12
7.2 Maximum Conducted Output Power	14
8 Test Setup Photo	16
9 EUT Constructional Details (EUT Photos).....	16
10 Appendix.....	17

4 General Information

4.1 Details of E.U.T.

Power supply:	3.87V from battery
Operation Frequency/Number of channels (20MHz):	U-NII-1: 5180-5240MHz (4 Channels); U-NII-2A: 5260-5320MHz (4 Channels); U-NII-2C: 5500-5700MHz (11 Channels); U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-1: 5190-5230MHz (2 Channels); U-NII-2A: 5270-5310MHz (2 Channels); U-NII-2C: 5510-5670MHz (5 Channels); U-NII-3: 5755-5795MHz (2 Channels)
Operation Frequency/Number of channels (80MHz):	U-NII-1: 5210MHz (1 Channel); U-NII-2A: 5290MHz (1 Channels); U-NII-2C: 5530-5610MHz (2 Channels); U-NII-3: 5775MHz (1 Channel)
Modulation Type:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Channel Spacing:	802.11a/n/ac/ax 20: 20MHz; 802.11n/ac/ax 40: 40MHz; 802.11ac/ax 80: 80MHz
DFS Function:	Slave without Radar detection
TPC Function:	Support TPC function
Antenna Type:	FPC Antenna
Antenna Gain:	5150MHz to 5250MHz: -6.54dBi(Ant3); 1.69dBi(Ant2) 5250MHz to 5350MHz: -6.54dBi(Ant3); 1.67dBi(Ant2) 5470MHz to 5725MHz: -7.16dBi(Ant3); 3.90dBi(Ant2) 5725MHz to 5850MHz: -7.65dBi(Ant3); 3.55dBi(Ant2)
Remark:	SISO: 802.11a; MIMO:802.11n/ac/ax

4.2 Environment Parameter

Environment Parameter	Selected Values During Tests	
Relative Humidity	47.2%	
Value	Temperature(°C)	Voltage(V)
NTNV	23.1	3.87
Note:		
NV:Normal Voltage	LV:Low Extreme Test Voltage	HV:High Extreme Test Voltage
NT:Normal Temperature	LT:Low Extreme Test Temperature	HT:High Extreme Test Temperature

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.4 Measurement Uncertainty & Decision Rule

No.	Item	Measurement Uncertainty
1	Duty cycle	$\pm 0.37\%$
2	RF conducted power	$\pm 0.75\text{dB}$
3	RF power density	$\pm 2.84\text{dB}$
4	Temperature test	$\pm 1^{\circ}\text{C}$
5	Humidity test	$\pm 3\%$
6	Supply voltages	$\pm 1\%$
7	Time	$\pm 3\%$

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA).

• **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number:717327

• **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2026/1/14	2027/1/13
2	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	2025/11/21	2026/11/20
3	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	2026/1/14	2027/1/13
4	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	2026/1/14	2027/1/13
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-08-01	2026/1/14	2027/1/13
6	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	2025/11/21	2026/11/20
7	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	4/22/2026	4/21/2027
8	Wideband Radio Communication Test Station	Anritsu	MT8000A	SUWI-01-34-02	11/21/2025	11/20/2026
9	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/21/2025	11/20/2026
10	Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/21/2025	11/20/2026
11	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	11/21/2025	11/20/2026
12	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/14/2026	1/13/2027
13	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/11/2026	2/10/2027
15	Measurement Software	TST	TST 272 V2.02	SUWI-03-55-03	NCR	NCR
16	RF Control unit	TST	TSCB3023R2	SUWI-02-20-01	NCR	NCR
17	RFCables	Tonscend	NA	SUWI-01-03-01	1/15/2026	1/14/2027

Remark: NCR=No Calibration Requirement.

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is FPC Antenna no consideration of replacement. The best case gain of the

5150MHz to 5250MHz: -6.54dBi(Ant3); 1.69dBi(Ant2)

5250MHz to 5350MHz: -6.54dBi(Ant3); 1.67dBi(Ant2)

5470MHz to 5725MHz: -7.16dBi(Ant3); 3.90dBi(Ant2)

5725MHz to 5850MHz: -7.65dBi(Ant3); 3.55dBi(Ant2)

Antenna location: Refer to internal photo.

Cyclic Delay Diversity (CDD) System:

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.
- For power measurements on IEEE 802.11 devices:
Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

For power, the directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain.

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The Power and PSD limit should be modified if the directional gain of eut is over 6dbi.

The EUT supports CDD System.

All antennas have Unequal antenna gain:

Operation Frequency	ANT3 Gain (dBi)	ANT2 Gain (dBi)	Directional gain For Power (dBi)	Directional gain For PSD (dBi)	Power Limit Reduction (dBm)	PSD Limit Reduction (dBm)
5150MHz to 5250MHz	-6.54	1.69	1.69	1.53	0	0
5250MHz to 5350MHz	-6.54	1.67	1.67	1.51	0	0
5470MHz to 5725MHz	-7.16	3.90	3.90	3.03	0	0
5725MHz to 5850MHz	-7.65	3.55	3.55	2.65	0	0

5150MHz to 5250MHz:

Power Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

PSD Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

5250MHz to 5350MHz:

Power Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

PSD Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

5470MHz to 5725MHz:

Power Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

PSD Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

5725MHz to 5850MHz:

Power Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

PSD Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0



6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Duty Cycle

Test Requirement ANSI C63.10-2020/Cor1-2023 Section 12.2

Test Method: ANSI C63.10-2020/Cor1-2023 Section 12.2

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 47.2 % RH

Atmospheric Pressure: 1001 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

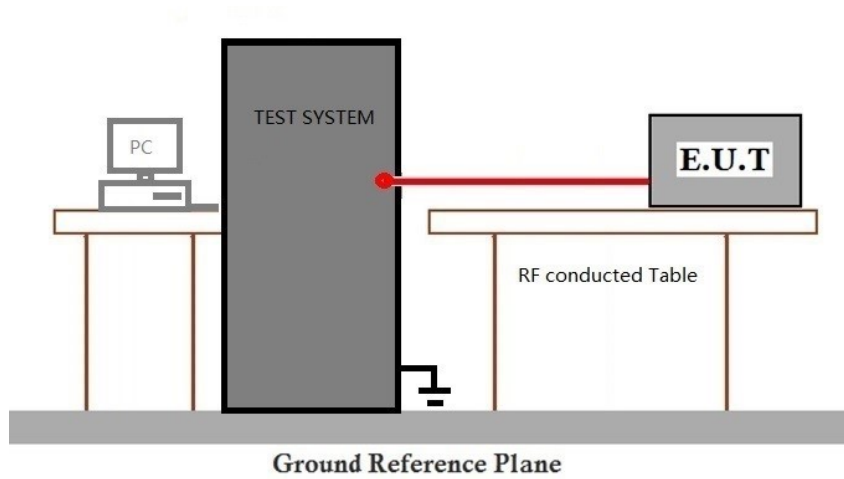

7.1.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.2 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10-2020/Cor1-2023 Section 12.4

Limit:

Frequency band(MHz)	Limit
5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device
	$\leq 250\text{mW}(24\text{dBm})$ for client device
5250-5350	$\leq 250\text{mW}(24\text{dBm})$ or $11\text{dBm}+10\log B^*$
5470-5725	$\leq 250\text{mW}(24\text{dBm})$ or $11\text{dBm}+10\log B^*$
5725-5850	$\leq 1\text{W}(30\text{dBm})$
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 47.2 % RH

Atmospheric Pressure: 1001 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

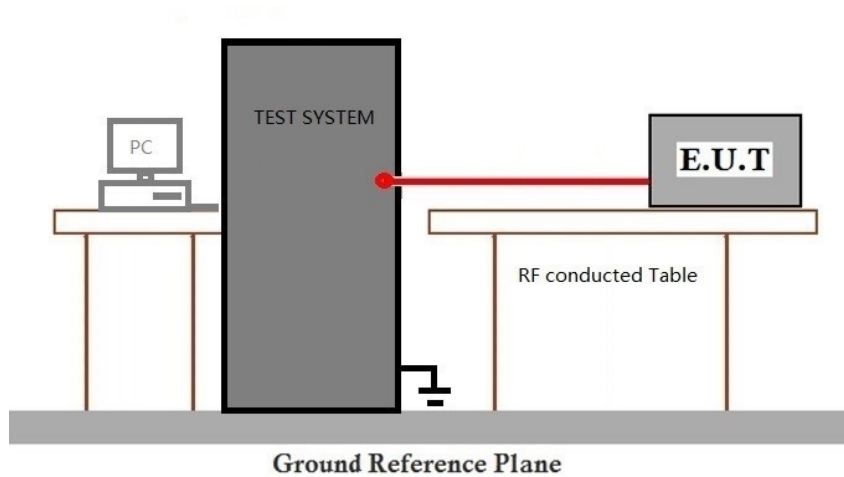

7.2.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

AV Output power Level = Reading level + Cable loss + DCCF

Please Refer to Appendix for Details



Report No.: SUCR260300017406

Page: 16 of 20

8 Test Setup Photo

Refer to Appendix_Photos of Test Setup for SUCR2603000174TL

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_External Photos for SUCR2603000174TL and Appendix_Internal Photos for SUCR2603000174TL

10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 ANT2


ANT2									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	/	/	2.794	2.941	95.00	0.22	0.03
802.11n (HT20)	MIMO	5180	/	/	1.321	1.468	89.99	0.46	0.06
802.11n (HT40)	MIMO	5190	/	/	1.266	1.414	89.53	0.48	0.06
802.11ac (VHT80)	MIMO	5210	/	/	0.612	0.712	85.96	0.66	0.03
802.11ax (HEW20)	MIMO	5180	SU	/	1.329	1.477	89.98	0.46	0.00
802.11ax (HEW40)	MIMO	5190	SU	/	1.269	1.418	89.49	0.48	0.03
802.11ax (HEW80)	MIMO	5210	SU	/	0.612	0.712	85.96	0.66	0.06

1.1.2 ANT3


ANT3									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	/	/	2.794	2.941	95.00	0.22	0.03
802.11n (HT20)	MIMO	5180	/	/	1.323	1.469	90.06	0.45	0.03
802.11n (HT40)	MIMO	5190	/	/	1.266	1.414	89.53	0.48	0.03
802.11ac (VHT80)	MIMO	5210	/	/	0.612	0.712	85.96	0.66	0.03
802.11ax (HEW20)	MIMO	5180	SU	/	1.329	1.476	90.04	0.46	0.03
802.11ax (HEW40)	MIMO	5190	SU	/	1.268	1.417	89.48	0.48	0.04
802.11ax (HEW80)	MIMO	5210	SU	/	0.613	0.713	85.97	0.66	0.06

1.2 Test Graph

1.2.1 ANT2

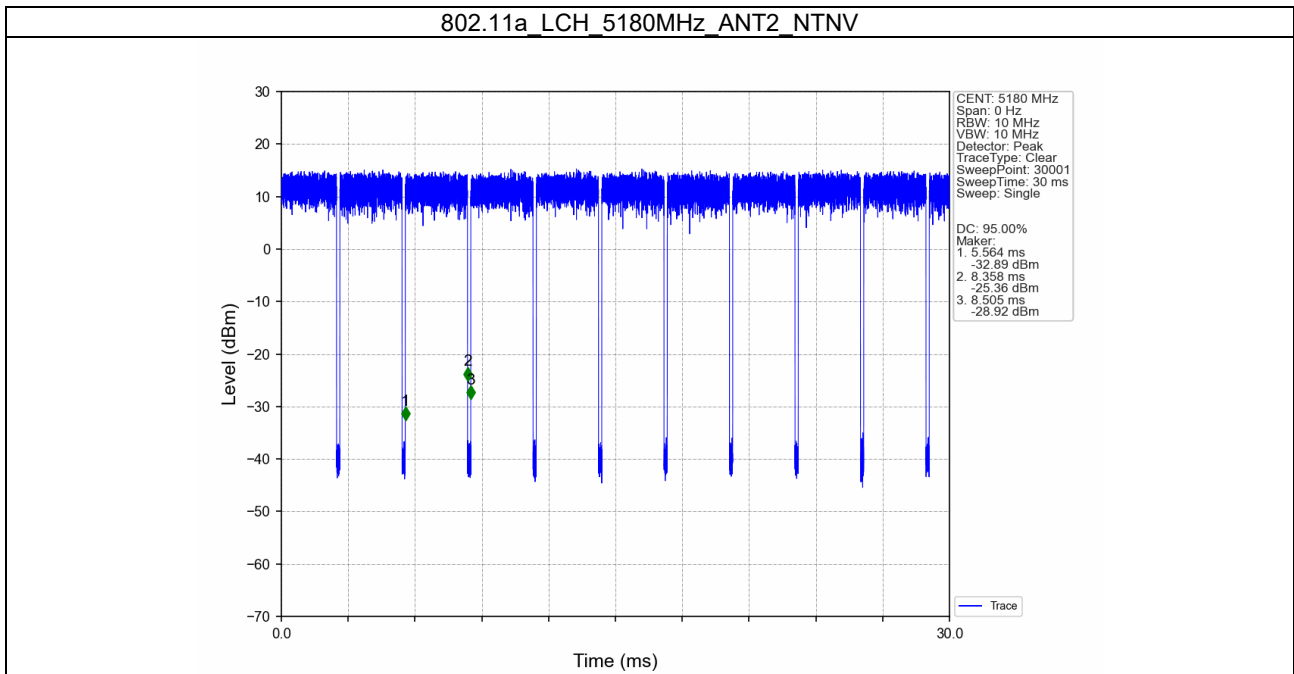

1.2.2 ANT3

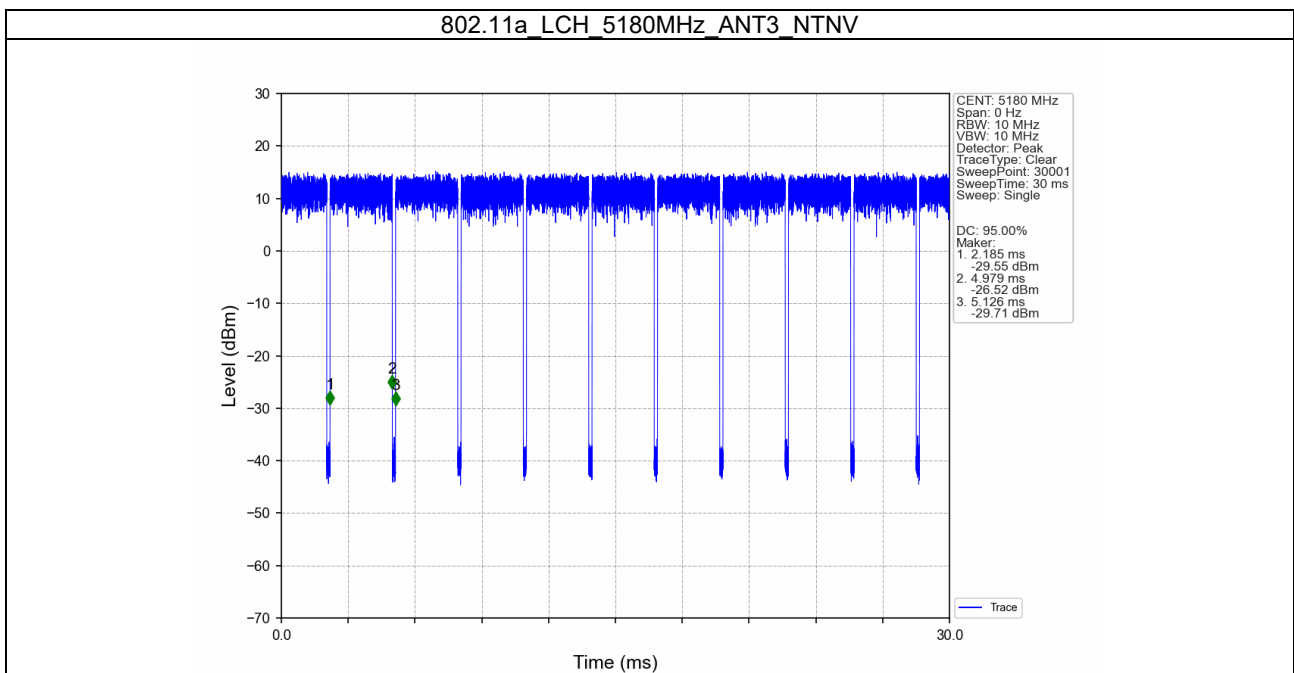



2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power

Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
					ANT2	ANT3	MIMO	Limit	
802.11a	SISO	5180	/	/	14.96	15.13	/	/	Pass
		5200	/	/	14.52	13.79	/	/	Pass
		5240	/	/	15.67	15.57	/	/	Pass
		5260	/	/	16.33	15.67	/	≤ 23.5	Pass
		5300	/	/	16.19	15.26	/	≤ 23.47	Pass
		5320	/	/	16.49	15.60	/	≤ 23.47	Pass
		5500	/	/	11.09	10.23	/	≤ 23.49	Pass
		5580	/	/	11.00	10.30	/	≤ 23.44	Pass
		5700	/	/	10.88	10.38	/	≤ 23.43	Pass
		5745	/	/	16.35	14.66	/	≤ 30	Pass
		5785	/	/	16.36	14.78	/	≤ 30	Pass
		5825	/	/	16.52	14.73	/	≤ 30	Pass
802.11n (HT20)	MIMO	5180	/	/	10.05	10.30	13.19	/	Pass
		5200	/	/	10.26	10.60	13.44	/	Pass
		5240	/	/	10.92	10.54	13.74	/	Pass
		5260	/	/	15.16	14.63	17.92	≤ 23.74	Pass
		5300	/	/	15.22	14.52	17.90	≤ 23.64	Pass
		5320	/	/	15.29	14.34	17.85	≤ 23.62	Pass
		5500	/	/	10.43	9.75	13.11	≤ 23.79	Pass
		5580	/	/	10.26	10.12	13.20	≤ 23.65	Pass
		5700	/	/	10.37	10.04	13.22	≤ 23.61	Pass
		5745	/	/	16.24	14.66	18.53	≤ 30	Pass
		5785	/	/	16.41	14.58	18.60	≤ 30	Pass
		5825	/	/	16.46	14.85	18.74	≤ 30	Pass
802.11n (HT40)	MIMO	5190	/	/	10.57	10.75	13.67	/	Pass
		5230	/	/	10.98	11.33	14.17	/	Pass
		5270	/	/	13.24	12.51	15.90	≤ 23.98	Pass
		5310	/	/	13.37	12.59	16.00	≤ 23.98	Pass
		5510	/	/	10.75	9.09	13.01	≤ 23.98	Pass
		5550	/	/	11.11	9.21	13.27	≤ 23.98	Pass
		5670	/	/	10.95	9.33	13.23	≤ 23.98	Pass
		5755	/	/	16.58	15.08	18.91	≤ 30	Pass
		5795	/	/	16.31	14.83	18.64	≤ 30	Pass
		5210	/	/	10.19	10.57	13.40	/	Pass
802.11ac (VHT80)	MIMO	5290	/	/	12.81	11.62	15.27	≤ 23.98	Pass
		5530	/	/	8.71	8.19	11.47	≤ 23.98	Pass
		5775	/	/	13.48	12.11	15.86	≤ 30	Pass
		5180	SU	/	10.15	10.39	13.28	/	Pass
802.11ax (HEW20)	MIMO	5200	SU	/	10.47	10.30	13.39	/	Pass
		5240	SU	/	10.52	10.26	13.41	/	Pass
		5260	SU	/	14.25	13.34	16.83	≤ 23.9	Pass
		5300	SU	/	14.58	13.63	17.14	≤ 23.89	Pass
		5320	SU	/	14.68	13.72	17.24	≤ 23.89	Pass
		5500	SU	/	9.73	8.85	12.33	≤ 23.9	Pass
		5580	SU	/	9.87	8.96	12.45	≤ 23.87	Pass
		5700	SU	/	10.02	8.83	12.48	≤ 23.86	Pass
		5745	SU	/	14.97	13.56	17.33	≤ 30	Pass
		5180	SU	/	10.15	10.39	13.28	/	Pass



Report No.: SUCR260300017406

Page: 20 of 20

		5785	SU	/	14.82	13.66	17.29	<=30	Pass
		5825	SU	/	14.89	13.75	17.36	<=30	Pass
802.11ax (HEW40)	MIMO	5190	SU	/	9.86	10.18	13.04	/	Pass
		5230	SU	/	10.40	10.82	13.62	/	Pass
		5270	SU	/	12.24	10.58	14.50	<=23.98	Pass
		5310	SU	/	12.27	10.85	14.63	<=23.98	Pass
		5510	SU	/	8.89	7.31	11.18	<=23.98	Pass
		5550	SU	/	8.79	7.24	11.09	<=23.98	Pass
		5670	SU	/	8.91	7.29	11.19	<=23.98	Pass
		5755	SU	/	14.15	12.77	16.53	<=30	Pass
		5795	SU	/	14.13	12.80	16.53	<=30	Pass
		5210	SU	/	10.32	10.64	13.49	/	Pass
802.11ax (HEW80)	MIMO	5290	SU	/	11.17	9.75	13.53	<=23.98	Pass
		5530	SU	/	7.81	6.20	10.09	<=23.98	Pass
		5775	SU	/	11.37	15.16	16.68	<=30	Pass

- End of the Report -