

TEST REPORT

Application No.: SUCR2603000162TL
FCC ID: 2AH25M3WN
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
EUT Description: Wireless Data Terminal
Model No.: TF31A
Trade Mark: SUNMI
Standards: FCC 47 CFR Part 2, Subpart J
FCC 47 CFR Part 15, Subpart C
Date of Receipt: 2026-03-04
Date of Test: 2026-03-13
Date of Issue: 2026-03-23

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Revision Record			
Version	Description	Date	Remark
01	Original	2026-03-23	/

Authorized for issue by:				
Tested By		Hayley Zhang		
		Hayley Zhang/Project Engineer		
Approved By		Cedar cheng		
		Cedar Cheng /Reviewer		

Contents

1	Test Summary	4
2	General Information	5
2.1	Details of Client	5
2.2	Test Location	5
2.3	Test Facility	5
2.4	General Description of EUT	6
2.5	Test Environment.....	8
2.6	Description of Support Units	8
3	Equipment List	9
4	Measurement Uncertainty (95% confidence levels, k=2)	10
5	Test results and Measurement Data.....	11
5.1	Antenna Requirement.....	11
5.2	Conducted Output Power.....	12
6	Test Setup Photo	13
7	EUT Constructional Details (EUT Photos)	13
8	Appendix.....	13

1 Test Summary

Test Item	FCC Rule No.	Test Method	Result
Antenna Requirement	15.203/15.247(b)	--	PASS
Conducted Output Power	15.247 (b)(3)	ANSI C63.10-2020/Cor1-2023 Section 11.9.1	PASS

Remark1:

This test report (Report No.: SUCR251100108006 issue on 2025/12/5) is based on the original test report (Report No.: SUCR250100002103 issue on 2025/05/21).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Therefore in this report all items do not need to retest and all test data in this report are based on the previous report with report number SUCR250100002103 issue on 2025/05/21.

Remark2:

This test report (Report No.: SUCR260300016205 issue on 2026-03-23) is based on the original test report (Report No.: SUCR251100108006 issue on 2025-12-05).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report only power is performed, and other test data in this report are refer to the previous report with report number SUCR251100108006 issue on 2025-12-05.

2 General Information

2.1 Details of Client

Applicant:	Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer:	Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China

2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Ives Cheng, King-p Li

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA).

• **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory.

Test Firm Registration Number: 717327

• **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

2.4 General Description of EUT

Power Supply:	3.87V from battery
Operation Frequency:	2400MHz~2483.5MHz $f_c = 2402 \text{ MHz} + N * 2 \text{ MHz}$, where: - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 0 to 39.
Bluetooth version:	Bluetooth V5.3
Modulation Type:	GFSK
Number of Channel:	40
Rates Type*:	☒ Provided by client
	1M PHY 2M PHY
Antenna Type:	FPC Antenna
Antenna Gain:	-1.74dBi
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.
RF Cable:	1dB
Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.	

Operation Frequency of each channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
BLE 1M:	
The Lowest channel(CH0)	2402MHz
The Middle channel(CH19)	2440MHz
The Highest channel(CH39)	2480MHz
BLE 2M:	
The Lowest channel(CH1)	2404MHz
The Middle channel(CH19)	2440MHz
The Highest channel(CH38)	2478MHz

2.5 Test Environment

Environment Parameter	102 kPa Selected Values During Tests	
Relative Humidity	44 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	23	3.87
Remark: NV: Normal Voltage NT: Normal Temperature		

2.6 Description of Support Units

The EUT has been tested as an independent unit.

3 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2026/1/14	2027/1/13
2	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	2025/11/21	2026/11/20
3	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	2026/1/14	2027/1/13
4	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	2026/1/14	2027/1/13
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-08-01	2026/1/14	2027/1/13
6	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	2025/11/21	2026/11/20
7	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	2025/5/8	2026/5/7
8	Wideband Radio Communication Test Station	Anritsu	MT8000A	SUWI-01-34-02	2025/11/21	2026/11/20
9	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2025/11/21	2026/11/20
10	Power meter	Anritsu	ML2495A	SUWI-01-31-01	2025/11/21	2026/11/20
11	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	2025/11/21	2026/11/20
12	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2026/1/14	2027/1/13
13	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2026/2/11	2027/2/10
14	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	2025/5/7	2026/5/6
15	Measurement Software	TST	TST 272 V2.02	SUWI-03-55-03	NCR	NCR
16	RF Control unit	TST	TSCB3023R2	SUWI-02-20-01	NCR	NCR
17	RFCables	Tonscend	NA	SUWI-01-03-01	2026/1/15	2027/1/14

4 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	$\pm 0.54\text{dB}$
2	RF power density, conducted	$\pm 1.03\text{dB}$
3	Spurious emissions, conducted	$\pm 0.54\text{dB}$
4	Radio Frequency	1%
5	Duty Cycle	$\pm 0.37\%$
6	Occupied Bandwidth	1%
7	Conduction Emission	$\pm 2.90\text{dB}$ (150kHz to 30MHz)
8	Radiated Emission	$\pm 3.13\text{dB}$ (9k -30MHz)
		$\pm 4.8\text{dB}$ (30M -1GHz)
		$\pm 4.8\text{dB}$ (1GHz to 18GHz)
		$\pm 4.80\text{dB}$ (Above 18GHz)

Remark:

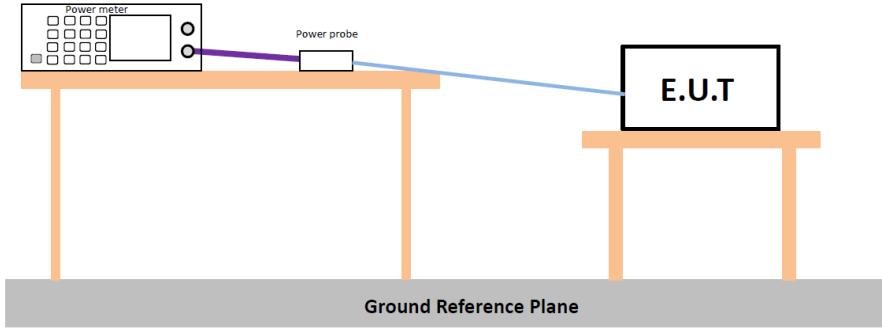
The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results
– compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
– non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(b)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna is -1.74dBi. <i>Note:</i> <i>The antenna gain are derived from the gain information report provided by the manufacturer.</i> <i>Remark:</i> <i>As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.</i>	

5.2 Conducted Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10-2020/Cor1-2023 Section 11.9.1.3
Test Setup:	 * Test with power meter (Detector function: Peak)
Test Instruments:	Refer to section 3 for details
Test Mode:	Transmitting with GFSK modulation.
Limit:	30dBm
Test Results:	Pass
The detailed test data see: Appendix	

6 Test Setup Photo

Refer to Appendix_Test Setup Photo for SUCR2603000162TL

7 EUT Constructional Details (EUT Photos)

Refer to Appendix_External Photos for SUCR2603000162TL and Appendix_Internal Photos for SUCR2603000162TL

8 Appendix

1. Maximum Conducted Output Power

1.1 Test Result

1.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT2	Limit	
1M	SISO	2402	11.18	<=30	Pass
		2440	11.39	<=30	Pass
		2480	10.33	<=30	Pass
2M	SISO	2404	11.42	<=30	Pass
		2440	11.42	<=30	Pass
		2478	10.27	<=30	Pass

Note1: Antenna Gain: Ant2: -1.74dBi;

---End of Report---