

TEST REPORT

Application No.: SUCR2603000171TL
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
EUT Description: Wireless Data Terminal
Model No.: TFB1A
Trade Mark: SUNMI
FCC ID: 2AH25M3WN
Standards: FCC 47 CFR Part 2, Subpart J
FCC 47 CFR Part 15, Subpart C
Date of Receipt: 2026-03-04
Date of Test: 2026-03-13
Date of Issue: 2026-03-30

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Version

Revision Record			
Version	Description	Date	Remark
01	Original	2026-03-30	/

Authorized for issue by:			
Tested By		Hayley Zhang	
		Hayley Zhang/Project Engineer	
Approved By		Cedar cheng	
		Cedar Cheng /Reviewer	

Contents

Version	2
1 Test Summary	4
2 General Information	5
2.1 Details of Client	5
2.2 Test Location	5
2.3 Test Facility	5
2.4 General Description of EUT	6
2.5 Test Environment	7
2.6 Description of Support Units	7
3 Equipment List	8
4 Measurement Uncertainty (95% confidence levels, k=2)	9
5 Test results and Measurement Data	10
5.1 Antenna Requirement	10
5.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	11
5.3 Conducted Output Power	13
6 Photographs - Setup Photos	14
7 Appendix	14

1 Test Summary

Test Item	FCC Rule No.	Test Method	Result
Antenna Requirement	15.203/15.247(b)	--	PASS
Conducted Peak Output Power	15.247 (b)(1)	ANSI C63.10-2020/Cor1-2023 Section 7.8.5	PASS

Remark:

This test report (Report No.: SUCR260300017103 issue on 2026-03-30) is based on the original test report (Report No.: SUCR251100108904 issue on 2025-12-16).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Therefore in this report only power is performed, and other test data in this report are refer to the previous report with report number SUCR251100108904 issue on 2025-12-16.

2 General Information

2.1 Details of Client

Applicant:	Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer:	Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China

2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Ives Cheng

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA).

• **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory.

Test Firm Registration Number: 717327

• **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

2.4 General Description of EUT

Power Supply:	3.87V from battery
Operation Frequency:	2400MHz~2483.5MHz $f_c = 2402 \text{ MHz} + N * 1 \text{ MHz}$, where: - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 0 to 78.
Bluetooth version:	Bluetooth V5.3
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Antenna Type:	FPC Antenna
Antenna Gain:	2.01dBi
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.
RF Cable:	1dB
Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.	

Operation Frequency of each channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz

16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH0)	2402MHz
The Middle channel(CH39)	2441MHz
The Highest channel(CH78)	2480MHz

2.5 Test Environment

Environment Parameter	102 kPa Selected Values During Tests	
Relative Humidity	44% RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	23	3.87

Remark:
NV: Normal Voltage
NT: Normal Temperature

2.6 Description of Support Units

The EUT has been tested as an independent unit.

3 Equipment List

RF Conducted Test						
1	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2026/1/14	2027/1/13
2	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	2025/11/21	2026/11/20
3	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	2026/1/14	2027/1/13
4	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	2026/1/14	2027/1/13
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-08-01	2026/1/14	2027/1/13
6	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	2025/11/21	2026/11/20
7	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	2025/5/8	2026/5/7
8	Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2025/11/21	2026/11/20
9	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2025/11/21	2026/11/20
10	Power meter	Anritsu	ML2495A	SUWI-01-31-01	2025/11/21	2026/11/20
11	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	2025/11/21	2026/11/20
12	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2026/1/14	2027/1/13
13	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2025/2/13	2026/2/12
14	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	2025/5/7	2026/5/6
15	Measurement Software	TST	TST 272 V2.02	SUWI-03-55-03	NCR	NCR
16	RF Control unit	TST	TSCB3023R2	SUWI-02-20-01	NCR	NCR
17	RF Cables	Tonscend	NA	SUWI-01-03-01	NCR	NCR

Remark: NCR=No Calibration Requirement.

4 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	$\pm 0.54\text{dB}$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(b)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna is 2.01dBi. <i>Note:</i> <i>The antenna gain are derived from the gain information report provided by the manufacturer.</i> <i>Remark:</i> <i>As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.</i>	

5.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

5.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

5.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudo random sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.


> Number of shift register stages: 9

> Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

> Longest sequence of zeros: 8 (non-inverted signal)


Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.


Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the RF system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels. The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

5.3 Conducted Output Power

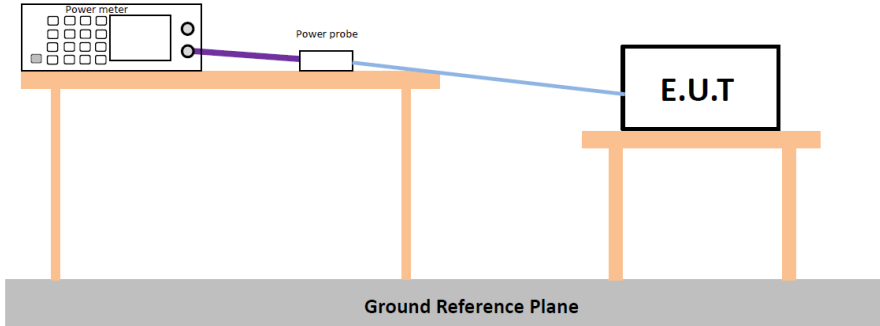Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)&15.247 (b)(1)
Test Method:	ANSI C63.10-2020/Cor1-2023 Section 7.8.5
Test Setup:	 * Test with power meter (Detector function: Peak)
Test Instruments:	Refer to section 3 for details
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Limit:	0.125 watts
Test Results:	Pass
The detailed test data see: Appendix	

6 Photographs - Setup Photos

Refer to Appendix_Photos of Test Setup for SUCR2603000171TL.

7 Appendix

1. Maximum Conducted Output Power

1.1 Test Result

1.1.1 Power

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT2	Limit	
GFSK	SISO	2402	DH5	6.91	<=30	Pass
		2441	DH5	8.17	<=30	Pass
		2480	DH5	6.05	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	4.45	<=20.97	Pass
		2441	2DH5	4.67	<=20.97	Pass
		2480	2DH5	3.89	<=20.97	Pass
8DPSK	SISO	2402	3DH5	4.97	<=20.97	Pass
		2441	3DH5	6.16	<=20.97	Pass
		2480	3DH5	3.40	<=20.97	Pass
Note1: Antenna Gain: Ant2: 2.01dBi;						

---End of Report---