

TEST REPORT

Application No.: SUCR2605000453AT
Applicant: Shanghai Sunmi Technology Co., Ltd.
Address of Applicant: Room 505, No.388, Song Hu Road, Yang Pu District, Shanghai, China
Manufacturer: Shanghai Sunmi Technology Co., Ltd.
Address of Manufacturer: Room 505, No.388, Song Hu Road, Yang Pu District, Shanghai, China
EUT Description: Cloud POS Printer
Model No.: NT320
Trade Mark: SUNMI
FCC ID: 2AH25NT320HP
Standards: FCC 47 CFR Part 2, Subpart J
FCC 47 CFR Part 15, Subpart C
Date of Receipt: 2026-05-19
Date of Test: 2026-06-10 to 2026-06-22
Date of Issue: 2026-06-24

Test Result :	PASS *
----------------------	---------------


* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Version

Revision Record			
Version	Description	Date	Remark
00	Original	2026-06-24	/

Authorized for issue by:			
Tested By			
		Hayley Zhang/Project Engineer	
Approved By			
		Cedar Cheng /Reviewer	



Report No.: SUCR260500045306

Page: 3 of 22

Contents

1	Test Summary	4
2	General Information	5
2.1	Details of E.U.T.	5
2.2	Environment Parameter	5
2.3	Description of Support Units	6
2.4	Measurement Uncertainty	6
2.5	Test Location	7
2.6	Test Facility	7
2.7	Deviation from Standards	7
2.8	Abnormalities from Standard Conditions	7
3	Equipment List	8
4	Radio Spectrum Technical Requirement	9
4.1	Antenna Requirement	9
5	Radio Spectrum Matter Test Results	10
5.1	Radiated Spurious Emissions Below 1GHz	10
5.2	Radiated Spurious Emissions Above 1GHz	12
6	Test Setup Photo	14
7	EUT Constructional Details (EUT Photos)	14
8	Appendix	15

1 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10-2020/Cor1-2023 Section 6.2	47 CFR Part 15, Subpart C 15.207	Reference report SZCR231100354202
Radiated Spurious Emissions Below 1GHz		ANSI C63.10-2020/Cor1-2023 Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10-2020/Cor1-2023 Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Maximum Conducted Output Power		ANSI C63.10-2020/Cor1-2023 Section 11.9	47 CFR Part 15, Subpart C 15.247(b)(3)	Reference report SZCR231100354202
Minimum 6dB Bandwidth		ANSI C63.10-2020/Cor1-2023 Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	
Power Spectral Density		ANSI C63.10-2020/Cor1-2023 Section 11.10	47 CFR Part 15, Subpart C 15.247(e)	
Conducted Band Edges Measurement		ANSI C63.10-2020/Cor1-2023 Section 11.13	47 CFR Part 15, Subpart C 15.247(d)	
Conducted Spurious Emissions		ANSI C63.10-2020/Cor1-2023 Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	

Remark:

This test report (Report No.: SUCR260500045306 issue on 2026-06-24) is based on the original test report (Report No.: SZCR231100354202 issue on 2023-12-12).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Therefore in this report only the radiated spurious emissions based on the worst case of the original report with report number SZCR231100354202 issue on 2023-12-12 and other test data in this report are refer to the previous report with report number SZCR231100354202 issue on 2023-12-12.

2 General Information

2.1 Details of E.U.T.

Operation Frequency:	903.5MHz-926.5MHz (1MHz Channel Bandwidth) 905MHz-925MHz (2MHz Channel Bandwidth) 906MHz-922MHz (4MHz Channel Bandwidth)
Modulation Type:	OFDM with BPSK/QPSK/16QAM/64QAM
Number of Channels:	24 Channels for 802.11ah(1MHz Channel Bandwidth) 11 Channels for 802.11ah(2MHz Channel Bandwidth) 5 Channels for 802.11ah(4MHz Channel Bandwidth)
Rate:	0.15 to 3.0Mbps for 802.11ah(1MHz Channel Bandwidth) 0.65 to 6.5Mbps for 802.11ah(2MHz Channel Bandwidth) 1.35 to 13.5Mbps for 802.11ah(4MHz Channel Bandwidth)
Antenna Type:	FPC Antenna
Antenna Gain:	3.74dBi (Provided by the manufacturer)
Remark:	As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

Channel list for 802.11ah			
Bandwidth (MHz)	Low Channel (MHz)	Middle Channel (MHz)	High Channel (MHz)
1	903.5	915.5	926.5
2	905	915	925
4	906	914	922

Selected test rate for 802.11ah			
Bandwidth (MHz)	Low Channel	Middle Channel	High Channel
1	MCS10	MCS10	MCS10
2	MCS0	MCS0	MCS0
4	MCS0	MCS0	MCS0

2.2 Environment Parameter

Environment Parameter	Selected Values During Tests	
Relative Humidity	41-43%	
Value	Temperature(°C)	Voltage(V)
NTNV	21-23	3.70
Note:		
NV:Normal Voltage	LV:Low Extreme Test Voltage	HV:High Extreme Test Voltage
NT:Normal Temperature	LT:Low Extreme Test Temperature	HT:High Extreme Test Temperature

2.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Computer	Lenovo	T14	2YK6GR
Mouse	Lenovo	3D optical Mouse	N/A
Router	Smauwave Technology Co.,Ltd	SRT 421	RT421X02211300001

2.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radiated Emission	$\pm 3.13\text{dB}$ (9k -30MHz)
		$\pm 4.80\text{dB}$ (30M -1GHz)
		$\pm 4.80\text{dB}$ (1GHz to 18GHz)
		$\pm 4.80\text{dB}$ (Above 18GHz)

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

2.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

2.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number:717327

- **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

2.7 Deviation from Standards

None

2.8 Abnormalities from Standard Conditions

None

3 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2026/6/9	2029/6/8
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2026/1/14	2027/1/13
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	2025/11/20	2026/11/19
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2026/1/14	2027/1/13
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	2026/1/14	2027/1/13
6	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	2025/11/29	2027/11/28
7	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2025/5/7	2027/5/6
8	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2025/5/7	2027/5/6
9	Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2025/5/7	2027/5/6
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2026/1/14	2027/1/13
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2026/1/14	2027/1/13
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2026/1/14	2027/1/13
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	2025/8/25	2026/8/24
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2025/8/25	2026/8/24
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	2025/8/26	2026/8/25
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-06	2025/11/21	2026/11/20
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	2026/1/14	2027/1/13
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2026/1/14	2027/1/13
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2026/2/11	2027/2/10
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
21	RF Control unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
22	RFCables	Tonscend	NA	SUWI-01-03-02	NCR	NCR

Remark: NCR=No Calibration Requirement.

4 Radio Spectrum Technical Requirement

4.1 Antenna Requirement

4.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

4.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna is 3.74dBi.

Antenna location: Refer to internal photo.

5 Radio Spectrum Matter Test Results

5.1 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209


Test Method: ANSI C63.10-2020/Cor1-2023 Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

5.1.1 Test Setup Diagram

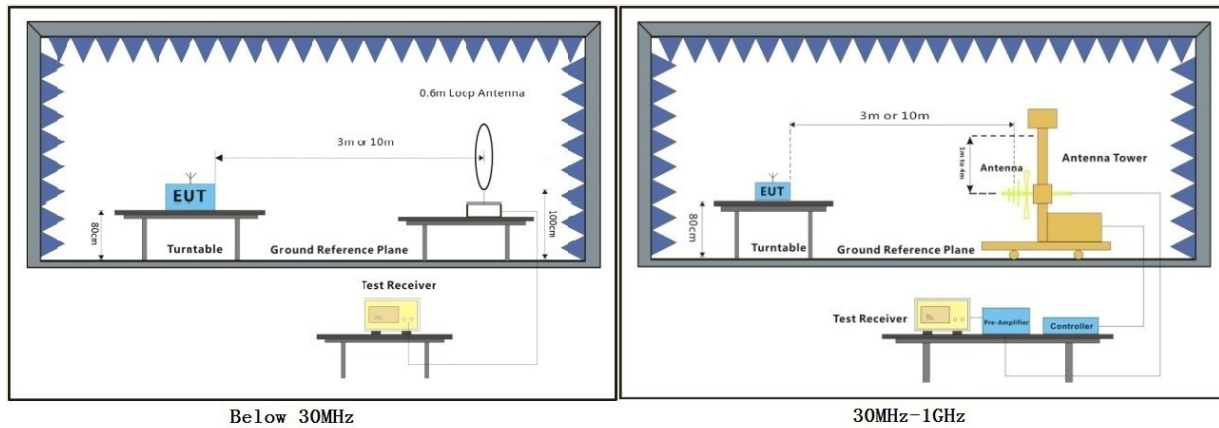

5.1.2 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. All modes and channel bandwidths has been tested and we found 1MHz channel bandwidth has the worst test result, only record the worst test result.

5.1.3 Measurement Procedure and Data

Please Refer to Appendix for Details

5.2 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209


Test Method: ANSI C63.10-2020/Cor1-2023 Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

5.2.1 Test Setup Diagram

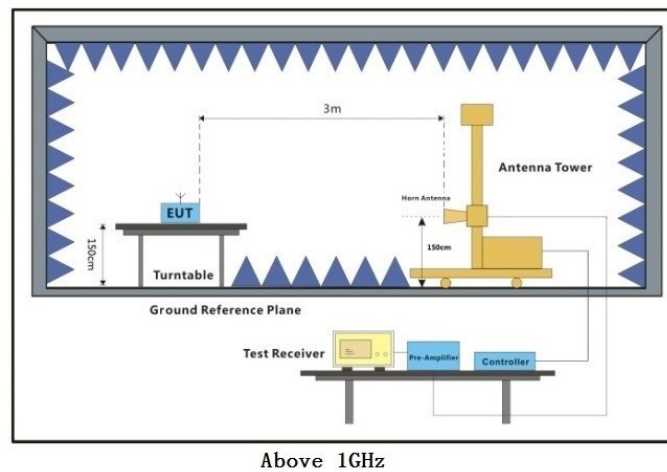

5.2.2 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. All modes and channel bandwidths has been tested and we found 1MHz channel bandwidth has the worst test result, only record the worst test result.

5.2.3 Measurement Procedure and Data

Please Refer to Appendix for Details



Report No.: SUCR260500045306

Page: 14 of 22

6 Test Setup Photo

Refer to Appendix A.3_Photos of Test Setup for SUCR2605000453AT

7 EUT Constructional Details (EUT Photos)


Refer to Appendix A.1_External Photos for SUCR2605000453AT and Appendix A.2_Internal Photos for SUCR2605000453AT

8 Appendix


Radiated Spurious Emissions

Worst case Mode:

Below 1GHz

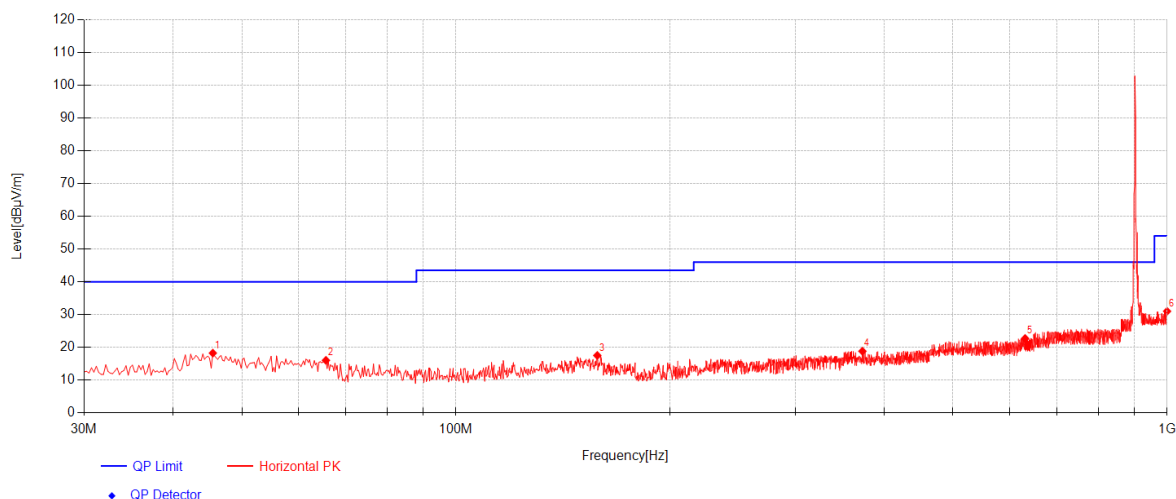


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	45.52	47.54	13.34	-42.69	18.20	40.00	21.80	Horizontal
2	65.6475	47.26	11.21	-42.47	16.00	40.00	24.00	Horizontal
3	158.04	46.22	12.87	-41.61	17.48	43.50	26.02	Horizontal
4	372.895	44.81	14.81	-40.83	18.79	46.00	27.21	Horizontal
5	631.4	42.49	19.82	-39.63	22.68	46.00	23.32	Horizontal
6	1000	44.43	24.70	-38.14	30.99	54.00	23.01	Horizontal

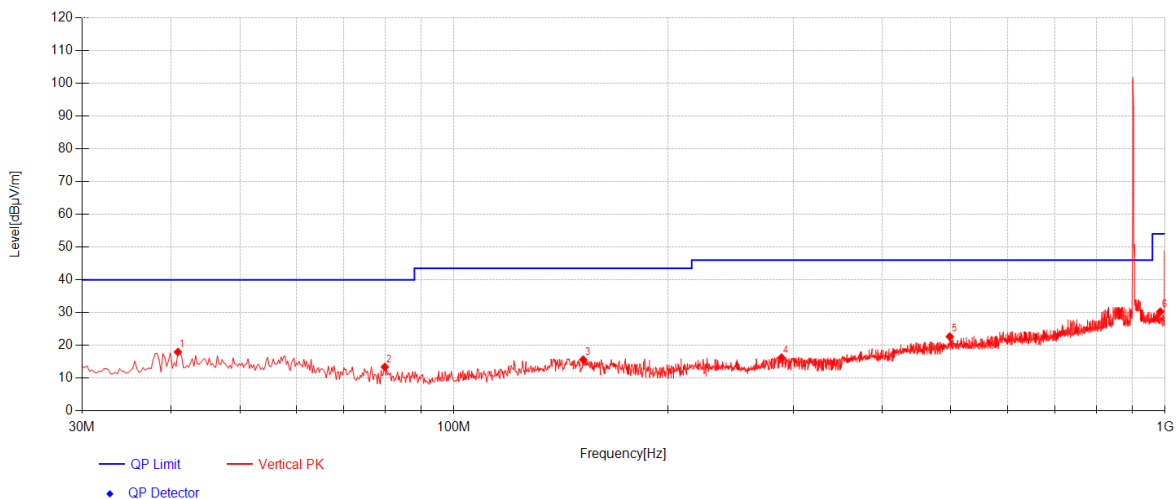


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	40.9125	47.24	13.39	-42.70	17.93	40.00	22.07	Vertical
2	79.955	46.69	9.11	-42.44	13.36	40.00	26.64	Vertical
3	151.9775	44.42	12.78	-41.60	15.60	43.50	27.90	Vertical
4	288.7475	44.63	12.64	-41.07	16.20	46.00	29.80	Vertical
5	498.025	44.88	17.76	-39.99	22.65	46.00	23.35	Vertical
6	984.48	43.68	24.56	-37.99	30.25	54.00	23.75	Vertical

Above 1GHz

Low Channel

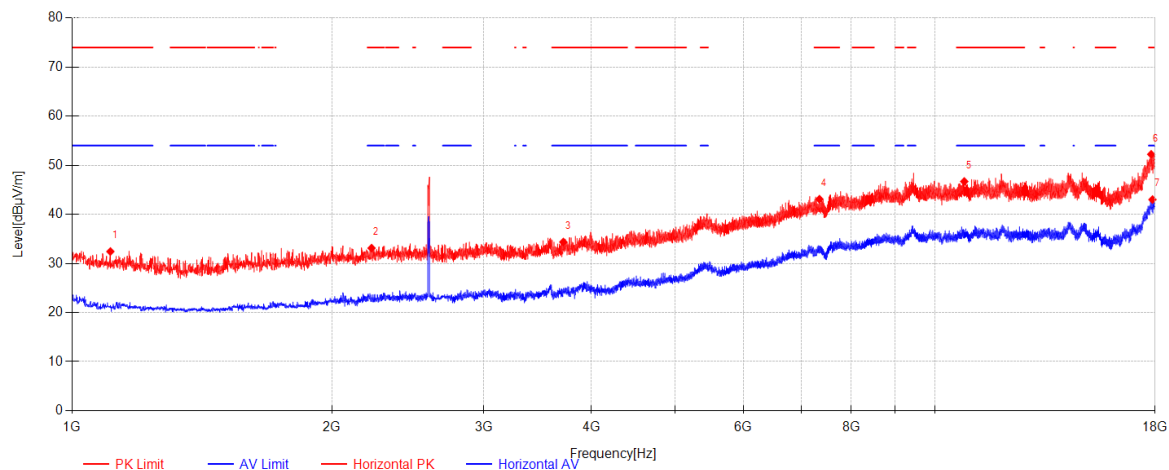


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1107.6667	57.55	24.85	-49.97	32.42	74.00	41.58	Horizontal
2	2224	55.82	26.70	-49.40	33.12	74.00	40.88	Horizontal
3	3710.0833	54.18	28.84	-48.67	34.35	74.00	39.65	Horizontal
4	7349.5	52.99	36.13	-46.03	43.09	74.00	30.91	Horizontal
5	10817.5	48.05	39.37	-40.74	46.69	74.00	27.31	Horizontal
6	17815.125	44.31	43.69	-35.78	52.22	74.00	21.78	Horizontal
7	17875.3333	35.30	44.05	-36.34	43.01	54.00	10.99	Horizontal

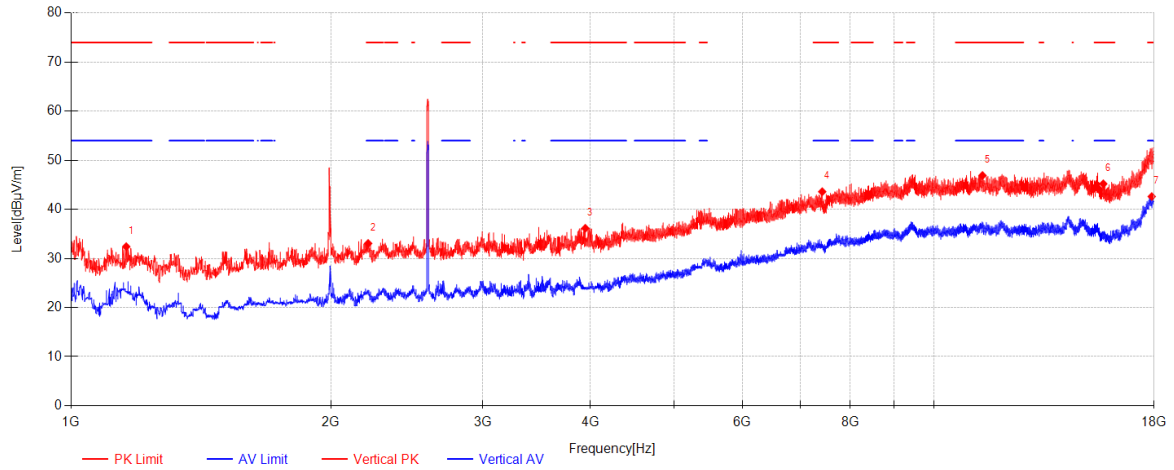


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1158.6667	57.69	24.82	-50.11	32.40	74.00	41.60	Vertical
2	2209.8333	55.83	26.68	-49.45	33.05	74.00	40.95	Vertical
3	3944.5417	55.32	29.21	-48.39	36.14	74.00	37.86	Vertical
4	7423.875	53.37	36.26	-46.05	43.59	74.00	30.41	Vertical
5	11384.875	47.71	39.46	-40.28	46.89	74.00	27.11	Vertical
6	15719.1667	44.22	38.91	-37.92	45.20	74.00	28.80	Vertical
7	17885.9583	34.93	44.12	-36.44	42.61	54.00	11.39	Vertical

Middle Channel

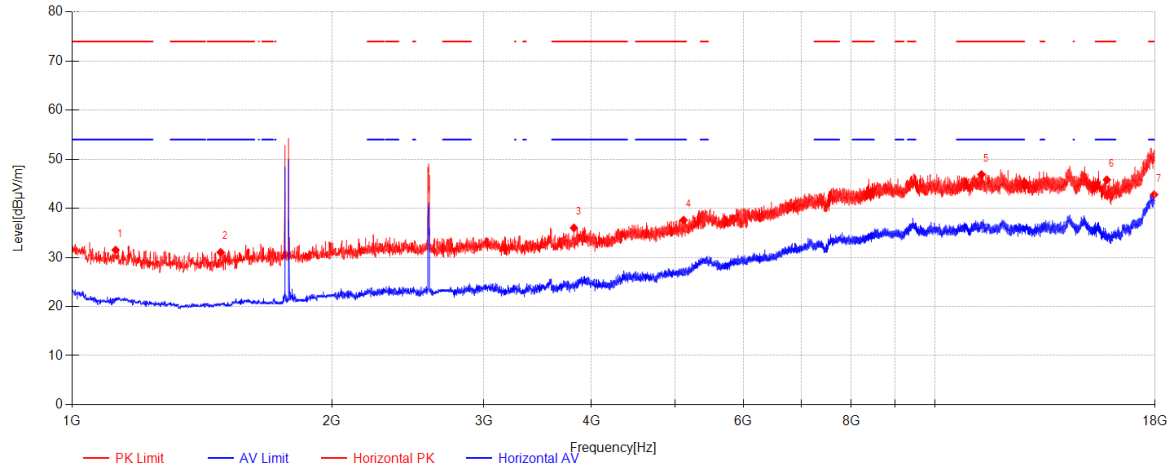


Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1123.25	56.69	24.84	-50.02	31.51	74.00	42.49	Horizontal
2	1486.625	56.19	24.71	-49.85	31.04	74.00	42.96	Horizontal
3	3817.0417	55.43	29.01	-48.41	36.02	74.00	37.98	Horizontal
4	5114.7083	54.02	31.52	-47.93	37.61	74.00	36.39	Horizontal
5	11322.5417	47.93	39.47	-40.49	46.90	74.00	27.10	Horizontal
6	15824.7083	45.15	38.72	-38.06	45.81	74.00	28.19	Horizontal
7	17955.375	35.18	44.53	-36.91	42.80	54.00	11.20	Horizontal

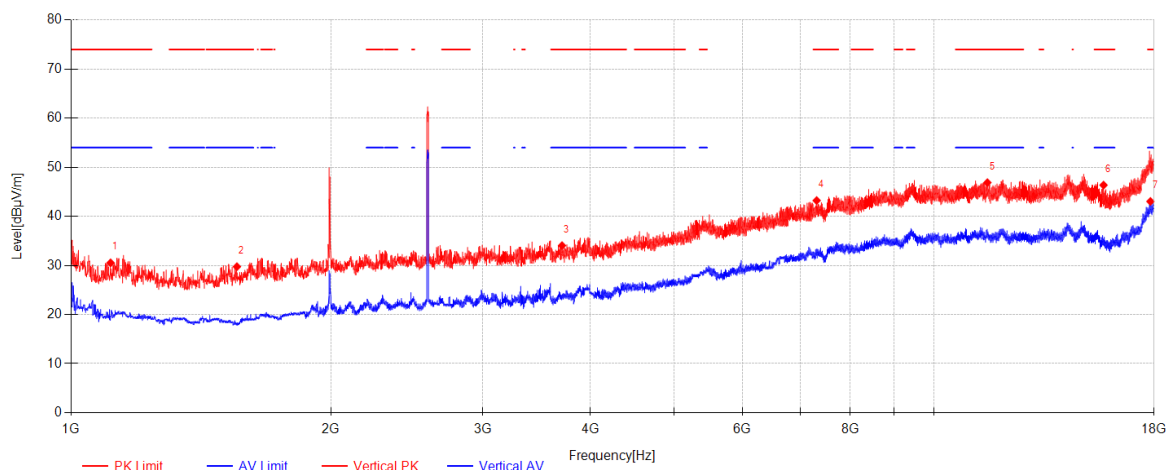


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1111.2083	55.67	24.84	-49.98	30.53	74.00	43.47	Vertical
2	1556.75	54.44	25.20	-49.89	29.75	74.00	44.25	Vertical
3	3707.25	53.89	28.83	-48.68	34.04	74.00	39.96	Vertical
4	7314.0833	53.23	36.07	-46.07	43.22	74.00	30.78	Vertical
5	11536.4583	47.24	39.45	-39.82	46.87	74.00	27.13	Vertical
6	15728.375	45.42	38.89	-37.95	46.36	74.00	27.64	Vertical
7	17824.3333	35.16	43.75	-35.87	43.04	54.00	10.96	Vertical

High Channel

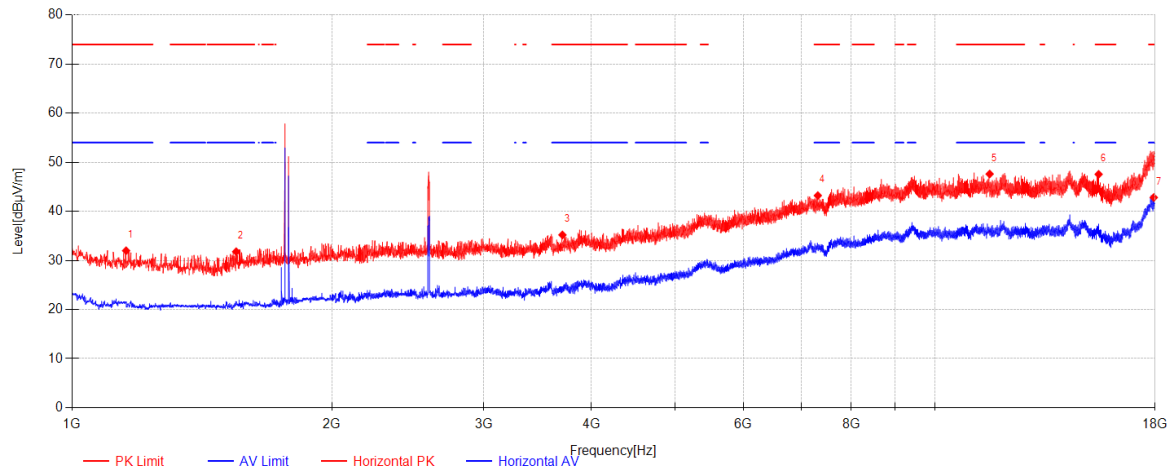

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1155.125	57.26	24.82	-50.10	31.98	74.00	42.02	Horizontal
2	1549.6667	56.51	25.15	-49.88	31.78	74.00	42.22	Horizontal
3	3701.5833	55.06	28.82	-48.70	35.19	74.00	38.81	Horizontal
4	7316.9167	53.21	36.07	-46.07	43.21	74.00	30.79	Horizontal
5	11574.7083	47.92	39.44	-39.76	47.60	74.00	26.40	Horizontal
6	15482.5833	45.20	39.33	-36.98	47.55	74.00	26.45	Horizontal
7	17939.0833	35.20	44.43	-36.81	42.82	54.00	11.18	Horizontal

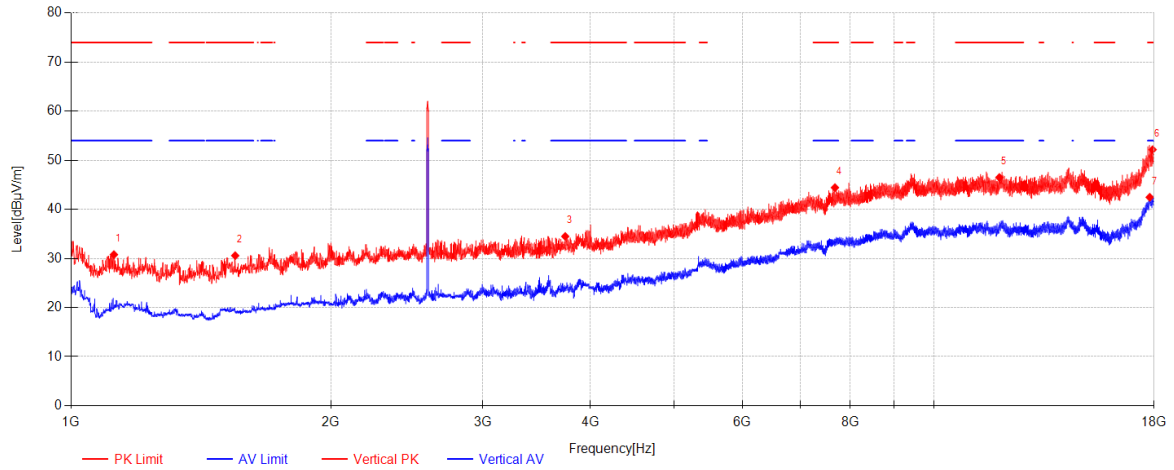

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1121.125	55.94	24.84	-50.01	30.77	74.00	43.23	Vertical
2	1549.6667	55.29	25.15	-49.88	30.56	74.00	43.44	Vertical
3	3739.125	54.18	28.88	-48.59	34.48	74.00	39.52	Vertical
4	7680.2917	53.22	36.36	-45.16	44.42	74.00	29.58	Vertical
5	11911.875	47.01	39.41	-39.93	46.49	74.00	27.51	Vertical
6	17929.1667	44.54	44.38	-36.75	52.16	74.00	21.84	Vertical
7	17791.0417	34.63	43.55	-35.72	42.46	54.00	11.54	Vertical

---End of Report---