

EMC TEST REPORT

Applicant Shanghai Sunmi Technology Co.,Ltd.
FCC ID 2AH25P3MIXH
Product Smart POS Terminal
Brand SUNMI
Model T6721
Report No. EFTA25090010-IE-01-E1
Issue Date December 26, 2025

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2024)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Liu Wei

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report.....	4
1.2	Test Facility	4
1.3	Testing Location.....	4
2	General Description of Equipment Under Test	5
2.1	Applicant and Manufacturer Information	5
2.2	General Information	5
2.3	Applied Standards	7
2.4	Test Mode	8
3	Test Case Results	9
3.1	Radiated Emission	9
3.2	Conducted Emission	14
4	Uncertainty Measurement.....	17
5	Main Test Instruments	18
6	The EUT Appearance.....	19
7	Test Setup Photos	20

Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: September 23, 2025 ~ November 18, 2025			
Date of Sample Received: September 1, 2025			
Note:			
1. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2 General Description of Equipment Under Test

2.1 Applicant and Manufacturer Information

Applicant	Shanghai Sunmi Technology Co.,Ltd.
Applicant address	Room 505, No.388, Song Hu Road, Yang Pu District, Shanghai, China
Manufacturer	Shanghai Sunmi Technology Co.,Ltd.
Manufacturer address	Room 505, No.388, Song Hu Road, Yang Pu District, Shanghai, China

2.2 General Information

EUT Description			
Device Type	Portable Device		
Model	T6721		
SN	PF21256J20011		
HW Version	Bgf6e		
SW Version	P3_MIX_STD_user_HyperWi-Fi_v054_1.0.5_174_20250703		
Power Rating	DC 7.2V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	Internal Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824 ~ 849	869 ~ 894
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	WCDMA Band IV	1710 ~ 1755	2110 ~ 2155
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 5	824 ~ 849	869 ~ 894
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
	LTE Band 12	699 ~ 716	729 ~ 746
	LTE Band 13	777 ~ 787	746 ~ 756
	LTE Band 14	788 ~ 798	758 ~ 768
	LTE Band 17	704 ~ 716	734 ~ 746
	LTE Band 25	1850 ~ 1915	1930 ~ 1995
	LTE Band 26	814 ~ 849	859 ~ 894

	LTE Band 30	2305 ~ 2315	2350 ~ 2360
	LTE Band 38	2570 ~ 2620	2570 ~ 2620
	LTE Band 41	2496 ~ 2690	2496 ~ 2690
	LTE Band 66	1710 ~ 1780	2110 ~ 2180
	LTE Band 71	663 ~ 698	617 ~ 652
	Bluetooth	2400 ~ 2483.5	2400 ~ 2483.5
	Wi-Fi 2.4GHz	2400 ~ 2483.5	2400 ~ 2483.5
	Wi-Fi 5GHz (U-NII-1)	5150 ~ 5250	5150 ~ 5250
	Wi-Fi 5GHz (U-NII-2A)	5250 ~ 5350	5250 ~ 5350
	Wi-Fi 5GHz (U-NII-2C)	5470 ~ 5725	5470 ~ 5725
	Wi-Fi 5GHz (U-NII-3)	5725 ~ 5850	5725 ~ 5850
	Hyper Wi-Fi	902 ~ 928	902 ~ 928
	NFC	13.56	13.56
EUT Accessory			
Adapter 1	Manufacturer: SHENZHEN TIANYIN ELECTRONICS CO., LTD. Model: TPA-23A050200UU01 Input: 100-240V~50/60Hz 0.3A Output: 5.0V ---2.0A		
Adapter 2	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: UC13US Input: 100-240V~50/60Hz 0.35A Output: 5.0V ---2.0A 10.0W		
Battery 1	Manufacturer: Guangdong Pow-Tech New Power Co., Ltd. Model: LKPA DC 7.2V, 2500mAh		
Battery 2	Manufacturer: POWER GLORY BATTERY TECH(HK) CO LTD Model: CR2032 DC 3V, 220mAh		
Battery 3	Manufacturer: JHIH HONG TECHNOLOGY CO LTD Model: CR2032 DC 3V, 220mAh		
USB Cable	Manufacturer: Saibao (Jiangxi) Industry Co., LTD Model: SSM-A001A		
Auxiliary Test Equipment			
PC	Manufacturer: DELL Model: Latitude 3550		
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant. 2. Two-thirds of the batteries are backup batteries for financial tamper-proof authentication. When the main battery (Battery 1) is powered off, Batteries 2 and 3 are used to detect and trigger an alarm. 3. There are more than one Adapters, each one should be applied throughout the compliance test respectively, however, only the worst case (Adapter 1) will be recorded in this report.			

2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2024)

ANSI C63.4-2014

2.4 Test Mode

Test Mode	
Mode 1	Adapter + USB cable+ EUT + Front camera On
Mode 2	Adapter + USB cable+ EUT + Rear camera On
Mode 3	Adapter + USB cable + EUT + play (1kHz)
Mode 4	Battery powered + EUT + Front Camera On +earphone
Mode 5	Battery powered + EUT + Rear camera On +earphone
Mode 6	Battery powered + EUT + EUT + play (1kHz)
Mode 7	USB Copy (EUT with PC) + USB cable
Mode 8	USB Copy (PC with EUT) + USB cable

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1 ~ 8	Mode 7
Conducted Emission	Mode 1 ~ 3, 7~ 8	Mode 2 with adapter 1
After technical evaluation or/and preliminary test, the test data of the worst-case condition was recorded in this report.		

3 Test Case Results

3.1 Radiated Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Test Setup

Below 1GHz

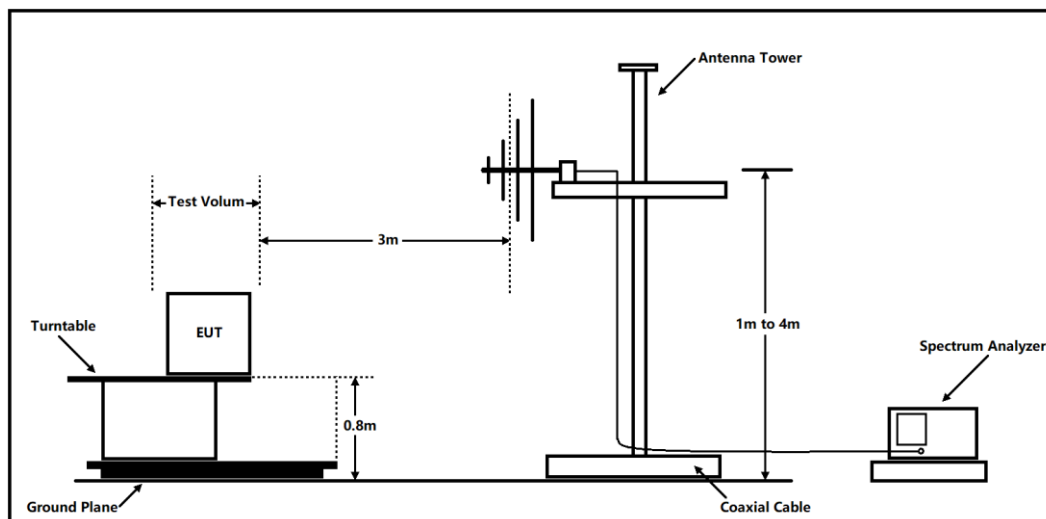

Above 1GHz

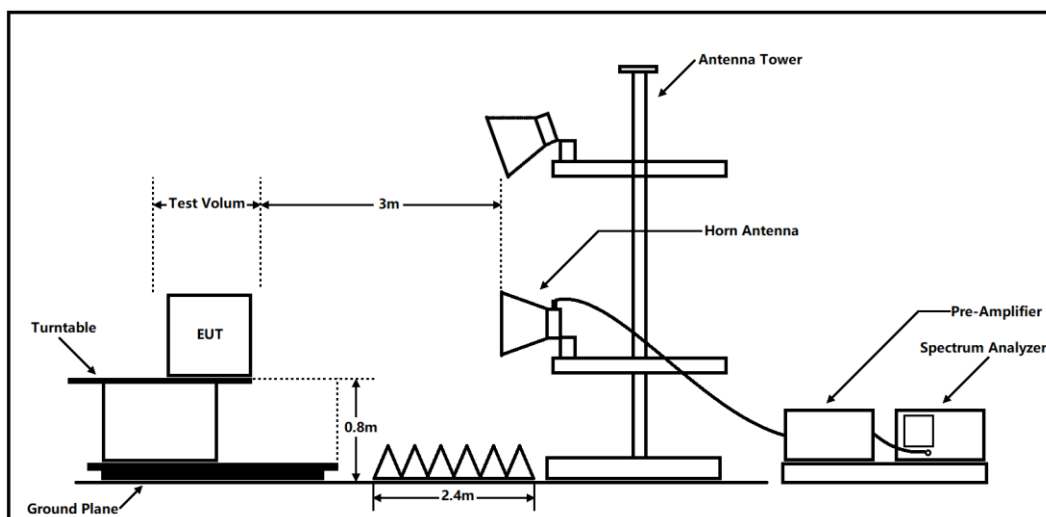

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits

Class B

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Frequency range of radiated measurements


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. The Emissions in the frequency band 18GHz – 26.5GHz is more than 20dB below the limit are not reported.

A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means (dB $\mu\text{V/m}$)

The following graphs display the maximum values of horizontal and vertical by software.

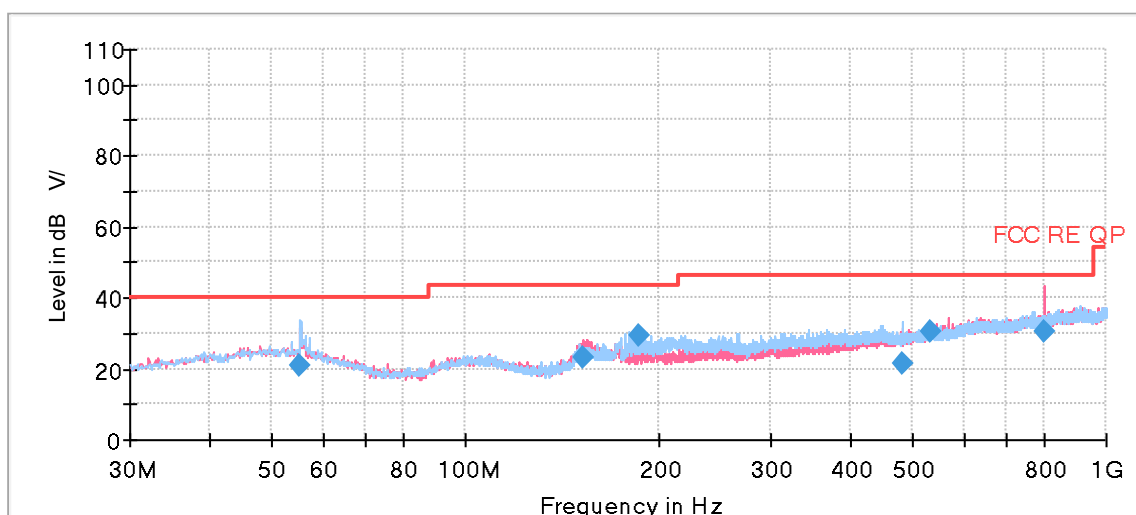


~ QP Level @Spectrum Overview H
 ~ QP Level @Spectrum Overview V
 ◆ QP Level @Final Results
 — QP Limit

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB $\mu\text{V/m}$)	Limit (dB $\mu\text{V/m}$)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
55.341250	20.72	40.00	19.28	210.0	H	1.0	20.7
152.947500	23.23	43.50	20.27	107.0	V	302.0	15.8
186.291250	29.32	43.50	14.18	181.0	H	228.0	17.9
480.080000	21.26	46.00	24.74	214.0	H	19.0	24.8
533.187500	30.33	46.00	15.67	109.0	V	173.0	26.1
800.058750	30.35	46.00	15.65	215.0	V	215.0	29.6

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

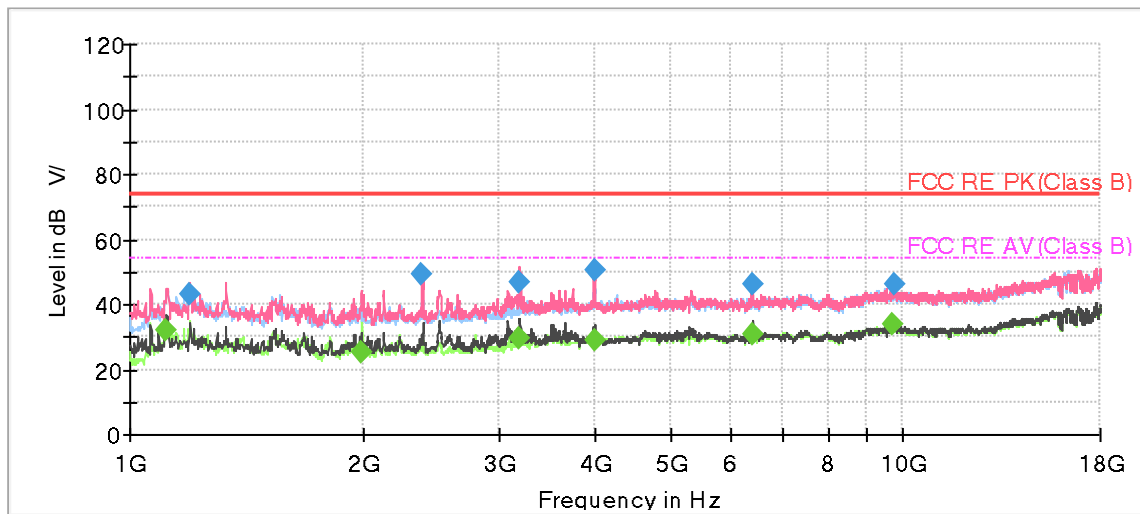

~ PK Level @Spectrum Overview H
 ~ PK Level @Spectrum Overview V
 ◆ PK Level @Final Results
 — PK Limit
~ AVG Level @Spectrum Overview H
 ~ AVG Level @Spectrum Overview V
 ◆ AVG Level @Final Results
 — AVG Limit

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1114.750000	---	31.75	54.00	22.25	500.0	118.0	V	214.0	-20.0
1195.500000	43.17	---	74.00	30.83	500.0	120.0	V	212.0	-18.9
1998.750000	---	24.95	54.00	29.05	500.0	117.0	H	285.0	-14.6
2389.750000	49.12	---	74.00	24.88	500.0	105.0	V	249.0	-12.6
3188.750000	---	29.56	54.00	24.44	500.0	100.0	V	159.0	-10.0
3190.875000	46.81	---	74.00	27.19	500.0	125.0	V	155.0	-10.0
3996.250000	---	29.18	54.00	24.82	500.0	211.0	V	217.0	-6.8
3998.375000	50.66	---	74.00	23.34	500.0	175.0	V	218.0	-6.8
6382.625000	---	31.07	54.00	22.93	500.0	219.0	V	255.0	-4.2
6384.750000	45.92	---	74.00	28.08	500.0	175.0	V	272.0	-4.2
9678.500000	---	34.03	54.00	19.97	500.0	118.0	V	5.0	-0.7
9752.875000	46.09	---	74.00	27.91	500.0	125.0	V	136.0	-0.5

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – MaxPeak / Average

3.2 Conducted Emission


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

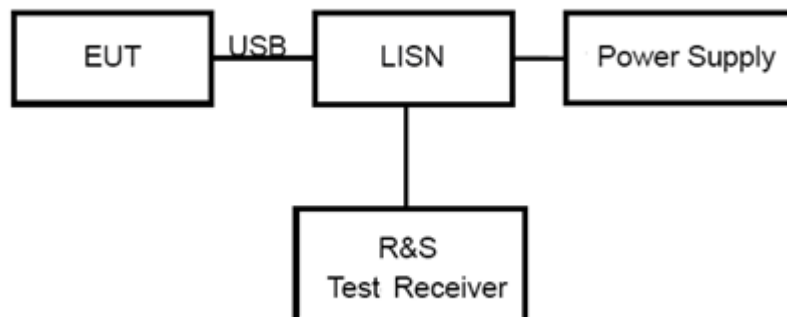

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Class A (dBμV)		Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50
*: Decreases with the logarithm of the frequency.				

Note: The EUT should meet CLASS B limit.

Test Results



Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	AVG Level [dBμV]	AVG: CAV Limit [dBμV]	AVG Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]	Meas. Time [s]
0.215	39.25	63.00	23.75	21.54	53.00	31.46	21.00	L1	9.000	1.000
0.632	49.55	56.00	6.45	37.05	46.00	8.95	20.64	L1	9.000	1.000
1.304	35.40	56.00	20.60	17.80	46.00	28.20	19.95	L1	9.000	1.000
3.577	29.60	56.00	26.40	17.97	46.00	28.03	19.45	L1	9.000	1.000
9.472	29.40	60.00	30.60	18.53	50.00	31.47	19.41	L1	9.000	1.000
18.125	41.34	60.00	18.66	27.38	50.00	22.62	19.60	L1	9.000	1.000

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 kHz to 30 MHz



Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	AVG Level [dBμV]	AVG: CAV Limit [dBμV]	AVG Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]	Meas. Time [s]
0.224	38.46	62.66	24.20	21.42	52.66	31.24	21.01	N	9.000	1.000
0.632	49.63	56.00	6.37	35.05	46.00	10.95	20.65	N	9.000	1.000
1.241	37.46	56.00	18.54	19.85	46.00	26.15	20.00	N	9.000	1.000
3.512	30.88	56.00	25.12	19.38	46.00	26.62	19.46	N	9.000	1.000
8.401	33.60	60.00	26.40	20.22	50.00	29.78	19.42	N	9.000	1.000
17.322	41.72	60.00	18.28	26.85	50.00	23.15	19.61	N	9.000	1.000

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 kHz to 30 MHz

4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	4.17 dB	1.96
Radiated Emission 200MHz – 1GHz	4.84 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96
Radiated Emission 18GHz – 26.5GHz	5.90 dB	1.96
Radiated Emission 26.5GHz – 40GHz	5.92 dB	1.96
Conducted Emission	2.57 dB	2

5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI3	100948	2025-05-07	2026-05-06
Signal Analyzer	R&S	FSV40	101186	2025-05-06	2026-05-05
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2024-07-18	2027-07-17
Amplifier	R&S	SCU18F	101022	2025-05-06	2026-05-05
Horn Antenna	ETS-Lindgren	3160-09	00102643	2024-09-24	2027-09-23
Horn Antenna	STEATITE	QSH-SL-26-40-K-15	16779	2023-01-17	2026-01-16
Amplifier	MicroWave	KLNA-18040050	220826001	2025-05-06	2026-05-05
Software	R&S	ELEKTRA	5.02.1	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2024-12-02	2026-12-01
EMI Test Receiver	R&S	ESR	101667	2025-05-06	2026-05-05
Software	R&S	EMC32	10.35.10	/	/

6 The EUT Appearance

Refer to *EUT Appearance*.

7 Test Setup Photos

Refer to *EMC Test Setup*.

***** END OF REPORT *****