

RF TEST REPORT

Applicant Shanghai Sunmi Technology
Co.,Ltd.

FCC ID 2AH25P3MIXH

Product Smart POS Terminal


Brand SUNMI

Model T6721

Report No. EFTA25090010-IE-02-R6

Issue Date December 26, 2025

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2025)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report.....	4
1.2. Test Facility	4
1.3. Testing Location.....	4
2. General Description of Equipment Under Test.....	5
2.1. Applicant and Manufacturer Information	5
2.2. General Information	5
3. Applied Standards	7
4. Test Configuration	8
5. Test Case	9
5.1. Duty Cycle.....	9
5.2. Maximum output power	10
5.3. 99% Bandwidth and 6dB Bandwidth	11
5.4. Band Edge	12
5.5. Power Spectral Density	13
5.6. Spurious RF Conducted Emissions.....	15
5.7. Unwanted Emission	17
5.8. Conducted Emission	24
6. Test Results	25
6.1. Duty Cycle.....	25
6.2. Maximum output power	28
6.3. 99% Bandwidth and 6dB Bandwidth	29
6.4. Band Edge	40
6.5. Power Spectral Density	46
6.6. Spurious RF Conducted Emissions.....	52
6.7. Unwanted Emission	61
6.8. Conducted Emission	62
7. Main Test Instruments.....	63
ANNEX A: The EUT Appearance.....	64
ANNEX B: Test Setup Photos	65

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	Duty Cycle	C63.10 11.6	PASS
2	Maximum output power	15.247(b)(3)	PASS
3	99% Bandwidth and 6dB Bandwidth	15.247(a)(2) C63.10 6.9	PASS
4	Power spectral density	15.247(e)	PASS
5	Band Edge	15.247(d)	PASS
6	Spurious RF Conducted Emissions	15.247(d)	PASS
7	Unwanted Emissions	15.247(d), 15.205, 15.209	PASS
8	Conducted Emissions	15.207	PASS
Date of Testing: September 6, 2025 ~ October 24, 2025			
Date of Sample Received: September 1, 2025			
Note: All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment Under Test

2.1. Applicant and Manufacturer Information

Applicant	Shanghai Sunmi Technology Co.,Ltd.
Applicant address	Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Manufacturer	Shanghai Sunmi Technology Co.,Ltd.
Manufacturer address	Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China

2.2. General Information

EUT Description		
Model	T6721	
SN	Conducted	PF25257G20015
Lab internal SN	Radiated	PF21256J20011
Hardware Version	Bgf6e	
Software Version	P3_MIX_STD_user_HyperWi-Fi_v054_1.0.5_174_20250703	
Power Supply	Battery / AC adapter	
Antenna Type	Internal Antenna	
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)	
Antenna Gain	-0.10 dBi	
Operating Frequency Range(s)	Hyper Wi-Fi: 1M 903.5 ~ 926.5 MHz 2M 905 ~ 925 MHz 4M 906 ~ 922 MHz	
Channel Space	1MHz; 2MHz; 4MHz	
Modulation Type	OFDM with BPSK, QPSK, 16QAM, 64QAM	
Max. Output Power	23.18 dBm	
EUT Accessory		
Adapter 1	Manufacturer: SHENZHEN TIANYIN ELECTRONICS CO., LTD. Model: TPA-23A050200UU01 Input: 100-240V~50/60Hz 0.3A Output: 5.0V---2.0A	
Adapter 2	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: UC13US Input: 100-240V~50/60Hz 0.35A Output: 5.0V---2.0A 10.0W	

Battery 1	Manufacturer: Guangdong Pow-Tech New Power Co., Ltd. Model: LKPA DC 7.2V, 2500mAh
Battery 2	Manufacturer: POWER GLORY BATTERY TECH(HK) CO LTD Model: CR2032 DC 3V, 220mAh
Battery 3	Manufacturer: JHIH HONG TECHNOLOGY CO LTD Model: CR2032 DC 3V, 220mAh
USB Cable	Manufacturer: Saibao (Jiangxi) Industry Co., LTD Model: SSM-A001A
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant. 2. Two-thirds of the batteries are backup batteries for financial tamper-proof authentication. When the main battery (Battery 1) is powered off, Batteries 2 and 3 are used to detect and trigger an alarm.	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2025) Radio Frequency Devices

ANSI C63.10-2020

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Hyper Wi-Fi 1M	MCS10
Hyper Wi-Fi 2M	MCS0
Hyper Wi-Fi 4M	MCS0

5. Test Case

5.1. Duty Cycle

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss.
The zero-span measurement

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set RBW $\geq$ OBW
- 3) Set detector = peak or average

Test Setup



Limits

For Reporting purposes only

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

5.2. Maximum output power


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1\text{W (30dBm)}$
----------------------	--------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

5.3. 99% Bandwidth and 6dB Bandwidth

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Method of Measurement

The EUT was connected to the spectrum analyzer through a known loss cable.

For Emission Bandwidth and 99% Bandwidth, The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

For DTS Bandwidth, The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the OBW but not less than 100kHz, the video bandwidth (VBW) shall not be smaller than three times the RBW value. The Trace mode is max hold.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

5.4. Band Edge


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB

5.5. Power Spectral Density

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation.

Method AVGPSD-2 was used for this test.

- Measure the duty cycle (D) of the transmitter output signal as described in 11.6
- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- Set VBW $\geq [3 \times \text{RBW}]$
- Detector = power averaging (rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span}/\text{RBW}]$
- Sweep time = auto couple
- Do not use sweep triggering; allow sweep to "free run"
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level
- Add $[10 \log(1/D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time
- If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Test setup



Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. "

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

5.6. Spurious RF Conducted Emissions

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to AUTO.

The test is in transmitting mode.

Test Setup



Limits

Rule Part 15.247(d) specifies that "In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB."

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
1M	903.5	20.43	-9.57
1M	915.5	21.72	-8.28
1M	926.5	21.77	-8.23
2M	905	18.08	-11.92
2M	915	18.91	-11.09
2M	925	18.42	-11.58
4M	906	16.79	-13.21
4M	914	16.71	-13.29
4M	922	16.05	-13.95

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

5.7. Unwanted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m/10m below 1GHz, 3m above 1GHz between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9kHz, VBW=30kHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The test is in transmitting mode.


Test Setup

9kHz~ 30MHz

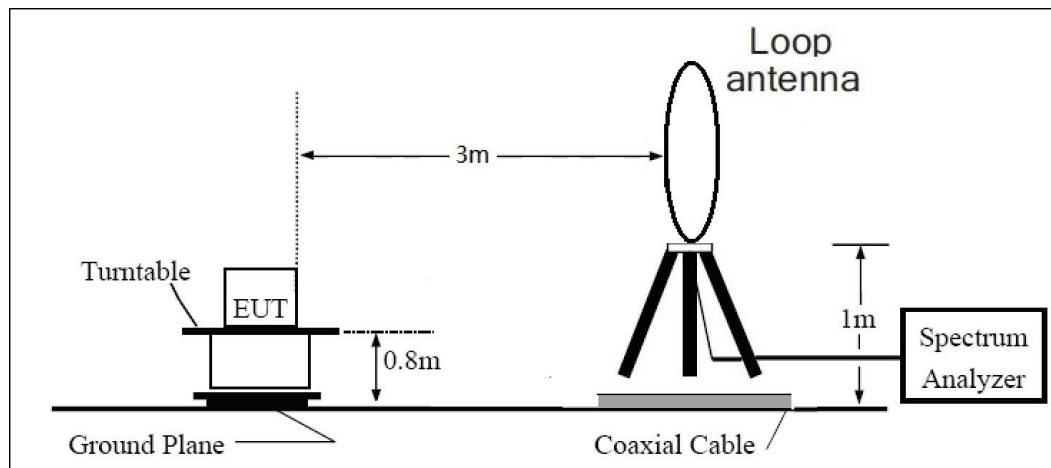


Note: Area side:2.4mX3.6m

Distance 10m

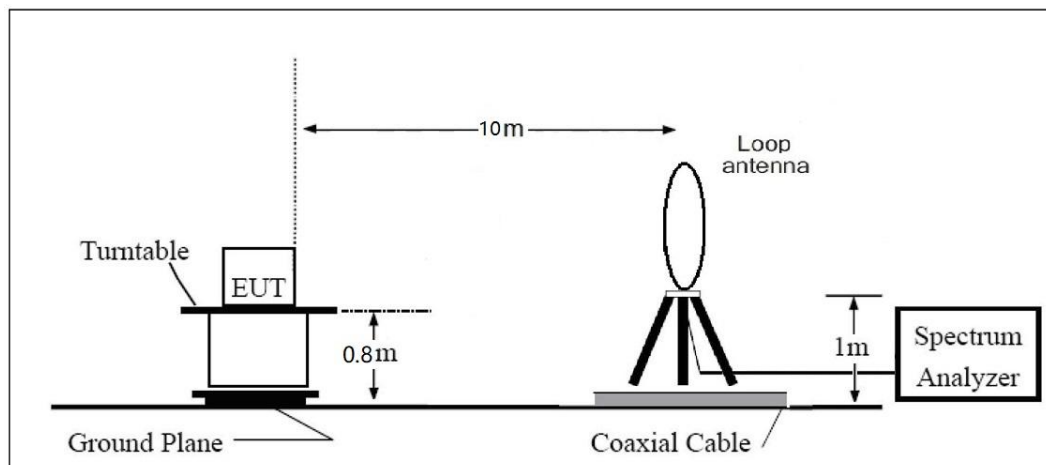


Note: Area side: 21m x 12m

30MHz~ 1GHz

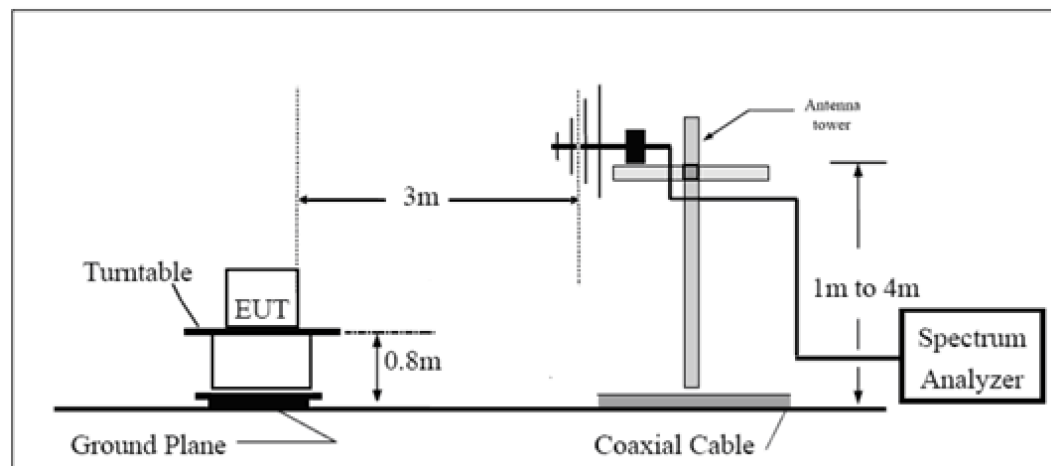


Note: Area side:2.4mX3.6m

Distance 10m

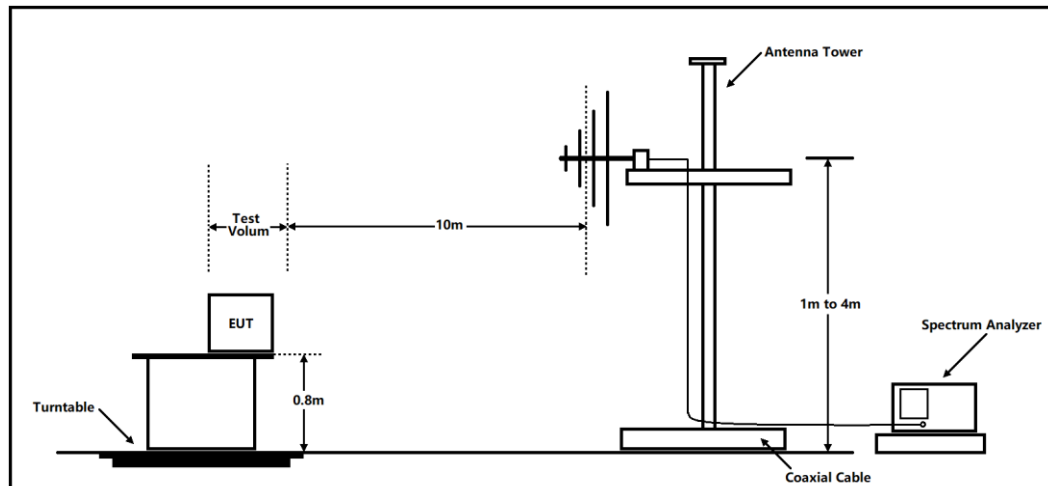

Note: Area side: 21m x 12m

Above 1GHz

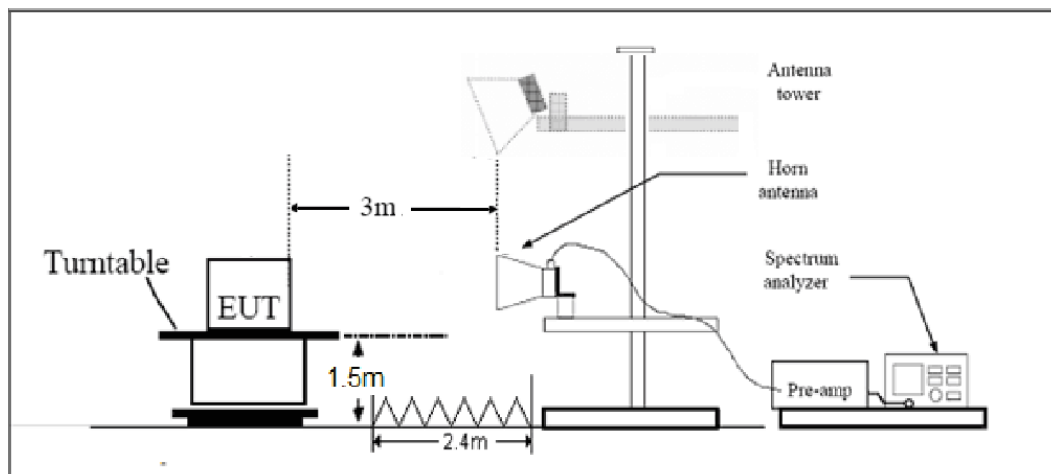

Note: Area side: 2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength (μV/m)	Field strength (dBμV/m) @ 3 m	Field strength (dBμV/m) @ 10 m
0.009–0.490	2400/F(kHz)	/	/
0.490–1.705	24000/F(kHz)	/	/
1.705–30.0	30	/	/
30-88	100	40	30
88-216	150	43.5	33.5
216-960	200	46	36
960 -1000	500	54	44
Above 1000	500	54	--

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBμV/m

Average Limit=54 dBμV/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty for 3m
9kHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB
Frequency	Uncertainty for 10m
30MHz – 200MHz	3.39 dB
200MHz – 1GHz	3.82 dB
1GHz – 18GHz	6.51 dB
18GHz – 40GHz	6.31 dB

5.8. Conducted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

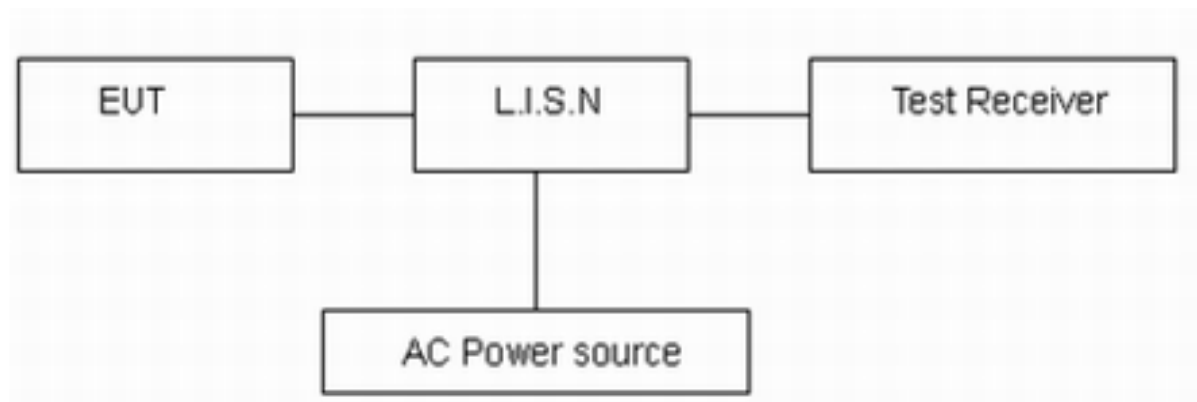

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

decreases with the logarithm of the frequency.

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

6. Test Results


6.1. Duty Cycle

Test Mode	T _{on} (msec)	Period (msec)	Duty cycle (%)	Duty cycle correction Factor(dB)
1M	11.18	11.50	0.972	0.12
2M	10.67	10.99	0.971	0.13
4M	10.58	10.90	0.971	0.13
Note: when Duty cycle>0.98, Duty cycle correction Factor not required.				


Duty Cycle Hyper Wi-Fi (1M) 903.5MHz

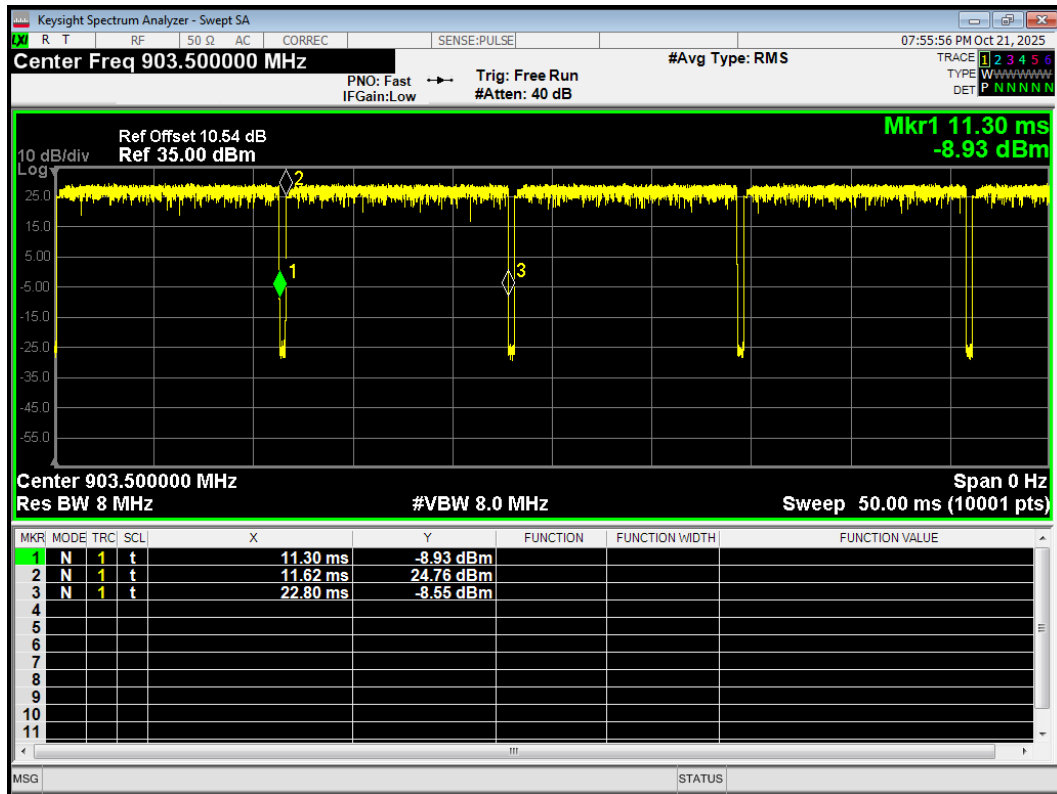

Duty Cycle Hyper Wi-Fi (2M) 905MHz

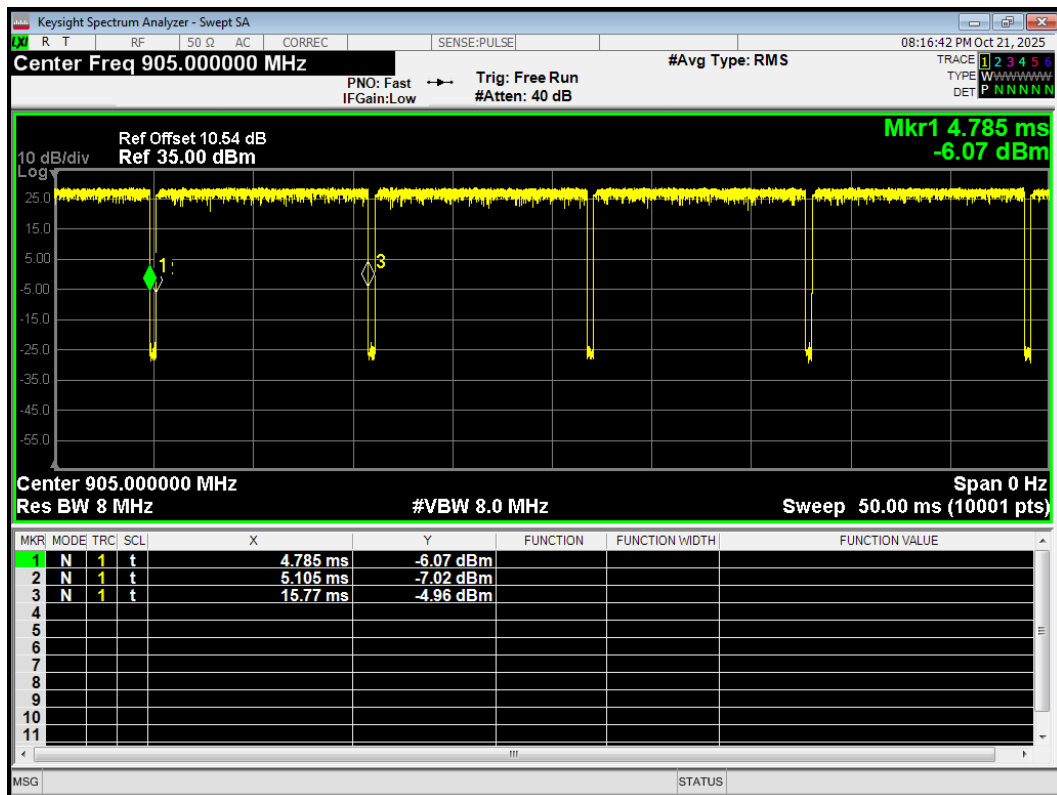

Duty Cycle Hyper Wi-Fi (4M) 906MHz

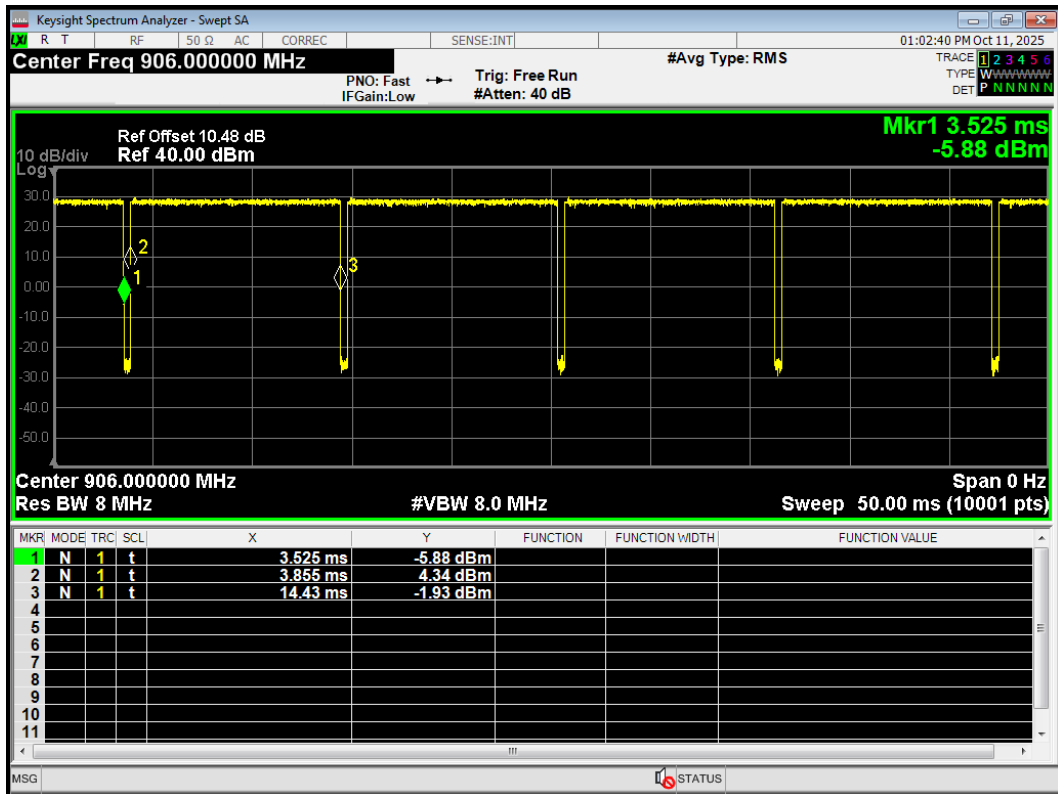

6.2. Maximum output power

Carrier frequency (MHz)	Power Index
903.5	22
915.5	22
926.5	22
905	22
915	22
925	22
906	22
914	22
922	22


Test Mode	Carrier frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
1M	903.5	22.66	22.78	30	PASS
	915.5	22.27	22.39	30	PASS
	926.5	22.03	22.15	30	PASS
2M	905	22.31	22.44	30	PASS
	915	22.49	22.62	30	PASS
	925	22.84	22.97	30	PASS
4M	906	22.38	22.51	30	PASS
	914	23.05	23.18	30	PASS
	922	22.72	22.85	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

6.3. 99% Bandwidth and 6dB Bandwidth


Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
1M	903.5	0.873	0.859	500	PASS
	915.5	0.894	0.864	500	PASS
	926.5	0.880	0.834	500	PASS
2M	905	1.810	1.833	500	PASS
	915	1.818	1.804	500	PASS
	925	1.806	1.799	500	PASS
4M	906	3.641	3.569	500	PASS
	914	3.687	3.591	500	PASS
	922	3.677	3.583	500	PASS

99%bandwidth


OBW Hyper Wi-Fi (1M) 903.5MHz

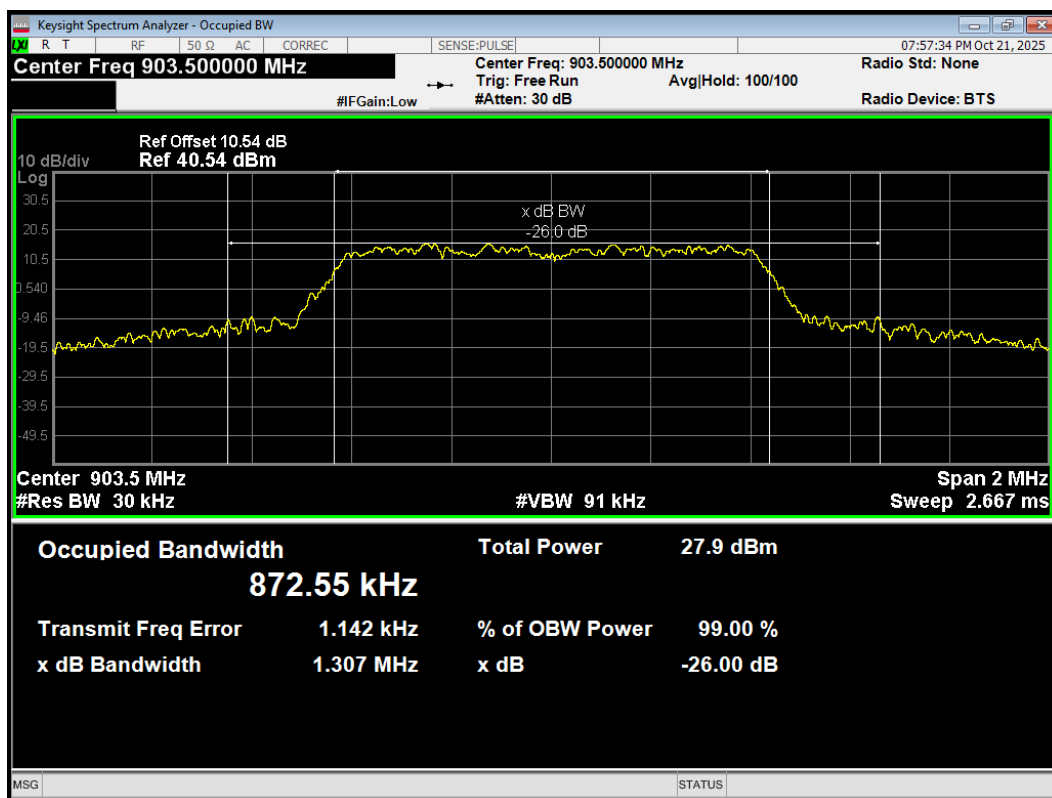


OBW Hyper Wi-Fi (1M) 915.5MHz

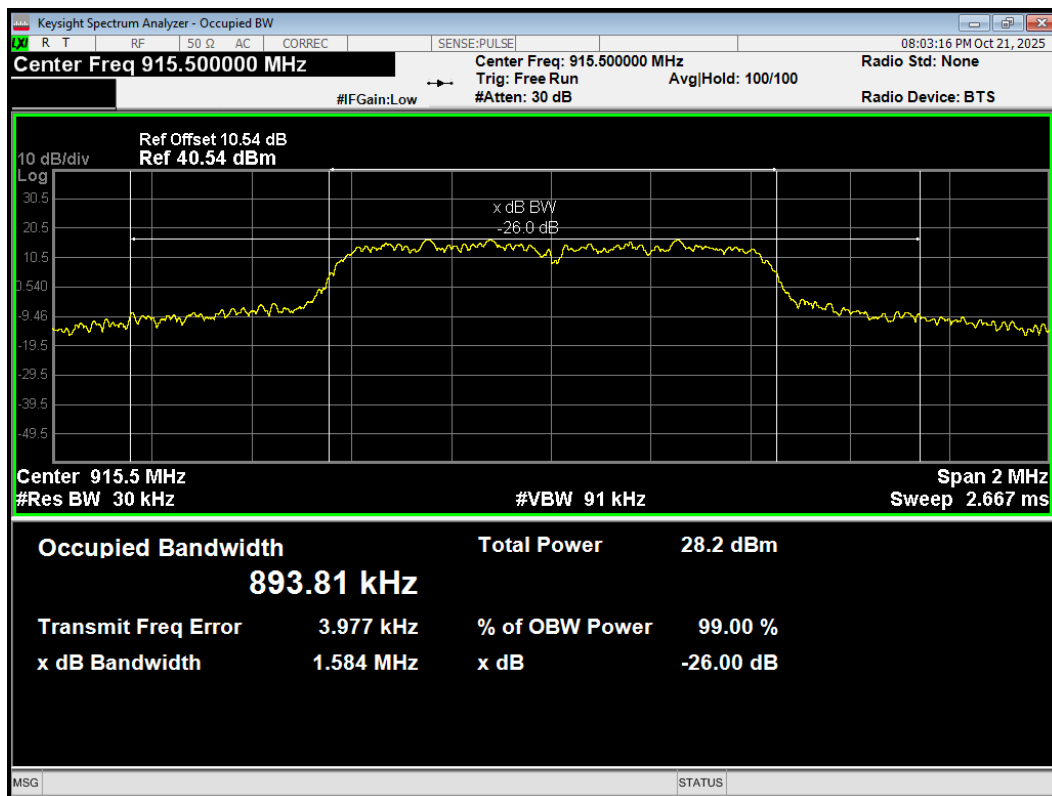


OBW Hyper Wi-Fi (1M) 926.5MHz

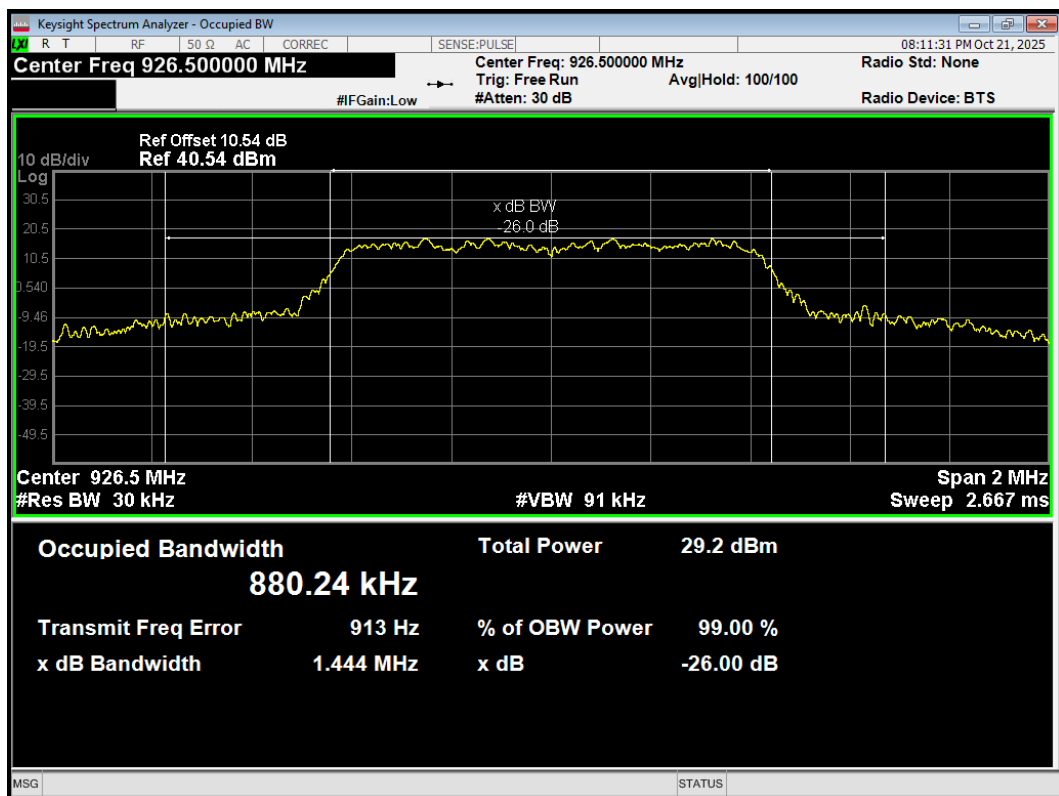


OBW Hyper Wi-Fi (2M) 905MHz

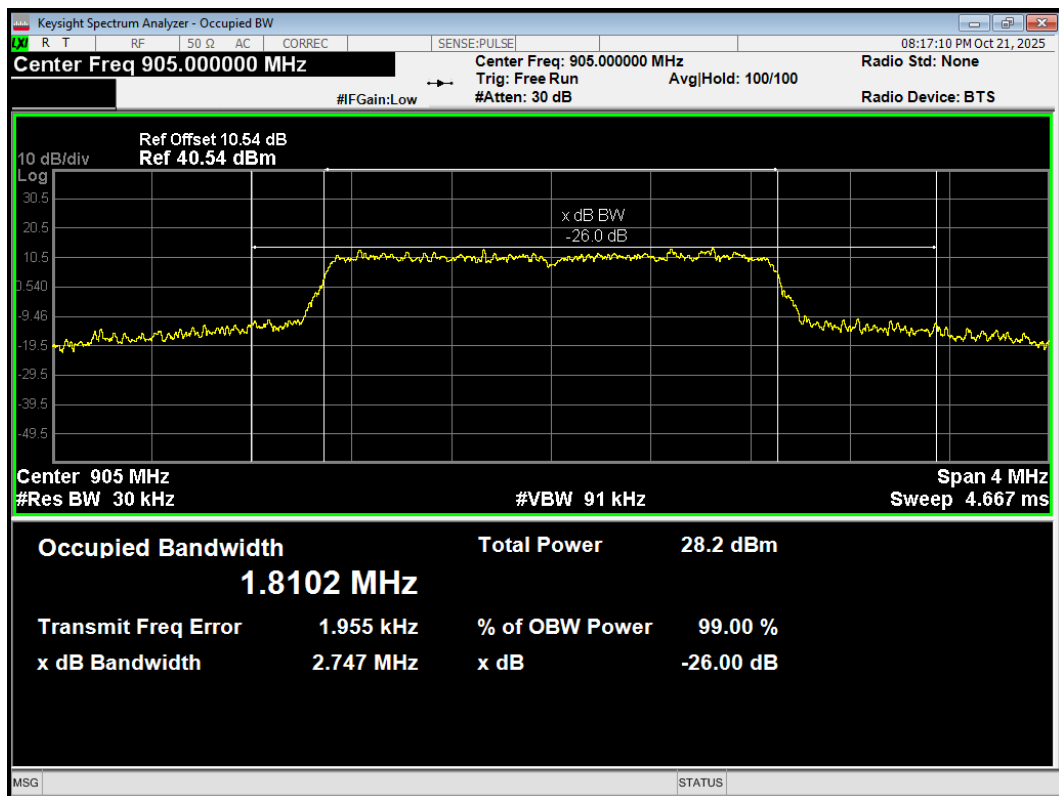


OBW Hyper Wi-Fi (2M) 915MHz

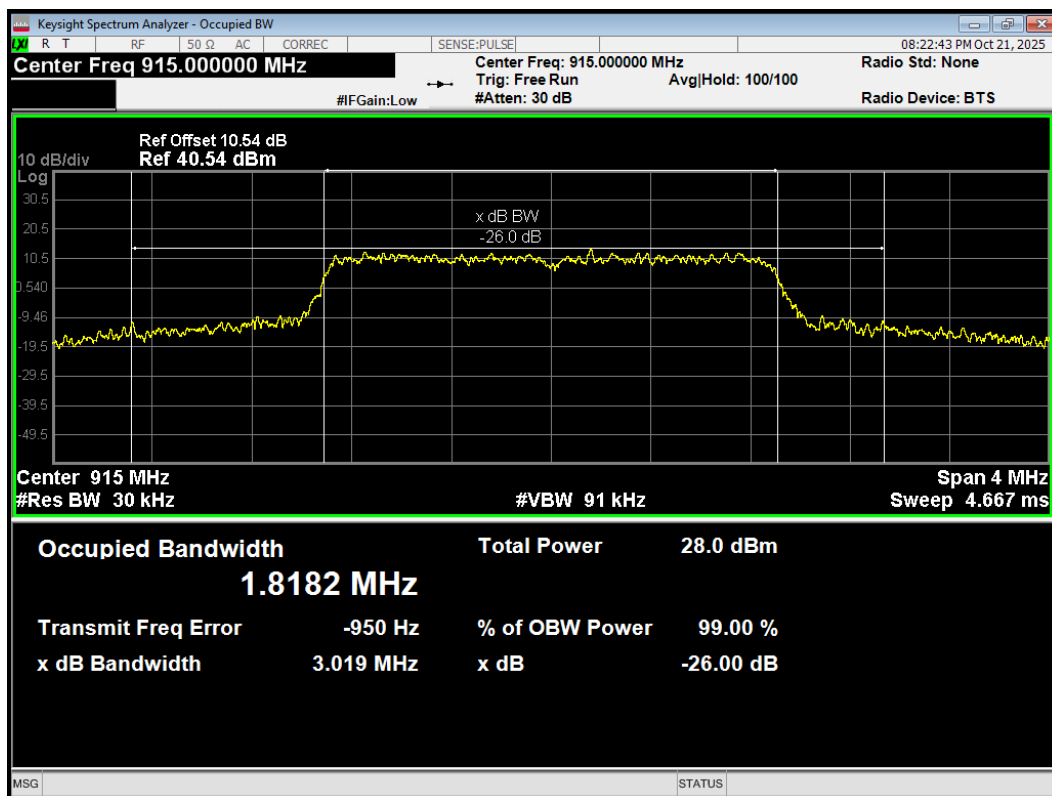


OBW Hyper Wi-Fi (2M) 925MHz

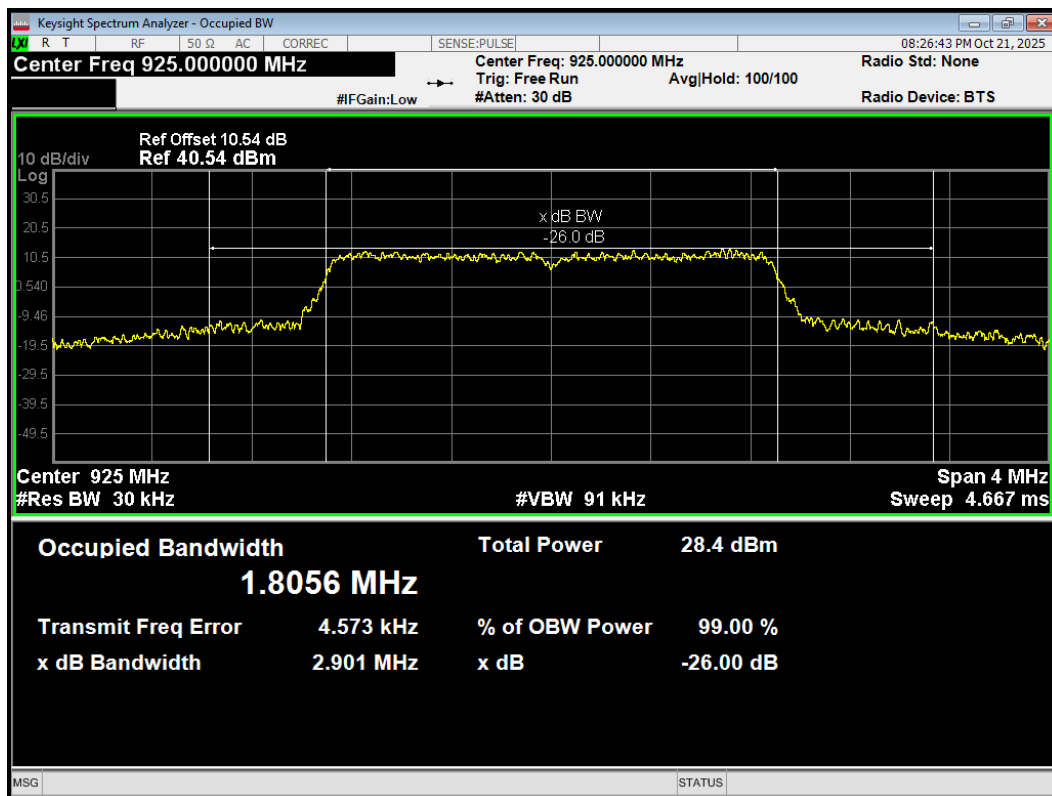


OBW Hyper Wi-Fi (4M) 906MHz

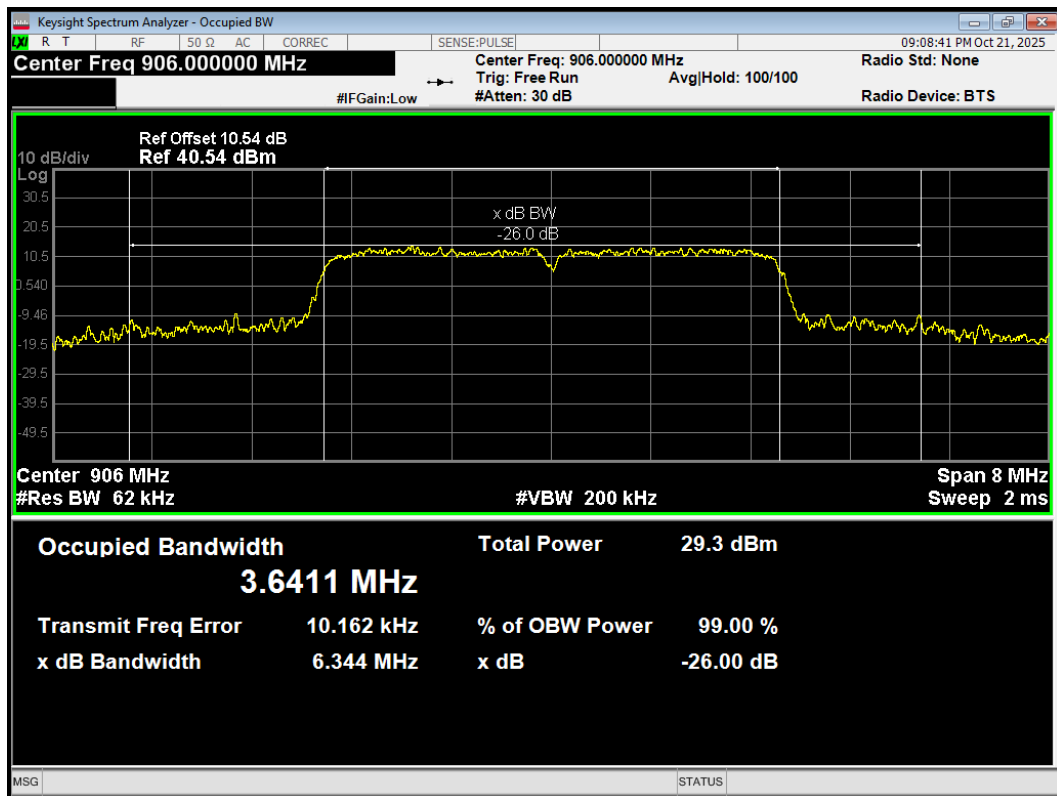

OBW Hyper Wi-Fi (4M) 914MHz

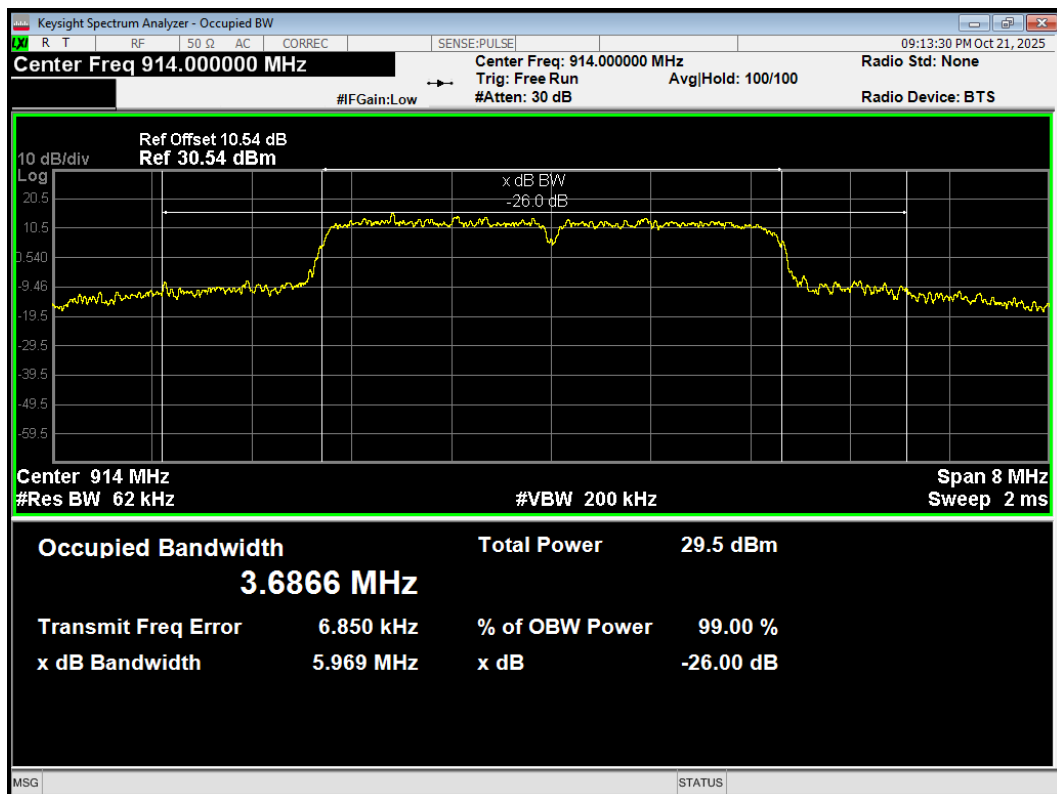


OBW Hyper Wi-Fi (4M) 922MHz

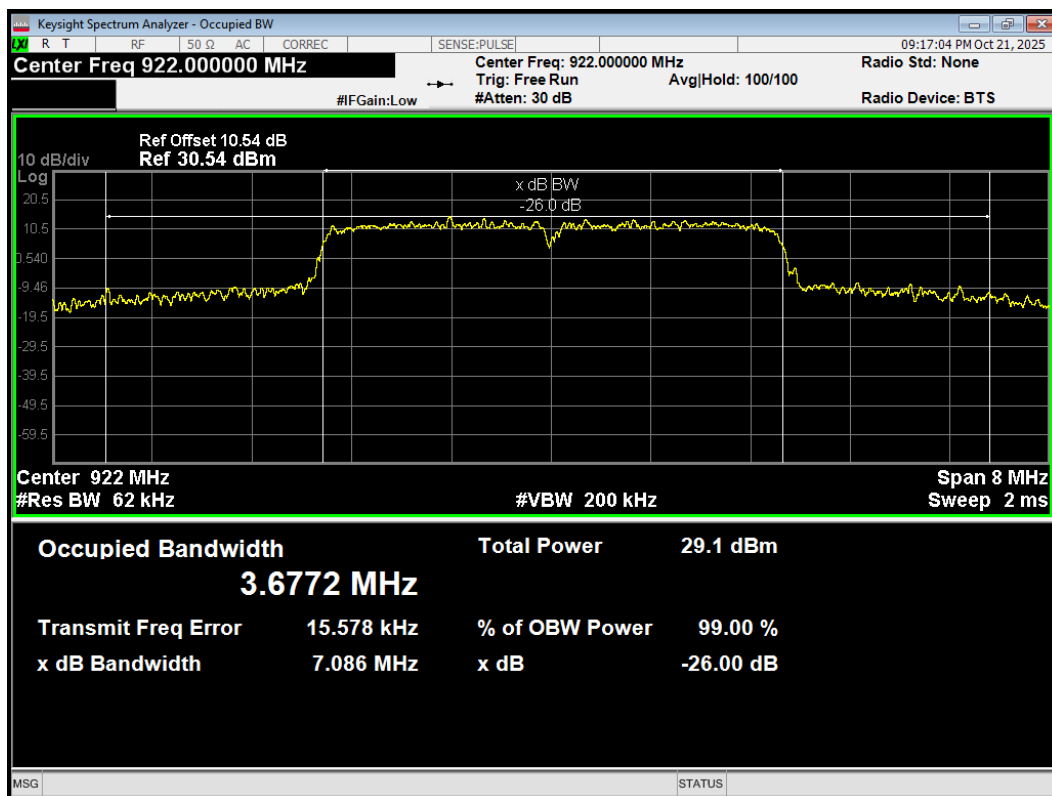


6 dB bandwidth


-6dB Bandwidth Hyper Wi-Fi (1M) 903.5MHz

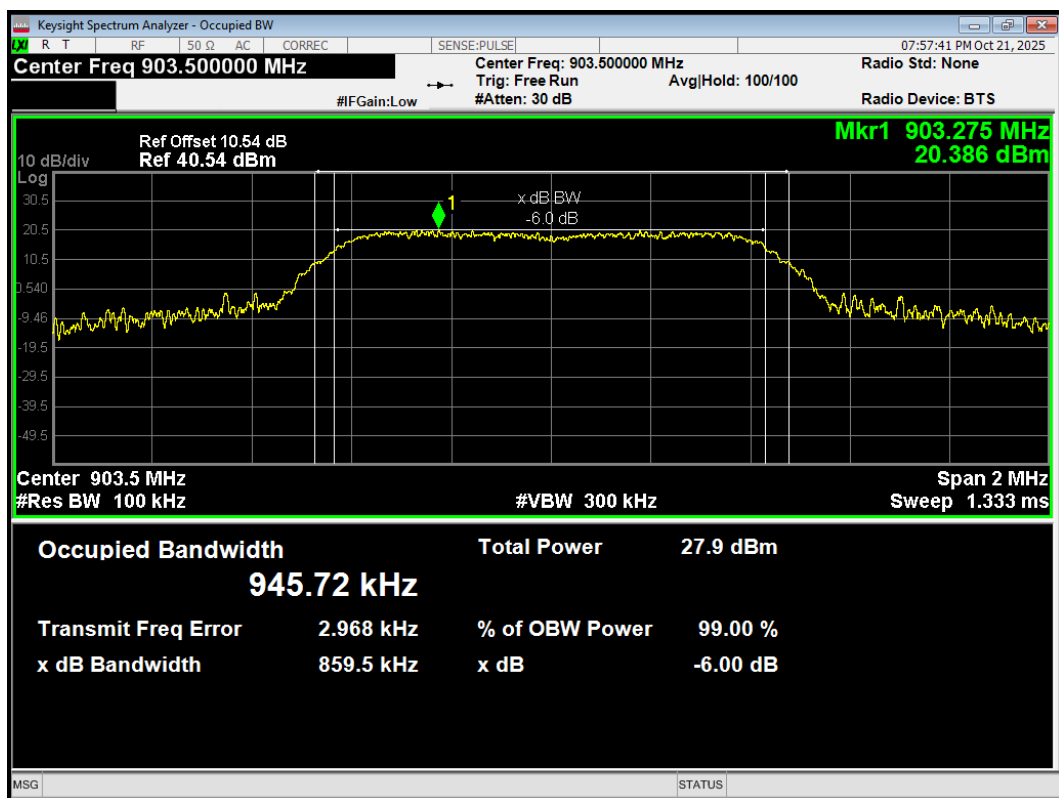


-6dB Bandwidth Hyper Wi-Fi (1M) 915.5MHz

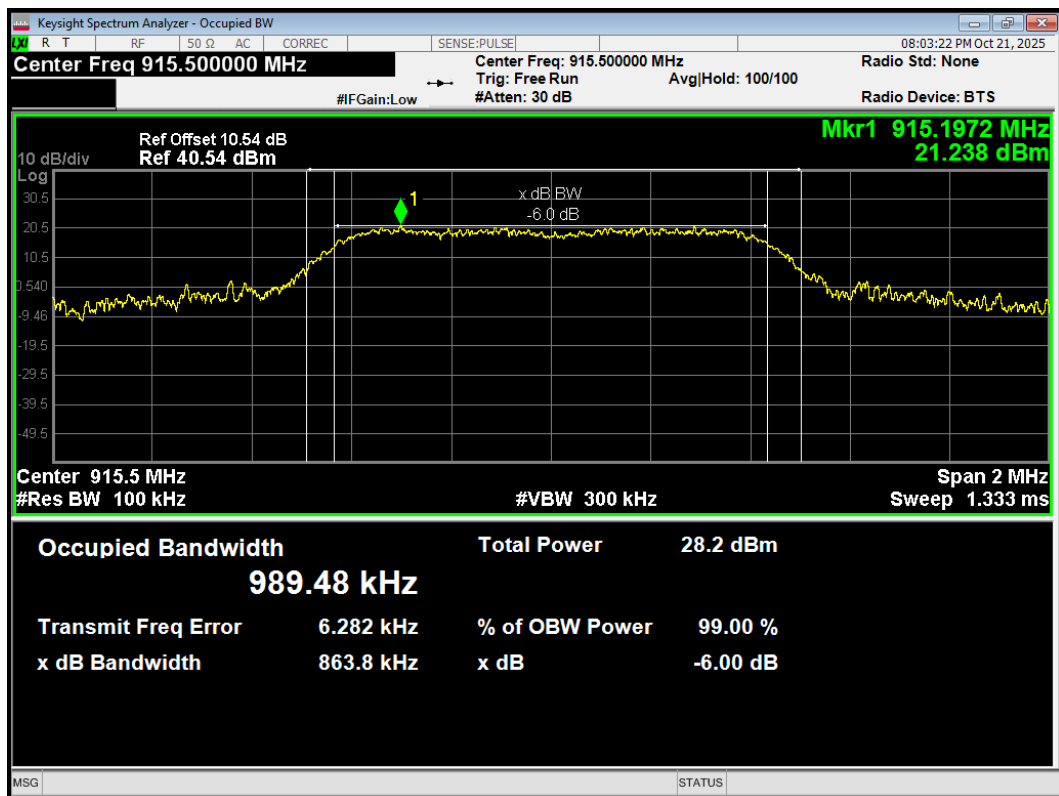


-6dB Bandwidth Hyper Wi-Fi (1M) 926.5MHz

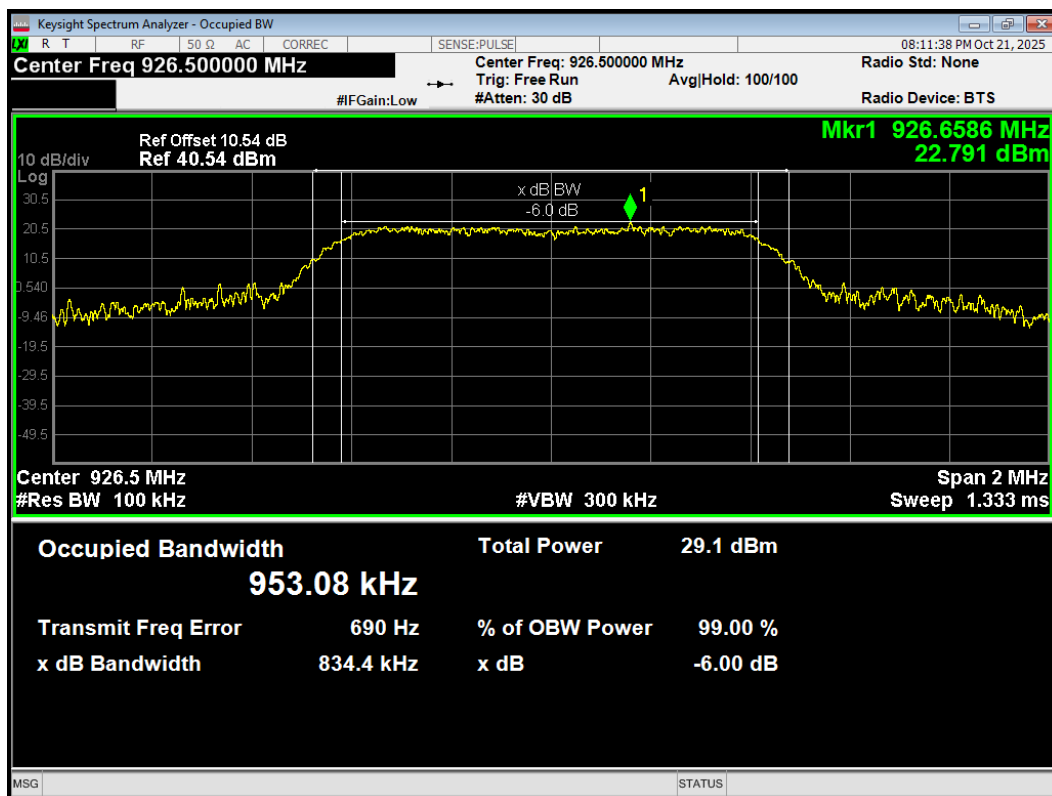


-6dB Bandwidth Hyper Wi-Fi (2M) 905MHz

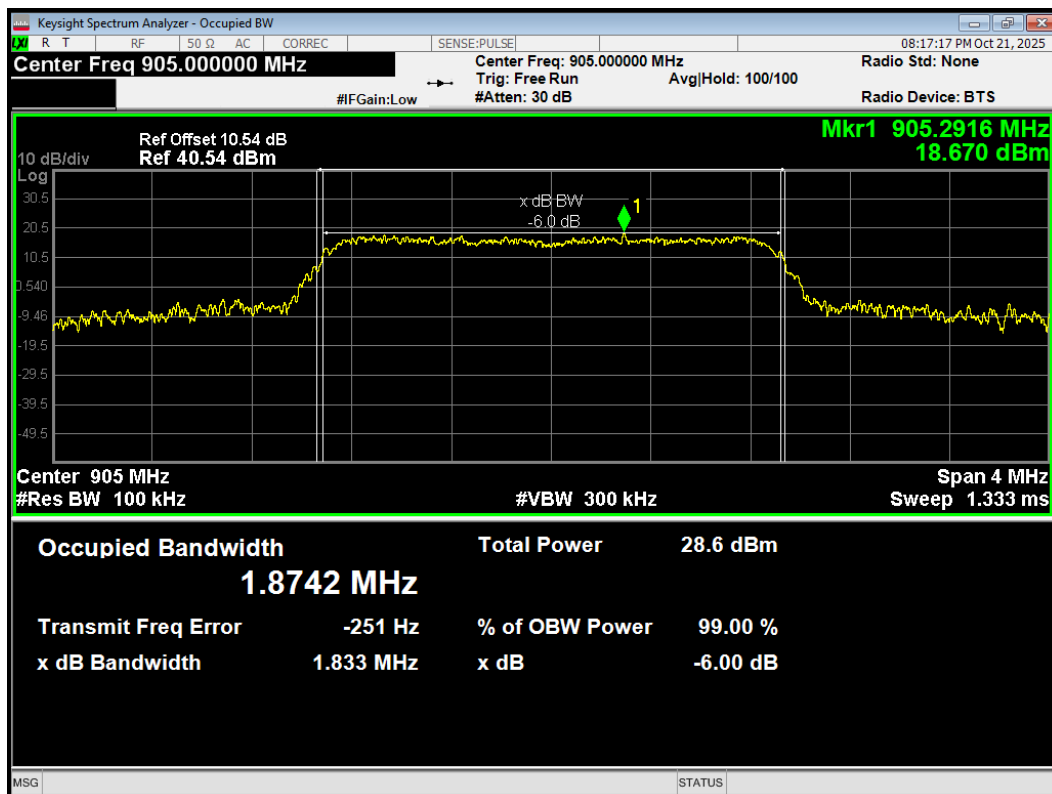


-6dB Bandwidth Hyper Wi-Fi (2M) 915MHz

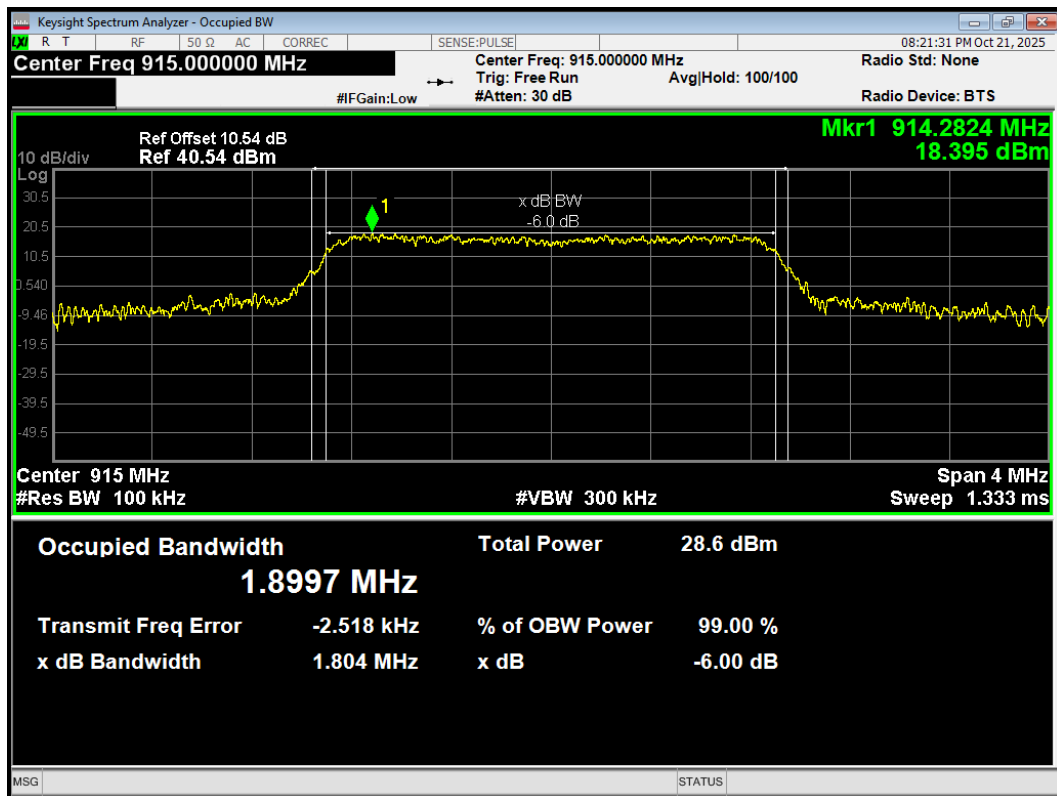


-6dB Bandwidth Hyper Wi-Fi (2M) 925MHz

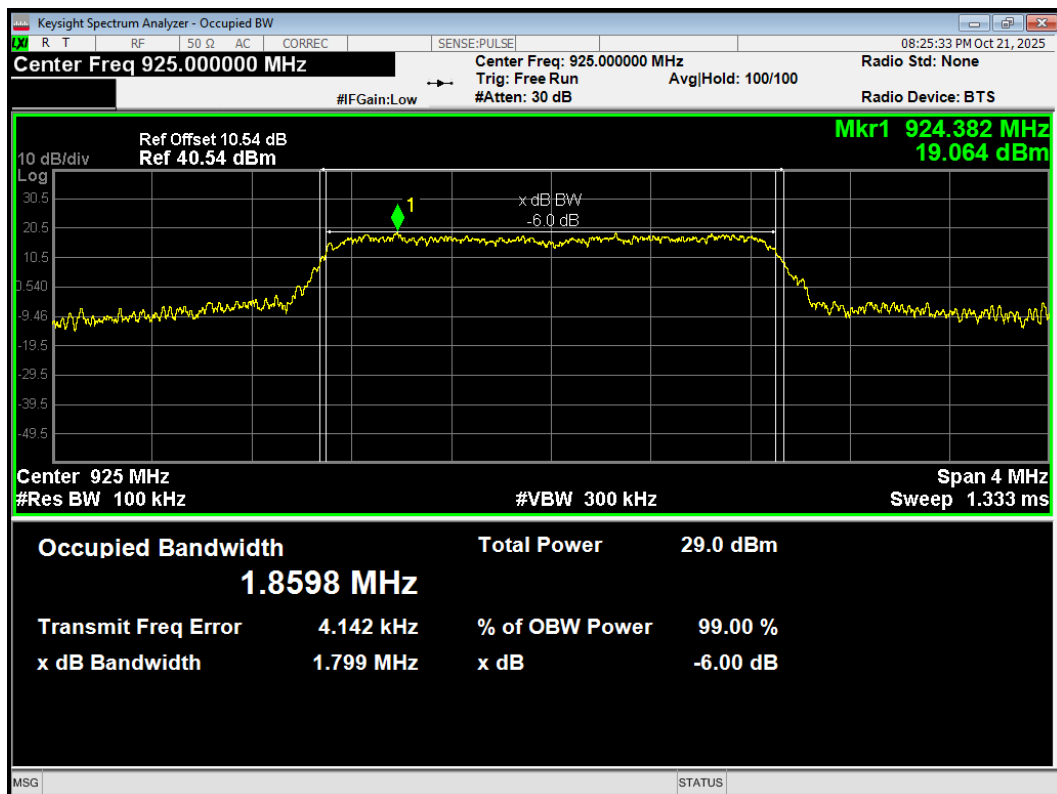


-6dB Bandwidth Hyper Wi-Fi (4M) 906MHz

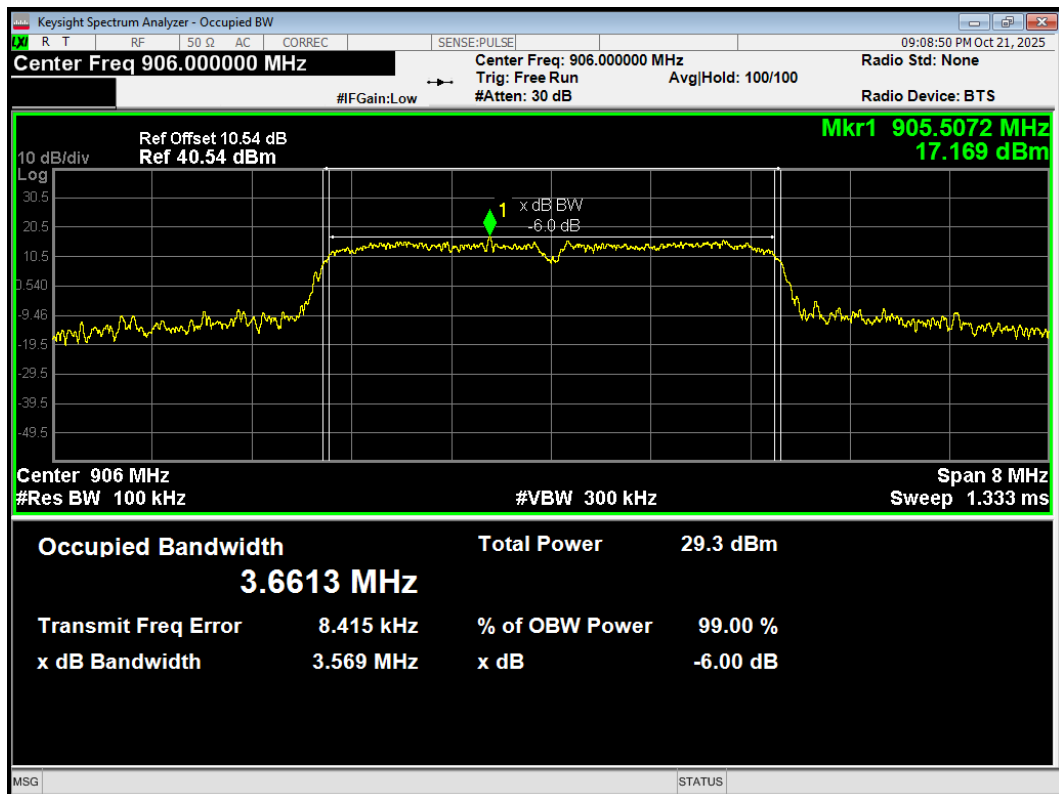

-6dB Bandwidth Hyper Wi-Fi (4M) 914MHz

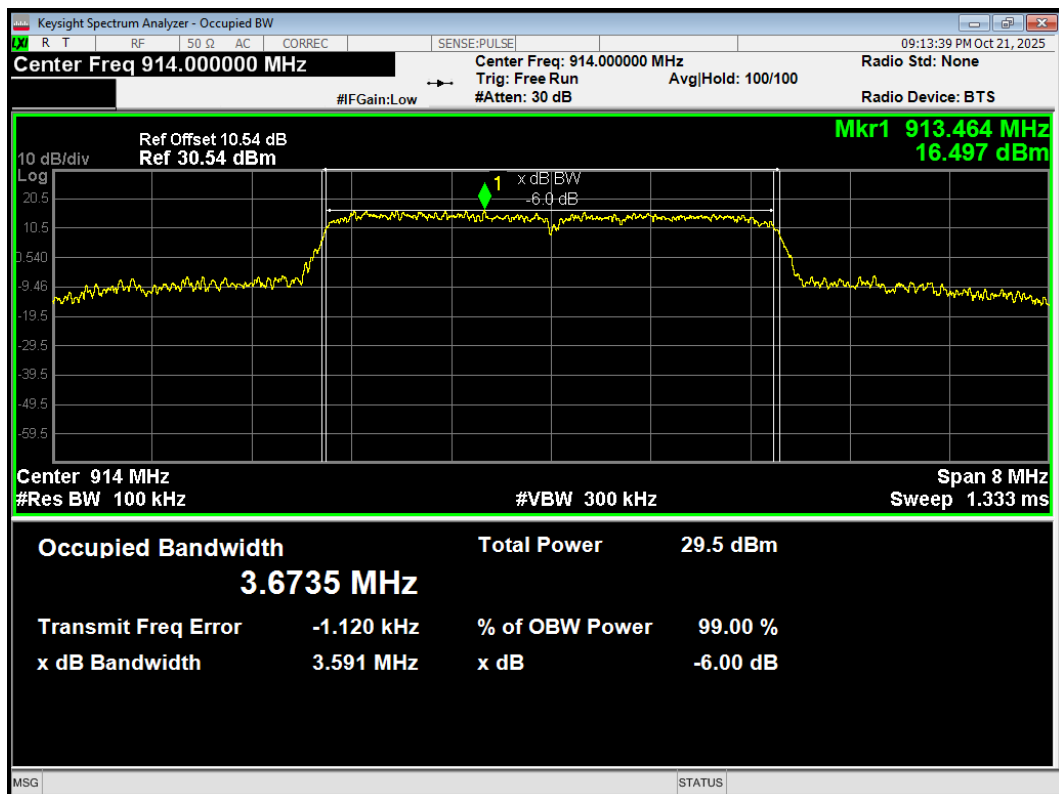


-6dB Bandwidth Hyper Wi-Fi (4M) 922MHz

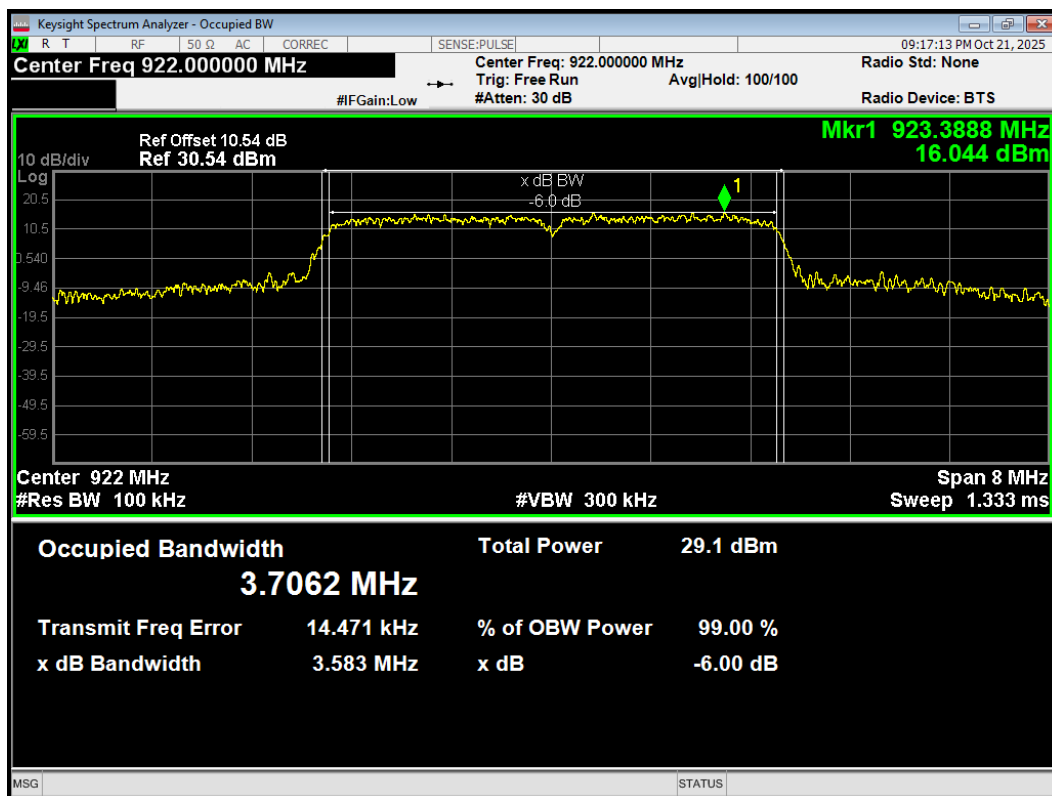


6.4. Band Edge


Band Edge Hyper Wi-Fi (1M) 903.5MHz Ref

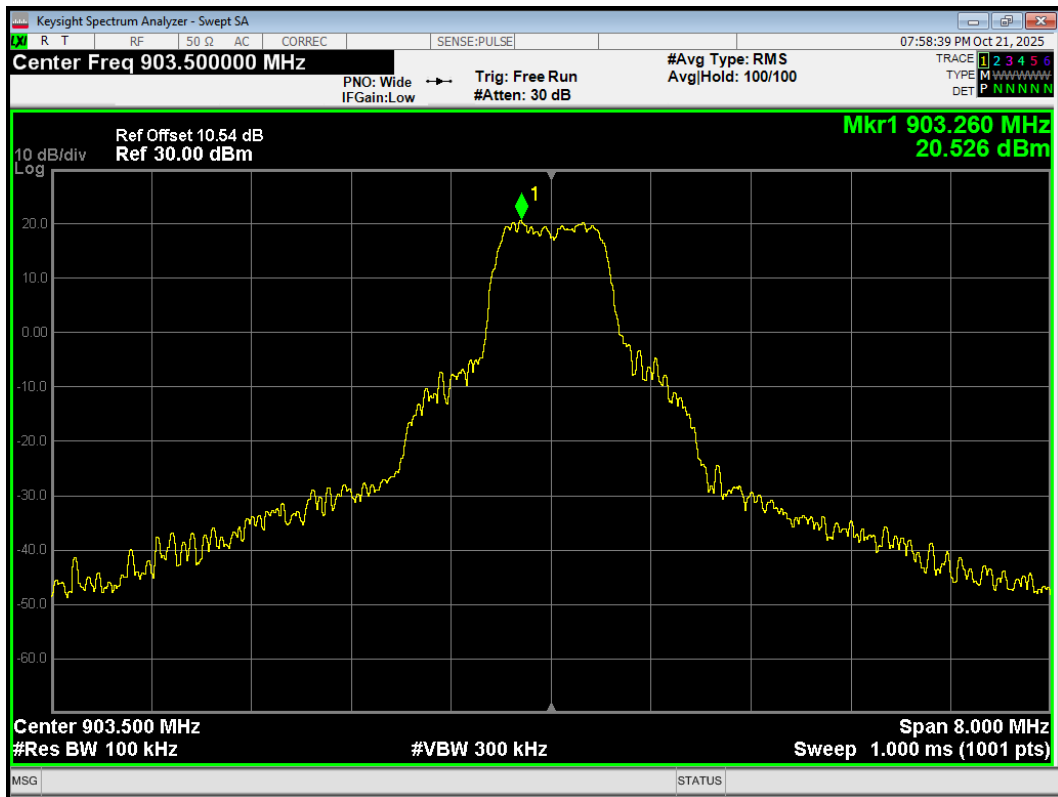


Band Edge Hyper Wi-Fi (1M) 903.5MHz Emission

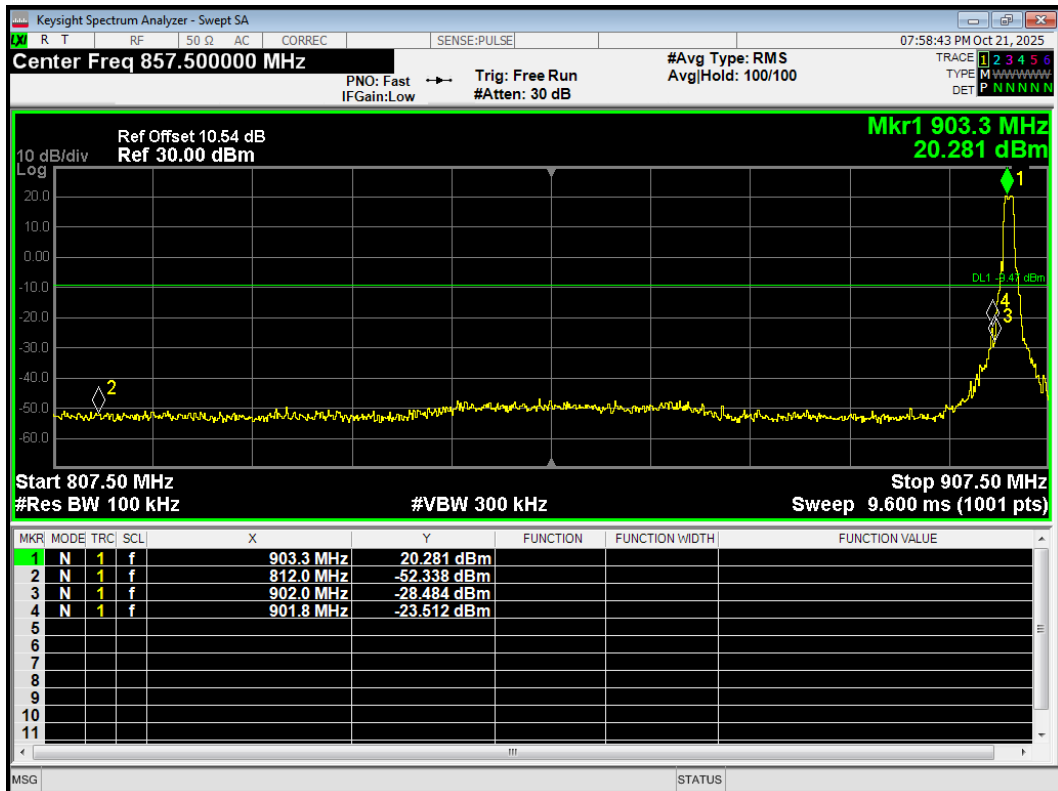


Band Edge Hyper Wi-Fi (1M) 926.5MHz Ref

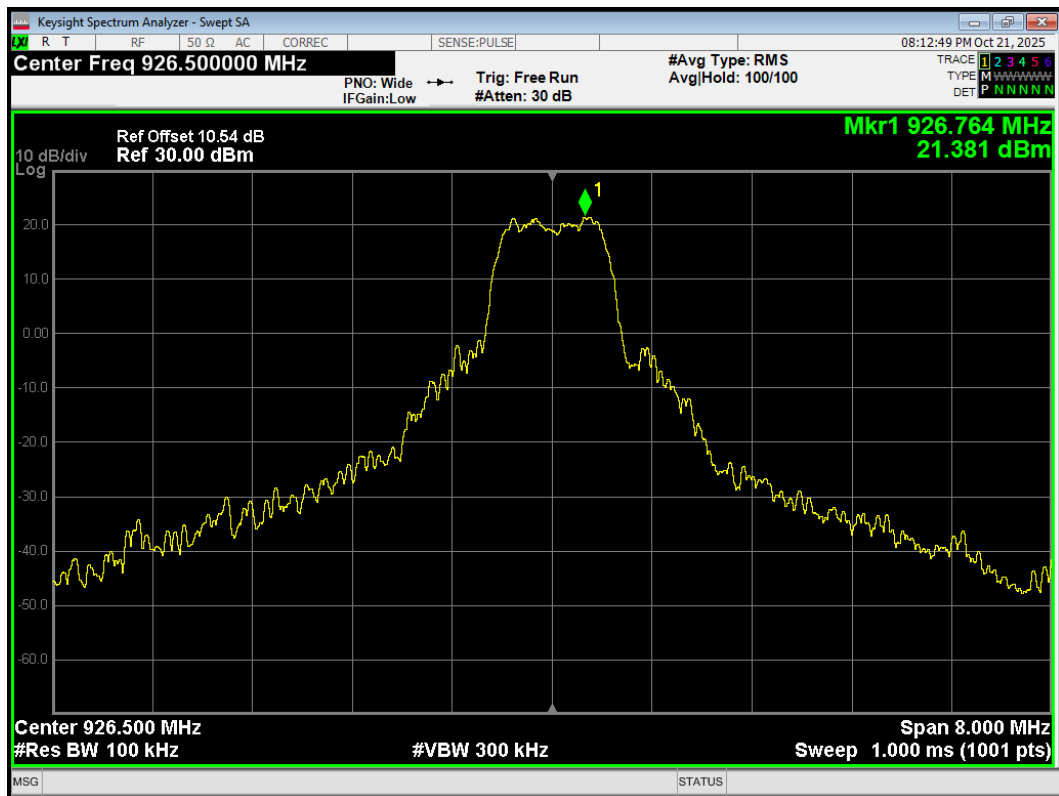


Band Edge Hyper Wi-Fi (1M) 926.5MHz Emission

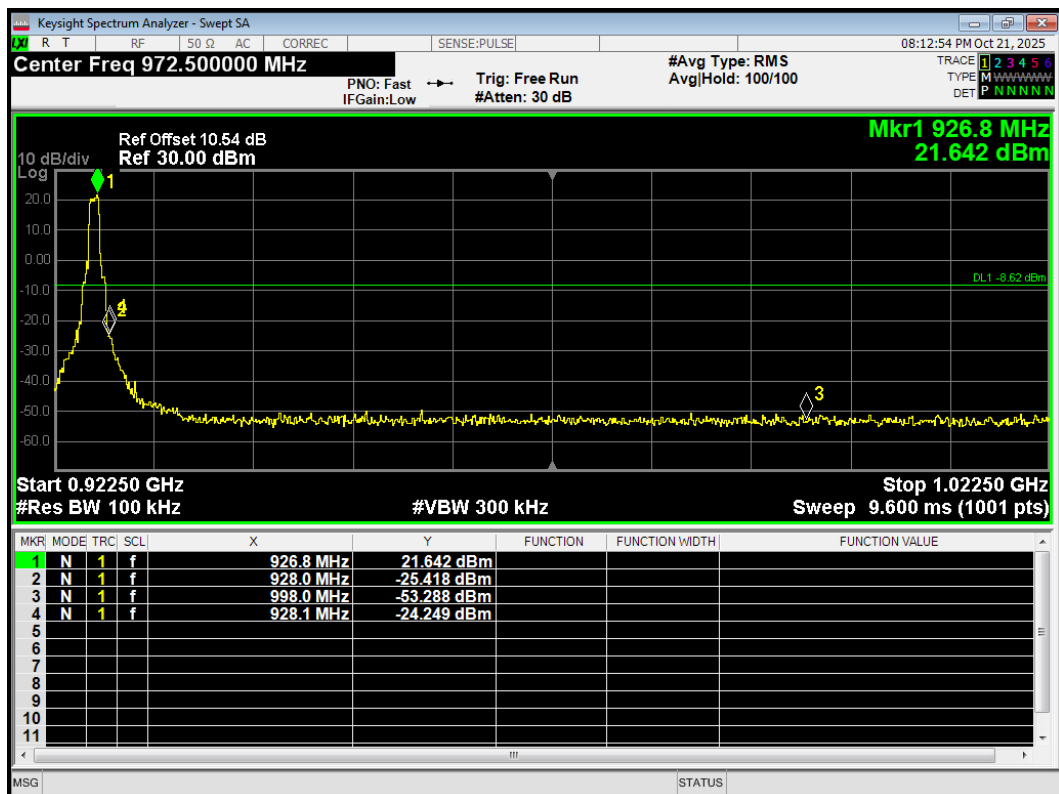


Band Edge Hyper Wi-Fi (2M) 905MHz Ref

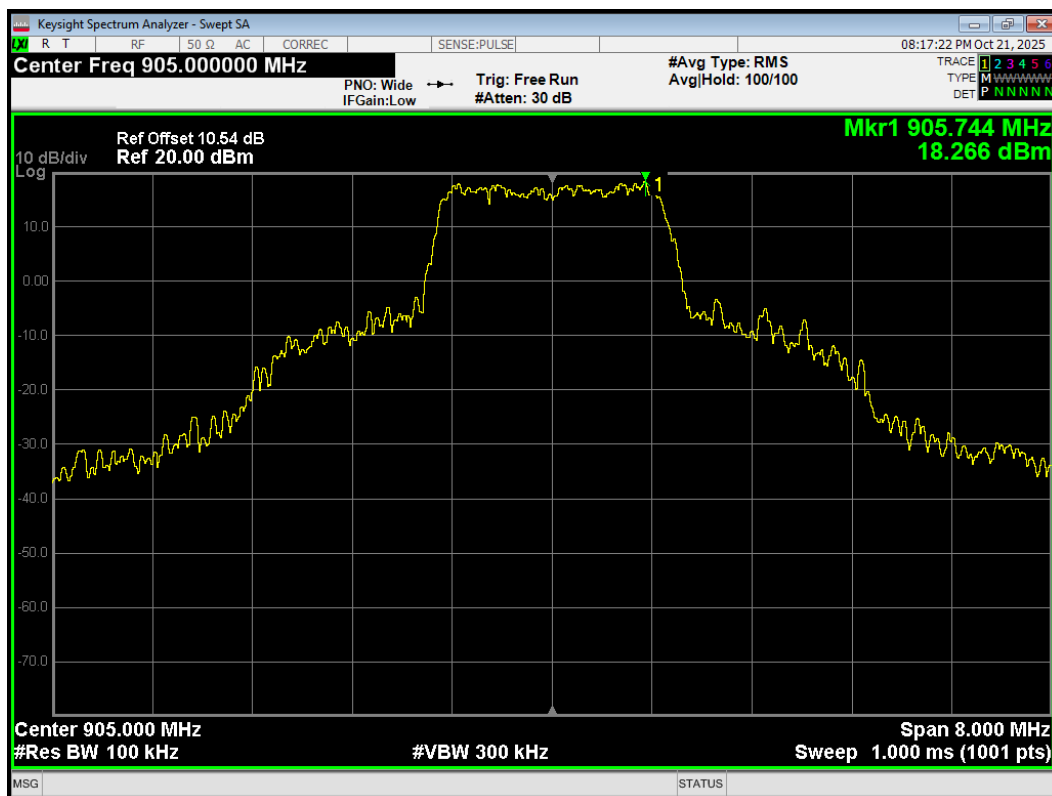


Band Edge Hyper Wi-Fi (2M) 905MHz Emission

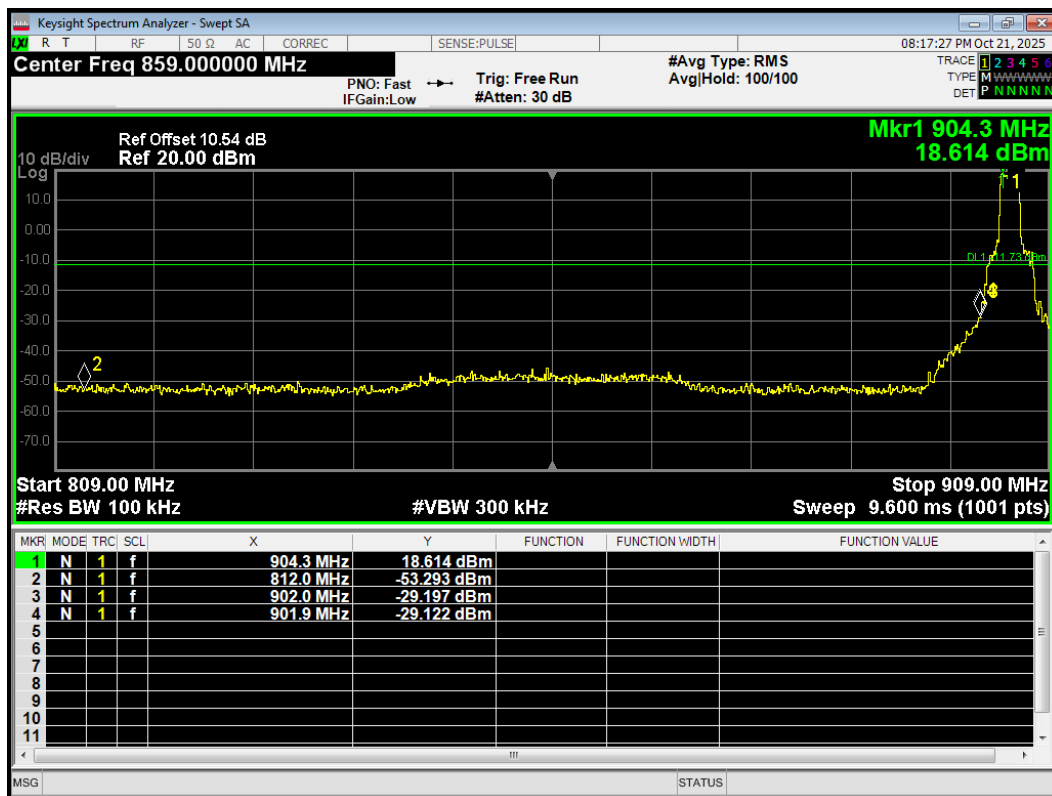


Band Edge Hyper Wi-Fi (2M) 925MHz Ref

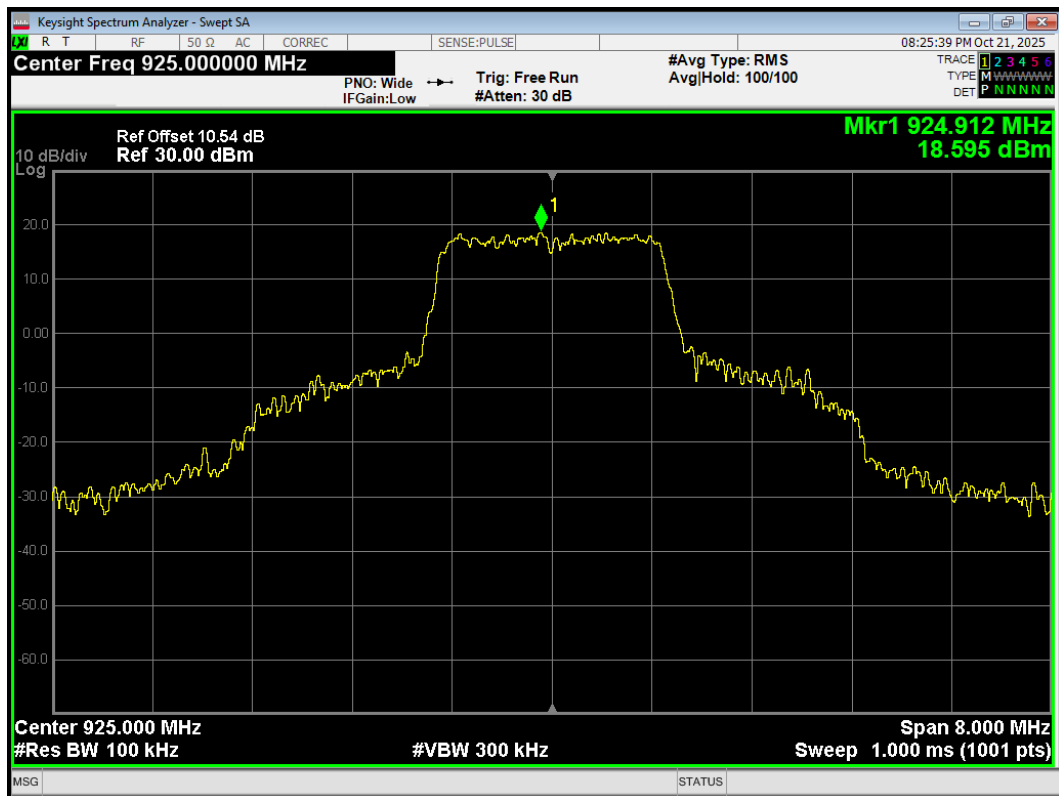


Band Edge Hyper Wi-Fi (2M) 925MHz Emission

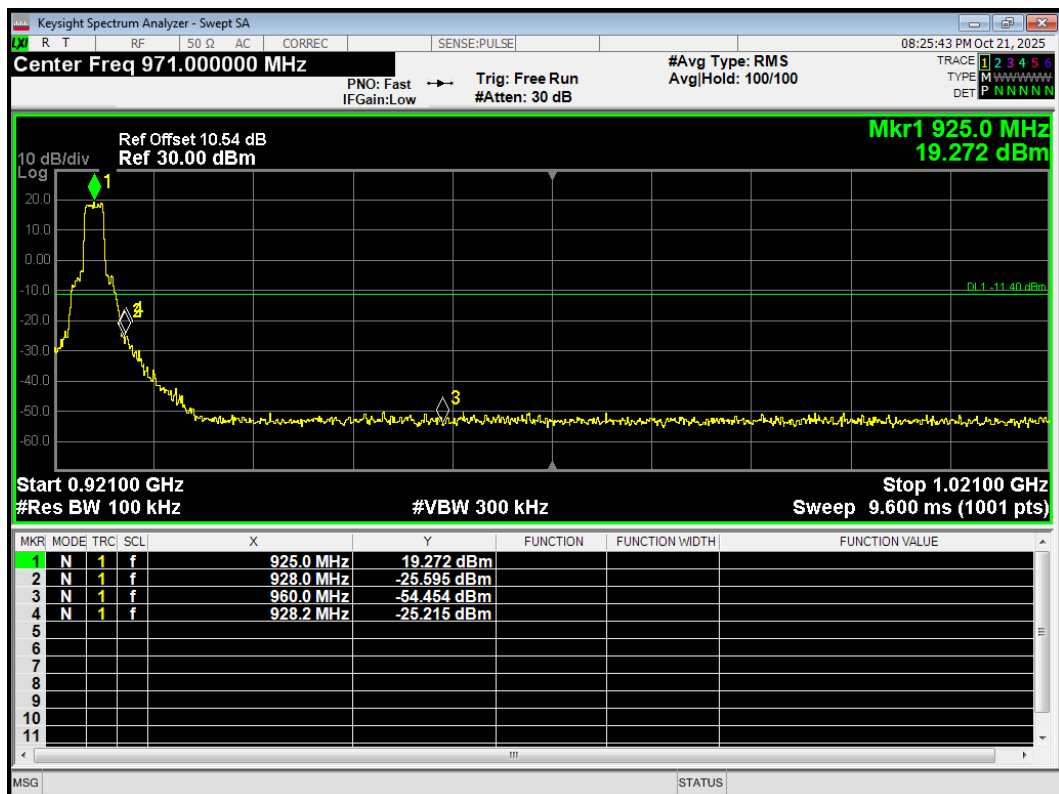


Band Edge Hyper Wi-Fi (4M) 906MHz Ref

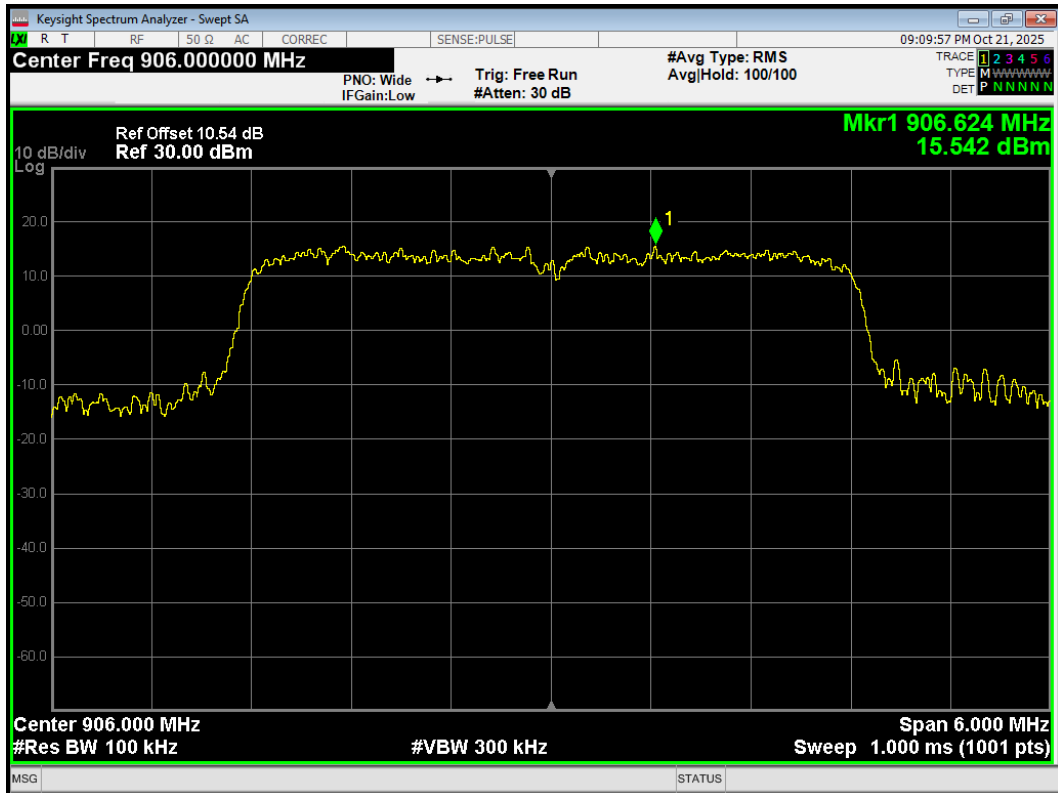


Band Edge Hyper Wi-Fi (4M) 906MHz Emission

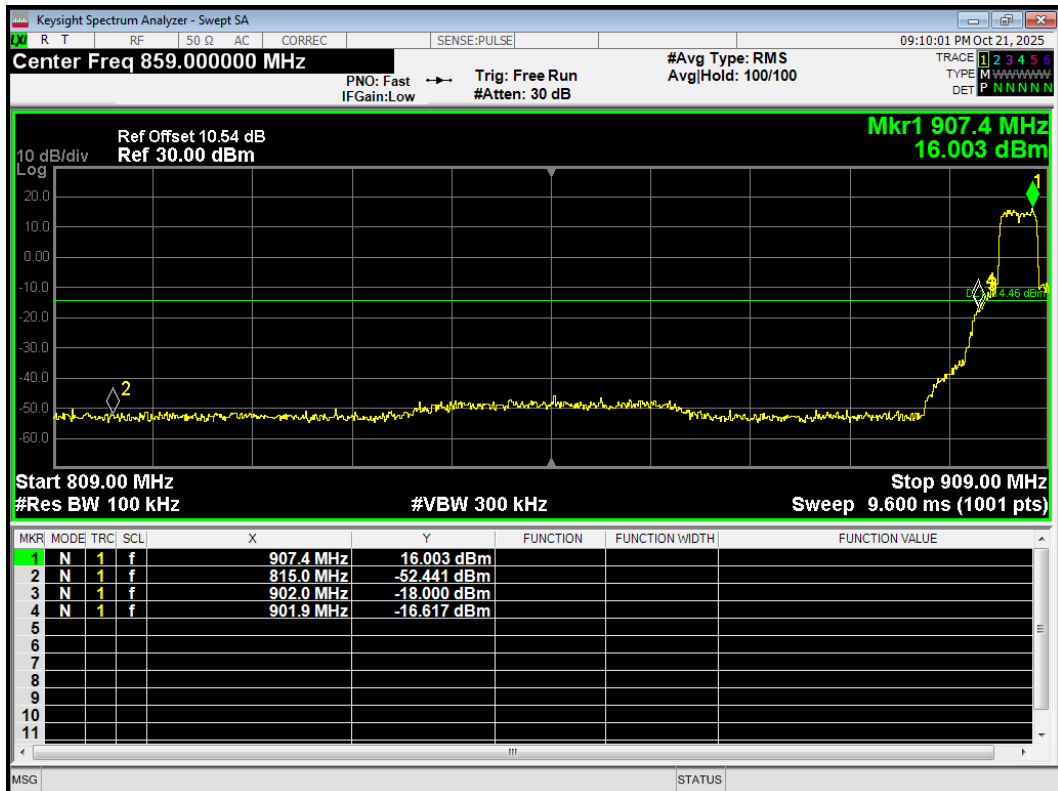

Band Edge Hyper Wi-Fi (4M) 922MHz Ref

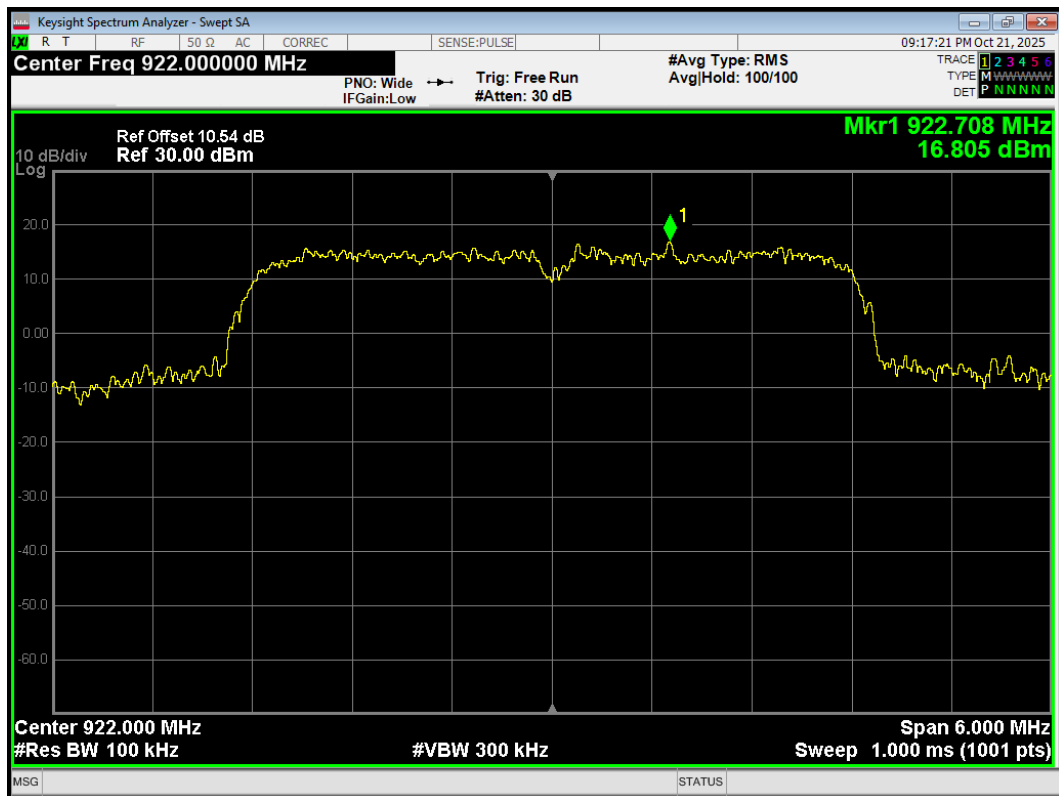


Band Edge Hyper Wi-Fi (4M) 922MHz Emission

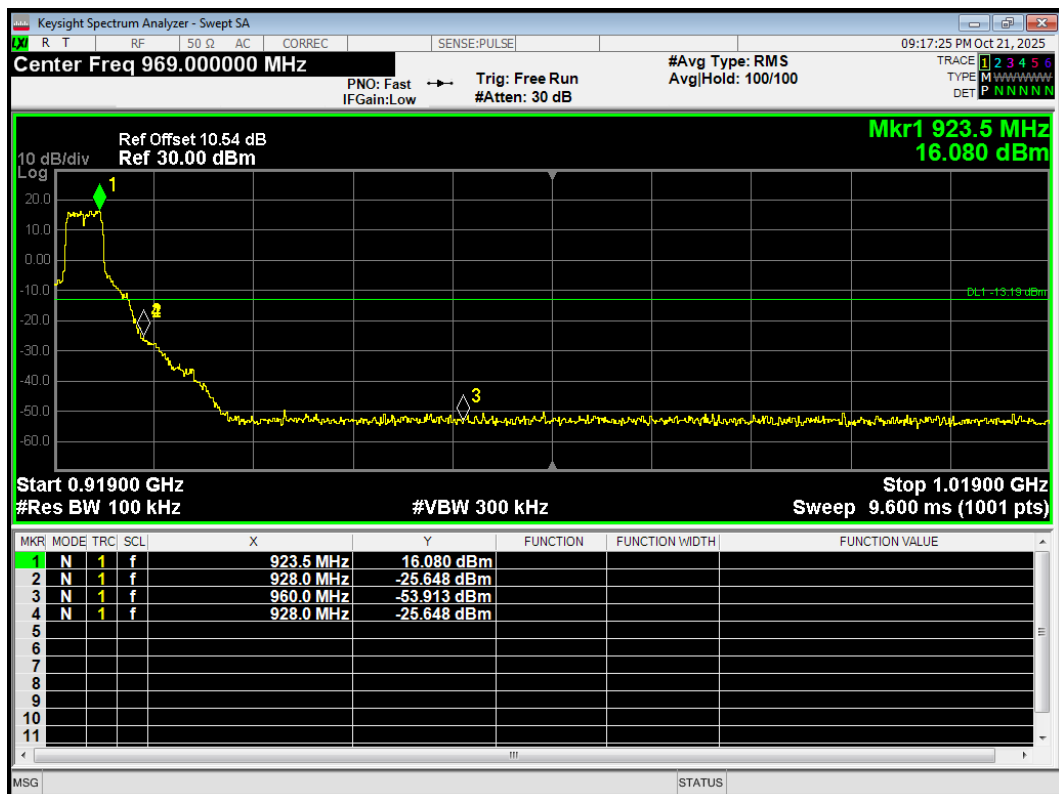


6.5. Power Spectral Density

Test Mode	Carrier frequency (MHz)	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
1M	903.5	1.08	1.20	8	PASS
	915.5	1.01	1.13	8	PASS
	926.5	0.78	0.90	8	PASS
2M	905	-2.93	-2.80	8	PASS
	915	-3.48	-3.35	8	PASS
	925	-2.85	-2.72	8	PASS
4M	906	-6.55	-6.42	8	PASS
	914	-4.97	-4.84	8	PASS
	922	-5.58	-5.45	8	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					


PSD Hyper Wi-Fi (1M) 903.5MHz

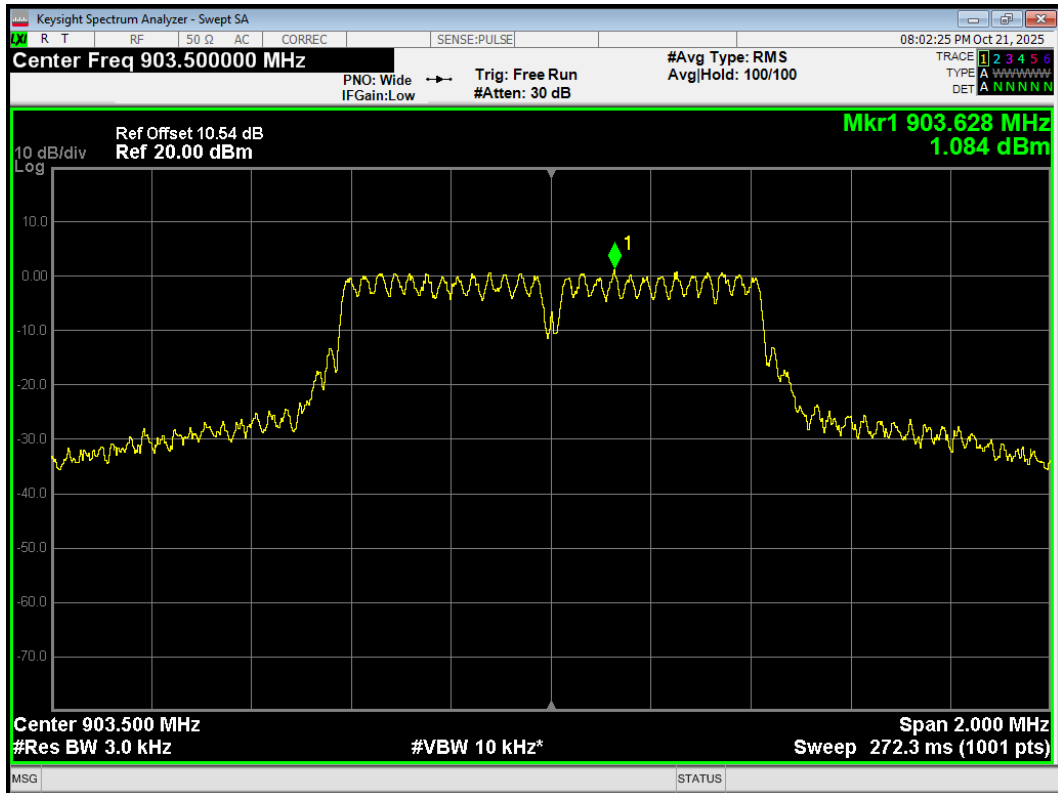


PSD Hyper Wi-Fi (1M) 915.5MHz

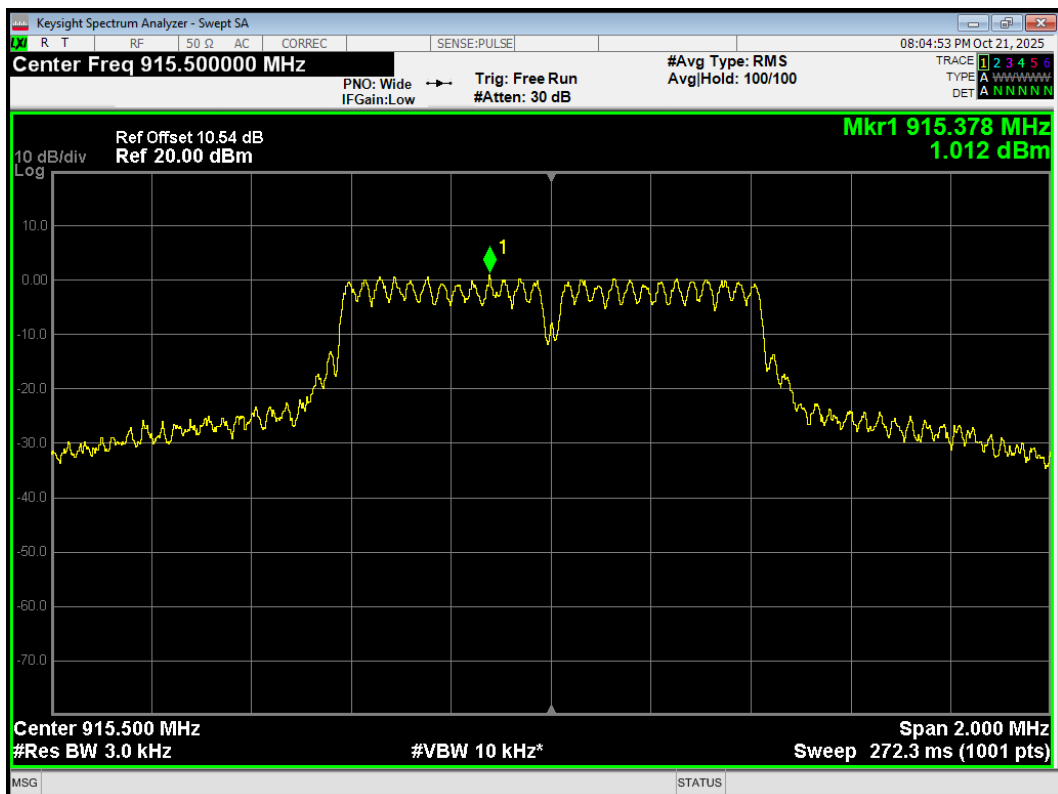


PSD Hyper Wi-Fi (1M) 926.5MHz

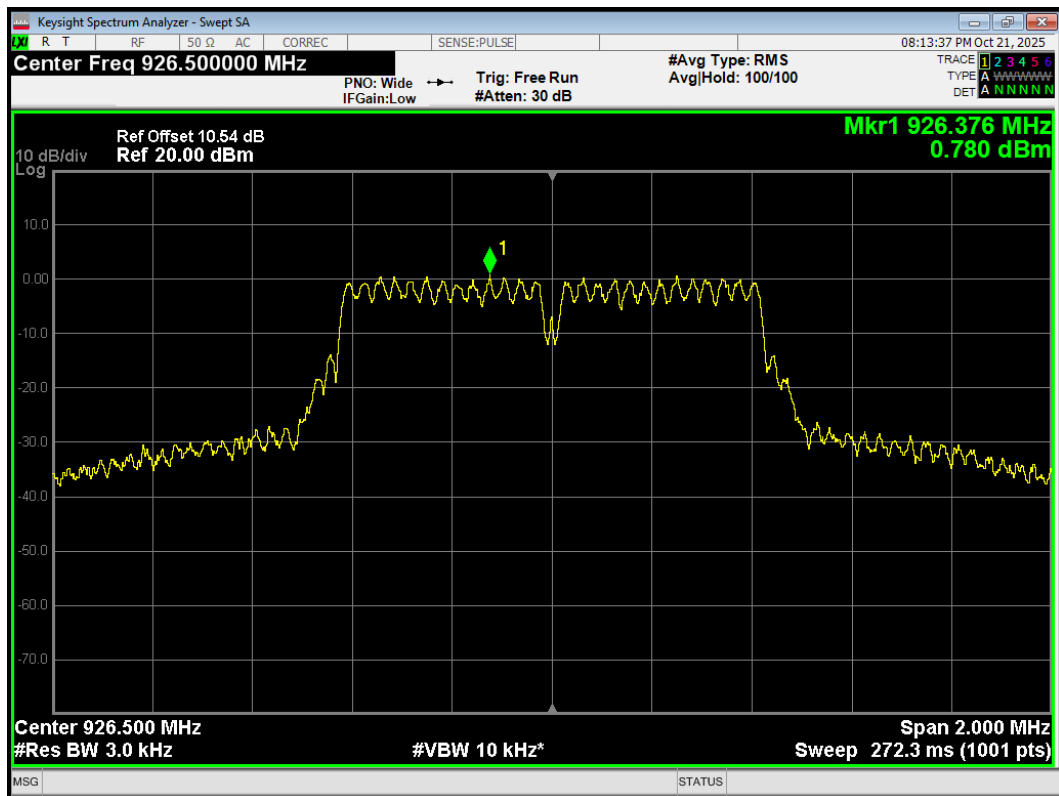


PSD Hyper Wi-Fi (2M) 905MHz

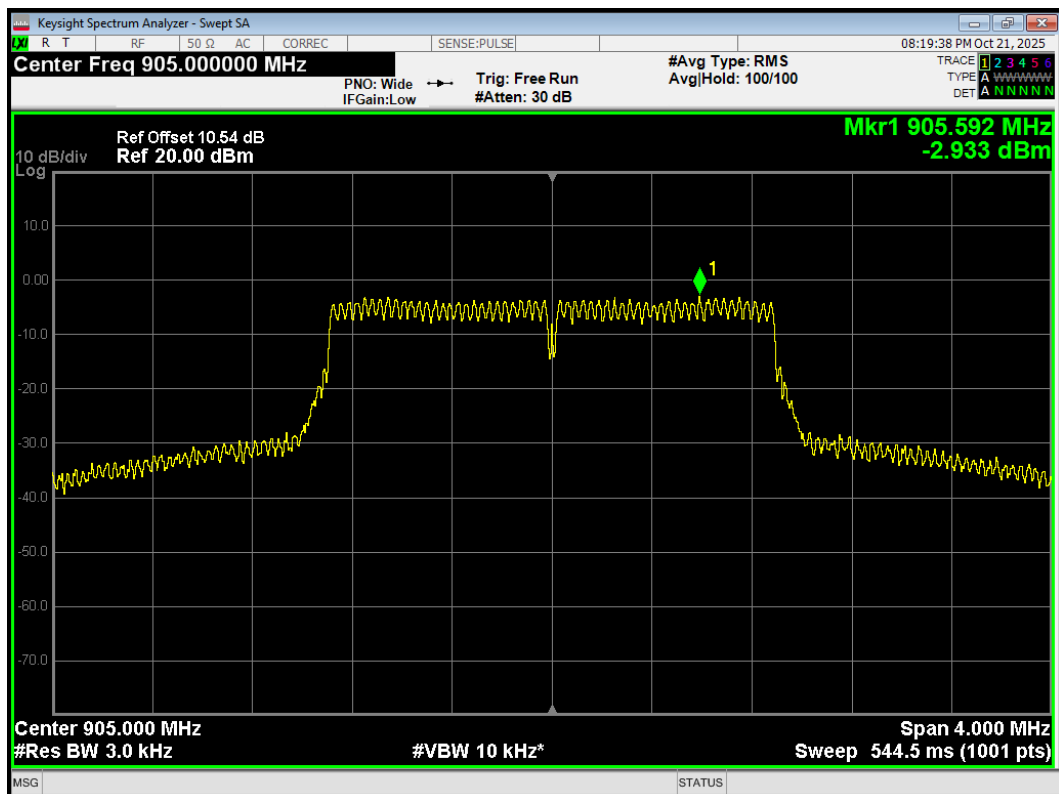


PSD Hyper Wi-Fi (2M) 915MHz

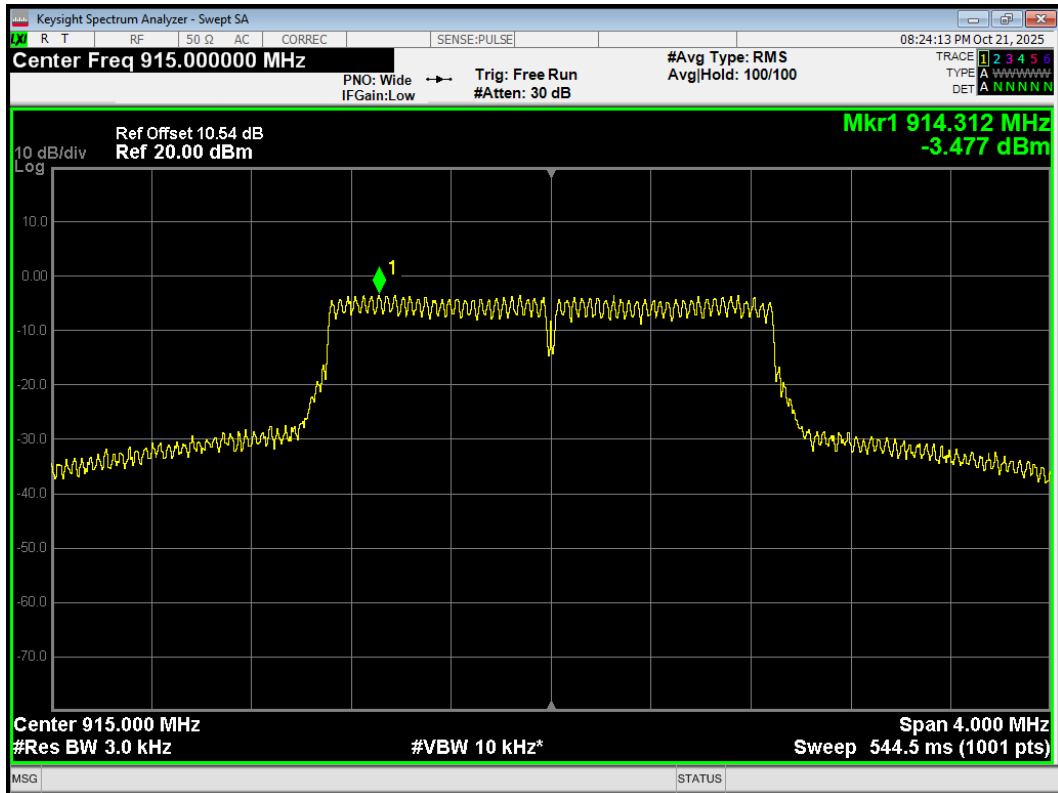


PSD Hyper Wi-Fi (2M) 925MHz

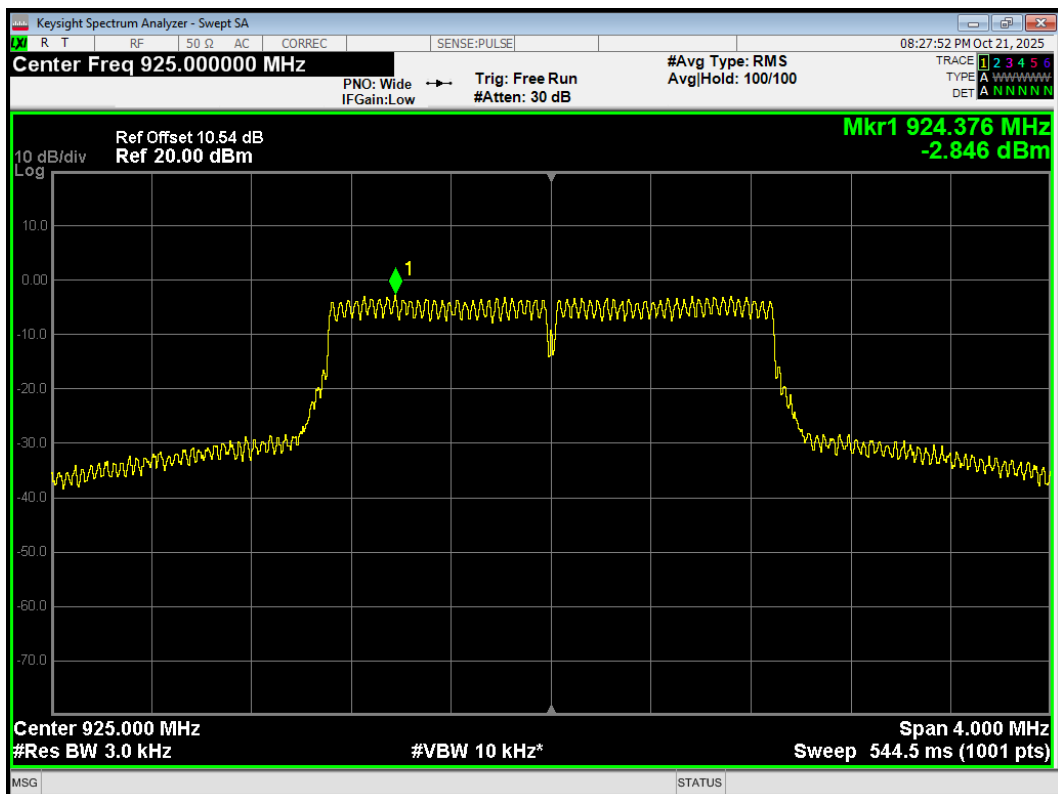


PSD Hyper Wi-Fi (4M) 906MHz

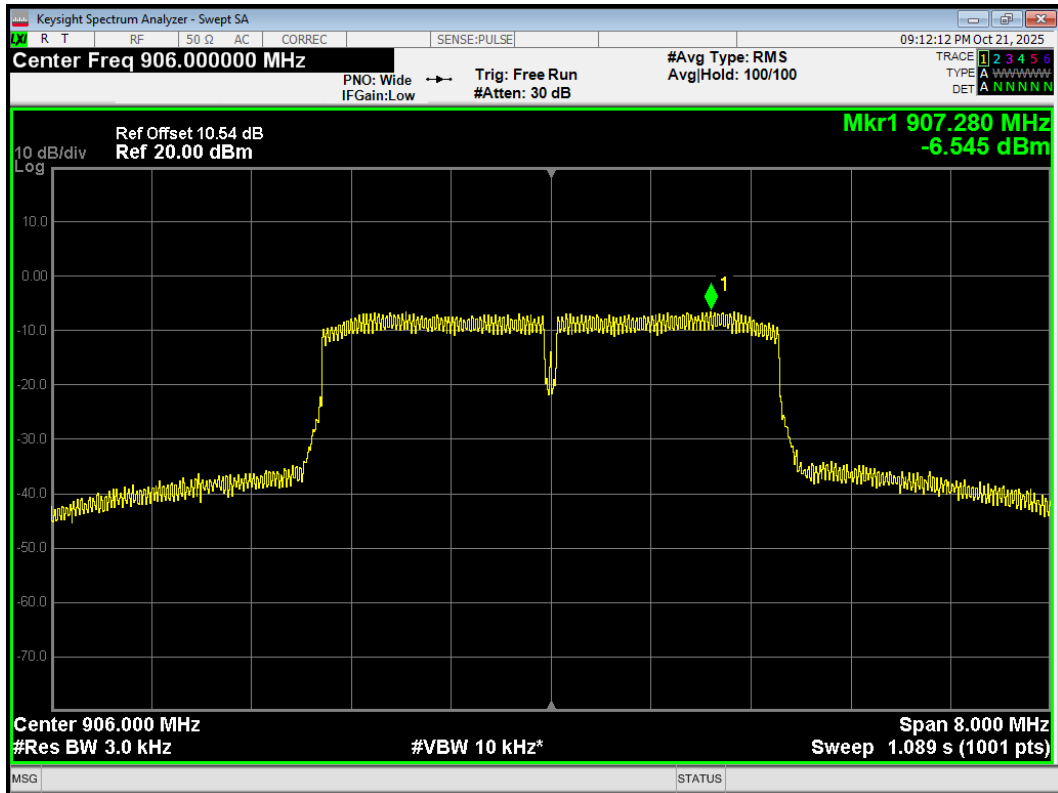

PSD Hyper Wi-Fi (4M) 914MHz

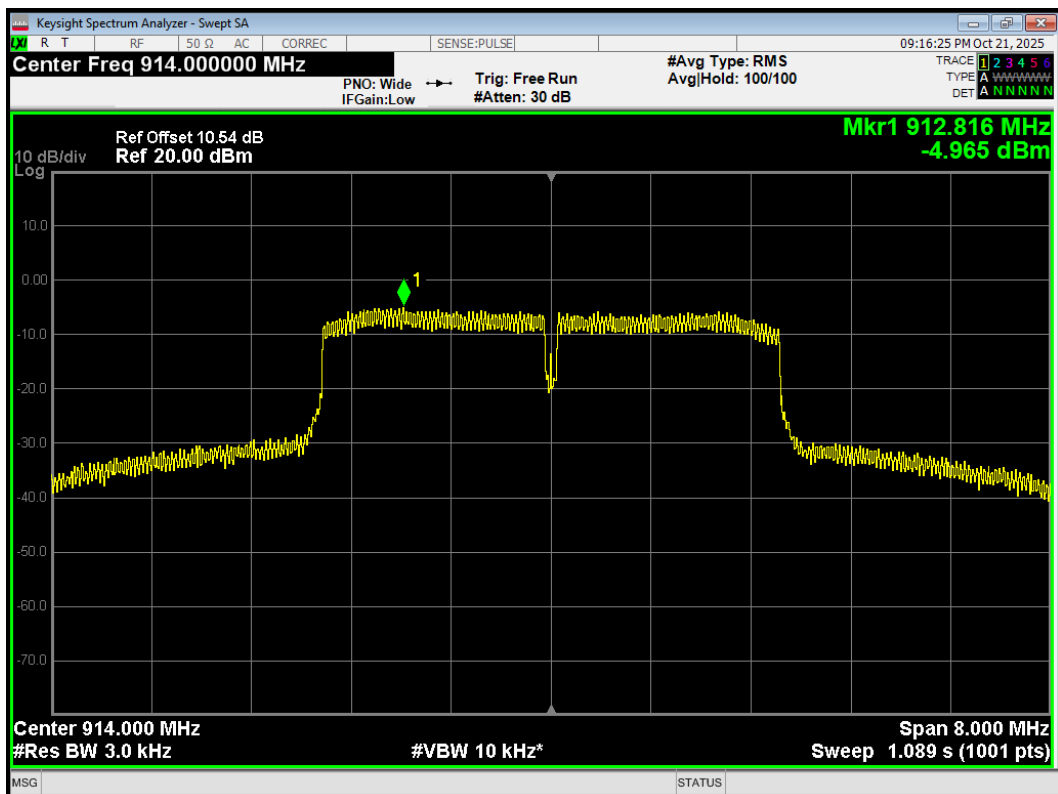


PSD Hyper Wi-Fi (4M) 922MHz

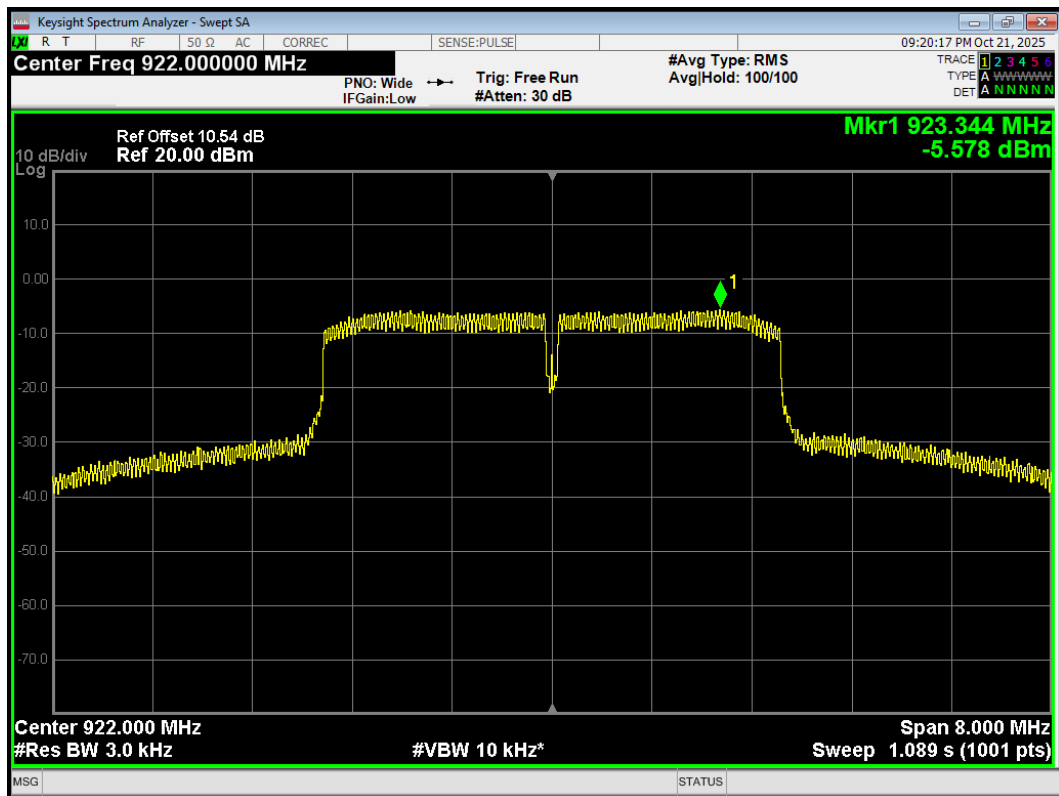


6.6. Spurious RF Conducted Emissions


Tx. Spurious Hyper Wi-Fi (1M) 903.5MHz Ref

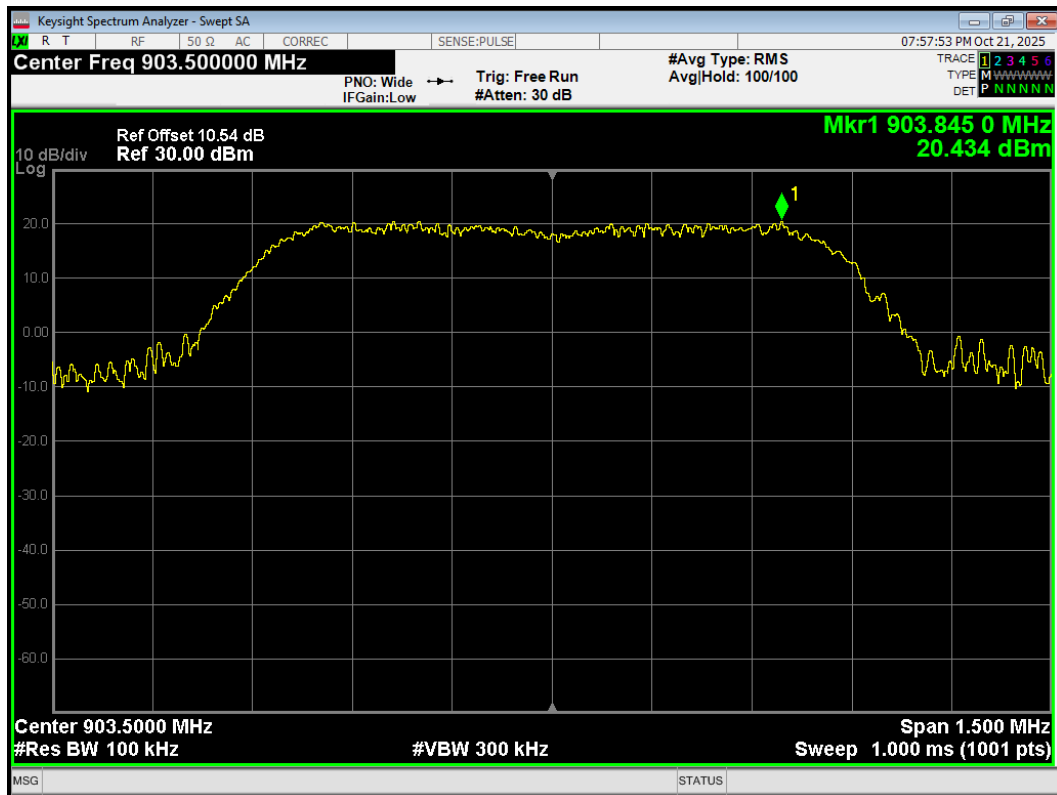


Tx. Spurious Hyper Wi-Fi (1M) 903.5MHz Emission

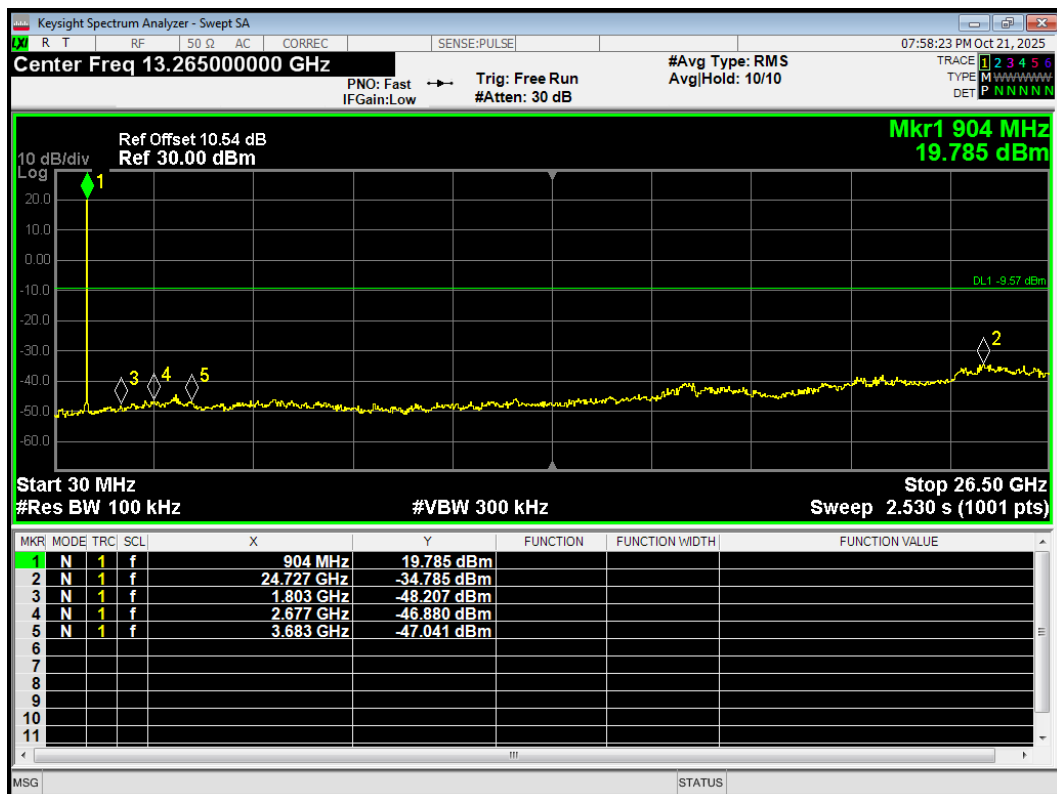

Tx. Spurious Hyper Wi-Fi (1M) 915.5MHz Ref

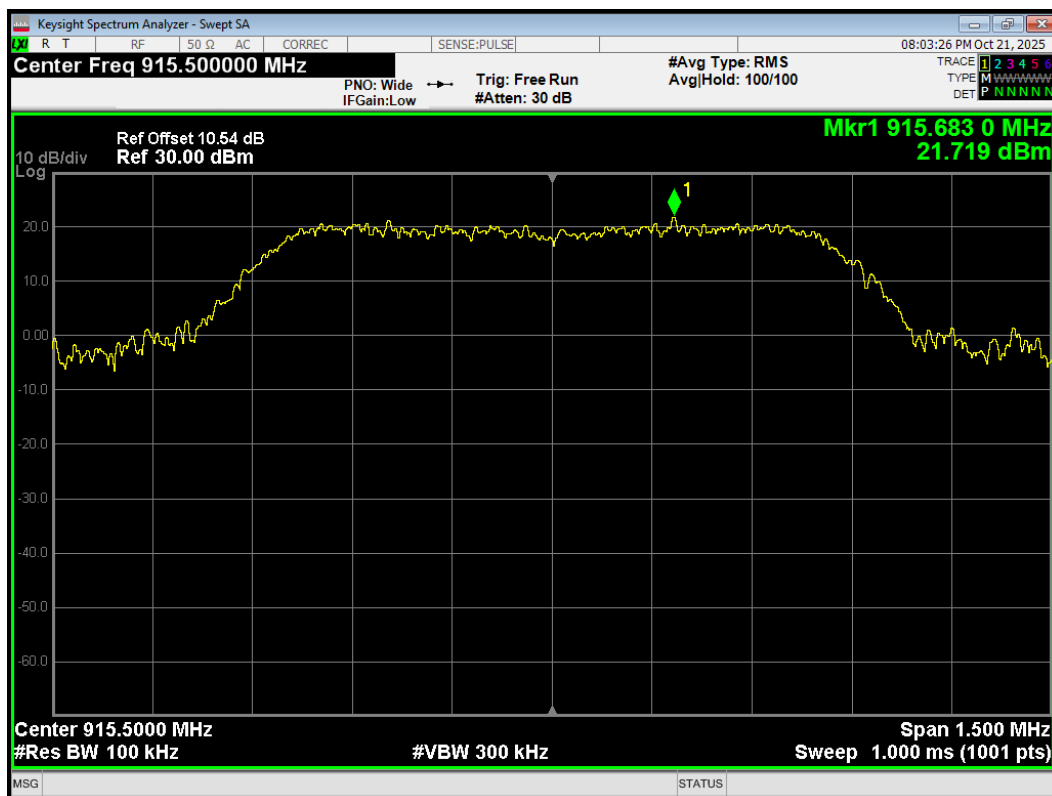


Tx. Spurious Hyper Wi-Fi (1M) 915.5MHz Emission

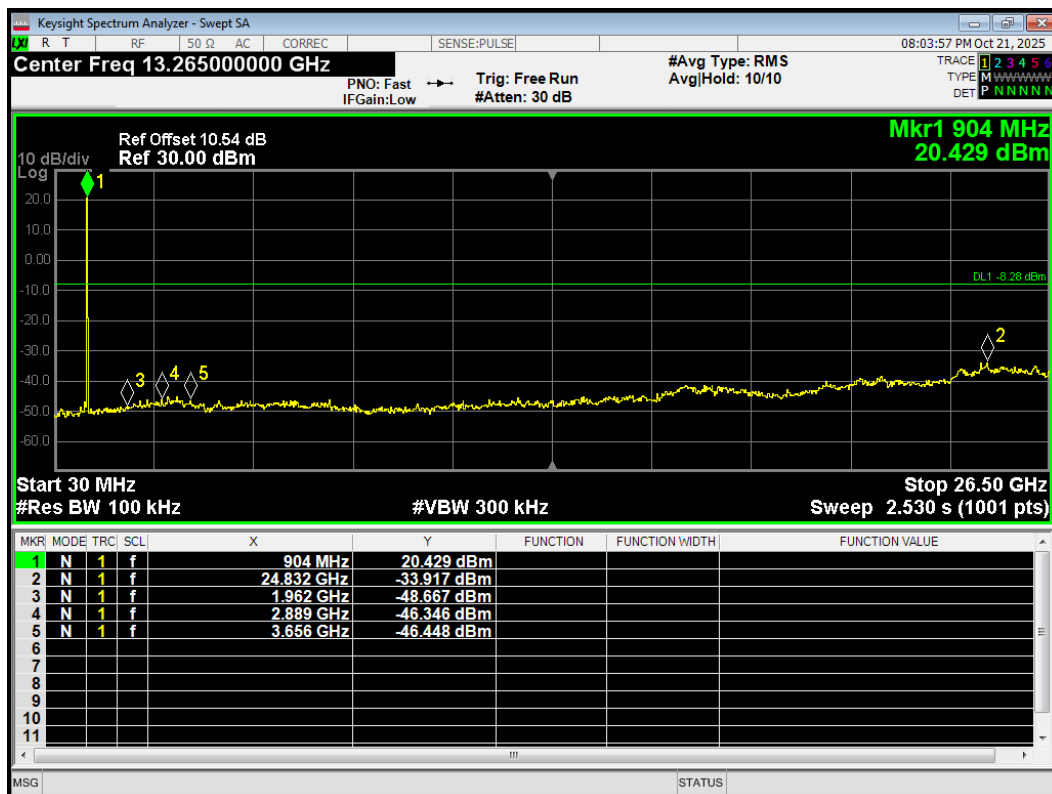


Tx. Spurious Hyper Wi-Fi (1M) 926.5MHz Ref




Tx. Spurious Hyper Wi-Fi (1M) 926.5MHz Emission

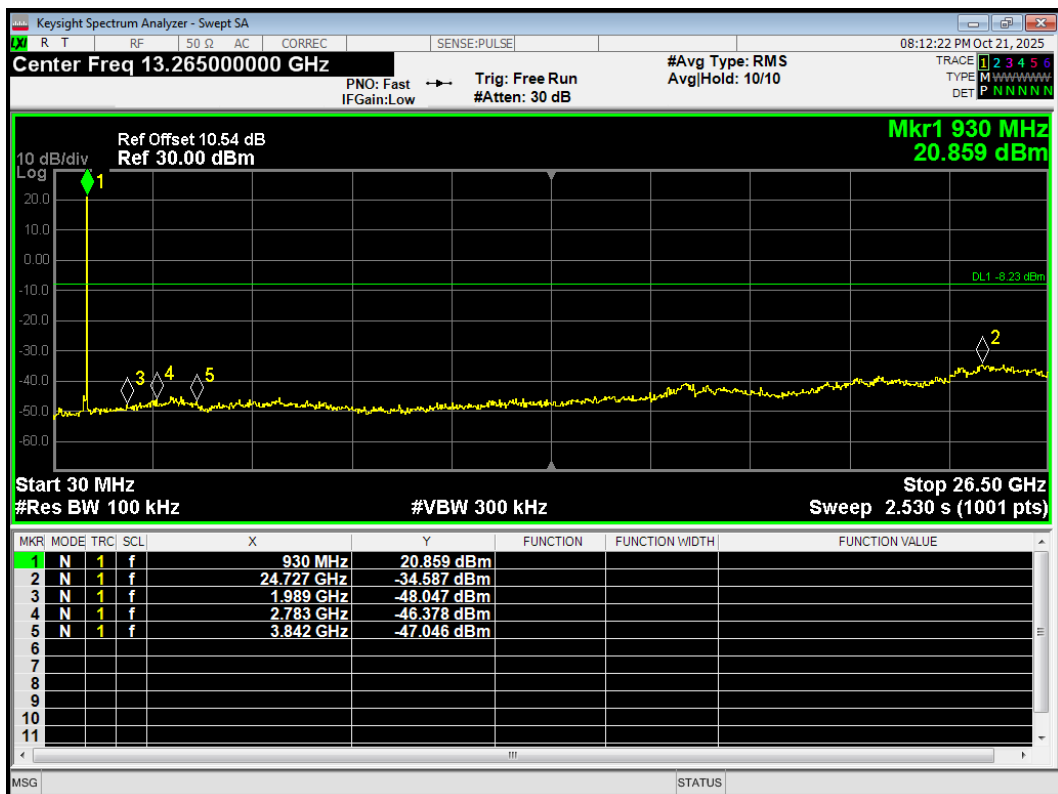


Tx. Spurious Hyper Wi-Fi (2M) 905MHz Ref

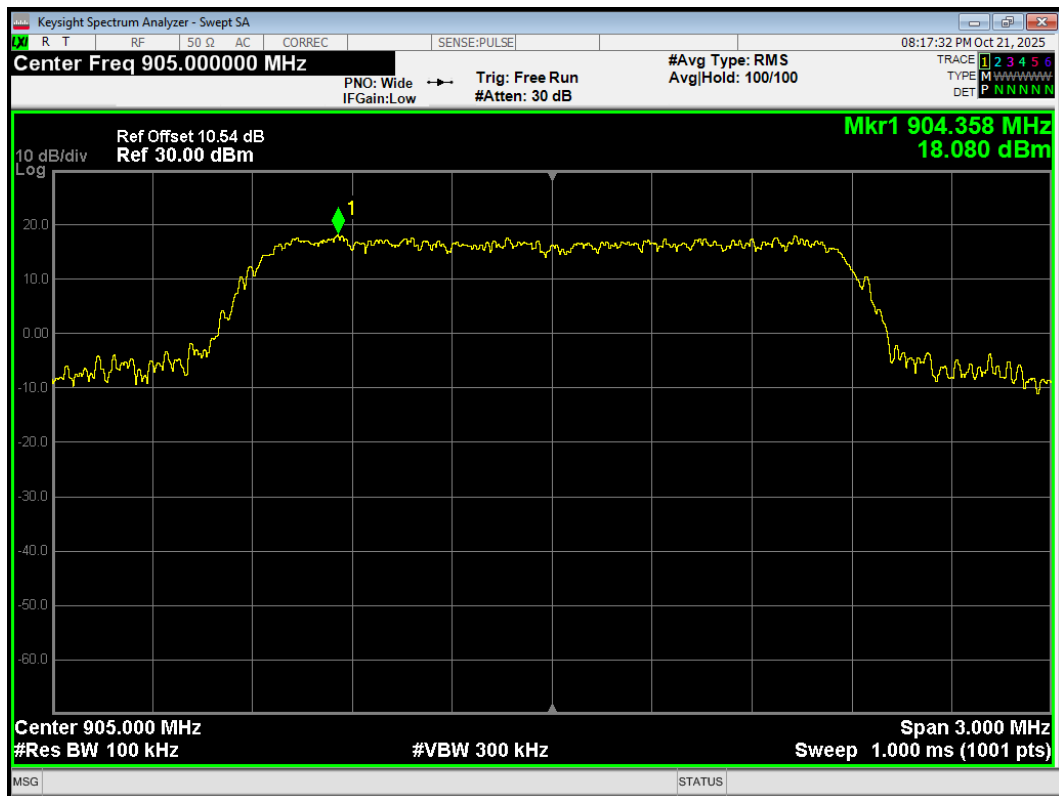


Tx. Spurious Hyper Wi-Fi (2M) 905MHz Emission

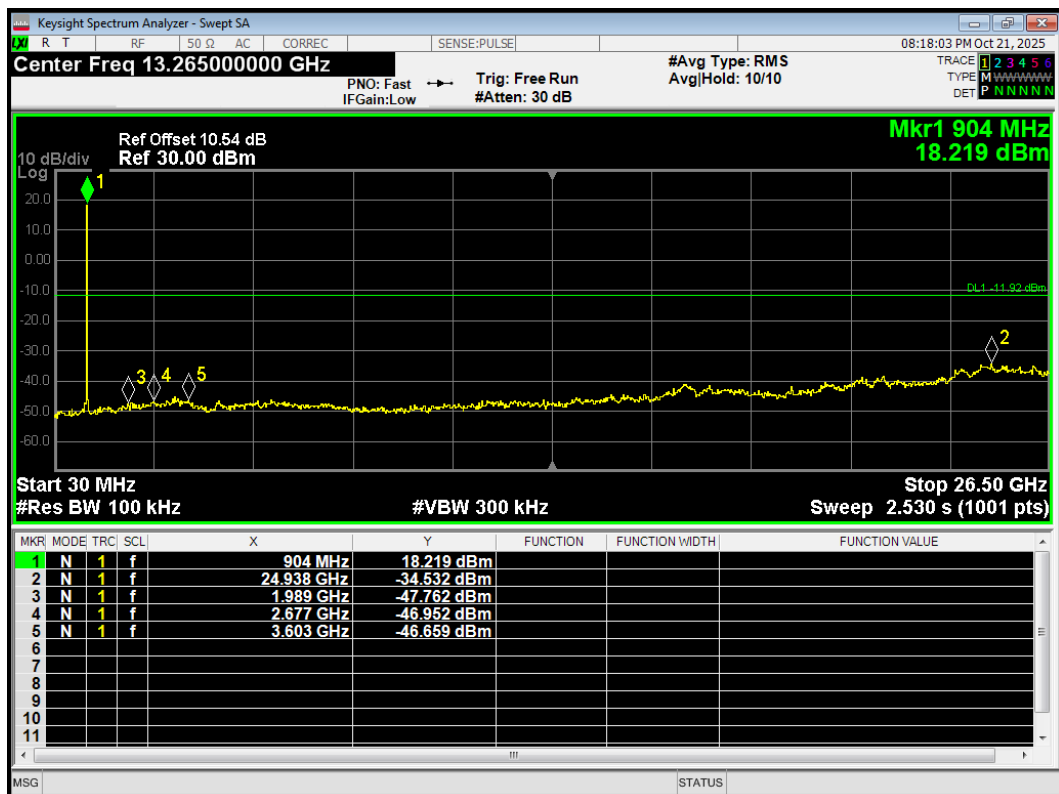


Tx. Spurious Hyper Wi-Fi (2M) 915MHz Ref

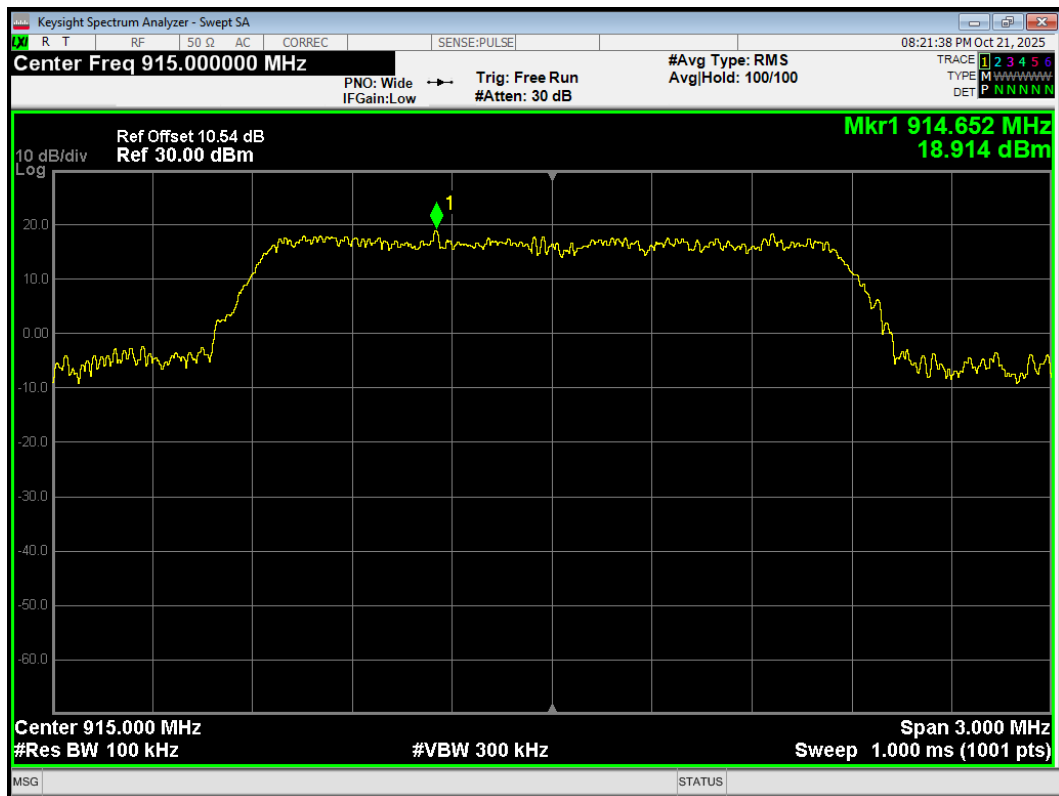


Tx. Spurious Hyper Wi-Fi (2M) 915MHz Emission

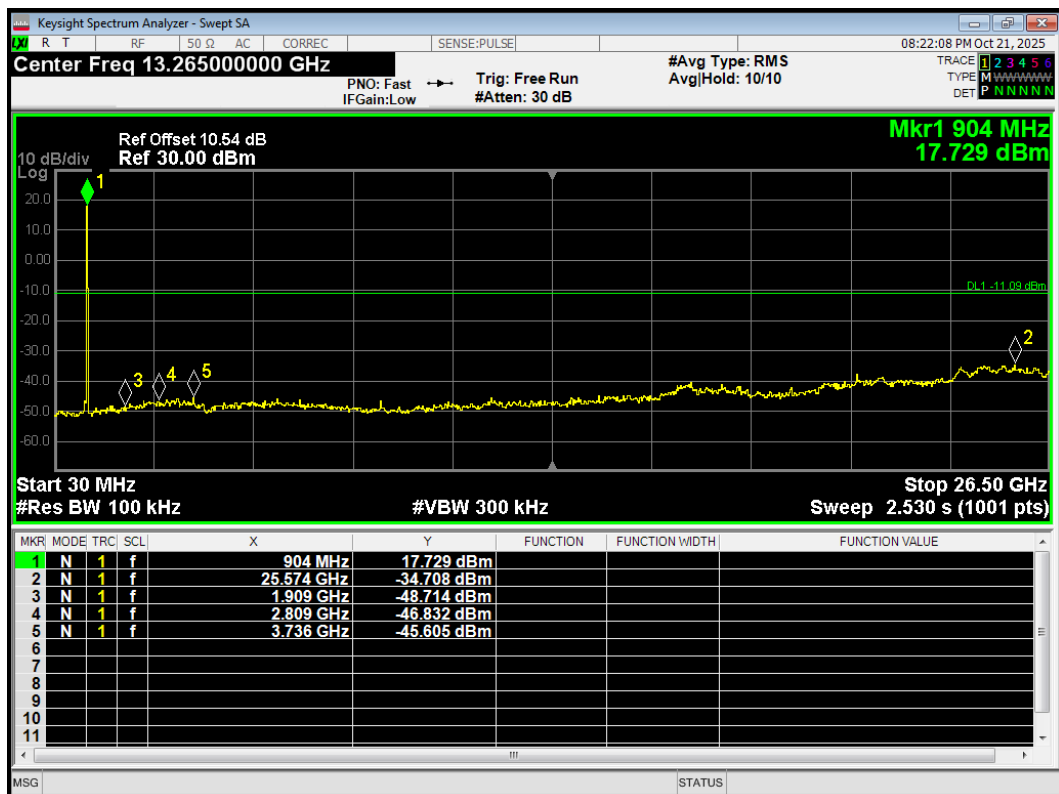


Tx. Spurious Hyper Wi-Fi (2M) 925MHz Ref

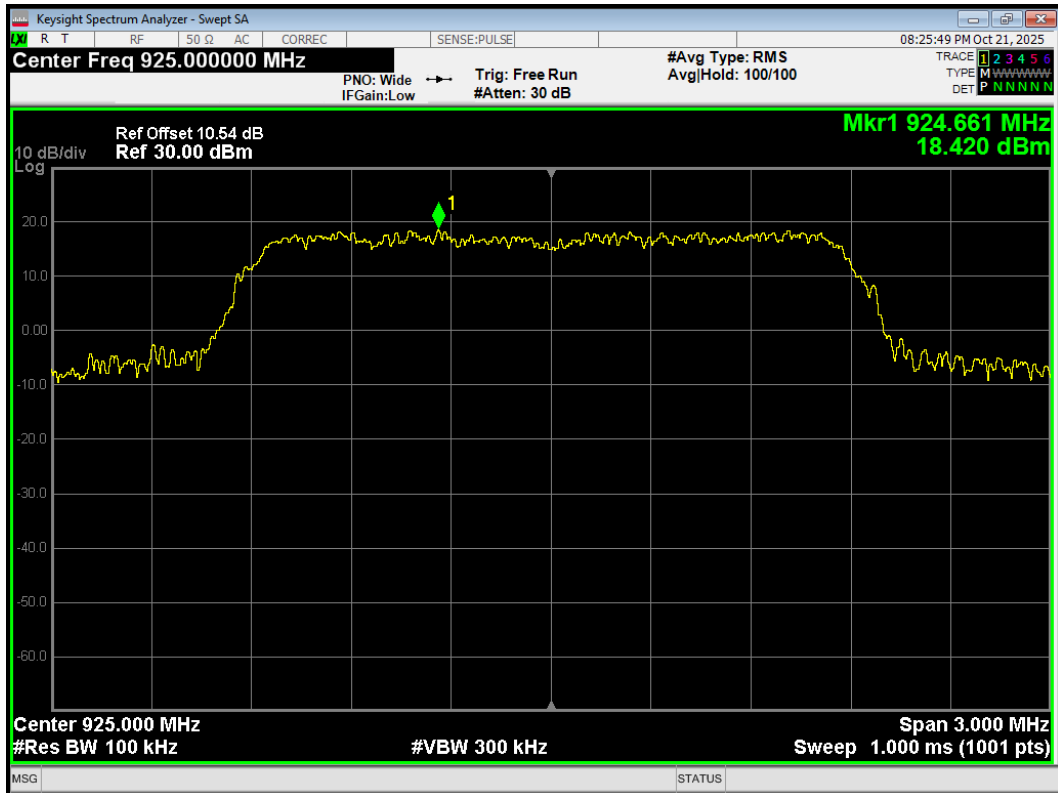


Tx. Spurious Hyper Wi-Fi (2M) 925MHz Emission

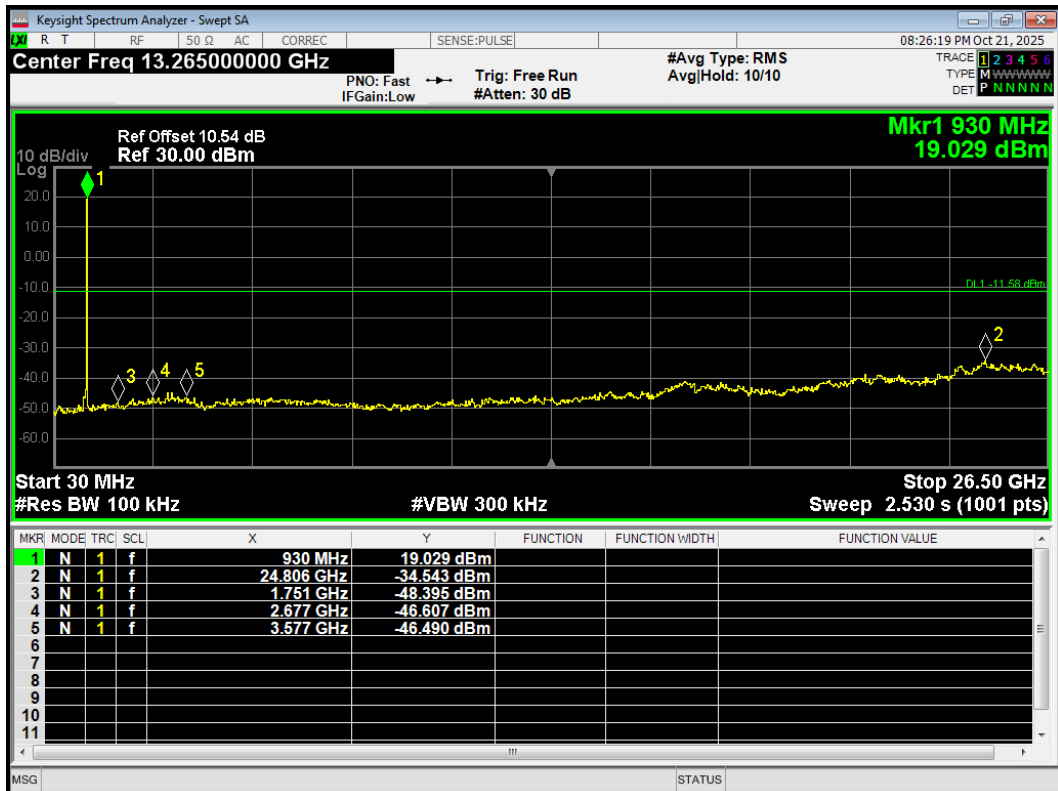


Tx. Spurious Hyper Wi-Fi (4M) 906MHz Ref

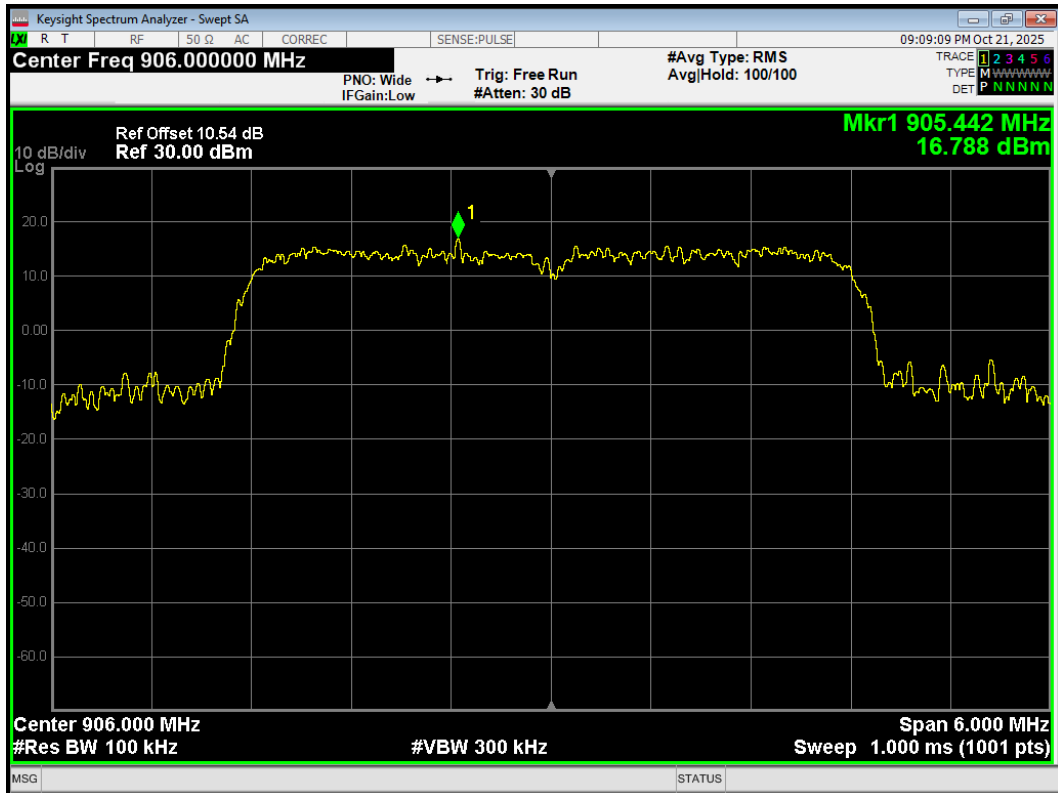


Tx. Spurious Hyper Wi-Fi (4M) 906MHz Emission

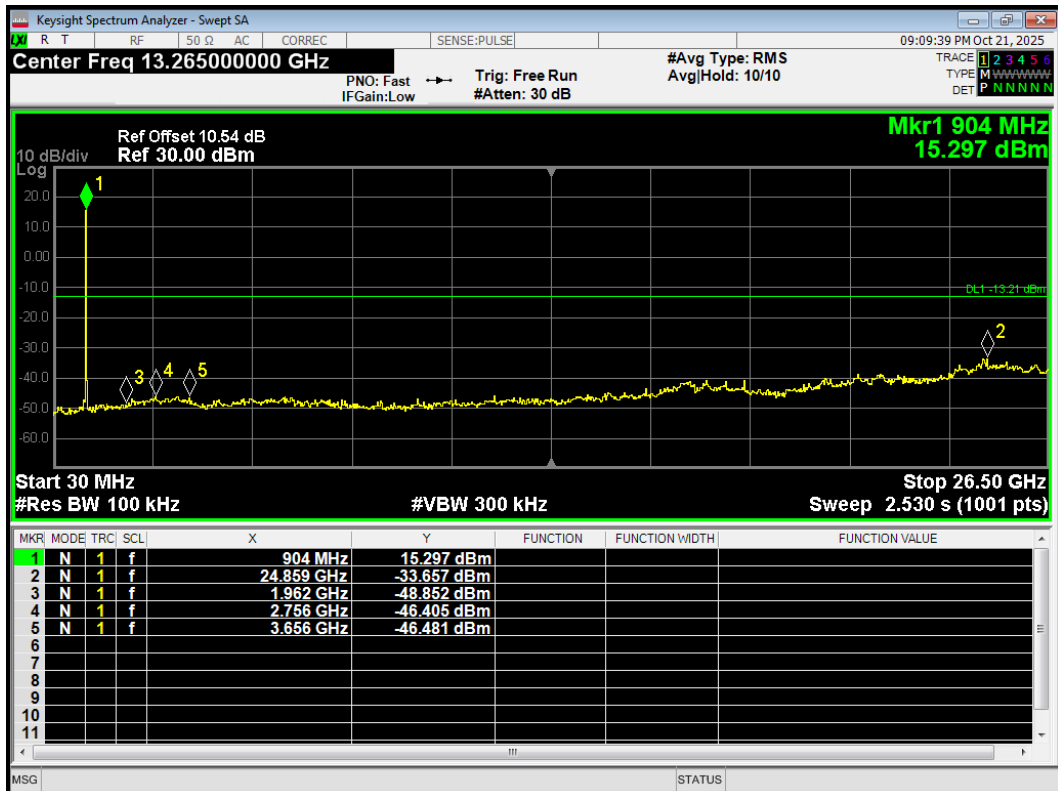


Tx. Spurious Hyper Wi-Fi (4M) 914MHz Ref

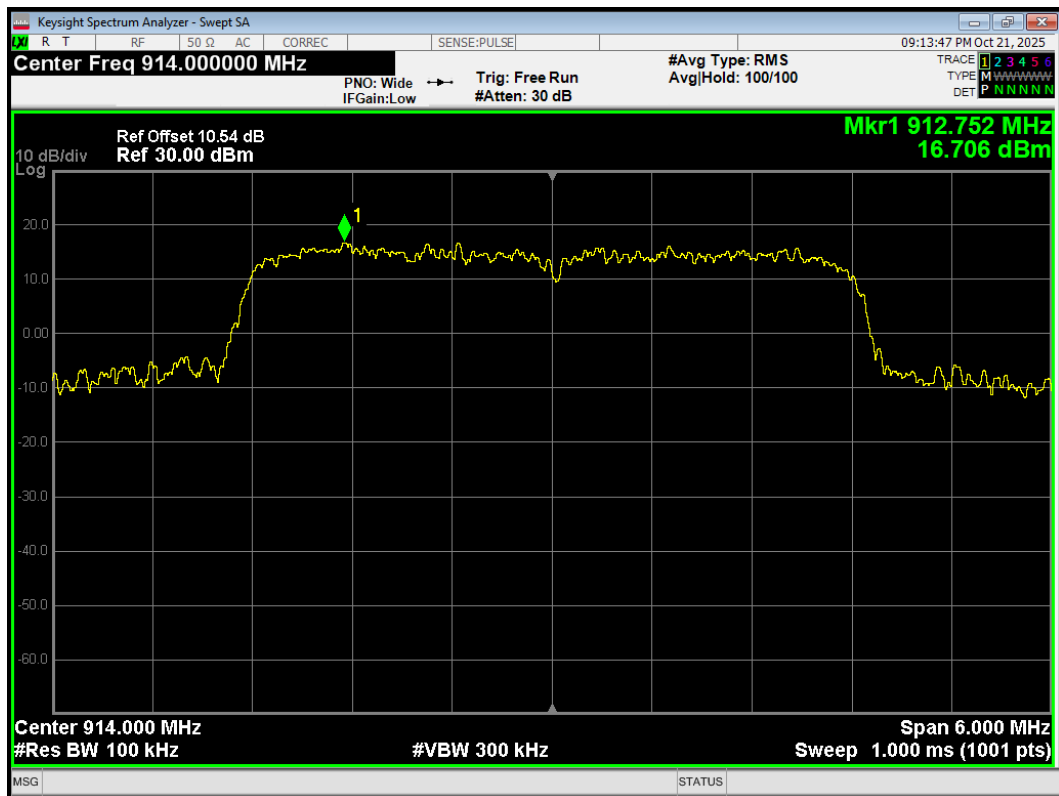


Tx. Spurious Hyper Wi-Fi (4M) 914MHz Emission

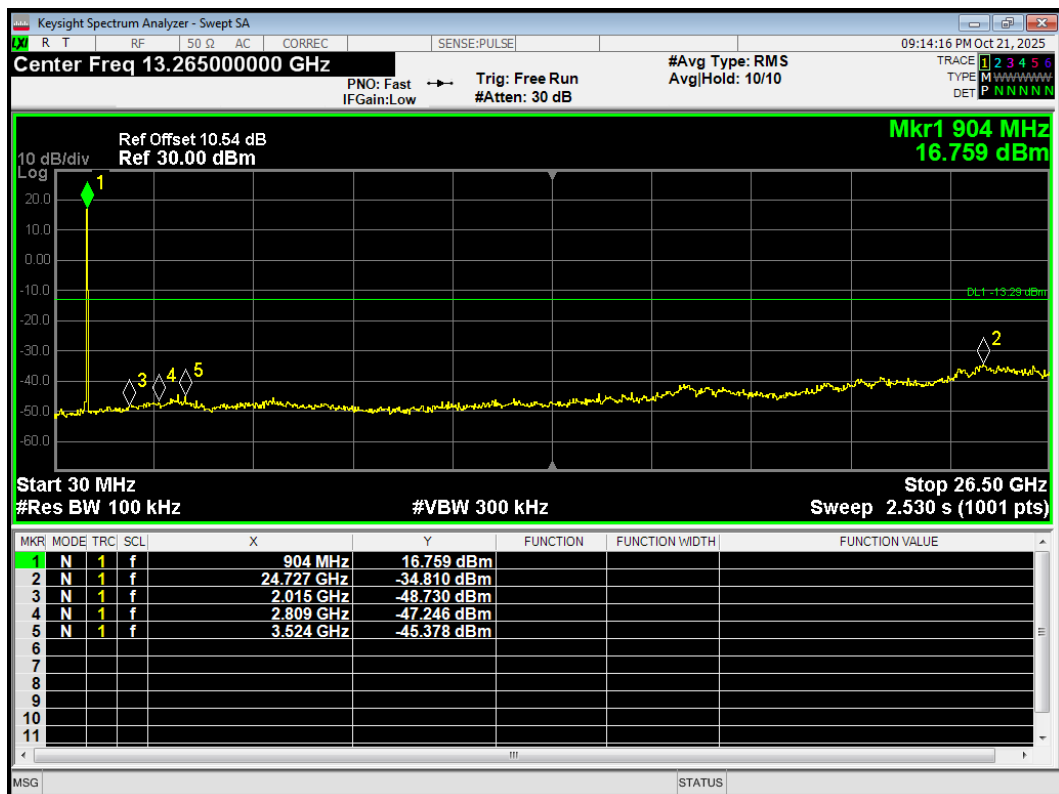

Tx. Spurious Hyper Wi-Fi (4M) 922MHz Ref

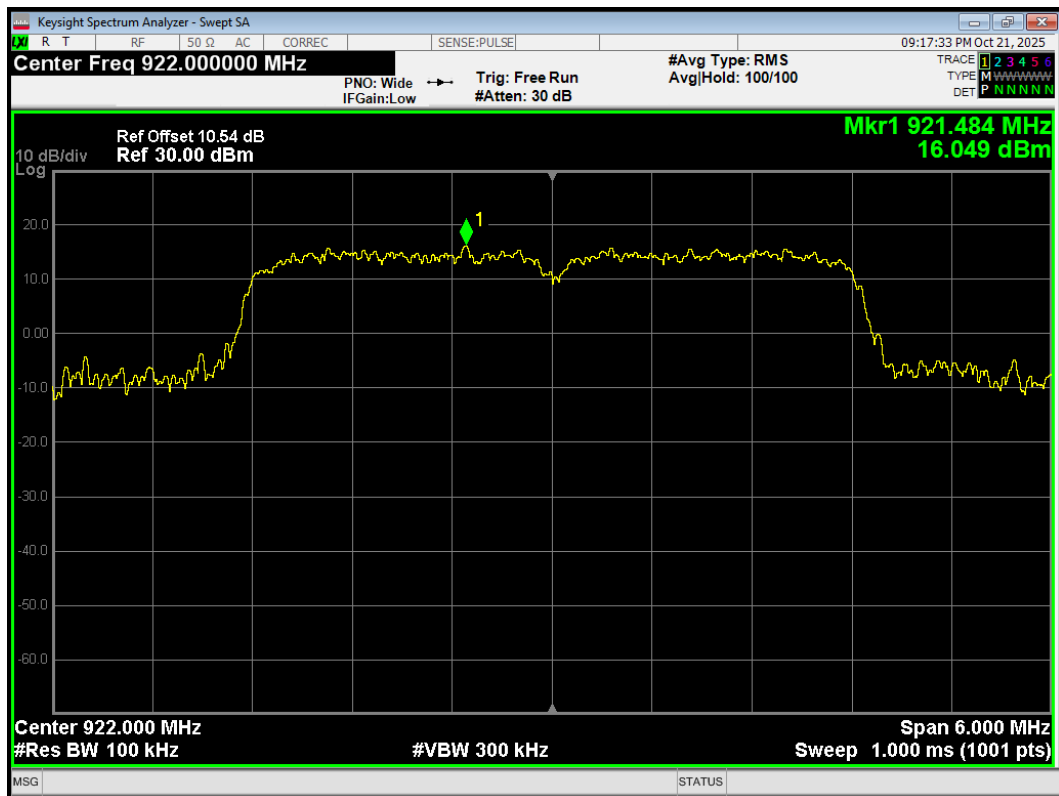

Tx. Spurious Hyper Wi-Fi (4M) 922MHz Emission

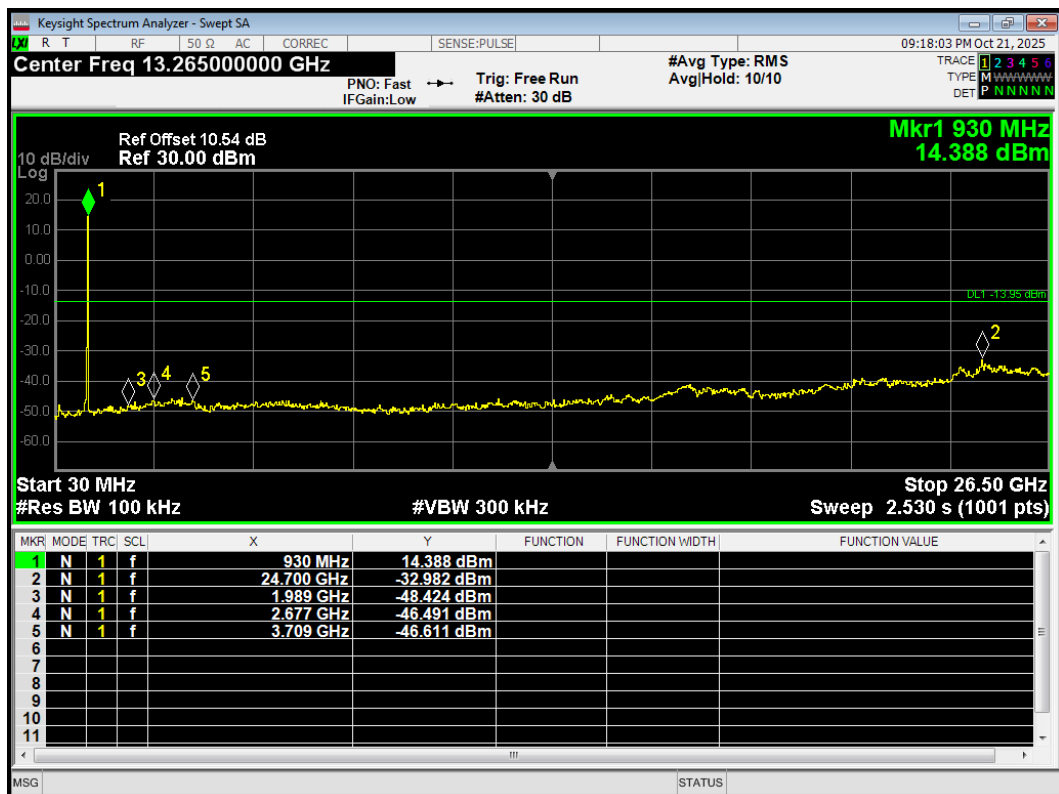

6.7. Unwanted Emission

The detailed test data see *EFTA25090010-IE-02-R6-ANNEX A* Test Result.

6.8. Conducted Emission

The detailed test data see *EFTA25090010-IE-02-R6-ANNEX A* Test Result.

7. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Power Sensor	R&S	NRP18S	101954	2025-05-06	2026-05-05
Spectrum Analyzer	KEYSIGHT	N9020A	MY51330870	2025-05-06	2026-05-05
EMI Test Receiver	R&S	ESCI3	100948	2025-05-07	2026-05-06
Signal Analyzer	R&S	FSV40	101186	2025-05-06	2026-05-05
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2024-07-18	2027-07-17
Amplifier	R&S	SCU18F	101022	2025-05-06	2026-05-05
Software	R&S	EMC32	9.26.01	/	/
Artificial main network	R&S	ENV216	102191	2024-12-02	2026-12-01
EMI Test Receiver	R&S	ESR	101667	2025-05-06	2026-05-05
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

Refer to *Part15C Test Setup*.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

***** END OF REPORT *****