


RF TEST REPORT

Applicant Shanghai Sunmi Technology Co.,Ltd.
FCC ID 2AH25P3MIXH
Product Smart POS Terminal
Brand SUNMI
Model T6721
Report No. EFTA25090010-IE-02-R1
Issue Date December 26, 2025

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR 47 Part 22H / FCC CFR 47 Part 24E / FCC CFR47 Part 27C / FCC CFR 47 Part 90R / FCC CFR 47 Part 90S**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1	Test Laboratory	12
1.1	Notes of the Test Report.....	12
1.2.	Test facility	12
1.3	Testing Location.....	12
2	General Description of Equipment under Test.....	13
2.1	Applicant and Manufacturer Information	13
2.2	General information	13
3	Applied Standards.....	16
4	Test Configuration	17
5	Test Case	21
5.1	RF Power Output and Effective Isotropic Radiated Power	21
5.2	Occupied Bandwidth	22
5.3	Band Edge Compliance	23
5.4	Peak-to-Average Power Ratio (PAPR)	24
5.5	Frequency Stability	25
5.6	Spurious Emissions at Antenna Terminals	26
5.7	Radiated Spurious Emission	27
6	Main Test Instruments	30
7	The EUT Appearance.....	31
8	Test Setup Photos	32

Summary of Measurement Results

Test Case	Clause in FCC rules	Limits	Verdict
GSM 850; WCDMA Band 5; LTE Band 5/26 (824-849MHz)			
RF Power Output and Effective Radiated Power	2.1046 22.913(a)(5)	$\leq 7 \text{ W}$ (38.45 dBm)	PASS
Occupied Bandwidth	2.1049	No specific requirements	PASS
Band Edge Compliance	2.1051 22.917(a)	$\leq -13 \text{ dBm}$	PASS
Peak-to-Average Power Ratio	22.913(d) KDB 971168 D01(5.7)	$\leq 13 \text{ dB}$	PASS
Frequency Stability	2.1055 22.355(d)(1)	$\leq 2.5 \text{ ppm}$	PASS
Spurious Emissions at Antenna Terminals	2.1051 22.917(a)	$\leq -13 \text{ dBm}$	PASS
Radiated Spurious Emission	2.1053 22.917 (a)	$\leq -13 \text{ dBm}$	PASS
WCDMA Band 2; LTE Band 2/25			
RF Power Output and Effective Isotropic Radiated Power	2.1046 24.232(c)	$\leq 2 \text{ W}$ (33 dBm)	PASS
Occupied Bandwidth	2.1049	No specific requirements	PASS
Band Edge Compliance	2.1051 24.238(a)	$\leq -13 \text{ dBm}$	PASS
Peak-to-Average Power Ratio	24.232 (d) KDB 971168 D01(5.7)	$\leq 13 \text{ dB}$	PASS
Frequency Stability	2.1055 24.235	The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.	PASS
Spurious Emissions at Antenna Terminals	2.1051 24.238(a)	$\leq -13 \text{ dBm}$	PASS
Radiated Spurious Emission	2.1053 24.238(a)	$\leq -13 \text{ dBm}$	PASS
WCDMA Band 4; LTE Band 4/66			
RF Power Output and Effective Isotropic Radiated Power	2.1046 27.50(d)(4)	$\leq 1 \text{ W}$ (30 dBm)	PASS
Occupied Bandwidth	2.1049	No specific requirements	PASS
Band Edge Compliance	2.1051 27.53(h)	$\leq -13 \text{ dBm}$	PASS
Peak-to-Average Power Ratio	27.50(d)(5) KDB971168 D01(5.7)	$\leq 13 \text{ dB}$	PASS

Test Case	Clause in FCC rules	Limits	Verdict
Frequency Stability	2.1055 27.54	Shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.	PASS
Spurious Emissions at Antenna Terminals	2.1051 27.53(h)	≤ -13 dBm	PASS
Radiated Spurious Emission	2.1053 27.53(h)	≤ -13 dBm	PASS
LTE Band 7/38/41			
RF Power Output and Effective Isotropic Radiated Power	2.1046 27.50(h)(2)	≤ 2 W (33 dBm)	PASS
Occupied Bandwidth	2.1049	No specific requirements	PASS
Band Edge Compliance	2.1051 27.53(m)(4)	The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.	PASS
Peak-to-Average Power Ratio	27.50(d)(5) KDB971168 D01(5.7)	≤ 13 dB	PASS
Frequency Stability	2.1055 27.54	Shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.	PASS
Spurious Emissions at Antenna Terminals	2.1051 27.53(m)	≤ -25 dBm	PASS

RF Test Report		Report No.: E-1A200007012-02-11					
Test Case	Clause in FCC rules	Limits	Verdict				
Radiated Spurious Emission	2.1053 27.53(m)	≤ -25 dBm	PASS				
LTE Band 12/17/71							
RF Power Output and Effective Radiated Power	2.1046 27.50(c)(10)	≤ 3 W (34.77 dBm)	PASS				
Occupied Bandwidth	2.1049	No specific requirements	PASS				
Band Edge Compliance	2.1051 27.53(g)	≤ -13 dBm	PASS				
Peak-to-Average Power Ratio	KDB971168 D01(5.7)	≤ 13 dB	PASS				
Frequency Stability	2.1055 27.54	Shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.	PASS				
Spurious Emissions at Antenna Terminals	2.1051 27.53(g)	≤ -13 dBm	PASS				
Radiated Spurious Emission	2.1053 27.53(g)	≤ -13 dBm	PASS				
LTE Band 13							
RF Power Output and Effective Radiated Power	2.1046 27.50(b)(10)	≤ 3 W (34.77 dBm)	PASS				
Occupied Bandwidth	2.1049	No specific requirements	PASS				
Band Edge Compliance	2.1051 27.53(c)(2)	The power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;	PASS				
Peak-to-Average Power Ratio	KDB971168 D01(5.7)	≤ 13 dB	PASS				
Frequency Stability	2.1055 27.54	Shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.	PASS				
Spurious Emissions at Antenna Terminals	2.1051 27.53(c) 27.53(f)	<table><tr><td>Limit out of the band 1559-1610 MHz</td><td>≤ -13 dBm</td></tr><tr><td>Limit in the band 1559-1610 MHz</td><td>≤ -40 dBm</td></tr></table>	Limit out of the band 1559-1610 MHz	≤ -13 dBm	Limit in the band 1559-1610 MHz	≤ -40 dBm	PASS
Limit out of the band 1559-1610 MHz	≤ -13 dBm						
Limit in the band 1559-1610 MHz	≤ -40 dBm						
Radiated Spurious Emission	2.1053 27.53(c) 27.53(f)	<table><tr><td>Limit out of the band 1559-1610 MHz</td><td>≤ -13 dBm</td></tr><tr><td>Limit in the band 1559-1610 MHz</td><td>≤ -40 dBm</td></tr></table>	Limit out of the band 1559-1610 MHz	≤ -13 dBm	Limit in the band 1559-1610 MHz	≤ -40 dBm	PASS
Limit out of the band 1559-1610 MHz	≤ -13 dBm						
Limit in the band 1559-1610 MHz	≤ -40 dBm						
LTE Band 14							
RF power output and Effective Radiated Power	2.1046 90.542(a)(7)	≤ 3 W (34.77 dBm)	PASS				
Occupied Bandwidth	2.1049	No specific requirements	PASS				
Emission Masks	2.1051 90.543(e)	(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz	PASS				

Test Case	Clause in FCC rules	Limits	Verdict
		band segment, for mobile and portable stations. (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB. (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.	
Peak-to-Average Power Ratio	KDB 971168 D01(5.7)	≤ 13 dB	PASS
Frequency Stability	2.1055 90.539 (c)	Must be 400 parts per billion or better when AFC is locked to the base station. When AFC is not locked to the base station, the frequency stability must be at least 1.0 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2 channel aggregate), and 2.5 ppm for 25 kHz (4 channel aggregate)	PASS
Spurious Emissions at Antenna Terminals	2.1051 90.543 (e)(f)	(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following: (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB. (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.	PASS

Test Case	Clause in FCC rules	Limits	Verdict
		However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed. (f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.	
Radiated Spurious Emission	2.1053 90.543 (e)(f)	(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following: (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations. (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB. (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate	PASS

Test Case	Clause in FCC rules	Limits	Verdict
		spectral energy in a 6.25 kHz segment. (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed. (f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.	
LTE Band 26 (814-824MHz)			
RF Power Output and Effective Radiated Power	2.1046 90.635(b)	≤ 100 W (50 dBm)	PASS
Occupied Bandwidth	2.1049	No specific requirements	PASS
Emission Masks	2.1051 90.691(a)(1)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	PASS
Peak-to-Average Power Ratio	KDB 971168 D01(5.7)	≤ 13 dB	PASS

Test Case	Clause in FCC rules	Limits		Verdict						
Frequency Stability	2.1055 90.213	Fixed and base stations	<table><tr><th colspan="2">Mobile stations</th></tr><tr><td>Over 2 watts output power</td><td>2 watts or less output power</td></tr><tr><td>1.5</td><td>2.5</td></tr></table>	Mobile stations		Over 2 watts output power	2 watts or less output power	1.5	2.5	PASS
Mobile stations										
Over 2 watts output power	2 watts or less output power									
1.5	2.5									
Spurious Emissions at Antenna Terminals	2.1051 90.691	≤ -13 dBm		PASS						
Radiated Spurious Emission	2.1053 90.691	≤ -13 dBm		PASS						
LTE Band 30										
RF Power Output and Effective Isotropic Radiated Power	2.1046 27.50(a)(3)	≤ 250 mW/5MHz		PASS						
Occupied Bandwidth	2.1049	No specific requirements		PASS						
Band Edge Compliance	2.1051 27.53(a) (4)	By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than 67 + 10 log (P) dB on all frequencies between 2328 and 2337 MHz; (ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz; (iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.		PASS						
Peak-to-Average Power Ratio	27.50(d)(5) KDB971168 D01(5.7)	≤ 13 dB		PASS						
Frequency Stability	2.1055 / 27.54	Shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.		PASS						

RF Test Report		Report No.: EUT-20250910-12-02-11																													
Test Case	Clause in FCC rules	Limits	Verdict																												
Spurious Emissions at Antenna Terminals	2.1051 27.53(a) (4)	By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than 67 + 10 log (P) dB on all frequencies between 2328 and 2337 MHz; (ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz; (iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.	PASS																												
Radiated Spurious Emission	2.1053 27.53(a) (4)	<table><tr><td>Limit out of the band 2288-2360 MHz</td><td>-40 dBm</td></tr><tr><td>2288-2292 MHz</td><td>-37 dBm</td></tr><tr><td>2292-2296 MHz</td><td>-31 dBm</td></tr><tr><td>2296-2300 MHz</td><td>-25 dBm</td></tr><tr><td>2300-2305 MHz</td><td>-13 dBm</td></tr><tr><td>2305-2315 MHz</td><td>NA</td></tr><tr><td>2315-2320 MHz</td><td>-13 dBm</td></tr><tr><td>2320-2324 MHz</td><td>-25 dBm</td></tr><tr><td>2324-2328 MHz</td><td>-31 dBm</td></tr><tr><td>2328-2337 MHz</td><td>-37 dBm</td></tr><tr><td>2337-2341 MHz</td><td>-31 dBm</td></tr><tr><td>2341-2345 MHz</td><td>-25 dBm</td></tr><tr><td>2345-2350 MHz</td><td>-13 dBm</td></tr><tr><td>2350-2360 MHz</td><td>NA</td></tr></table>	Limit out of the band 2288-2360 MHz	-40 dBm	2288-2292 MHz	-37 dBm	2292-2296 MHz	-31 dBm	2296-2300 MHz	-25 dBm	2300-2305 MHz	-13 dBm	2305-2315 MHz	NA	2315-2320 MHz	-13 dBm	2320-2324 MHz	-25 dBm	2324-2328 MHz	-31 dBm	2328-2337 MHz	-37 dBm	2337-2341 MHz	-31 dBm	2341-2345 MHz	-25 dBm	2345-2350 MHz	-13 dBm	2350-2360 MHz	NA	PASS
Limit out of the band 2288-2360 MHz	-40 dBm																														
2288-2292 MHz	-37 dBm																														
2292-2296 MHz	-31 dBm																														
2296-2300 MHz	-25 dBm																														
2300-2305 MHz	-13 dBm																														
2305-2315 MHz	NA																														
2315-2320 MHz	-13 dBm																														
2320-2324 MHz	-25 dBm																														
2324-2328 MHz	-31 dBm																														
2328-2337 MHz	-37 dBm																														
2337-2341 MHz	-31 dBm																														
2341-2345 MHz	-25 dBm																														
2345-2350 MHz	-13 dBm																														
2350-2360 MHz	NA																														
Date of Testing: September 8, 2025 ~ October 10, 2025 Date of Sample Received: September 1, 2025 Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.																															

Test Case	Clause in FCC rules	Limits	Verdict
All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	Shanghai Sunmi Technology Co., Ltd.
Applicant address	Room 505, No.388, Song Hu Road, Yang Pu District, Shanghai, China
Manufacturer	Shanghai Sunmi Technology Co., Ltd.
Manufacturer address	Room 505, No.388, Song Hu Road, Yang Pu District, Shanghai, China

2.2 General information

EUT Description				
Model	T6721			
SN	Conducted	PF25257G20015		
	Radiated	PF21256J20011		
Hardware Version	Bgf6e			
Software Version	P3_MIX_STD_user_HyperWi-Fi_v054_1.0.5_174_20250703			
Power Supply	Battery / AC adapter			
Antenna Type	Internal Antenna			
Rated Power Supply Voltage	7.2VDC			
Operating Voltage	Minimum: 6.8VDC		Maximum: 8.0VDC	
Operating Temperature	Lowest: 0°C		Highest: +45°C	
Testing Temperature	Lowest: -30°C		Highest: +50°C	
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)	Gain (dBi)
	GSM850	824 ~ 849	869 ~ 894	-0.70
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990	2.60
	WCDMA Band IV	1710 ~ 1755	2110 ~ 2155	2.80
	WCDMA Band V	824 ~ 849	869 ~ 894	-0.70
	LTE Band 2	1850 ~ 1910	1930 ~ 1990	2.60
	LTE Band 4	1710 ~ 1755	2110 ~ 2155	2.80
	LTE Band 5	824 ~ 849	869 ~ 894	-0.70
	LTE Band 7	2500 ~ 2570	2620 ~ 2690	2.50
	LTE Band 12	699 ~ 716	729 ~ 746	-1.20
	LTE Band 13	777 ~ 787	746 ~ 756	-1.20
	LTE Band 14	788 ~ 798	758 ~ 768	-1.20
	LTE Band 17	704 ~ 716	734 ~ 746	-1.20
	LTE Band 25	1850 ~ 1915	1930 ~ 1995	2.60
	LTE Band 26	814 ~ 824	859 ~ 869	-1.20

RF Test Report		Report No.: EUT-A23090010-E-02-R1		
	(814 ~ 824)			
	LTE Band 26 (824 ~ 849)	824 ~ 849	869 ~ 894	-1.20
	LTE Band 30	2305 ~ 2315	2350 ~ 2360	2.30
	LTE Band 38	2570 ~ 2620	2570 ~ 2620	2.50
	LTE Band 41	2496 ~ 2690	2496 ~ 2690	2.50
	LTE Band 66	1710 ~ 1780	2110 ~ 2180	2.80
	LTE Band 71	663 ~ 698	617 ~ 652	-2.30
Test Modulation	(GPRS)GMSK, (EGPRS) GMSK,8PSK; (WCDMA) QPSK; (LTE) QPSK, 16QAM, 64QAM;			
GPRS Multislot Class	12			
EGPRS Multislot Class	12			
HSDPA UE Category	24			
HSUPA UE Category	7			
LTE Category	4			
Power Class	GSM 850: 4 WCDMA / LTE: 3			
Maximum E.I.R.P./ E.R.P.	GSM850	29.53 dBm		
	WCDMA Band II	25.68 dBm		
	WCDMA Band IV	26.22 dBm		
	WCDMA Band V	20.59 dBm		
	LTE Band 2	26.09 dBm		
	LTE Band 4	25.88 dBm		
	LTE Band 5	20.41 dBm		
	LTE Band 7	26.23 dBm		
	LTE Band 12	20.08 dBm		
	LTE Band 13	19.52 dBm		
	LTE Band 14	19.57 dBm		
	LTE Band 17	20.11 dBm		
	LTE Band 25	25.55 dBm		
	LTE Band 26 (824 ~ 849)	19.50 dBm		
	LTE Band 26 (814 ~ 824)	19.81 dBm		
	LTE Band 30	21.98 dBm		
	LTE Band 38	25.61 dBm		
	LTE Band 41	25.16 dBm		
	LTE Band 66	26.13 dBm		
	LTE Band 71	19.00 dBm		
EUT Accessory				

Adapter 1	Manufacturer: SHENZHEN TIANYIN ELECTRONICS CO., LTD. Model: TPA-23A050200UU01 Input: 100-240V~50/60Hz 0.3A Output: 5.0V $\overline{\text{---}}$ 2.0A
Adapter 2	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: UC13US Input: 100-240V~50/60Hz 0.35A Output: 5.0V $\overline{\text{---}}$ 2.0A 10.0W
Battery 1	Manufacturer: Guangdong Pow-Tech New Power Co., Ltd. Model: LKPA DC 7.2V, 2500mAh
Battery 2	Manufacturer: POWER GLORY BATTERY TECH(HK) CO LTD Model: CR2032 DC 3V, 220mAh
Battery 3	Manufacturer: JHIH HONG TECHNOLOGY CO LTD Model: CR2032 DC 3V, 220mAh
USB Cable	Manufacturer: Saibao (Jiangxi) Industry Co., LTD Model: SSM-A001A
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant. 2. Two-thirds of the batteries are backup batteries for financial tamper-proof authentication. When the main battery (Battery 1) is powered off, Batteries 2 and 3 are used to detect and trigger an alarm.	

3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 22H (2025)

FCC CFR 47 Part 24E (2025)

FCC CFR 47 Part 27C (2025)

FCC CFR 47 Part 90S (2025)

FCC CFR 47 Part 90R (2025)

Reference standard:

FCC CFR 47 Part 2 (2025)

ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test items	Modes/Modulation	
	GSM 850	WCDMA Band 2/4/5
RF Power Output and Effective (Isotropic) Radiated power	GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA
Occupied Bandwidth	GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GPRS(1Tx slot)	RMC
Radiated Spurious Emission	GPRS(1Tx slot)	RMC

Test modes are chosen to be reported as the worst case configuration below for LTE Band:

Test items	Modes	Bandwidth (MHz)						Modulation		RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM/ 64QAM	1	50%	100%	L	M	H
RF Power Output and Effective Isotropic Radiated Power	LTE 2	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 4	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 5	O	O	O	O	-	-	O	O	O	O	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 12	O	O	O	O	-	-	O	O	O	O	O	O	O	O
	LTE 13	-	-	O	O	-	-	O	O	O	O	O	O	O	O
	LTE 14	-	-	O	O	-	-	O	O	O	O	O	O	O	O
	LTE 17	-	-	O	O	-	-	O	O	O	O	O	O	O	O
	LTE 25	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 26 (814-824)	O	O	O	O	-	-	O	O	O	O	O	O	O	O
	LTE 26 (824-849)	O	O	O	O	O	-	O	O	O	O	O	O	O	O
	LTE 30	-	-	O	O	-	-	O	O	O	O	O	O	O	O
	LTE 38	-	-	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 41	-	-	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 66	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 71	-	-	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	LTE 2	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 5	O	O	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 12	O	O	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 13	-	-	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 14	-	-	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 17	-	-	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 25	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 26 (814-824)	O	O	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 26 (824-849)	O	O	O	O	O	-	O	O	-	-	O	O	O	O
	LTE 30	-	-	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 38	-	-	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 41	-	-	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 66	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 71	-	-	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	LTE 2	O	O	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 4	O	O	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 5	O	O	O	O	-	-	O	O	O	-	O	O	-	O
	LTE 7	-	-	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 12	O	O	O	O	-	-	O	O	O	-	O	O	-	O
	LTE 13	-	-	O	O	-	-	O	O	O	-	O	O	-	O
	LTE 14	-	-	O	O	-	-								
	LTE 17	-	-	O	O	-	-	O	O	O	-	O	O	-	O

	LTE 25	O	O	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 26 (814-824)	O	O	O	O	-	-	O	O	O	-	O	O	-	O
	LTE 26 (824-849)	O	O	O	O	O	-	O	O	O	-	O	O	-	O
	LTE 30	-	-	O	O	-	-	O	O	O	-	O	O	-	O
	LTE 38	-	-	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 41	-	-	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 66	O	O	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 71	-	-	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	LTE 2	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 5	O	O	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 12	O	O	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 13	-	-	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 14	-	-	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 17	-	-	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 25	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 26 (814-824)	O	O	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 26 (824-849)	O	O	O	O	O	-	O	O	-	-	O	O	O	O
	LTE 30	-	-	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 38	-	-	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 41	-	-	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 66	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 71	-	-	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	LTE 2	O	O	O	O	O	O	O	-	-	-	O	O	-	O
	LTE 4	O	O	O	O	O	O	O	-	-	-	O	O	-	O
	LTE 5	O	O	O	O	-	-	O	-	-	-	O	-	O	-
	LTE 7	-	-	O	O	O	O	O	-	-	-	O	O	-	O
	LTE 12	O	O	O	O	-	-	O	-	-	-	O	O	-	O
	LTE 13	-	-	O	O	-	-	O	-	-	-	O	O	-	O
	LTE 14	-	-	O	O	-	-	O	-	-	-	O	O	-	O
	LTE 17	-	-	O	O	-	-	O	-	-	-	O	O	-	O
	LTE 25	O	O	O	O	O	O	O	-	-	-	O	O	-	O
	LTE 26 (814-824)	O	O	O	O	-	-	O	-	-	-	O	-	O	-
	LTE 26 (824-849)	O	O	O	O	O	-	O	-	-	-	O	-	O	-
	LTE 30	-	-	O	O	-	-	O	-	-	-	O	O	-	O
	LTE 38	-	-	O	O	O	O	O	-	-	-	O	O	-	O
	LTE 41	-	-	O	O	O	O	O	-	-	-	O	O	-	O
	LTE 66	O	O	O	O	O	O	O	-	-	-	O	O	-	O
	LTE 71	-	-	O	O	O	O	O	-	-	-	O	O	-	O
Spurious Emissions at Antenna	LTE 2	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 4	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 5	O	O	O	O	-	-	O	-	O	-	-	O	O	O
	LTE 7	-	-	O	O	O	O	O	-	O	-	-	O	O	O

RF Test Report
Report No.: EFTA25090010-IE-02-R1

Terminals	LTE 12	O	O	O	O	-	-	O	-	O	-	-	O	O	O
	LTE 13	-	-	O	O	-	-	O	-	O	-	-	O	O	O
	LTE 14	-	-	O	O	-	-	O	-	O	-	-	O	O	O
	LTE 17	-	-	O	O	-	-	O	-	O	-	-	O	O	O
	LTE 25	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 26 (814-824)	O	O	O	O	-	-	O	-	O	-	-	O	O	O
	LTE 26 (824-849)	O	O	O	O	O	-	O	-	O	-	-	O	O	O
	LTE 30	-	-	O	O	-	-	O	-	O	-	-	O	O	O
	LTE 38	-	-	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 41	-	-	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 66	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 71	-	-	O	O	O	O	O	-	O	-	-	O	O	O
Radiated Spurious Emission	LTE 2	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 4	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 5	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 7	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 12	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 13	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 14	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 17	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 25	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 26 (814-824)	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 26 (824-849)	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 30	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 38	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 41	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 66	-	-	O	-	-	-	O	-	O	-	-	-	O	-
	LTE 71	-	-	O	-	-	-	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.														

5 Test Case

5.1 RF Power Output and Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


For the 10MHz bandwidth power of Band 30, using 10MHz data is worse than using 5MHz data.

ERP can then be calculated as follows:

EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

EIRP (dBm) = ERP (dBm) + 2.15 (dB.)

Test Setup

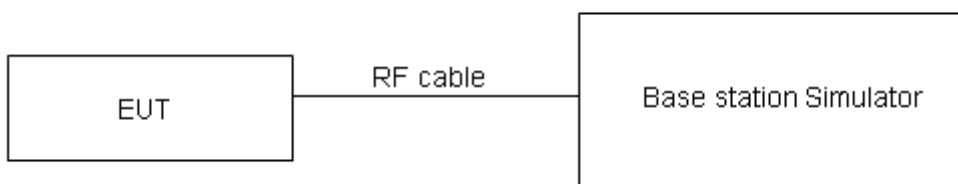

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB for RF power output, $k = 2$, $U= 1.19$ dB for ERP/EIRP.

Test Results

The detailed test data see EFTA25090010-IE-02-R1-ANNEX A Test Result.

5.2 Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to $\geq 1\%EBW$, VBW is set to 3x RBW.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

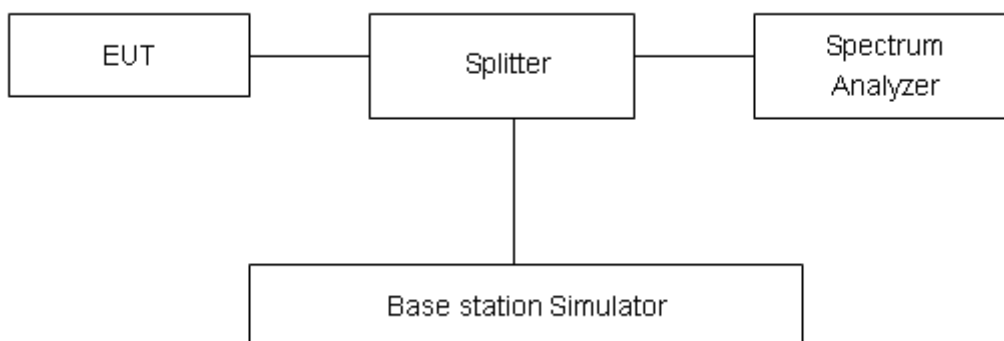

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=624\text{Hz}$.

Test Results

The detailed test data see EFTA25090010-IE-02-R1-ANNEX B Test Result.

5.3 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 D01 v03r01 Section 6.0

The EUT was connected to spectrum analyzer and system simulator via a power divider.

The band edges of low and high channels for the highest RF powers were measured.

For LTE Band 7/38 set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.


For LTE Band 41 the middle channel, high channel set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge. Beyond the 1 MHz band from the band edge, RBW=1MHz was used; Low channel set RBW $\geq$ 2% EBW in the 1MHz band immediately outside and adjacent to the band edge. Beyond the 1 MHz band from the band edge, RBW=1MHz was used. RBW is set to $\geq$ 1%EBW, VBW is set to 3x RBW on spectrum analyzer.

Set spectrum analyzer with RMS detector.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Checked that all the results comply with the emission limit line.

Test Setup

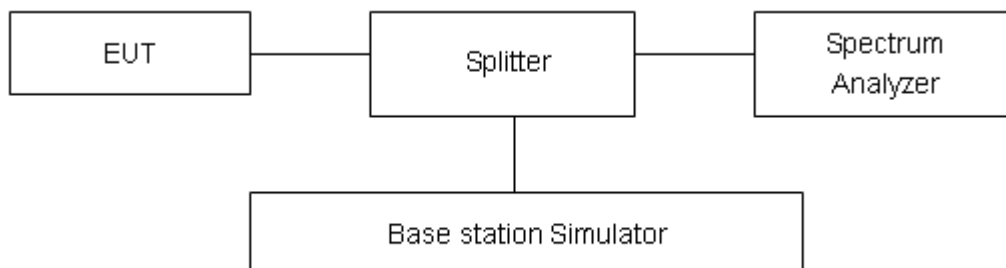

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684\text{dB}$.

Test Results

The detailed test data see EFTA25090010-IE-02-R1-ANNEX C Test Result.

5.4 Peak-to-Average Power Ratio (PAPR)

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Methods of Measurement


The following guidelines are offered for performing a CCDF measurement.

- (1) Set resolution/measurement bandwidth $\geq$ OBW
- (2) Set the number of counts to a value that stabilizes the measured CCDF curve
- (3) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.

For continuous transmissions, set to the greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.

- (4) Record the maximum PAPR level associated with a probability of 0.1%.

Test Setup

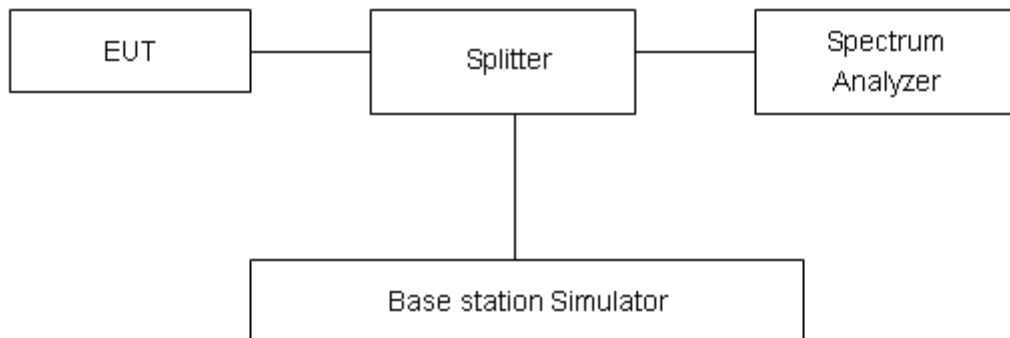

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

The detailed test data see EFTA25090010-IE-02-R1-ANNEX D Test Result.

5.5 Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size.

(1) With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 6.8 V and 8.0 V, with a nominal voltage of 7.2V.

Test setup

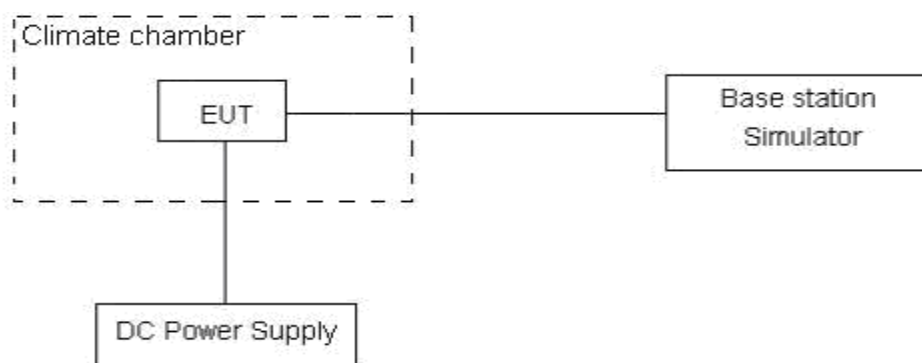

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.

Test Results

The detailed test data see EFTA25090010-IE-02-R1-ANNEX E Test Result.

5.6 Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),

RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 1000 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)


For Band 2/7/38/41/66, the RBW is set to 100KHz below 1G, and the factor is 10dB for 1MHz.

Sweep is set to AUTO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

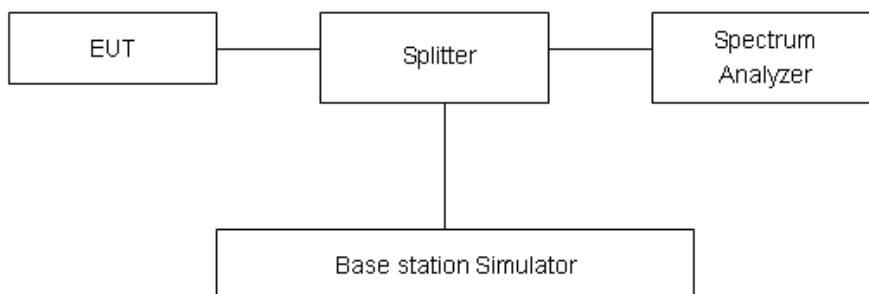

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
above 1GHz	1.407 dB

Test Results

The detailed test data see EFTA25090010-IE-02-R1-ANNEX F Test Result.

5.7 Radiated Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26-2015.
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dB}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz~ 30MHz

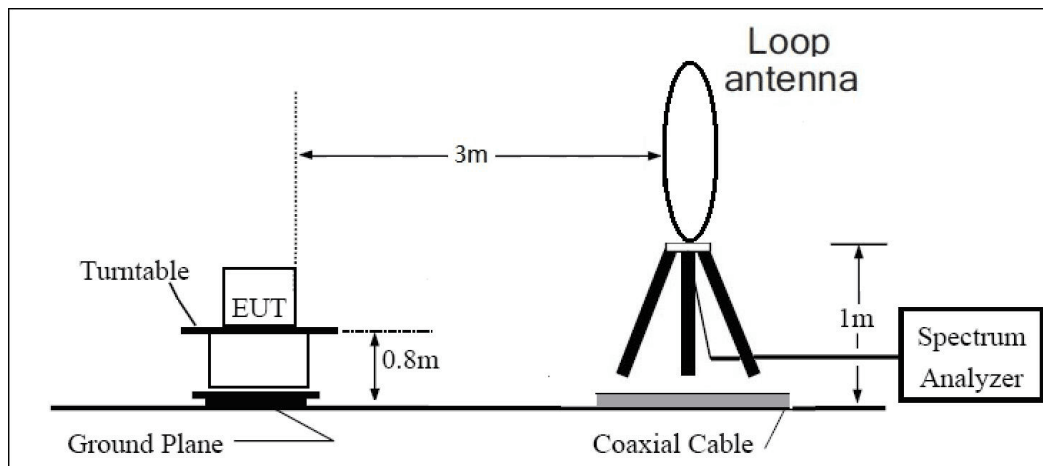

30MHz~ 1GHz

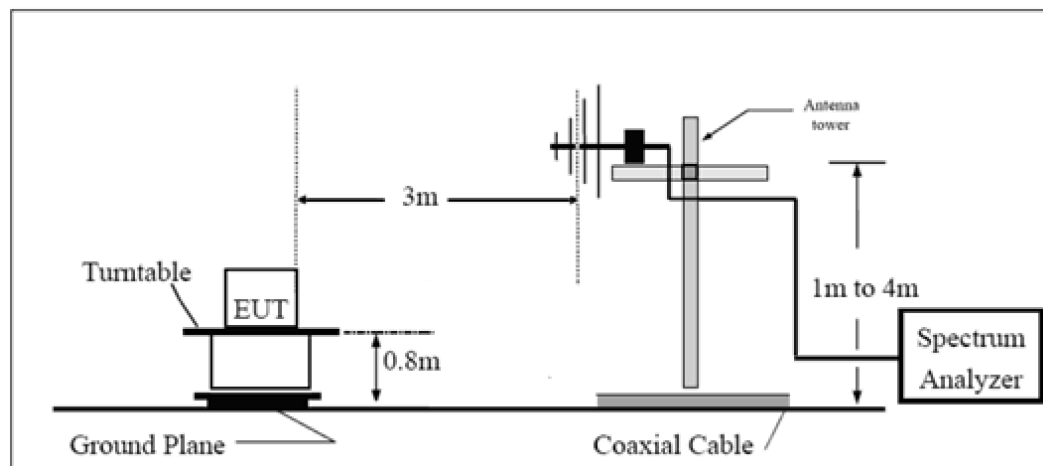

Above 1GHz

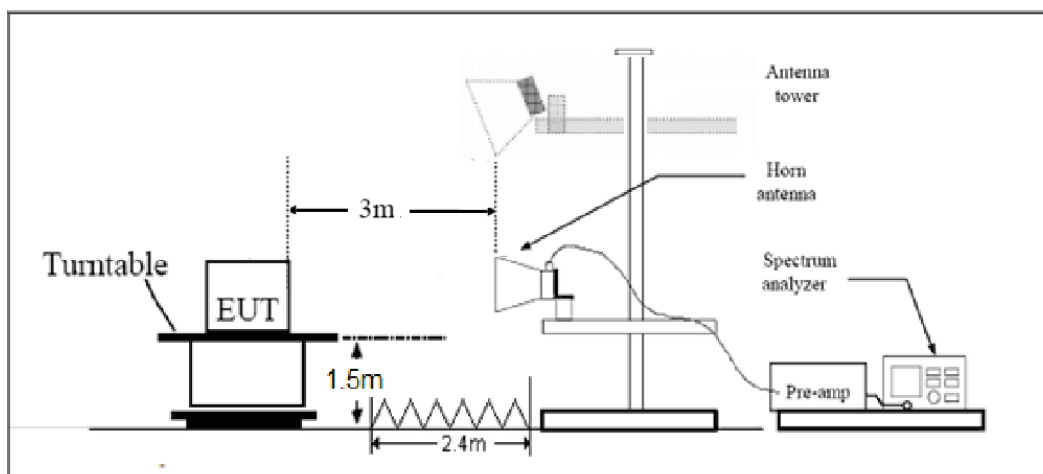

Note: Area side:2.4mX3.6m

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Results

The detailed test data see EFTA25090010-IE-02-R1-ANNEX G Test Result.

6 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Wireless Communication Tester	Anritsu	MT8821C	6201538758	2025-05-06	2026-05-05
Climate Chamber	WEISS	VT 4002	582261194500 10	2025-05-06	2026-05-05
Spectrum Analyzer	Keysight	N9020A	MY52330084	2025-05-06	2026-05-05
DC Power Supply	UNI-T	UTP1310+	C220795889	2025-05-06	2026-05-05
Spectrum Analyzer	R&S	FSV3030	101411	2024-12-02	2025-12-01
Wireless Communication Tester	R&S	CMW500	150415	2025-05-06	2026-05-05
Attenuator	HASCO	HA18A-10	0003	-	-
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1439	2024-07-06	2027-07-05
Spectrum Analyzer	R&S	FSV30	100815	2024-12-02	2025-12-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1439	2024-07-06	2027-07-05
Horn Antenna	SCHWARZBECK	BBHA 9120D	1594	2023-12-05	2026-12-04
Horn Antenna	ETS-Lindgren	3160-09	00102643	2024-09-24	2027-09-23
Horn Antenna	STEATITE	QSH-SL-26-40-K-15	16779	2023-01-17	2026-01-16
Software	R&S	EMC32	10.35.10	/	/

7 The EUT Appearance

Refer to *EUT Appearance*.

8 Test Setup Photos

Refer to *Part22_24_27_90 Test Setup*.

***** END OF REPORT *****