



Report No.: SUCR260800075305

Page: 1 of 332

TEST REPORT

Application No.: SUCR2608000753TL
FCC ID: 2AH25T3PROW
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant: Room 505,No.388,Song Hu Road, Yang Pu District,Shanghai,China
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer: Room 505,No.388,Song Hu Road, Yang Pu District,Shanghai,China
Equipment Under Test (EUT):
EUT Name: POS System
Model No.: L15E1;L15F1 ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: SUNMI
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2026-08-07
Date of Test: 2026-08-31 to 2026-09-15
Date of Issue: 2026-09-17


Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2026-09-17	/

Authorized for issue by:				
Prepared By				
		Hayley_Zhang/Project Engineer		
Approved By				
		Cedar Cheng /Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10-2020+Cor.1-2023 Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10-2020+Cor.1-2023 Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10-2020+Cor.1-2023 Section 6.6 & 12.7	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10-2020+Cor.1-2023 Section 6.10.5 & 12.7.2	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Duty Cycle		ANSI C63.10-2020+Cor.1-2023 Section 12.2	ANSI C63.10-2020+Cor.1-2023 Section 12.2	Pass
99% Bandwidth		ANSI C63.10-2020+Cor.1-2023 Section 6.9.3	ANSI C63.10-2020+Cor.1-2023 Section 12.5.3	Pass
26dB Emission Bandwidth		ANSI C63.10-2020+Cor.1-2023 Section 12.5.2	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB Bandwidth (5.725-5.85 GHz band)		ANSI C63.10-2020+Cor.1-2023 Section 12.5.1	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Maximum Conducted Output Power		ANSI C63.10-2020+Cor.1-2023 Section 12.4	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Power Spectral Density		ANSI C63.10-2020+Cor.1-2023 Section 12.6	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Non-occupancy Period		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Channel Move Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Channel Closing Transmission Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass



Report No.: SUCR260800075305

Page: 4 of 332

Declaration of EUT Family Grouping:

Note: There are series models mentioned in this report, and the only difference between the two models is that L15F1 comes with a printer and L15E1 does not come with a printer, everything else is the same. Based on the above differences, complete testing will be conducted for L15F1 model, while L15E1 model will only check EMC.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary.....	3
3 Contents	5
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Environment Parameter.....	7
4.3 Description of Support Units.....	7
4.4 Measurement Uncertainty & Decision Rule.....	7
4.5 Test Location	8
4.6 Test Facility.....	8
4.7 Deviation from Standards	8
4.8 Abnormalities from Standard Conditions.....	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement.....	11
6.1 Antenna Requirement	11
6.2 Transmission in the Absence of Data	13
7 Radio Spectrum Matter Test Results.....	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	14
7.2 Radiated Emissions (Below 1GHz).....	18
7.3 Radiated Emissions (Above 1GHz).....	23
7.4 Radiated Emissions which fall in the restricted bands	106
7.5 Duty Cycle	191
7.6 99% Bandwidth	192
7.7 26dB Emission Bandwidth	193
7.8 Minimum 6 dB Bandwidth (5.725-5.85 GHz band)	194
7.9 Maximum Conducted Output Power	195
7.10 Power Spectral Density	197
7.11 Non-occupancy Period	198
7.12 Channel Move Time	201
7.13 Channel Closing Transmission Time	204
8 Test Setup Photo	207
9 EUT Constructional Details (EUT Photos).....	207
10 Appendix.....	208

4 General Information

4.1 Details of E.U.T.

Power supply:	Adapter1(SOY-2400400-410-B): INPUT: AC100-240V 50/60Hz 2.5A Max; OUTPUT: DC24V4A 96W Adapter2(TPQ-632A240250DW01): INPUT: AC100-240V 50/60Hz 1.5A; OUTPUT: DC24V2.5A 60W
Operation Frequency/Number of channels (20MHz):	U-NII-1: 5180-5240MHz (4 Channels); U-NII-2A: 5260-5320MHz (4 Channels); U-NII-2C: 5500-5700MHz (11 Channels); U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-1: 5190-5230MHz (2 Channels); U-NII-2A: 5270-5310MHz (2 Channels); U-NII-2C: 5510-5670MHz (5 Channels); U-NII-3: 5755-5795MHz (2 Channels)
Operation Frequency/Number of channels (80MHz):	U-NII-1: 5210MHz (1 Channel); U-NII-2A: 5290MHz (1 Channels); U-NII-2C: 5530-5610MHz (2 Channels); U-NII-3: 5775MHz (1 Channel)
Operation Frequency/Number of channels (160MHz):	U-NII-1&2A: 5250MHz (1 Channel); U-NII-2C: 5570MHz (1 Channels)
Modulation Type:	802.11a: OFDM (BPSK, QPSK, 16-QAM, 64-QAM); 802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM); 802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM); 802.11ax: OFDMA (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM)
Channel Spacing:	802.11a/n/ac/ax 20: 20MHz; 802.11n/ac/ax 40: 40MHz; 802.11ac/ax 80: 80MHz; 802.11ac/ax 160: 160MHz
DFS Function:	Slave without Radar detection
TPC Function:	Not Support TPC function
Antenna Type:	FPC Antenna
Antenna Gain:	U-NII-1: 2.53dBi (Ant1),1.32dBi (Ant2); U-NII-2A: 2.55dBi (Ant1),1.86dBi (Ant2); U-NII-2C: 3.07dBi (Ant1),2.71dBi (Ant2); U-NII-3: 3.36dBi (Ant1),2.99dBi (Ant2); (Provided by the manufacturer)
Remark:	802.11a/n/ac/ax: SISO 802.11n/ac/ax: MIMO

Remark:

- 1.The device does not support 802.11ax OFDMA Partial RU tones.
2. Regarding radiation testing, both 11n/ac/ax have been tested, and 11ax was found to be the worst case scenario which was performed full test and recorded in this test report.

4.2 Environment Parameter

Environment Parameter	Selected Values During Tests	
Relative Humidity	42-45%	
Value	Temperature(°C)	Voltage(V)
NTNV	21-23	24
Note: NV:Normal Voltage LV:Low Extreme Test Voltage HV:High Extreme Test Voltage NT:Normal Temperature LT:Low Extreme Test Temperature HT:High Extreme Test Temperature		

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.4 Measurement Uncertainty & Decision Rule

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 1.56\text{dB}$ (9KHz-30MHz)
		$\pm 4.80\text{dB}$ (30MHz-1GHz)
		$\pm 4.80\text{dB}$ (1GHz-18GHz)
		$\pm 4.80\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1\%$
12	Time	$\pm 3\%$

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results
 – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
 – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

4.5 Test Location

All tests were performed at:

SGS Tongfang Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS Tongfang Technical Services (Suzhou) Co., Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1312)**

This site has been recognized as an accredited testing laboratory. Test Firm Registration Number:717327

- **ISED (CAB Identifier: CN0120)**

This site has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESR7	SUWI-01-10-01	1/14/2026	1/13/2027
2	LISN	R&S	ENV216	SUWI-01-19-03	4/22/2026	4/21/2027
3	LISN	Schwarzbeck	ENV216	SUWI-01-19-04	4/22/2026	4/21/2027
4	Test Software	Tonscend	JS32-CE 4.0.0.2	SUWI-02-09-05	N.C.R	N.C.R
5	Test Cable	Tonscend	NA	SUWI-01-03-04	4/22/2026	4/21/2027
RF Conducted Test						
1	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
2	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	11/21/2025	11/20/2026
3	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/14/2026	1/13/2027
4	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	1/15/2026	1/14/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-08-01	1/14/2026	1/13/2027
6	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	1/15/2026	1/14/2027
7	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	4/22/2026	4/21/2027
8	Wideband Radio Communication Test Station	Anritsu	MT8000A	SUWI-01-34-02	11/20/2025	11/19/2026
9	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/20/2025	11/19/2026
10	Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/20/2025	11/19/2026
11	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/11/2026	2/10/2027
12	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	4/28/2026	4/27/2027
13	Measurement Software	TST	TST 272 V2.02	SUWI-03-55-03	NCR	NCR
14	RF Control unit	TST	TSCB3023R2	SUWI-02-20-01	NCR	NCR
15	RFCables	Tonscend	NA	SUWI-01-03-01	1/15/2026	1/14/2027
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/9/2026	6/8/2029
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/20/2025	11/19/2026
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/14/2026	1/13/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	1/14/2026	1/13/2027
6	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	11/29/2025	11/28/2027
7	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027

8	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
9	Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/14/2026	1/13/2027
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/14/2026	1/13/2027
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/14/2026	1/13/2027
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	7/29/2026	7/28/2027
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/20/2025	11/19/2026
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	7/29/2026	7/28/2027
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-06	11/21/2025	11/20/2026
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	1/14/2026	1/13/2027
18	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/11/2026	2/10/2027
19	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
20	RF Control unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
21	RF Cables	Tonscend	NA	SUWI-01-03-02	1/15/2026	1/14/2027

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna are FPC Antenna no consideration of replacement. The best case gain are:

U-NII-1: 2.53dBi (Ant1), 1.32dBi (Ant2);

U-NII-2A: 2.55dBi (Ant1), 1.86dBi (Ant2);

U-NII-2C: 3.07dBi (Ant1), 2.71dBi (Ant2);

U-NII-3: 3.36dBi (Ant1), 2.99dBi (Ant2);

Antenna location: Refer to internal photo.

Cyclic Delay Diversity (CDD) System:

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For power, the directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain.

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The Power and PSD limit should be modified if the directional gain of eut is over 6dbi.

The EUT supports CDD System.

All antennas have Unequal antenna gain:

Operation Frequency	ANT Gain1 (dBi)	ANT Gain2 (dBi)	Directional gain For Power (dBi)	Directional gain For PSD (dBi)	Power Limit Reduction (dBm)	PSD Limit Reduction (dBm)
5150MHz to 5250MHz	2.53	1.32	2.53	4.96	0.00	0.00
5250MHz to 5350MHz	2.55	1.86	2.55	5.22	0.00	0.00
5470MHz to 5725MHz	3.07	2.71	3.07	5.90	0.00	0.00
5725MHz to 5850MHz	3.36	2.99	3.36	6.19	0.00	0.19

5150MHz to 5250MHz:

Power Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

PSD Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

5250MHz to 5350MHz:

Power Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

PSD Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

5470MHz to 5725MHz:

Power Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

PSD Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

5725MHz to 5850MHz:

Power Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

PSD Limit Reduction = Directional gain – 6dBi, (Directional gain > 6dBi) =0.19

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 21 °C


Humidity: 45 % RH

Atmospheric Pressure: 1001 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80/160, Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

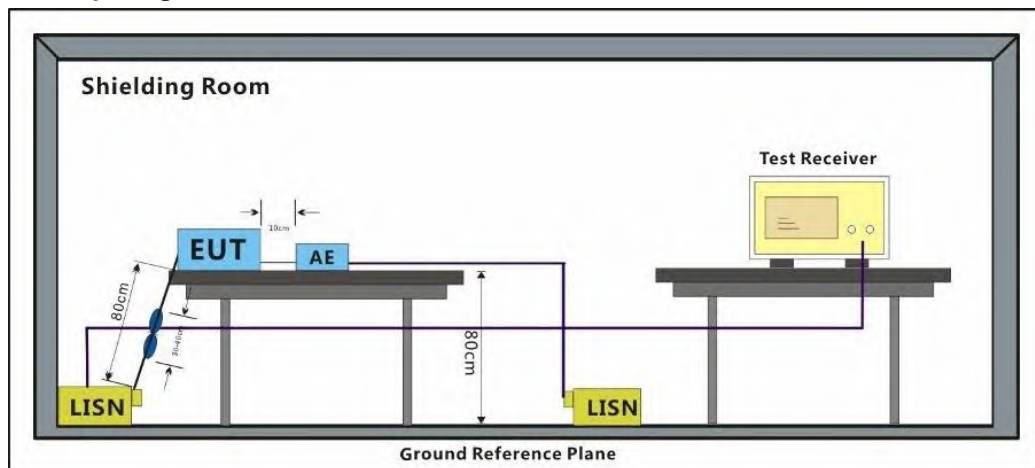


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{LISN Factor}$

Remark 2: Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120/60Hz as worst case.


Test Mode: 04; Line: Live line

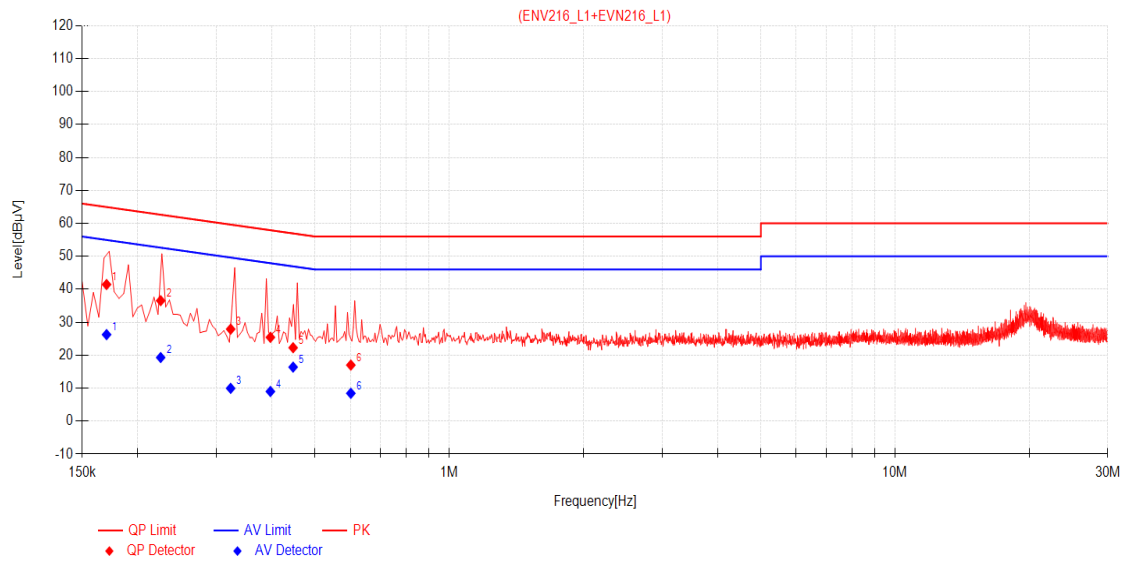

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1702	9.95	31.50	41.45	64.95	23.50	16.30	26.25	54.95	28.70	PASS
2	0.2251	9.96	26.59	36.55	62.63	26.08	9.34	19.30	52.63	33.33	PASS
3	0.3231	9.96	17.95	27.91	59.63	31.72	-0.01	9.95	49.63	39.68	PASS
4	0.3968	9.96	15.47	25.43	57.92	32.49	-0.97	8.99	47.92	38.93	PASS
5	0.4462	9.95	12.33	22.28	56.95	34.67	6.44	16.39	46.95	30.56	PASS
6	0.6012	9.96	7.04	17.00	56.00	39.00	-1.51	8.45	46.00	37.55	PASS

Test Mode: 04; Line: Neutral Line

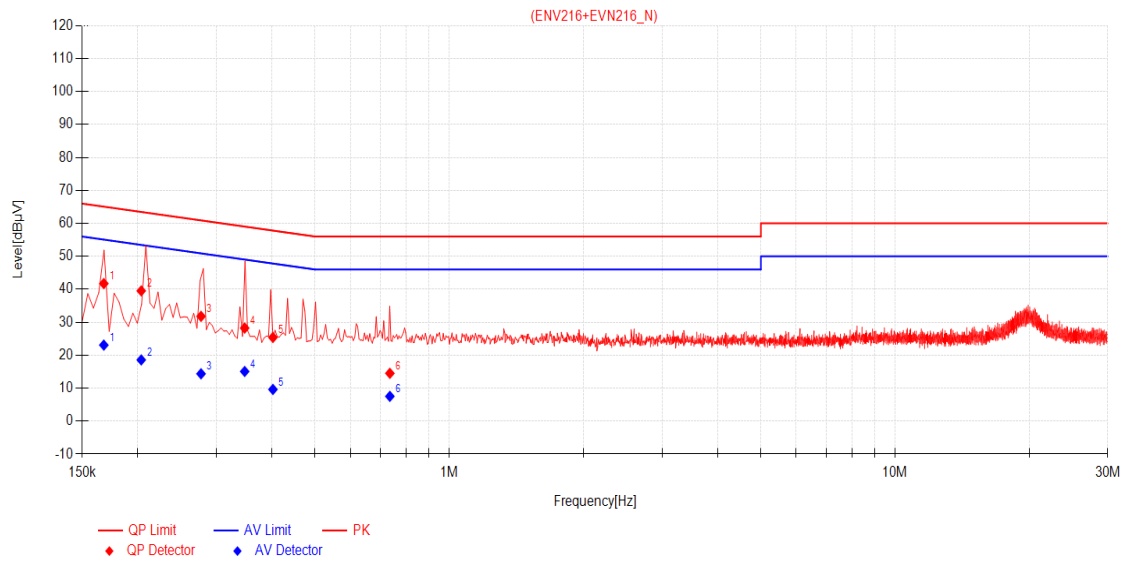

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1678	9.95	31.78	41.73	65.07	23.34	13.12	23.07	55.07	32.00	PASS
2	0.2036	9.98	29.55	39.53	63.46	23.93	8.59	18.57	53.46	34.89	PASS
3	0.2773	9.96	21.84	31.80	60.90	29.10	4.41	14.37	50.90	36.53	PASS
4	0.3474	9.96	18.27	28.23	59.02	30.79	5.11	15.07	49.02	33.95	PASS
5	0.4020	9.94	15.45	25.39	57.81	32.42	-0.32	9.62	47.81	38.19	PASS
6	0.7355	9.91	4.60	14.51	56.00	41.49	-2.39	7.52	46.00	38.48	PASS

7.2 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

Note

1.The above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

2. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 21 °C


Humidity: 45 % RH

Atmospheric Pressure: 1001 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80/160, Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

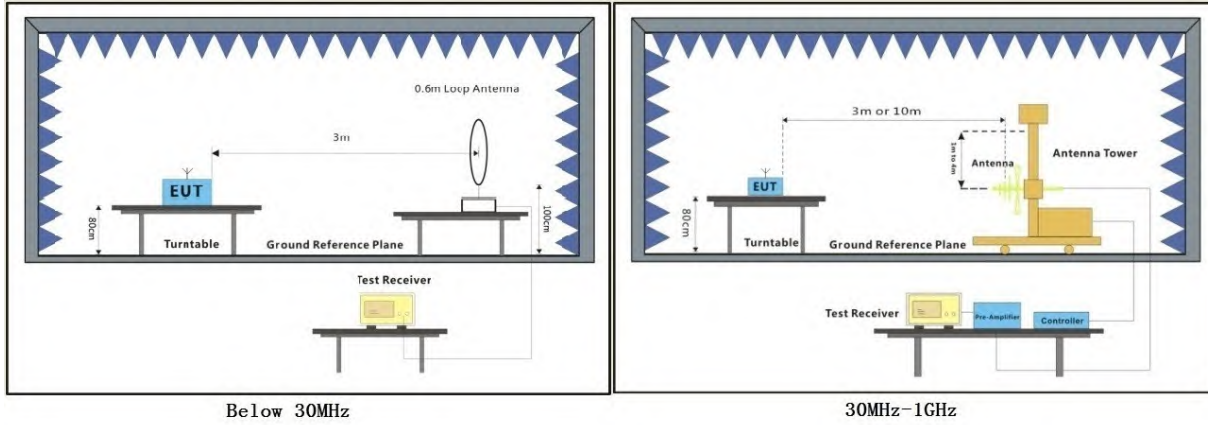

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.


EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.

Test Mode: 04; Polarity: Horizontal

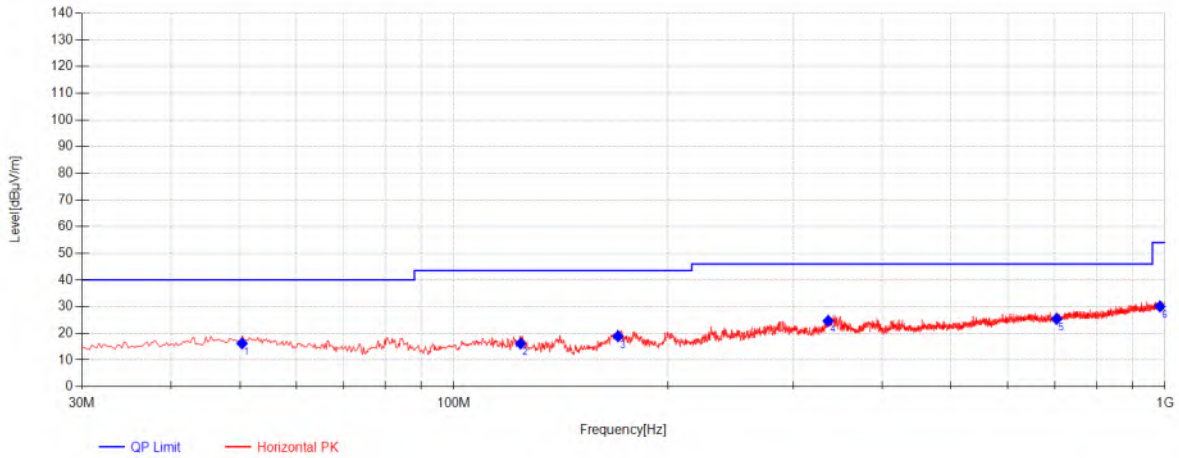

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	50.37	36.86	20.34	-40.98	16.22	40.00	23.78	Horizontal
2	124.09	41.02	15.19	-40.08	16.13	43.50	27.37	Horizontal
3	170.165	42.81	15.65	-39.56	18.90	43.50	24.60	Horizontal
4	336.035	42.42	20.24	-38.02	24.64	46.00	21.36	Horizontal
5	703.9075	36.4	24.63	-35.63	25.40	46.00	20.60	Horizontal
6	983.7525	36.37	27.48	-33.79	30.06	54.00	23.94	Horizontal

Test Mode: 04; Polarity: Vertical

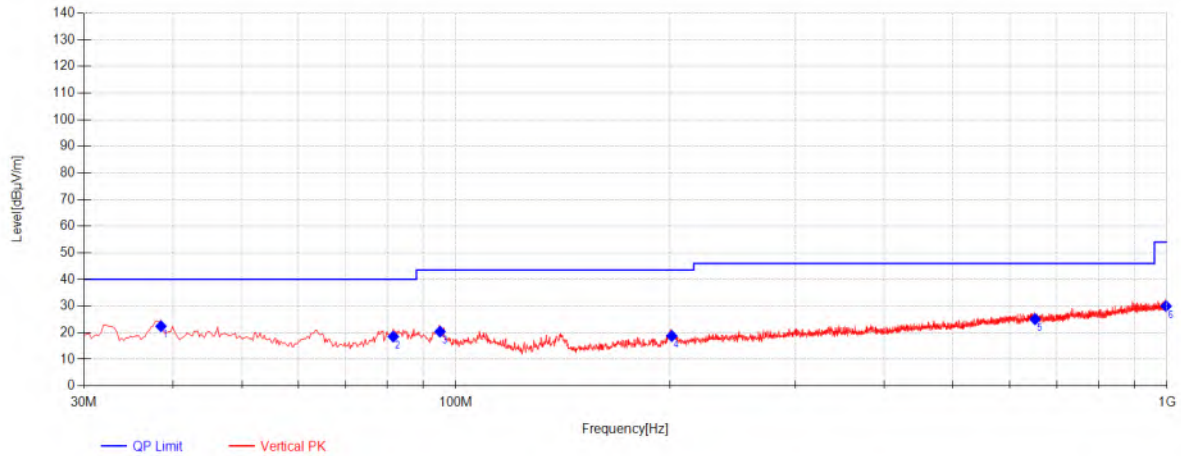

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	38.4875	44.96	18.65	-41.22	22.39	40.00	17.61	Vertical
2	81.6525	44.9	14.17	-40.56	18.51	40.00	21.49	Vertical
3	94.99	44.79	16.00	-40.42	20.37	43.50	23.13	Vertical
4	201.205	37.05	20.93	-39.24	18.74	43.50	24.76	Vertical
5	652.255	36.06	24.81	-35.81	25.06	46.00	20.94	Vertical
6	996.8475	35.58	28.10	-33.72	29.96	54.00	24.04	Vertical

7.3 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.6 & 12.7

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark:

1. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

2. Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 21 °C


Humidity: 45 % RH

Atmospheric Pressure: 1001 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80/160, Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

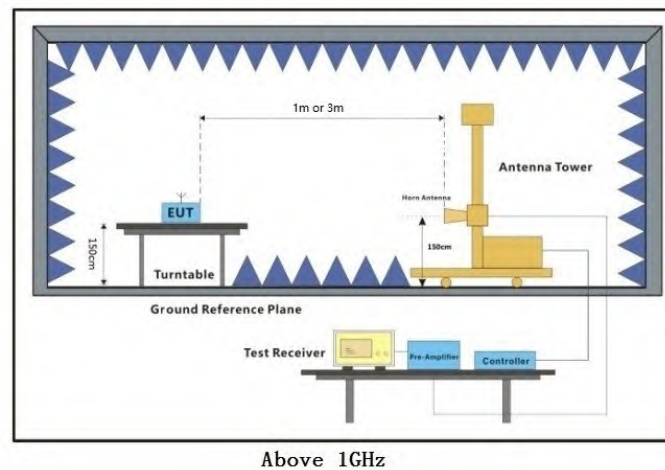


7.3.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 40GHz, The points marked on below plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the below harmonics were the highest point could be found when testing, so only the below harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

11a_TX_CH_36_Horizontal ANT1

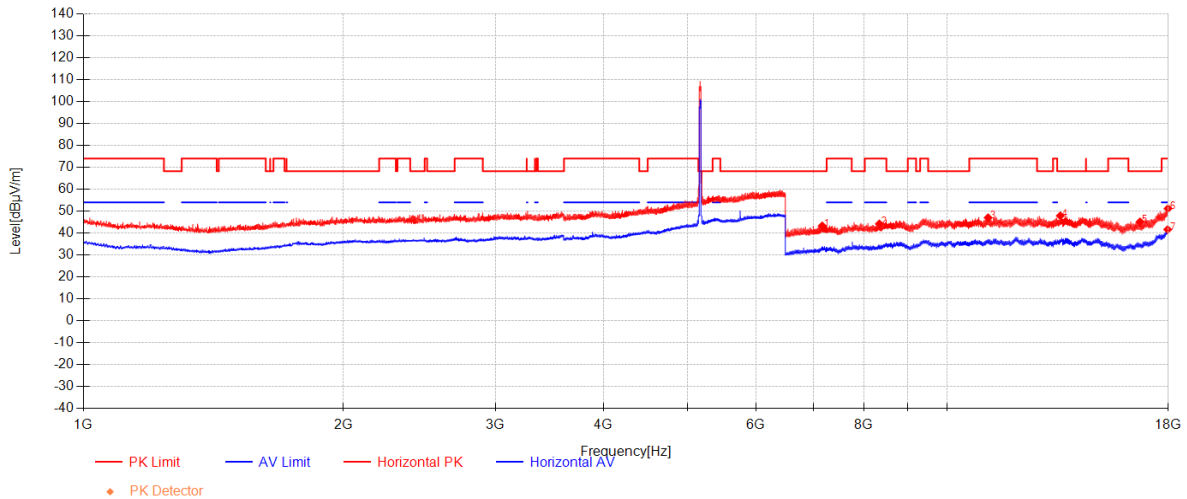


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7163.6458	53.20	35.79	-45.69	43.30	68.30	25.00	Horizontal
2	8341.4375	52.01	36.68	-44.48	44.21	74.00	29.79	Horizontal
3	11145.5208	47.59	39.49	-40.04	47.04	74.00	26.96	Horizontal
4	13510.2083	47.25	39.57	-38.89	47.92	68.30	20.38	Horizontal
5	16707.6875	44.21	38.68	-37.74	45.15	68.30	23.15	Horizontal
6	18000	43.37	44.80	-36.98	51.19	74.00	22.81	Horizontal
7	17985.625	33.94	44.71	-37.02	41.63	54.00	12.37	Horizontal

11a_TX_CH_36_Vertical ANT1

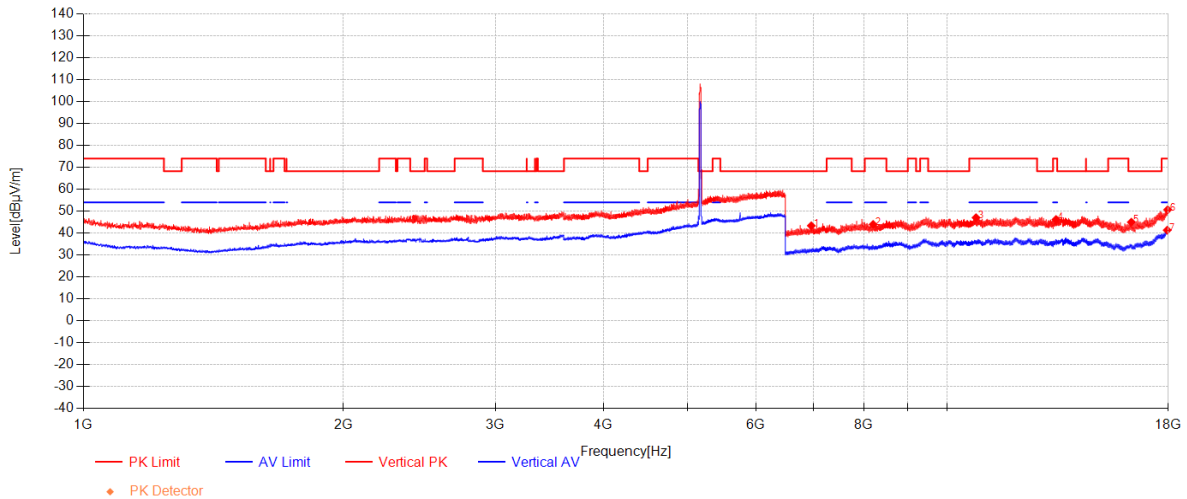


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6959.0417	53.93	35.43	-46.00	43.36	68.30	24.94	Vertical
2	8205.3542	51.68	36.53	-44.24	43.97	74.00	30.03	Vertical
3	10793.3333	48.19	39.36	-40.47	47.07	74.00	26.93	Vertical
4	13356.3958	45.71	39.33	-38.81	46.23	74.00	27.77	Vertical
5	16327.7083	44.35	38.53	-37.89	44.99	68.30	23.31	Vertical
6	17986.5833	42.99	44.72	-37.02	50.69	74.00	23.31	Vertical
7	17962.625	33.86	44.58	-37.08	41.35	54.00	12.65	Vertical

11a_TX_CH_40_Horizontal ANT1

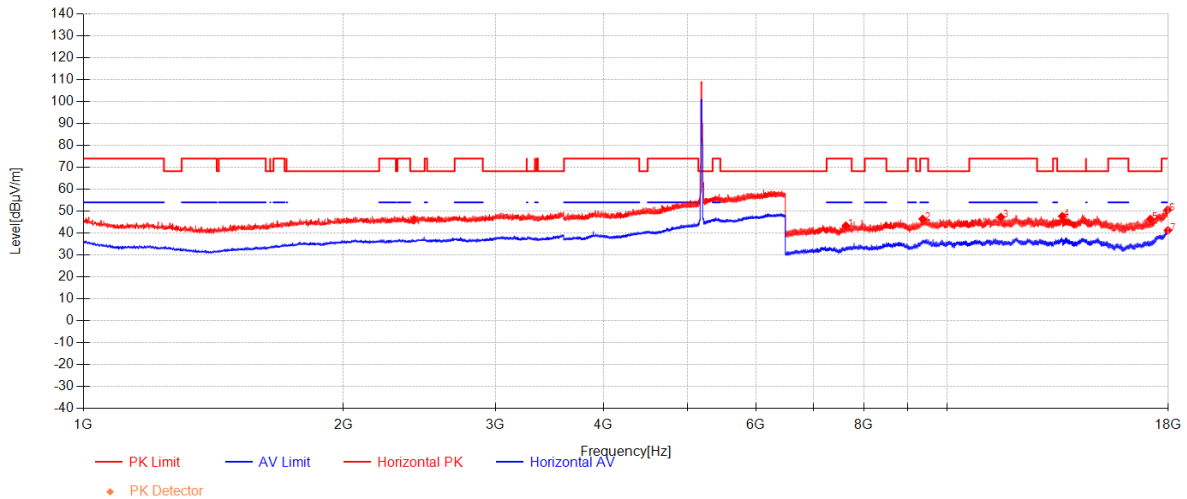


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7630.3542	51.95	36.37	-44.96	43.37	74.00	30.63	Horizontal
2	9362.5417	51.40	37.91	-42.86	46.45	74.00	27.55	Horizontal
3	11529.8125	47.67	39.45	-39.83	47.29	74.00	26.71	Horizontal
4	13580.6458	46.41	39.67	-38.41	47.67	68.30	20.63	Horizontal
5	17175.3542	43.80	39.85	-37.28	46.37	68.30	21.93	Horizontal
6	17982.75	42.91	44.70	-37.03	50.58	74.00	23.42	Horizontal
7	17995.2083	33.49	44.77	-36.99	41.27	54.00	12.73	Horizontal

11a_TX_CH_40_Vertical ANT1

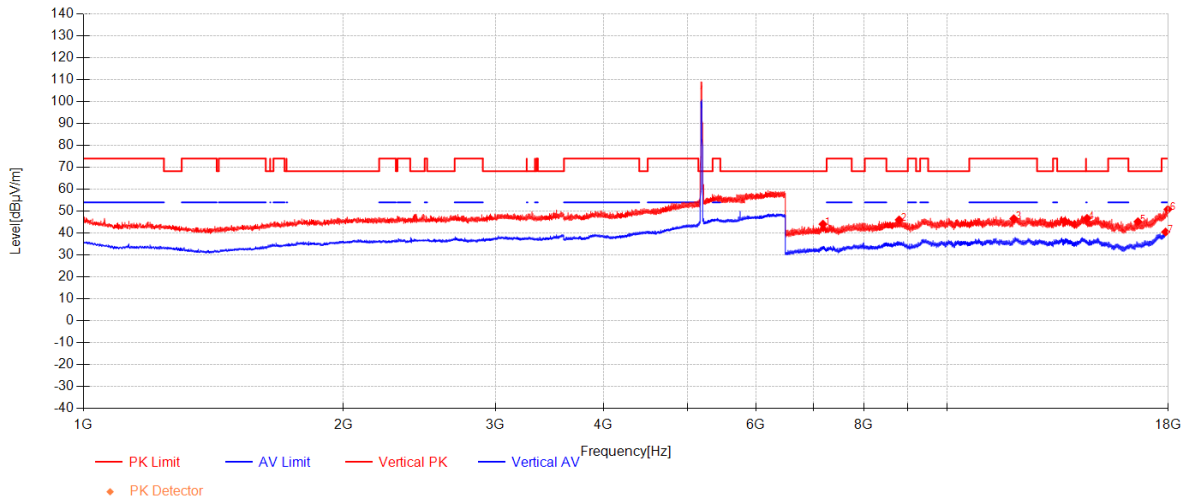


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7178.0208	53.85	35.82	-45.60	44.08	68.30	24.22	Vertical
2	8793.7708	52.72	37.17	-43.85	46.04	68.30	22.26	Vertical
3	11934.2292	46.62	39.41	-39.45	46.58	74.00	27.42	Vertical
4	14506.3958	44.80	40.25	-38.33	46.72	68.30	21.58	Vertical
5	16615.2083	43.83	38.65	-37.27	45.21	68.30	23.09	Vertical
6	17997.6042	43.04	44.79	-36.99	50.84	74.00	23.16	Vertical
7	17885	33.75	44.11	-37.37	40.49	54.00	13.51	Vertical

11a_TX_CH_48_Horizontal ANT1

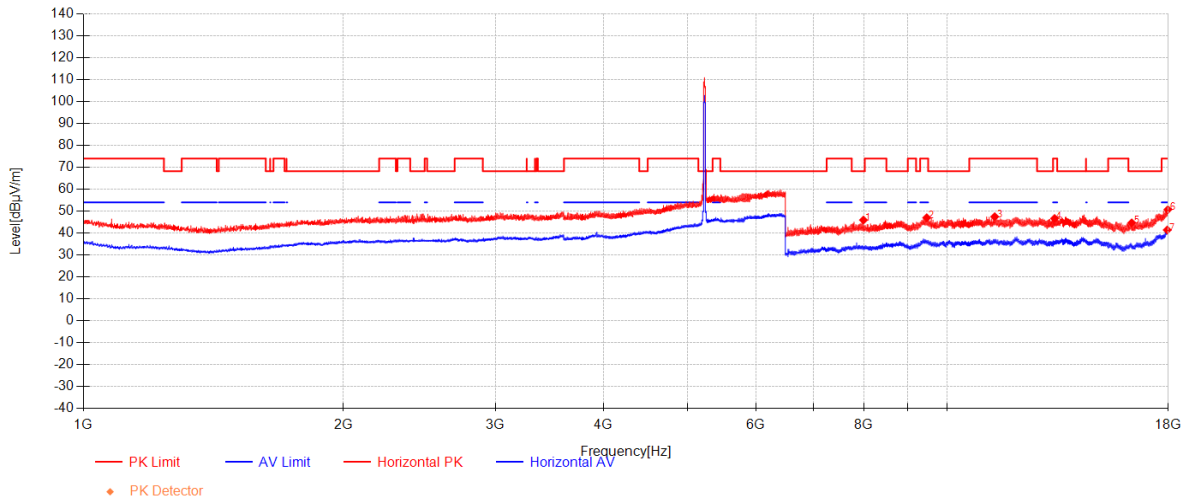


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7996.4375	53.95	36.30	-44.29	45.96	68.30	22.34	Horizontal
2	9464.125	51.67	38.05	-42.71	47.01	74.00	26.99	Horizontal
3	11344.375	48.16	39.47	-40.12	47.50	74.00	26.50	Horizontal
4	13306.0833	46.00	39.26	-38.55	46.71	74.00	27.29	Horizontal
5	16342.5625	44.03	38.54	-37.87	44.70	68.30	23.60	Horizontal
6	17994.7292	42.97	44.77	-36.99	50.74	74.00	23.26	Horizontal
7	17964.5417	33.93	44.59	-37.08	41.44	54.00	12.56	Horizontal

11a_TX_CH_48_Veritical ANT1

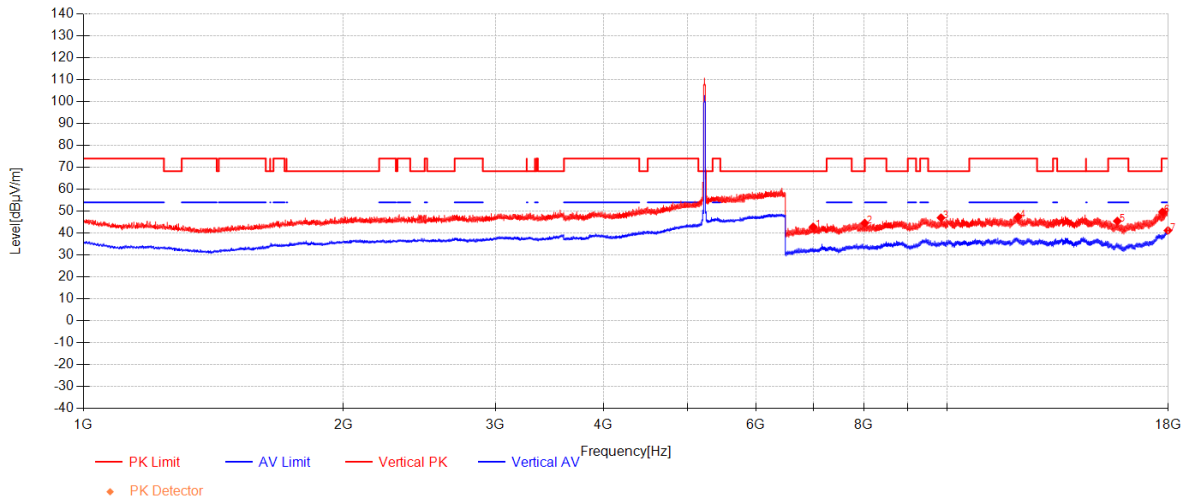


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6992.5833	53.29	35.49	-45.93	42.85	68.30	25.45	Vertical
2	8023.2708	52.55	36.33	-44.31	44.57	68.30	23.73	Vertical
3	9832.6042	50.39	38.57	-41.97	46.99	68.30	21.31	Vertical
4	12073.6667	47.23	39.36	-39.18	47.41	74.00	26.59	Vertical
5	15725.875	44.52	38.89	-37.95	45.47	74.00	28.53	Vertical
6	17737.4167	44.38	43.22	-37.90	49.71	74.00	24.29	Vertical
7	17998.0833	33.39	44.79	-36.99	41.19	54.00	12.81	Vertical

11a_TX_CH_52_Horizontal ANT1

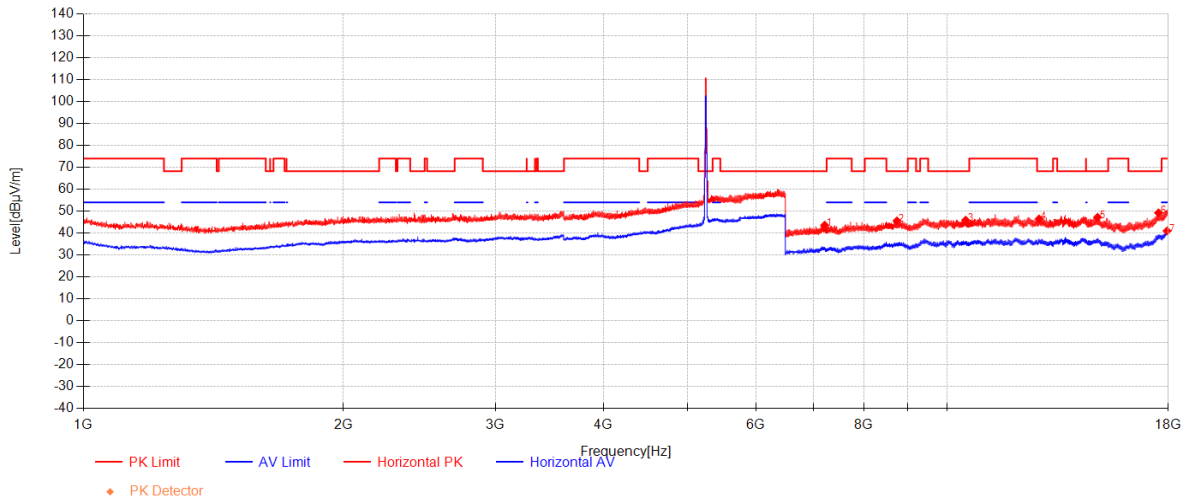


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7210.6042	53.27	35.88	-45.51	43.64	68.30	24.66	Horizontal
2	8741.0625	52.25	37.12	-43.76	45.61	68.30	22.69	Horizontal
3	10498.1667	47.37	39.15	-40.58	45.94	68.30	22.36	Horizontal
4	12767.0208	46.74	38.94	-39.19	46.49	68.30	21.81	Horizontal
5	14921.3542	45.31	40.21	-38.29	47.23	68.30	21.07	Horizontal
6	17551.5	43.58	42.11	-36.43	49.25	68.30	19.05	Horizontal
7	17957.8333	33.57	44.55	-37.10	41.02	54.00	12.98	Horizontal

11a_TX_CH_52_Vertical ANT1

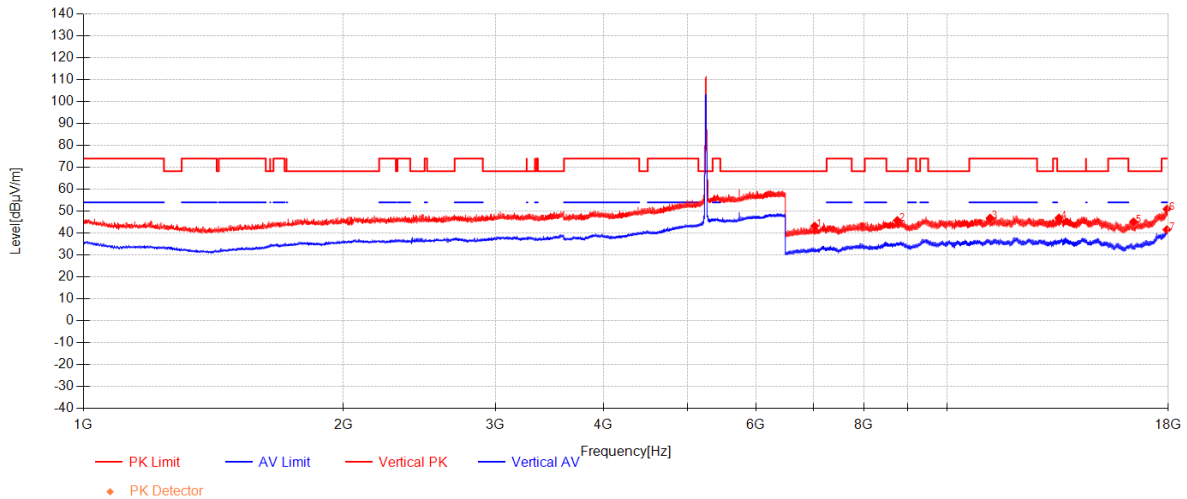


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7020.375	53.65	35.54	-45.95	43.24	68.30	25.06	Vertical
2	8750.1667	52.42	37.13	-43.78	45.77	68.30	22.53	Vertical
3	11205.4167	47.36	39.48	-39.98	46.86	74.00	27.14	Vertical
4	13461.8125	46.42	39.49	-38.99	46.92	68.30	21.38	Vertical
5	16421.625	44.45	38.57	-37.85	45.17	68.30	23.13	Vertical
6	17949.6875	43.62	44.50	-37.12	51.00	74.00	23.00	Vertical
7	17947.2917	34.19	44.48	-37.13	41.55	54.00	12.45	Vertical

11a_TX_CH_60_Horizontal ANT1

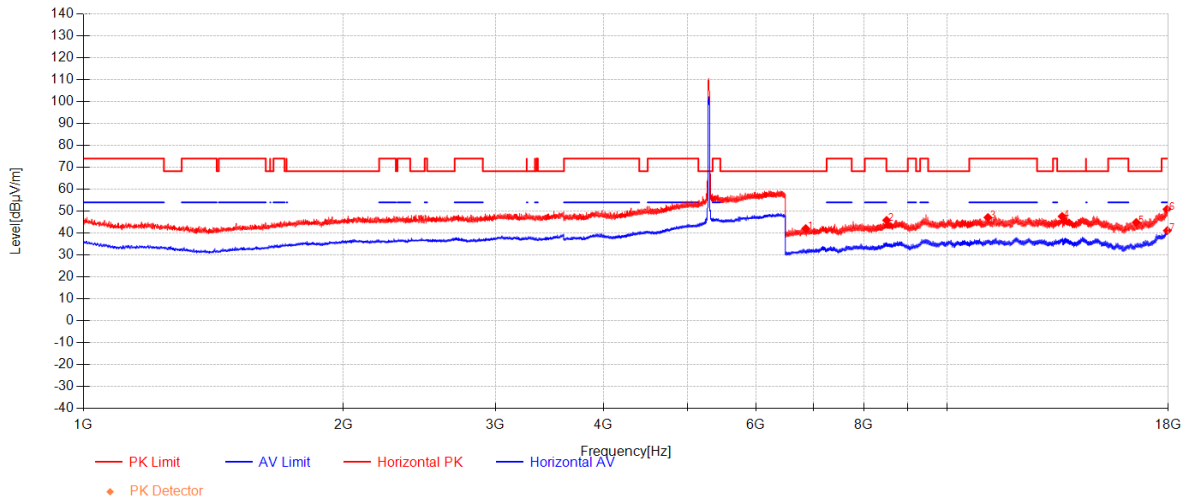


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6856.0208	53.17	35.27	-46.34	42.10	68.30	26.20	Horizontal
2	8505.3125	52.69	36.86	-43.70	45.84	68.30	22.46	Horizontal
3	11141.6875	47.69	39.49	-40.04	47.13	74.00	26.87	Horizontal
4	13577.7708	46.37	39.67	-38.43	47.61	68.30	20.69	Horizontal
5	16539.0208	43.99	38.62	-37.72	44.88	68.30	23.42	Horizontal
6	17951.125	43.51	44.51	-37.12	50.90	74.00	23.10	Horizontal
7	17967.4167	33.61	44.60	-37.07	41.14	54.00	12.86	Horizontal

11a_TX_CH_60_Vertical ANT1

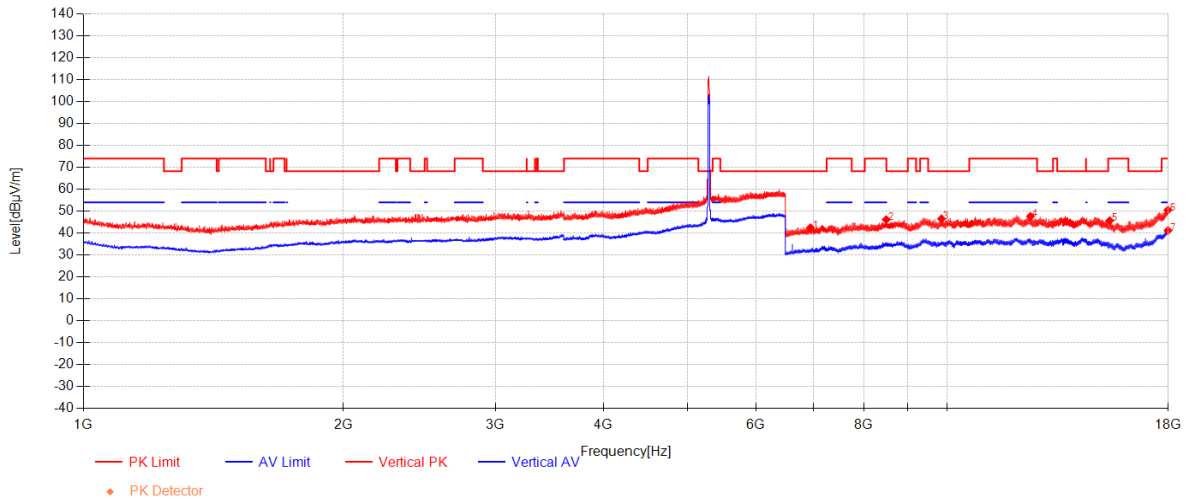


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6942.75	53.11	35.41	-46.04	42.48	68.30	25.82	Vertical
2	8494.7708	53.03	36.84	-43.72	46.16	74.00	27.84	Vertical
3	9843.625	49.90	38.58	-41.94	46.54	68.30	21.76	Vertical
4	12477.125	47.24	39.11	-38.70	47.66	74.00	26.34	Vertical
5	15410.1042	44.13	39.46	-37.87	45.72	74.00	28.28	Vertical
6	17995.6875	42.75	44.77	-36.99	50.53	74.00	23.47	Vertical
7	17999.5208	33.36	44.80	-36.98	41.18	54.00	12.82	Vertical

11a_TX_CH_64_Horizontal ANT1

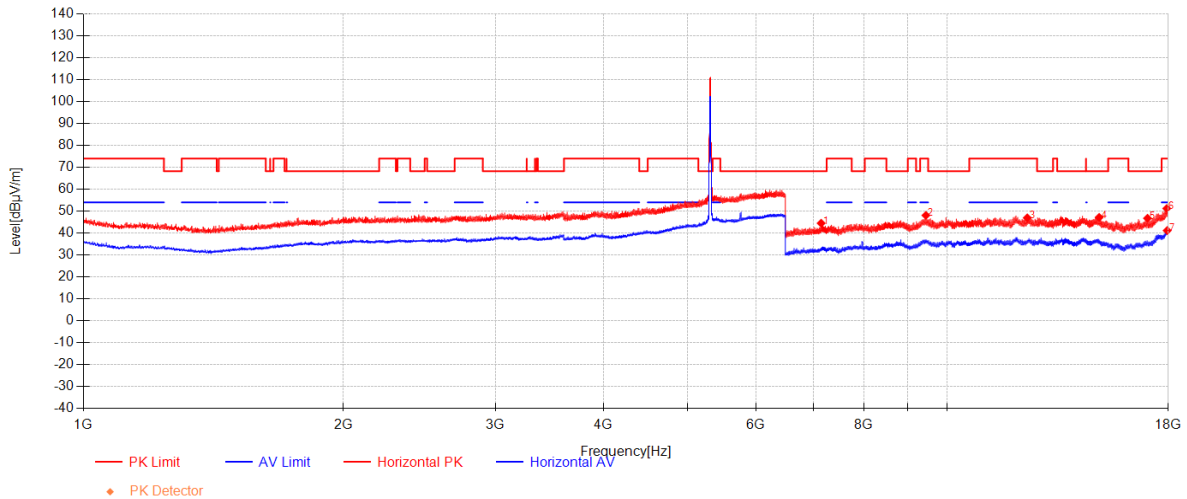


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7143.5208	54.57	35.76	-45.82	44.51	68.30	23.79	Horizontal
2	9443.5208	52.83	38.02	-42.74	48.11	74.00	25.89	Horizontal
3	12371.7083	46.40	39.18	-38.60	46.98	74.00	27.02	Horizontal
4	14986.0417	44.94	40.20	-37.96	47.18	68.30	21.12	Horizontal
5	17044.5417	44.88	39.07	-37.19	46.76	68.30	21.54	Horizontal
6	17941.5417	43.94	44.45	-37.14	51.25	74.00	22.75	Horizontal
7	17961.1875	33.69	44.57	-37.09	41.17	54.00	12.83	Horizontal

11a_TX_CH_64_Vertical ANT1

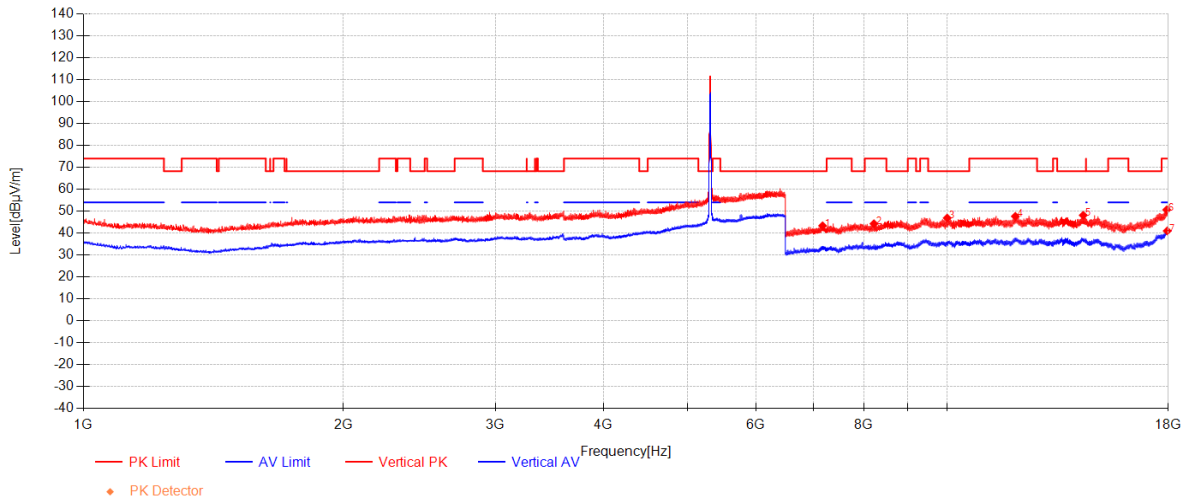


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7171.3125	53.18	35.81	-45.64	43.35	68.30	24.95	Vertical
2	8223.0833	52.03	36.55	-44.30	44.28	74.00	29.72	Vertical
3	9994.5625	49.84	38.79	-41.74	46.89	68.30	21.41	Vertical
4	11984.0625	47.04	39.40	-38.78	47.67	74.00	26.33	Vertical
5	14359.7708	46.61	40.26	-38.74	48.14	68.30	20.16	Vertical
6	17940.5833	43.33	44.44	-37.15	50.63	74.00	23.37	Vertical
7	17965.5	33.48	44.59	-37.08	41.00	54.00	13.00	Vertical

11a_TX_CH_100_Horizontal ANT1

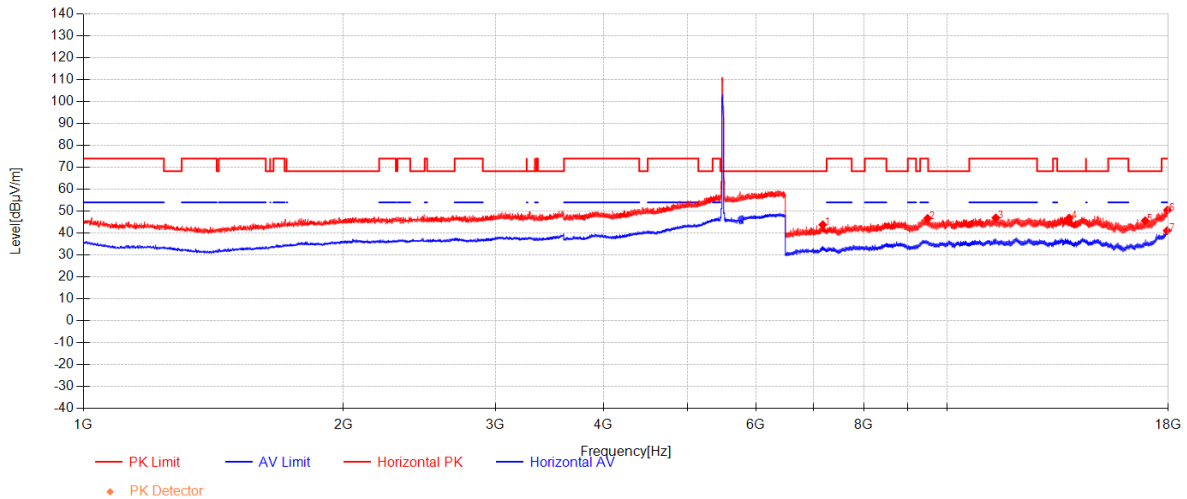


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7175.625	53.60	35.82	-45.61	43.81	68.30	24.49	Horizontal
2	9486.1667	51.31	38.08	-42.67	46.72	74.00	27.28	Horizontal
3	11377.9167	47.38	39.46	-39.87	46.97	74.00	27.03	Horizontal
4	13834.6042	45.32	40.05	-38.46	46.91	68.30	21.39	Horizontal
5	16940.0833	43.84	38.78	-36.94	45.67	68.30	22.63	Horizontal
6	17977.9583	42.89	44.67	-37.04	50.52	74.00	23.48	Horizontal
7	17960.2292	33.64	44.56	-37.09	41.11	54.00	12.89	Horizontal

11a_TX_CH_100_Vertical ANT1

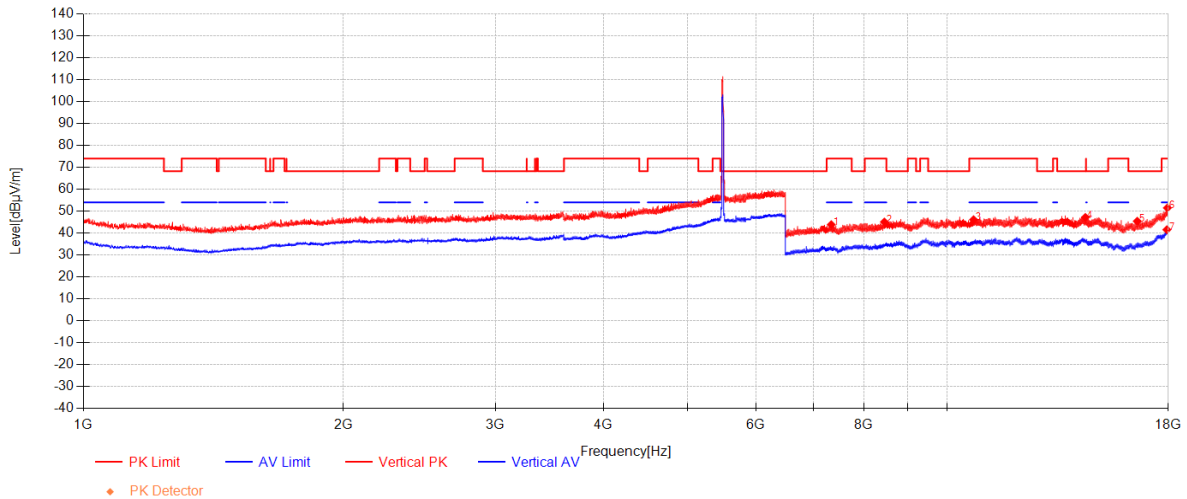


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7338.5417	53.61	36.11	-45.84	43.88	74.00	30.12	Vertical
2	8455	52.26	36.80	-43.99	45.07	74.00	28.93	Vertical
3	10722.4167	47.55	39.31	-40.73	46.13	74.00	27.87	Vertical
4	14443.625	45.47	40.26	-38.55	47.18	68.30	21.12	Vertical
5	16583.1042	44.13	38.63	-37.33	45.43	68.30	22.87	Vertical
6	17970.7708	43.95	44.62	-37.06	51.51	74.00	22.49	Vertical
7	17946.3333	34.19	44.48	-37.13	41.54	54.00	12.46	Vertical

11a_TX_CH_116_Horizontal ANT1

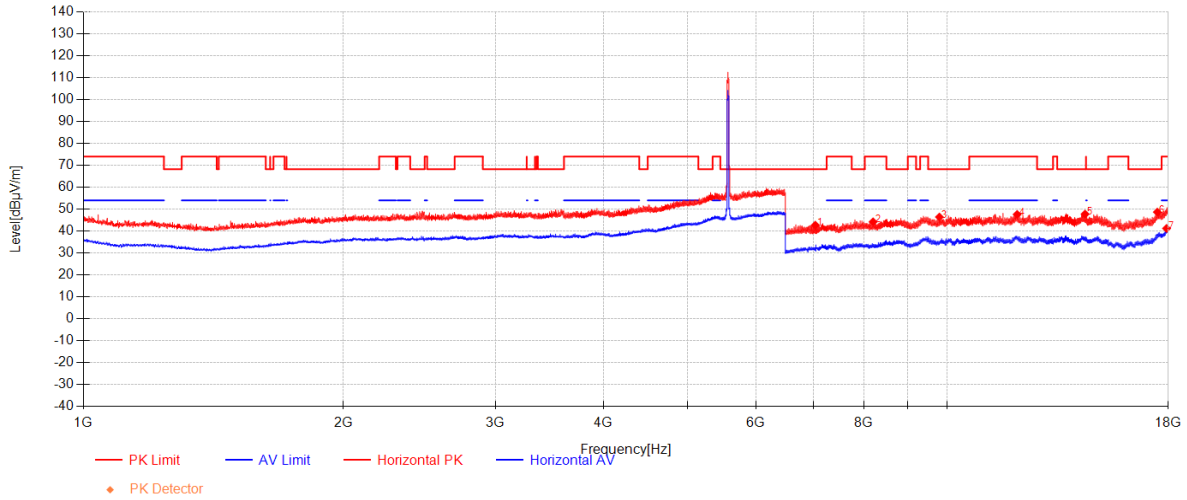


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7033.3125	53.13	35.56	-45.98	42.71	68.30	25.59	Horizontal
2	8203.9167	51.95	36.52	-44.23	44.24	74.00	29.76	Horizontal
3	9789.4792	49.99	38.51	-42.06	46.43	68.30	21.87	Horizontal
4	12042.5208	47.16	39.37	-38.92	47.62	74.00	26.38	Horizontal
5	14431.6458	46.11	40.26	-38.59	47.77	68.30	20.53	Horizontal
6	17496.875	43.05	41.78	-36.15	48.68	68.30	19.62	Horizontal
7	17931.9583	34.01	44.39	-37.17	41.23	54.00	12.77	Horizontal

11a_TX_CH_116_Veritical ANT1

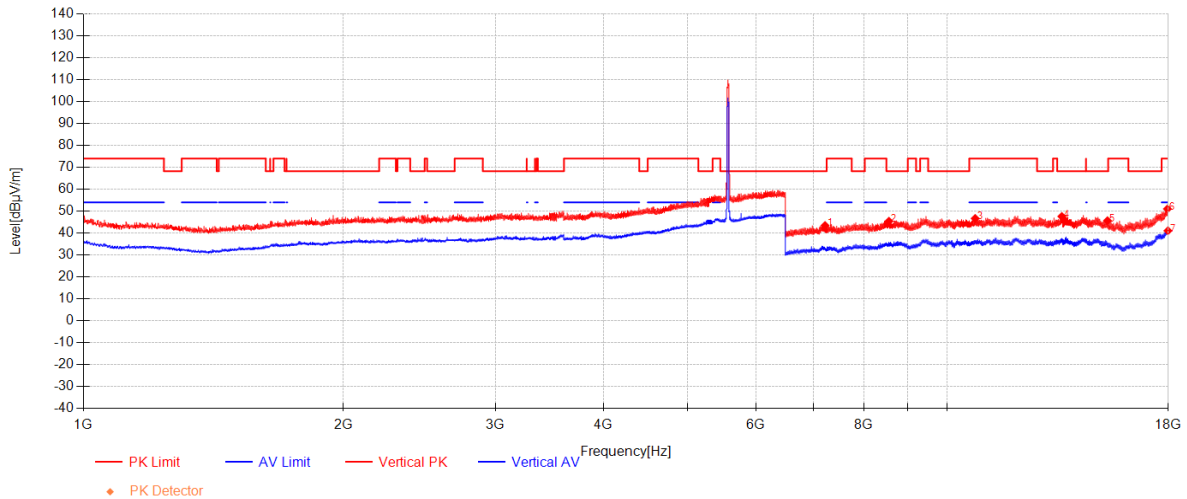


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7217.3125	53.15	35.89	-45.55	43.49	68.30	24.81	Vertical
2	8557.0625	52.44	36.91	-43.94	45.42	68.30	22.88	Vertical
3	10767.9375	47.94	39.34	-40.57	46.71	74.00	27.29	Vertical
4	13564.8333	46.49	39.65	-38.52	47.62	68.30	20.68	Vertical
5	15320.9792	44.14	39.62	-38.08	45.68	68.30	22.62	Vertical
6	17976.5208	43.44	44.66	-37.05	51.05	74.00	22.95	Vertical
7	17996.6458	33.28	44.78	-36.99	41.07	54.00	12.93	Vertical

11a_TX_CH_140_Horizontal ANT1

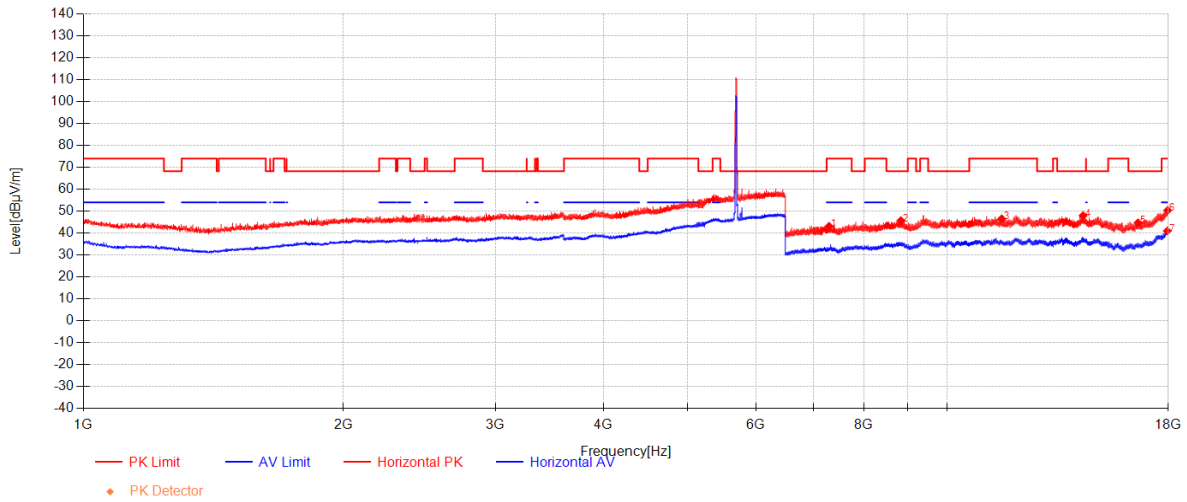


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7297.3333	53.10	36.04	-46.00	43.14	74.00	30.86	Horizontal
2	8833.5417	52.23	37.22	-43.76	45.69	68.30	22.61	Horizontal
3	11556.6458	46.67	39.44	-39.60	46.52	74.00	27.48	Horizontal
4	14354.5	46.45	40.26	-38.74	47.97	68.30	20.33	Horizontal
5	16616.6458	43.32	38.65	-37.27	44.69	68.30	23.61	Horizontal
6	17982.75	42.69	44.70	-37.03	50.36	74.00	23.64	Horizontal
7	17966.4583	33.48	44.60	-37.07	41.00	54.00	13.00	Horizontal

11a_TX_CH_140_Vertical ANT1

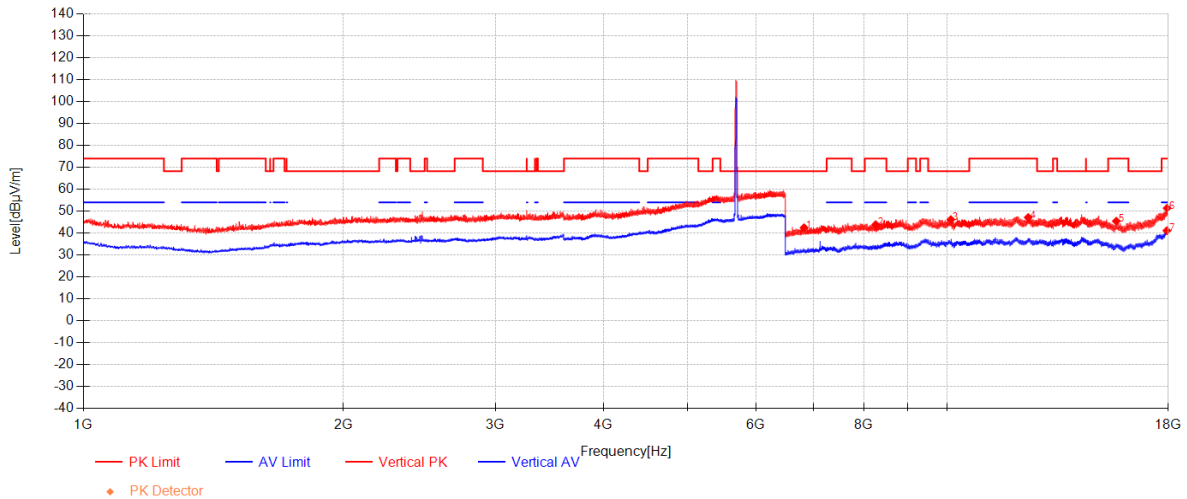


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6825.8333	53.73	35.22	-46.48	42.47	68.30	25.83	Vertical
2	8260.9375	51.72	36.59	-44.43	43.88	74.00	30.12	Vertical
3	10092.7917	48.96	38.86	-41.64	46.19	68.30	22.11	Vertical
4	12402.8542	46.32	39.16	-38.32	47.15	74.00	26.85	Vertical
5	15683.2292	44.37	38.97	-37.88	45.46	74.00	28.54	Vertical
6	17956.3958	43.96	44.54	-37.10	51.40	74.00	22.60	Vertical
7	17946.8125	33.78	44.48	-37.13	41.13	54.00	12.87	Vertical

11a_TX_CH_149_Horizontal ANT1

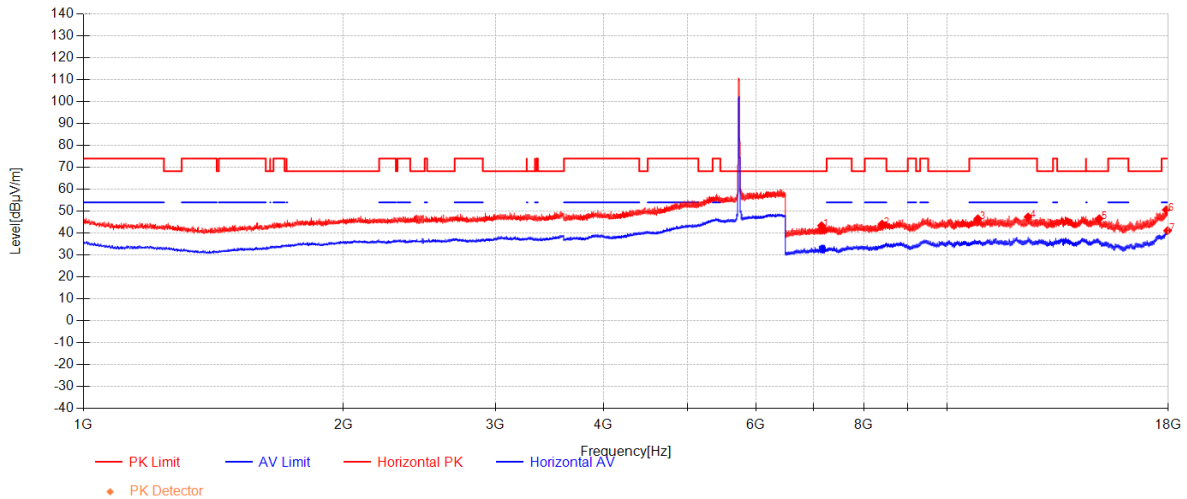


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7151.1875	53.39	35.77	-45.77	43.39	68.30	24.91	Horizontal
2	8402.2917	51.70	36.74	-44.34	44.10	74.00	29.90	Horizontal
3	10846.5208	47.50	39.39	-40.32	46.57	74.00	27.43	Horizontal
4	12398.5417	46.55	39.16	-38.32	47.39	74.00	26.61	Horizontal
5	14986.5208	44.35	40.20	-37.96	46.59	68.30	21.71	Horizontal
6	17915.6667	43.55	44.29	-37.22	50.63	74.00	23.37	Horizontal
7	17983.2292	33.45	44.70	-37.03	41.12	54.00	12.88	Horizontal

11a_TX_CH_149_Veritical ANT1

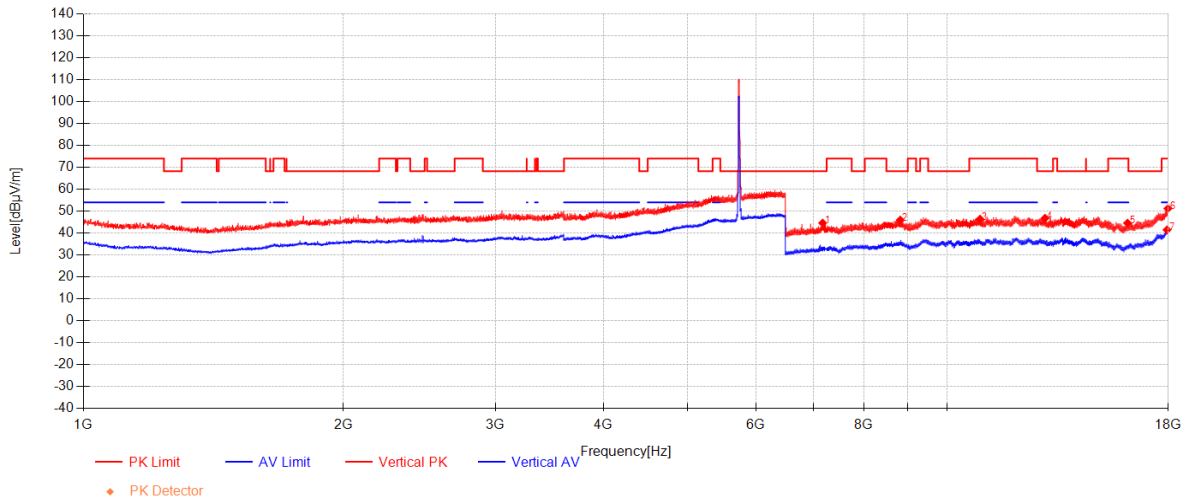


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7171.7917	54.43	35.81	-45.64	44.60	68.30	23.70	Vertical
2	8821.0833	52.54	37.20	-43.79	45.95	68.30	22.35	Vertical
3	10908.8125	47.16	39.44	-40.20	46.40	74.00	27.60	Vertical
4	12969.7083	46.70	38.82	-38.72	46.79	68.30	21.51	Vertical
5	16159.5208	44.17	38.46	-38.05	44.58	74.00	29.42	Vertical
6	17995.6875	43.44	44.77	-36.99	51.22	74.00	22.78	Vertical
7	17953.5208	34.07	44.52	-37.11	41.48	54.00	12.52	Vertical

11a_TX_CH_157_Horizontal ANT1

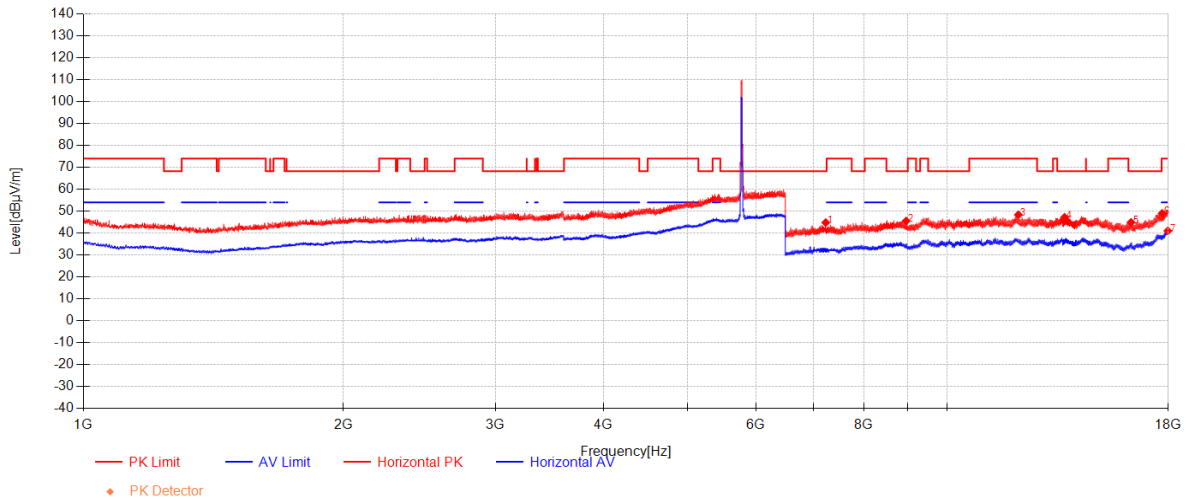


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7230.7292	54.52	35.92	-45.62	44.81	68.30	23.49	Horizontal
2	8959.0833	51.78	37.35	-43.60	45.54	68.30	22.76	Horizontal
3	12081.3333	48.26	39.35	-39.24	48.37	74.00	25.63	Horizontal
4	13663.0625	45.49	39.79	-38.07	47.21	68.30	21.09	Horizontal
5	16311.4167	44.30	38.52	-37.91	44.91	68.30	23.39	Horizontal
6	17719.6875	43.76	43.12	-37.87	49.01	74.00	24.99	Horizontal
7	17994.25	33.25	44.77	-37.00	41.02	54.00	12.98	Horizontal

11a_TX_CH_157_Vertical ANT1

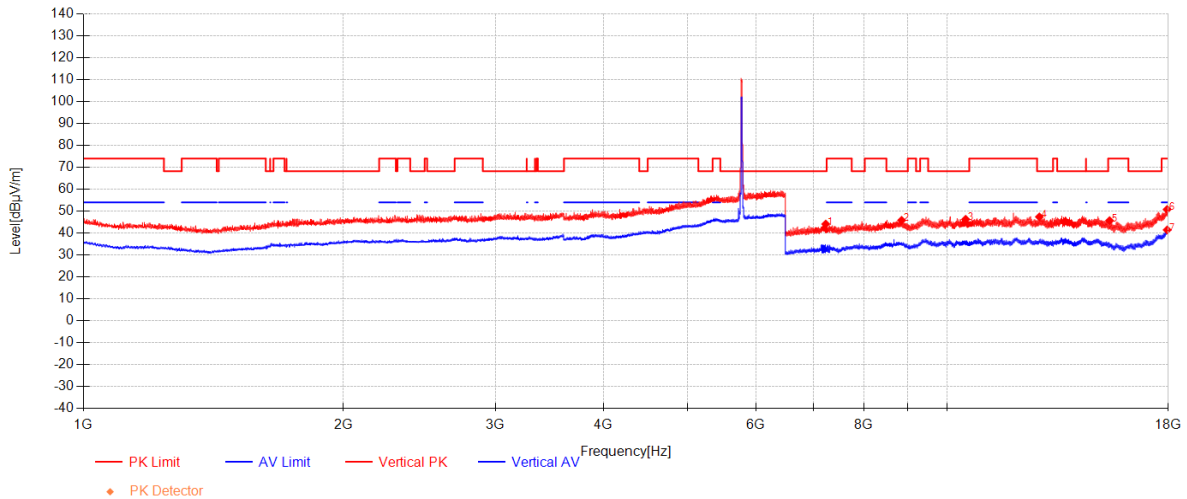


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7230.7292	53.84	35.92	-45.62	44.13	68.30	24.17	Vertical
2	8852.2292	52.30	37.24	-43.70	45.84	68.30	22.46	Vertical
3	10498.6458	47.74	39.15	-40.58	46.31	68.30	21.99	Vertical
4	12777.5625	47.71	38.93	-39.22	47.42	68.30	20.88	Vertical
5	15404.8333	44.07	39.47	-37.85	45.69	74.00	28.31	Vertical
6	17960.7083	43.34	44.56	-37.09	50.81	74.00	23.19	Vertical
7	17960.7083	33.98	44.56	-37.09	41.45	54.00	12.55	Vertical

11a_TX_CH_165_Horizontal ANT1

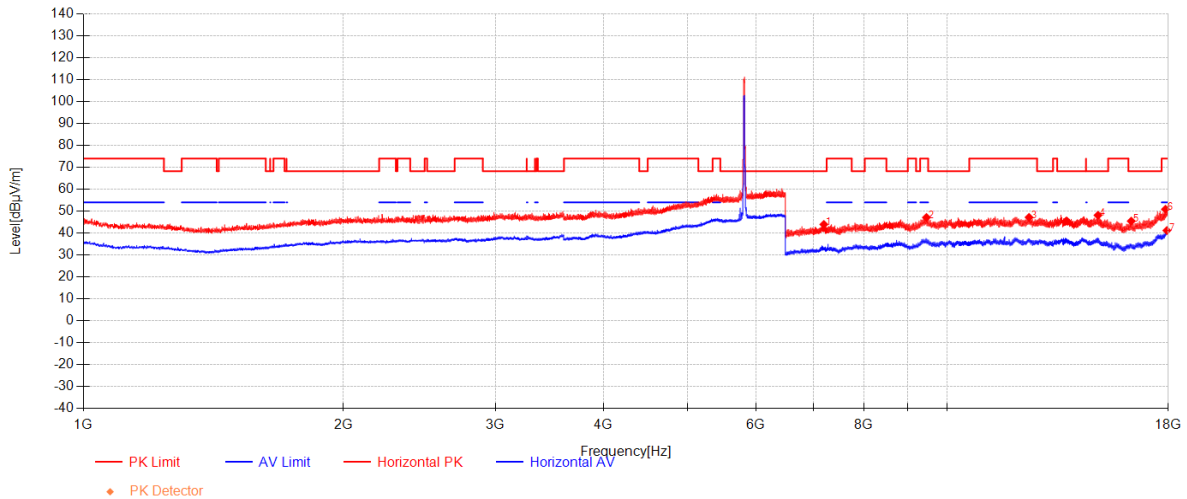


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7195.2708	53.59	35.85	-45.48	43.96	68.30	24.34	Horizontal
2	9456.9375	51.83	38.04	-42.72	47.15	74.00	26.85	Horizontal
3	12431.125	46.52	39.14	-38.47	47.20	74.00	26.80	Horizontal
4	14937.6458	46.15	40.21	-38.21	48.15	68.30	20.15	Horizontal
5	16321	44.84	38.53	-37.90	45.47	68.30	22.83	Horizontal
6	17877.8125	44.25	44.07	-37.43	50.89	74.00	23.11	Horizontal
7	17946.3333	33.83	44.48	-37.13	41.18	54.00	12.82	Horizontal

11a_TX_CH_165_Vertical ANT1

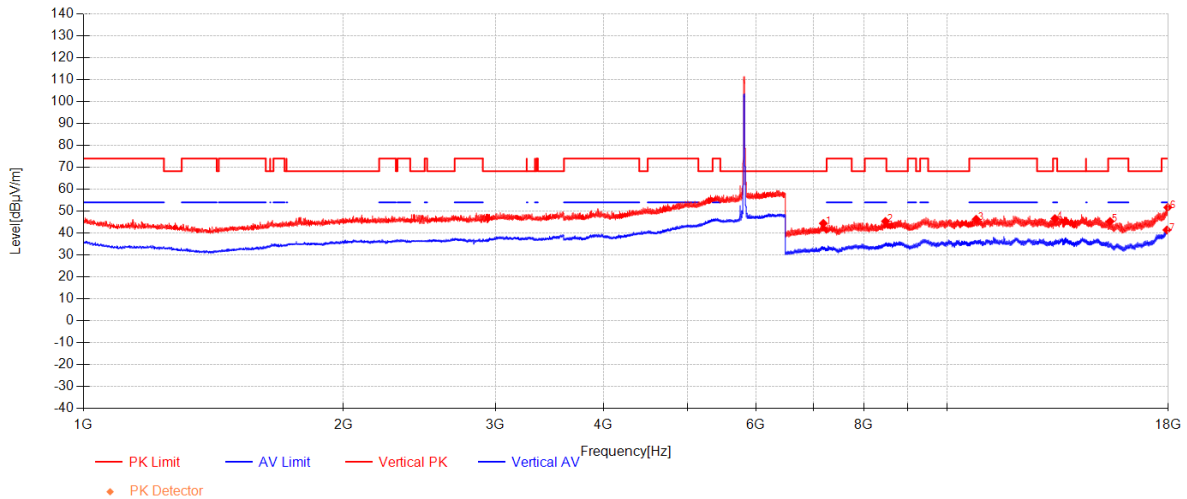


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7185.2083	54.14	35.83	-45.55	44.43	68.30	23.87	Vertical
2	8478.4792	52.37	36.83	-43.83	45.37	74.00	28.63	Vertical
3	10797.6458	47.44	39.36	-40.46	46.34	74.00	27.66	Vertical
4	13318.0625	45.97	39.28	-38.61	46.63	74.00	27.37	Vertical
5	15424.4792	43.81	39.44	-37.91	45.33	74.00	28.67	Vertical
6	17990.4167	43.98	44.74	-37.01	51.72	74.00	22.28	Vertical
7	17950.6458	34.04	44.50	-37.12	41.43	54.00	12.57	Vertical

11ax(HE20)_TX_CH_36_Horizontal

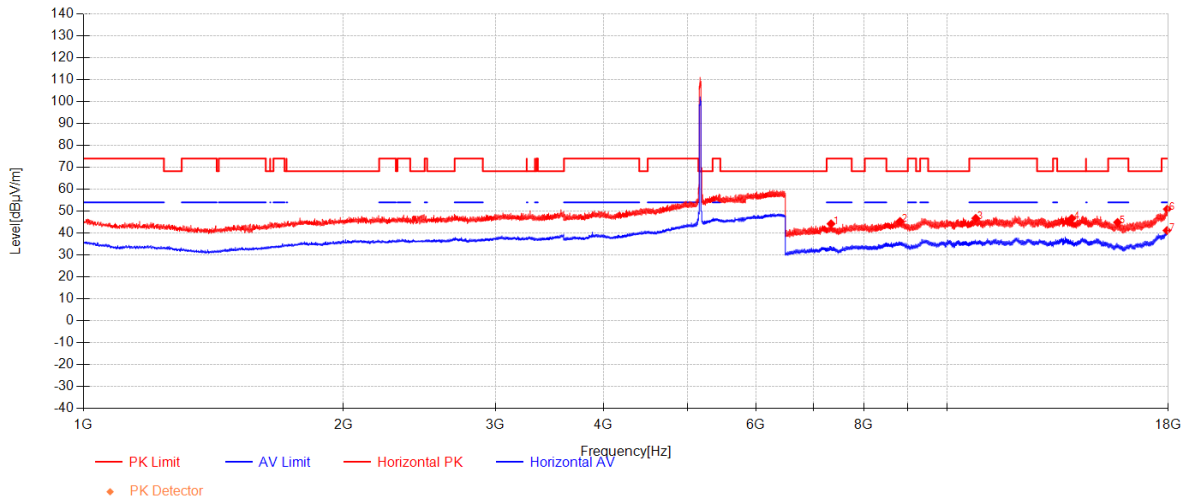


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7334.2292	54.00	36.10	-45.86	44.25	74.00	29.75	Horizontal
2	8815.3333	51.99	37.20	-43.81	45.37	68.30	22.93	Horizontal
3	10785.6667	47.91	39.35	-40.50	46.76	74.00	27.24	Horizontal
4	13930.4375	45.09	40.20	-38.58	46.70	68.30	21.60	Horizontal
5	15737.8542	44.01	38.87	-37.98	44.90	74.00	29.10	Horizontal
6	17967.8958	43.43	44.61	-37.07	50.97	74.00	23.03	Horizontal
7	17951.125	33.79	44.51	-37.12	41.18	54.00	12.82	Horizontal

11ax(HE20)_TX_CH_36_Vertical

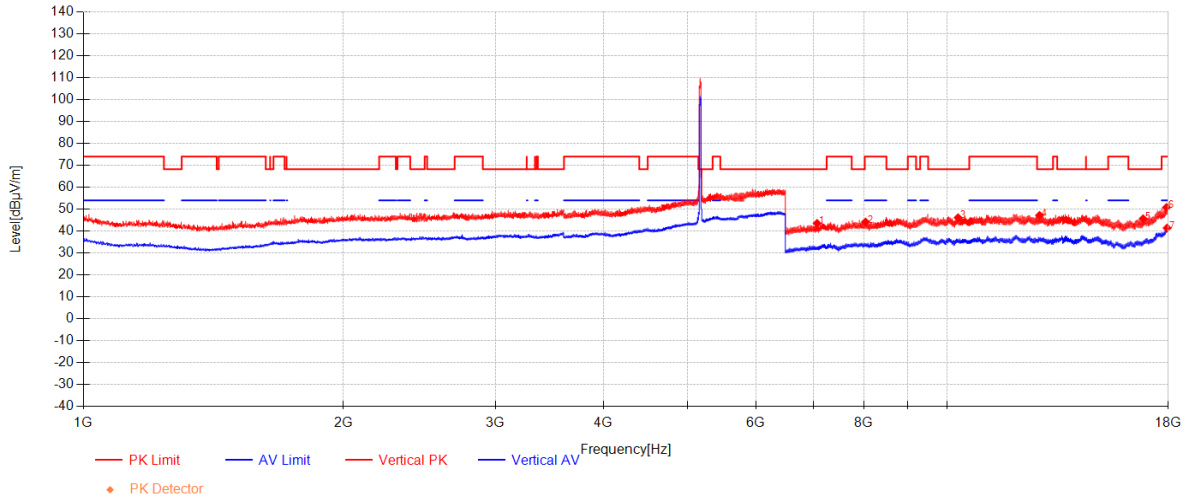


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7066.8542	53.98	35.62	-46.04	43.56	68.30	24.74	Vertical
2	8043.3958	52.15	36.35	-44.34	44.16	74.00	29.84	Vertical
3	10288.7708	48.32	39.00	-41.19	46.13	68.30	22.17	Vertical
4	12782.8333	47.48	38.93	-39.23	47.18	68.30	21.12	Vertical
5	16842.8125	44.35	38.74	-37.44	45.65	68.30	22.65	Vertical
6	17928.6042	43.62	44.37	-37.18	50.81	74.00	23.19	Vertical
7	17956.875	33.96	44.54	-37.10	41.40	54.00	12.60	Vertical

11ax(HE20)_TX_CH_40_Horizontal

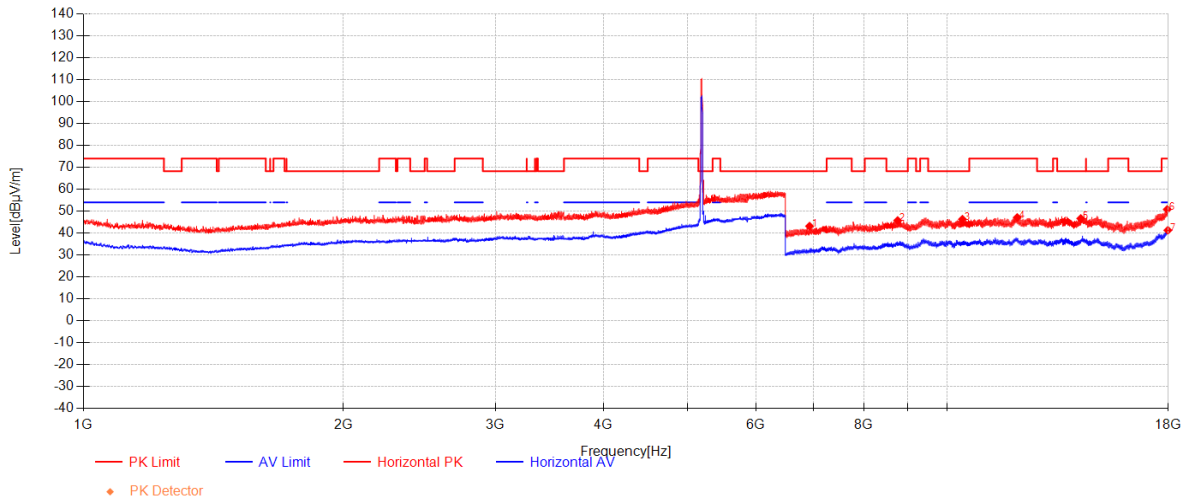


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6926.9375	53.85	35.38	-46.08	43.16	68.30	25.14	Horizontal
2	8759.75	52.40	37.14	-43.79	45.74	68.30	22.56	Horizontal
3	10408.5625	48.43	39.09	-41.19	46.32	68.30	21.98	Horizontal
4	12044.9167	46.68	39.37	-38.94	47.12	74.00	26.88	Horizontal
5	14267.7708	44.97	40.27	-38.58	46.67	68.30	21.63	Horizontal
6	17966.9375	43.31	44.60	-37.07	50.84	74.00	23.16	Horizontal
7	17995.2083	33.51	44.77	-36.99	41.29	54.00	12.71	Horizontal

11ax(HE20)_TX_CH_40_Veritical

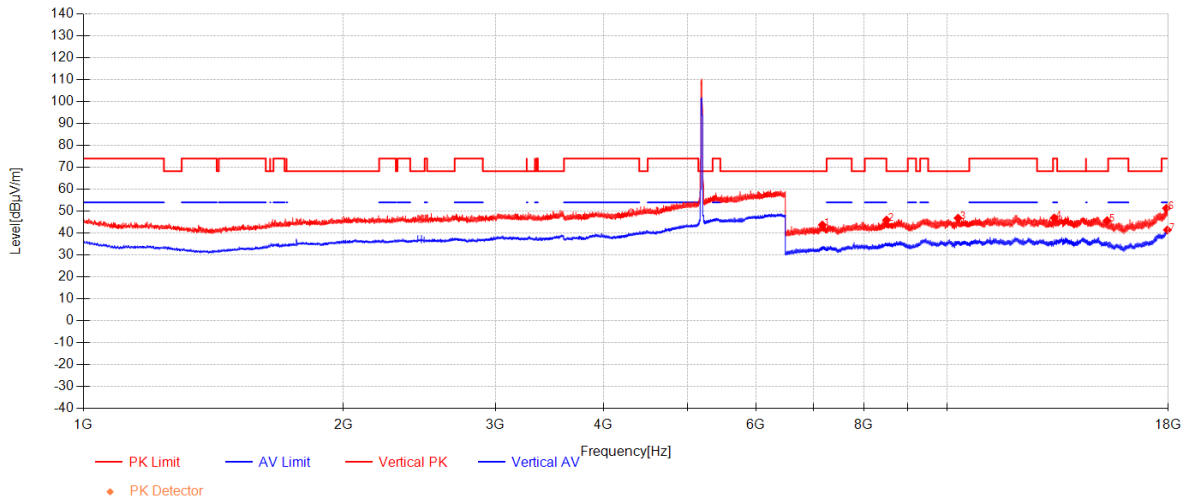


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7165.5625	53.61	35.80	-45.68	43.73	68.30	24.57	Vertical
2	8501.9583	52.82	36.85	-43.69	45.98	68.30	22.32	Vertical
3	10288.2917	49.05	39.00	-41.20	46.85	68.30	21.45	Vertical
4	13292.6667	46.26	39.24	-38.56	46.94	74.00	27.06	Vertical
5	15305.6458	44.18	39.65	-38.13	45.70	68.30	22.60	Vertical
6	17925.25	44.21	44.35	-37.19	51.37	74.00	22.63	Vertical
7	17970.2917	33.89	44.62	-37.06	41.45	54.00	12.55	Vertical

11ax(HE20)_TX_CH_48_Horizontal

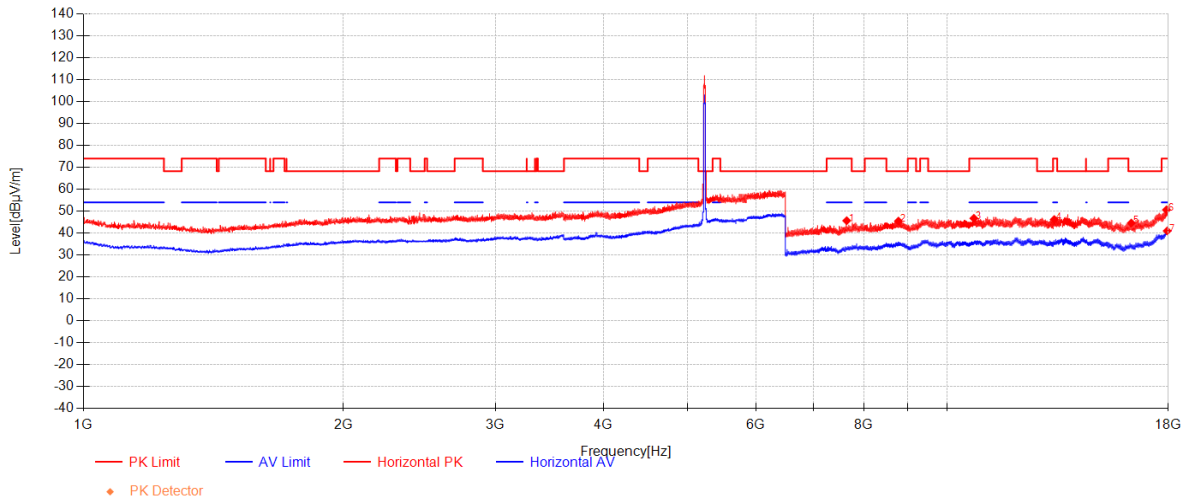


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7647.125	54.31	36.37	-45.00	45.68	74.00	28.32	Horizontal
2	8777.9583	52.15	37.16	-43.82	45.48	68.30	22.82	Horizontal
3	10731.0417	48.14	39.31	-40.70	46.75	74.00	27.25	Horizontal
4	13295.5417	45.51	39.24	-38.54	46.21	74.00	27.79	Horizontal
5	16325.3125	43.94	38.53	-37.89	44.58	68.30	23.72	Horizontal
6	17928.6042	43.43	44.37	-37.18	50.62	74.00	23.38	Horizontal
7	17961.6667	33.51	44.57	-37.09	40.99	54.00	13.01	Horizontal

11ax(HE20)_TX_CH_48_Veritical

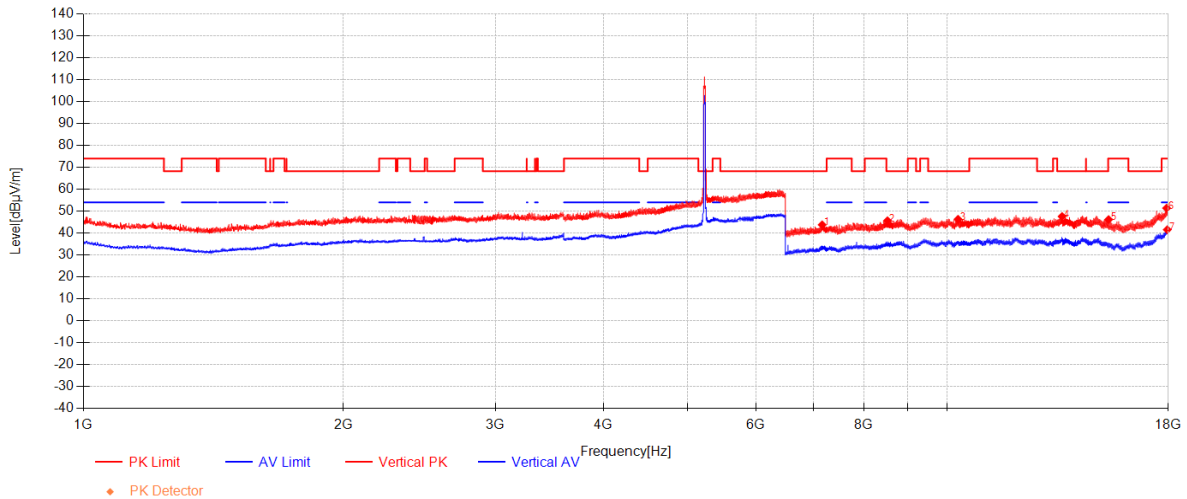


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7163.1667	53.68	35.79	-45.69	43.78	68.30	24.52	Vertical
2	8524.4792	52.56	36.88	-43.79	45.65	68.30	22.65	Vertical
3	10287.8125	48.52	39.00	-41.20	46.32	68.30	21.98	Vertical
4	13573.9375	46.40	39.66	-38.46	47.60	68.30	20.70	Vertical
5	15365.5417	44.59	39.54	-37.95	46.19	74.00	27.81	Vertical
6	17935.3125	44.15	44.41	-37.16	51.40	74.00	22.60	Vertical
7	17965.5	34.04	44.59	-37.08	41.56	54.00	12.44	Vertical

11ax(HE20)_TX_CH_52_Horizontal

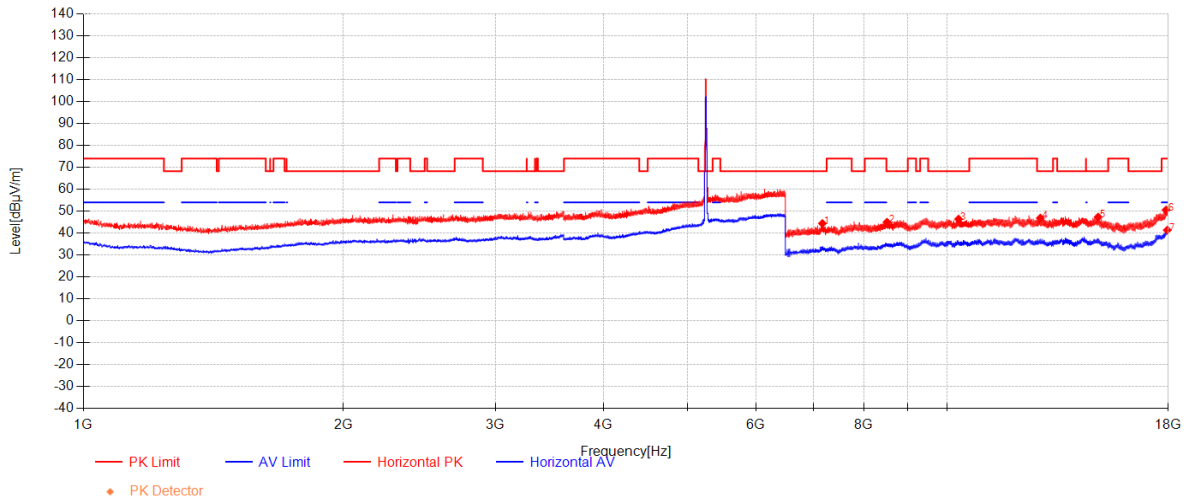


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7167	54.29	35.80	-45.67	44.42	68.30	23.88	Horizontal
2	8513.4583	51.87	36.86	-43.74	44.99	68.30	23.31	Horizontal
3	10303.1458	48.48	39.01	-41.09	46.41	68.30	21.89	Horizontal
4	12809.6667	47.14	38.91	-39.20	46.86	68.30	21.44	Horizontal
5	14941.9583	45.33	40.21	-38.19	47.35	68.30	20.95	Horizontal
6	17909.9167	43.54	44.26	-37.23	50.57	74.00	23.43	Horizontal
7	17965.0208	33.86	44.59	-37.08	41.37	54.00	12.63	Horizontal

11ax(HE20)_TX_CH_52_Veritical

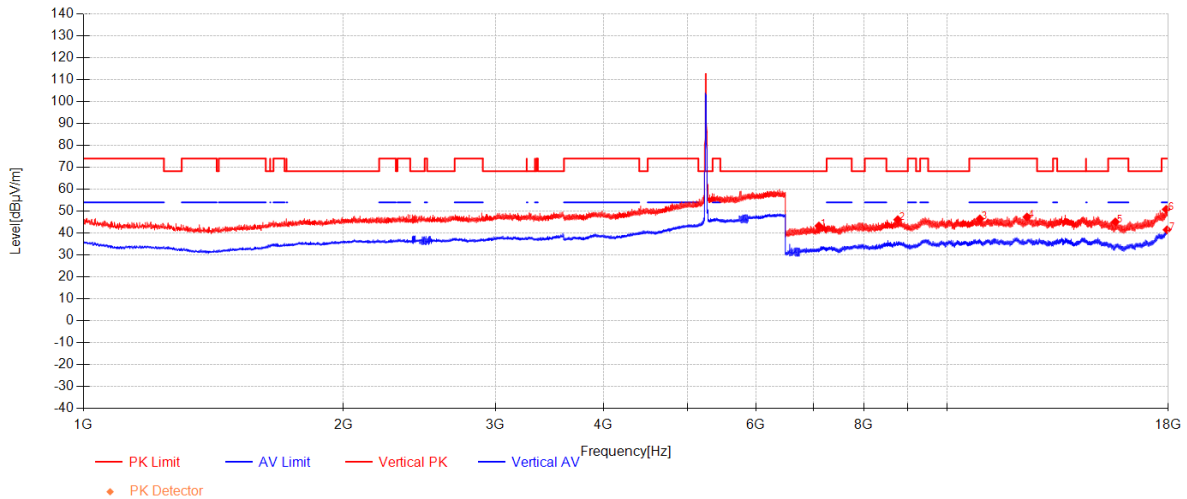


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7099.9167	53.70	35.68	-46.11	43.27	68.30	25.03	Vertical
2	8761.1875	52.79	37.14	-43.79	46.13	68.30	22.17	Vertical
3	10904.9792	47.27	39.43	-40.19	46.52	74.00	27.48	Vertical
4	12360.6875	46.89	39.18	-38.71	47.36	74.00	26.64	Vertical
5	15645.8542	43.96	39.04	-37.89	45.11	74.00	28.89	Vertical
6	17915.1875	43.77	44.29	-37.22	50.84	74.00	23.16	Vertical
7	17954.4792	34.09	44.53	-37.11	41.51	54.00	12.49	Vertical

11ax(HE20)_TX_CH_60_Horizontal

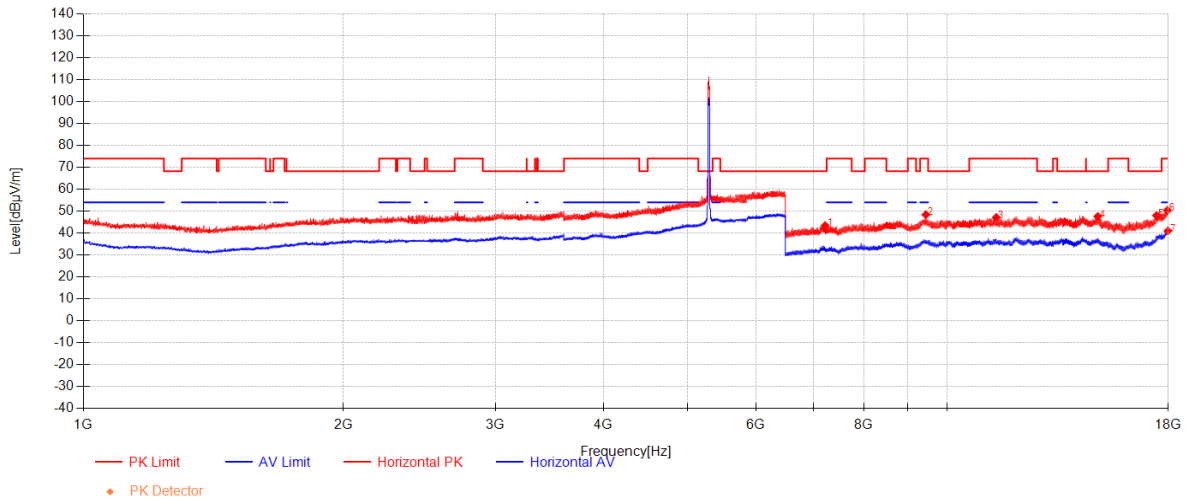


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7219.2292	53.14	35.89	-45.56	43.48	68.30	24.82	Horizontal
2	9442.5625	53.12	38.02	-42.74	48.40	74.00	25.60	Horizontal
3	11392.7708	47.45	39.46	-39.76	47.15	74.00	26.85	Horizontal
4	14927.5833	45.63	40.21	-38.26	47.58	68.30	20.72	Horizontal
5	17453.75	43.10	41.52	-36.62	48.00	68.30	20.30	Horizontal
6	17971.25	42.81	44.63	-37.06	50.38	74.00	23.62	Horizontal
7	17995.2083	33.25	44.77	-36.99	41.03	54.00	12.97	Horizontal

11ax(HE20)_TX_CH_60_Vertical

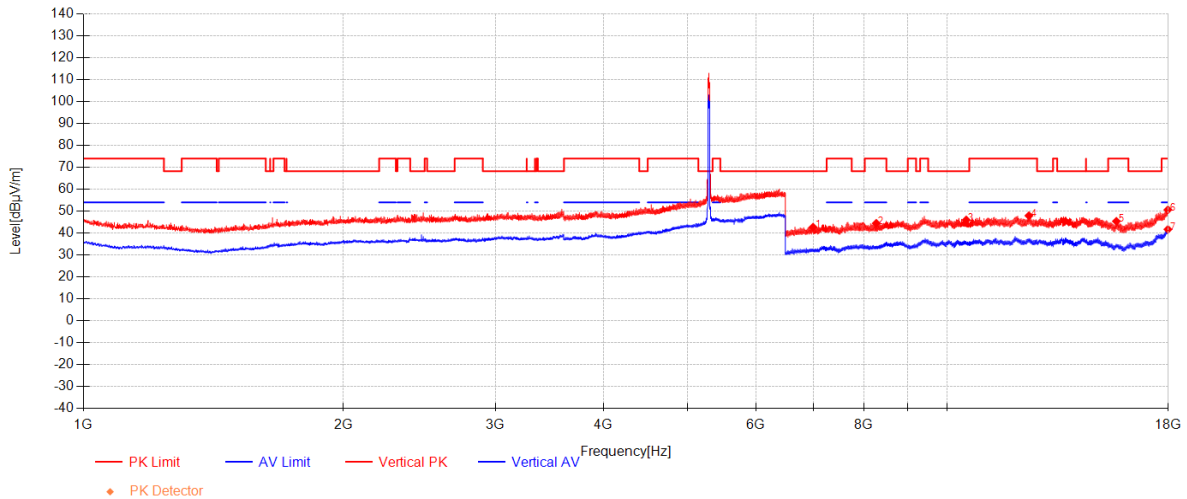


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6990.6667	53.17	35.49	-45.93	42.72	68.30	25.58	Vertical
2	8273.3958	52.33	36.60	-44.47	44.46	74.00	29.54	Vertical
3	10514.4583	47.52	39.16	-40.66	46.02	68.30	22.28	Vertical
4	12426.8125	47.26	39.14	-38.44	47.96	74.00	26.04	Vertical
5	15687.0625	44.31	38.96	-37.88	45.40	74.00	28.60	Vertical
6	17996.1667	42.87	44.78	-36.99	50.66	74.00	23.34	Vertical
7	17999.0417	33.89	44.79	-36.98	41.70	54.00	12.30	Vertical

11ax(HE20)_TX_CH_64_Horizontal

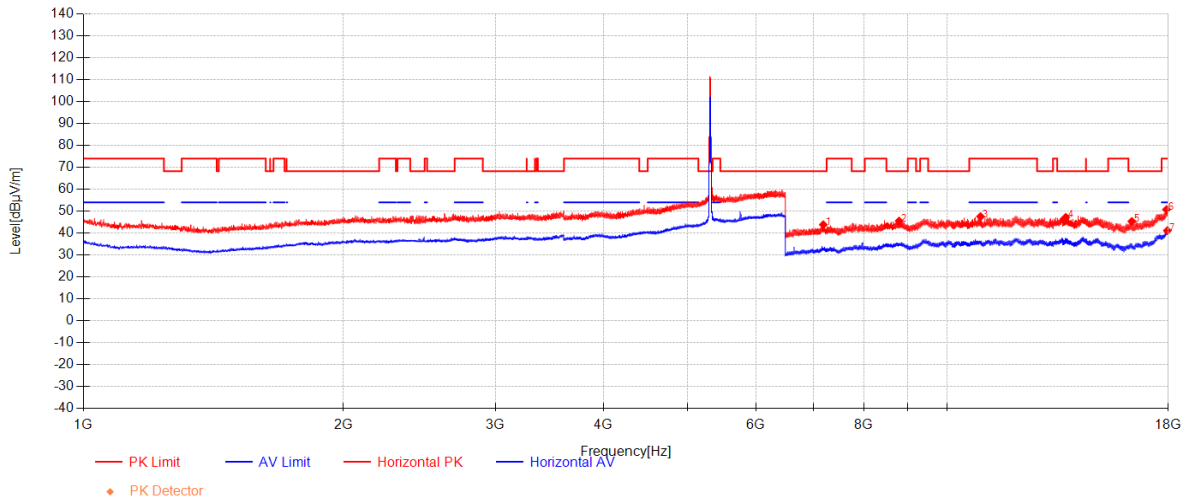


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7184.7292	53.56	35.83	-45.55	43.84	68.30	24.46	Horizontal
2	8792.8125	52.22	37.17	-43.85	45.54	68.30	22.76	Horizontal
3	10923.6667	48.39	39.45	-40.25	47.58	74.00	26.42	Horizontal
4	13708.5833	45.39	39.86	-38.00	47.25	68.30	21.05	Horizontal
5	16346.875	44.67	38.54	-37.86	45.34	68.30	22.96	Horizontal
6	17927.1667	43.57	44.36	-37.18	50.75	74.00	23.25	Horizontal
7	17967.4167	33.61	44.60	-37.07	41.14	54.00	12.86	Horizontal

11ax(HE20)_TX_CH_64_Vertical

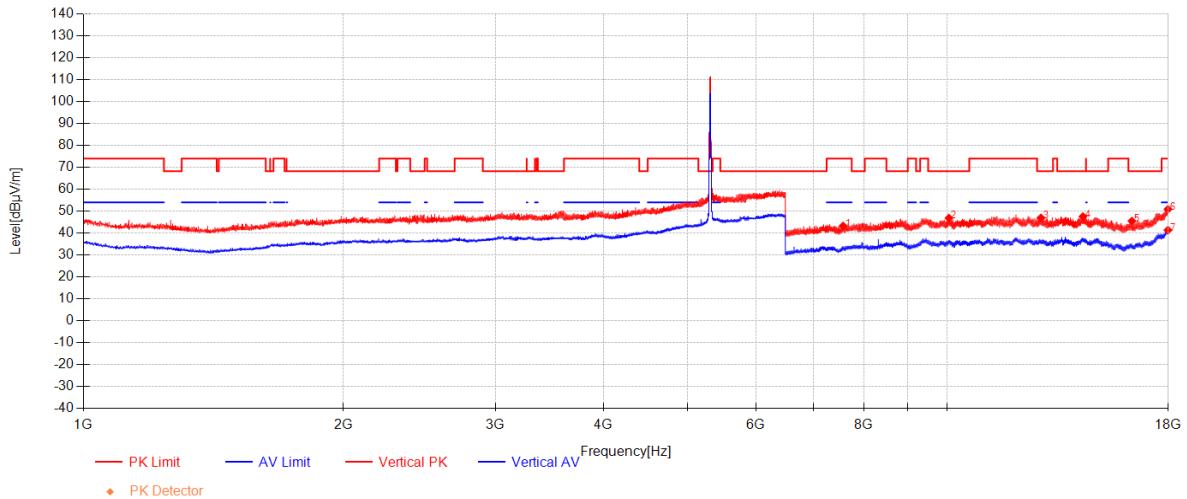


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7574.2917	52.08	36.39	-45.20	43.27	74.00	30.73	Vertical
2	10041.5208	49.73	38.83	-41.69	46.86	68.30	21.44	Vertical
3	12830.75	47.05	38.90	-39.01	46.94	68.30	21.36	Vertical
4	14352.1042	46.02	40.26	-38.74	47.54	68.30	20.76	Vertical
5	16350.2292	44.82	38.54	-37.86	45.50	68.30	22.80	Vertical
6	17999.0417	43.08	44.79	-36.98	50.89	74.00	23.11	Vertical
7	17997.125	33.57	44.78	-36.99	41.36	54.00	12.64	Vertical

11ax(HE20)_TX_CH_100_Horizontal

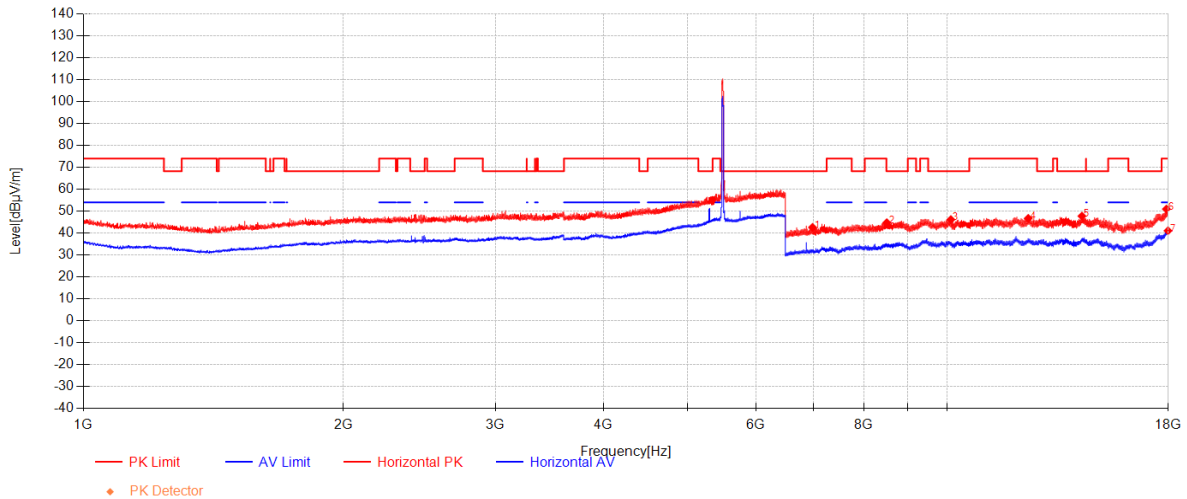


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6980.6042	53.10	35.47	-45.95	42.61	68.30	25.69	Horizontal
2	8509.625	51.61	36.86	-43.72	44.75	68.30	23.55	Horizontal
3	10092.7917	48.93	38.86	-41.64	46.16	68.30	22.14	Horizontal
4	12402.8542	45.90	39.16	-38.32	46.73	74.00	27.27	Horizontal
5	14311.8542	46.25	40.27	-38.77	47.75	68.30	20.55	Horizontal
6	17922.8542	43.85	44.34	-37.20	50.99	74.00	23.01	Horizontal
7	18000	33.26	44.80	-36.98	41.08	54.00	12.92	Horizontal

11ax(HE20)_TX_CH_100_Vertical

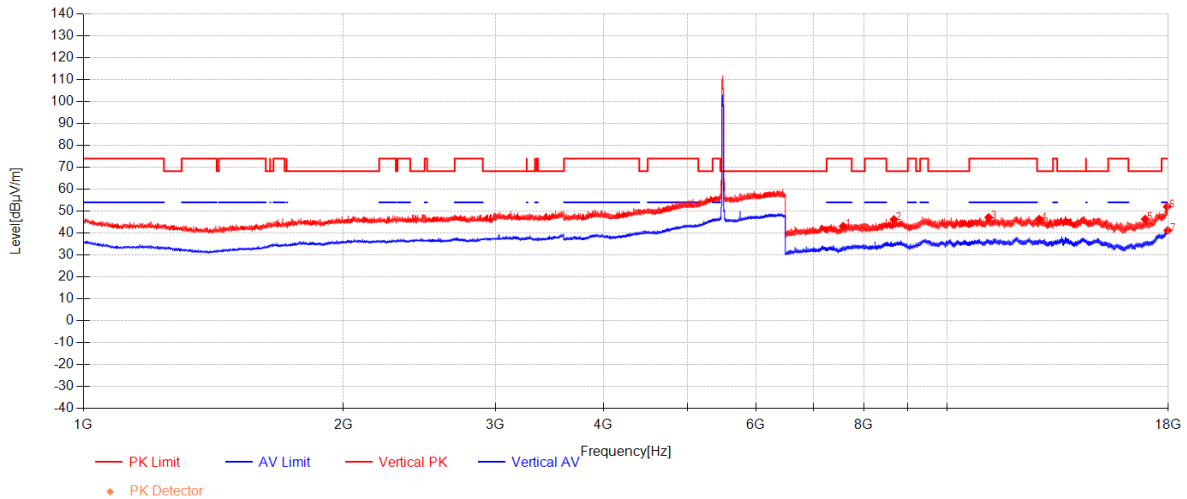


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7575.25	51.94	36.38	-45.18	43.14	74.00	30.86	Vertical
2	8672.0625	52.94	37.04	-43.81	46.17	68.30	22.13	Vertical
3	11163.25	47.67	39.48	-40.01	47.14	74.00	26.86	Vertical
4	12772.7708	46.63	38.94	-39.21	46.36	68.30	21.94	Vertical
5	16936.25	44.55	38.77	-36.95	46.38	68.30	21.92	Vertical
6	17961.1875	44.55	44.57	-37.09	52.03	74.00	21.97	Vertical
7	17989.9375	33.45	44.74	-37.01	41.18	54.00	12.82	Vertical

11ax(HE20)_TX_CH_116_Horizontal

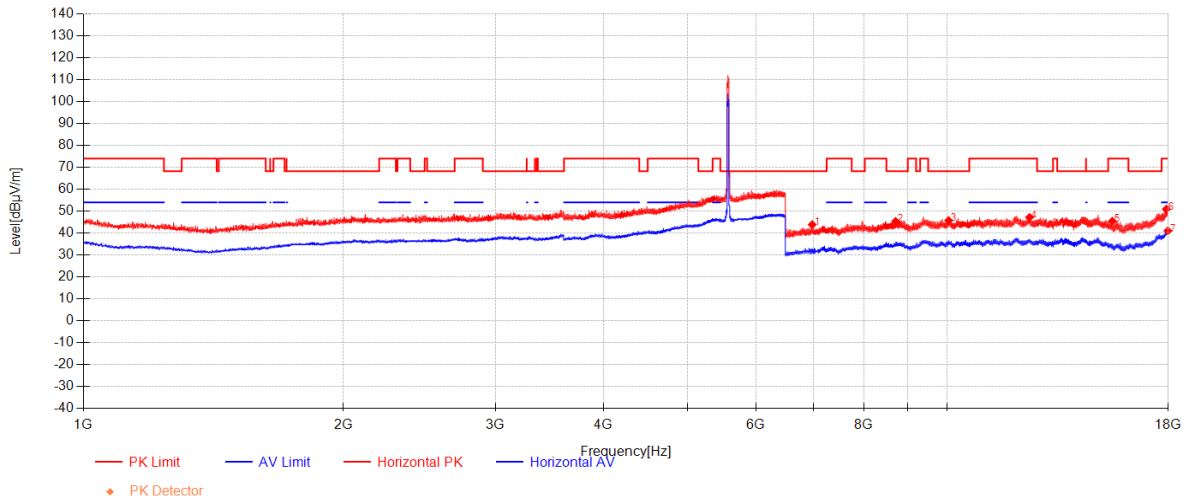


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6975.3333	54.36	35.46	-45.97	43.85	68.30	24.45	Horizontal
2	8711.3542	51.98	37.08	-43.71	45.35	68.30	22.95	Horizontal
3	10032.8958	48.65	38.82	-41.70	45.77	68.30	22.53	Horizontal
4	12447.8958	46.62	39.13	-38.55	47.20	74.00	26.80	Horizontal
5	15517.9167	44.27	39.27	-38.09	45.45	74.00	28.55	Horizontal
6	17920.4583	43.82	44.32	-37.20	50.94	74.00	23.06	Horizontal
7	17993.2917	33.27	44.76	-37.00	41.03	54.00	12.97	Horizontal

11ax(HE20)_TX_CH_116_Vertical

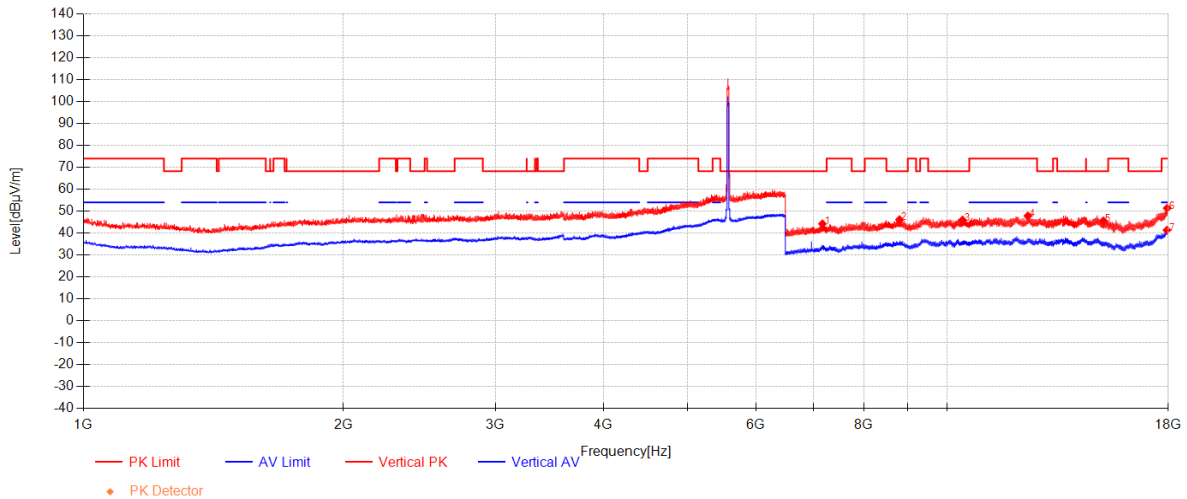


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7168.4375	54.09	35.80	-45.66	44.23	68.30	24.07	Vertical
2	8802.3958	52.85	37.18	-43.85	46.18	68.30	22.12	Vertical
3	10410.4792	48.10	39.09	-41.18	46.01	68.30	22.29	Vertical
4	12392.7917	47.08	39.16	-38.38	47.86	74.00	26.14	Vertical
5	15154.7083	43.62	39.92	-37.91	45.63	68.30	22.67	Vertical
6	17962.1458	43.90	44.57	-37.09	51.39	74.00	22.61	Vertical
7	17949.2083	34.00	44.50	-37.12	41.37	54.00	12.63	Vertical

11ax(HE20)_TX_CH_140_Horizontal

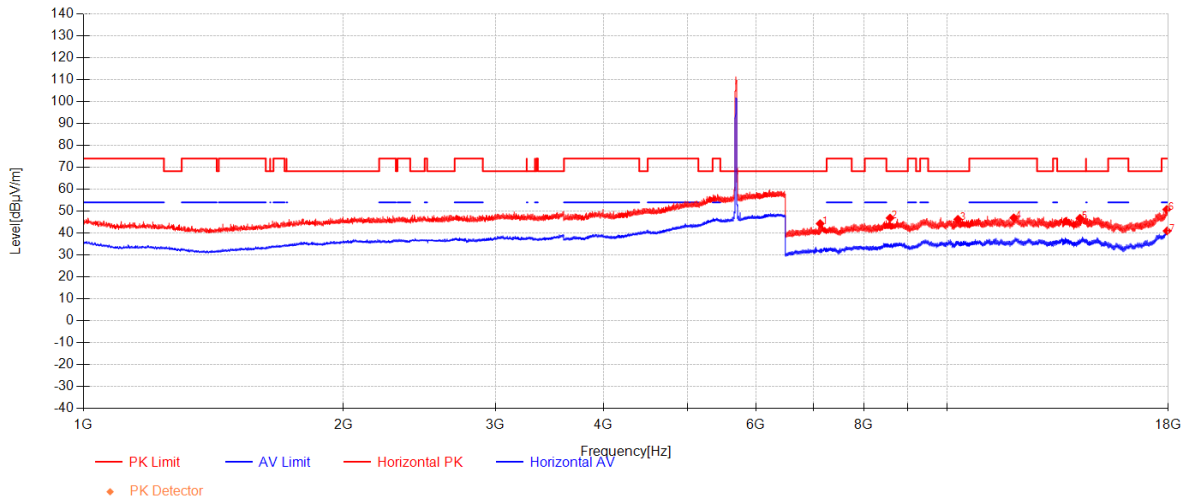


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7124.8333	54.54	35.72	-45.95	44.32	68.30	23.98	Horizontal
2	8584.375	54.01	36.94	-44.06	46.89	68.30	21.41	Horizontal
3	10283.5	48.54	39.00	-41.25	46.29	68.30	22.01	Horizontal
4	11935.1875	47.02	39.41	-39.43	46.99	74.00	27.01	Horizontal
5	14237.1042	44.87	40.28	-38.38	46.76	68.30	21.54	Horizontal
6	17939.625	43.50	44.44	-37.15	50.79	74.00	23.21	Horizontal
7	17958.3125	33.55	44.55	-37.10	41.00	54.00	13.00	Horizontal

11ax(HE20)_TX_CH_140_Vertical

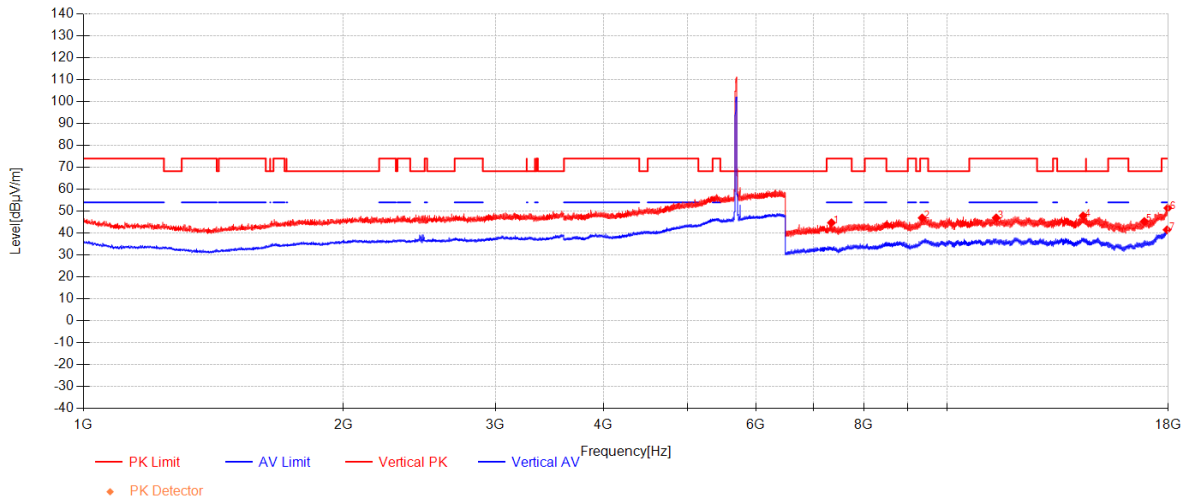


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7342.8542	54.42	36.12	-45.82	44.72	74.00	29.28	Vertical
2	9348.6458	51.94	37.89	-42.88	46.95	74.00	27.05	Vertical
3	11389.4167	47.29	39.46	-39.79	46.96	74.00	27.04	Vertical
4	14355.4583	46.39	40.26	-38.74	47.91	68.30	20.39	Vertical
5	16900.7917	43.59	38.76	-37.01	45.34	68.30	22.96	Vertical
6	17994.25	43.65	44.77	-37.00	51.42	74.00	22.58	Vertical
7	17956.3958	34.07	44.54	-37.10	41.51	54.00	12.49	Vertical

11ax(HE20)_TX_CH_149_Horizontal

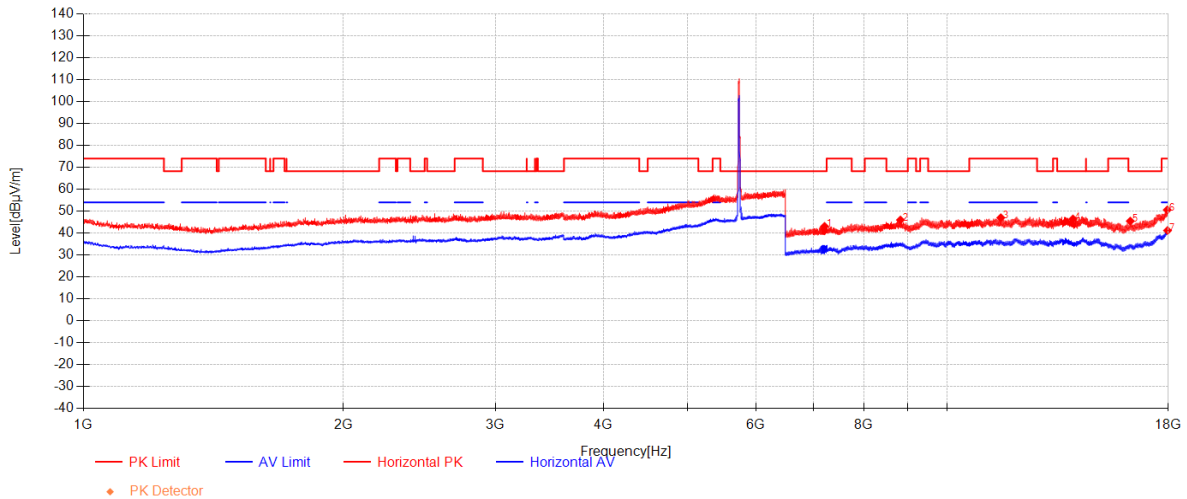


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7208.6875	52.71	35.88	-45.50	43.09	68.30	25.21	Horizontal
2	8823.9583	52.57	37.21	-43.79	45.99	68.30	22.31	Horizontal
3	11529.8125	47.41	39.45	-39.83	47.03	74.00	26.97	Horizontal
4	13974.0417	45.13	40.26	-38.93	46.46	68.30	21.84	Horizontal
5	16281.7083	44.91	38.51	-37.95	45.47	68.30	22.83	Horizontal
6	17964.5417	43.08	44.59	-37.08	50.59	74.00	23.41	Horizontal
7	17978.4375	33.55	44.67	-37.04	41.18	54.00	12.82	Horizontal

11ax(HE20)_TX_CH_149_Vertical

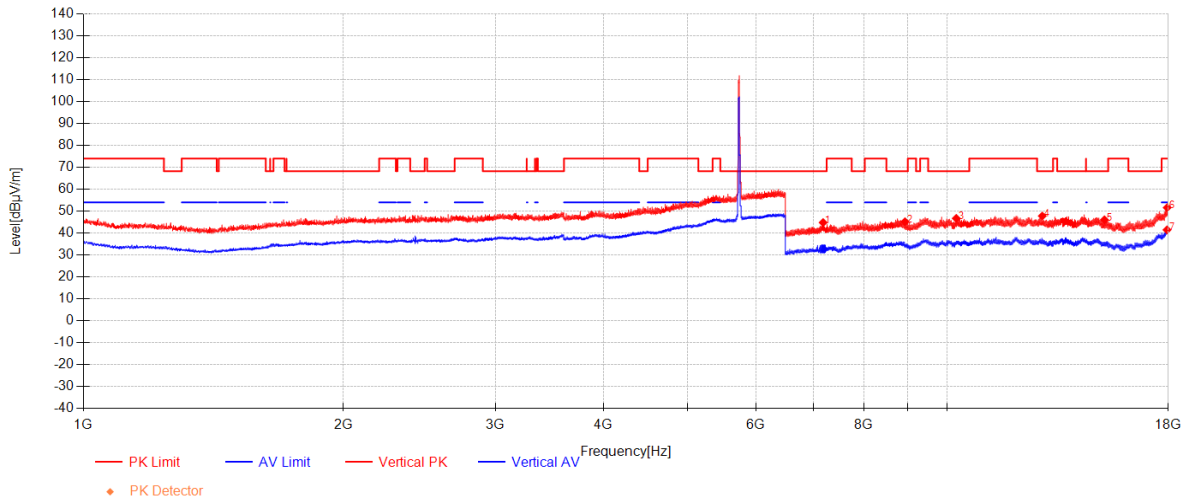


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7180.8958	54.57	35.83	-45.58	44.82	68.30	23.48	Vertical
2	8931.7708	51.44	37.32	-43.58	45.19	68.30	23.11	Vertical
3	10239.4167	49.44	38.97	-41.69	46.72	68.30	21.58	Vertical
4	12876.2708	47.55	38.87	-38.62	47.81	68.30	20.49	Vertical
5	15196.875	43.86	39.85	-37.63	46.07	68.30	22.23	Vertical
6	17962.625	44.15	44.58	-37.08	51.64	74.00	22.36	Vertical
7	17953.5208	34.07	44.52	-37.11	41.48	54.00	12.52	Vertical

11ax(HE20)_TX_CH_157_Horizontal

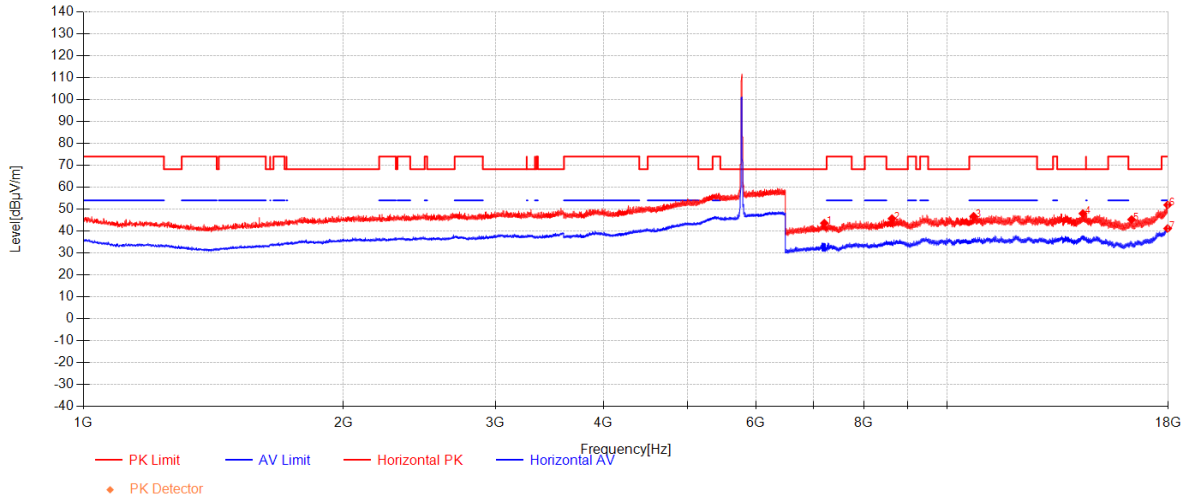


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7204.8542	53.22	35.87	-45.48	43.61	68.30	24.69	Horizontal
2	8626.5417	52.72	36.99	-44.01	45.70	68.30	22.60	Horizontal
3	10724.3333	48.15	39.31	-40.72	46.73	74.00	27.27	Horizontal
4	14349.2292	46.50	40.27	-38.75	48.02	68.30	20.28	Horizontal
5	16336.8125	44.60	38.53	-37.88	45.26	68.30	23.04	Horizontal
6	17984.6667	44.26	44.71	-37.02	51.95	74.00	22.05	Horizontal
7	17984.6667	33.49	44.71	-37.02	41.18	54.00	12.82	Horizontal

11ax(HE20)_TX_CH_157_Vertical

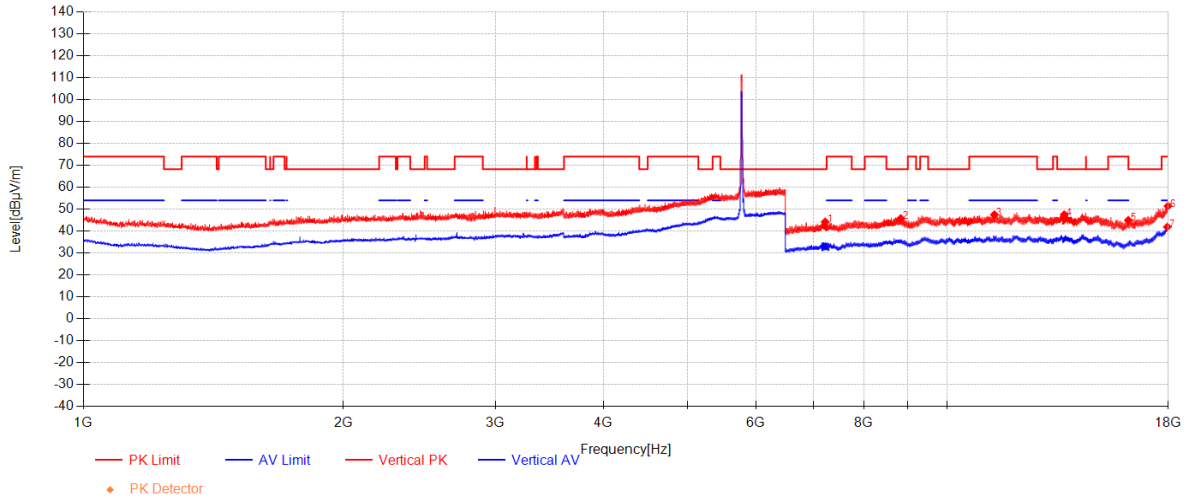


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7220.1875	53.88	35.90	-45.56	44.21	68.30	24.09	Vertical
2	8829.7083	52.34	37.21	-43.77	45.78	68.30	22.52	Vertical
3	11334.3125	48.21	39.47	-40.20	47.48	74.00	26.52	Vertical
4	13652.5208	45.83	39.78	-38.11	47.50	68.30	20.80	Vertical
5	16194.5	44.53	38.48	-38.06	44.95	74.00	29.05	Vertical
6	17999.5208	43.61	44.80	-36.98	51.43	74.00	22.57	Vertical
7	17971.25	34.33	44.63	-37.06	41.90	54.00	12.10	Vertical

11ax(HE20)_TX_CH_165_Horizontal

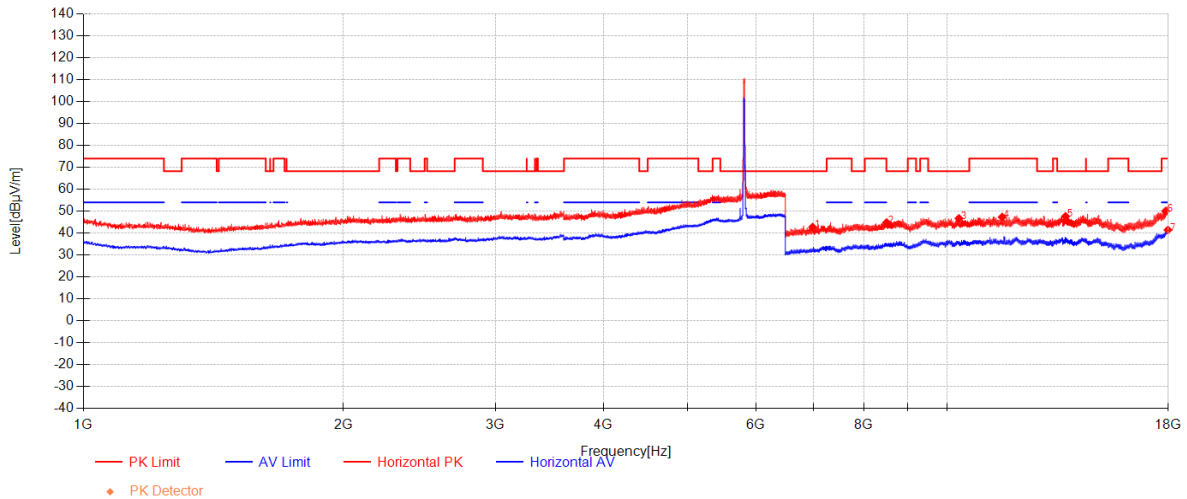


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6983	53.25	35.47	-45.95	42.77	68.30	25.53	Horizontal
2	8505.7917	51.68	36.86	-43.71	44.83	68.30	23.47	Horizontal
3	10310.8125	48.78	39.02	-41.10	46.70	68.30	21.60	Horizontal
4	11571.5	47.35	39.44	-39.47	47.32	74.00	26.68	Horizontal
5	13698.0417	45.75	39.85	-37.96	47.64	68.30	20.66	Horizontal
6	17888.3542	43.28	44.13	-37.35	50.06	74.00	23.94	Horizontal
7	17997.125	33.66	44.78	-36.99	41.45	54.00	12.55	Horizontal

11ax(HE20)_TX_CH_165_Vertical

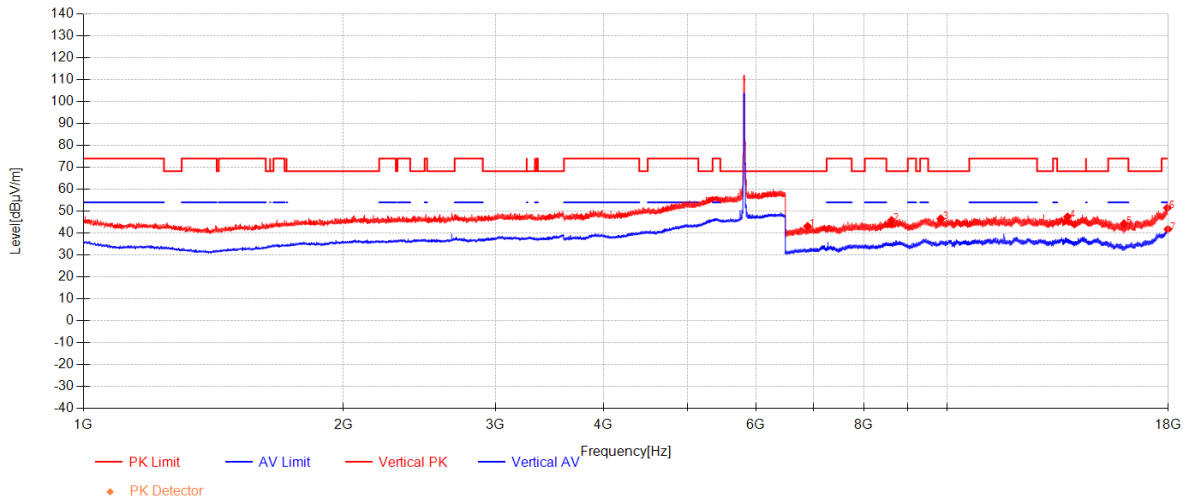


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6889.5625	53.95	35.32	-46.19	43.09	68.30	25.21	Vertical
2	8617.4375	52.89	36.98	-44.05	45.82	68.30	22.48	Vertical
3	9825.4167	49.98	38.56	-41.98	46.55	68.30	21.75	Vertical
4	13772.3125	45.81	39.96	-38.36	47.41	68.30	20.89	Vertical
5	16009.5417	43.95	38.40	-38.04	44.31	74.00	29.69	Vertical
6	17971.25	43.94	44.63	-37.06	51.51	74.00	22.49	Vertical
7	17997.125	33.98	44.78	-36.99	41.77	54.00	12.23	Vertical

11ax(HE40)_TX_CH_38_Horizontal

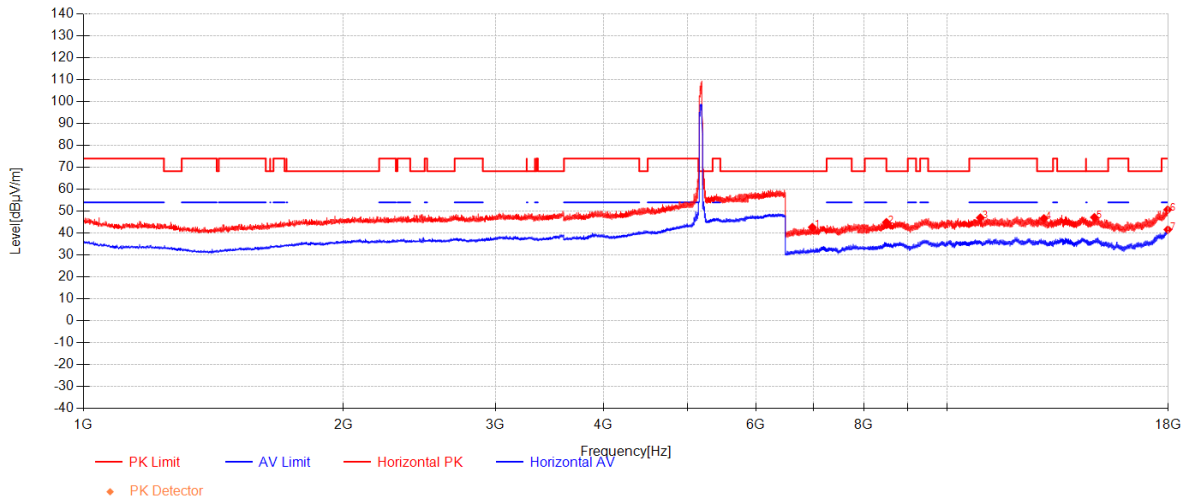


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6977.25	53.15	35.46	-45.96	42.65	68.30	25.65	Horizontal
2	8500.0417	51.76	36.85	-43.68	44.93	68.30	23.37	Horizontal
3	10918.3958	47.79	39.44	-40.23	47.00	74.00	27.00	Horizontal
4	12932.3333	46.38	38.84	-38.56	46.67	68.30	21.63	Horizontal
5	14794.8542	44.55	40.22	-37.57	47.20	68.30	21.10	Horizontal
6	17987.0625	42.97	44.72	-37.02	50.68	74.00	23.32	Horizontal
7	17997.6042	33.80	44.79	-36.99	41.60	54.00	12.40	Horizontal

11ax(HE40)_TX_CH_38_Vertical

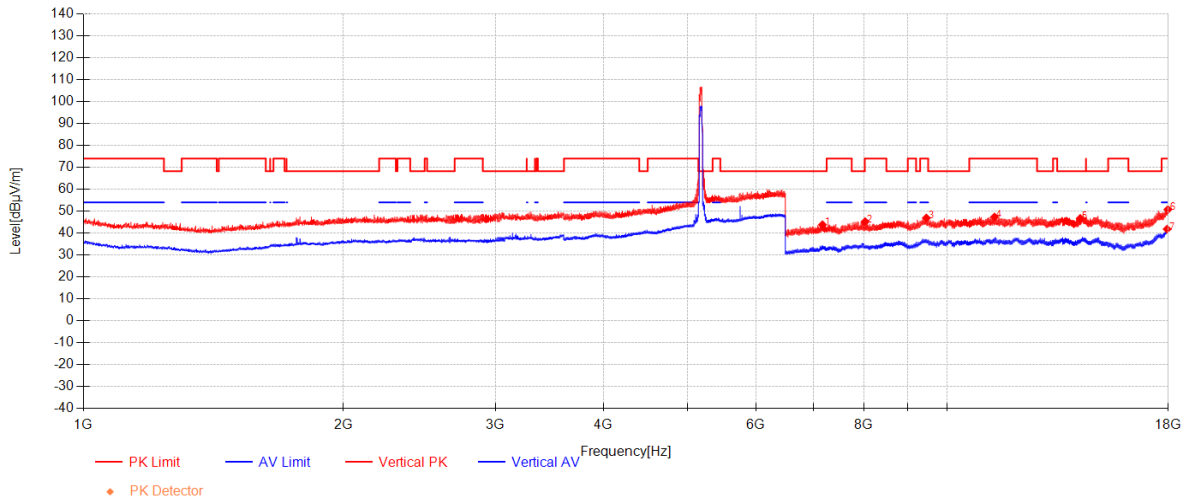


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7168.4375	53.68	35.80	-45.66	43.82	68.30	24.48	Vertical
2	8031.8958	53.22	36.34	-44.32	45.23	74.00	28.77	Vertical
3	9454.5417	51.59	38.04	-42.72	46.90	74.00	27.10	Vertical
4	11337.6667	48.07	39.47	-40.17	47.36	74.00	26.64	Vertical
5	14246.6875	44.89	40.28	-38.44	46.72	68.30	21.58	Vertical
6	17996.1667	43.00	44.78	-36.99	50.79	74.00	23.21	Vertical
7	17958.7917	34.36	44.55	-37.10	41.82	54.00	12.18	Vertical

11ax(HE40)_TX_CH_46_Horizontal

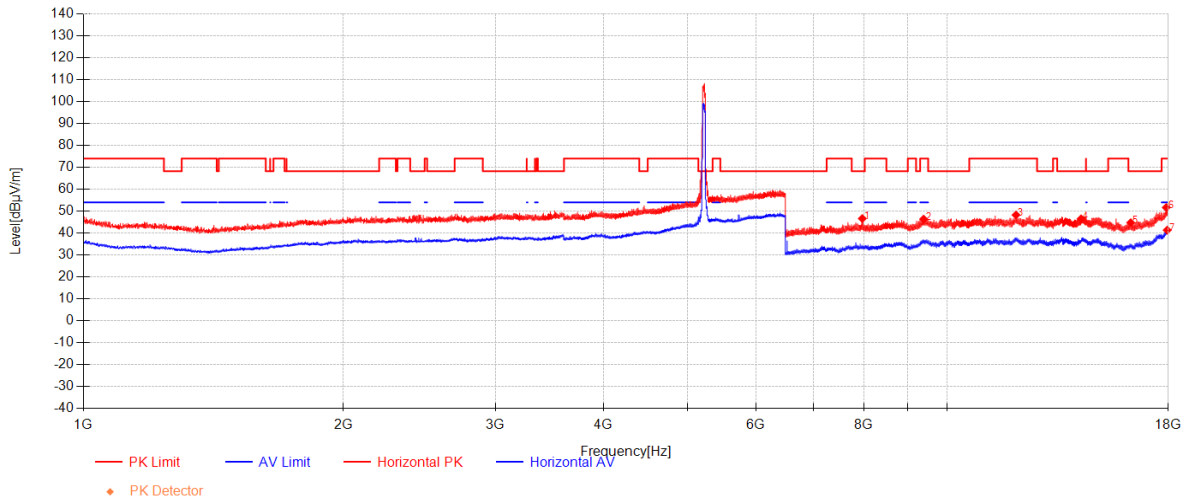


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7971.5208	54.82	36.31	-44.47	46.66	68.30	21.64	Horizontal
2	9386.9792	51.28	37.94	-42.83	46.39	74.00	27.61	Horizontal
3	12005.625	47.48	39.40	-38.61	48.27	74.00	25.73	Horizontal
4	14279.2708	44.92	40.27	-38.65	46.54	68.30	21.76	Horizontal
5	16297.5208	44.18	38.52	-37.93	44.77	68.30	23.53	Horizontal
6	17916.625	44.60	44.30	-37.21	51.69	74.00	22.31	Horizontal
7	17963.5833	33.86	44.58	-37.08	41.36	54.00	12.64	Horizontal

11ax(HE40)_TX_CH_46_Veritical

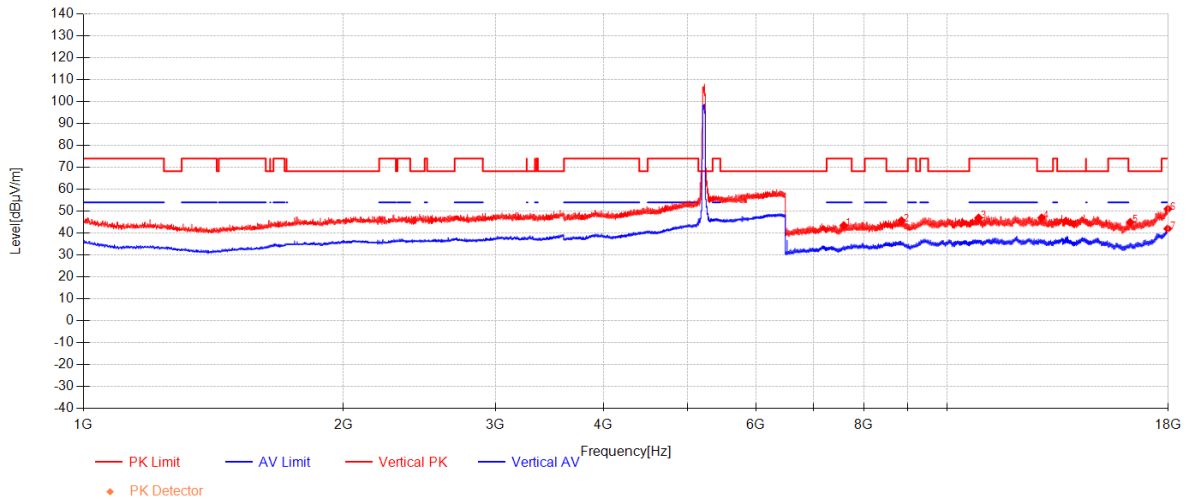


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7587.7083	52.13	36.38	-45.03	43.48	74.00	30.52	Vertical
2	8846.9583	52.15	37.23	-43.71	45.67	68.30	22.63	Vertical
3	10866.6458	47.80	39.41	-40.26	46.94	74.00	27.06	Vertical
4	12854.7083	46.90	38.89	-38.80	46.98	68.30	21.32	Vertical
5	16276.9167	44.40	38.51	-37.96	44.95	68.30	23.35	Vertical
6	17996.6458	43.23	44.78	-36.99	51.02	74.00	22.98	Vertical
7	17988.0208	34.30	44.73	-37.01	42.01	54.00	11.99	Vertical

11ax(HE40)_TX_CH_54_Horizontal

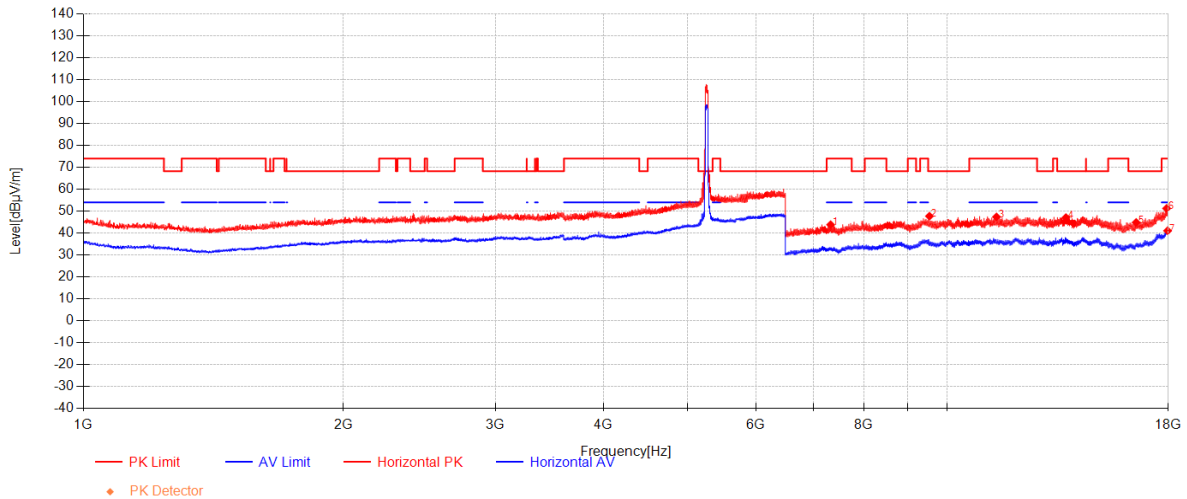


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7326.5625	53.62	36.09	-45.89	43.82	74.00	30.18	Horizontal
2	9533.6042	51.92	38.15	-42.34	47.73	68.30	20.57	Horizontal
3	11397.5625	47.67	39.46	-39.73	47.40	74.00	26.60	Horizontal
4	13714.8125	45.21	39.87	-38.03	47.05	68.30	21.25	Horizontal
5	16535.6667	44.00	38.61	-37.75	44.86	68.30	23.44	Horizontal
6	17935.3125	44.01	44.41	-37.16	51.26	74.00	22.74	Horizontal
7	17981.3125	33.39	44.69	-37.03	41.05	54.00	12.95	Horizontal

11ax(HE40)_TX_CH_54_Vertical

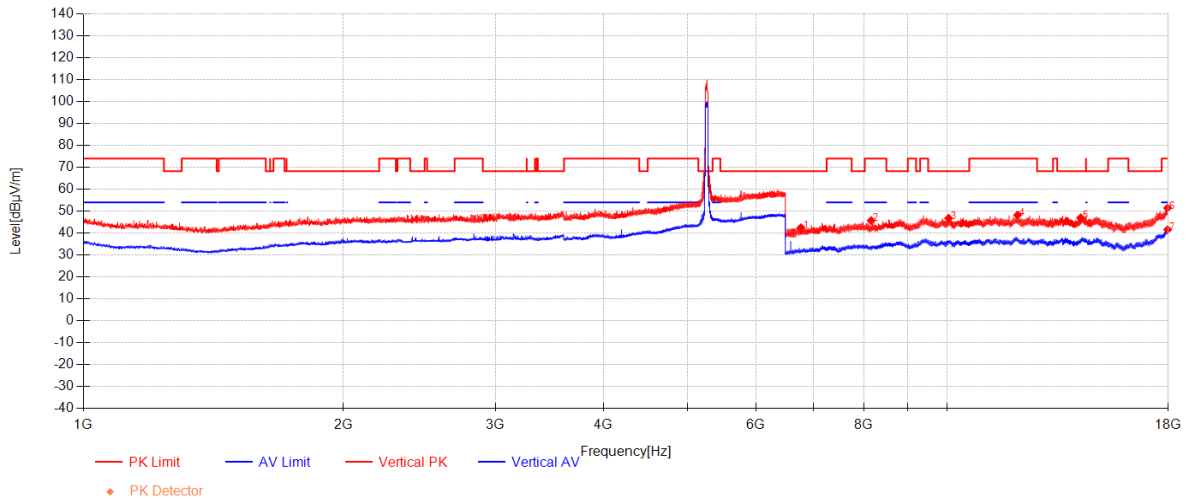


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6770.7292	53.85	35.13	-46.49	42.49	68.30	25.81	Vertical
2	8163.1875	53.56	36.48	-44.30	45.74	74.00	28.26	Vertical
3	10032.4167	49.69	38.82	-41.70	46.81	68.30	21.49	Vertical
4	12058.8125	47.98	39.36	-39.05	48.29	74.00	25.71	Vertical
5	14261.0625	45.22	40.27	-38.53	46.96	68.30	21.34	Vertical
6	17983.2292	43.79	44.70	-37.03	51.46	74.00	22.54	Vertical
7	17983.7083	33.91	44.70	-37.03	41.59	54.00	12.41	Vertical

11ax(HE40)_TX_CH_62_Horizontal

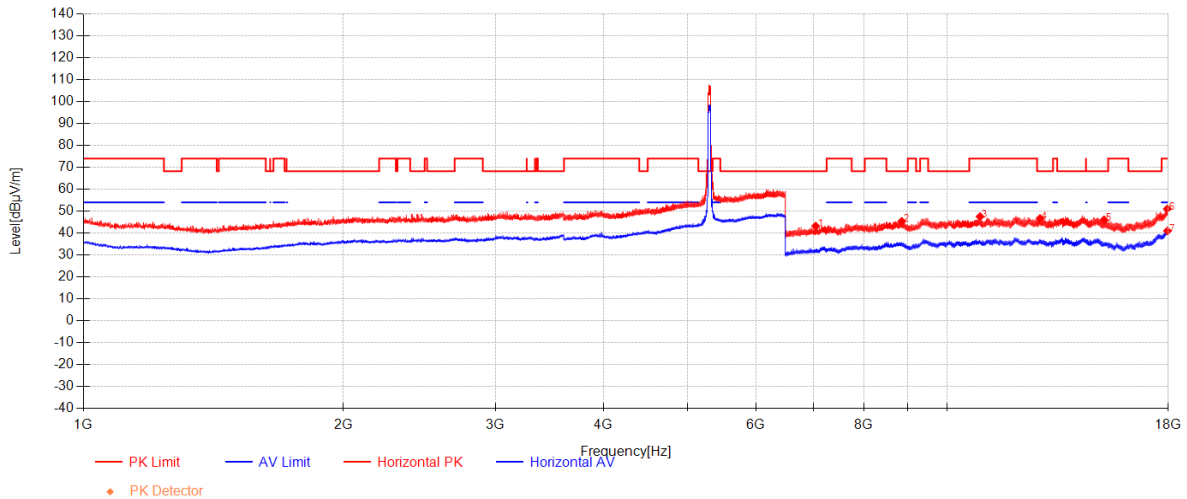


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7039.5417	53.65	35.57	-45.99	43.23	68.30	25.07	Horizontal
2	8855.1042	51.84	37.24	-43.69	45.39	68.30	22.91	Horizontal
3	10908.8125	48.31	39.44	-40.20	47.55	74.00	26.45	Horizontal
4	12798.6458	47.05	38.92	-39.28	46.69	68.30	21.61	Horizontal
5	15180.5833	43.92	39.87	-37.74	46.05	68.30	22.25	Horizontal
6	17969.3333	43.52	44.62	-37.07	51.07	74.00	22.93	Horizontal
7	17975.0833	33.41	44.65	-37.05	41.01	54.00	12.99	Horizontal

11ax(HE40)_TX_CH_62_Vertical

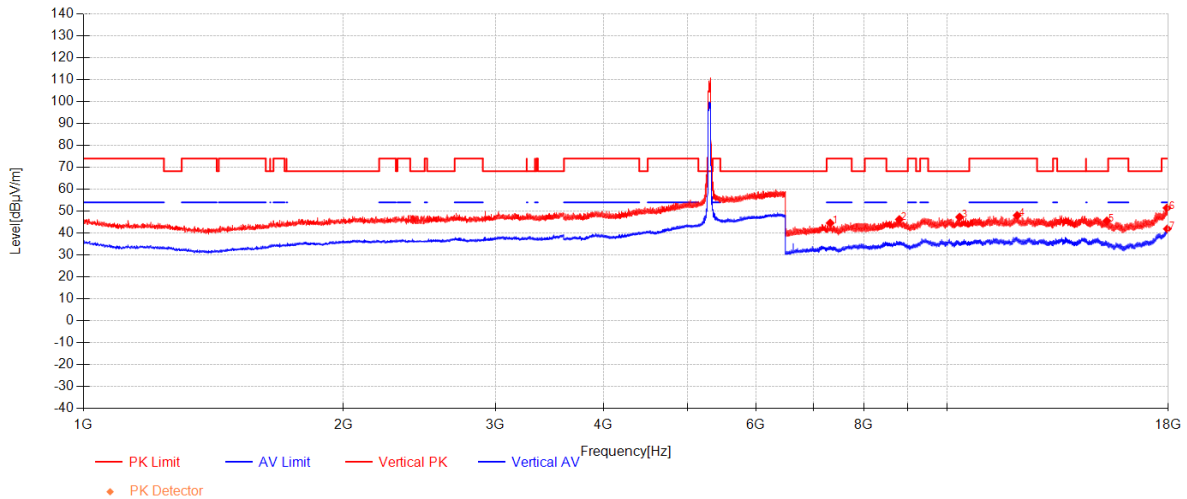


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7318.4167	54.43	36.07	-45.93	44.58	74.00	29.42	Vertical
2	8799.0417	52.92	37.18	-43.86	46.24	68.30	22.06	Vertical
3	10331.4167	49.41	39.03	-41.13	47.31	68.30	20.99	Vertical
4	12043.9583	47.62	39.37	-38.93	48.06	74.00	25.94	Vertical
5	15293.6667	44.03	39.67	-38.12	45.59	68.30	22.71	Vertical
6	17952.0833	44.07	44.51	-37.11	51.47	74.00	22.53	Vertical
7	17969.3333	34.39	44.62	-37.07	41.94	54.00	12.06	Vertical

11ax(HE40)_TX_CH_102_Horizontal

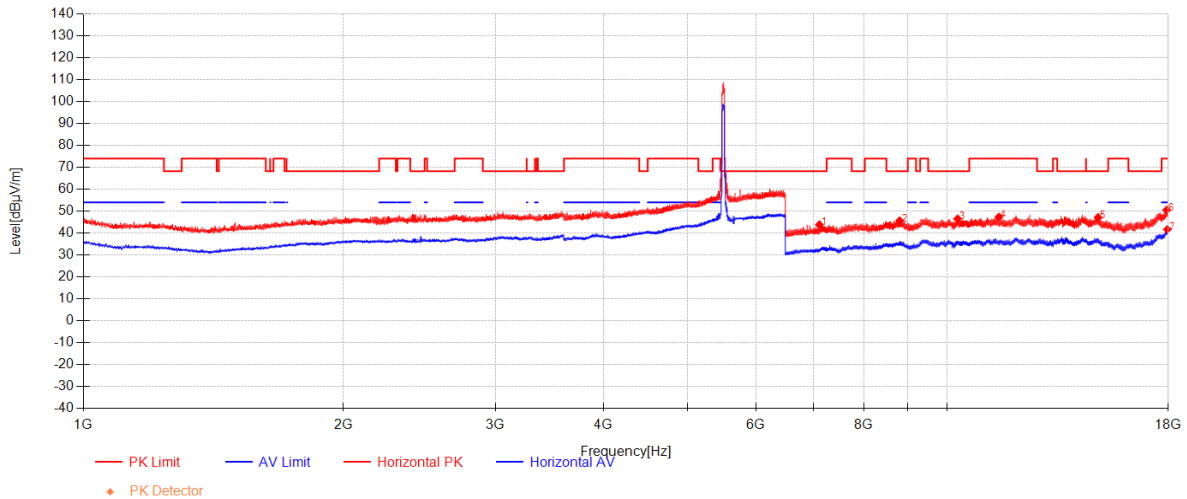


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7109.9792	54.21	35.70	-46.04	43.86	68.30	24.44	Horizontal
2	8805.2708	52.32	37.19	-43.84	45.66	68.30	22.64	Horizontal
3	10274.875	48.87	38.99	-41.33	46.53	68.30	21.77	Horizontal
4	11469.9167	47.86	39.45	-39.98	47.34	74.00	26.66	Horizontal
5	14940.0417	45.17	40.21	-38.20	47.18	68.30	21.12	Horizontal
6	17936.75	43.26	44.42	-37.16	50.52	74.00	23.48	Horizontal
7	17969.8125	34.14	44.62	-37.06	41.69	54.00	12.31	Horizontal

11ax(HE40)_TX_CH_102_Vertical

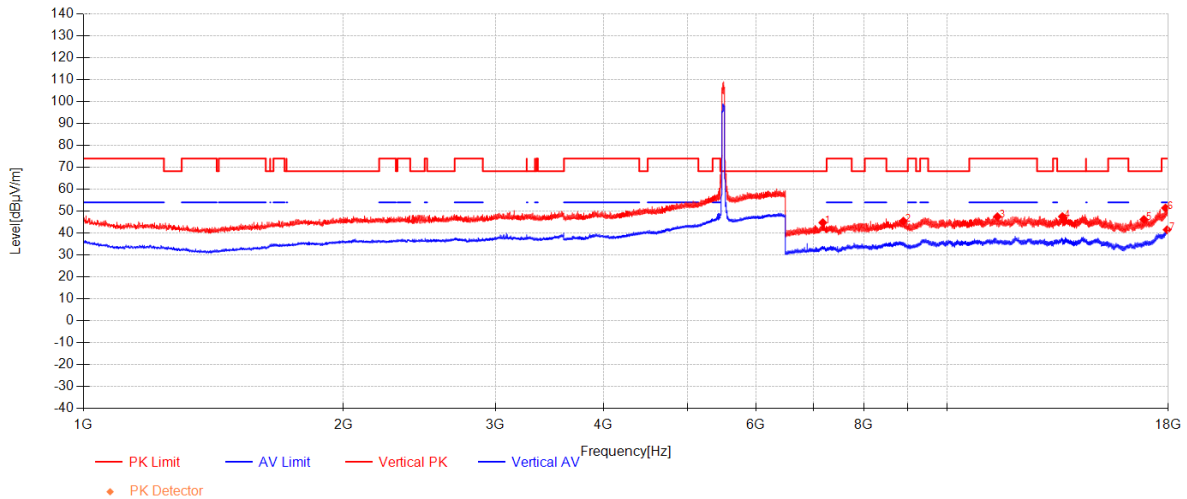


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7174.6667	54.58	35.81	-45.62	44.78	68.30	23.52	Vertical
2	8894.3958	51.76	37.28	-43.57	45.48	68.30	22.82	Vertical
3	11424.875	47.84	39.46	-39.80	47.49	74.00	26.51	Vertical
4	13585.4375	46.26	39.68	-38.38	47.56	68.30	20.74	Vertical
5	16880.6667	44.63	38.75	-37.16	46.23	68.30	22.07	Vertical
6	17879.25	44.79	44.08	-37.42	51.45	74.00	22.55	Vertical
7	17959.2708	34.06	44.56	-37.09	41.52	54.00	12.48	Vertical

11ax(HE40)_TX_CH_110_Horizontal

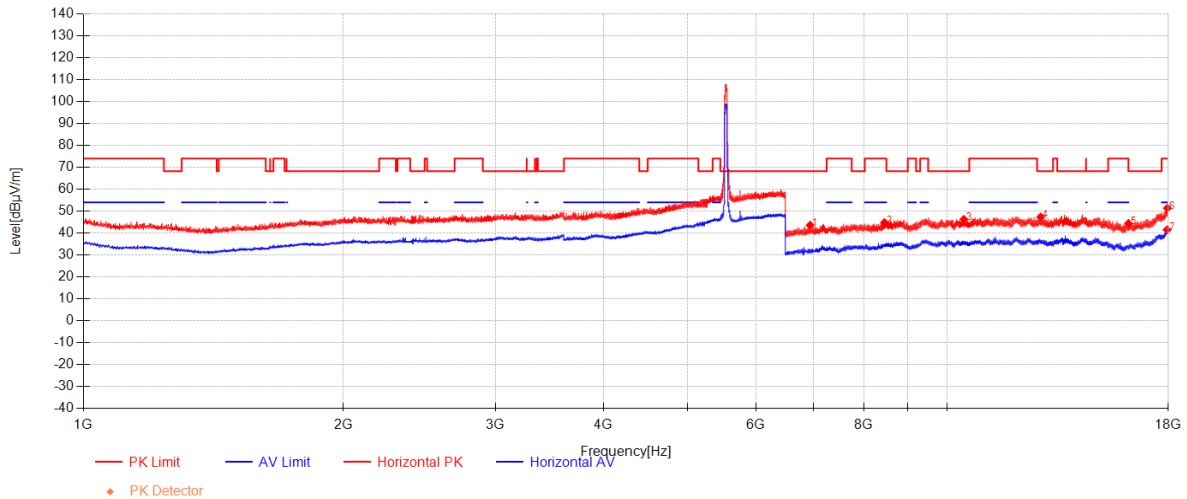


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6937	54.29	35.40	-46.05	43.63	68.30	24.67	Horizontal
2	8455.9583	52.00	36.80	-43.98	44.82	74.00	29.18	Horizontal
3	10448.3333	48.09	39.11	-40.92	46.28	68.30	22.02	Horizontal
4	12820.2083	47.56	38.91	-39.10	47.36	68.30	20.94	Horizontal
5	16200.7292	43.99	38.48	-38.06	44.41	68.30	23.89	Horizontal
6	17967.8958	43.84	44.61	-37.07	51.38	74.00	22.62	Horizontal
7	17954.4792	34.08	44.53	-37.11	41.50	54.00	12.50	Horizontal

11ax(HE40)_TX_CH_110_Verical

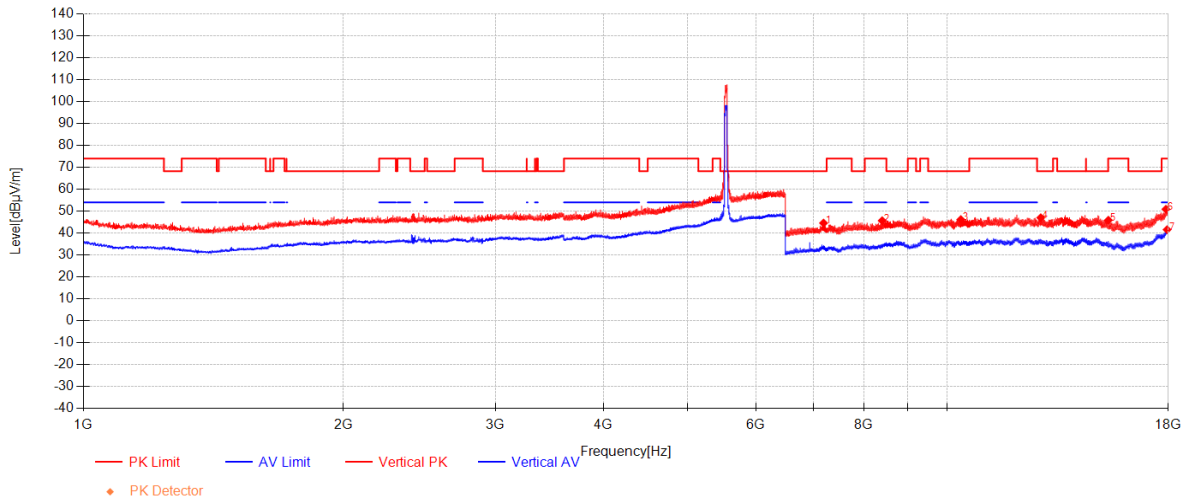


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7189.5208	54.25	35.84	-45.52	44.57	68.30	23.73	Vertical
2	8405.1667	53.24	36.75	-44.32	45.66	74.00	28.34	Vertical
3	10364	48.29	39.05	-41.19	46.16	68.30	22.14	Vertical
4	12825	47.20	38.91	-39.06	47.04	68.30	21.26	Vertical
5	15355.9583	44.32	39.56	-37.98	45.90	74.00	28.10	Vertical
6	17901.2917	43.94	44.21	-37.26	50.89	74.00	23.11	Vertical
7	17956.3958	34.14	44.54	-37.10	41.58	54.00	12.42	Vertical

11ax(HE40)_TX_CH_134_Horizontal

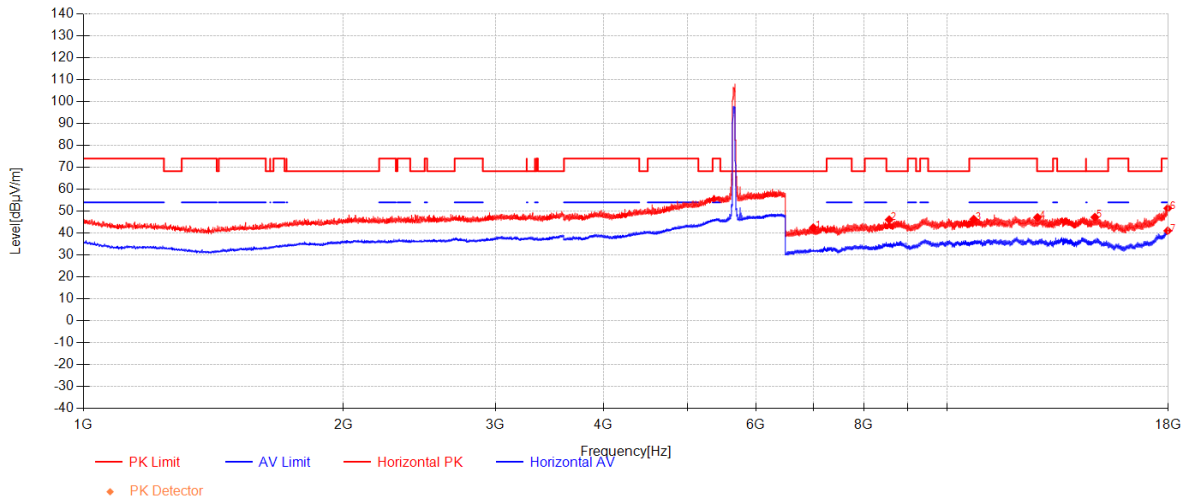


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6994.5	52.91	35.49	-45.92	42.48	68.30	25.82	Horizontal
2	8564.25	53.16	36.92	-43.97	46.11	68.30	22.19	Horizontal
3	10728.1667	47.74	39.31	-40.71	46.34	74.00	27.66	Horizontal
4	12713.8333	47.22	38.97	-39.05	47.14	68.30	21.16	Horizontal
5	14811.625	44.68	40.22	-37.64	47.26	68.30	21.04	Horizontal
6	17991.8542	43.56	44.75	-37.00	51.31	74.00	22.69	Horizontal
7	17988.5	33.33	44.73	-37.01	41.05	54.00	12.95	Horizontal

11ax(HE40)_TX_CH_134_Vertical

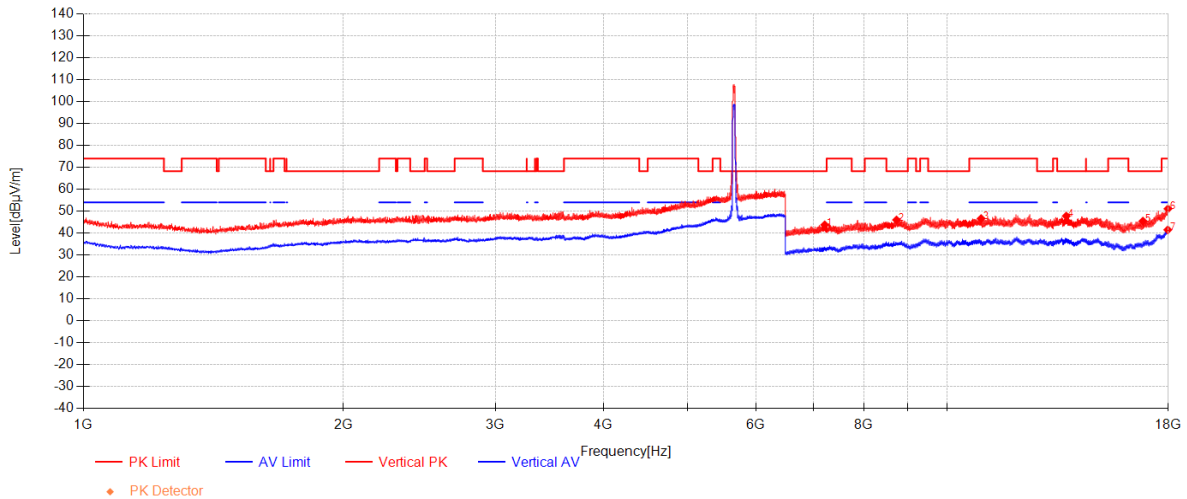


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7212.0417	53.41	35.88	-45.52	43.77	68.30	24.53	Vertical
2	8733.3958	52.65	37.11	-43.75	46.01	68.30	22.29	Vertical
3	10939.4792	47.49	39.46	-40.31	46.64	74.00	27.36	Vertical
4	13726.7917	46.00	39.89	-38.10	47.79	68.30	20.51	Vertical
5	16839.4583	44.20	38.74	-37.46	45.47	68.30	22.83	Vertical
6	18000	43.29	44.80	-36.98	51.11	74.00	22.89	Vertical
7	17991.8542	33.76	44.75	-37.00	41.51	54.00	12.49	Vertical

11ax(HE40)_TX_CH_151_Horizontal

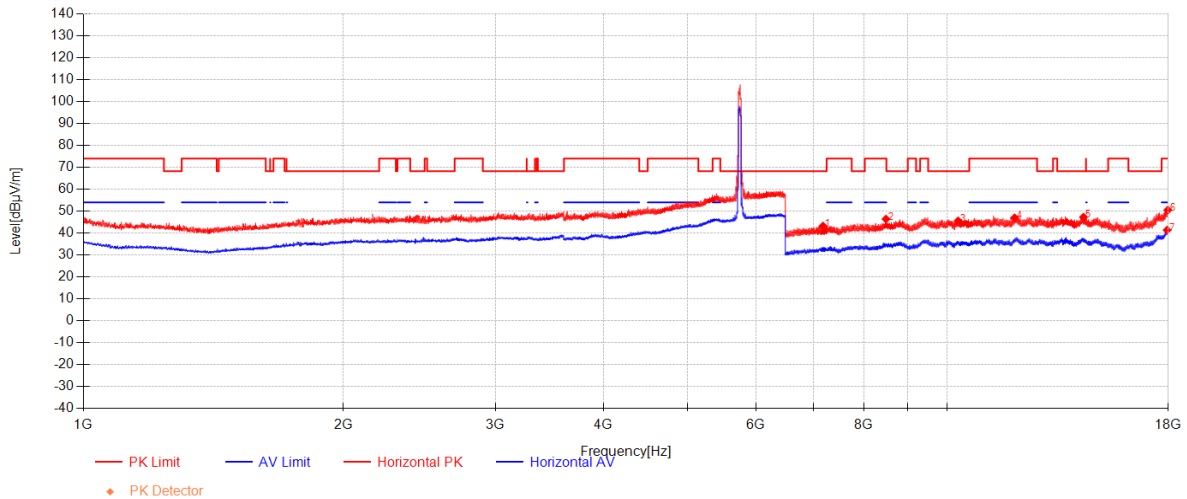


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7179.4583	53.00	35.82	-45.59	43.24	68.30	25.06	Horizontal
2	8490.4583	53.32	36.84	-43.74	46.41	74.00	27.59	Horizontal
3	10290.6875	47.78	39.00	-41.17	45.61	68.30	22.69	Horizontal
4	11959.625	46.67	39.40	-39.11	46.97	74.00	27.03	Horizontal
5	14371.75	45.77	40.26	-38.73	47.30	68.30	21.00	Horizontal
6	17991.375	42.79	44.75	-37.00	50.53	74.00	23.47	Horizontal
7	17956.875	33.95	44.54	-37.10	41.39	54.00	12.61	Horizontal

11ax(HE40)_TX_CH_151_Vertical

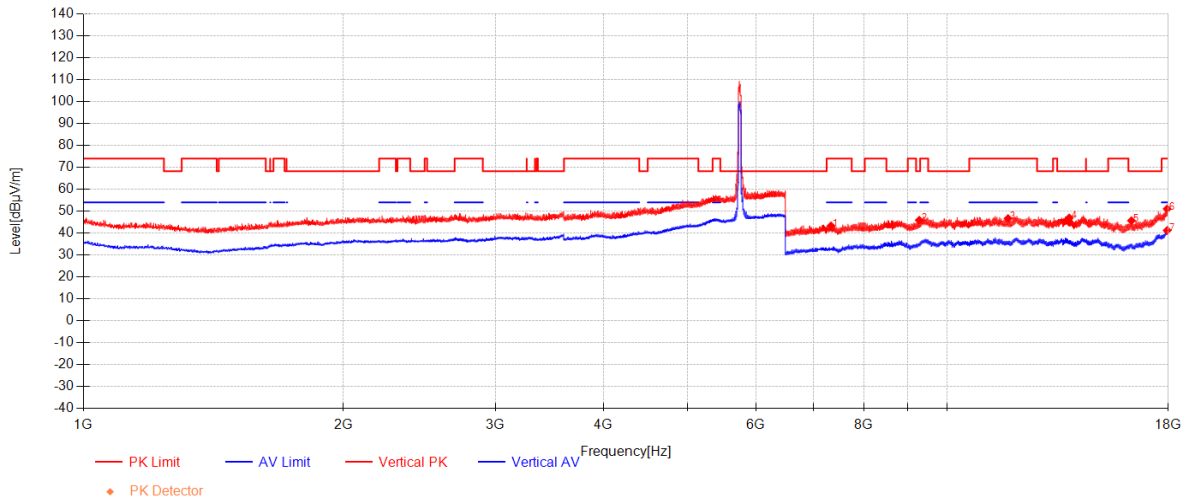


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7332.7917	53.07	36.10	-45.86	43.31	74.00	30.69	Vertical
2	9278.2083	51.05	37.79	-42.95	45.89	68.30	22.41	Vertical
3	11754.5417	46.78	39.42	-39.53	46.67	74.00	27.33	Vertical
4	13837.4792	45.33	40.06	-38.45	46.93	68.30	21.37	Vertical
5	16330.1042	45.04	38.53	-37.89	45.68	68.30	22.62	Vertical
6	17960.7083	43.59	44.56	-37.09	51.06	74.00	22.94	Vertical
7	17959.75	33.76	44.56	-37.09	41.23	54.00	12.77	Vertical

11ax(HE40)_TX_CH_159_Horizontal

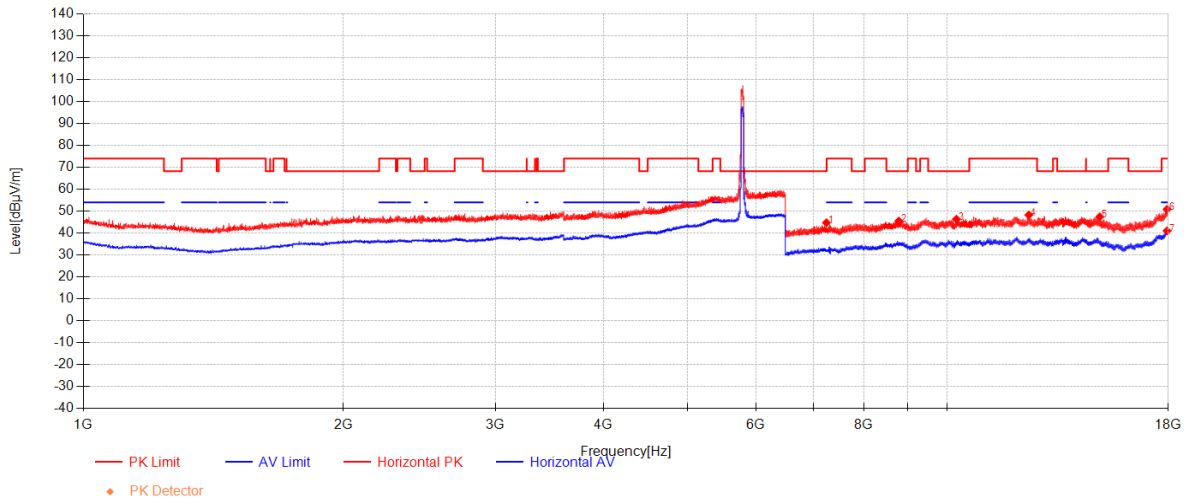


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7244.1458	54.52	35.94	-45.70	44.76	68.30	23.54	Horizontal
2	8784.1875	52.19	37.16	-43.83	45.52	68.30	22.78	Horizontal
3	10244.6875	49.04	38.97	-41.63	46.38	68.30	21.92	Horizontal
4	12422.5	47.54	39.15	-38.42	48.26	74.00	25.74	Horizontal
5	15008.0833	45.18	40.19	-37.92	47.44	68.30	20.86	Horizontal
6	17954.4792	43.44	44.53	-37.11	50.86	74.00	23.14	Horizontal
7	17952.5625	33.63	44.52	-37.11	41.03	54.00	12.97	Horizontal

11ax(HE40)_TX_CH_159_Verical

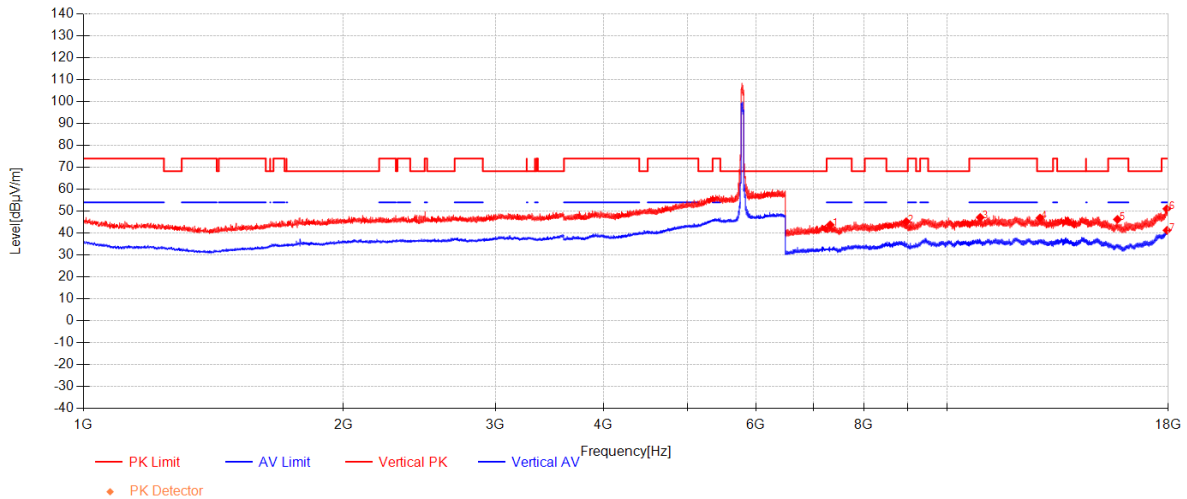


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7316.9792	53.63	36.07	-45.93	43.77	74.00	30.23	Vertical
2	8961.4792	51.44	37.36	-43.60	45.20	68.30	23.10	Vertical
3	10914.0833	47.93	39.44	-40.22	47.15	74.00	26.85	Vertical
4	12799.125	47.24	38.92	-39.28	46.88	68.30	21.42	Vertical
5	15730.6667	45.31	38.88	-37.96	46.24	74.00	27.76	Vertical
6	17946.3333	43.75	44.48	-37.13	51.10	74.00	22.90	Vertical
7	17954	33.84	44.52	-37.11	41.26	54.00	12.74	Vertical

11ax(HE80)_TX_CH_42_Horizontal

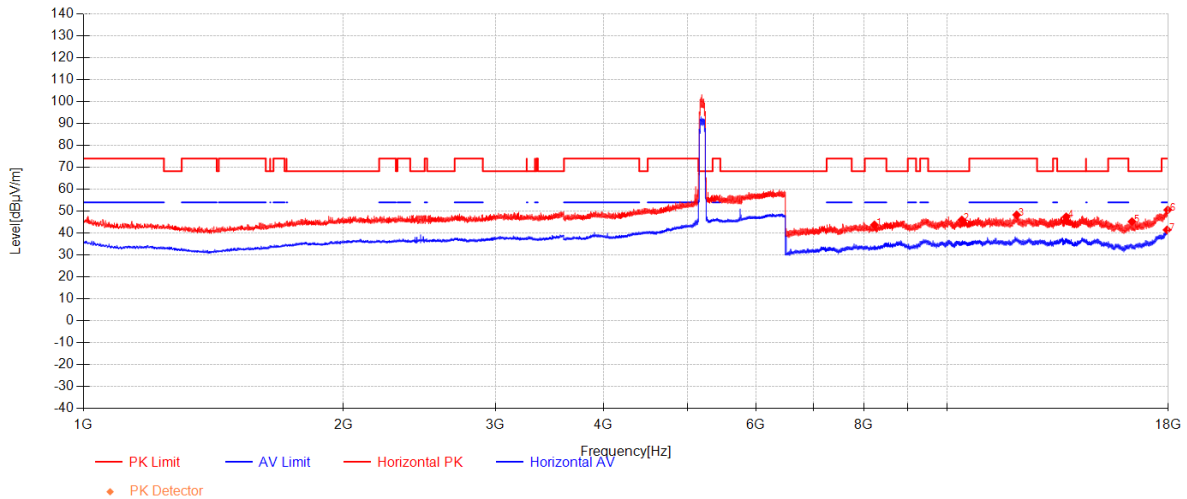


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	8233.625	51.52	36.56	-44.33	43.74	74.00	30.26	Horizontal
2	10393.7083	48.16	39.08	-41.24	46.00	68.30	22.30	Horizontal
3	12027.6667	47.74	39.38	-38.79	48.33	74.00	25.67	Horizontal
4	13725.8333	45.63	39.89	-38.10	47.42	68.30	20.88	Horizontal
5	16354.0625	44.53	38.54	-37.85	45.22	68.30	23.08	Horizontal
6	17991.8542	42.86	44.75	-37.00	50.61	74.00	23.39	Horizontal
7	17954.9583	34.04	44.53	-37.11	41.46	54.00	12.54	Horizontal

11ax(HE80)_TX_CH_42_Veritical

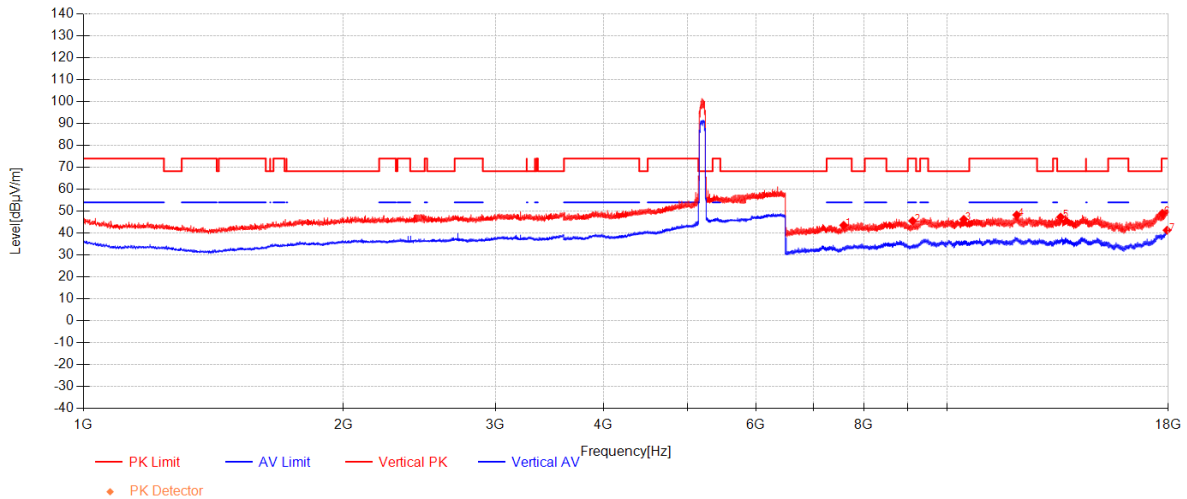


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7585.3125	52.24	36.38	-45.06	43.56	74.00	30.44	Vertical
2	9114.8125	51.08	37.56	-43.07	45.57	74.00	28.43	Vertical
3	10445.4583	48.14	39.11	-40.94	46.31	68.30	21.99	Vertical
4	12030.0625	47.73	39.38	-38.81	48.30	74.00	25.70	Vertical
5	13521.2292	46.57	39.58	-38.82	47.34	68.30	20.96	Vertical
6	17734.0625	43.72	43.20	-37.89	49.03	74.00	24.97	Vertical
7	17954.4792	33.89	44.53	-37.11	41.31	54.00	12.69	Vertical

11ax(HE80)_TX_CH_58_Horizontal

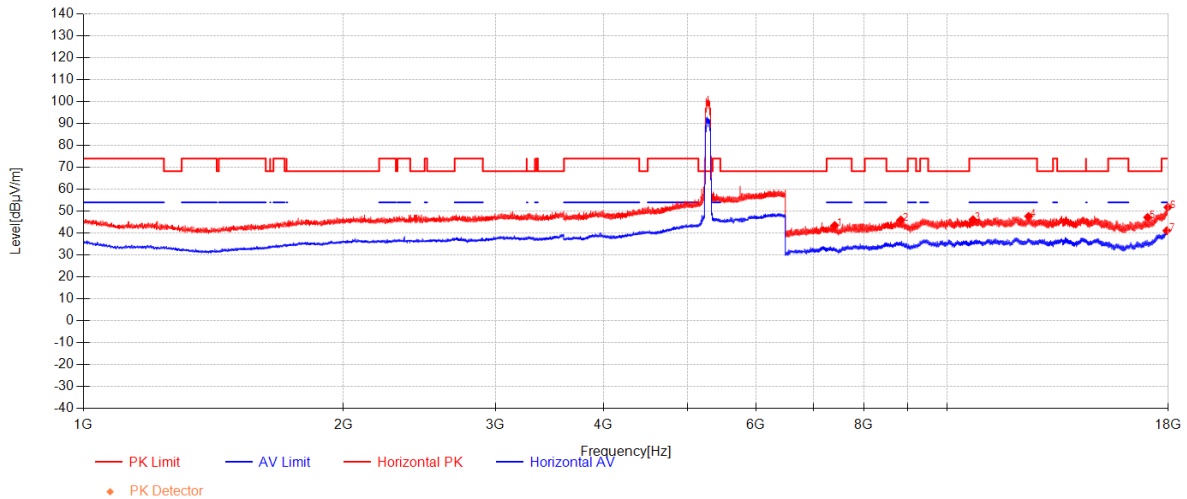


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7406.5833	52.88	36.23	-45.60	43.52	74.00	30.48	Horizontal
2	8833.5417	52.57	37.22	-43.76	46.03	68.30	22.27	Horizontal
3	10705.6458	47.64	39.29	-40.79	46.14	74.00	27.86	Horizontal
4	12415.7917	46.90	39.15	-38.39	47.66	74.00	26.34	Horizontal
5	17049.3333	45.32	39.10	-37.22	47.19	68.30	21.11	Horizontal
6	17994.7292	44.01	44.77	-36.99	51.78	74.00	22.22	Horizontal
7	17944.4167	33.80	44.47	-37.14	41.13	54.00	12.87	Horizontal

11ax(HE80)_TX_CH_58_Veritical

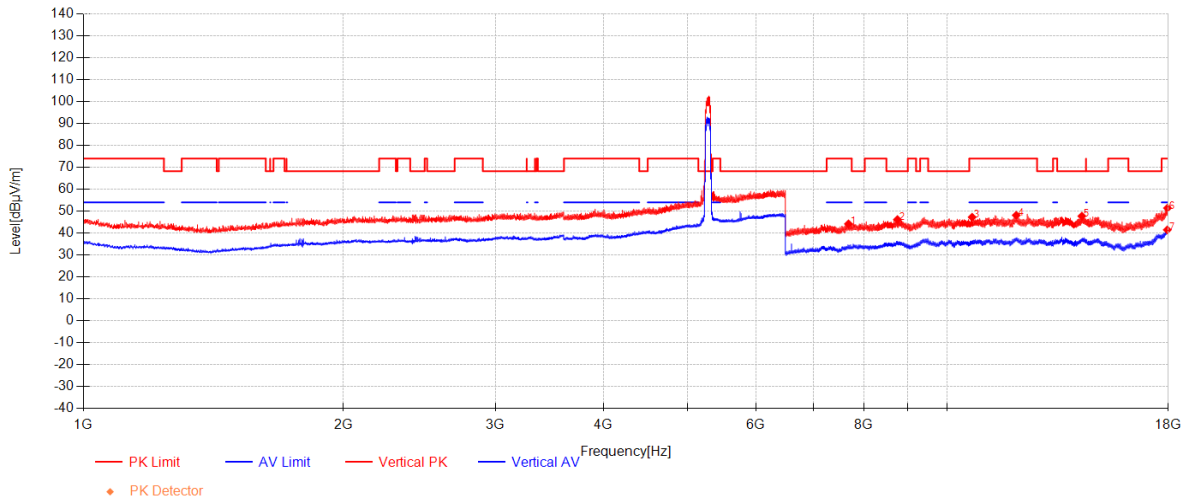


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7683.5417	52.92	36.36	-45.10	44.19	74.00	29.81	Vertical
2	8753.5208	52.84	37.13	-43.78	46.19	68.30	22.11	Vertical
3	10681.2083	48.87	39.28	-40.88	47.27	74.00	26.73	Vertical
4	12013.7708	47.42	39.39	-38.68	48.14	74.00	25.86	Vertical
5	14308.9792	46.25	40.27	-38.77	47.75	68.30	20.55	Vertical
6	17977	43.81	44.66	-37.04	51.43	74.00	22.57	Vertical
7	17966.9375	33.95	44.60	-37.07	41.48	54.00	12.52	Vertical

11ax(HE80)_TX_CH_106_Horizontal

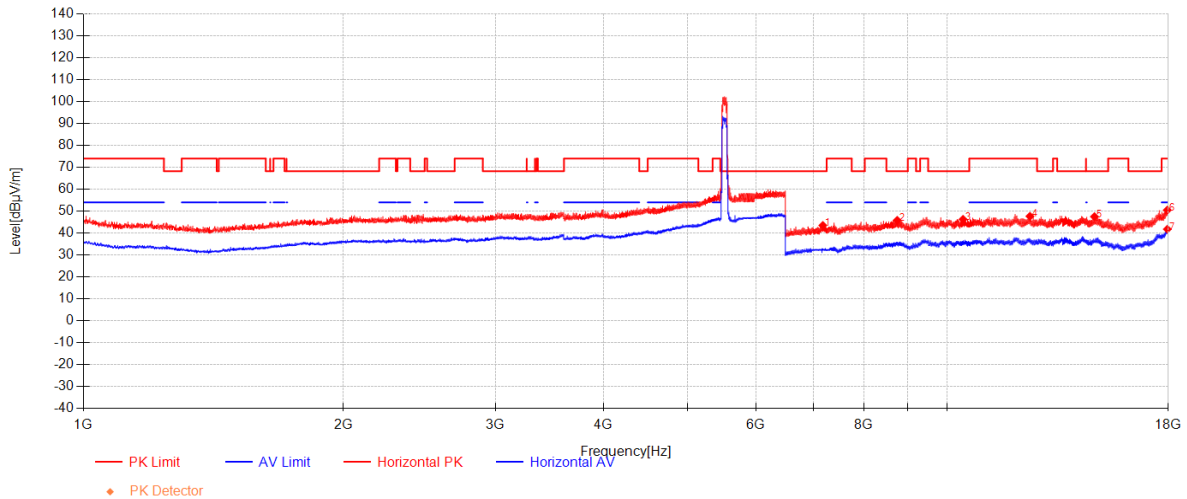


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7175.625	53.31	35.82	-45.61	43.52	68.30	24.78	Horizontal
2	8748.7292	52.49	37.12	-43.77	45.84	68.30	22.46	Horizontal
3	10425.8125	48.29	39.10	-41.07	46.31	68.30	21.99	Horizontal
4	12460.8333	47.17	39.12	-38.61	47.68	74.00	26.32	Horizontal
5	14796.7708	44.87	40.22	-37.56	47.53	68.30	20.77	Horizontal
6	17965.0208	42.98	44.59	-37.08	50.49	74.00	23.51	Horizontal
7	17969.3333	34.24	44.62	-37.07	41.79	54.00	12.21	Horizontal

11ax(HE80)_TX_CH_106_Verical

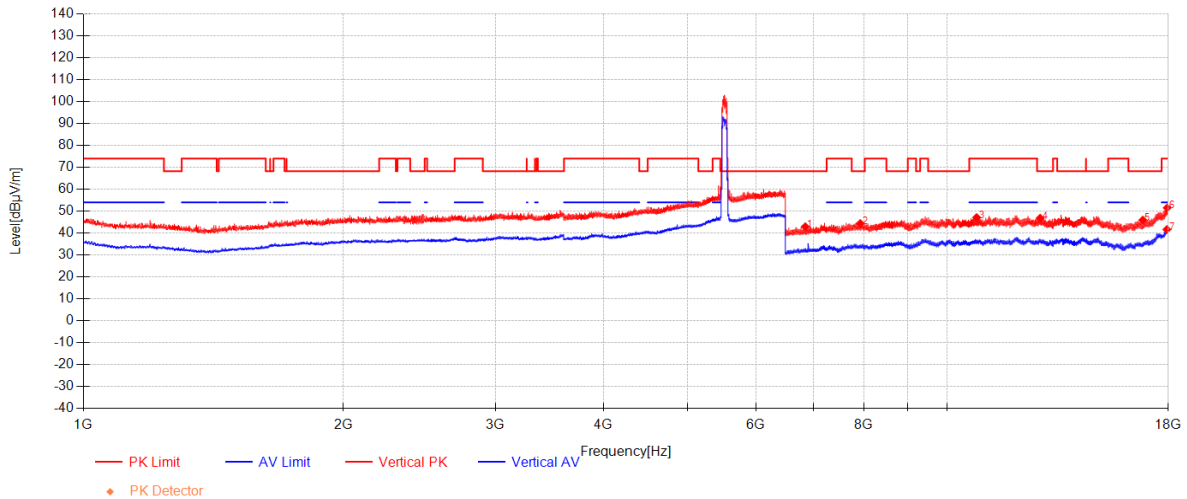


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6847.875	54.03	35.26	-46.38	42.91	68.30	25.39	Vertical
2	7929.3542	52.85	36.31	-44.76	44.40	68.30	23.90	Vertical
3	10810.5833	48.16	39.37	-40.42	47.11	74.00	26.89	Vertical
4	12802.9583	47.15	38.92	-39.25	46.81	68.30	21.49	Vertical
5	16830.8333	44.77	38.73	-37.53	45.97	68.30	22.33	Vertical
6	17961.6667	44.06	44.57	-37.09	51.54	74.00	22.46	Vertical
7	17946.8125	34.31	44.48	-37.13	41.66	54.00	12.34	Vertical

11ax(HE80)_TX_CH_122_Horizontal

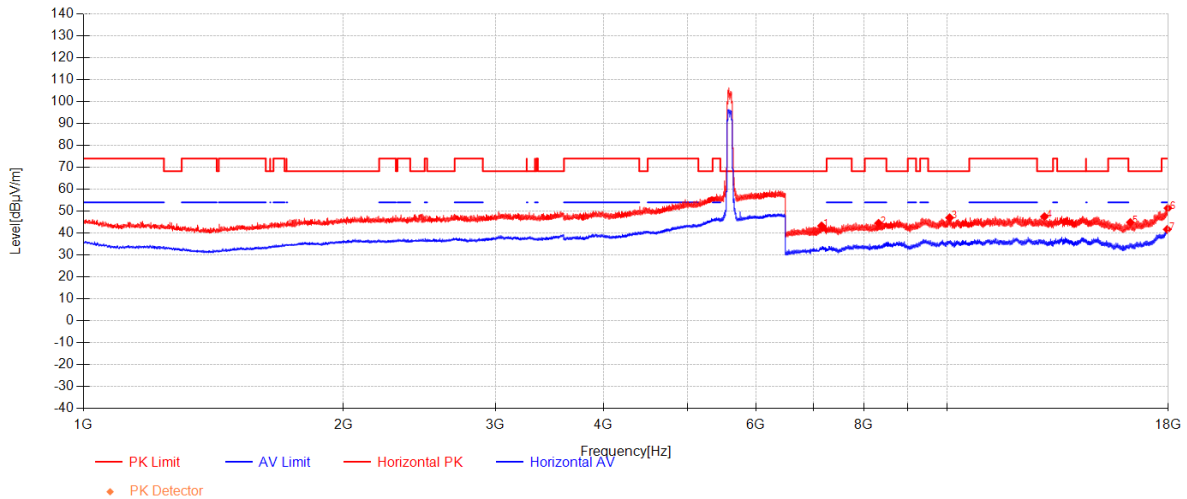


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7150.7083	53.31	35.77	-45.78	43.31	68.30	24.99	Horizontal
2	8325.1458	52.37	36.66	-44.51	44.52	74.00	29.48	Horizontal
3	10059.7292	49.84	38.84	-41.67	47.01	68.30	21.29	Horizontal
4	12951.0208	47.34	38.83	-38.64	47.53	68.30	20.77	Horizontal
5	16283.1458	44.32	38.51	-37.95	44.88	68.30	23.42	Horizontal
6	17997.125	43.59	44.78	-36.99	51.38	74.00	22.62	Horizontal
7	17965.9792	34.18	44.60	-37.08	41.70	54.00	12.30	Horizontal

11ax(HE80)_TX_CH_122_Vertical

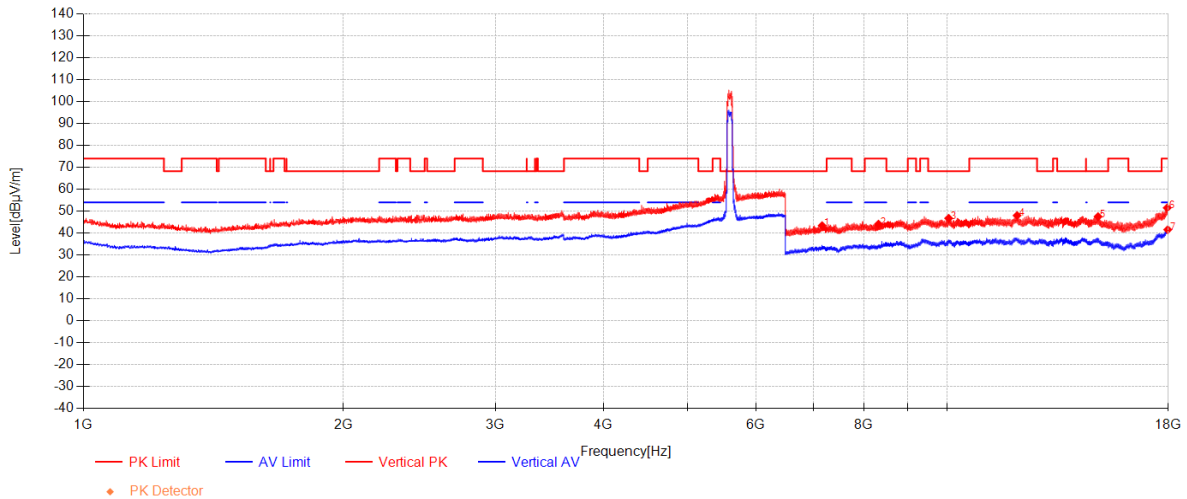

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7162.2083	53.33	35.79	-45.70	43.42	68.30	24.88	Vertical
2	8321.7917	51.97	36.65	-44.52	44.11	74.00	29.89	Vertical
3	10034.3333	49.64	38.82	-41.70	46.76	68.30	21.54	Vertical
4	12040.125	47.56	39.38	-38.90	48.04	74.00	25.96	Vertical
5	14939.5625	45.54	40.21	-38.20	47.55	68.30	20.75	Vertical
6	17965.9792	44.01	44.60	-37.08	51.53	74.00	22.47	Vertical
7	17989.4583	33.84	44.74	-37.01	41.57	54.00	12.43	Vertical

11ax(HE80)_TX_CH_155_Horizontal

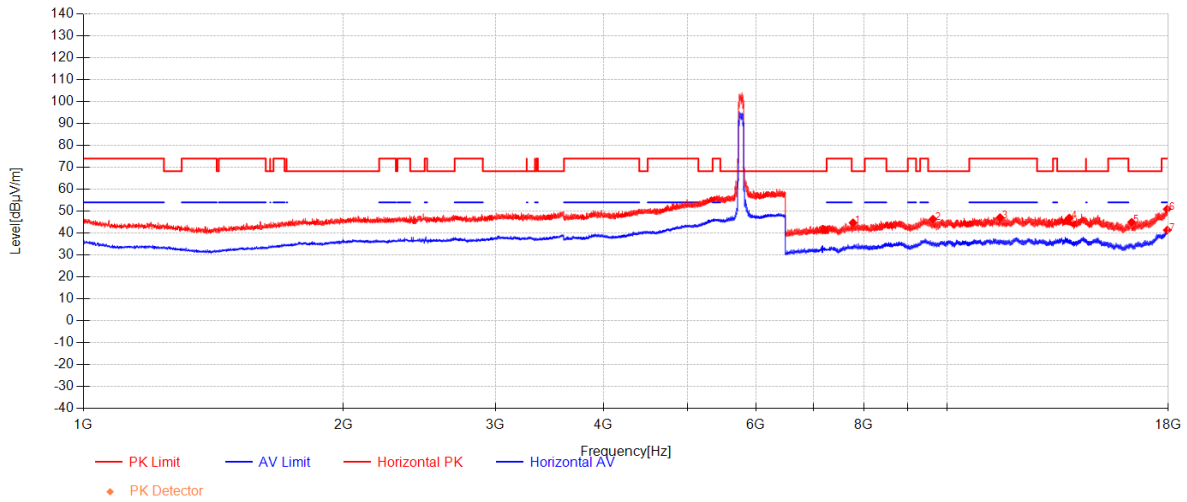

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7776.5	53.31	36.34	-44.96	44.70	68.30	23.60	Horizontal
2	9622.7292	49.92	38.27	-41.85	46.34	68.30	21.96	Horizontal
3	11507.2917	47.63	39.45	-40.03	47.05	74.00	26.95	Horizontal
4	13837	45.27	40.06	-38.45	46.87	68.30	21.43	Horizontal
5	16339.6875	44.31	38.54	-37.87	44.97	68.30	23.33	Horizontal
6	17962.625	43.47	44.58	-37.08	50.96	74.00	23.04	Horizontal
7	17964.5417	33.85	44.59	-37.08	41.36	54.00	12.64	Horizontal