



TEST REPORT

Report Number: C21T00125-SRD04-V00

Applicant	Shanghai Sunmi Technology Co.,Ltd.
Product Name	Wireless data POS System
Model Name	T5930
Brand Name	SUNMI
FCC ID	2AH25T5930

Industrial Internet Innovation Center (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in FCC Part15, ANSI C63.10, KDB 789033, KDB 905462.

Prepared by

Reviewed by

Approved by

Issue Date

2022-01-17

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

NOTE

1. This report is invalid without the signature of the writer, reviewer and authorizer.
2. This report is invalid if altered.
3. For the benefit of clients, if you have any objection to the report, please inform the testing laboratory within 15 days from the date of receiving this report.
4. Samples in the test report are provided by the client. The test results are only applicable to the samples received by the laboratory. The source information of samples (such as sample sender, manufacturer, etc.) in the test report is provided by the client, and the laboratory is not responsible for its authenticity.
5. The test report does not represent the identification of a product by a certification body or an authorized body.
6. This report is only valid as a whole, and no part of the report can be reproduced without the written approval of Industrial Internet Innovation Center (Shanghai) Co., Ltd.
7. Without the written permission of testing institutions and accreditation bodies, this report cannot be used in part or in whole for publicity or product introduction.
8. "N/A" is used in this report to indicate that it is not applicable or available.
9. Industrial Internet Innovation Center (Shanghai) Co., Ltd. assumes the legal responsibility for the report.
10. The measurement uncertainty is not taken into account when deciding conformity, and the results of measurement (or the average of measurement results) are directly used as the criterion for the stating conformity.

Test Laboratory:

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

Add: Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China

Tel: +86 21 68866880



Revision Version

Report Number	Revision	Date	Memo
C21T00125-SRD04-V00	00	2022-01-17	Initial creation of test report

CONTENTS

1. TEST LABORATORY	5
1.1. TESTING LOCATION	5
1.2. TESTING ENVIRONMENT	5
1.3. PROJECT INFORMATION	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4. REFERENCE DOCUMENTS	8
4.1. REFERENCE DOCUMENTS FOR TESTING	8
4.2. REFERENCE INFORMATION FROM CLIENT	8
5. TEST SUMMARY	9
5.1. SUMMARY OF TEST RESULTS	9
6. MEASUREMENT RESULTS.....	11
6.1. TRANSMITTER SPURIOUS EMISSION	13
7. TEST EQUIPMENT LIST	17
7.1. RADIATED EMISSION TEST SYSTEM	17
ANNEX A: MEASUREMENT UNCERTAINTY	18
ANNEX B: ACCREDITATION CERTIFICATE	19

1. Test Laboratory

1.1. Testing Location

Company Name	Industrial Internet Innovation Center (Shanghai) Co., Ltd.
Address	Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China
FCC Registration No.	CN1177

1.2. Testing Environment

Normal Temperature	15°C~35°C
Relative Humidity	30%RH~60%RH
Supply Voltage	120V/60Hz

1.3. Project Information

Project Leader	Wang Wenwen
Testing Start Date	2021-10-22
Testing End Date	2022-01-17



2. Client Information

2.1. Applicant Information

Company Name	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	+86 18501703215

2.2. Manufacturer Information

Company Name	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	+86 18501703215

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Product Name	Wireless data POS System
Model name	T5930
Supported Radio Technology and Bands	GSM850/GSM900/GSM1800/GSM1900 WCDMA Band I/II/IV/V LTE Band FDD2/3/4/7/17/28 BT4.0, BLE WLAN 802.11b,g,n WLAN 802.11a,n GPS/GLONASS
Hardware Version	V3
Software Version	ZAP1522_769_DEV_dailybuild_20181205071714_userdebug_DCC
WLAN Frequency	UNII 1: 5150MHz-5250MHz
WLAN type of modulation	OFDM
FCC ID	2AH25T5930
Extreme Temperature	-15°C~55°C
Nominal Voltage	7.60V
Extreme High Voltage	8.70V
Extreme Low Voltage	6.80V

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of Receipt
N01	N/A	V3	ZAP1522_769_DEV_dailybuild_20181205071714_userdebug_DCC	2021-10-22

*EUT ID: is internally used to identify the test sample in the lab.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
AE1	RF cable	N/A	N/A

*AE ID: is internally used to identify the test sample in the lab.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2020
ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
KDB 789033 D02	Information Infrastructure (U-NII) Devices - Part 15, Subpart E	2017
KDB 905462 D02	COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION	2016

4.2. Reference Information from client

Information of the test sample provided by the client.

5. Test Summary

5.1. Summary of Test Results

Measurement Items	Sub-clause of Part15C	Verdict
Maximum Output Power	15.407(a)	N/A
Power Spectral Density	15.407(a)	N/A
99% Occupied Bandwidth	N/A	N/A
-26dB	15.407(a)	N/A
Band edge compliance	15.407(b)	Pass
Transmitter spurious emissions radiated	15.407(b)	Pass
Spurious emissions radiated < 30 MHz	15.209 & 15.407(b)	N/A
Spurious emissions conducted < 30 MHz	15.407(b)	N/A
Frequency Stability	15.407(g)	N/A
Transmit Power Control	15.407(h)	N/A

Note: All the test data for each data were verified, but only the worst case was reported.

Test Conditions

Tnom	Normal Temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	25°C
Voltage	Vnom	7.60 V
Humidity	Hnom	48%
Air Pressure	Anom	1010hPa

5.2. Statements

The T5930, manufactured by Shanghai Sunmi Technology Co., Ltd. is a variant product for testing.

This project is a variant project based on the original report C21T00009-SRD04-V01, We tested the worst case radiation data, and the test data of the worst mode was recorded in the report. The rest of the data are reference prototype report data.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 5.1.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

6. Measurement Results

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

6.1. Band Edges - Radiated

Measurement Limit:

Standard	Limit (dB μ V/m)	
	Peak	Average
FCC 47 CFR Part 15.209	68.2	54


The measurement is made according to KDB 789033.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Result:

Mainly Supply

U-NII-1:

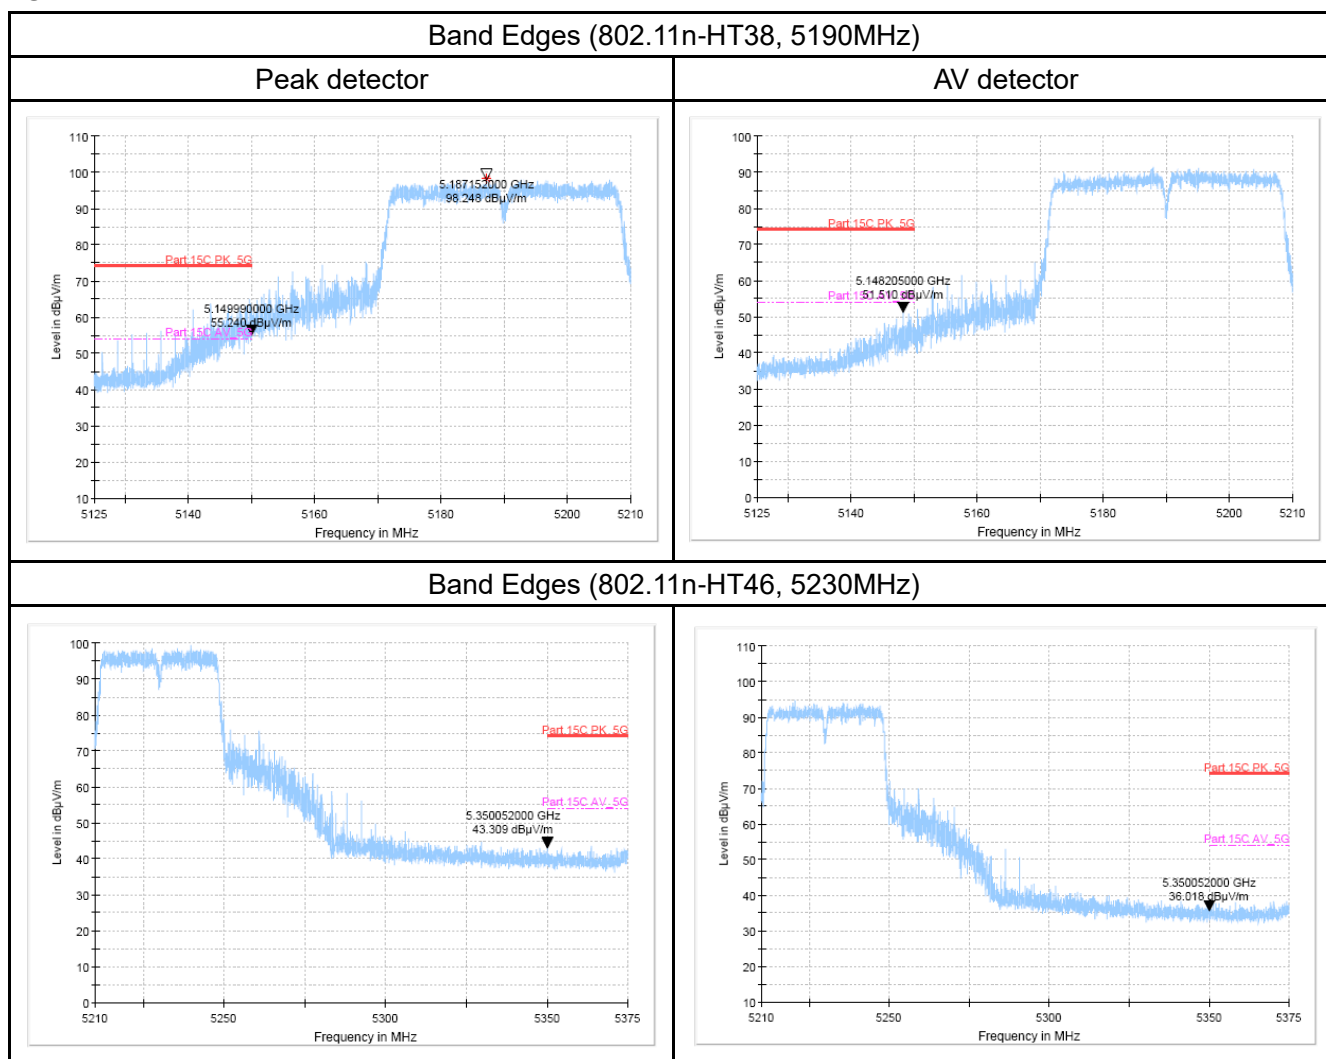

6.2. Transmitter Spurious Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

The measurement is made according to KDB 789033

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep= AUTO

Limit in restricted band:

Frequency of emission (MHz)	Field strength(dBμV/m)	Measurement distance(m)
0.009-0.490	129-94	3
0.490-1.705	74-63	3
1.705-30	70	3
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3

Note: for frequency range below 960MHz, the limit in 15.209 is defined in 10m test distance. The limit used above is calculated from 10m to 3m

Modulation type and data rate tested (Only worst case result is given below):


U-NII-1:


Mode	Data rate	Channel
802.11n-HT40	MCS0	46(5230MHz)

Measurement Results:

Mainly Supply

U-NII-1:

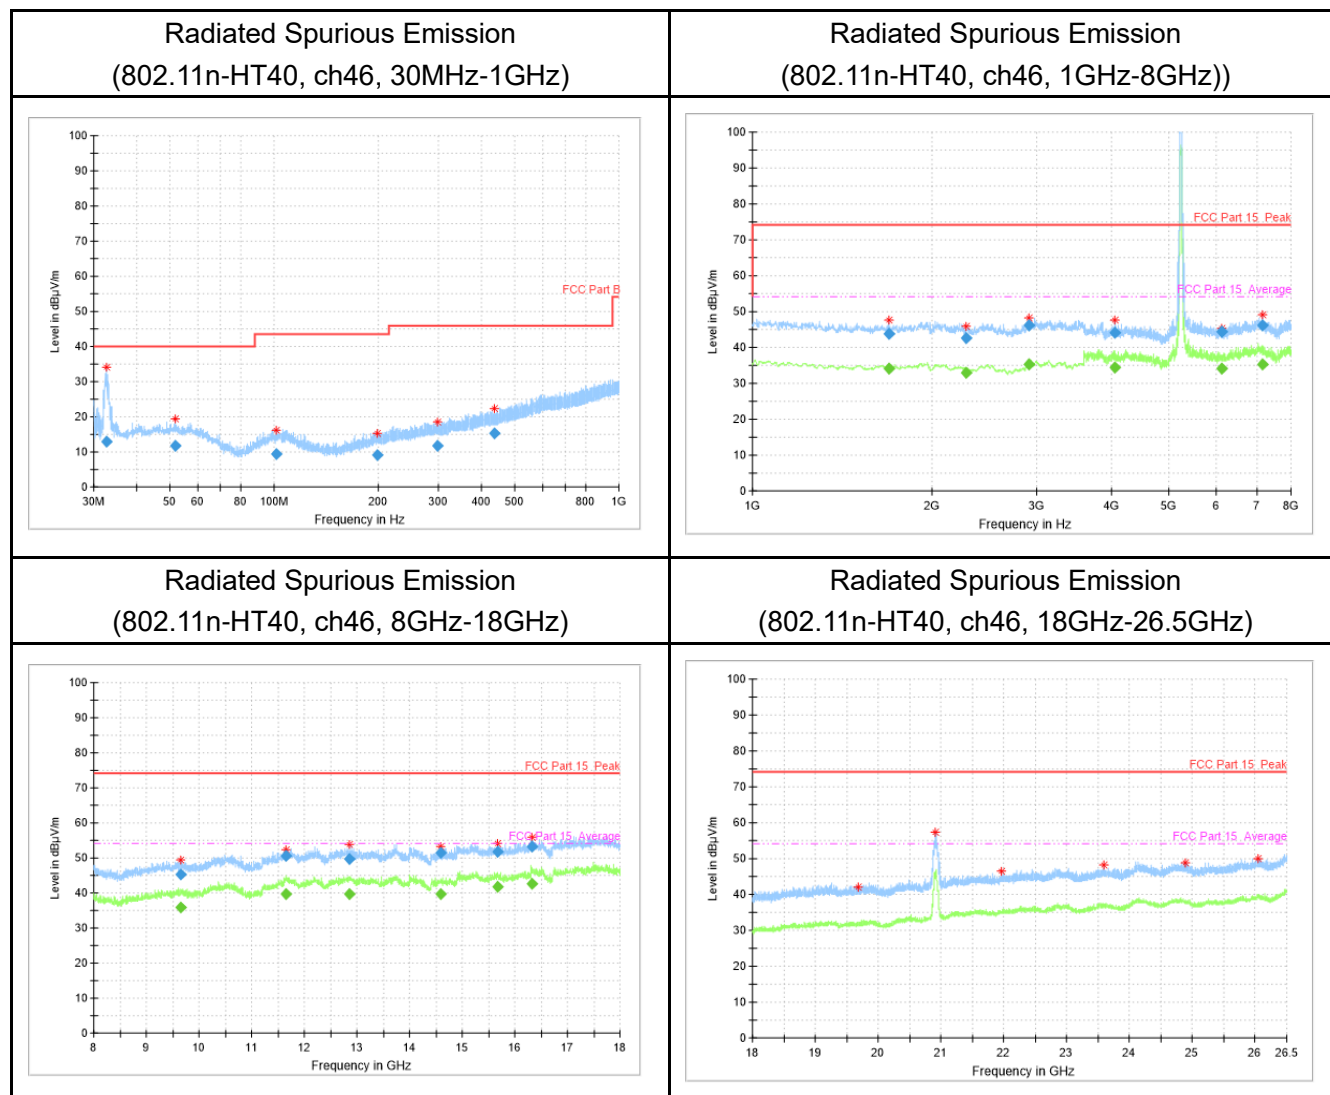

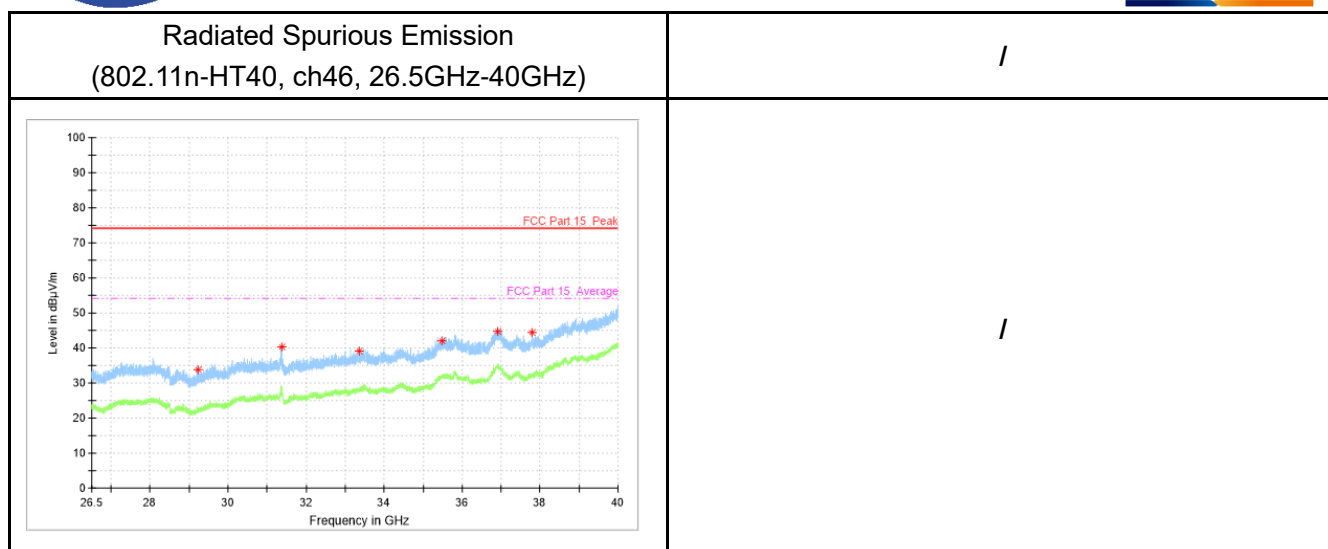

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier gain}$$

802.11n

Ch46 30MHz~1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
32.8	13.08	-14.2	27.28	V
51.7	11.79	-12	23.79	V
101.8	9.47	-13.3	22.77	H
198.9	9.12	-14	23.12	H
298.0	11.75	-10.9	22.65	H
436.5	15.41	-7.7	23.11	V

Ch46 1GHz~8GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
1695.8	43.91	2.2	41.71	V
2279.2	42.62	1.6	41.02	V
2910.8	46.07	1.6	44.47	V
4059.0	44.13	1.3	42.83	V
6119.4	44.44	2.6	41.84	V

7165.0	46.22	4	42.22	V
--------	-------	---	-------	---

Ch46 8GHz~18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
9660.6	45.27	5.7	39.57	V
11661.4	50.53	9.9	40.63	V
12858.4	49.8	11.1	38.7	V
14594.2	51.36	12.7	38.66	V
15679.0	51.69	14.6	37.09	V
16322.2	53.32	16.2	37.12	V

Ch46 18GHz~26.5GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
19679.6	42.03	-4.5	46.53	V
20917.2	57.28	-2.5	59.78	V
21968.6	46.53	-2.1	48.63	V
23592.2	48.36	-1.3	49.66	V
24887.6	48.97	-0.2	49.17	V
26043.6	50.12	-0.9	51.02	H

Ch46 26.5GHz~40GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
29233.8	33.76	-0.4	34.16	H
31376.2	40.37	0.5	39.87	V
33366.1	39.04	4.7	34.34	V
35491.0	42.2	6.2	36	V
36908.5	44.8	8.4	36.4	H
37806.2	44.45	8.4	36.05	H

7. Test Equipment List

7.1. Radiated Emission Test System

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2021-05-10	1 year
2	EMI Test Receiver	ESU40	100307	R&S	2021-05-10	1 year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2020-02-28	2 years
4	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	2020-02-28	2 years
5	2-Line V-Network	ENV216	101380	R&S	2021-05-10	1 year
6	EMI Test Software	EMC32 V 9.15.00	N/A	R&S	N/A	N/A

Anechoic chamber

Fully anechoic chamber by ETS.

Annex A: Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in 3IN documents .
The detailed measurement uncertainty is defined in 3IN documents.

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	5100MHz-5875MHz	95%	1.024dB
Peak Power Spectral Density	5100MHz-5875MHz	95%	1.024dB/MHz
Conducted Emission	30MHz-2GHz	95%	0.90dB
Conducted Emission	2GHz-3.6GHz	95%	0.88dB
Conducted Emission	3.6GHz-8GHz	95%	0.96dB
Conducted Emission	8GHz-20GHz	95%	0.94dB
Conducted Emission	20GHz-22GHz	95%	0.88dB
Conducted Emission	22GHz-26GHz	95%	0.86dB
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	5.66dB
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	4.98dB
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	5.06dB
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	5.20dB

Annex B: Accreditation Certificate



*****END OF REPORT*****